

Passive Optical Splitters / Combiners

The **OSP 1812**, **OSP 1812 M** and **OSP 1814** are compact optical splitters that are used to split or combine a fiber optic signal.

Three versions are available:

OSP 1812

One input (100%) and two outputs (each 50%)


OSP 1812 M

One input (100%) and two outputs, one at 90% power and a second at 10% power. Typically used as a monitoring output.


OSP 1814

One input (100%) and four outputs (each 25%)


These yellobriks are passive in operation, which means they require no power. They can be used as standalone modules or mounted into the yellobrik RFR 1018 19" rack frame.

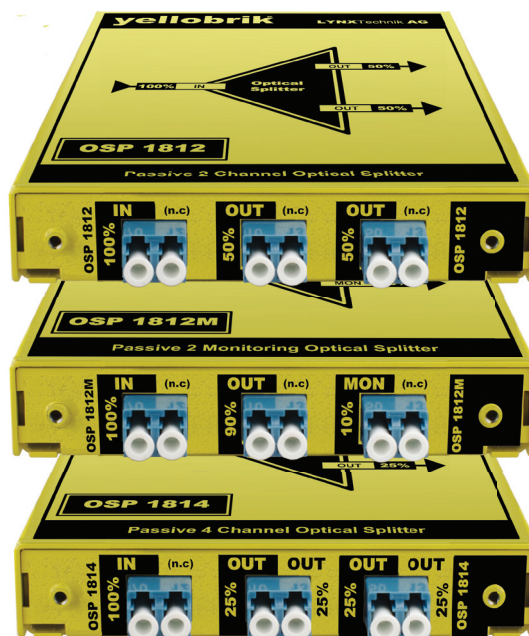


OSP 1812

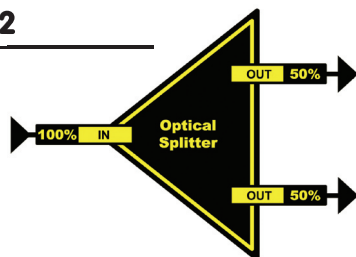

OSP 1812 M

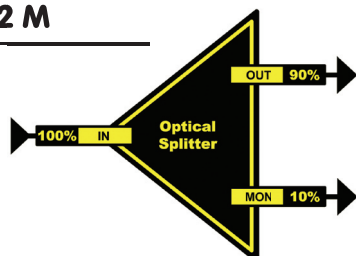

OSP 1814

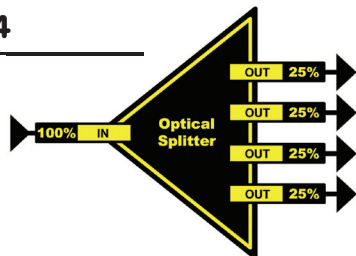

Technical Specifications

OSP 1812
Optical I/O 1 x Fiber input
2 x Fiber outputs
Split Ratio: 50% / 50%

OSP 1812 M
Optical I/O 1 x Fiber input
2 x Fiber outputs
Split Ratio: 90% / 10%

OSP 1814
Optical I/O 1 x Fiber input
4 x Fiber outputs
Split Ratio: 25% / 25% / 25% / 25%

Optical Connections LC/PC (singlemode)
Operating wavelength 1260nm - 1650nm

Performance Insertion loss (including connector)
OSP 1812 and OSP 1812M = 4.0 dB
OSP 1814 = 7.6dB

Polarization dependant loss: max 0.3dB

Return loss: > 55dB

Directivity: > 55dB

Max input power: 500mW

Power None required (passive operation)

Size L: 110mm x W: 100mm x H:19mm (4.33" x 3.93" x 0.75")

Model # OSP 1812, OSP 1812 M, OSP 1814

Includes Module and plastic transport case

Specifications subject to change