

배 부 처

HDW-91-003A


A horizontal line representing a beam is shown. A solid black triangle is positioned below the line on the right side, representing a support.

TOLERANCES—UNLESS OTHERWISE SPECIFIED					
WORK		TURN PCH'G DIST. OF HOLE STR.	M.L.G. DE CSTR. PRN.CSTG DRWN.	SWT MELT HSG CTS.	CSTG. FORC.
SIZE	TO INCL.				
1	4	± 0.1	± 0.2	± 0.3	± 0.5
4	16	± 0.2	± 0.3	± 0.5	± 0.7
16	63	± 0.3	± 0.4	± 0.7	± 0.9
63	250	± 0.4	± 0.6	± 1.2	± 1.3
250	500	± 0.6	± 0.8	± 1.5	± 1.8
500	1000	± 0.8	± 1.0	± 2.0	± 2.5
1000	2000	± 1.2	± 1.5	± 2.5	± 3.0
ANGLE		± .25°	± .5°	± 1.0°	± 2.2°


표 준	DRWN BY 제 도	DSND BY 설 계	CHKD BY 검 토	APPD BY 승 인
임 시				
보 류				

A3 (420mm X 297mm)

배 부 처

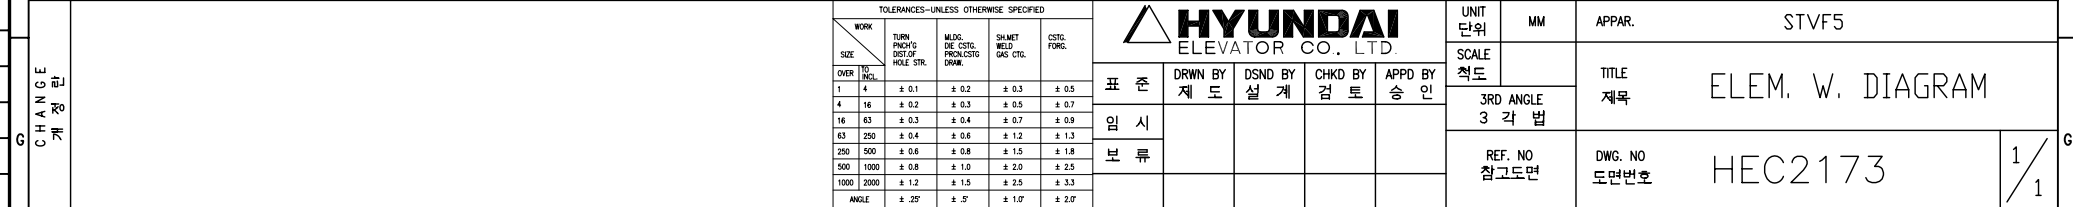

배 부 처

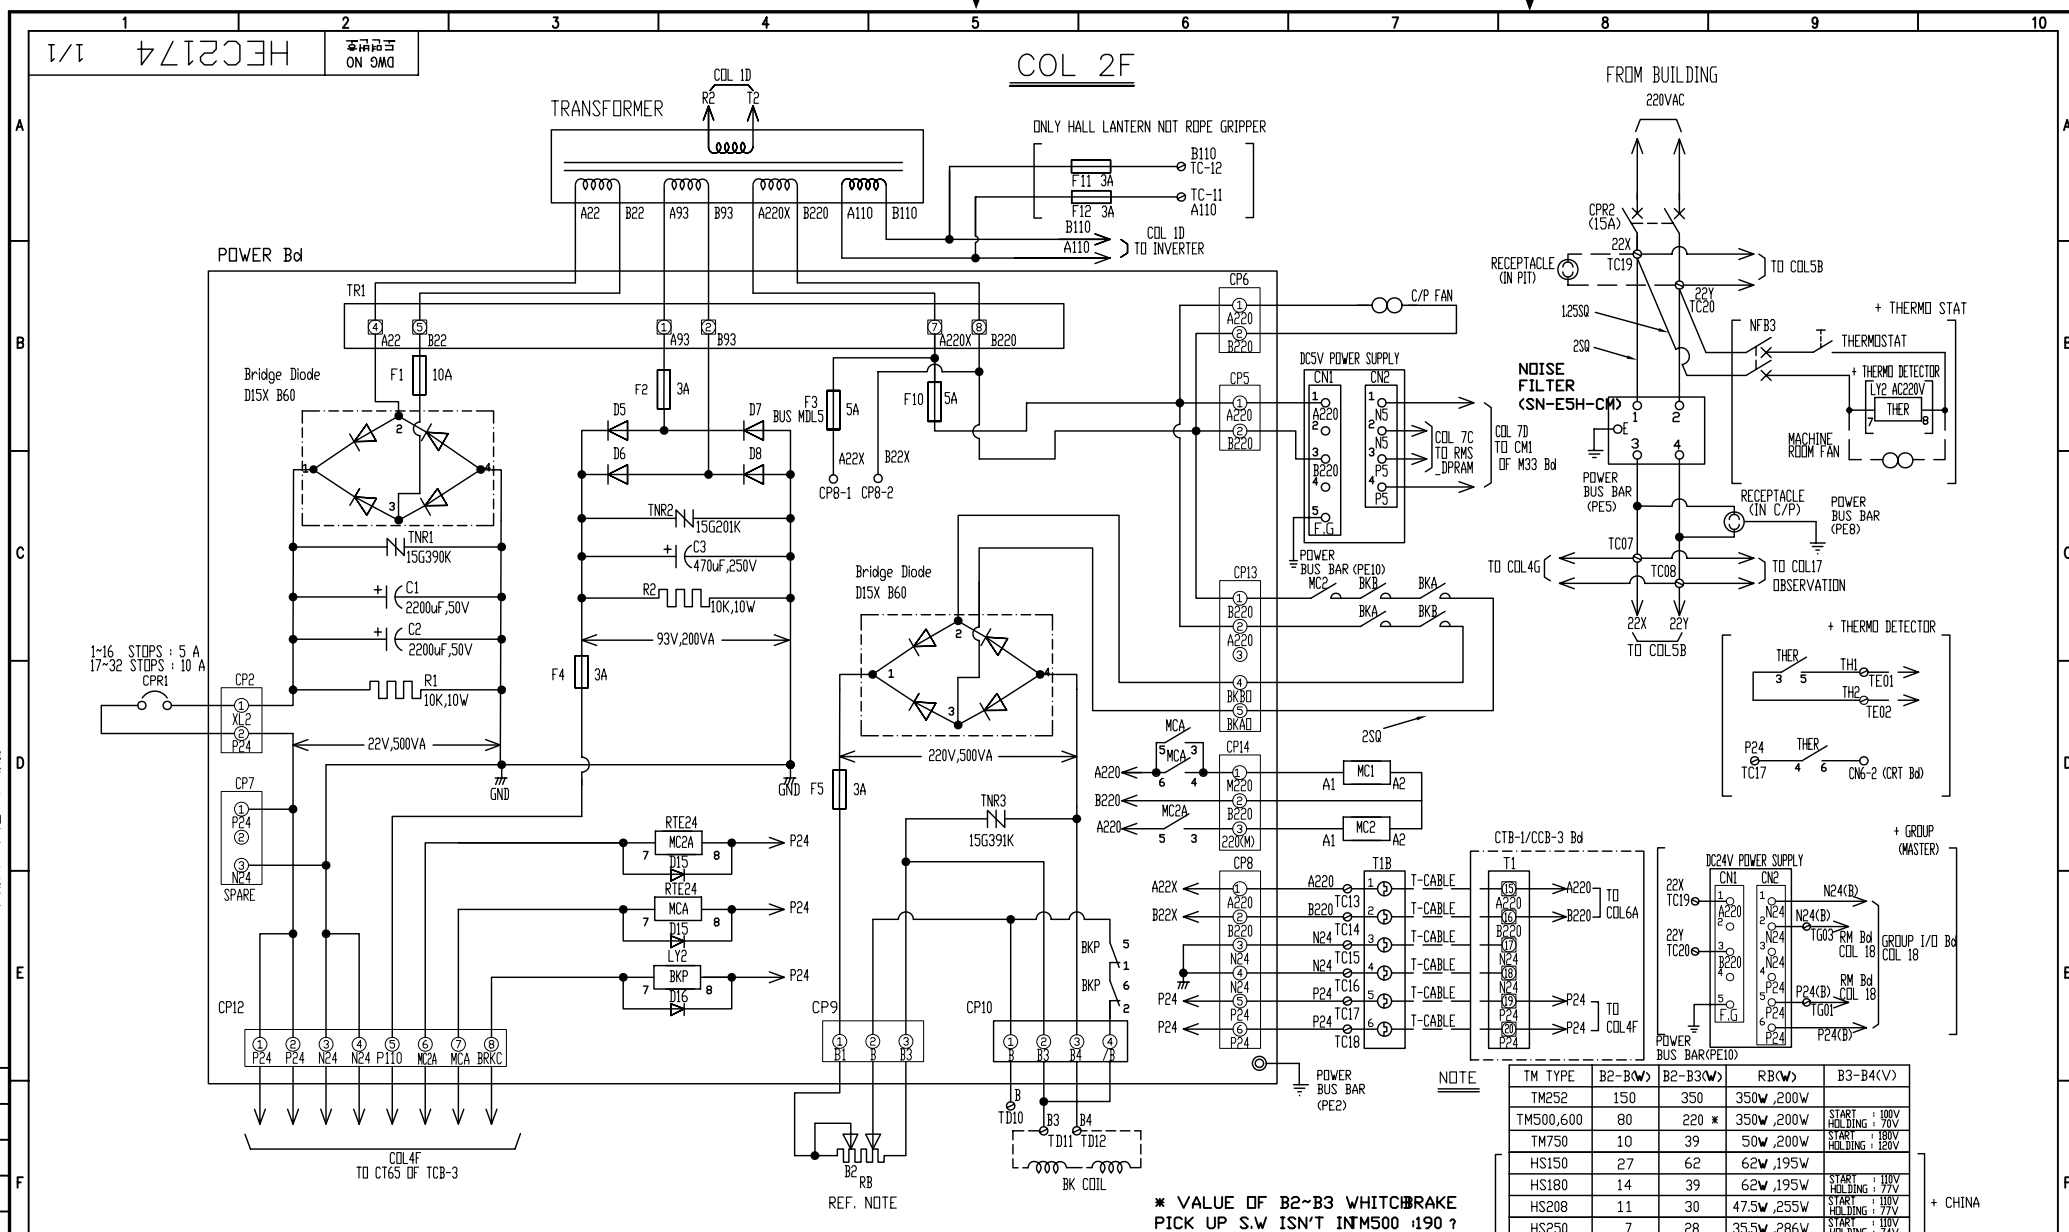

NOTE	TM TYPE	B2-B4(W)	B2-B3(W)	RB(W)	B3-B4(V)	
	TM252	150	350	350W, 200W		
	TM500,600	80	220 *	350W, 200W	START HOLDING : 180V HOLDING : 170V	
	TM750	10	39	50W, 200W	START HOLDING : 180V HOLDING : 120V	
	HS150	27	62	62W, 195W		
	HS180	14	39	62W, 195W	START HOLDING : 180V HOLDING : 170V	
	HS208	11	30	47.5W, 255W	START HOLDING : 170V HOLDING : 170V	
	HS250	7	28	35.5W, 286V	START HOLDING : 180V HOLDING : 170V	

TOLERANCES—UNLESS OTHERWISE SPECIFIED						
WORK		TURN DNG. DIST. OF HOLE STR.	MILDG. DNG. PRON./CTSG DRAWN	SH/MET WELD GAS CTG.	CSTG. FORG.	
SIZE	TO INCL.					
OVER 1	4	± 0.1	± 0.2	± 0.3	± 0.5	
4	16	± 0.2	± 0.3	± 0.5	± 0.7	
16	63	± 0.3	± 0.4	± 0.7	± 0.9	
63	250	± 0.4	± 0.6	± 1.2	± 1.3	
250	500	± 0.6	± 0.8	± 1.5	± 1.8	
500	1000	± 0.8	± 1.0	± 2.0	± 2.5	
1000	2000	± 1.2	± 1.5	± 2.5	± 3.3	
ANGLE		± .25°	± .5°	± 1.0°	± 0.7°	



HYUNDAI
ELEVATOR CO., LTD.

표 준	DRWN BY 제 도	DSND BY 설 계	CHKD BY 검 토	APPD BY 승 인
임 시				
보 류				

UNIT 단위	MM	APPAR.	STVF5
SCALE 척도		TITLE 제목	ELEM. W. DIAGRAM
3RD ANGLE 3 각 법			
REF. NO 참고도면	DWG. NO 도면번호	HEC2174	1 / 1

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
허가없이 복사할 수 없습니다

배 부 제

F

CHANGE
개 정 린

G

1/1 HEC2175

ON 9MD


TCB-3 Bd

COL 3D

CCB-3 Bd

DPB-3 Bd

HALL CHIME Bd

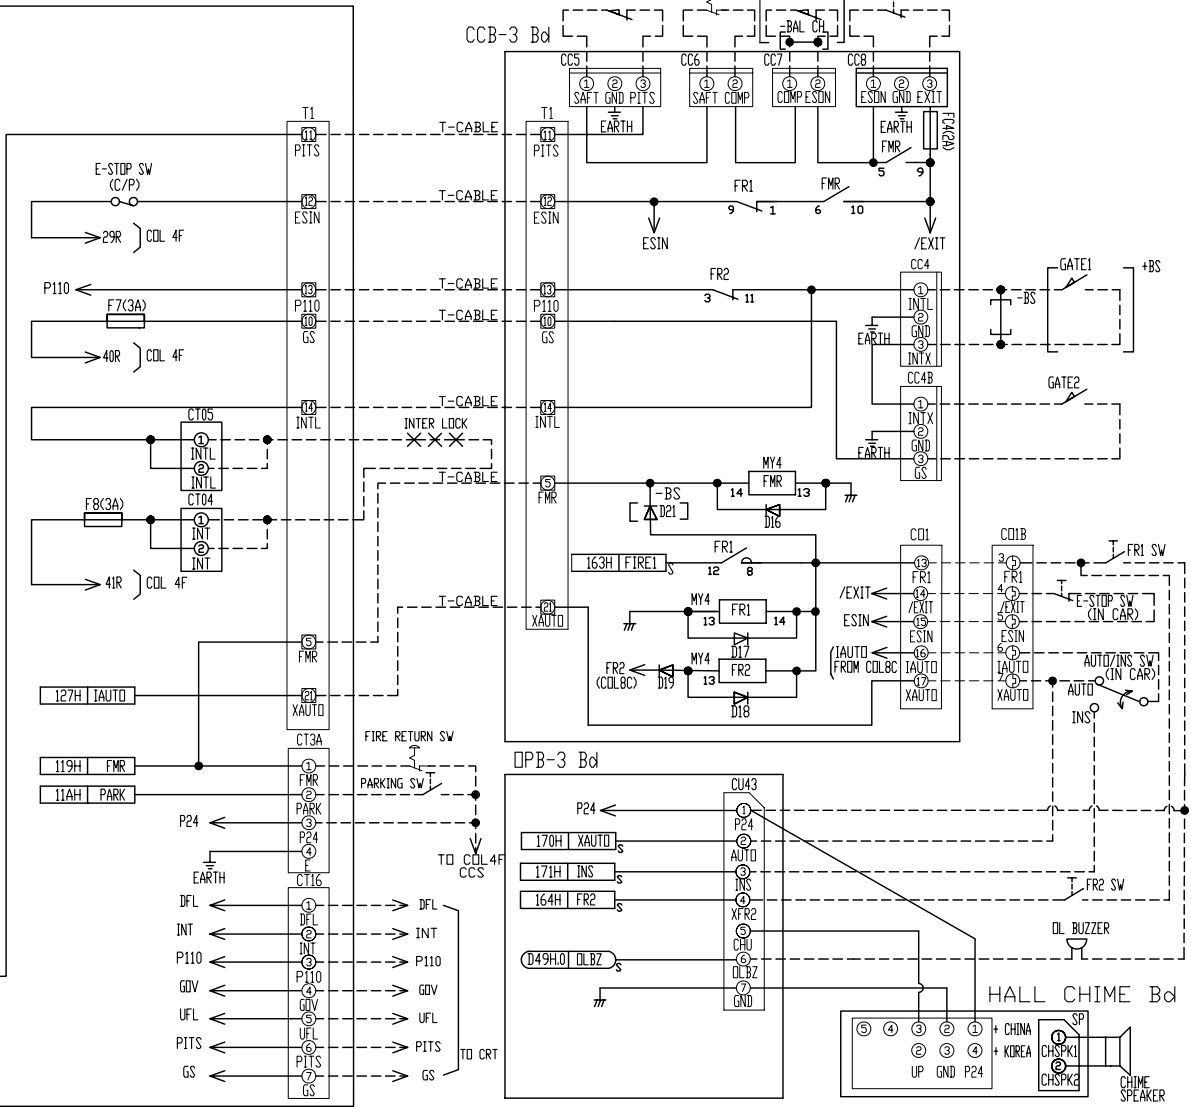

TOLERANCES-UNLESS OTHERWISE SPECIFIED

WORK	SIZE	TURN PITCH'S DIST. OF HOLE STR.	MOLD. DIE CTS. PROL/CSTO DOWN	SWMET WELD GAS CTS.	CSTO FORG.
OVER	TO				
1	4	± 0.1	± 0.2	± 0.3	± 0.5
4	16	± 0.2	± 0.3	± 0.5	± 0.7
16	63	± 0.3	± 0.4	± 0.7	± 0.9
63	250	± 0.4	± 0.6	± 1.2	± 1.3
250	500	± 0.6	± 0.8	± 1.5	± 1.8
500	1000	± 0.8	± 1.0	± 2.0	± 2.5
1000	2000	± 1.2	± 1.5	± 2.5	± 3.3
ANGLE		± .25°	± .5°	± 1.0°	± 2.0°

HYUNDAI
ELEVATOR CO., LTD.

표	DRWN BY	DSND BY	CHKD BY	APPD BY
제	도	설	검	승
인				
리				


UNIT 단위	MM	APPAR.	STVF5
SCALE 척도		TITLE 제목	ELEM. W. DIAGRAM
3RD ANGLE 3 각 법		DWG. NO 도면번호	HEC2175
REF. NO 참고도면			1/1

[illegible]


1. AFTER CONNECT THE JUMPER CABLE(CT51) , BRAKING CAN NOT BE FINISHED .
IF YOU WANT BRAKING SYSTEM IS NORMAL OPERATION , PLEASE DISCONNECT
THE JUMPER CABLE(CT51) . (REFER TO DWG NO : 259C173)
2. AFTER DISCONNECT THE JUMPER CABLE(CT51) , ROPE GRIPPER SYSTEM CAN
NORMAL OPERATION .



UNIT 단위	MM	APPAR.	STVF5
SCALE 척도		TITLE 제목	ELEM. W. DIAGRAM
3RD ANGLE 3 각 법			
REF. NO 참고도면	DWG. NO 도면번호	HEC2194	1/1

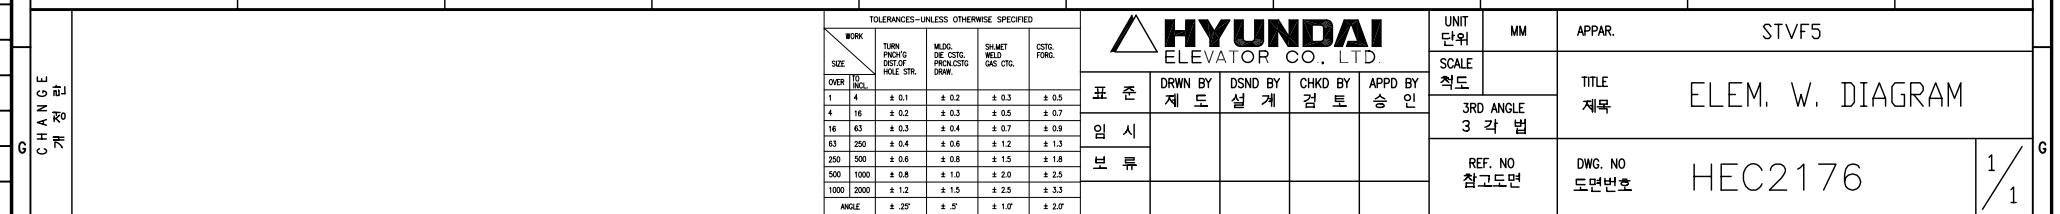[illegible]

배 부 처

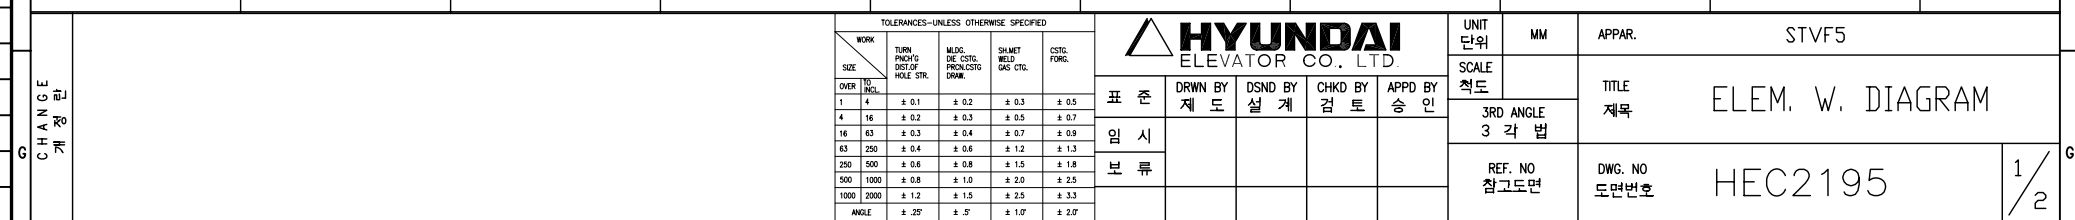

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
허가없이 복사할 수 없음

배 부 적


CHANGE
개 정 란

HDW-91-003A

HEC2031 1/1

DWG NO
ON GMD

COL 6A

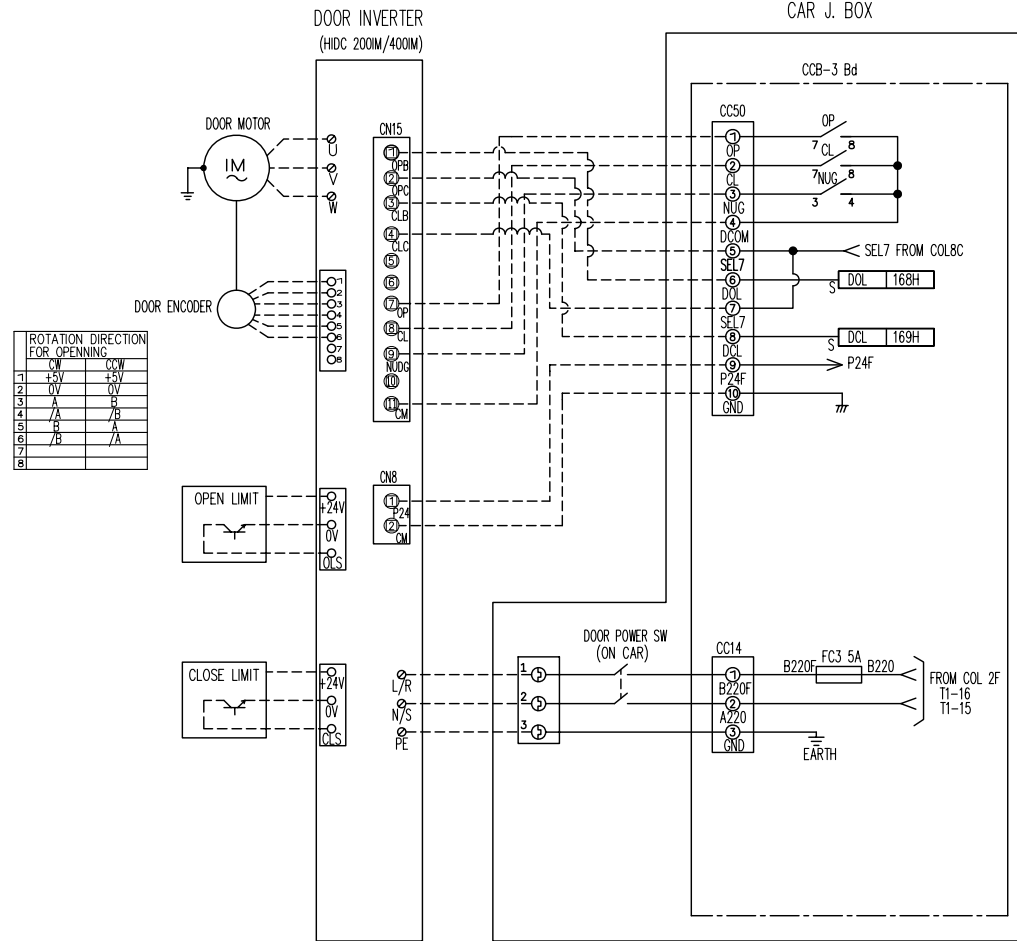


TOLERANCES-UNLESS OTHERWISE SPECIFIED				
WORK SIZE	TURN. PROX. OF DIA. OF HOLE STR.	MILD. DIE CAST. PRISM. CAST. DIMS.	SHMET. WELD. GAS CTG.	CAST. FORG.
OVER 10 INCL.				
1 4	± 0.1	± 0.2	± 0.3	± 0.5
4 16	± 0.2	± 0.3	± 0.5	± 0.7
16 63	± 0.3	± 0.4	± 0.7	± 0.9
63 250	± 0.4	± 0.6	± 1.2	± 1.3
250 500	± 0.6	± 0.8	± 1.5	± 1.8
500 1000	± 0.8	± 1.0	± 2.0	± 2.5
1000 2000	± 1.2	± 1.5	± 2.5	± 3.3
ANGLE	± .25°	± .5°	± 1.0°	± 2.0°

HYUNDAI
ELEVATOR CO. LTD.


표 준	DRWN BY	DSND BY	CHKD BY	APPD BY
제 도	설 계	검 토	승 인	
임 시				
보 류				

UNIT	MM	APPAR.	STVF5
SCALE		TITLE	ELEM. W. DIAGRAM
척도	3RD ANGLE 3 각 법	DWG. NO	HEC2031
REF. NO	참고도면	도면번호	1/1

A3 (420mm X 297mm)

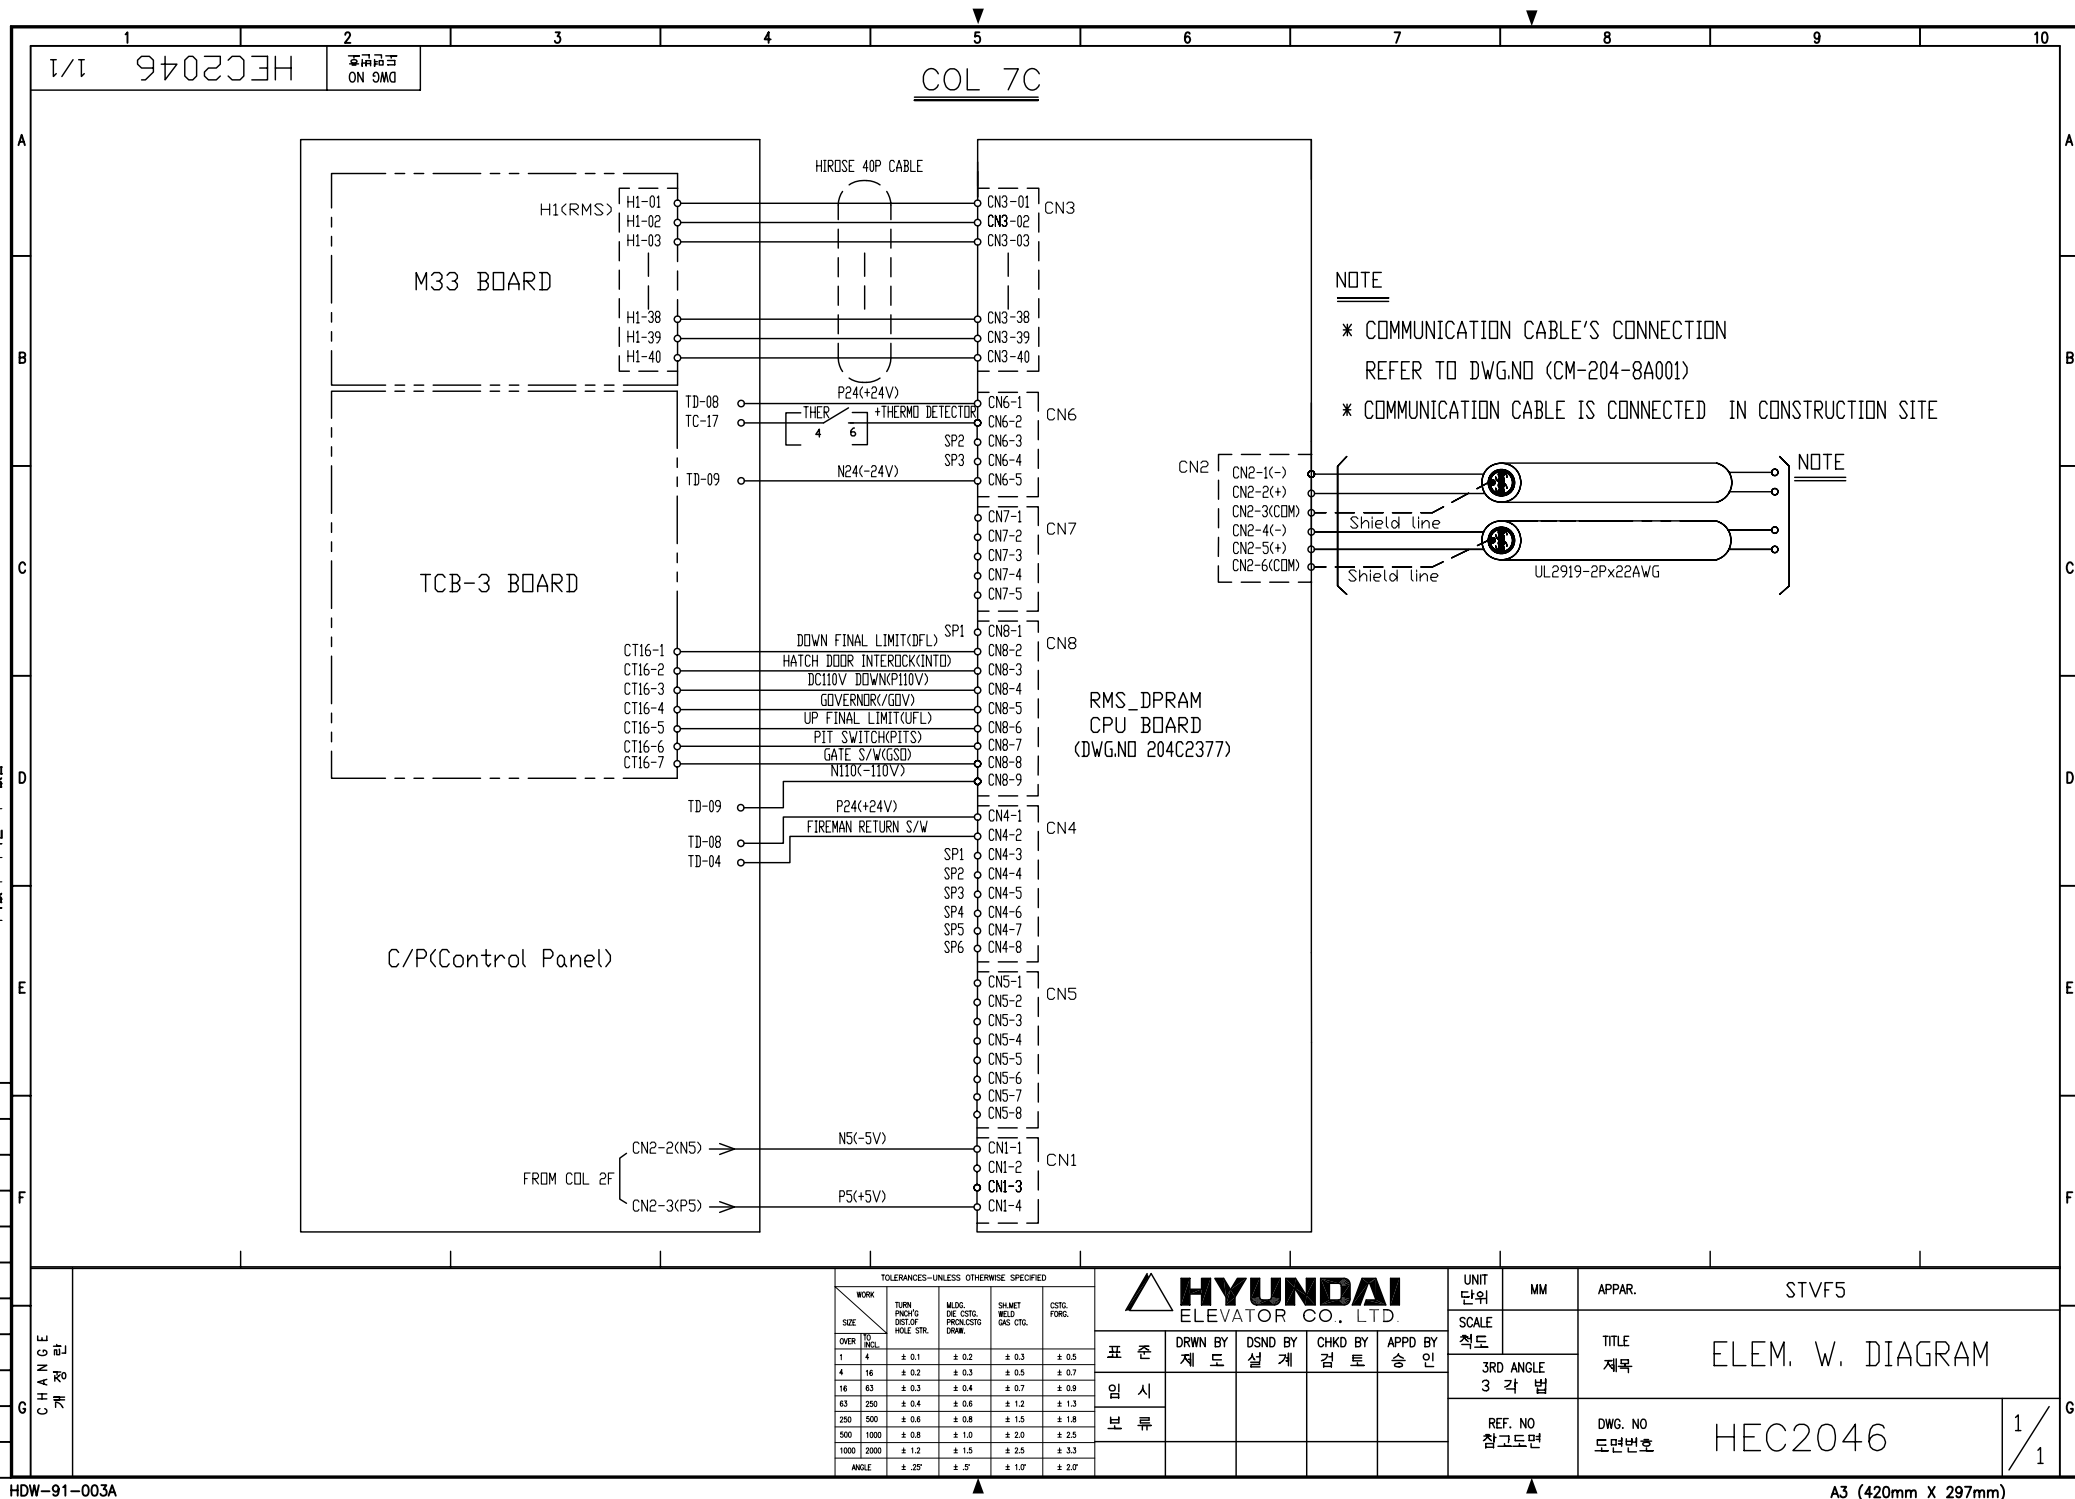[illegible]

배 부 처

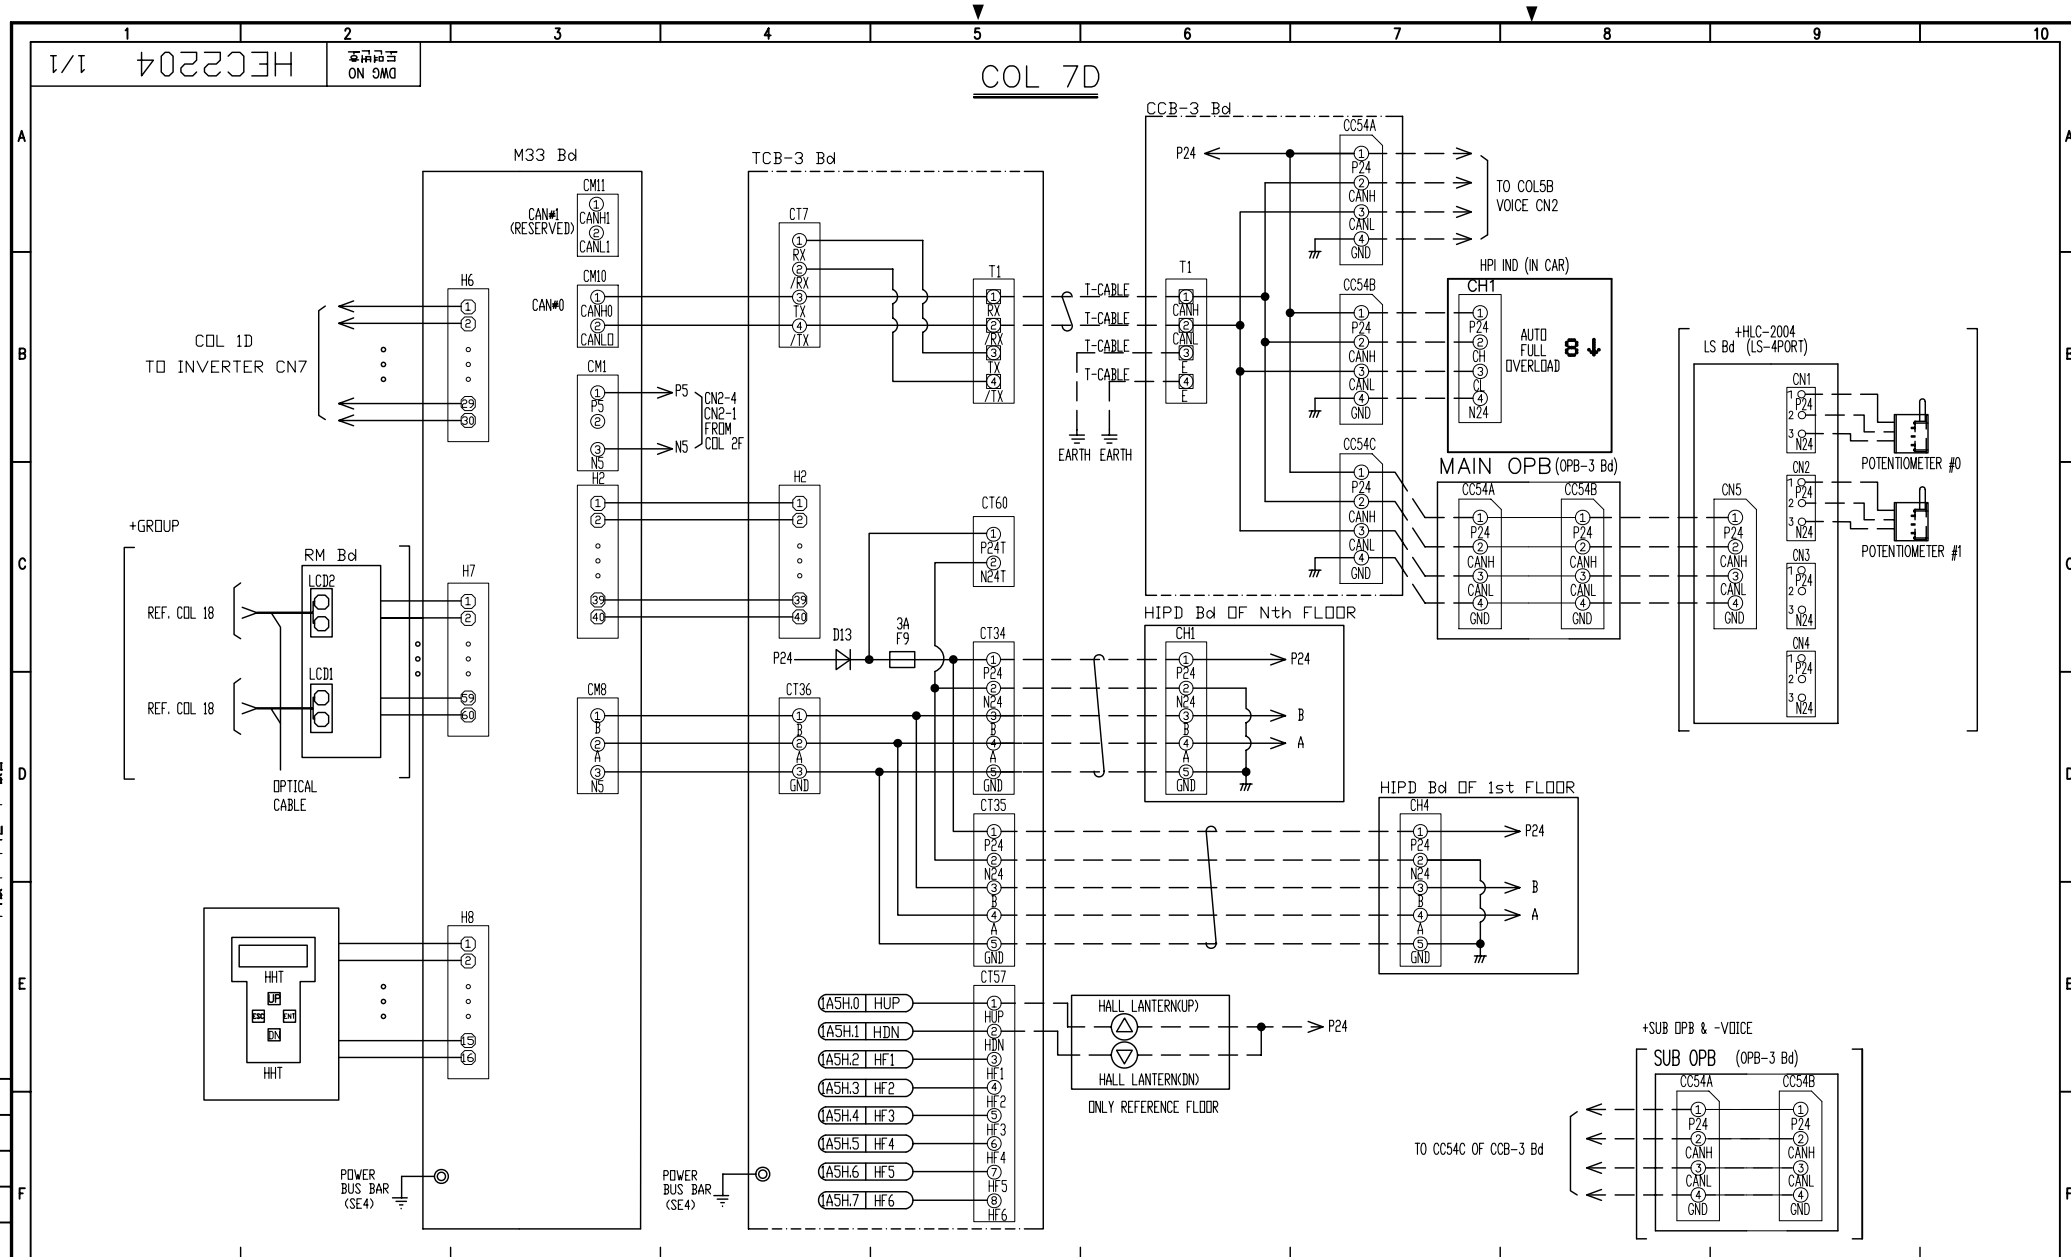


TOLERANCES—UNLESS OTHERWISE SPECIFIED						
WORK SIZE		TURN PHG'S DIST. OF HOLE STR.	MUDG. DIS. CSTG. PRON.CSTG DRAW.	SHMET WELD GAS CTG.	CSTG. FORG.	
OVER	TO INCL.					
1	4	± 0.1	± 0.2	± 0.3	± 0.5	
4	16	± 0.2	± 0.3	± 0.5	± 0.7	
16	63	± 0.3	± 0.4	± 0.7	± 0.9	
63	250	± 0.4	± 0.6	± 1.2	± 1.3	
250	500	± 0.6	± 0.8	± 1.5	± 1.8	
500	1000	± 0.8	± 1.0	± 2.0	± 2.5	
1000	2000	± 1.2	± 1.5	± 2.5	± 3.3	
ANGLE		± .25°	± .5°	± 1.0°	± 2.0°	



표 준	DRWN BY 제 도	DSND BY 설 계	CHKD BY 검 토	APPD BY 승 인
임 시				
보 류				

UNIT 단위	MM	APPAR.	STVF5
SCALE 척도		TITLE 제목	ELEM. W. DIAGRAM
3RD ANGLE 3 각 법			
REF. NO 참고도면	DWG. NO 도면번호	HEC2204	1 / 1

배 부 처

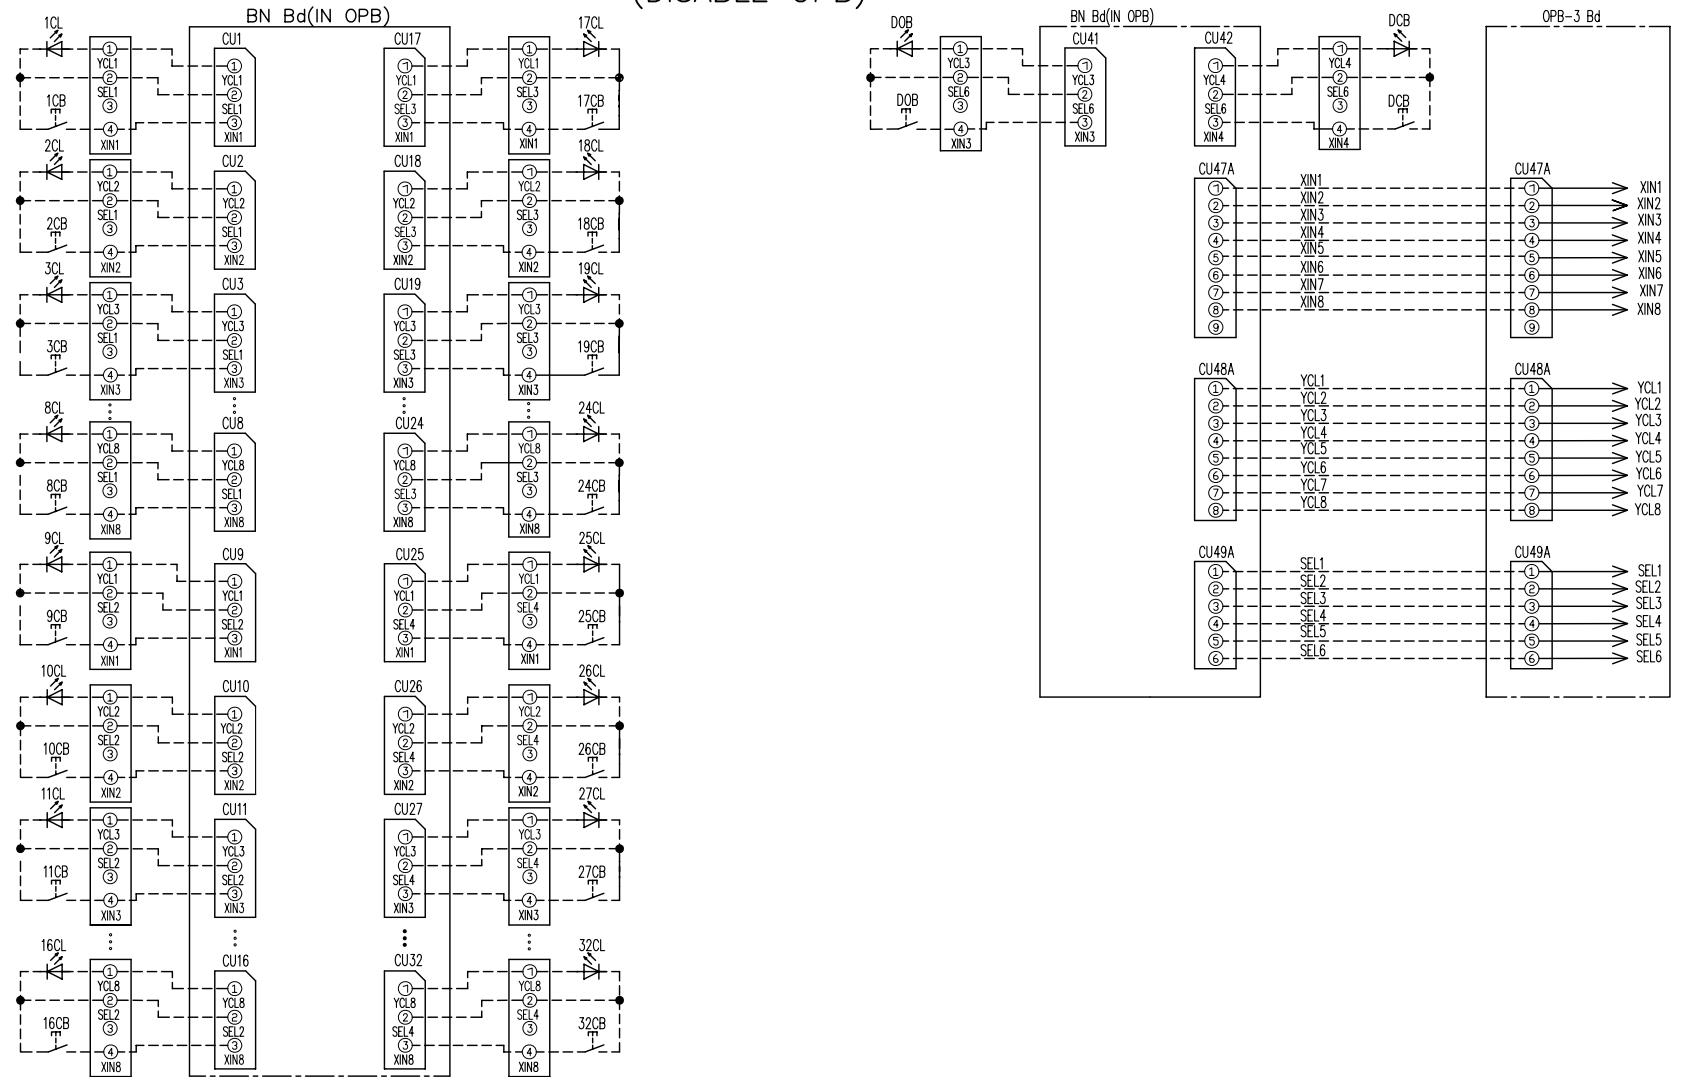


TOLERANCES—UNLESS OTHERWISE SPECIFIED					
WORK SIZE		TURN PAC'G DIST. OF HOLE STR.	MILD. DIS. PRON. DRUM.	SHMET WELD GAS CTG.	CSTG. FORG.
OVER	TO INCL.				
1	4	± 0.1	± 0.2	± 0.3	± 0.5
4	16	± 0.2	± 0.3	± 0.5	± 0.7
16	63	± 0.3	± 0.4	± 0.7	± 0.9
63	250	± 0.4	± 0.6	± 1.2	± 1.3
250	500	± 0.6	± 0.8	± 1.5	± 1.8
500	1000	± 0.8	± 1.0	± 2.0	± 2.5
1000	2000	± 1.2	± 1.5	± 2.5	± 3.3
ANGLE		± .25°	± .5°	± 1.0°	± 2.0°



표 준	DRWN BY 제 도	DSND BY 설 계	CHKD BY 검 토	APPD BY 승 인
임 시				
보 류				

UNIT 단위	MM	APPAR.	STVF5
SCALE 척도		TITLE 제목	ELEM. W. DIAGRAM
3RD ANGLE 3 각 법			
REF. NO 참고도면	DWG. NO 도면번호	HEC2034	1/1

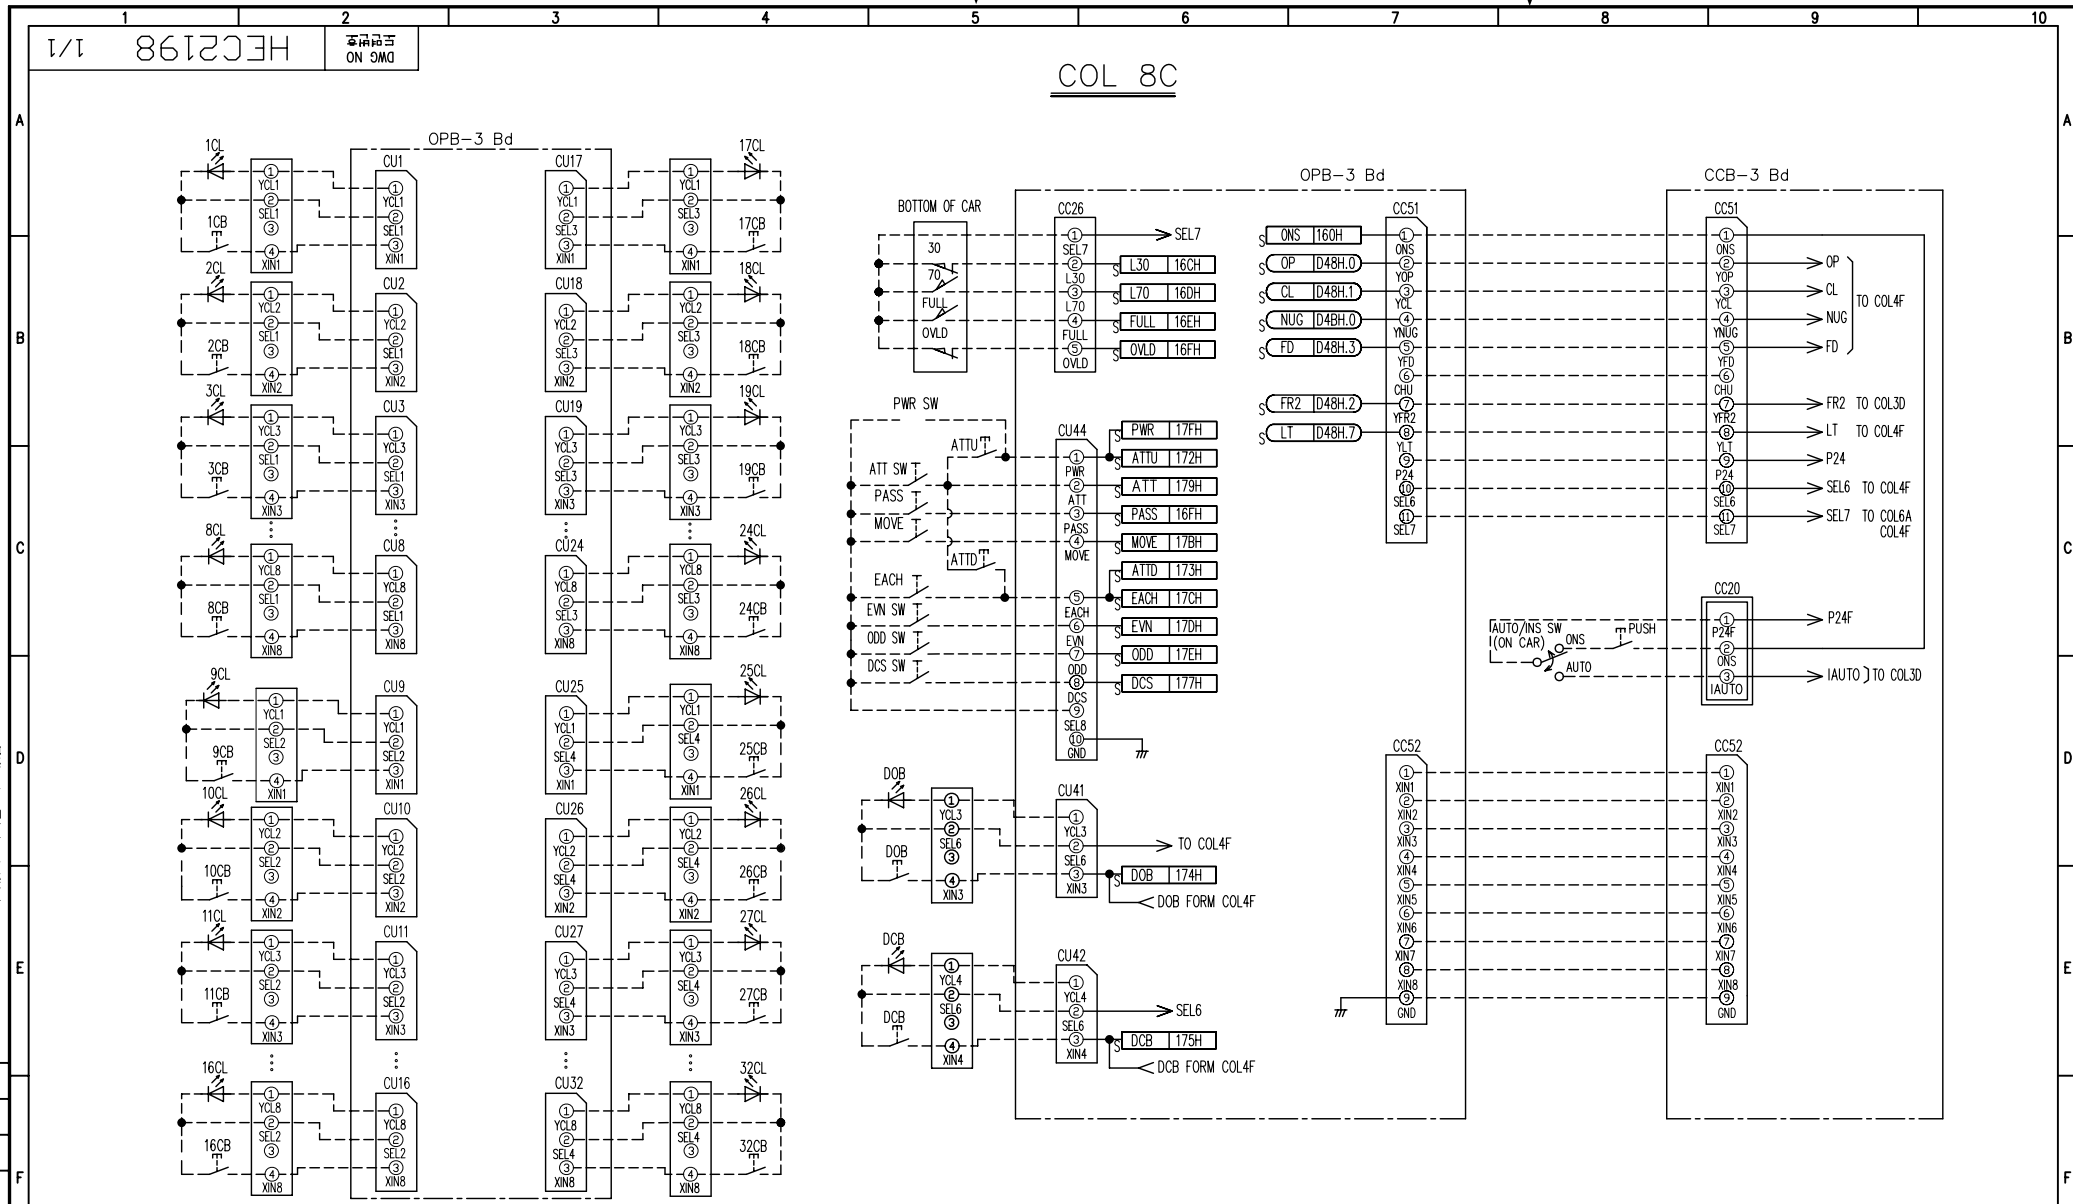[illegible]


TOLERANCES—UNLESS OTHERWISE SPECIFIED					
WORK SIZE		TURN PAC'G DIST. OF HOLE STR.	MOLD. DIE CAST. PAC'G DRAW.	SHMET WELD GAS CTG.	CSTG. FORG.
OVER	TO INCL.				
1	4	± 0.1	± 0.2	± 0.3	± 0.5
4	16	± 0.2	± 0.3	± 0.5	± 0.7
16	63	± 0.3	± 0.4	± 0.7	± 0.9
63	250	± 0.4	± 0.6	± 1.2	± 1.3
250	500	± 0.6	± 0.8	± 1.5	± 1.8
500	1000	± 0.8	± 1.0	± 2.0	± 2.5
1000	2000	± 1.2	± 1.5	± 2.5	± 3.3
ANGLE		± .25°	± .5°	± 1.0°	± 2.0°



HYUNDAI
ELEVATOR CO., LTD.

표 준	DRWN BY 제 도	DSND BY 설 계	CHKD BY 검 토	APPD BY 승 인
임 시				
보 류				

UNIT 단위	MM	APPAR.	STVF5
SCALE 척도		TITLE 제목	ELEM. W. DIAGRAM
3RD ANGLE 3 각 법			
REF. NO 참고도면	DWG. NO 도면번호	HEC2198	1/1

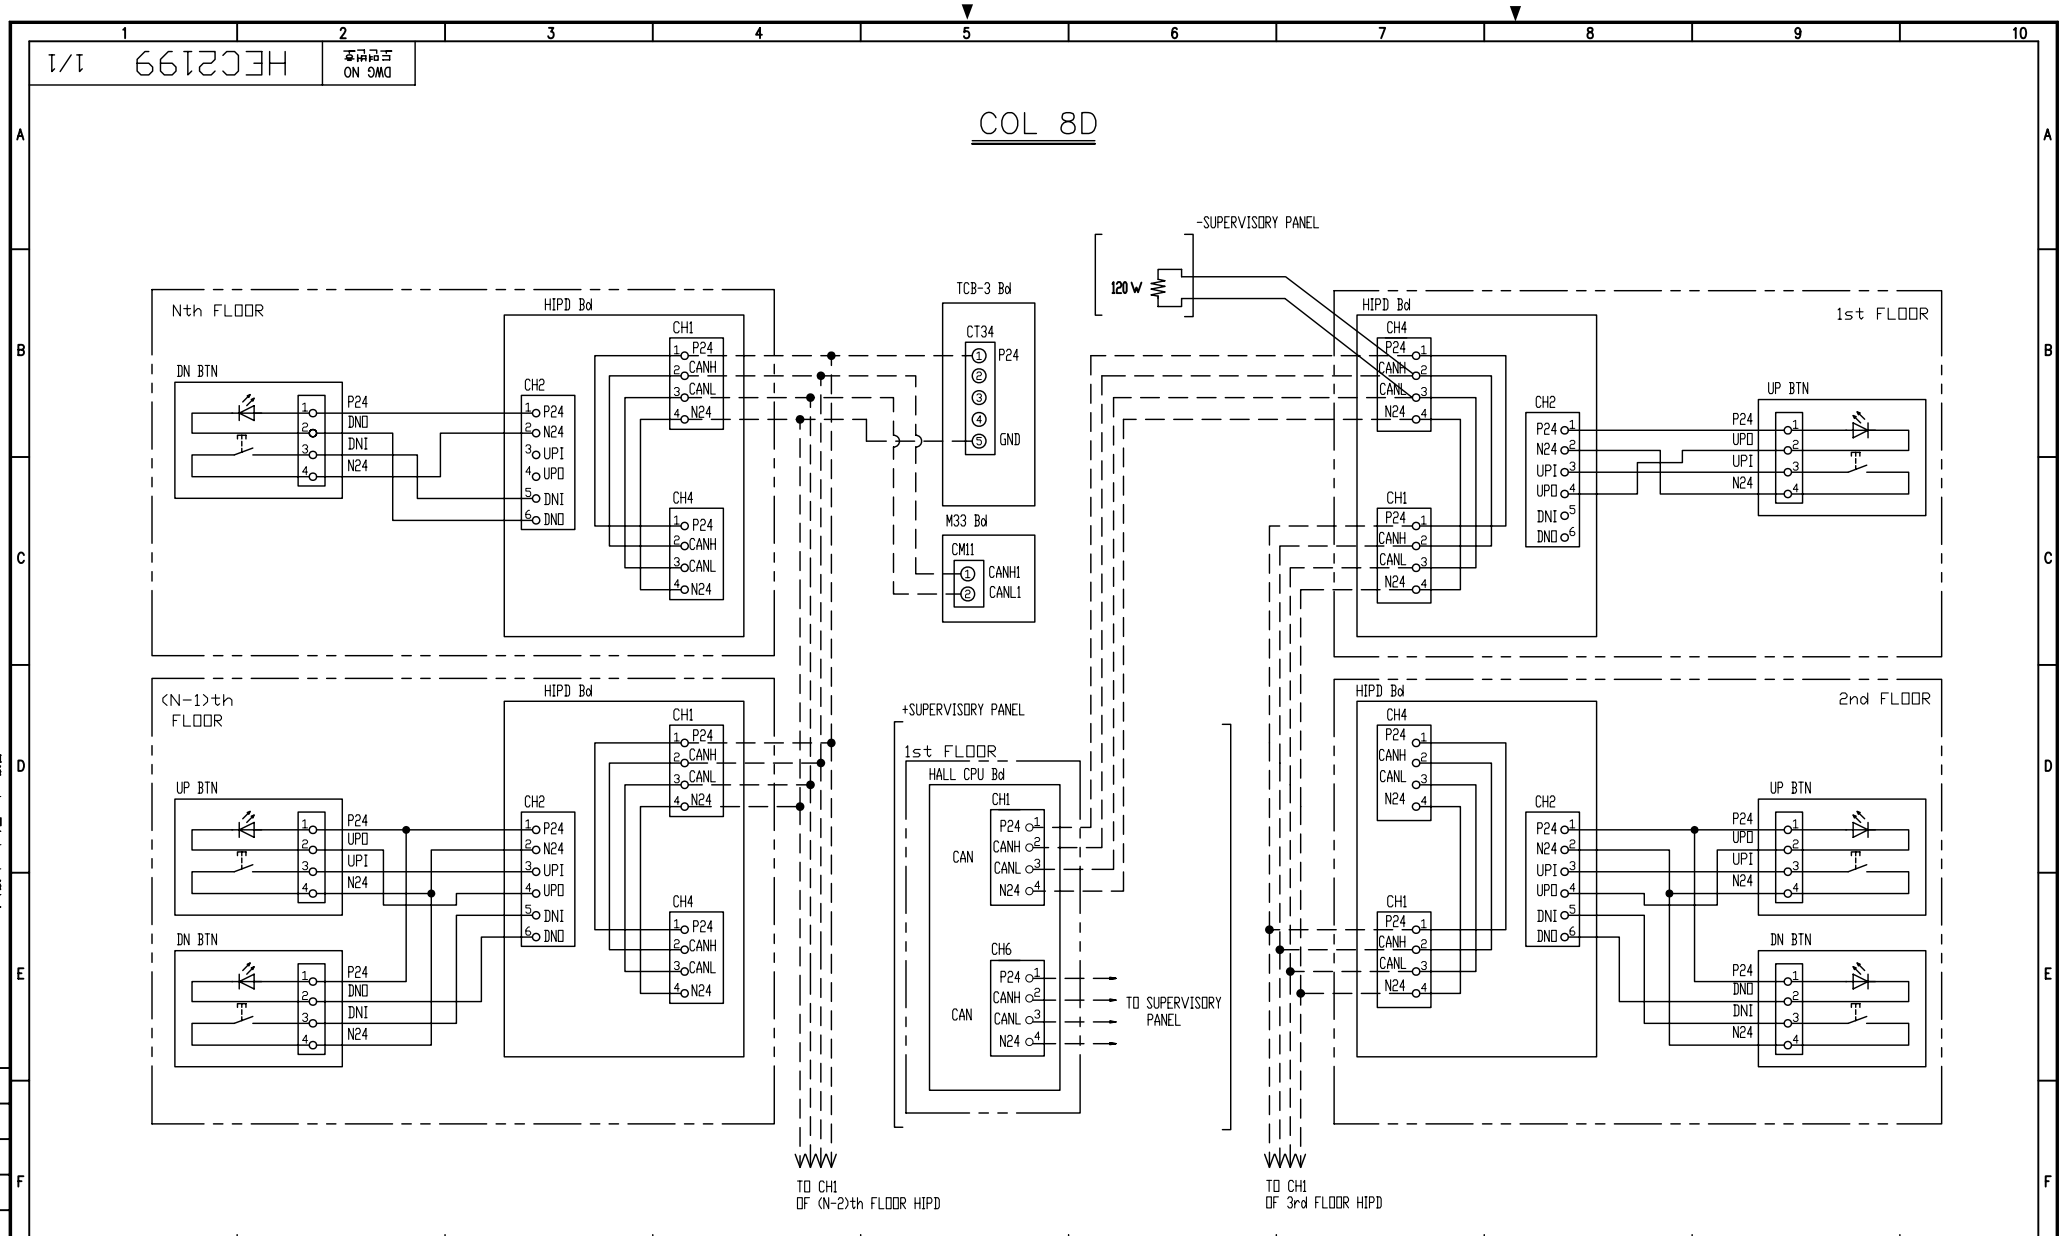[illegible]

TOLERANCES—UNLESS OTHERWISE SPECIFIED					
WORK		TURN- DRY CASTG. DIST. OF HOLE STR.	MOLD. DIE CASTG. PRIN.CASTG DRAW.	SH.MET WET GAS CTG.	CASTG. FORG.
SIZE	TO INCL.				
OVER 1	4	± 0.1	± 0.2	± 0.3	± 0.5
4	16	± 0.2	± 0.3	± 0.5	± 0.7
16	63	± 0.3	± 0.4	± 0.6	± 0.9
63	250	± 0.4	± 0.6	± 1.2	± 1.3
250	500	± 0.6	± 0.8	± 1.5	± 1.8
500	1000	± 0.8	± 1.0	± 2.0	± 2.5
1000	2000	± 1.2	± 1.5	± 2.5	± 3.0
ANGLE		± .25'	± .5'	± 1.0'	± 2.3'




HYUNDAI
ELEVATOR CO., LTD.

표준	DRWN BY 제 도	DSND BY 설 계	CHKD BY 검 토	APPD BY 승 인
임시				
보류				


UNIT 단위	MM	APPAR.	STVF5	G
SCALE 척도		TITLE 제목	ELEM. W. DIAGRAM	
3RD ANGLE 3 각 법				
REF. NO 참고도면	DWG. NO 도면번호	HEC2199	1 / 1	

후기

GROUP CONTROLLED OPERATION + DISABLE + HALL LANTERN



UNIT 단위	MM	APPAR.	STVF5
SCALE 척도		TITLE 제목	ELEM. W. DIAGRAM
3RD ANGLE 3 각 법			
REF. NO 참고도면	DWG. NO 도면번호	HEC2158	1/1



- NOTE:

UNIT 단위	MM	APPAR.	STVF5
SCALE 척도		TITLE 제목	ELEM. W. DIAGRAM
3RD ANGLE 3 각 법			
REF. NO 참고도면	DWG. NO 도면번호	HEC2200	1 / 1

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
허가없이 복사할 수 없음

배 부 직

CHANGE
개 정 판


HDW-91-003A

1/1 HEC2201

ON 5MD

REMARK1: CONNECTIONS OF GROUP
REFER TO COL18

COL 11E (W/ HALL LANTERN AND W/O DISABLE)
GROUP CONTROLLED OPERATION + HALL LANTERN

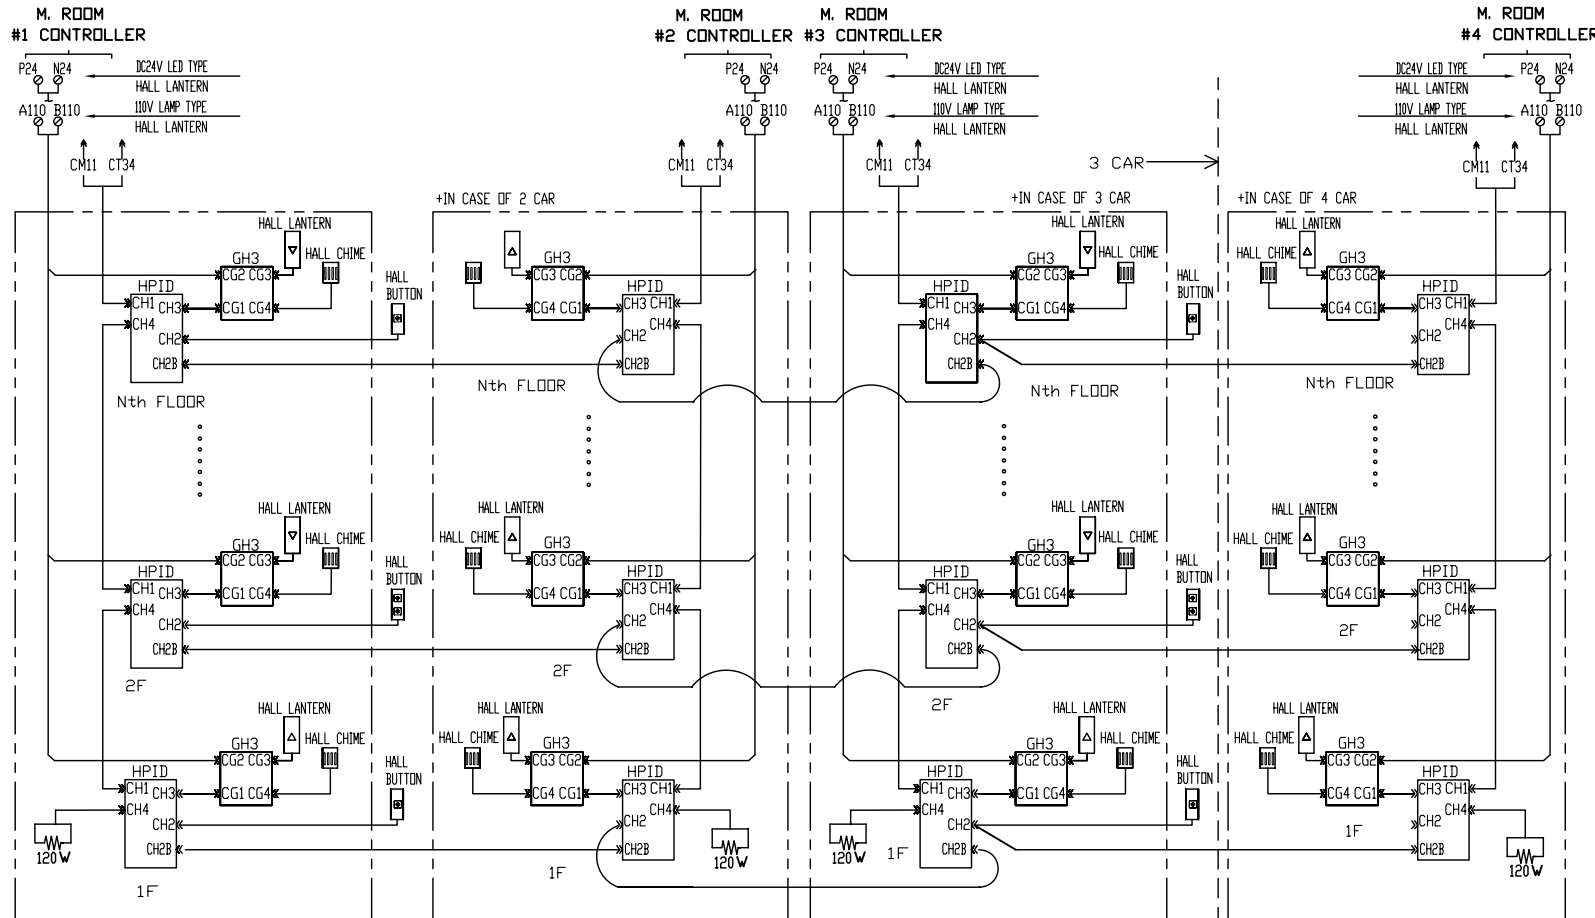

GH3-PIN ARRANGEMENT				
6	DLT	CG3	B110	5
5	DLT	CG3	X	4
4	DLT	CG3	DLT	3
3	UCHM	CG1	DLT	2
2	N24		X	1
1	P24			
3	GND	CG4	N24	4
2	B110	CG2	UCHM	3
1	A110		P24	2
				1

HPID-PIN ARRANGEMENT				
6	DNI	CH1	DNI	6
5	DNI	CH2	DNI	5
4	UPD	CH1	UPD	4
3	UPD	CH2	UPD	3
2	N24	CH1	N24	2
1	P24	CH2	P24	1
6	DNI	CH4	DNI	6
5	DNI	CH4	DNI	5
4	UPD	CH4	UPD	4
3	UPD	CH4	UPD	3
2	N24	CH4	N24	2
1	P24	CH4	P24	1
6	DLT	CH3	DLT	6
5	DLT	CH3	DLT	5
4	UCHM	CH3	UCHM	4
3	UCHM	CH3	UCHM	3
2	N24	CH3	N24	2
1	P24	CH3	P24	1

CT34	
CABLE NO.	SIGNAL NAME
1	P24
2	
3	
4	
5	GND

CM11	
CABLE NO.	SIGNAL NAME
1	CANH
2	CANL

NOTE:

1. 2 CARS IN PARALLEL ,IF USE ONE HALL BUTTON ,HALL BUTTON IS CONNECTED TO #1 CAR'S CH2 ;IF USE TWO HALL BUTTONS ,HALL BUTTONS ARE CONNECTED TO #1 AND #2 CARS' CH2.
2. 3 CARS IN PARALLEL ,IF USE TWO HALL BUTTONS ,HALL BUTTONS ARE CONNECTED TO #1 AND #2 CARS' CH2 ;IF USE THREE HALL BUTTONS ,HALL BUTTONS ARE CONNECTED TO #1 ,#2 AND #3 CARS' CH2.
3. 4 CARS IN PARALLEL ,IF USE THREE HALL BUTTONS ,HALL BUTTONS ARE CONNECTED TO #1 ,#2 AND #3 CARS' CH2 ,IF USE FOUR HALL BUTTONS ,HALL BUTTONS ARE CONNECTED TO #1 ,#2 ,#3 AND #4 CARS' CH2.


TOLERANCES-UNLESS OTHERWISE SPECIFIED				
WORK SIZE	TURB. PROCT. USE OF HOLE STR.	MFG. DIE CTS. FROM CTSO DRAW.	SHEET WELD. GAS CTS.	CTS. FORG.
OVER 1	4	± 0.1	± 0.2	± 0.3
4	16	± 0.2	± 0.3	± 0.5
16	63	± 0.3	± 0.4	± 0.7
63	250	± 0.4	± 0.6	± 1.2
250	500	± 0.6	± 0.8	± 1.5
500	1000	± 0.8	± 1.0	± 2.0
1000	2000	± 1.2	± 1.5	± 3.3
ANGLE		± .25°	± .5°	± 1.0°

HYUNDAI
ELEVATOR CO. LTD.

표 준	DRWN BY	DSND BY	CHKD BY	APPD BY
제 도	설 계	검 토	승 인	
임 시				
보 류				

UNIT	MM	APPAR.	STVF5
SCALE		TITLE	ELEM. W. DIAGRAM
3RD ANGLE		DWG. NO	HEC2201
REF. NO		도면번호	
참고도면			

A3 (420mm X 297mm)

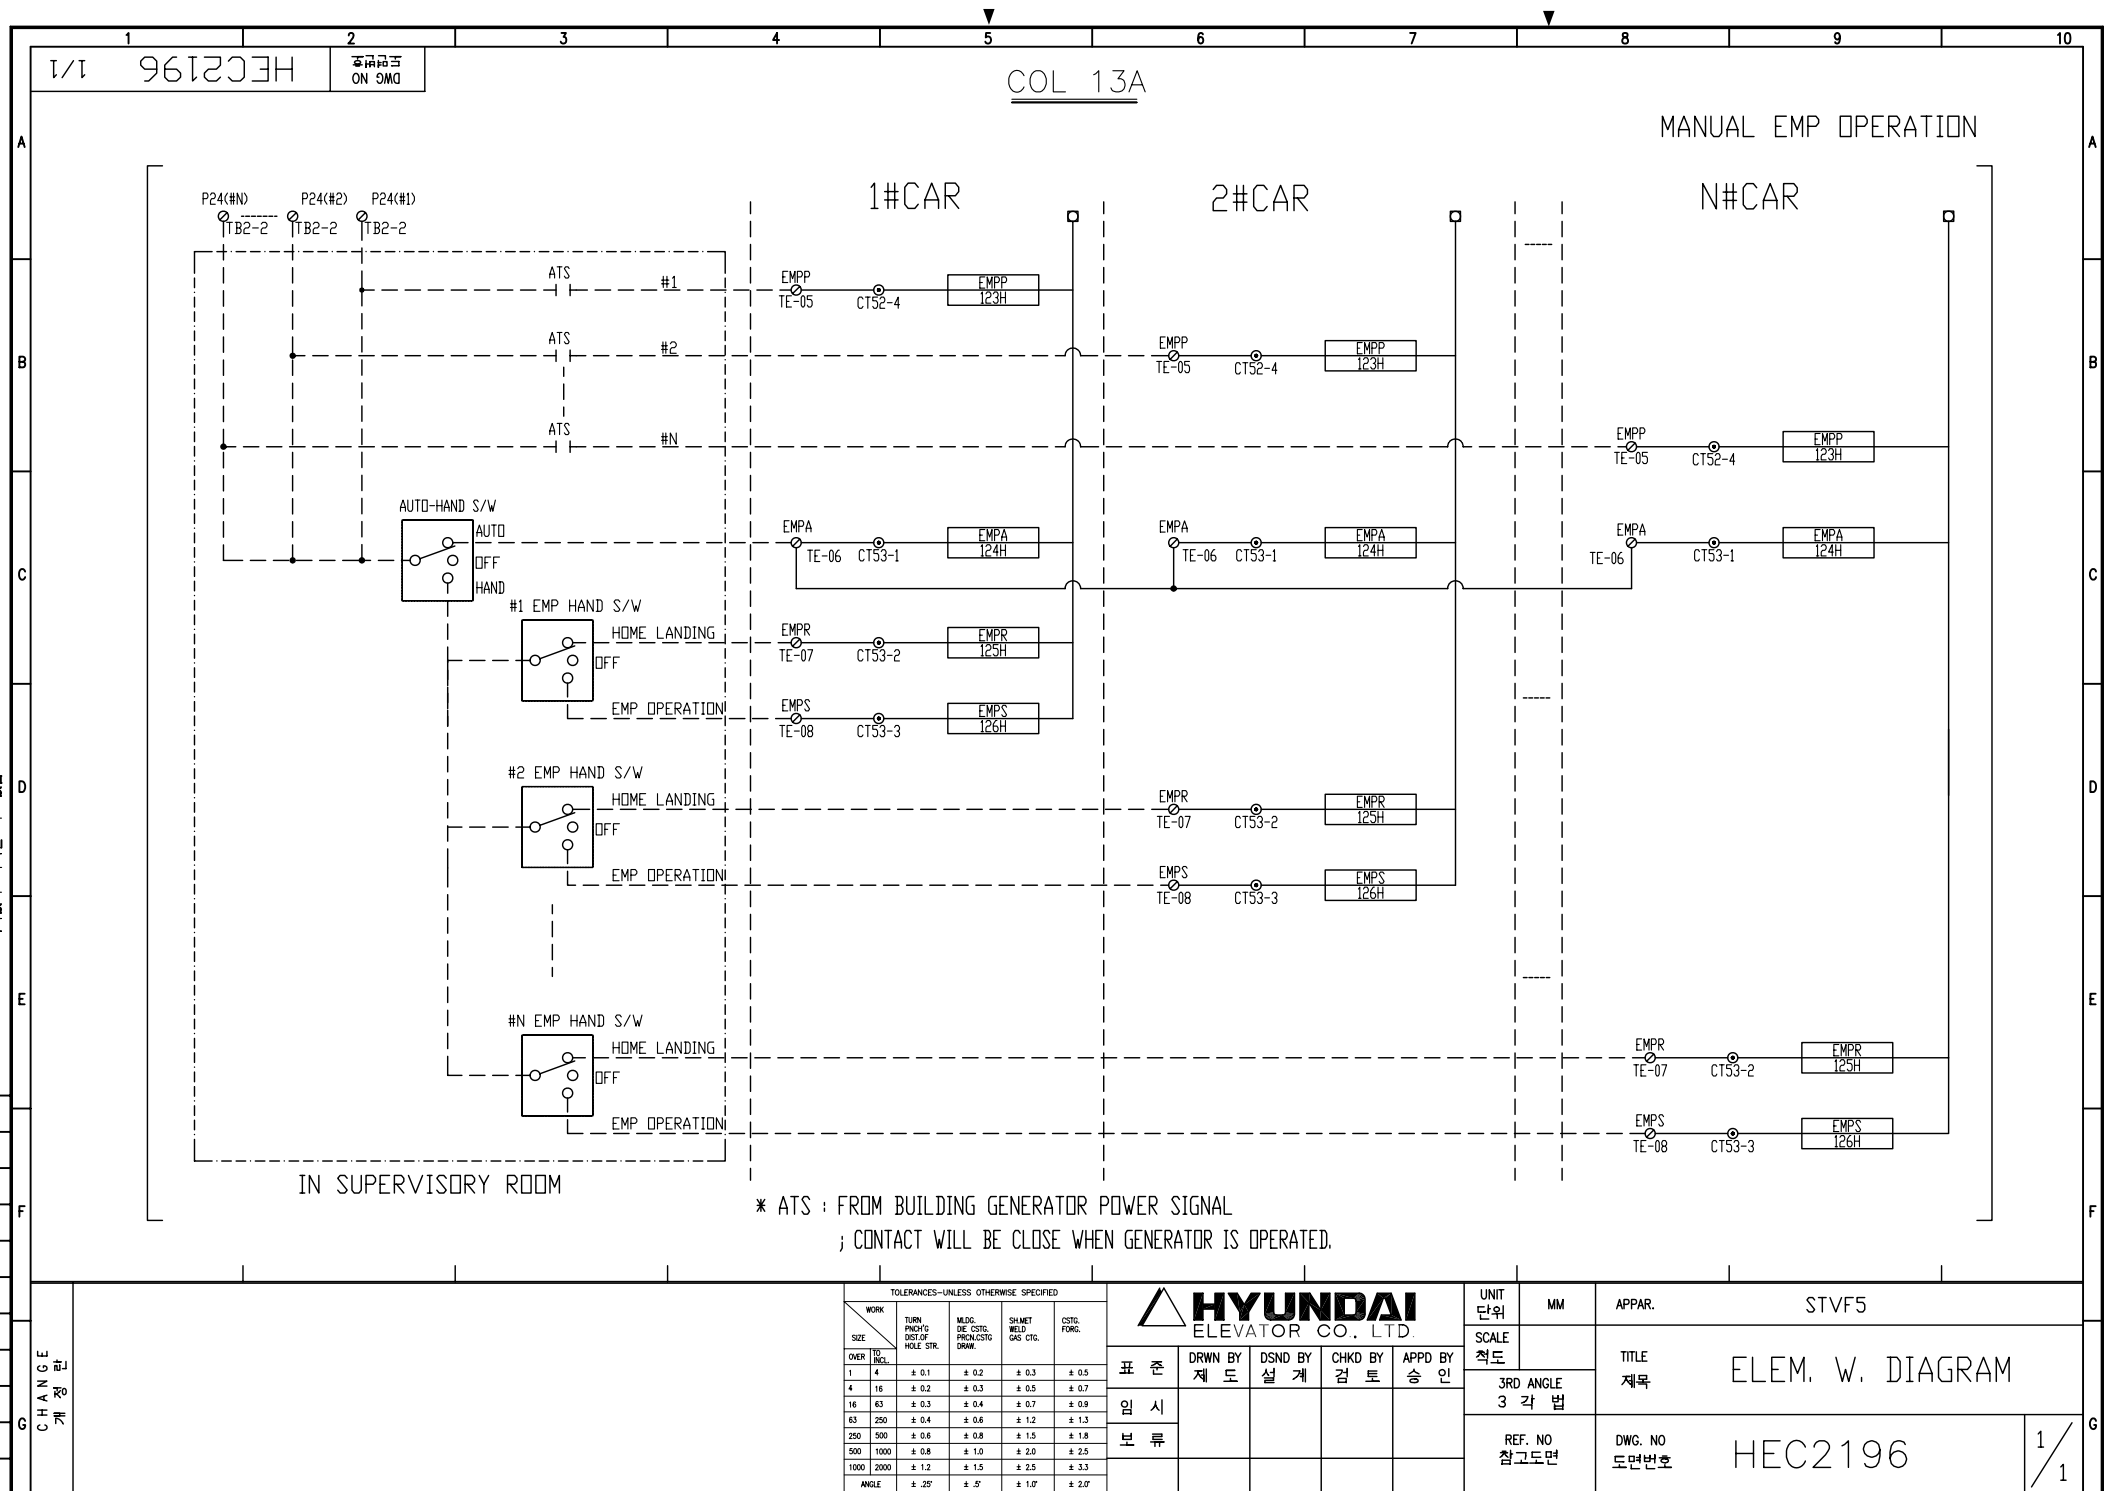[illegible]

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO

이름
영수
부사할
수
없
기
가
없
이

배 부 처

			G	CHANGE 개 정 란

HDW-91-003A

CABLE TAG : TH01 (0.75SQ, 30C)

T1		T1B		T1		T2	
PIN	SIGNAL CABLE NO NAME NUMBER	PIN	SIGNAL CABLE NO NAME NUMBER	PIN	SIGNAL CABLE NO NAME NUMBER	PIN	SIGNAL CABLE NO NAME NUMBER
1	CANH 01	1	A220 15	1	CANH 01	1	
2	CANL 02	2	B220 16	2	CANL 02	2	PHI 22
3		3	N24 17	3	CND 03	3	PH2 23
4		4	N24 18	4	CND 04	4	PH3 24
5	FMR 08	5	P24 19	5	FMR 08	5	PH4 25
6	ULA 06	6	P24 20	6	ULA 06	6	SPK1 26
7	DZ 07	7		7	DZ 07	7	GND 28
8		8		8		8	
9	ILA 09	9		9	ILA 09	9	22X 29
10	GS 10	10		10	GS 10	10	22Y 30
11	PITS 11	11		11	PITS 11	11	
12	ESIN 12	12		12	ESIN 12	12	
13	P110 13	13		13	P110 13	13	
14	INTL 14	14		14	INTL 14	14	
15		15		15		15	
16		16		16		16	
17		17		17		17	
18		18		18		18	
19		19		19		19	
20		20		20		20	
21	XAUT0 21	21		21	XAUT0 21	21	

CABLE TAG : TH02 (0.75SQ, 40C)

T1		T1B		T1		T2	
PIN	SIGNAL CABLE NO NAME NUMBER	PIN	SIGNAL CABLE NO NAME NUMBER	PIN	SIGNAL CABLE NO NAME NUMBER	PIN	SIGNAL CABLE NO NAME NUMBER
1	CANH 01	1	A220 15	1	CANH 01	1	DBS 34
2	CANL 02	2	B220 16	2	CANL 02	2	PHI 22
3		3	N24 17	3	CND 03	3	PH2 23
4		4	N24 18	4	CND 04	4	PH3 24
5	FMR 08	5	P24 19	5	FMR 08	5	PH4 25
6	ULA 06	6	P24 20	6	ULA 06	6	SPK1 26
7	DZ 07	7		7	DZ 07	7	SP2 27
8		8		8		8	GND 28
9	ILA 09	9		9	ILA 09	9	22X 29
10	GS 10	10		10	GS 10	10	22Y 30
11	PITS 11	11		11	PITS 11	11	
12	ESIN 12	12		12	ESIN 12	12	
13	P110 13	13		13	P110 13	13	
14	INTL 14	14		14	INTL 14	14	
15		15		15		15	
16		16		16		16	
17		17		17		17	
18		18		18		18	
19		19		19		19	
20		20		20		20	
21	XAUT0 21	21		21	XAUT0 21	21	

STANDBY CABLE : X EARTH 05

EARTH 03 EARTH 04

NOTE: T-CABLE DWG NO. HX58C-H01
T-CABLE HARNESS ASSY DWG NO. 259C172(1/4)

STANDBY CABLE : 31,32,33

EARTH 05

EARTH 04

EARTH 03

NOTE: T-CABLE DWG NO. HX58C-H02
T-CABLE HARNESS ASSY DWG NO. 259C172(2/4)

CABLE TAG : TH04 (0.75SQ X 28C + 0.5SQ X 2P SHIELDED + 5C-2V COAXIAL)

T1		T1B		T1		T2	
PIN	SIGNAL CABLE NO NAME NUMBER	PIN	SIGNAL CABLE NO NAME NUMBER	PIN	SIGNAL CABLE NO NAME NUMBER	PIN	SIGNAL CABLE NO NAME NUMBER
1	CANH CWM 1-1	1	A220 13	1	CANH CWM 1-1	1	
2	CANL CWM 1-2	2	B220 14	2	CANL CWM 1-2	2	PHI CWM 2-1
3		3	N24 15	3	CND 06	3	PH2 CWM 2-2
4		4	N24 16	4	CND 07	4	PH3 22
5	FMR 01	5	P24 18	5	FMR 01	5	PH4 23
6	ULA 02	6		6	ULA 02	6	SPK1 24
7	DZ 03	7		7	DZ 03	7	SP2 25
8	X02 04	8		8	X02 04	8	GND 26
9	ILA 05	9		9	ILA 05	9	22X 27
10	GS 08	10		10	GS 08	10	22Y 28

TOLERANCES—UNLESS OTHERWISE SPECIFIED					
WORK		TURN. FINCH/DI OFST OF HOLE STR.	MDC. DI OF CSTG. PRIN/CSTG DRAW.	SHMET MILS GAS CSTG.	CSTG. FORM.
SIZE	TO INCL.				
OVER 1					
4	4	± 0.1	± 0.2	± 0.3	± 0.5
4	16	± 0.2	± 0.3	± 0.5	± 0.7
16	63	± 0.3	± 0.4	± 0.7	± 0.9
63	250	± 0.4	± 0.6	± 1.2	± 1.3
250	500	± 0.6	± 0.8	± 1.5	± 1.8
500	1000	± 0.8	± 1.0	± 2.0	± 2.5
1000	2000	± 1.2	± 1.5	± 2.5	± 3.0
ANGLE		± .25°	± .5°	± 1.0°	± 2.2°




HYUNDAI
ELEVATOR CO., LTD.

표준	DRWN BY 제 도	DSND BY 설 계	CHKD BY 검 토	APPD BY 승 인
임시				
분류				

UNIT 단위	MM	APPAR.	STVF5
SCALE 척도		TITLE 제목	ELEM. W. DIAGRAM
3RD. ANGLE 3 각 법			
REF. NO 참고도면	DWG. NO 도면번호	HEC2059	1 / 1

A3 (420mm X 297mm)

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPR
WITHOUT THE PERMISSION OF HELCO

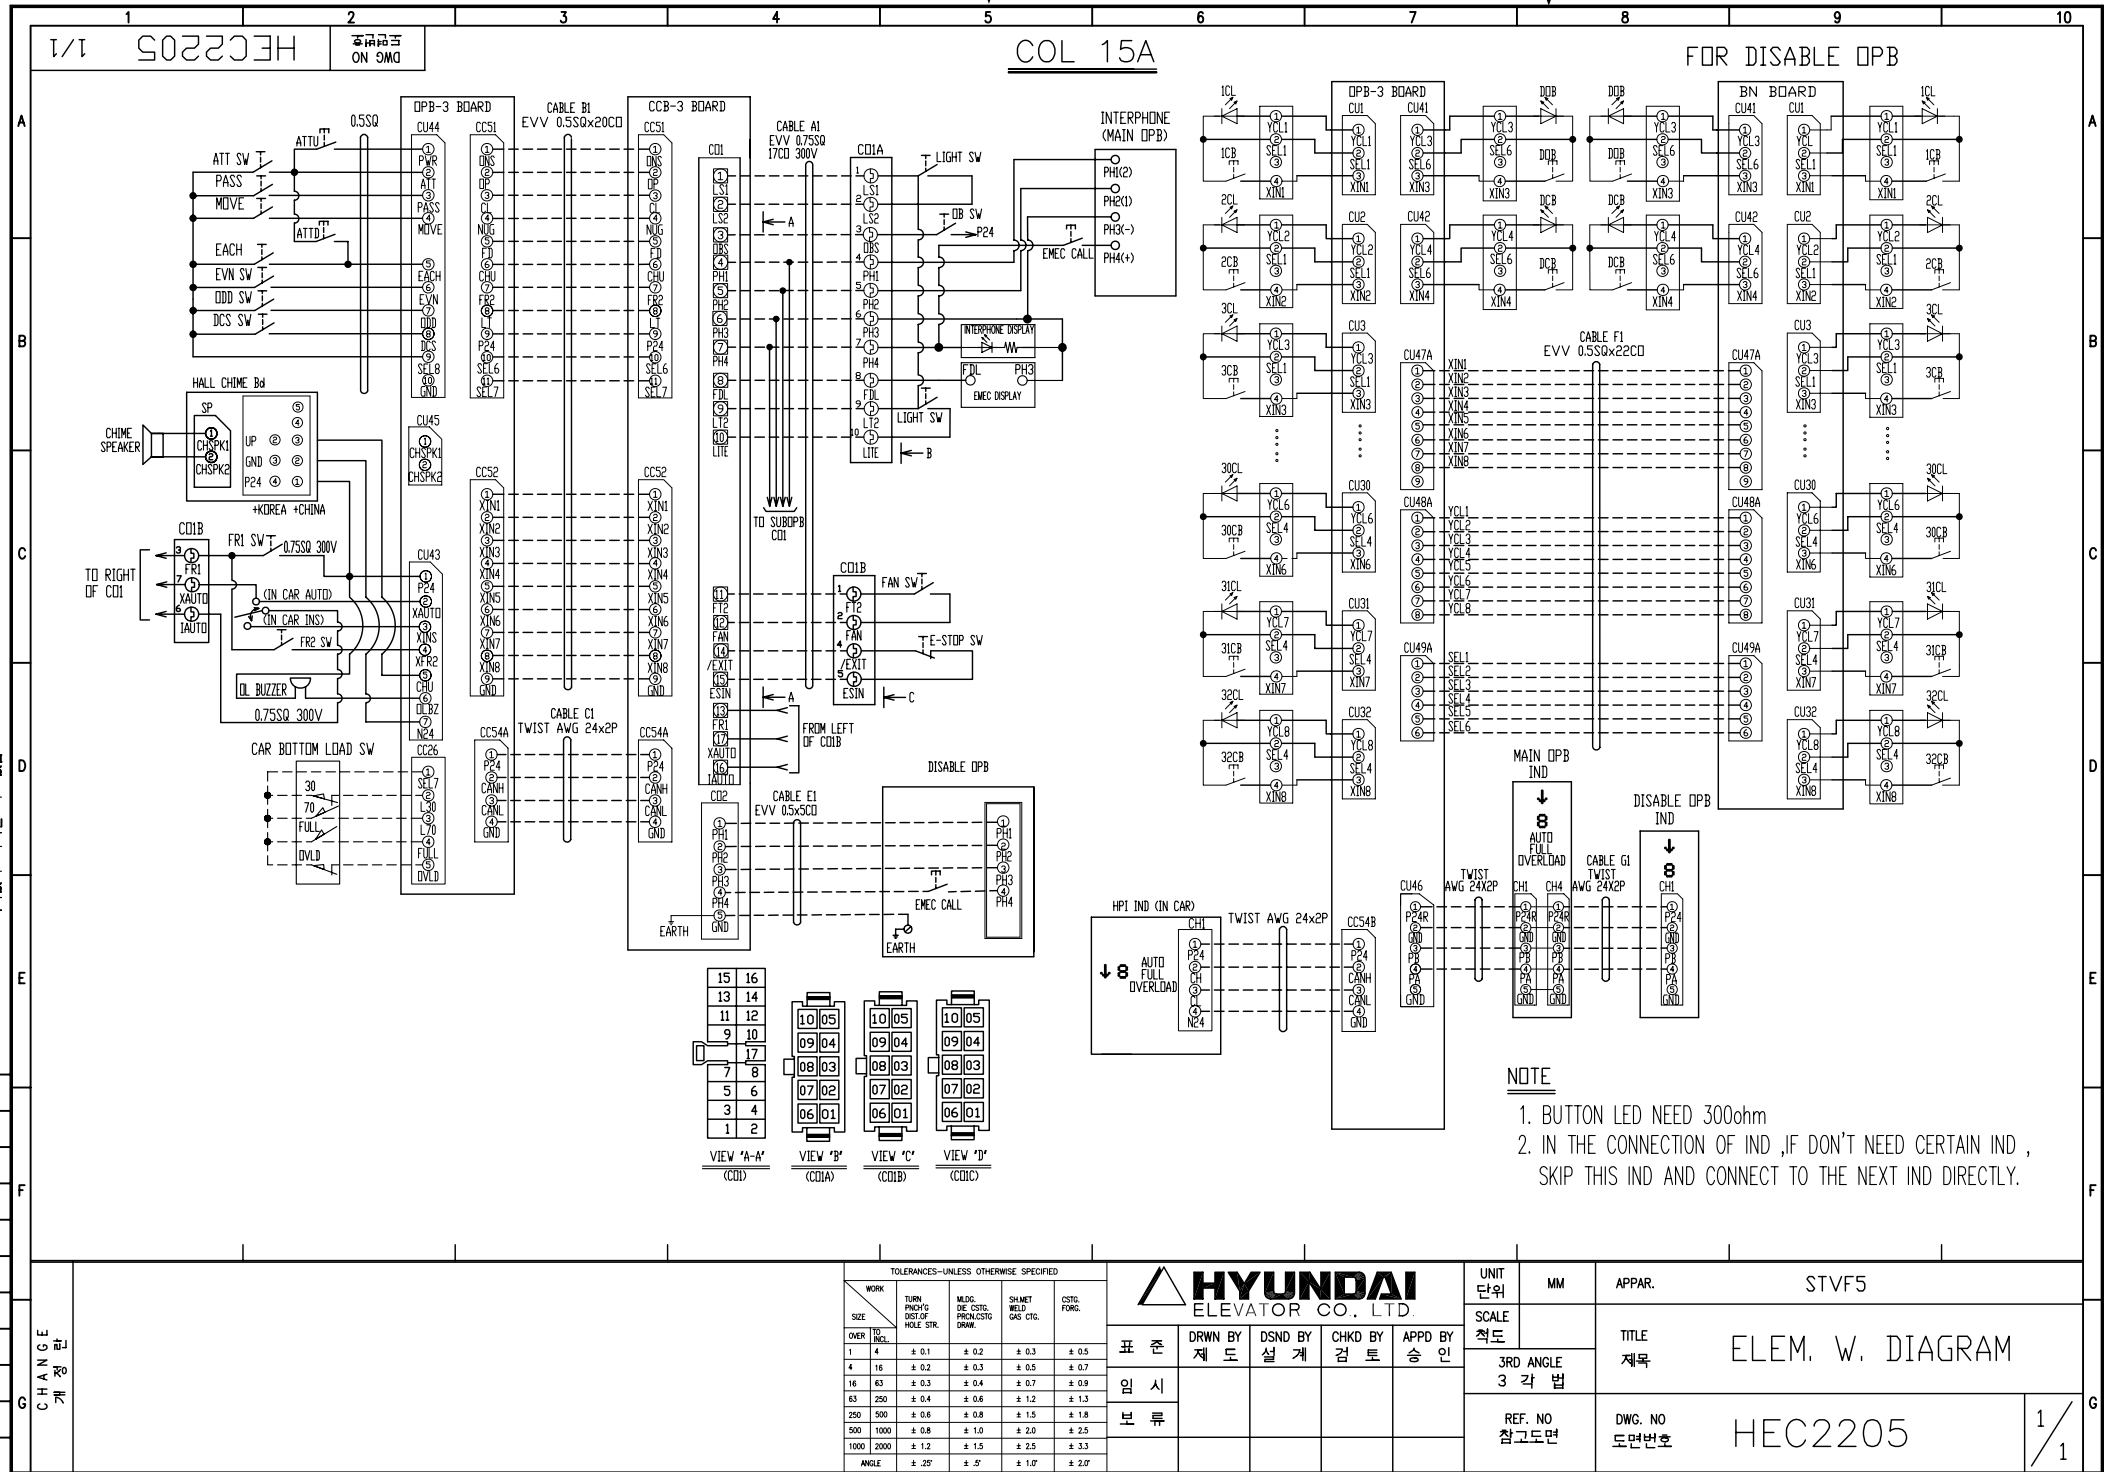

배 부 처


[illegible]

HDW-91-003A

HEC2023 1/1

ON GMD

COL 16

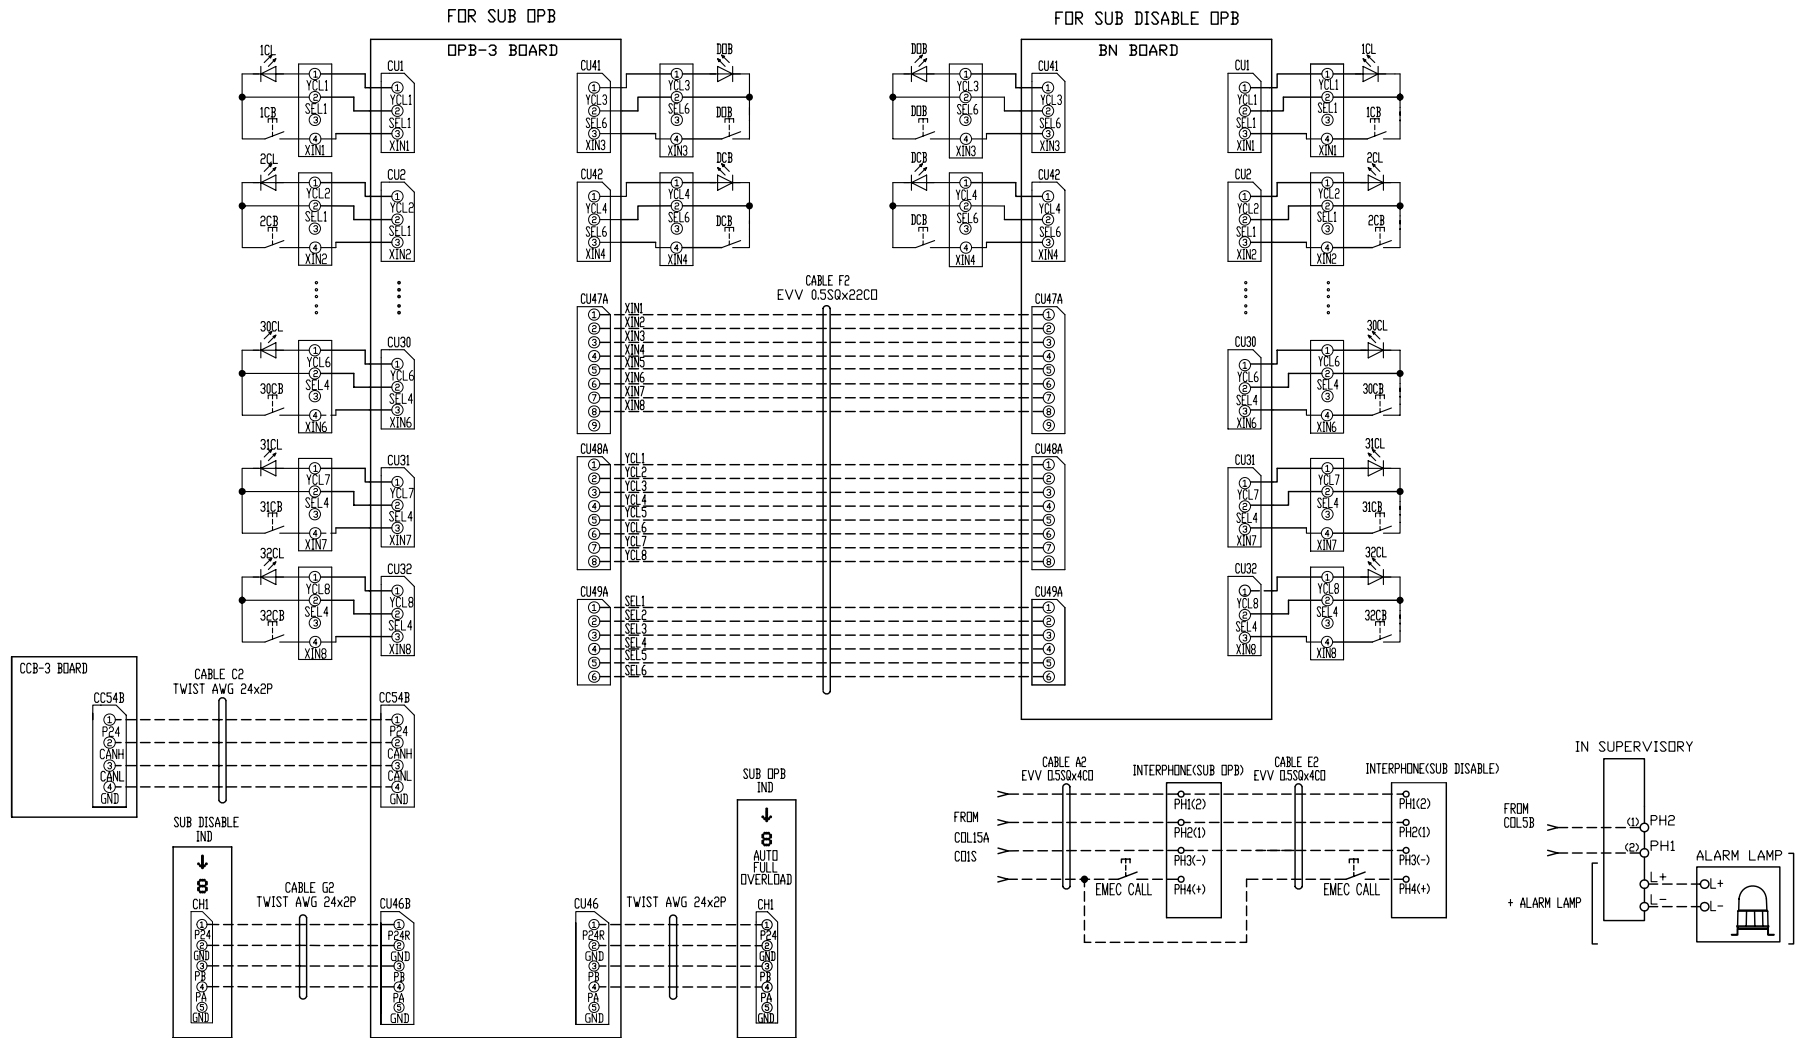

TOLERANCES—UNLESS OTHERWISE SPECIFIED					
WORK		TURN PIVOT'S DIE SET	M.D.G. DIE CASTING PUNCH/CASTING DRAW	SHMET WELD GAS CTG.	CASTING FORM
SIZE	TO INCL.				
1	4	± 0.1	± 0.2	± 0.3	± 0.5
4	16	± 0.2	± 0.3	± 0.5	± 0.7
16	63	± 0.3	± 0.4	± 0.7	± 0.9
63	250	± 0.4	± 0.6	± 1.2	± 1.3
250	500	± 0.6	± 0.8	± 1.5	± 1.8
500	1000	± 0.8	± 1.0	± 2.0	± 2.5
1000	2000	± 1.2	± 1.5	± 2.5	± 3.3
ANGLE		± .25°	± .5°	± 1.0°	± 2.0°




HYUNDAI
ELEVATOR CO., LTD.

표 준	DRWN BY 제 도	DSND BY 설 계	CHKD BY 검 토	APPD BY 승 인
임 시				
보 류				

UNIT 단위	MM	APPAR.	STVF5
SCALE 척도		TITLE 제목	ELEM. W. DIAGRAM
3RD. ANGLE 3 각 법			
REF. NO 참고도면	DWG. NO 도면번호	HEC2023	1 / 1

A3 (420mm X 297mm)

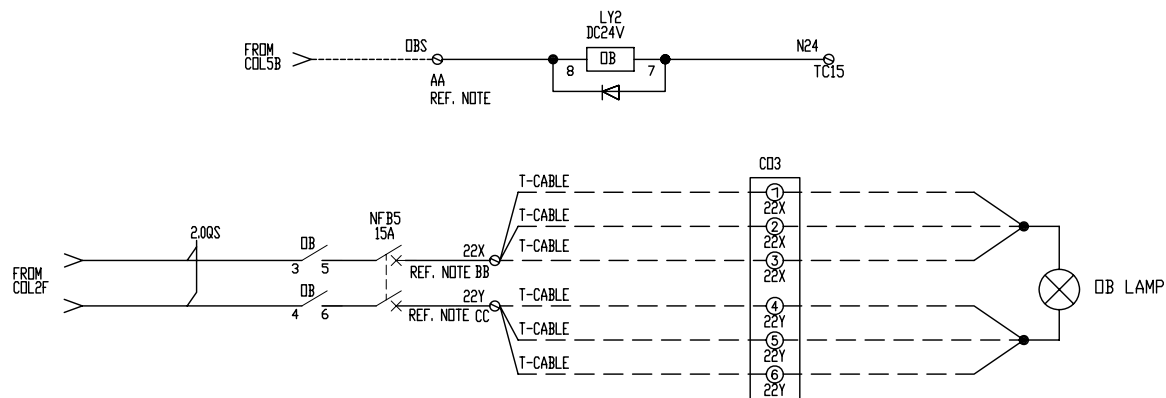


NOTE		
	STANDARD	MRL
AA	TF03	TD18
BB	TF01	TD19
CC	TF02	TD20

TOLERANCES—UNLESS OTHERWISE SPECIFIED					
SIZE OVER TO	WORK	TURN DIE INCH/3 DIST OF HOLE STK.	MILD: DIE CAST, PROM/CAST DRAW.	SHMET MILD CLG.	CAST: FORG.
	FINISH				
1	4	± 0.1	± 0.2	± 0.3	± 0.5
4	16	± 0.2	± 0.3	± 0.5	± 0.7
16	63	± 0.3	± 0.4	± 0.7	± 0.9
63	250	± 0.4	± 0.6	± 1.2	± 1.3
250	500	± 0.6	± 0.8	± 1.5	± 1.8
500	1000	± 0.8	± 1.0	± 2.0	± 2.5
1000	2000	± 1.2	± 1.5	± 2.5	± 3.0
ANGLE		± .25°	± .5°	± 1.0°	± 2.2°



표준	DRWN BY 제 도	DSND BY 설 계	CHKD BY 검 토	APPD BY 승 인
임시				
보류				

UNIT 단위	MM	APPAR.	STVF5
SCALE 척도		TITLE 제목	ELEM. W. DIAGRAM
3RD ANGLE 3 각 법			
REF. NO 참고도면	DWG. NO 도면번호	HEC2074	1 / 1

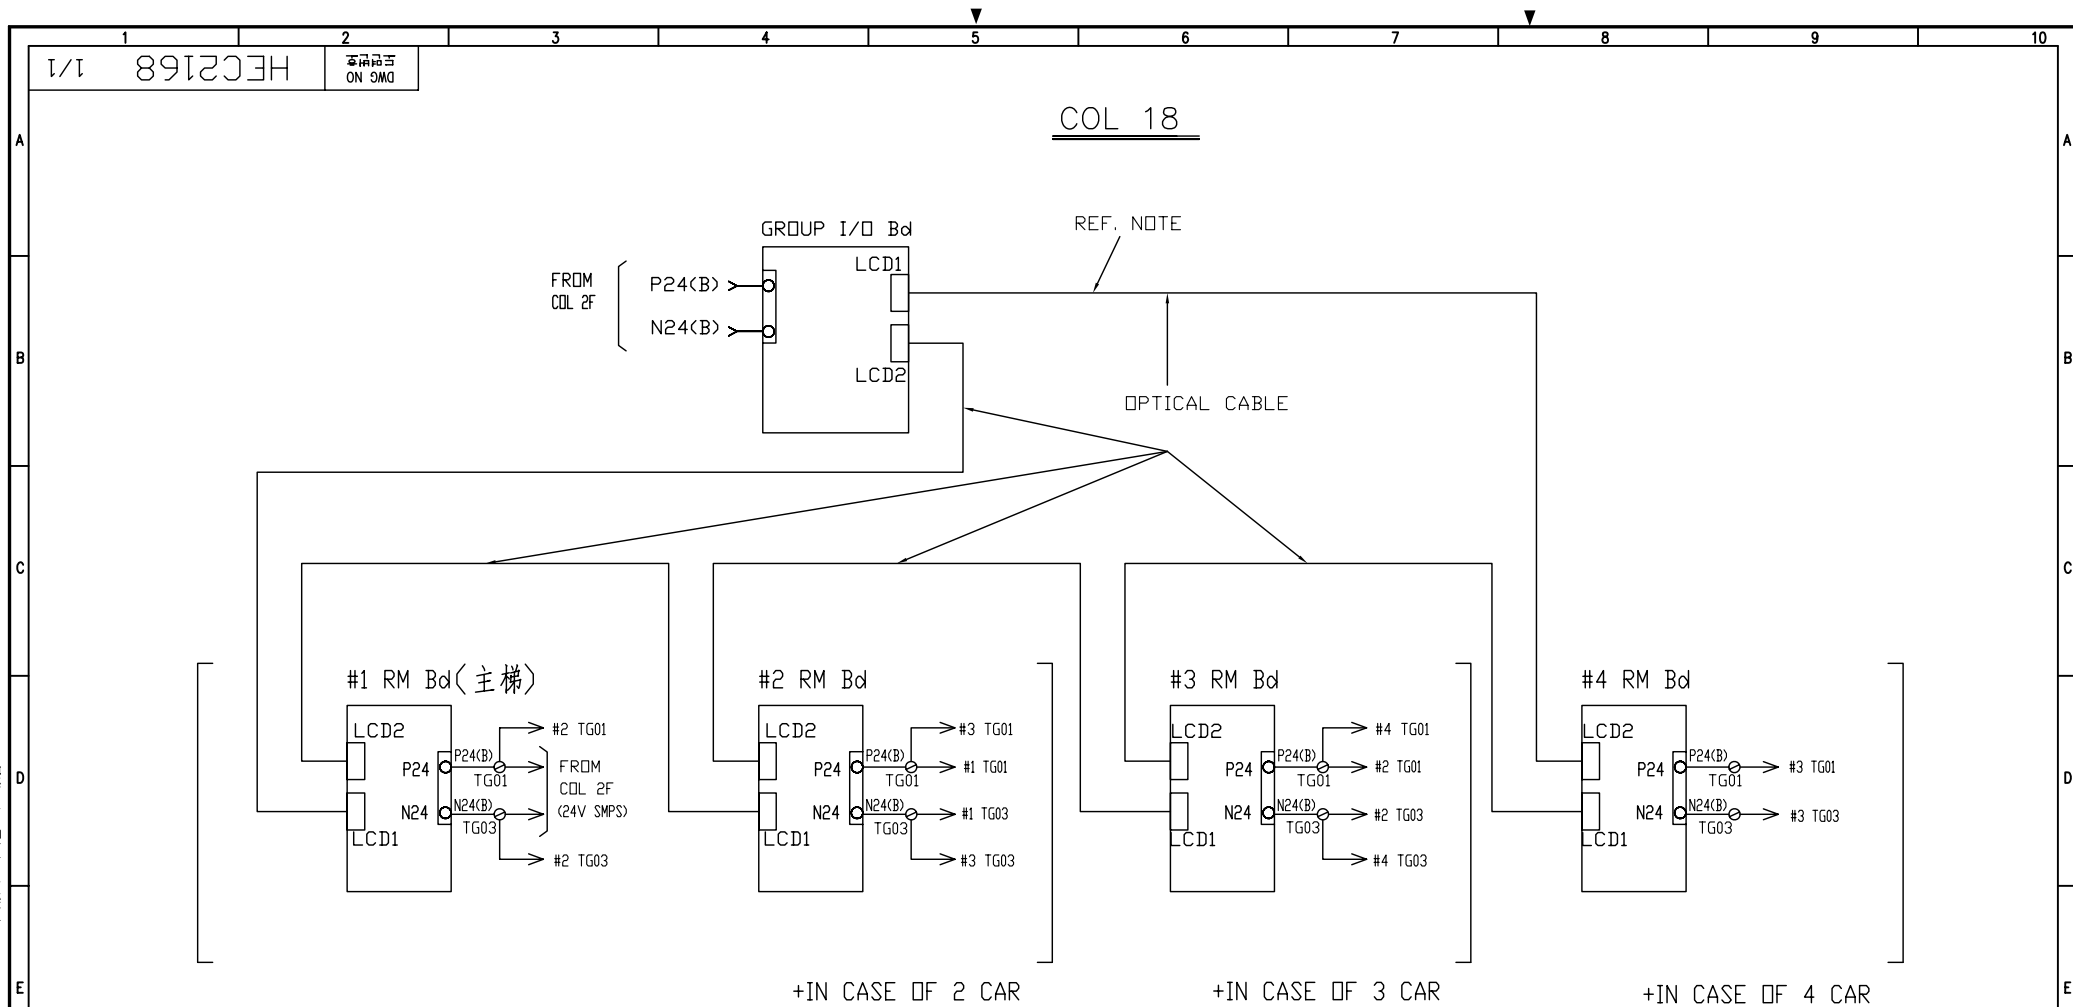[illegible]

NOTE

IN CASE OF 2CAR, IT CONNECTED WITH LCD2 OF #2 RM Bd,
IN CASE OF 3CAR, IT CONNECTED WITH LCD2 OF #3 RM Bd.

TOLERANCES—UNLESS OTHERWISE SPECIFIED					
WORK		TURN DIAG. DIST. HOLE STR.	MILD. DIAG. PRON.CSTG DRAW.	SHUET WELD GAS CTG.	CSTG. FORG.
SIZE	TO INCL.				
OVER 1	4	± 0.1	± 0.2	± 0.3	± 0.5
4	16	± 0.2	± 0.3	± 0.5	± 0.7
16	63	± 0.3	± 0.4	± 0.7	± 0.9
63	250	± 0.4	± 0.6	± 1.2	± 1.3
250	500	± 0.6	± 0.8	± 1.5	± 1.8
500	1000	± 0.8	± 1.0	± 2.0	± 2.5
1000	2000	± 1.2	± 1.5	± 2.5	± 3.3
ANGLE		± .25°	± .5°	± 1.0°	± 2.0°




표준	DRWN BY 제 도	DSND BY 설 계	CHKD BY 검 토	APPD BY 승 인
임시				
보류				


UNIT 단위	MM	APPAR.	STVF5
SCALE 척도		TITLE 제목	ELEM. W. DIAGRAM
3RD. ANGLE 3 각 법			
REF. NO 참고면	DWG. NO 도면번호	HEC2168	1/1

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
해당설계이 복사할 수 없음

배 부 적

CHANGE
개 정 판

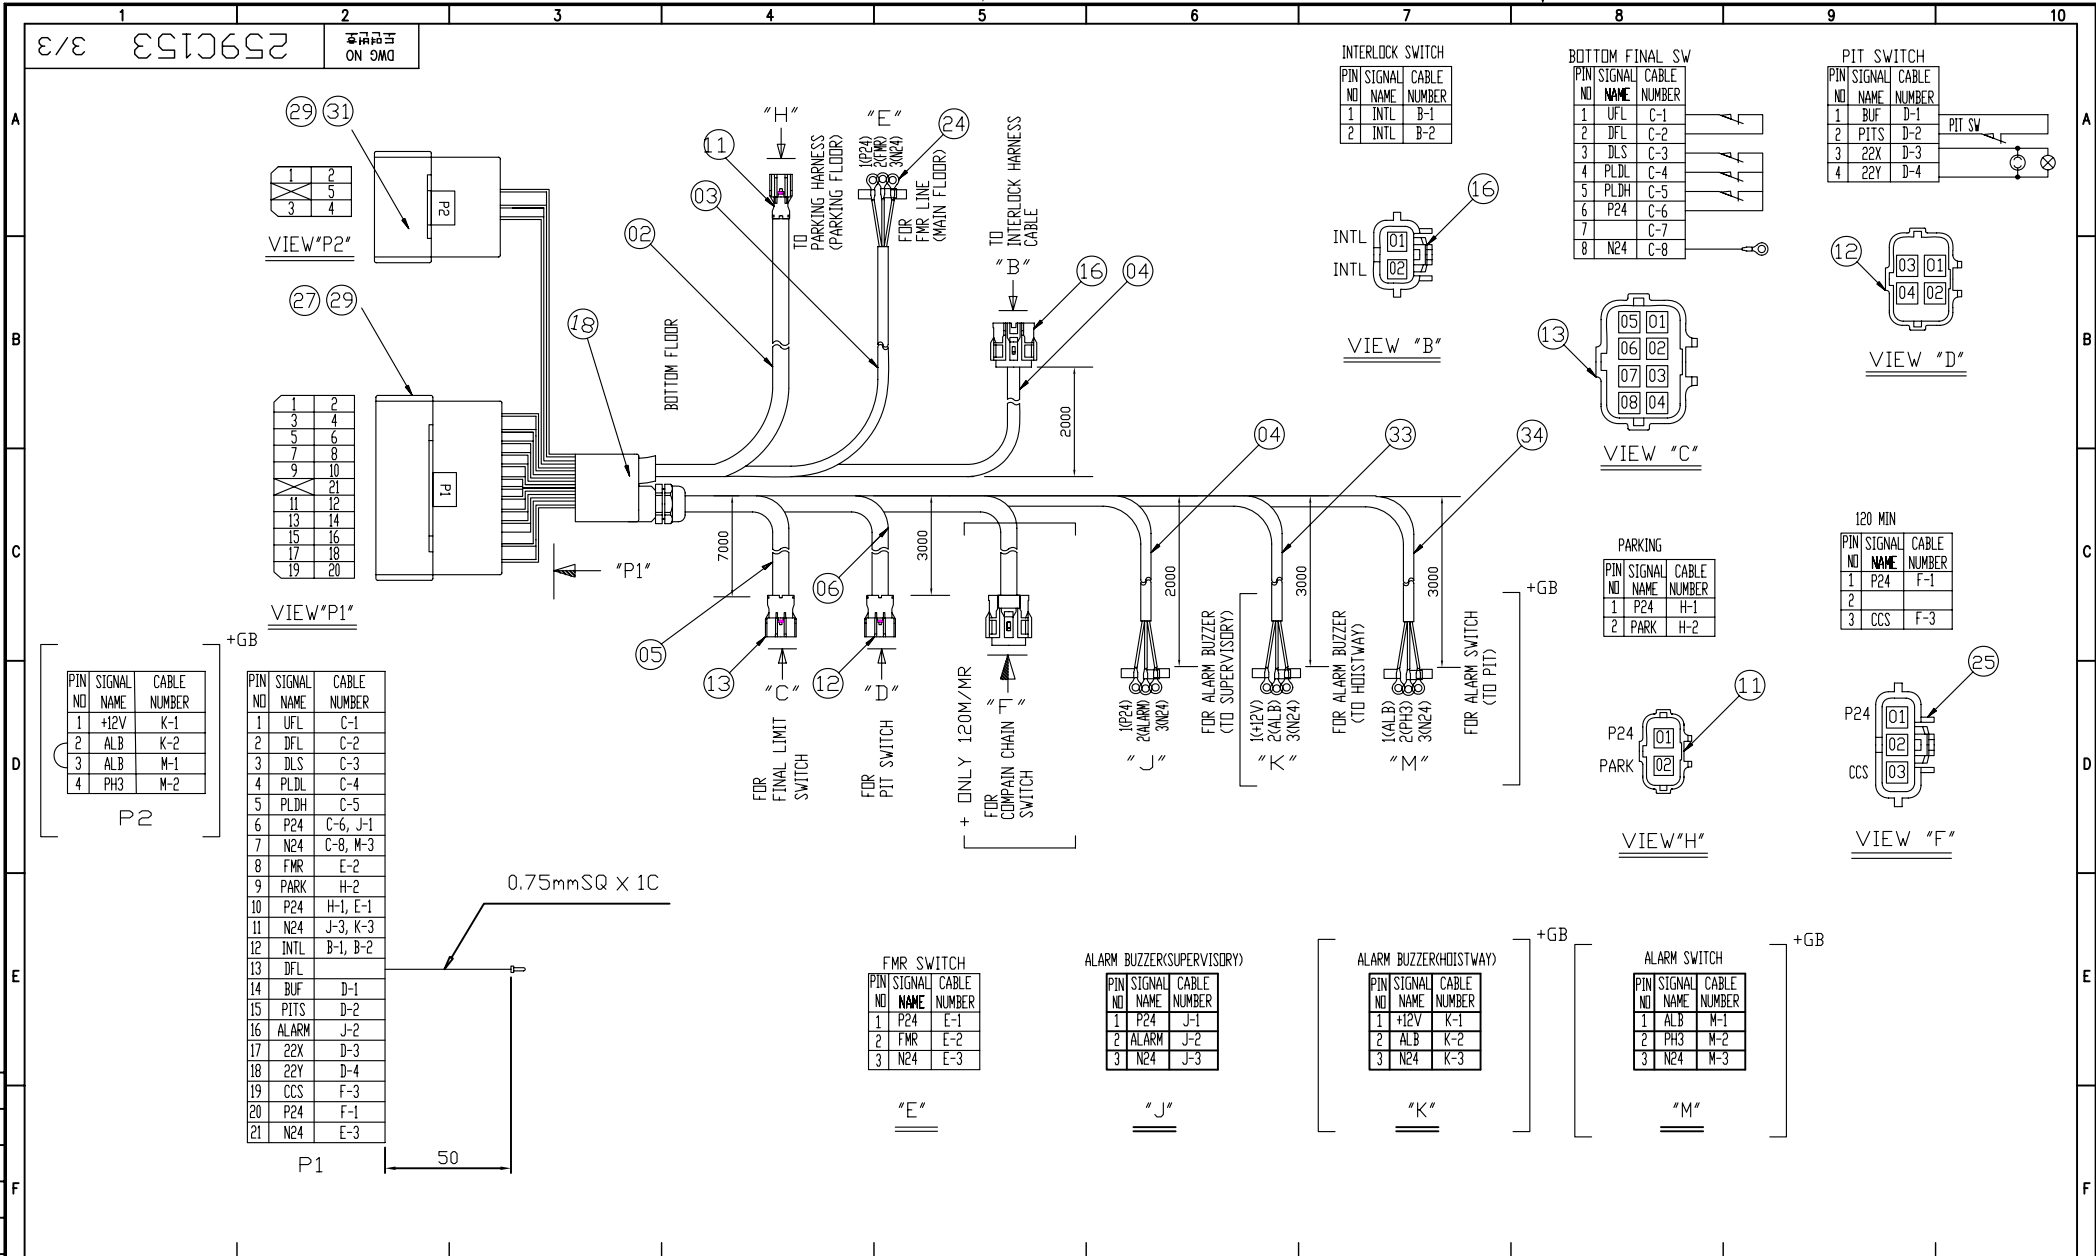


[illegible]

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
해기없이 복사할 수 없음

배 부 직

F


CHANGE
개 정 판

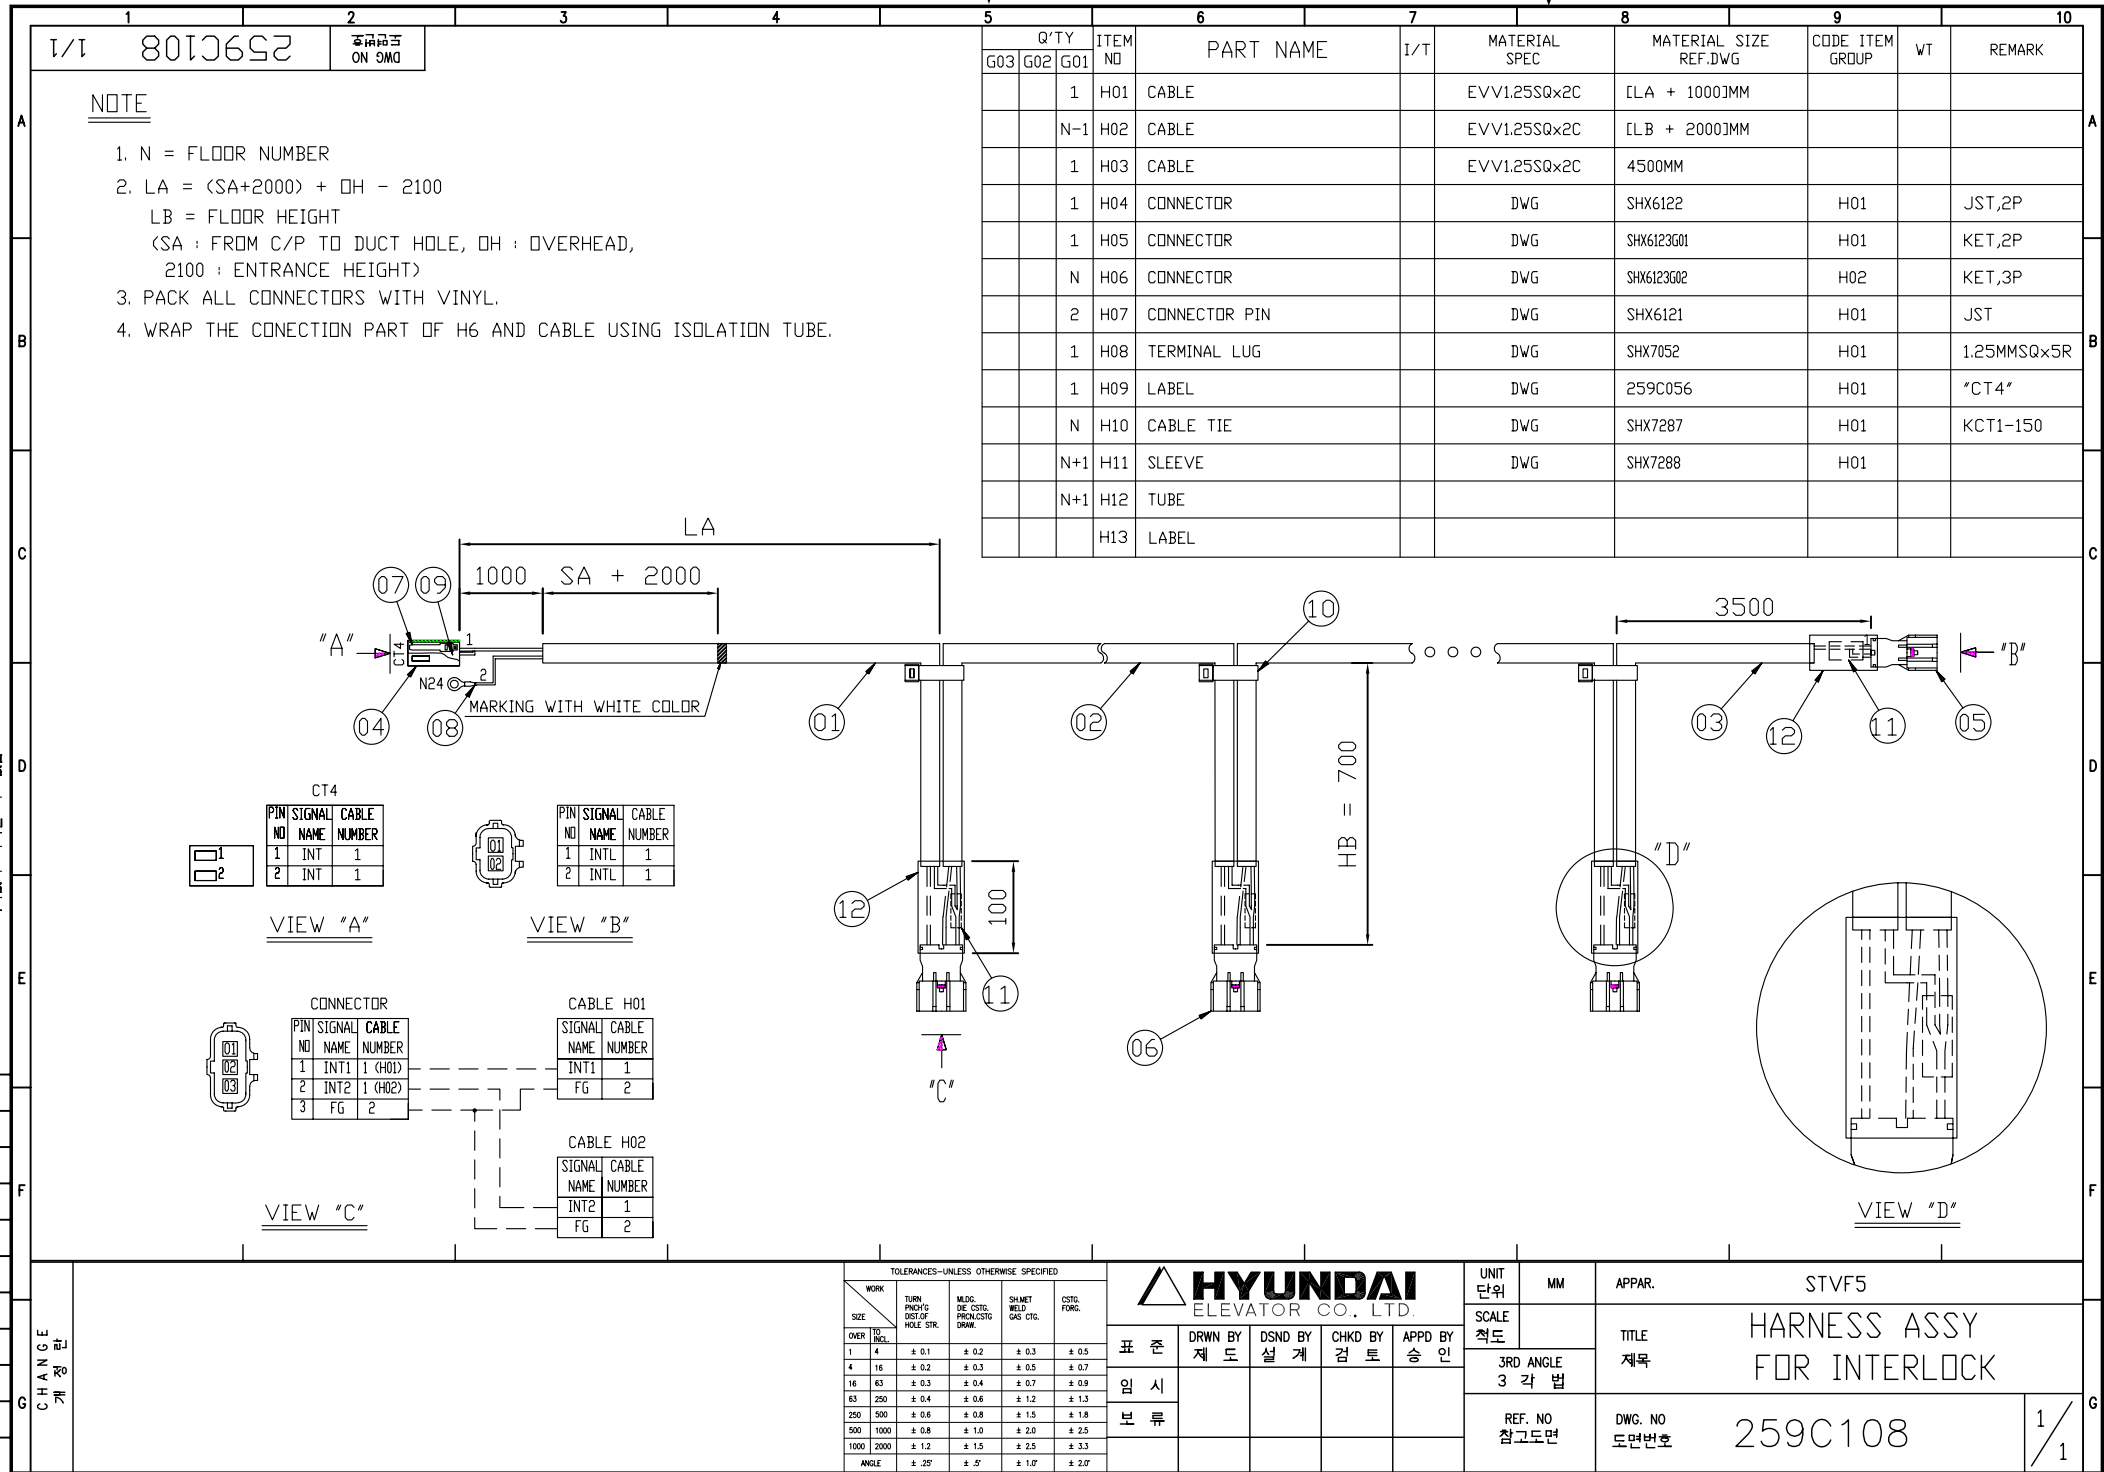

[illegible]

ON ON

1. TERMINAL LUG SIGNAL NAME USE NAME TUBE FIGURE.
2. CABLE NO 8 USE GREEN WIRE.
3. TERMINAL TUBE USE GREEN.

[illegible]

G02	CP TO ROPE GRIPPER	
G01	CP TO CAR BRAKE	
GROUP	GROUP TITLE	REMARK

TOLERANCES—UNLESS OTHERWISE SPECIFIED					
WORK		TURN ON DIST. OF HOLE CEN.	H.D.D. OF CEN. PROCLUSTO DIA.	SHAFT H.D.D. OF CEN.	CENL. FORM.
SIZE	TO FIN.				
OVER 1	TO FIN.				
1	4	± 0.1	± 0.2	± 0.3	± 0.5
4	16	± 0.2	± 0.3	± 0.5	± 0.7
16	63	± 0.3	± 0.4	± 0.7	± 0.9
63	250	± 0.4	± 0.6	± 1.2	± 1.3
250	500	± 0.6	± 0.8	± 1.5	± 1.8
500	1000	± 0.8	± 1.0	± 2.0	± 2.5
1000	2000	± 1.2	± 1.5	± 2.5	± 3.3
ANGLE		± .25°	± .5°	± 1.0°	± 2.0°



표준	DRWN BY 제 도	DSND BY 설 계	CHKD BY 검 토	APPD BY 승 인
임시	J.S.R			
보류				
	2004.6.15			

UNIT 단위	MM. INCH	APPAR.	CAR BRAKE, ROPE BRAKE
SCALE 척도	N S	TITLE 제목	CABLE
3RD ANGLE 3 각 법			
REF. NO 참고도면	DWG. NO 도면번호	259C168	1/1

[illegible]

HDW-91-003A A3 (420mm X 297mm)