



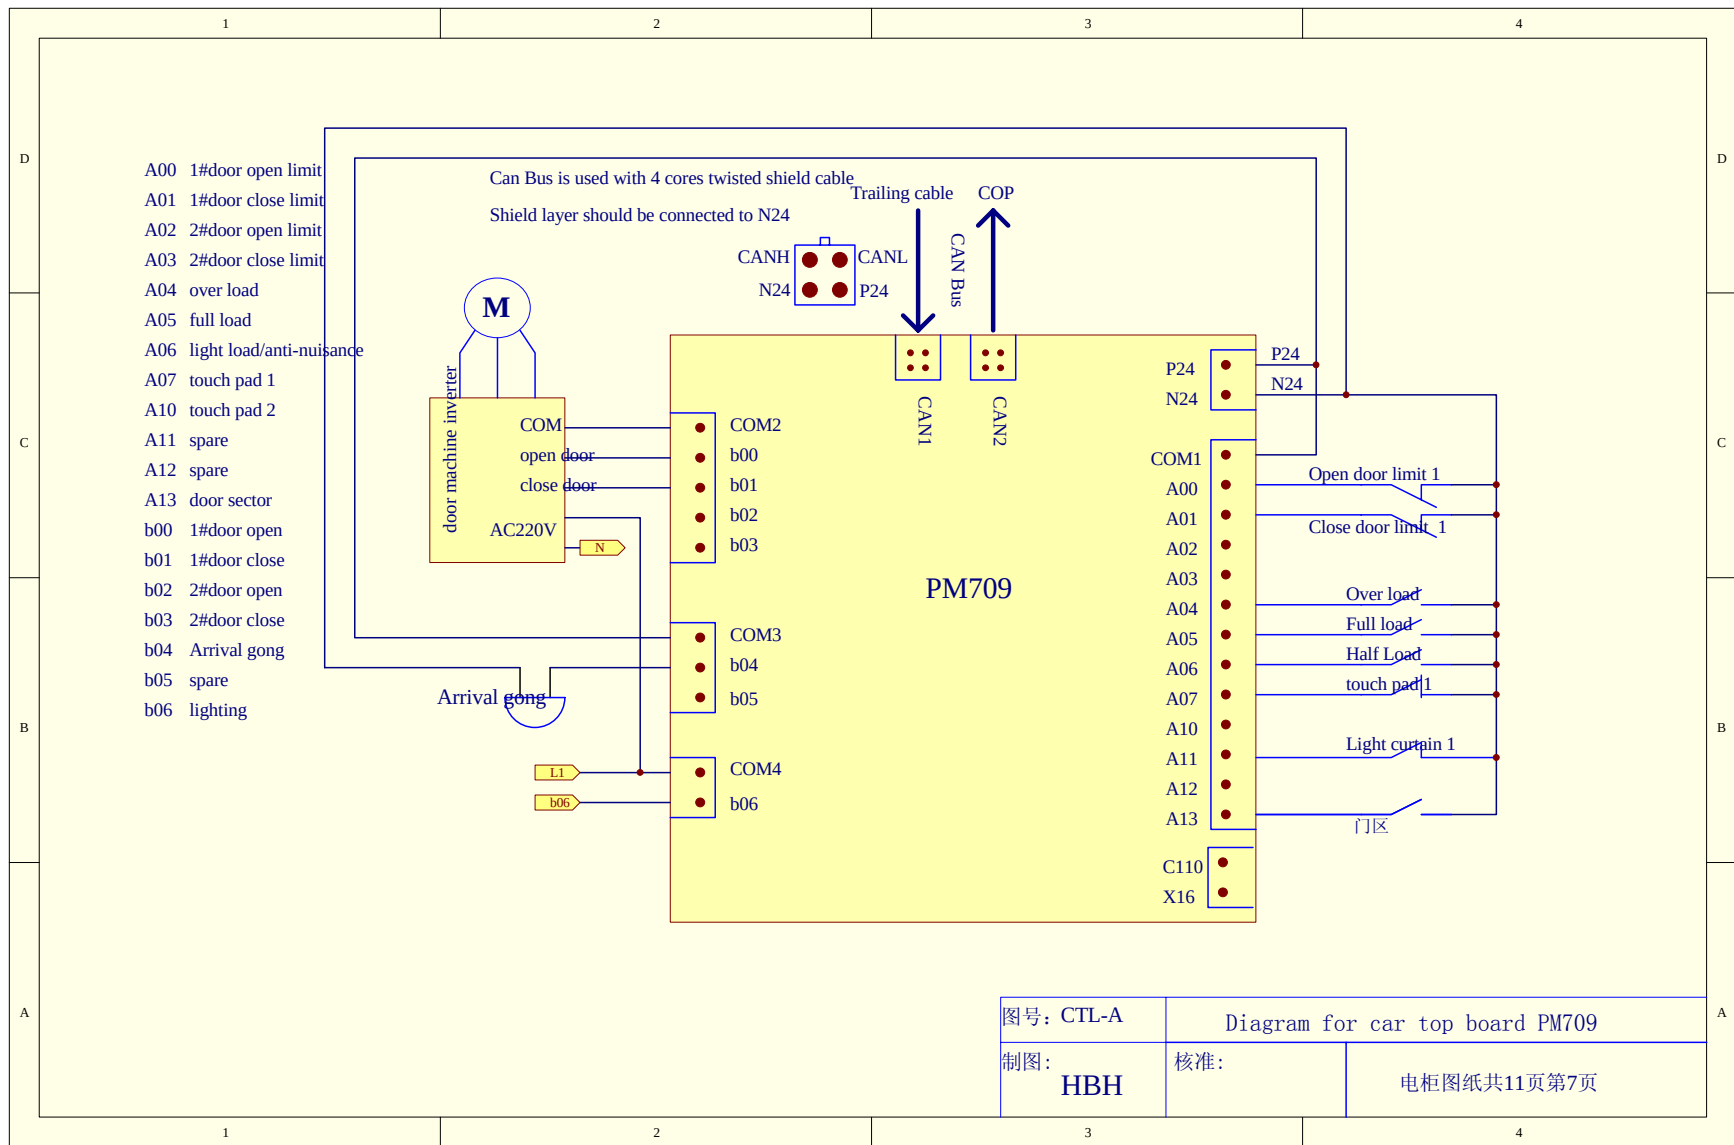

Terminal	C1 COP to connect 3m 24 core travelling cable (21PIN 3-5A)																
Pin No.	1	10	2	11	3	12	4	13	5	6	14	7	15	8	16	9	17
Cable No. (15 core round 4 core shield)	01	02	03	04	05	06	07	08	yellow/green	09	10	11	P01	P02	P03	P04	shield
Line No.	L1	L10	ST11	S109	EL+	EL-	ALM	+		-	R	L	CAN-H	CAN-L	P24	N24	sheld


Title		
Size A4	Number	Revision
Date:	13-Jun-2010	Sheet of
File:	E:\思敏\思敏说明书, 图纸\YASKAWA\2008\2+山特220VUPS-OKB.Ddb	

Interface	CT1 (21 pins socket which connect from control cabinet to car top box) (3-5A)																				
Pin No.	1	12	2	13	3	14	4	15	5	16	6	7	17	8	18	9	19	10	20	11	21
trailing cable ores cable code	white1	white2	yellow/green	white3	white4	white5	white6	white7	yellow1	yellow2	white1	white3	white4	white2	shield	yellow5	yellow6	yellow7	yellow8	yellow3	yellow4
connection code	L1	N0		S107	S101	S102	S109	DL110	+	-	P24	CAN-H	CAN-L	N24	sheld	x16	310	x07	x06	R	L

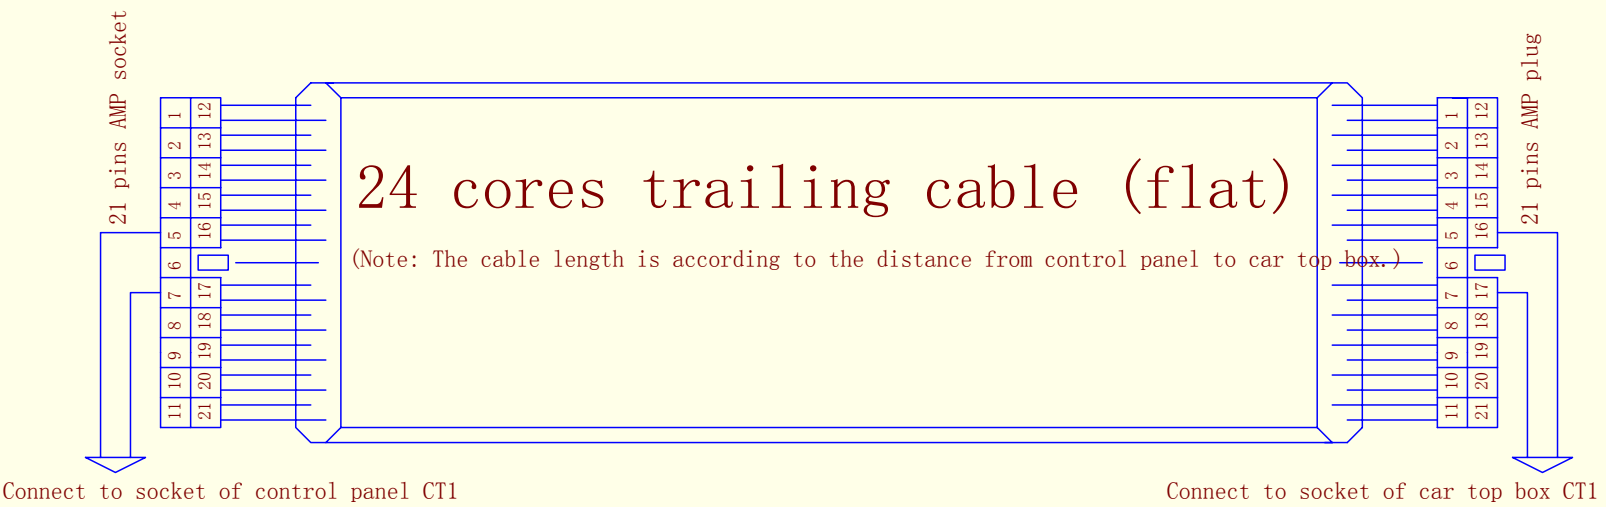


Title		
Size A4	Number	Revision
Date: 13-Jun-2010	Sheet of 2	
File: E:\思敏\思敏说明书, 图纸\YASKAWA\2009\2+山特220VUPS-OKB.Ddb		

Terminal	CTS1 (car top signal terminal)							12 bit terminal row(3-5A)				
pin No.	1	2	3	4	5	6	7	8	9	10	11	12
											yellow/green	
Line No.	B06	L10	N0	S101	S102	S109	DL110	T10	ST11			

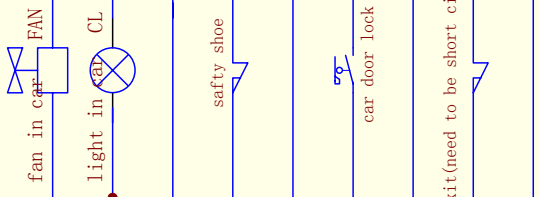


Terminal	CTS2 (car top input signal) 12 bit terminal(3-5A)											
Pin No.	1	2	3	4	5	6	7	8	9	10	11	12
Line No.	N24	A4	A5	A6	A11	N24	A13	N24	A7			

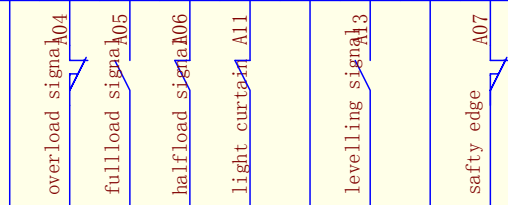

Terminal	CTD (car top door machine output) 9Pin(3-5A)								
PIN NO.	1	6	2	7	3	4	8	5	9
cable No. (10core round)	01	02	yellow/green	03	04	05	06	07	08
line No.	L1	N0		COM2	B00	B01	N24	A00	A01

Door operator

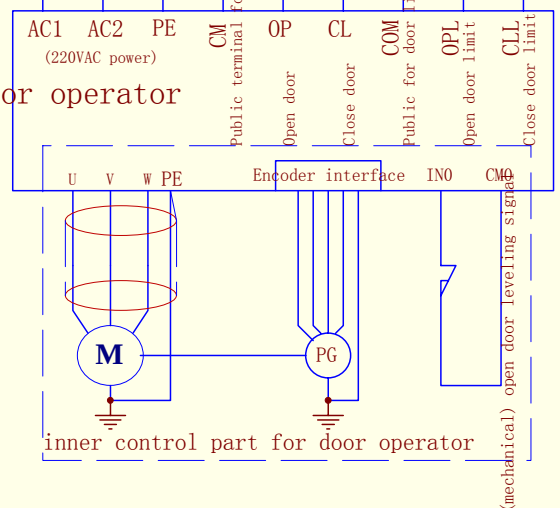


图号: MCM3 A1

制图:


核准:


Title car top box output terminal		
Size A4	Number	Revision
Date: 13-Jun-2010		
File: E:\思敏\思敏说明书_图纸\YASKAWA\电柜图\2+山特220VUPS-OKB.Ddb		

Terminal	CT1 (21 pin plugs from cabinet to car top box) (3-5A)																				
Pin No.	1	12	2	13	3	14	4	15	5	16	6	7	17	8	18	9	19	10	20	11	21
traveling cables 24core No.	whitel	white2 yellow/green	white3 yellow/green	white4	white5	white6	white7	yellow1	yellow2	Pwhite1	Pwhite3	Pwhite4	Pwhite2	shield	yellow5	yellow6	yellow7	yellow8	yellow3	yellow4	
line No.	L1	N0		S107	S101	S102	S109	DL110	+	-	P24	CAN-H	CAN-L	N24	sheld	x16	310	x07	x06	R	L

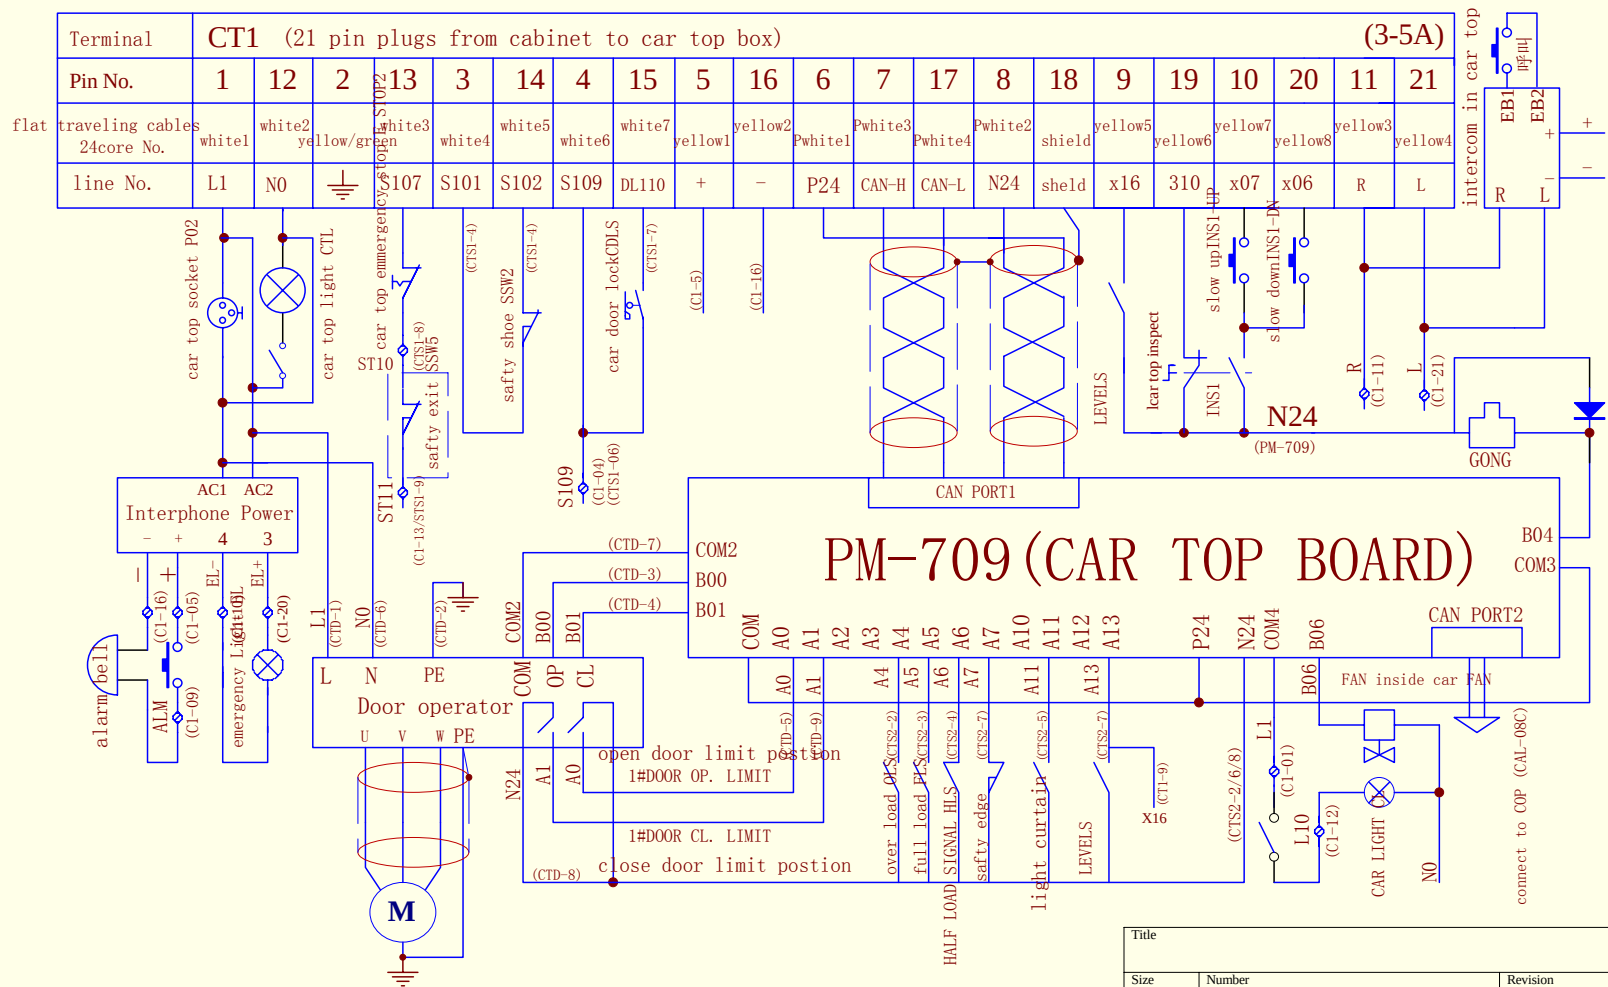


Title		
Size	Number	Revision
A4		
Date:	13-Jun-2010	Sheet of
File:	E:\思敏\思敏说明书_图纸\YASKAWA\2+山特220VUPS-OKB.Ddb	

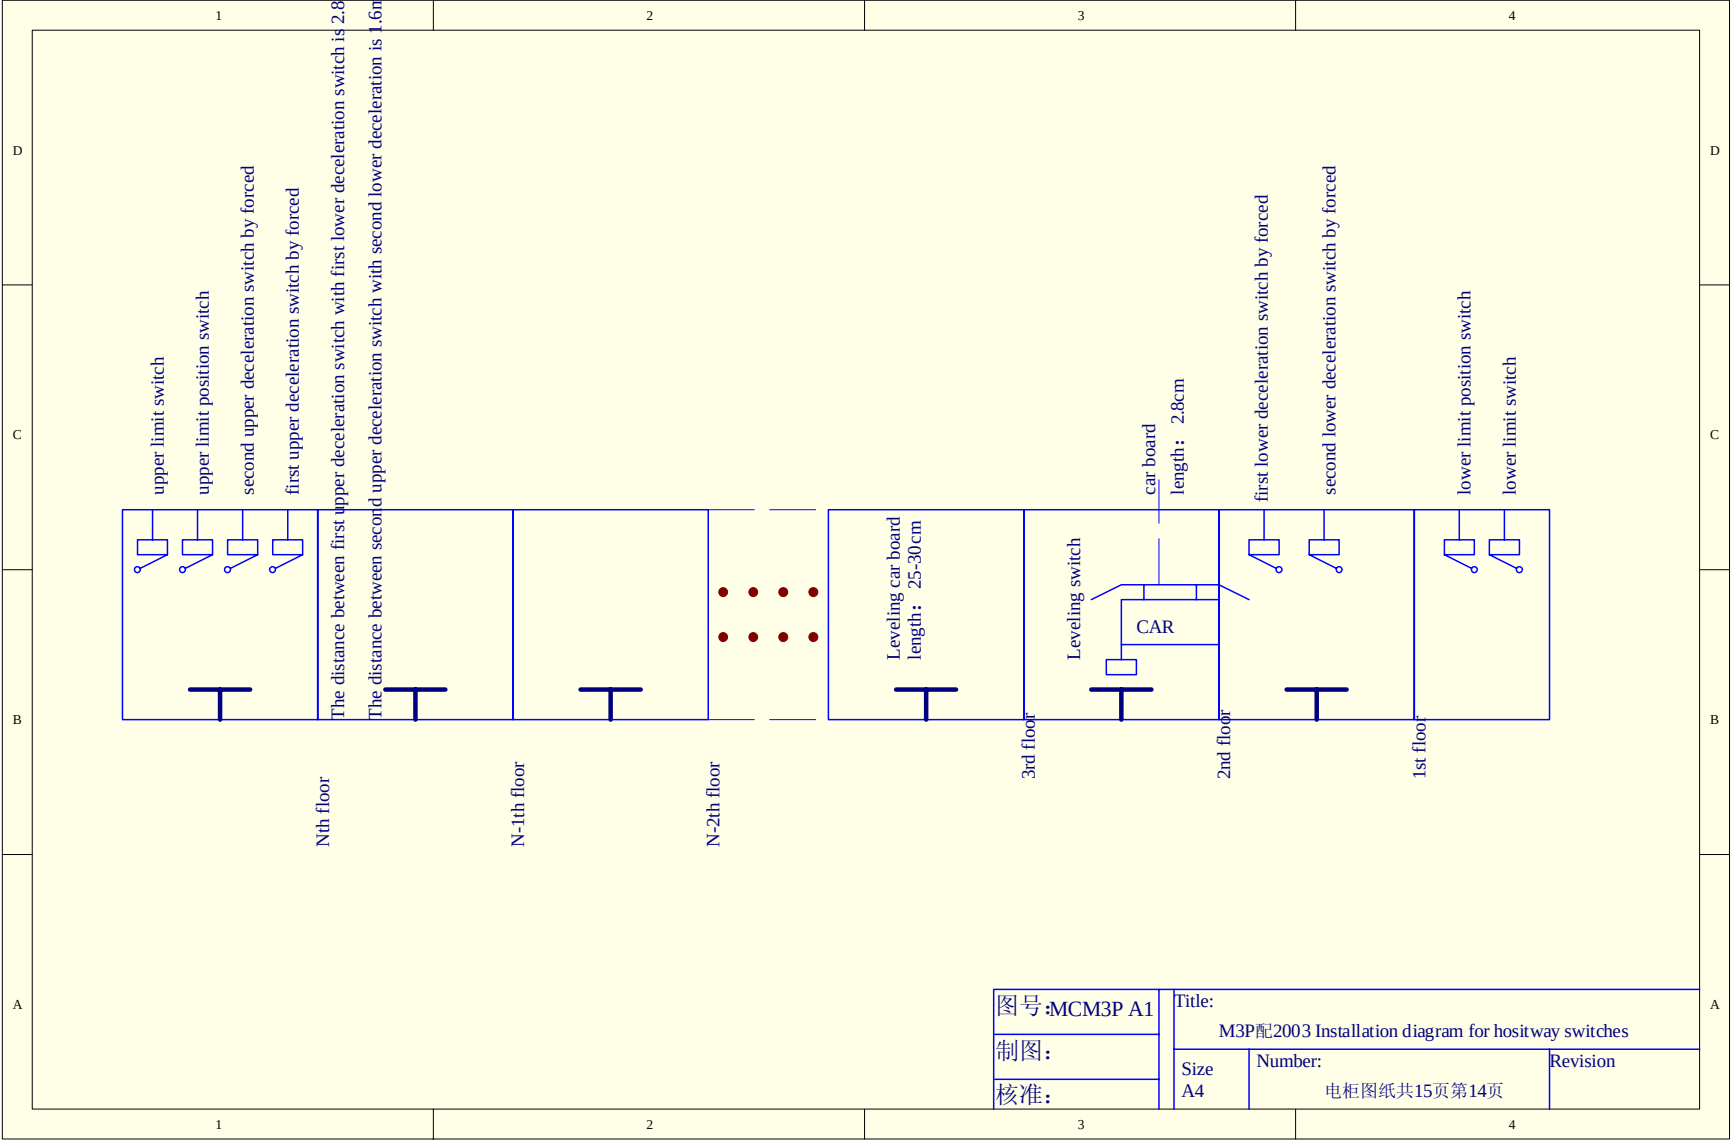


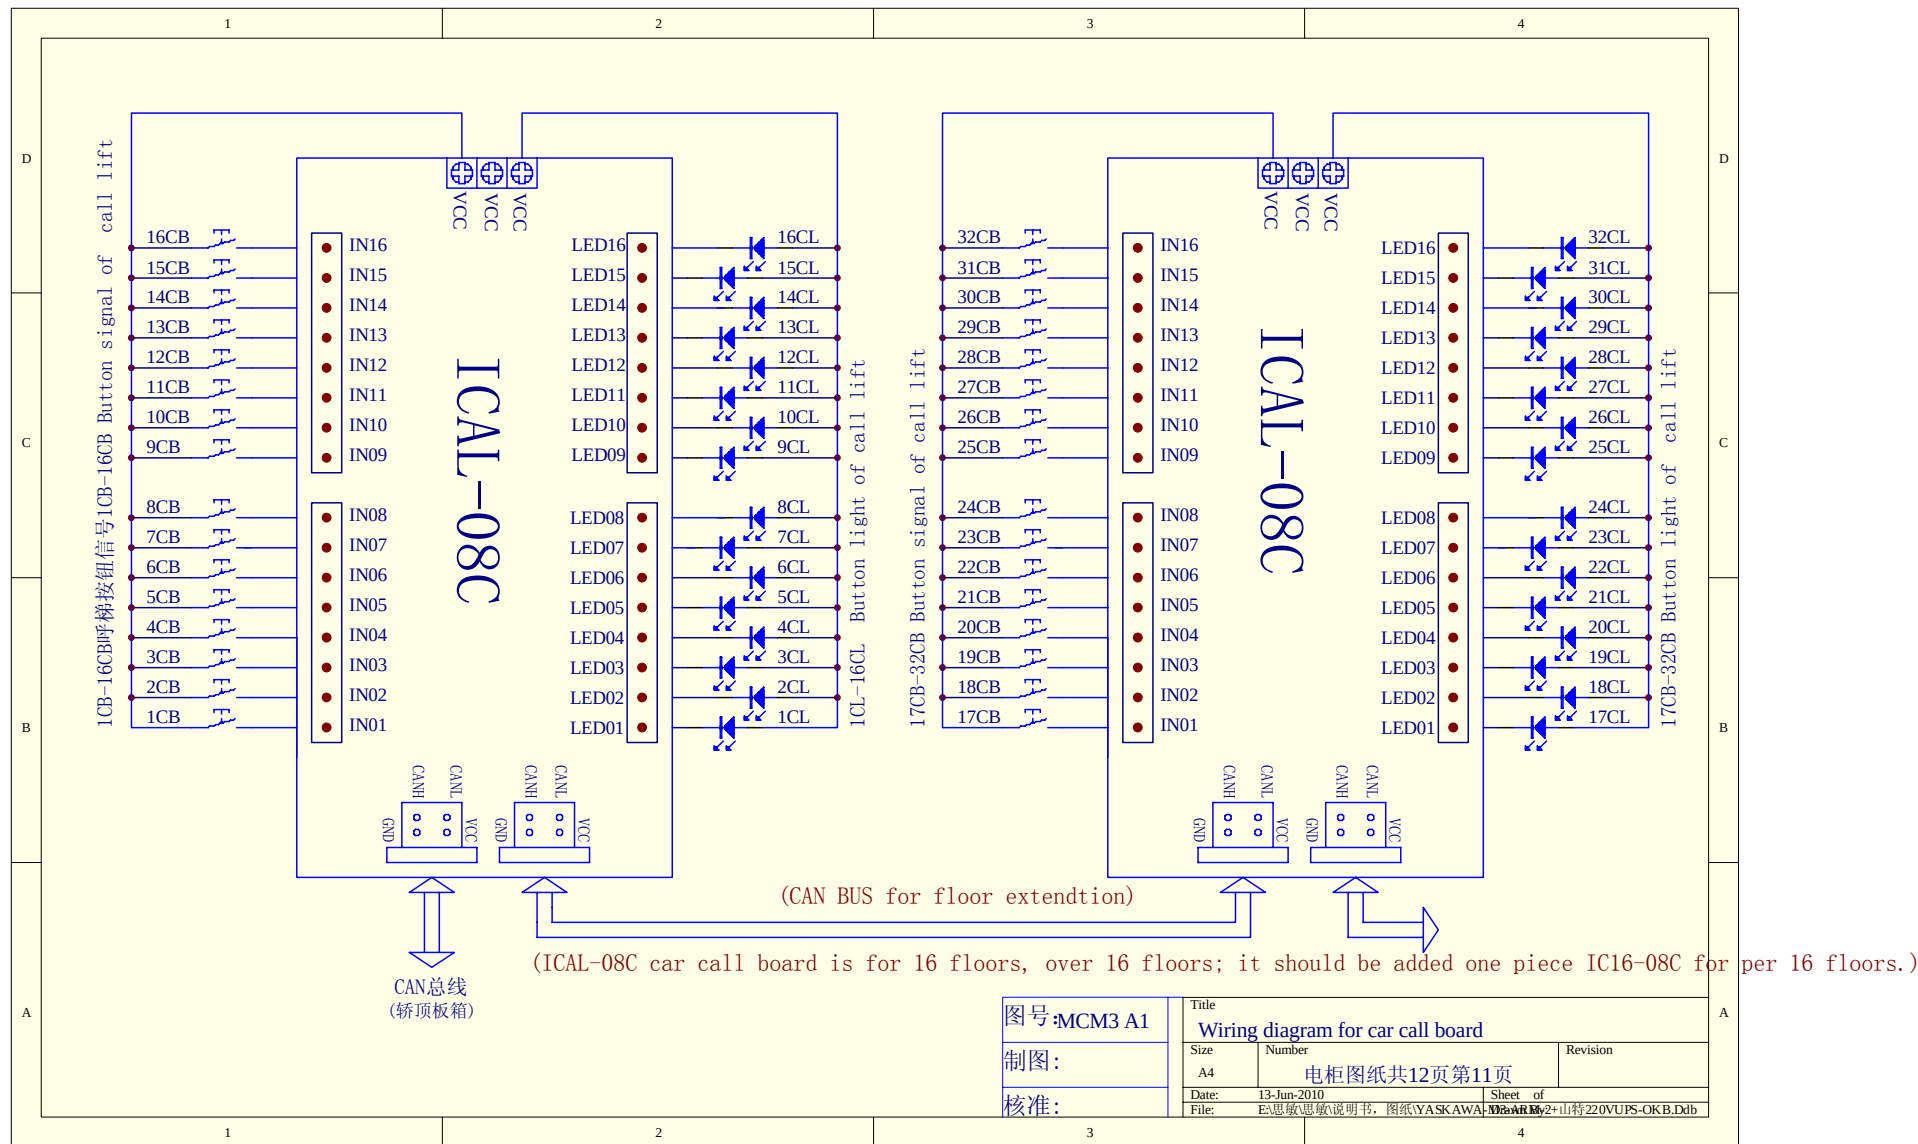

Interface	WB (Connect port for pit bottom signal) (21PIN 3-5A)																
Pin No.	1	10	2	11	3	12	4	13	5	6	14	7	15	8	16	9	17
Cable No. (24 cores round)	YELLOW 1	YELLOW 2	YELLOW 3	YELLOW 4	YELLOW 5	YELLOW 6	YELLOW 7	YELLOW 8	YELLOW/GREEN 9	YELLOW 10	YELLOW 11	YELLOW 12	YELLOW 13	YELLOW 14	YELLOW 15	YELLOW 16	YELLOW 17
Connection	L1	N0	S109	S104	S106	S107	+	-		L	R	N24	x20	x21	x22	x24	x26

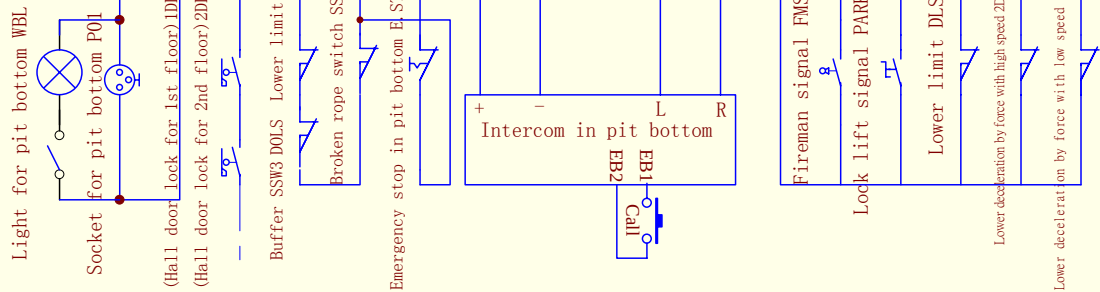

Interface	WT (Switch signal for upper hoistway) (9PIN 3-5A)								
PIN NO.	1	6	2	7	3	4	8	5	9
Cable No. (10 cores round)	01	02	03	yellow/green 04	05	06	07	08	09
CABLE NO.	DL111	S103	S104		x23	x25	x27	N24	

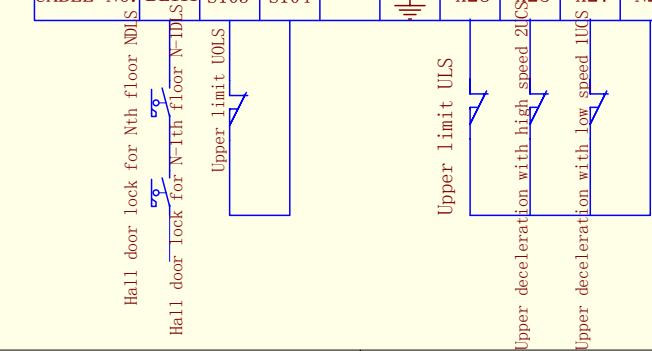


Install position for deceleration switch by force (measure distance from the car sill to basement)							
SPEED	0.25m/s	0.5m/s	1.0m/s	1.6m/s	1.75m/s	2.0m/s	2.5m/s
1UCS	400mm	800mm	1600mm	1600mm	1600mm	1600mm	1600mm
2UCS	—	—	—	2600mm	2800mm	4000mm	5000mm
1DCS	400mm	800mm	1600mm	1600mm	1600mm	1600mm	1600mm
2DCS	—	—	—	2600mm	2800mm	4000mm	5000mm


图号: MCM3 A1
制图:
核准:

Title		
Install position for deceleration switch		
Size	Number	Revision
A4	电柜图纸共12页第10页	
Date:	13-Jun-2010	Sheet of
File:	E:\思敏\思敏说明书_图纸\YASKAWA\电梯\220V\220VUPS-OKB.Dbd	

电柜图纸共12页第10页

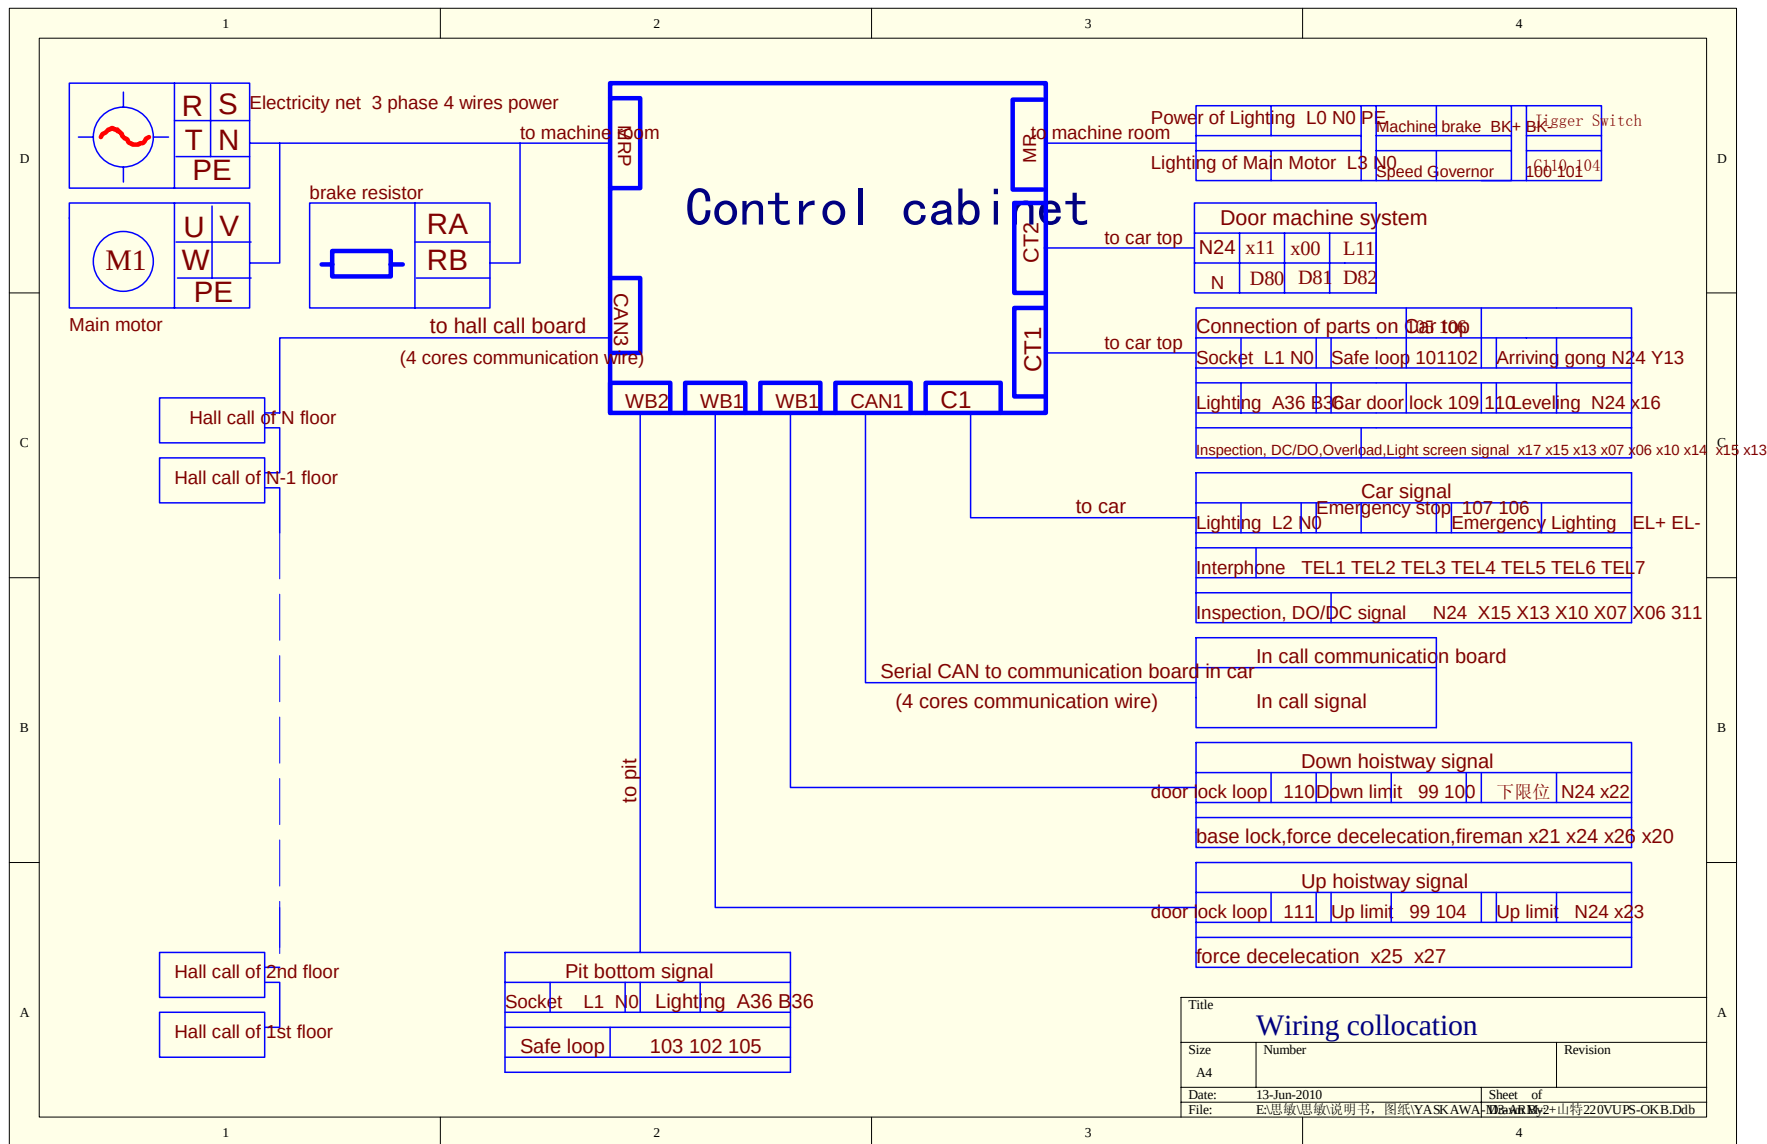


MICOLIFTM3-ARM-2 INPUT UNIT

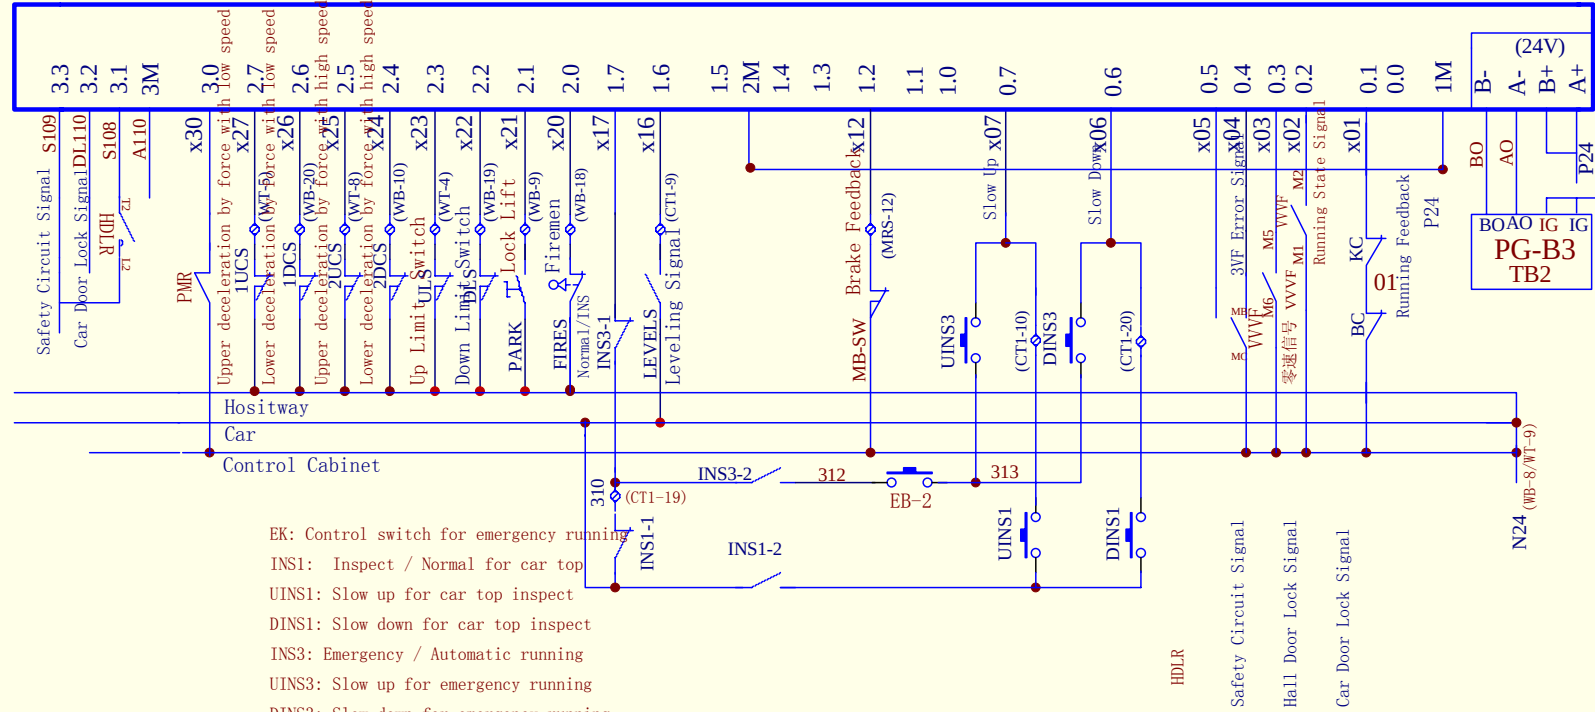


图号: MCM3 A1
制图:
核准:

Title Input Signal		
Size A4	Number 电柜图纸共12页第3页	Revision
Date: 13-Jun-2010	Sheet of 12	File: E:\思敏\思敏说明书, 图纸\YASKAWA\MICOLIFTM3-ARM2+山特220VUPS-OKB.Ddb


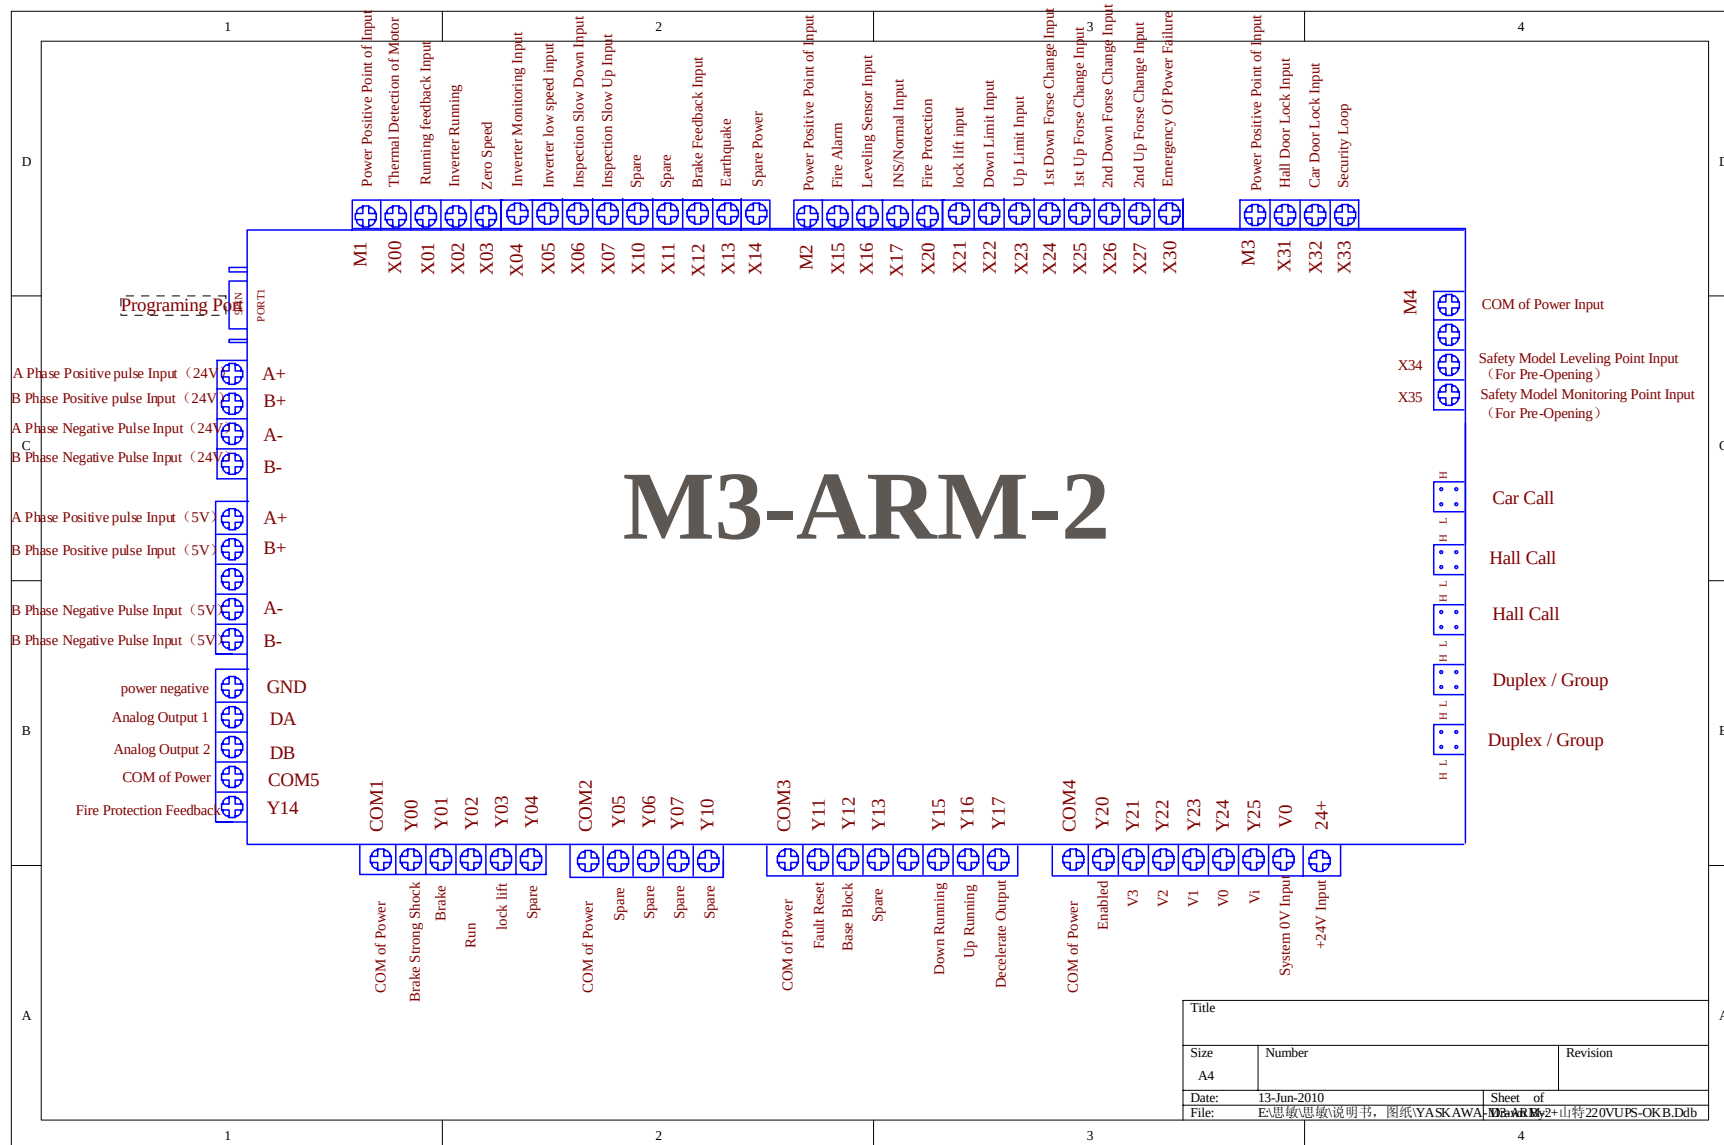


MICOLIFTM3-ARM-2 OUTPUT UNIT

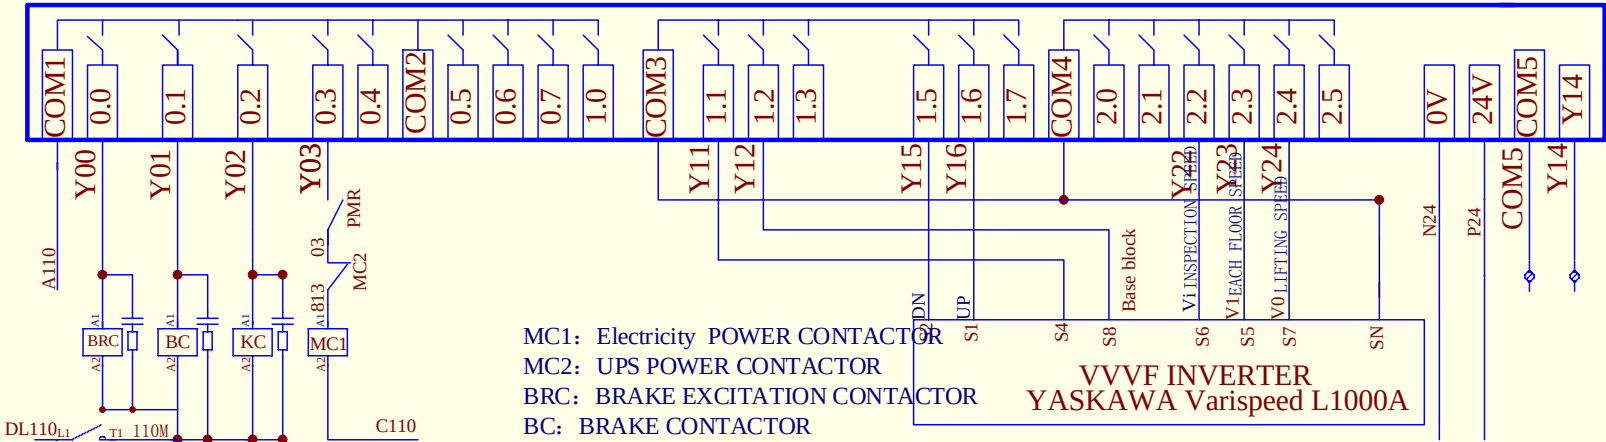

MC1: Electricity POWER CONTACTOR
MC2: UPS POWER CONTACTOR
BRC: BRAKE EXCITATION CONTACTOR
BC: BRAKE CONTACTOR
KC: RUNNING CONTACTOR
VVVF: INVERTER
TR: TIME RELAY

VVVF INVERTER
YASKAWA Varispeed L1000A




	OUTPUT	Y22	Y23	Y24	PARAMETER
Speed					
INSPECTION		1	0	0	D1-02
LIFTING		0	0	1	D1-05
SINGLE SPEED		0	1	1	D1-07
MULTI SPEED		1	0	1	D1-06

VS-61667 Parts of datas of Frequency Inverter


3	4	5	6	7	8	9/10	25/27	F1-06
H1-01	H1-02	H1-03	H1-04	H1-05	H1-06	H2-01	H2-02	
8	14	3	4	5	6	0	1	4
C1-01	C1-02	C2-01	C2-02	C2-03	C2-04	A1-02	B1-02	L3-04
3S	3S	1.2S	0.8S	0.8S	1.2S	3	1	0

Title		
Size A4	Number	Revision
Date: 13-Jun-2010	Sheet of	
File: E:\思敏\思敏说明书, 图纸\YASKAWA\变频器\2+山特220VUPS-OKB.Ddb	2	

TERMINAL	MRS (MACHINE ROOM SIGNAL TERMINAL)																			
PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
WIRING NO.			L1	NO	C110	S100	BK+	BK-	S102	S103	N24	x12	+	-	R	L	A35	B35	COM5	Y14

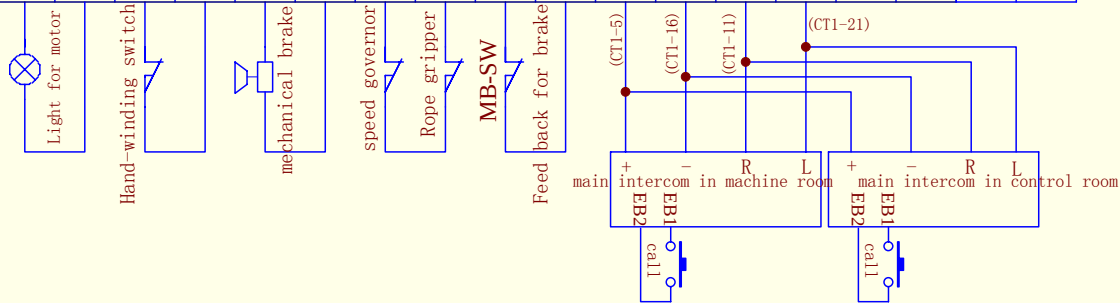

Terminal	MRP MRP (some parts of machine room)											
PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12
CABLE NO	R	S	T	N	⏏	U	V	W	PE	1B	1C	PE

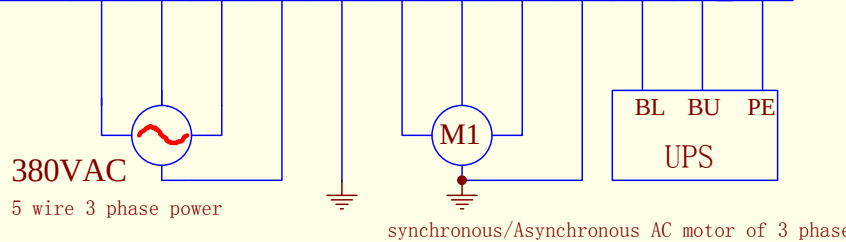

图号:MCM3 A1
制图:
核准:

Title		
Outlet terminal and parts of machine room		
Size	Number	Revision
A4	电柜图纸共12页第7页	
Date:	13-Jun-2010	Sheet of
File:	E:\思敏\思敏说明书, 图纸\YASKAWA\电柜\图号MCM3 A1\2+山特220VUPS-OKB.Ddb	

