

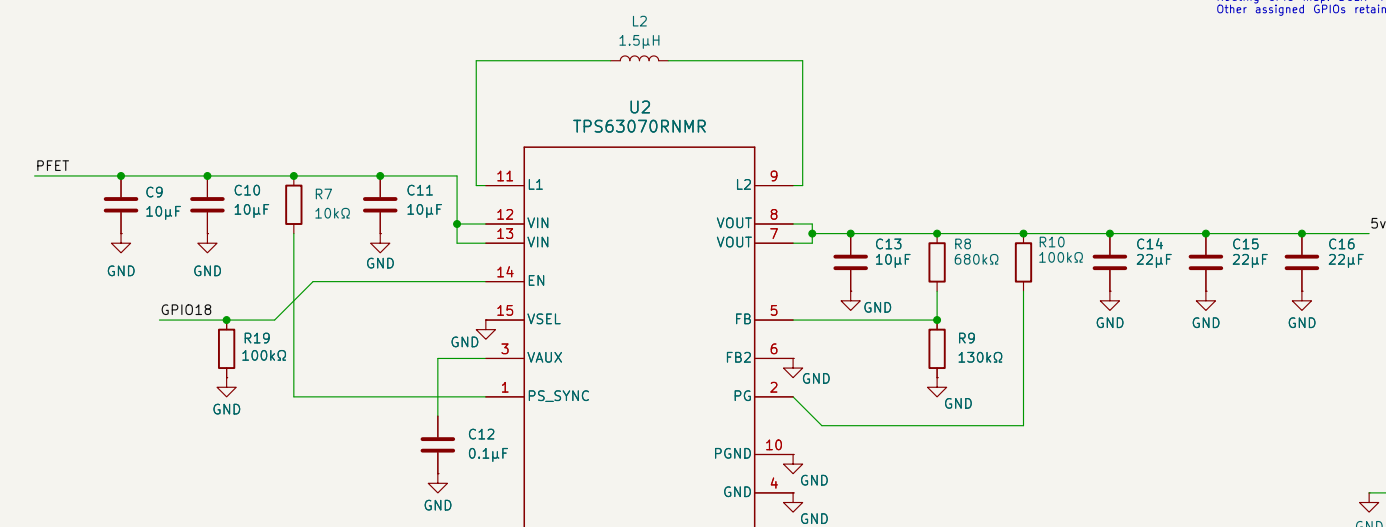
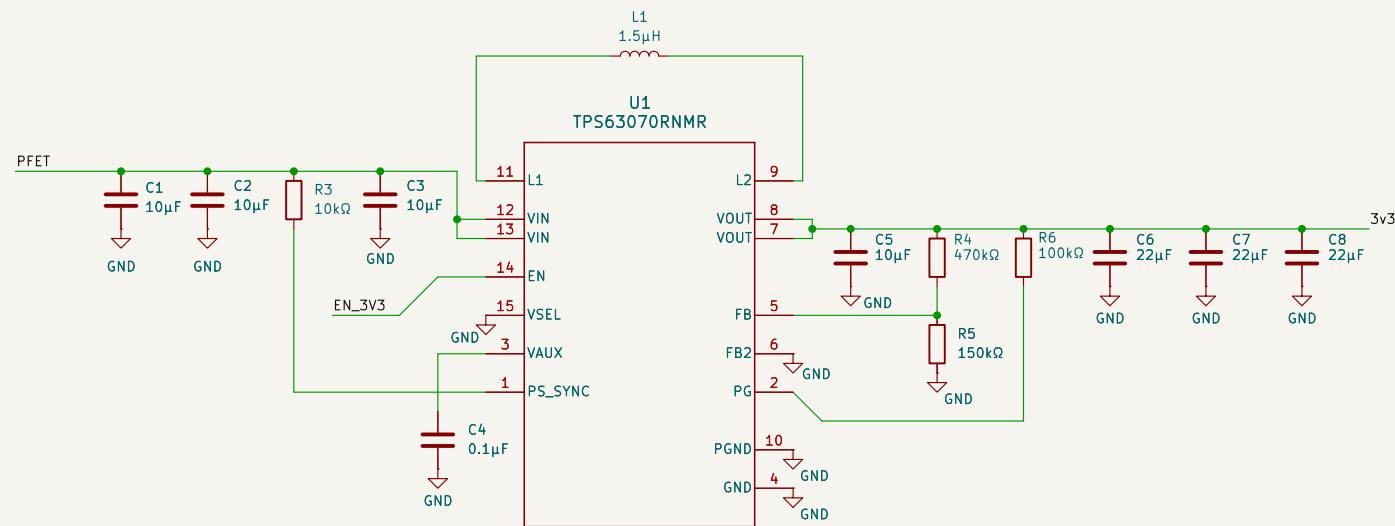









DESIGN REVIEW 2026-09-04 | Prototype; battery/load and enclosure pending confirmation.
TPS63070: PS/SYNC HIGH = power save (both rails), 3.31V / 4.985V nominal.
Cold start requires >=3.0V at converter input. J5-PH Input rated 2A with specified wire.
USB is data-only; VBUS supplies ESD bias only. R11 DNP for low standby current.
RTC backup/trickle charge OFF; time is lost when main power is off.
Capacitance must be checked after DC bias; inspect review/design-review.md before fabrication.

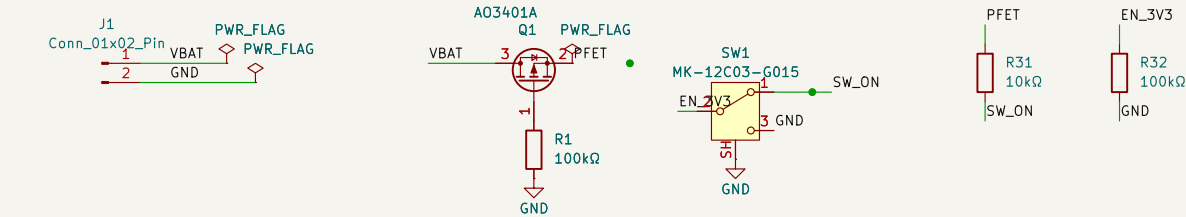

OLED: GPIO41 = power, GPIO11 = bus connect (both default OFF).
ON: GPIO41 high, wait for supply, GPIO11 high, OFF: GPIO11 low, then GPIO41 low.
J4 order: GND / switched 3V3 / SCL / SDA. Verify display pinout.

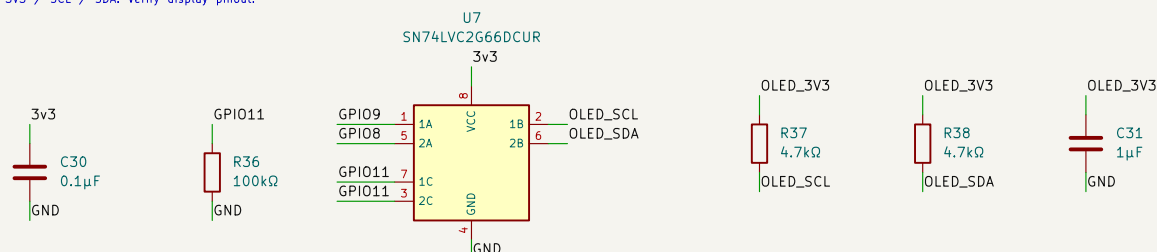

Routing GPIO map: BCLK=47, LRCLK=48, DIN=14; OLED_power=41.
Other assigned GPIOs retained; firmware changes in review/gpio-map.csv.

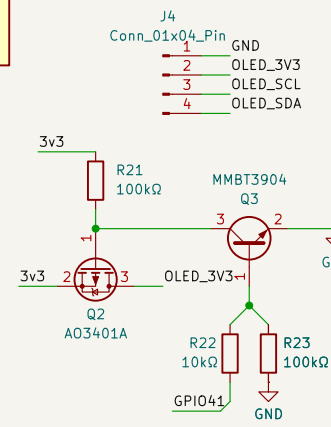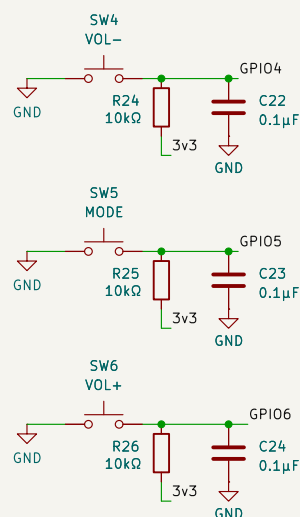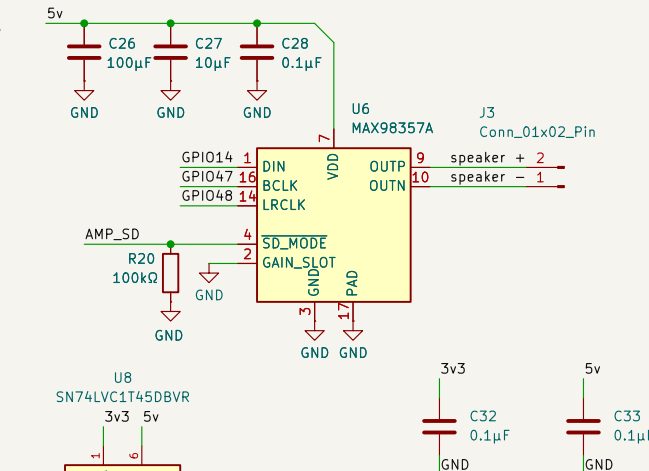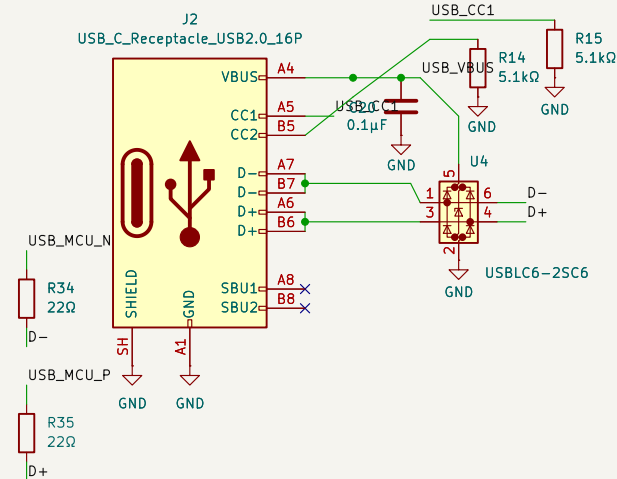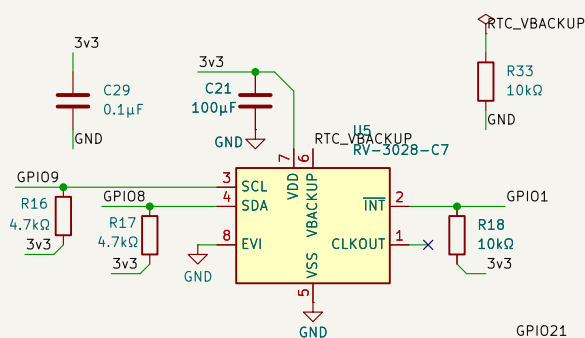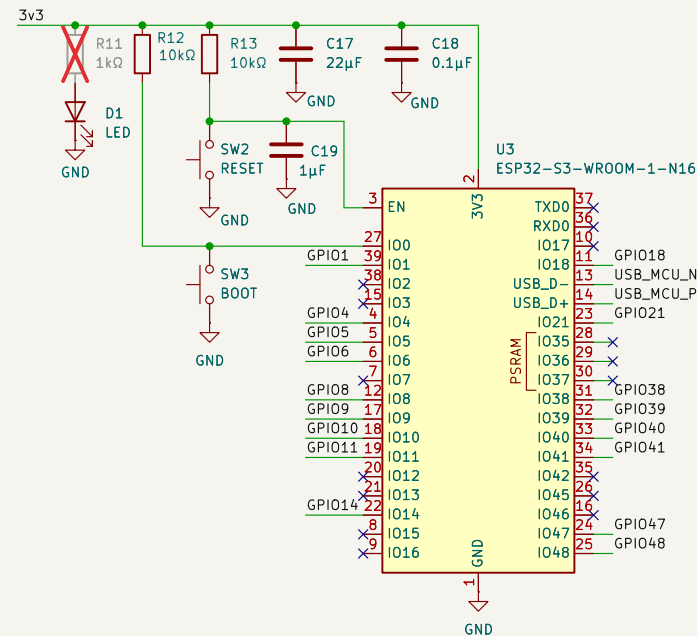

D2: common anode at 3V3; RGB GPIO LOW = ON.
Wuerth 150141M173100: A=1, R=3, G=4, B=2.

Sheet: /		
File: esp32s3-devkit-5v.kicad_sch		
Title:		
Size: A3	Date:	Rev:
KiCad E.D.A. 10.0.1	Id: 1/1	