


SUPERNOVA 1260 / FAN-RACK PLATE R3

M4 tapped alternative | 10U | 304 stainless | 2.00 +/-0.10 mm

FRONT / 1:2 - blue holes are fan mount positions

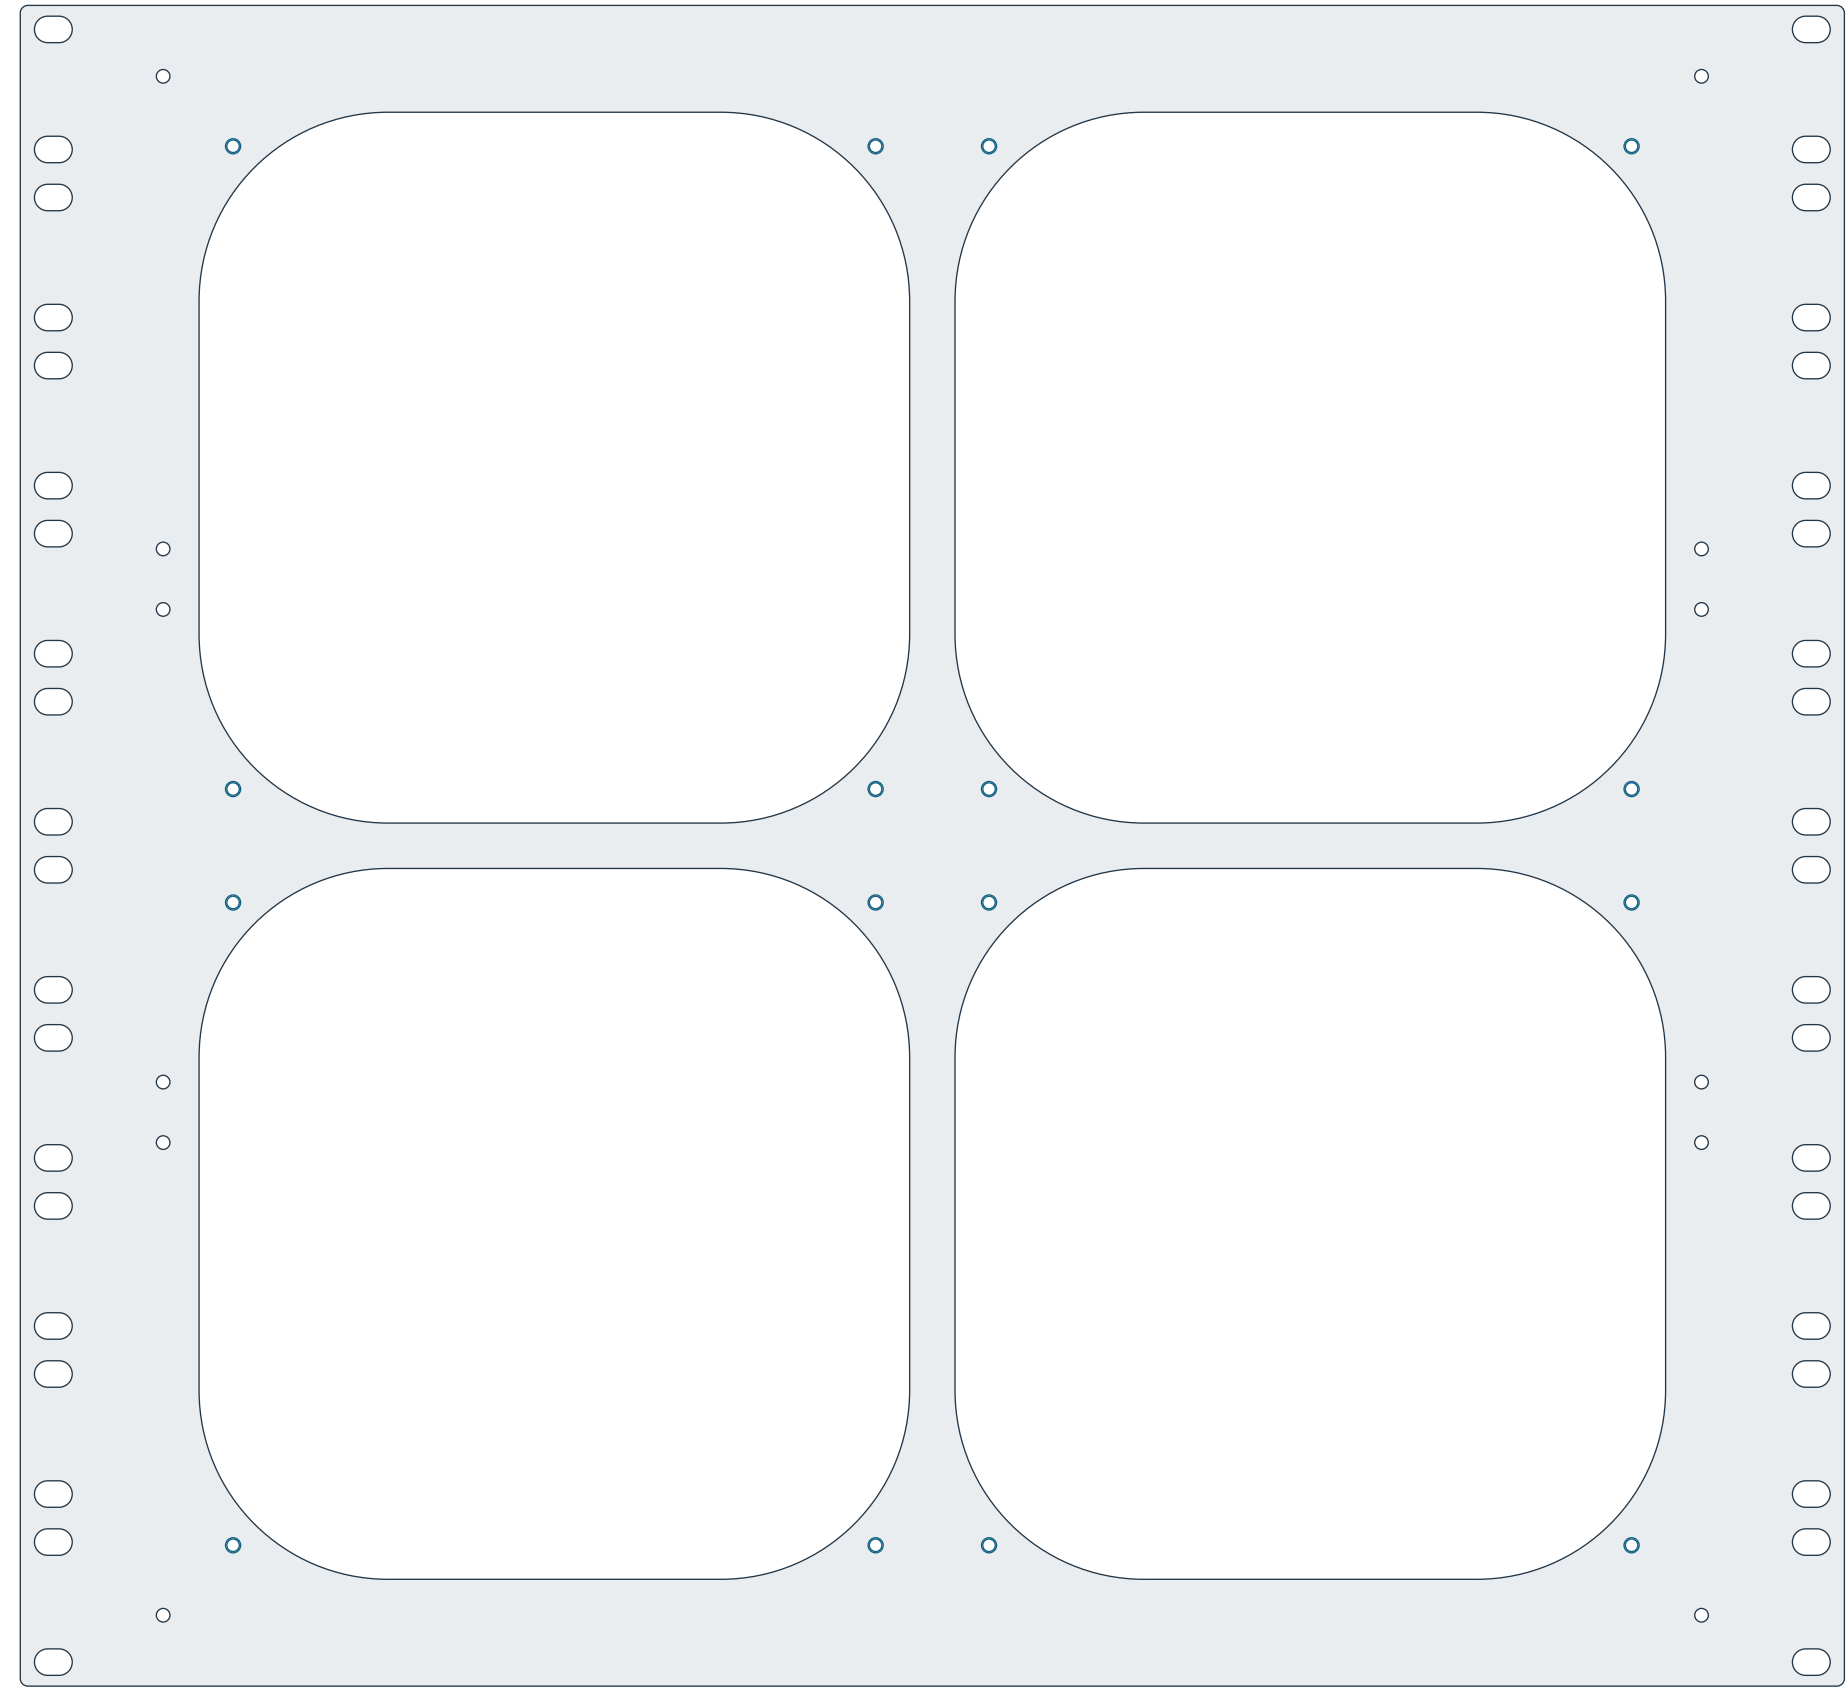

FAN FIXINGS / 16 HOLES

M4 x 0.7 - 6H THROUGH; drill 3.3 nominal.

STEP/DXF show tap pilots, not plain bores.

X = -185, -15, +15, +185.

Y = 37.25, 207.25, 237.25, 407.25.

All 16 Cartesian combinations. No countersinks.

Per-fan pitch 170 x 170; fan centres 200 x 200.

RADIATOR FIXINGS / 12 HOLES

Diameter 3.60 +0.15 / 0 THROUGH.

X = -203.50, +203.50.

Y = 18.75, 143.75, 159.75,
284.75, 300.75, 425.75.

M3 threads remain in the radiator frame.

RACK FIXINGS / 40 SLOTS

10 x 7 THROUGH, R3.5 ends.

X = -232.55, +232.55.

Y = 44.45 n + 6.35 / 38.10; n = 0...9.

Widths +0.15 / 0; ends remain semicircular.

PROFILE AND MANUFACTURING

4x 188 x 188 apertures with R50 corners.

Centres X +/-100; Y122.25 / 322.25.

Full diameter 188 air opening retained.

12 mm central webs; outer corners R2.

Hole centre coordinates +/-0.10.

Other profile dimensions +/-0.15.

Fan-hole edge break C0.1 maximum.

Other cut edges: deburr 0.2-0.3.

Flatness target 0.5 over the free plate.

Satin finish; no surface markings.

ASSEMBLY / SEE SHEET 3

Origin: X midplane; Y bottom of plate.

Depth is perpendicular to this elevation.

Mass 1.249 kg; fan/cooler parts separate.


Outer rack rows: head/washer OD <=12.

Full nominal 10U height has no panel gap.

SUPERNOVA 1260 / FAN-RACK PLATE R4

M4 clearance + nuts alternative | 10U | 304 stainless | 2.00 +/-0.10 mm

FRONT / 1:2 - blue holes are fan mount positions

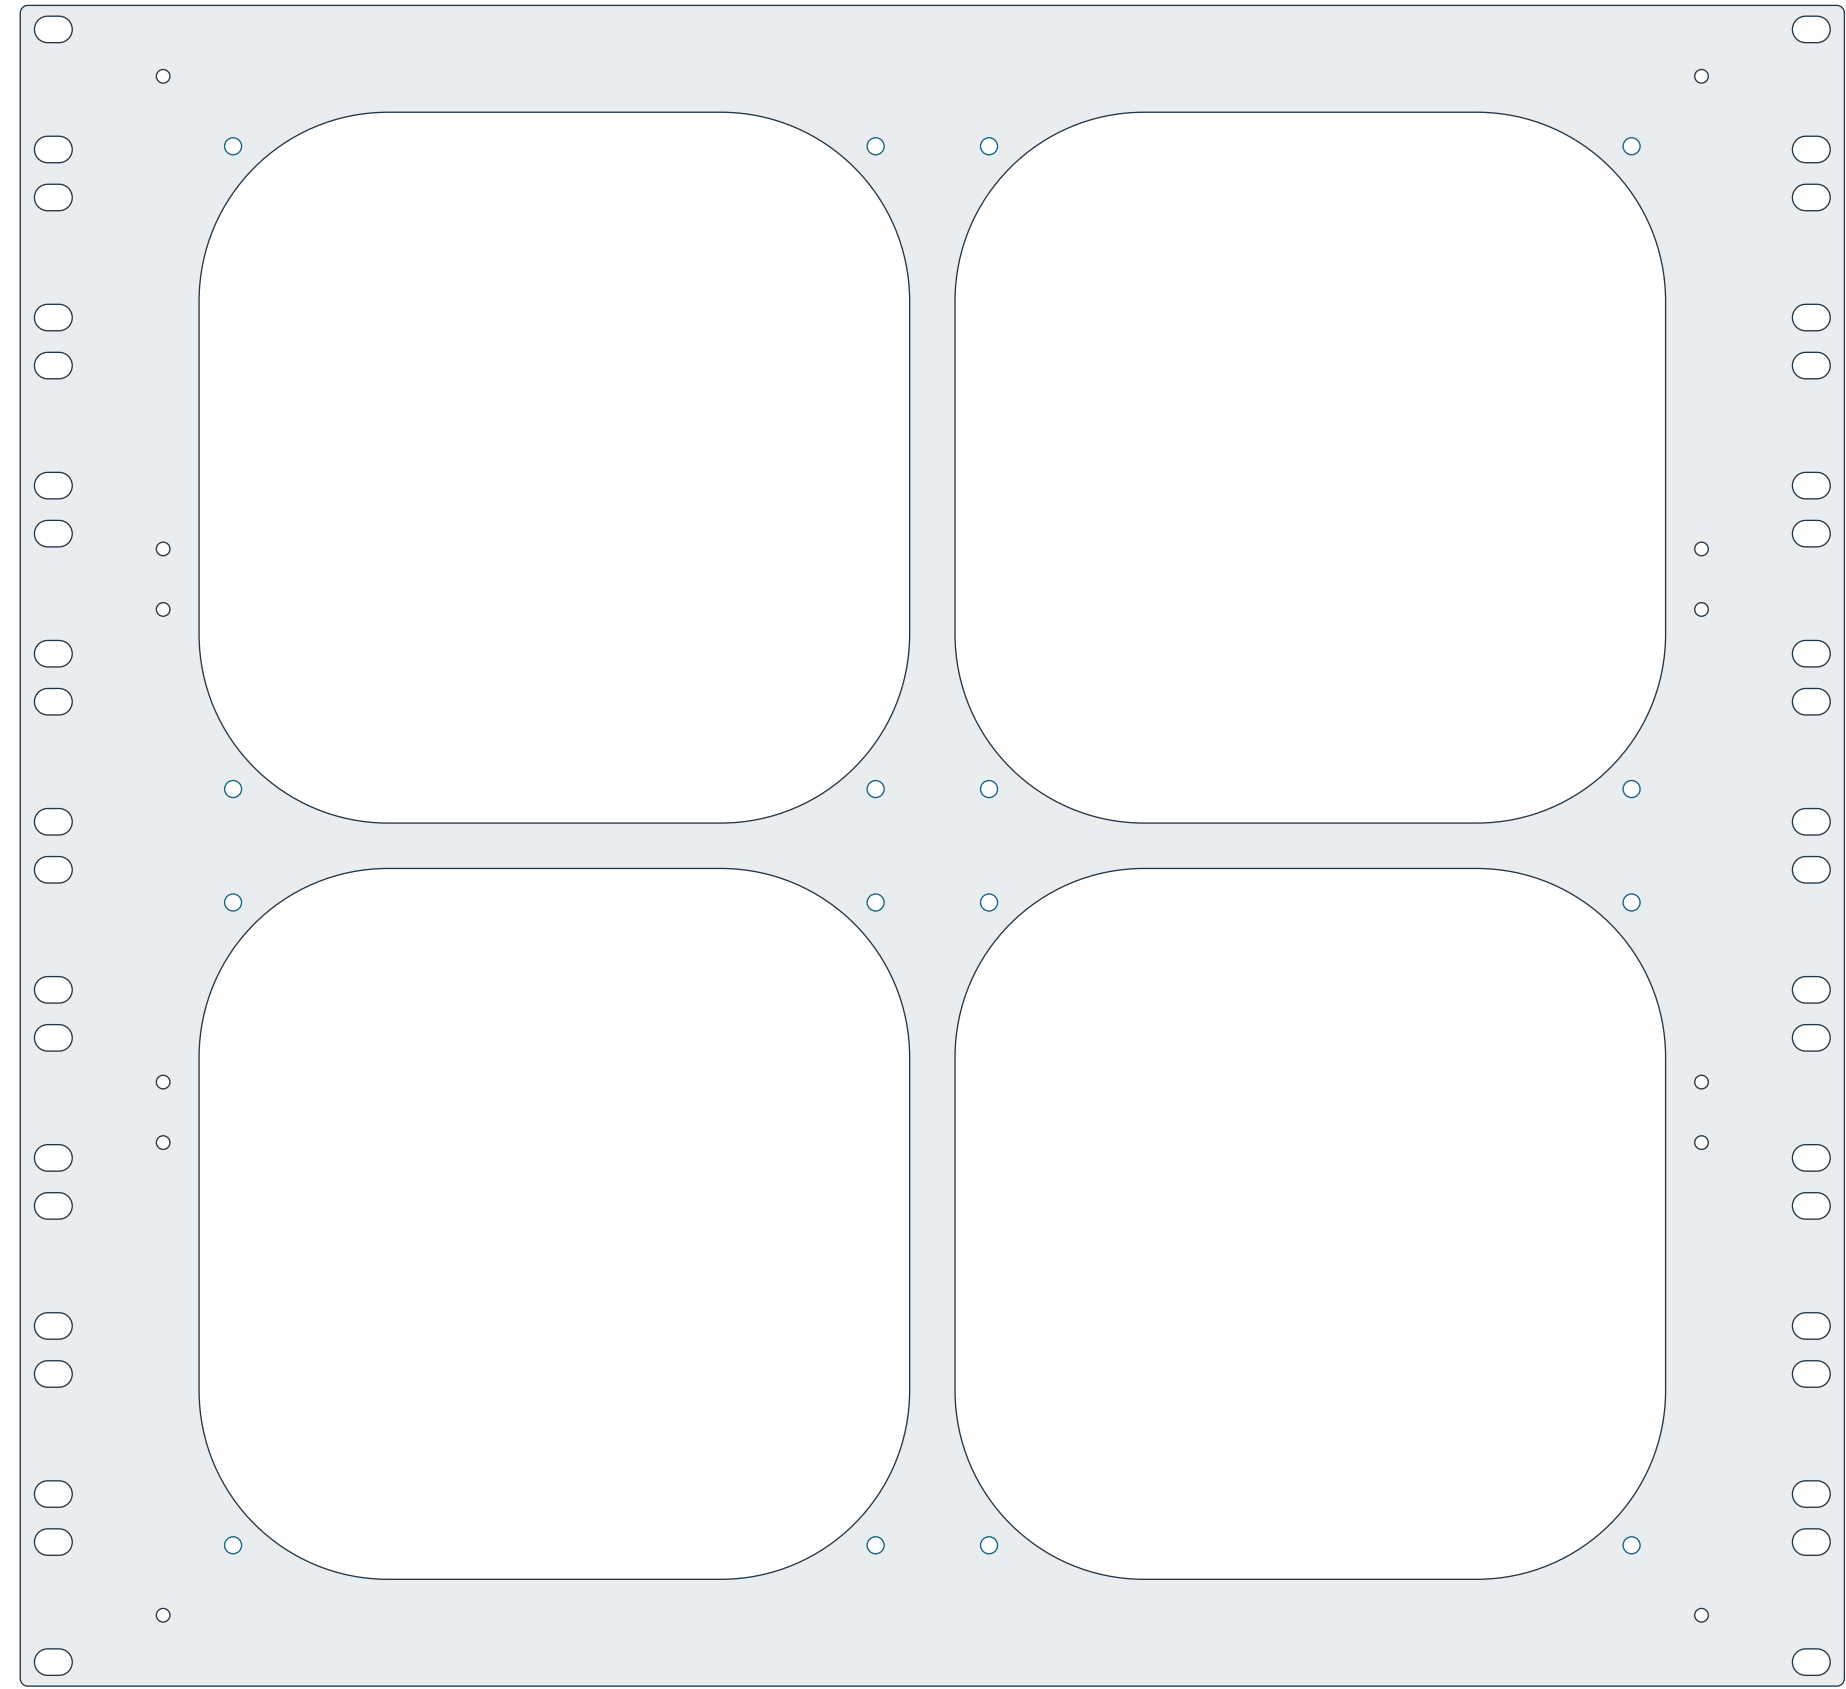

FAN FIXINGS / 16 HOLES

Diameter 4.50 +0.15 / 0 THROUGH.
Plain holes. Separate M4 nuts required.
X = -185, -15, +15, +185.
Y = 37.25, 207.25, 237.25, 407.25.
All 16 Cartesian combinations. No countersinks.
Per-fan pitch 170 x 170; fan centres 200 x 200.

RADIATOR FIXINGS / 12 HOLES

Diameter 3.60 +0.15 / 0 THROUGH.
X = -203.50, +203.50.
Y = 18.75, 143.75, 159.75, 284.75, 300.75, 425.75.
M3 threads remain in the radiator frame.

RACK FIXINGS / 40 SLOTS

10 x 7 THROUGH, R3.5 ends.
X = -232.55, +232.55.
Y = 44.45 n + 6.35 / 38.10; n = 0...9.
Widths +0.15 / 0; ends remain semicircular.

PROFILE AND MANUFACTURING

4x 188 x 188 apertures with R50 corners.
Centres X +/-100; Y122.25 / 322.25.
Full diameter 188 air opening retained.
12 mm central webs; outer corners R2.
Hole centre coordinates +/-0.10.
Other profile dimensions +/-0.15.
Fan-hole edge break C0.1 maximum.
Other cut edges: deburr 0.2-0.3.
Flatness target 0.5 over the free plate.
Satin finish; no surface markings.

ASSEMBLY / SEE SHEET 3

Origin: X midplane; Y bottom of plate.
Depth is perpendicular to this elevation.
Mass 1.248 kg; fan/cooler parts separate.
Outer rack rows: head/washer OD <=12.
Full nominal 10U height has no panel gap.

FAN FASTENER STACK / ALTERNATIVE COMPARISON

Four NF-A20 fans on the custom plate; opposite fan bank uses the retained Alphacool fan plate.


R3 / TAPPED M4

- 16x M4 x 35 ISO 7380-1 button socket screws.
- 16x M4 flat washers, OD9 x ID4.3 x 0.8.
- Nominal straight thread after edge breaks: 1.8 mm.
- Minimum at 1.9 mm sheet: 1.7 mm = 2.43 pitches.
- No proven tightening torque or strip-load rating.
- Check repeated assembly; avoid overtightening.

R4 / PLAIN BORES + NUTS

- 16x M4 x 40 ISO 7380-1 button socket screws.
- 16x DIN 934 M4 nuts, AF7, height 3.2.
- 32x M4 flat washers, OD9 x ID4.3 x 0.8.
- Rear button head + washer occupy 3.0 mm.
- Head nominally 3.5 mm short of the core.
- Recommended prototype: threads are replaceable.

R4 DEPTH STACK / SCHEMATIC, NOMINAL VALUES

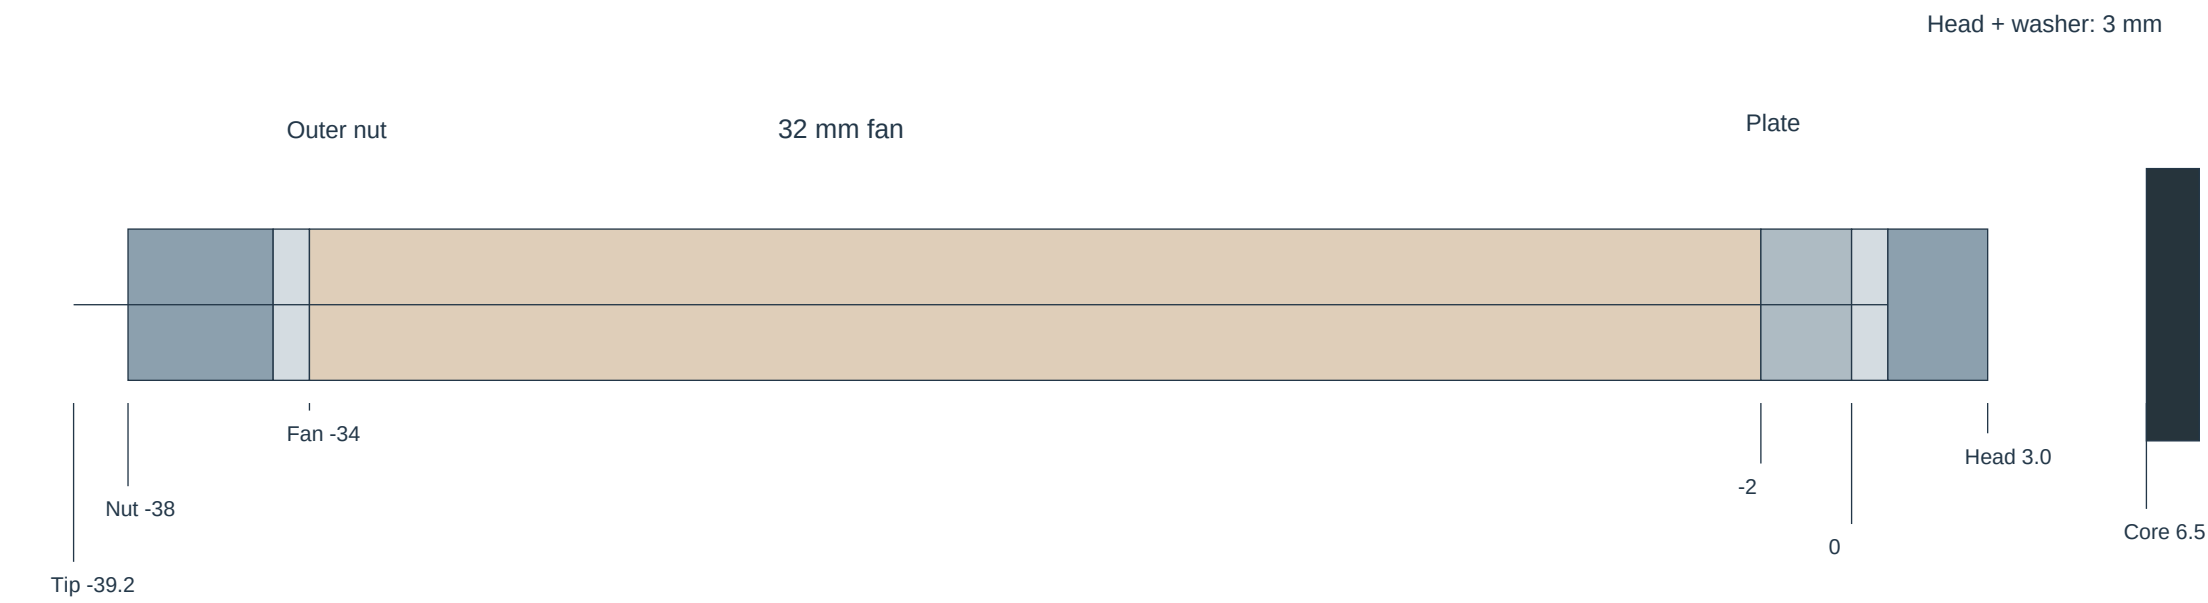

FIT AND ASSEMBLY REQUIREMENTS

- Nominal core setback: 6.5 mm. R4 rear button head + washer: 3.0 mm. Nominal gap: 3.5 mm.
- R4 screws enter from the core side; nuts sit on the outer fan face. Screw tips point away from the core.
- Hold each rear hex socket while tightening its front nut. Assemble fans before fitting the plate to the radiator.
- Radiator M3 heads: OD <=5.6, height <=2.4, no washers. Confirm thread reach and allowable depth in the actual frame.
- Turn right-hand fans 180 degrees about their airflow axes, keeping cable exits inward. Front airflow into radiator for push.
- Fan frames nominally touch at 200 mm centres. Noctua specifies dimensional tolerances: verify all four fans on a first article.
- Reference CAD checks do not certify tolerance extremes, fastener loosening, core clearance under load or fan noise/airflow.

References: official Noctua NF-A20 CAD and specification; Alphacool 14351 catalogue mesh. See accompanying source and analysis notes.