






INTERNAL LINEAR PSU / V0.2 / SECONDARY-SIDE DRAFT





T1 candidate: 300 VA, 2 x 25 VAC INDEPENDENT windings. Primary / soft start shown only in system documentation.

Two bridges; connect BR1 negative to BR2 positive at the reservoir star point. Do not pre-join the AC windings.

POS RAIL / floating 25 VAC secondary

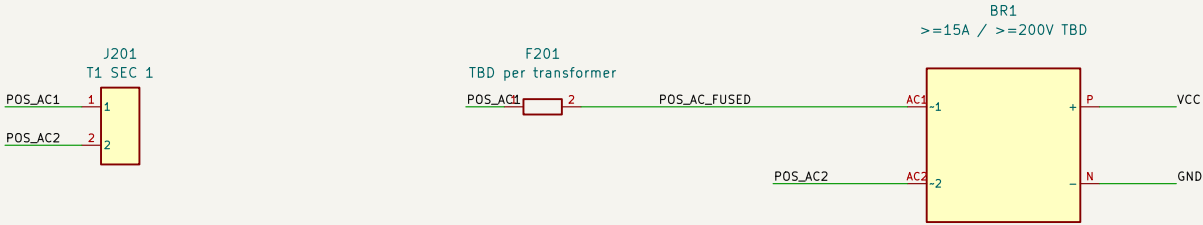

NEG RAIL / floating 25 VAC secondary

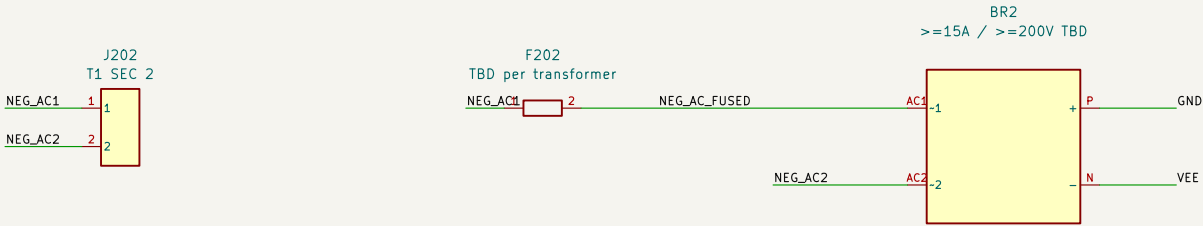

C201/C202: positive lead to VCC. C203/C204: positive lead to GND.

20,000 uF per rail. GND star is not a substitute for the protective-earth chassis bond.

Bridge pin IDs AC1/AC2/P/N are logical terminals; map to the selected part before assigning any footprint.

F201/F202 ratings, transformer, bridge cooling, primary fuse, inrush control and speaker protection remain TBD.

Separate schematic projects: J203 pin 1/2/3 wires to amplifier J5 pin 1/2/3. Same-label text does not wire the two files.

Internal PSU system / no PCB / no hardware measurements

Sheet: /
File: internal-psu-v02.kicad_sch

Title: LM3886 internal PSU – isolated secondaries only

Size: A3 Date: 2026-09-11 Rev: 0.2 DRAFT
KiCad E.D.A. 10.0.6 Id: 1/1