






INTERNAL LINEAR PSU / V0.3 / PLAN C / SECONDARY-SIDE DRAFT





T1 ordered: 110 VAC primary; 2 x 22 VAC independent + 12 VAC auxiliary. Seller: 200 W; VA / currents TBD.

Two bridges; connect BR1 negative to BR2 positive at the reservoir star point. Do not pre-join the AC windings.

POS RAIL / floating 22 VAC secondary

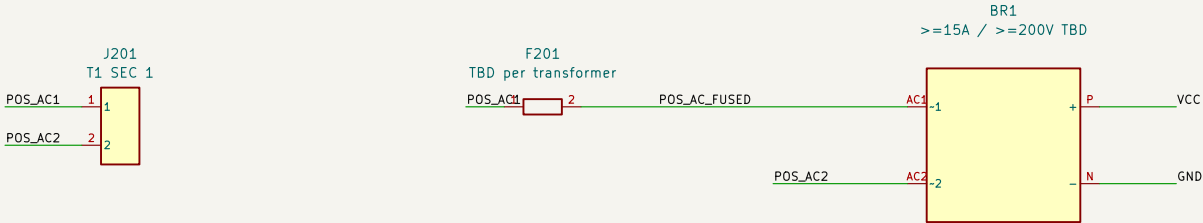

NEG RAIL / floating 22 VAC secondary

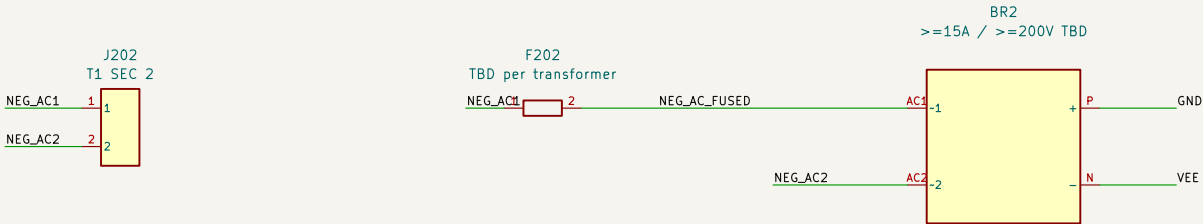

C201/C202: positive lead to VCC. C203/C204: positive lead to GND.

C plan: 20,000 uF per rail. C201–C204 CDE 381LX delivered 2026–09–23 (D35 x 50, snap-in). BR1/BR2 KBPC2510 bolt to chassis, 4 Faston wires each to a board terminal; NOT purchased.

Fuse ratings / bridge cooling / inrush / PE chassis bond / speaker protection: design and verify before assembly.

12 VAC auxiliary: reserved for control / speaker protection; AC vs DC module input and current rating TBD.

Separate schematic projects: J203 pin 1/2/3 wires to amplifier J5 pin 1/2/3. Same-label text does not wire the two files.

Internal PSU system / PCB V0.3 engineering draft only / no hardware measurements

Sheet: /
File: internal-psu-v02.kicad_sch

Title: LM3886 internal PSU – isolated secondaries only

Size: A3 Date: 2026–09–22

Rev: 0.3 DRAFT

KiCad E.D.A. 10.0.6

Id: 1/1