





RoHS Compliant



HIGH RELIABILITY LCC SOCKETS

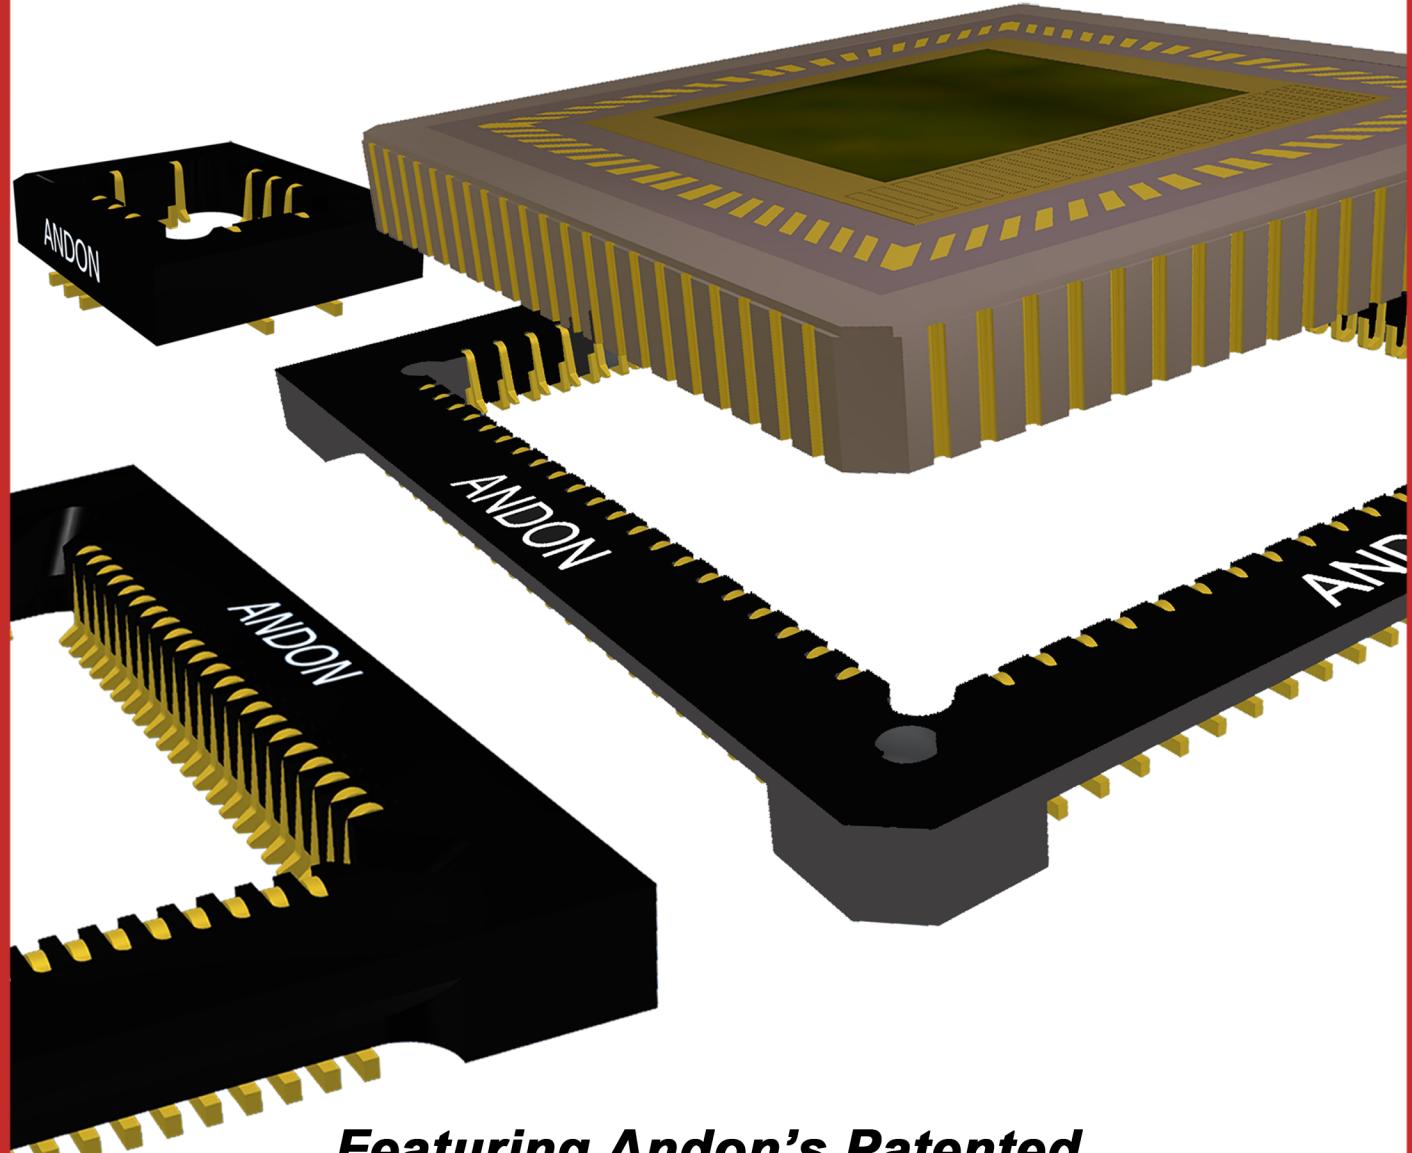

***Featuring Andon's Patented
LCC Contact***

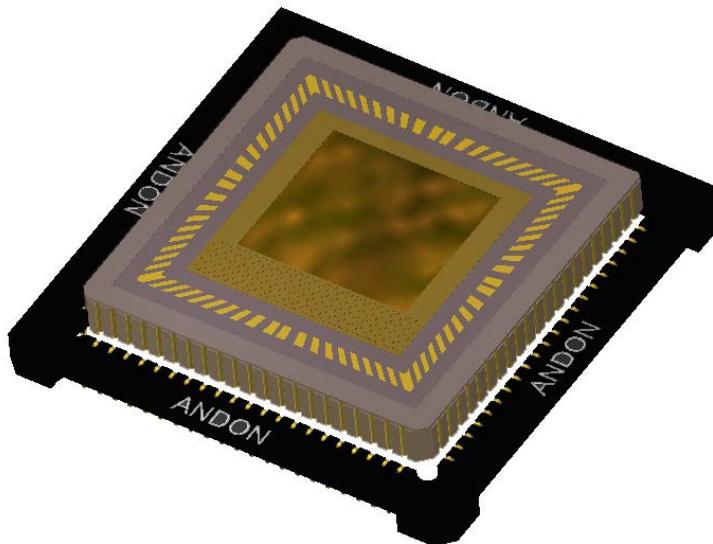INTERESTED IN USING AN LCC SOCKET FOR IMAGE SENSORS?

US PAT# 5,588,847
US PAT# D772,818 S

The popularity of *LEADLESS CHIP CARRIER (LCC)* packages for image sensors is increasing, due to the large number of connections on a smaller surface area, as compared to leaded DIP CCD/CMOS image sensors. Historically, the LCC sensor is soldered directly on the printed circuit board (PCB), either by hand soldering each castellation or by convection soldering.

PROBLEM

A common problem occurs when soldering LCC image sensors directly on the PCB. The cracking of the solder joints is caused by the temperature build-up during hand soldering of the castellation or later, during the operation of the camera. The ceramic substrate expands, while the solder joints are fixed. The result is cracked ceramic or cracked solder joints. The problem is more severe with "Lead Free" soldering, requiring higher temperatures and longer soldering time.

SOLUTION

Andon developed a patented beryllium copper contact for LCC sockets to enter into the castellation of the LCC image sensor. The contact design has one leg imbedded into the plastic housing for stability, while the other leg is the spring member, exerting contact force to provide mechanical security and electrical contact. As the temperature rises, the ceramic substrate of the image sensor expands. The contact adjusts to the expansion and prevents cracking of the ceramic or the solder joint.

INSTALLATION

The LCC Socket is convection soldered or hand soldered. The LCC image sensor is installed into the socket by pressing on top edge of the image sensor, all the way down, directly to the PCB surface. A snap can be heard, which indicates the contacts have made the proper connection with the castellations.

LCC IMAGE SENSOR SOCKETS

The image sensor is securely held within the centerline of the LCC socket due to the equal normal force of all the opposing contacts surrounding the plastic housing. This assures accurate positioning and focal length. The outstanding features of the

LCC socket were originally praised by the cell phone industry for being able to withstand a drop test in four axis, without movement of the device. millions of contacts have been in use with "ZERO" defects.

ADVANTAGES FOR USING LCC SOCKETS

- Reduce electro static discharge (ESD) due to less handling
- Eliminate soldering temperature which may affect the color array
- Eliminate need to de-solder
- Eliminate cleaning solution and scratches to glass plate
- Eliminate assembly line temperatures, humidity and shock

COST SAVINGS

Another cost savings feature is the economy achieved by soldering the Andon LCC image sensor socket directly on the PCB instead of soldering the image sensor on the PCB. This provides for production line assembly throughput, without the concern for ESD problems. After PCB assembly, the image sensor can be plugged-into the socket as required. It is not necessary to maintain a large inventory of image sensors already soldered on PCB's. This saves a considerable amount of money (cash flow). In the event of an up-grade, simply un-plug the old sensor and install the new one.


HIGH RELIABILITY

Image sensors sockets provide higher reliability because the sockets can be soldered to the motherboard in large quantities, later, as required, the sensors can be plugged-in or unplugged and upgraded easily. The sockets simplify re-work and replacement problems as well as eliminate de-soldering blistering of the PCB. For vision systems, down time is minimized by being able to replace a defective image sensor quickly, especially where high speed production line failures can be costly delays.

Andon's image sensor sockets provide product improvement and cost reduction.


.0276 [0.70] Pitch iLCC LGA Test Socket 48 PINS

Fig. 01

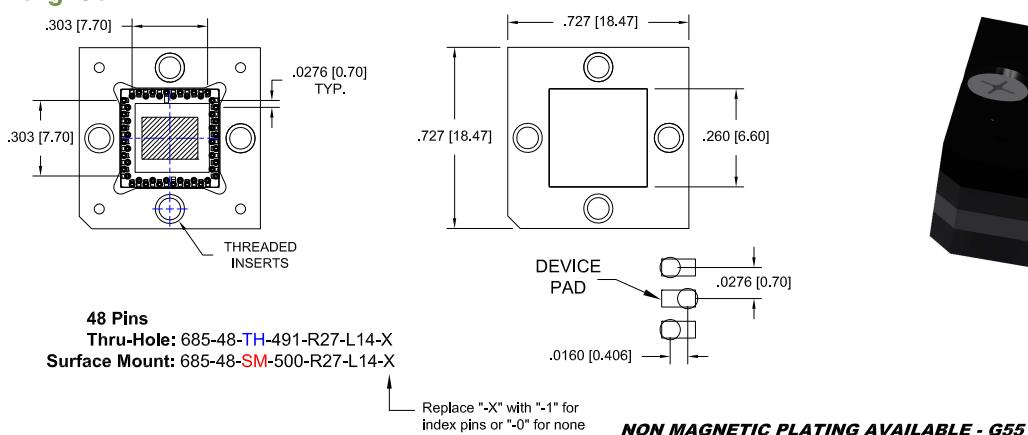

.050 [1.27] Pitch PLCC Socket 84 PINS

Fig. 02

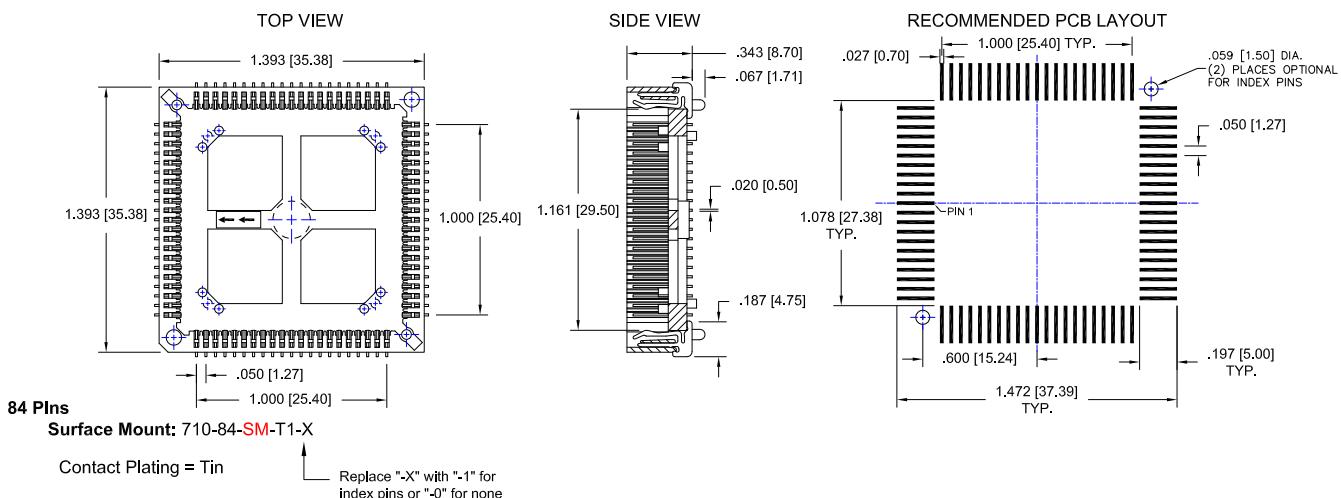


EXTRACTION TOOL
AVAILABLE

Custom 20x2 .0295 [0.75] Pitch PLCC Socket

EXTRACTION TOOL
AVAILABLE

Fig. 03

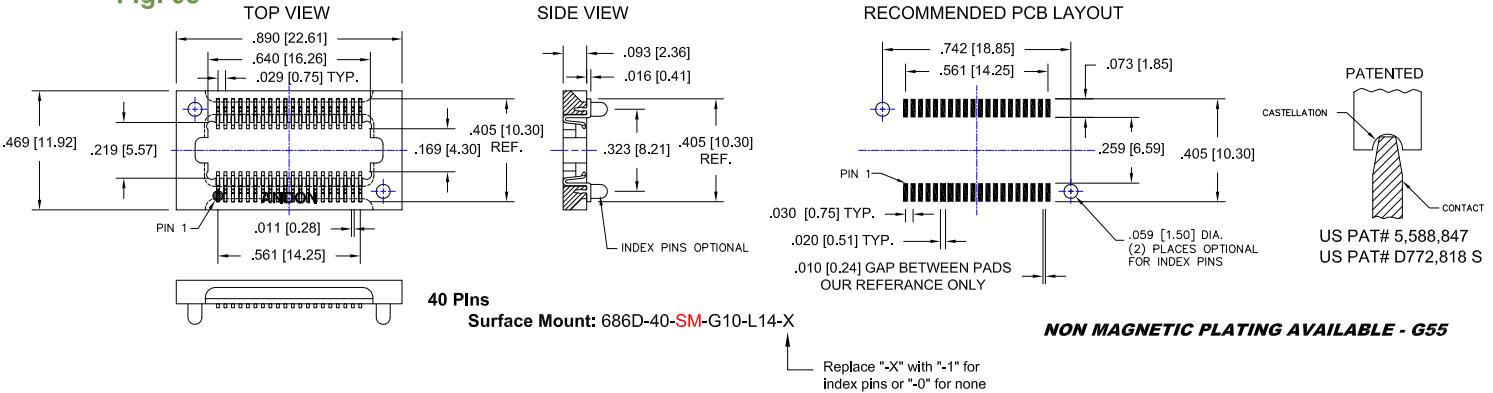

Replace "X" with "-1" for index pins or "-0" for none

©Copyright 2018 Andon Electronics Corporation. All Rights Reserved. This material is protected under US and other copyrights and may not be copied, sold, or redistributed in any form without written permission of Andon Electronics Corporation. Copyrights and trademarks are property of their respective companies. We reserve the right to change specifications without notice. Andon makes no warranty, expressed or implied, as to the suitability of the sockets for the intended purpose.

RoHS Compliant

Andon Proprietary Information

LCC Sockets "not drawn to scale" 04/09/2018

Custom .050 [1.27] Pitch LCC Sockets

Fig. 04

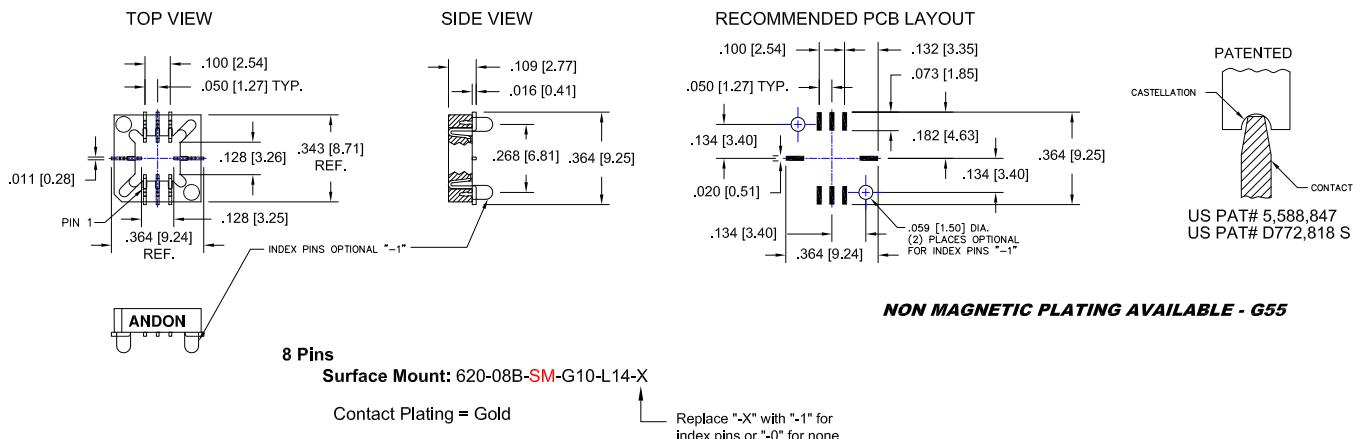


Fig. 05

Custom .050 [1.27] Pitch LCC Sockets

EXTRACTION TOOL AVAILABLE


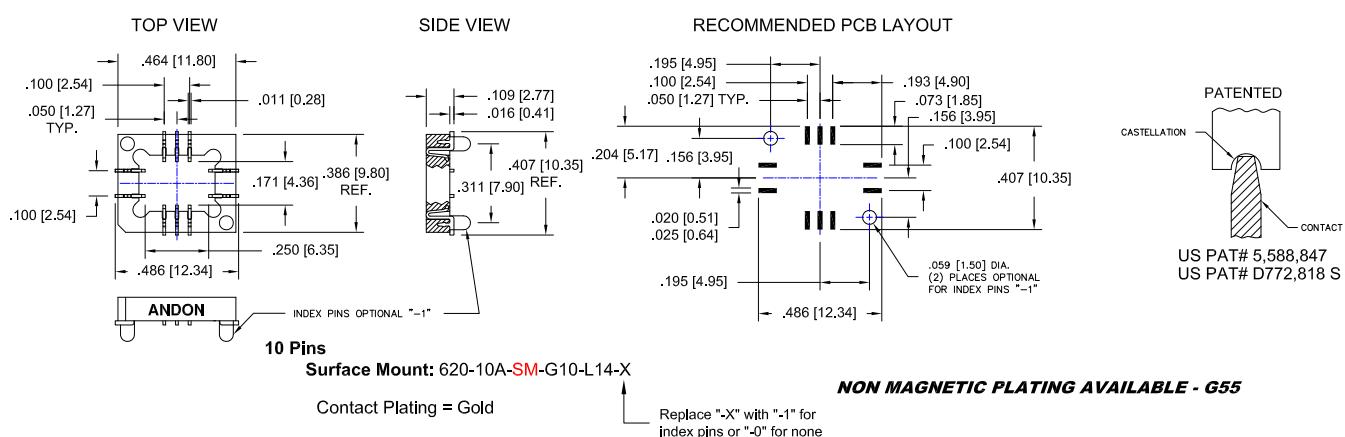


Fig. 06

Custom .050 [1.27] Pitch LCC Sockets

EXTRACTION TOOL AVAILABLE

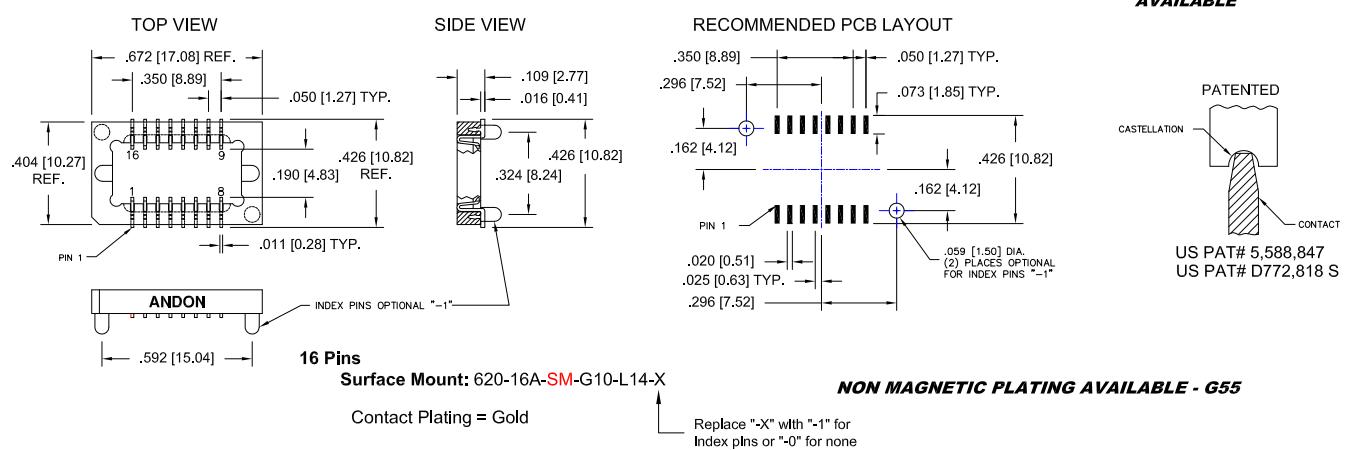

For Other Pin Configuration or Layouts, Contact Factory.

©Copyright 2018 Andon Electronics Corporation. All Rights Reserved. This material is protected under US and other copyrights and may not be copied, sold, or redistributed in any form without written permission of Andon Electronics Corporation. Copyrights and trademarks are property of their respective companies. We reserve the right to change specifications without notice. Andon makes no warranty, expressed or implied, as to the suitability of the sockets for the intended purpose.

ANDON ELECTRONICS CORPORATION
4 Court Drive, Lincoln RI 02865, United States of America

RoHS Compliant

Andon Proprietary Information
LCC Sockets "not drawn to scale" 04/09/2018

www.andonelectronics.com or www.andonelect.com
Phone 401-333-0388 Fax 401-333-0287
Email Info@andonelect.com

Fig. 07

Custom .050 [1.27] Pitch LCC Sockets

**EXTRACTION TOOL
AVAILABLE**


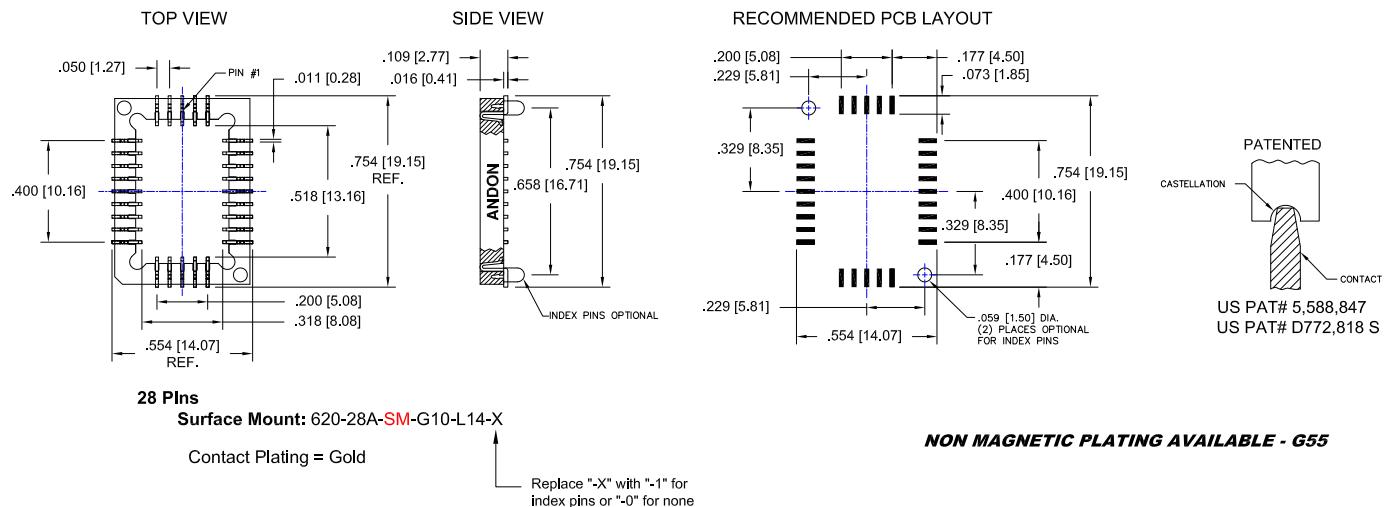


Fig. 08

.050 [1.27] Pitch LCC Sockets

**EXTRACTION TOOL
AVAILABLE**

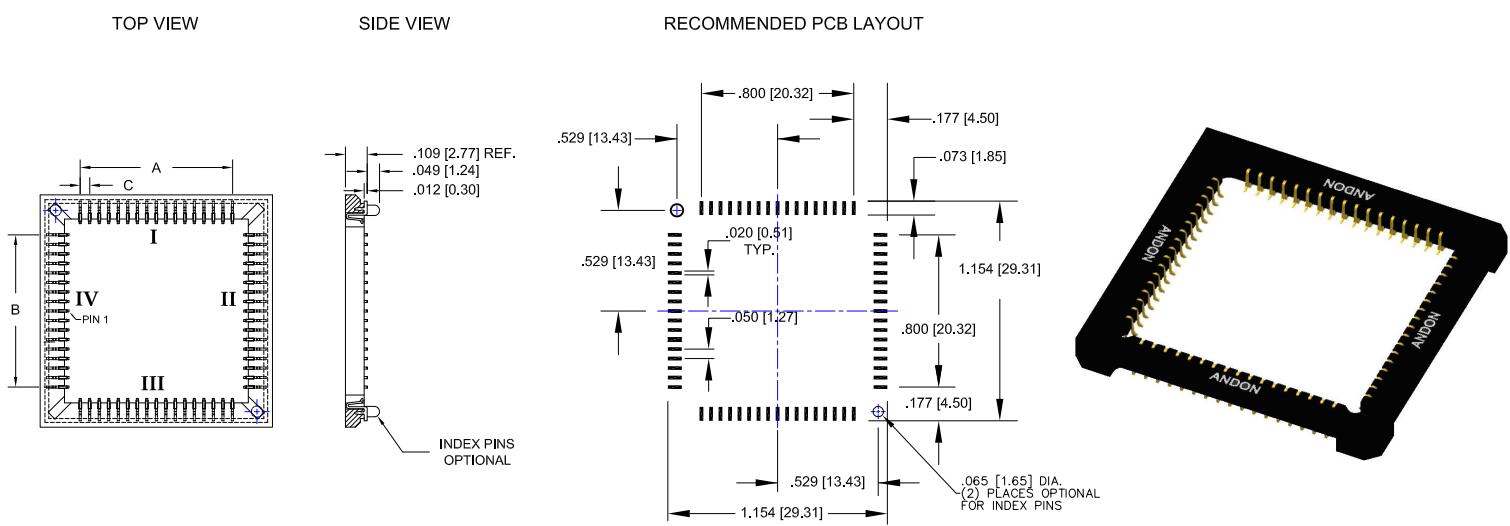

Andon Part Number	Pin QTY.	A	B	C	Number of Pins (per side)			
					I	II	III	IV
620-16-SM-G10-L14-X	16	.150 (3.81)	.150 (3.81)	.050 (1.27)	4	4	4	4
620-20-SM-G10-L14-X	20	.200 (5.08)	.200 (5.08)	.050 (1.27)	5	5	5	5
620-28-SM-G10-L14-X	28	.300 (7.62)	.300 (7.62)	.050 (1.27)	7	7	7	7
620-40A-SM-G10-L14-X	40	.950 (24.13)	.950 (24.13)	.050 (1.27)	20	0	20	0
620-44-SM-G10-L14-X	44	.500 (12.70)	.500 (12.70)	.050 (1.27)	11	11	11	11
620-52-SM-G10-L14-X	52	.600 (15.24)	.600 (15.24)	.050 (1.27)	13	13	13	13
620-68-SM-G10-S14-X	68	.800 (20.32)	.800 (20.32)	.050 (1.27)	17	17	17	17
620-84-SM-G10-L14-X	84	1.000 (25.40)	1.000 (25.40)	.050 (1.27)	21	21	21	21
620-100-SM-G10-L14-X	100	1.200 (30.48)	1.200 (30.48)	.050 (1.27)	25	25	25	25

Replace "-X" with "-1" for index pins or "-0" for none

As shown above

NON MAGNETIC PLATING AVAILABLE - G55

For Other Pin Configuration or Layouts, Contact Factory.

©Copyright 2018 Andon Electronics Corporation. All Rights Reserved. This material is protected under US and other copyrights and may not be copied, sold, or redistributed in any form without written permission of Andon Electronics Corporation. Copyrights and trademarks are property of their respective companies. We reserve the right to change specifications without notice. Andon makes no warranty, expressed or implied, as to the suitability of the sockets for the intended purpose.

Contact Plating = Gold


RoHS Compliant

Andon Proprietary Information

LCC Sockets "not drawn to scale" 04/09/2018

ANDON ELECTRONICS CORPORATION
4 Court Drive, Lincoln RI 02865, United States of America

www.andonelectronics.com or www.andonelect.com
Phone 401-333-0388 Fax 401-333-0287
Email Info@andonelect.com

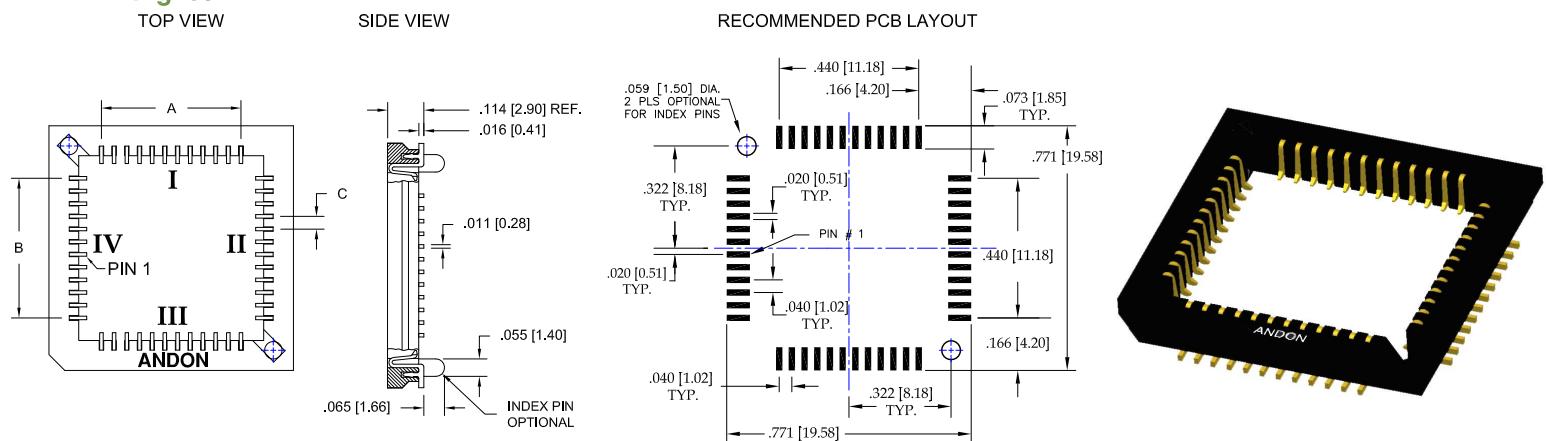Fig. 09



Andon Part Number	Pin QTY.	A	B	C	Number of Pins (per side)			
					I	II	III	IV
680-32-SM-G10-L14-X	32	.280 (7.11)	.280 (7.11)	.040 (1.01)	8	8	8	8
680-40-SM-G10-L14-X	40	.360 (9.14)	.360 (9.14)	.040 (1.01)	10	10	10	10
680-44-SM-G10-L14-X	44	.520 (13.21)	.520 (13.21)	.040 (1.01)	11	11	11	11
680-48-SM-G10-R14-X	48	.440 (11.18)	.440 (11.18)	.040 (1.01)	12	12	12	12
680-64-SM-G10-L14-X	64	.600 (15.24)	.600 (15.24)	.040 (1.01)	16	16	16	16
680-84-SM-G10-L14-X	84	.800 (20.32)	.800 (20.32)	.040 (1.01)	21	21	21	21
680-100-SM-G10-L14-X	100	1.120 (28.45)	.800 (20.32)	.040 (1.01)	29	21	29	21

Replace "-X" with "-1" for Index pins or "-0" for none

Contact Plating = Gold


For Other Pin Configuration or Layouts, Contact Factory.

NON MAGNETIC PLATING AVAILABLE - G55


Fig. 10

Custom .040 [1.02] Pitch LCC Sockets

EXTRACTION TOOL AVAILABLE



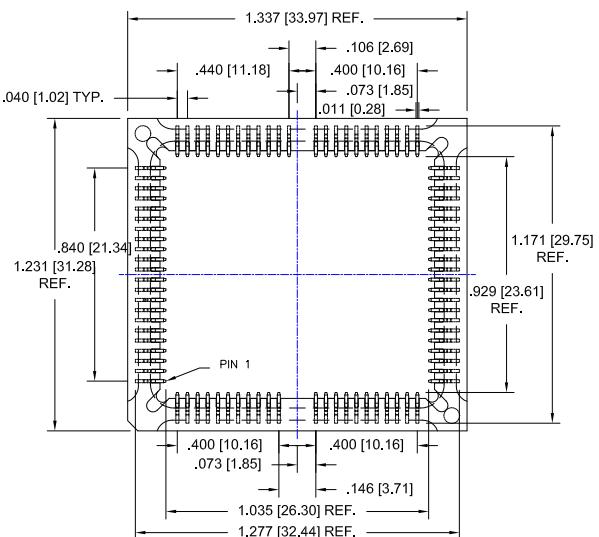
TOP VIEW


89 Pins

Surface Mount: 680-89A-SM-G10-L14-X

Replace "-X" with "-1" for index pins or "-0" for none

For Other Pin Configuration or Layouts, Contact Factory.

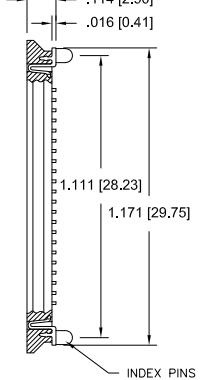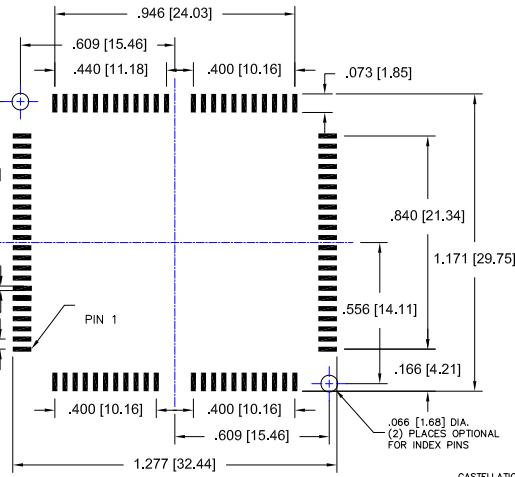SIDE VIEW

RECOMMENDED PCB LAYOUT


Contact Plating = Gold

RoHS Compliant

Andon Proprietary Information



LCC Sockets "not drawn to scale" 04/09/2018

Custom .040 [1.02] Pitch LCC Sockets

**EXTRACTION TOOL
AVAILABLE**

Fig. 11

DEVICE SIZE .500 X .500 OUTSIDE W/
.0079 CASTILATIONS

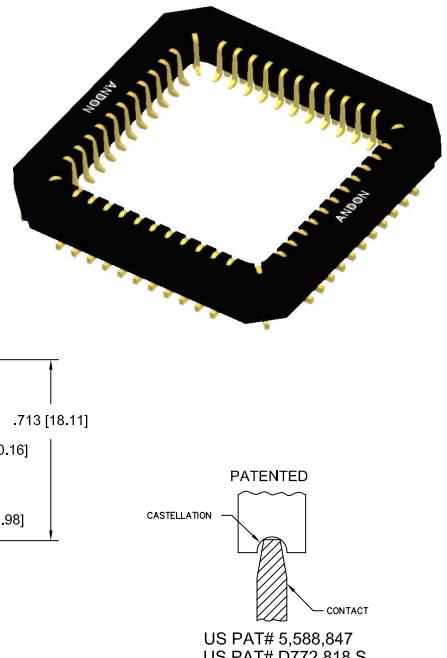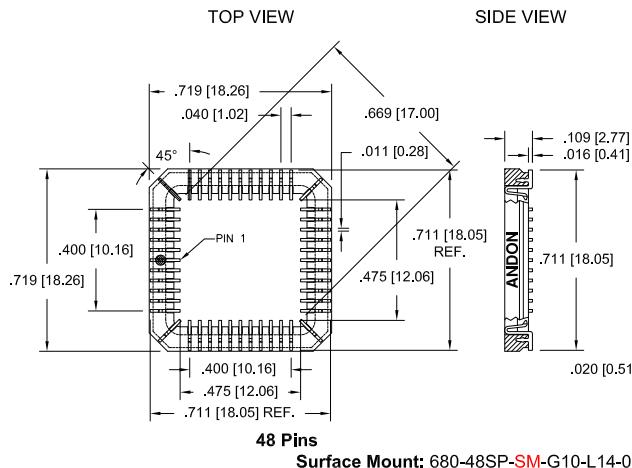


NON MAGNETIC PLATING AVAILABLE - G55

For Other Pin Configuration or Layouts, Contact Factory.

Custom .035 [0.89] Pitch LCC Sockets

**EXTRACTION TOOL
AVAILABLE**

Fig. 12

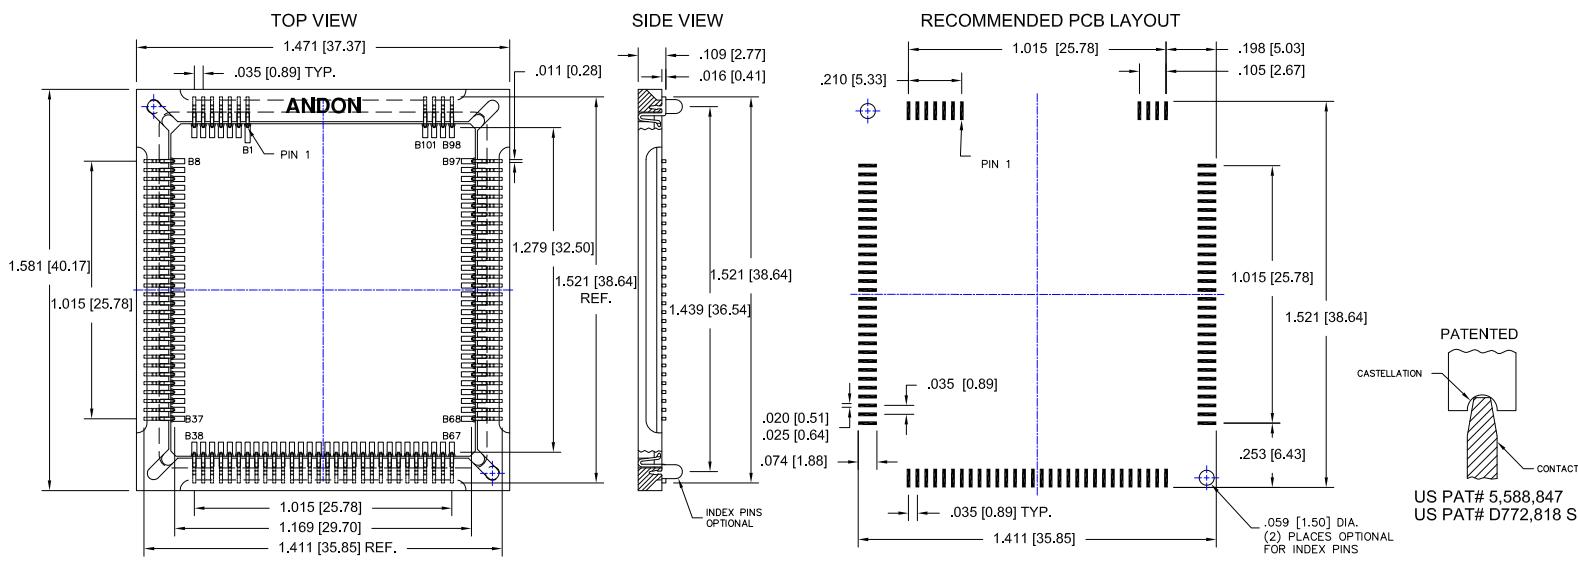

For Other Pin Configuration or Layouts, Contact Factory.

Fig. 13

Custom .0276 [0.70] Pitch LCC Sockets

**EXTRACTION TOOL
AVAILABLE**


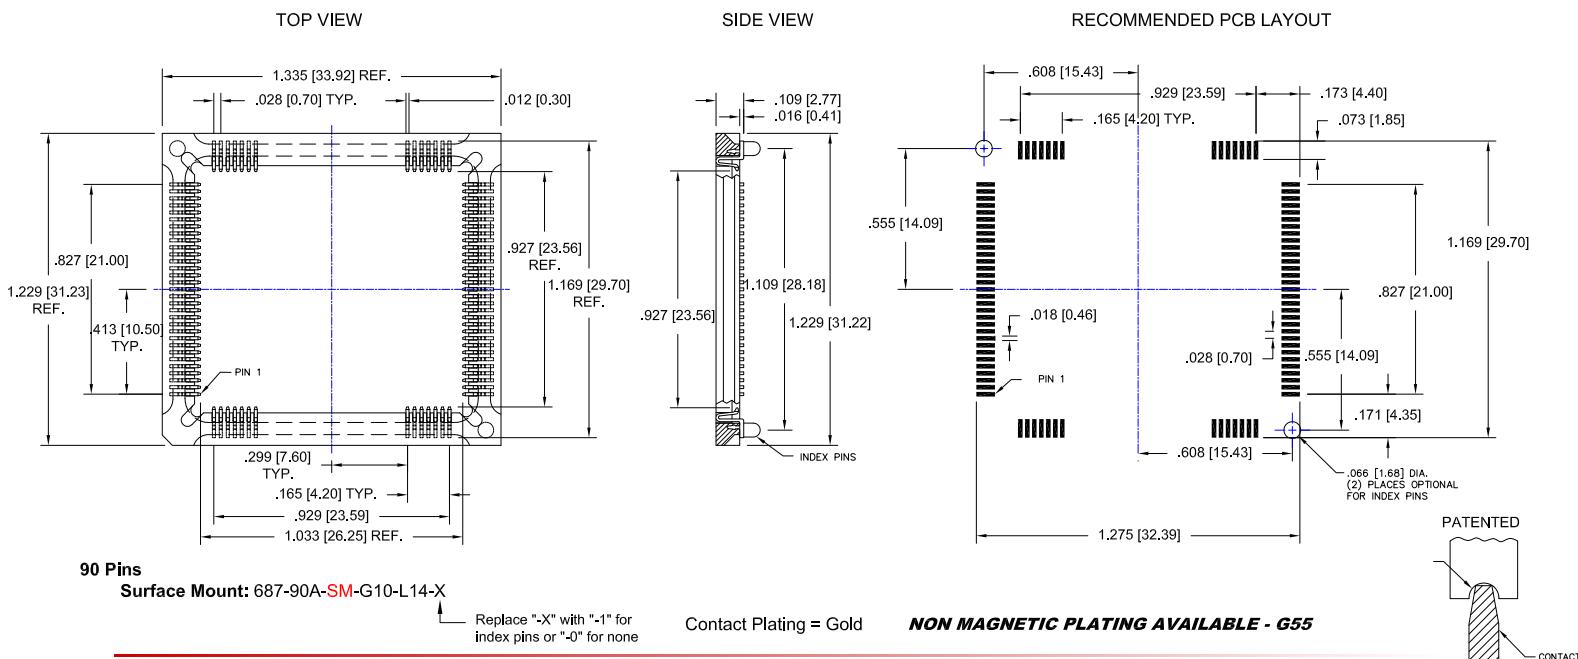


Fig. 14

.0276 [0.70] Pitch LCC Sockets

**EXTRACTION TOOL
AVAILABLE**

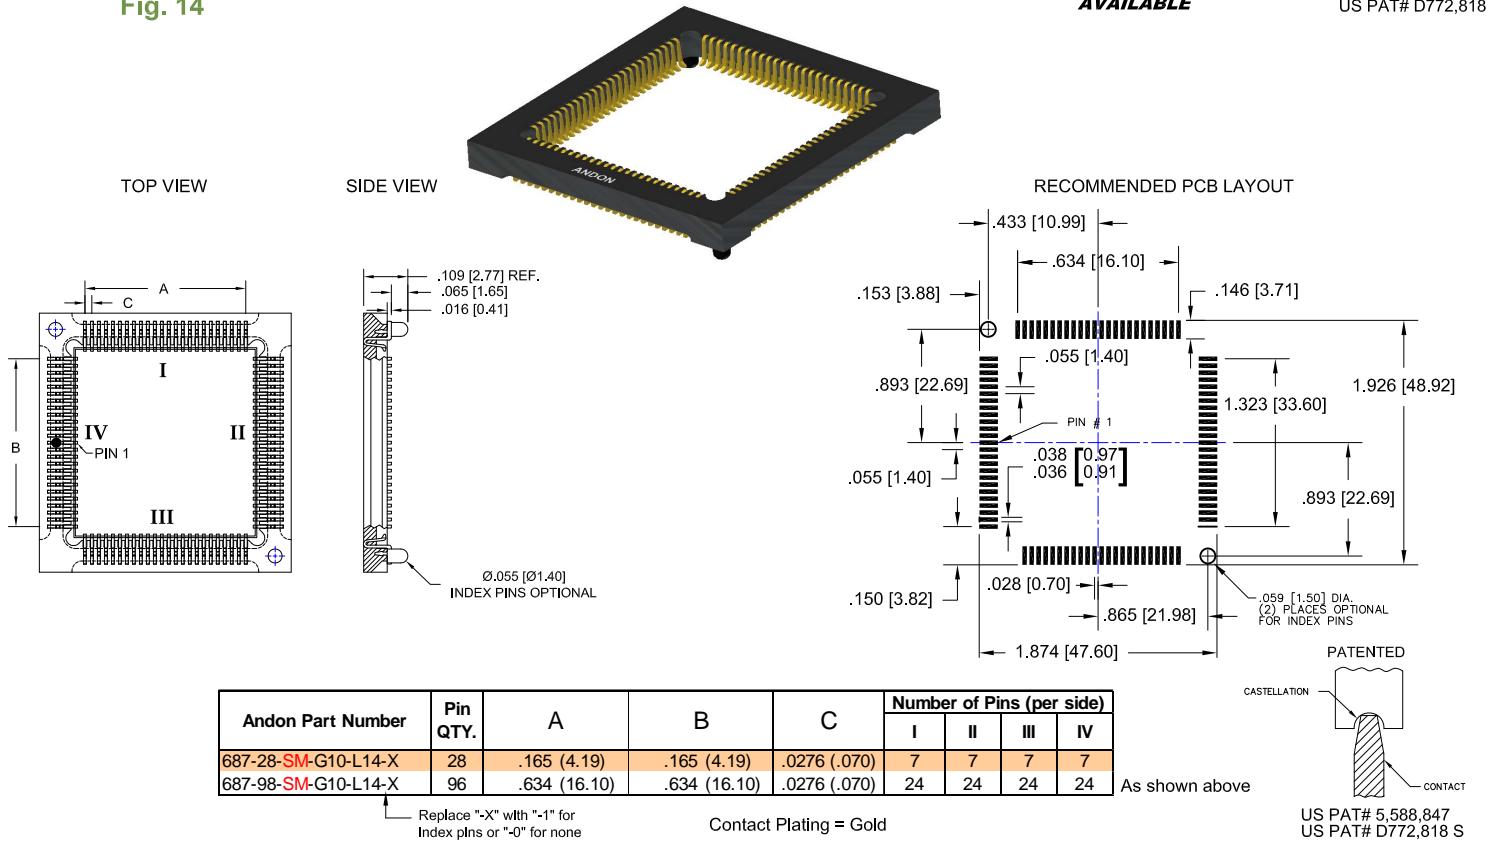

For Other Pin Configuration or Layouts, Contact Factory.

NON MAGNETIC PLATING AVAILABLE - G55

RoHS Compliant


Andon Proprietary Information

LCC Sockets "not drawn to scale" 04/09/2018


.0315 [0.80] Pitch LCC Socket

**EXTRACTION TOOL
AVAILABLE**


Fig. 15 TOP VIEW



SIDE VIEW



RECOMMENDED PCB LAYOUT

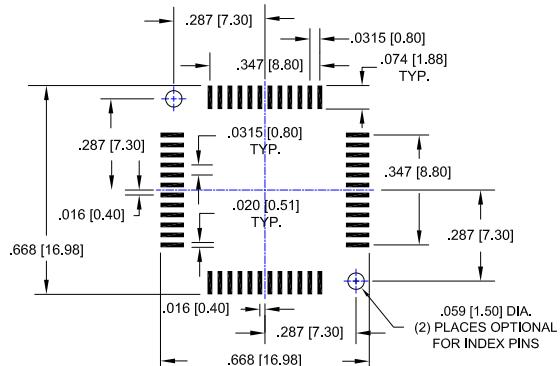

Andon Part Number	Pin QTY.	A	B	C	Number of Pins (per side)			
					I	II	III	IV
690-48-SM-G10-L14-X	48	.346 (8.79)	.346 (8.79)	.0315 (0.80)	12	12	12	12
690-168-SM-G10-L14-X	168	1.228 (31.19)	1.354 (34.39)	.0315 (0.80)	40	44	40	44

Replace "-X" with "-1" for
index pins or "-0" for none

Contact Plating = Gold

NON MAGNETIC PLATING AVAILABLE - G55

For Other Pin Configuration or Layouts, Contact Factory.





Fig. 16


Custom .0315 [0.80] Pitch LCC Sockets

**EXTRACTION TOOL
AVAILABLE**


TOP VIEW

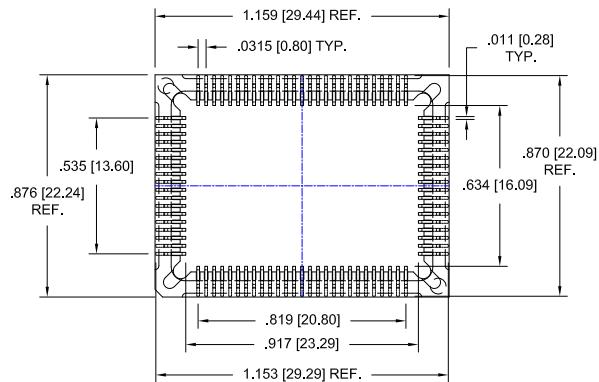

SIDE VIEW



RECOMMENDED PCB LAYOUT

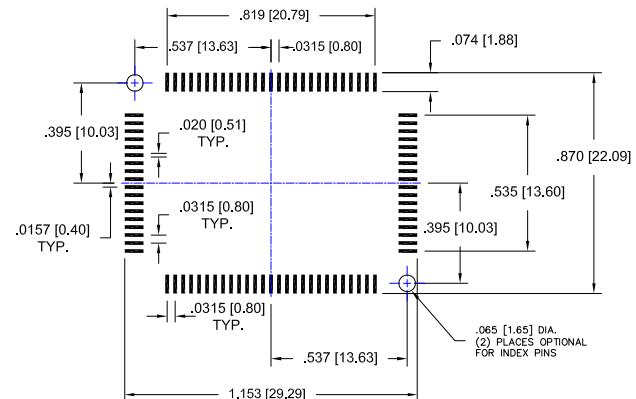


101 Pins
Surface Mount: 690-90-SM-G10-L14-X

Contact Plating = Gold

Replace "-X" with "-1" for
Index pins or "-0" for none

For Other Pin Configuration or Layouts, Contact Factory.

NON MAGNETIC PLATING AVAILABLE - G55





Distributed Worldwide.



ANDON ELECTRONICS CORPORATION

4 Court Drive Lincoln, RI 02865 USA
Phone: 401-333-0388 Fax: 401-333-0287

Email: Info@andonelect.com

Visit us on the Web at www.andonelect.com
or www.andonelectronics.com