

SIM Information and Management (SIAM v3)

How to manage your SIM estate



Copyright

Copyright 2022 Eseye Ltd. All rights reserved.

You may not reproduce or use this document or any portion thereof without prior written permission of Eseye Ltd. Eseye Ltd retains the right to change this document or related product specifications and descriptions, at any time, without notice. Eseye Ltd makes no warranty for the use of this document and assumes no responsibility for any errors that may appear in the document, nor does it make a commitment to update the information contained herein. For the most current product information, please visit www.eseye.com.

Eseye® and its logos, Eseye Intelligently Connected® and Hera 300™ are trademarks of Eseye Ltd in the United Kingdom and/or other countries. All other marks and names mentioned herein may be claimed as the property of others.

Last updated: 21 April 2022

Contents

About this guide	7
Extra reading	7
Standards and conventions	8
About SIAM v3	1
Menus	1
Accessing SIAM v3	2
Managing user accounts	4
User accounts	4
User roles in SIAM v3	4
Creating user accounts	6
Sub accounts	6
Creating sub accounts	7
Two factor authentication	9
Managing SIMs	11
Changing SIM states	11
Updating SIM details	11
Creating SIM groups	12
Ordering SIMs	14
Activating SIMs	15
Activate individual SIMs	15
Bulk activate a box of SIMs	16
Bulk activate SIMs using the bulk activation tool	18
Suspending SIMs	20
Suspending individual SIMs	20
Suspending SIMs in bulk	21
Terminating SIMs	22
Terminating individual SIMs	22
Terminating SIMs in bulk	23
Monitoring SIMs and devices	25
Viewing aggregated connection and data flow metrics	25
Monitoring tools in SIAM v3	25

Managing Alerts	26
Viewing alerts	26
Using alert profiles	26
Enabling email alerts	27
Managing Reports	29
Creating report profiles	29
Managing report profiles	29
Assigning report profiles to SIMs	30
Finance Reports	31
Audit Reports	38
Estate Reports	47
Status and Connectivity Reports	55
Diagnostic Reports	56
Managing Notifications	62
Creating notifications	62
Locating devices using a cellular connection	63
Country location service	63
Standard location service	63
Premium location service	64
Comparison of available location services	64
Displaying SIM Timelines	66
Data series timelines	67
IMSI status timelines	68
About Billing	69
Eseye standard terms and conditions	69
Viewing an invoice	70
Making a payment	71
Setting up a Direct Debit payment	71
Making a BACS payment	71
Paying with Paypal or a debit or credit card	73
Editing your SIAM contact details	75
Understanding the SIM lifecycle	76
Understanding Service Contracts and packages	79
About Service Contracts	79

About packages	80
About package items	80
SIM purchase price	81
Understanding Activation charges	82
Activation charges	82
Service charges	82
Monthly billing service charges	83
Annual billing service charges	84
SMS, data, and voice billing	85
Understanding data usage per SIM	86
Understanding SMS charges on the CSV invoice	87
SMS message charges on the SIM contract	87
SMS message charges on the SMS API contract	87
Understanding bundled usage	89
Understanding pooling	90
SIM termination fees	91
Eseye PDF Invoice Example	92
Eseye CSV Invoice Example	95
SIAM Web Interface	97
SIMs menu	97
SIM List page	97
Activate page	100
Bulk Activate page	101
Bulk Termination page	102
SIM Audit Log page	103
Settings menu	121
SIM Packages page	121
Alert Profiles page	122
Device Models page	127
Reporting Profile page	127
Messaging API page	129
Audit Log page	130
Activity menu	132
Notifications page	132

Alerts page	133
Reports page	134
Messaging API page	135
Admin menu	136
Users page	136
Referral Codes page	138
Sub Accounts page	139
Audit Log page	140
Finance menu	142
Overview page	142
Details page	143
Transactions page	145
Audit Log page	146
Ordering menu	148
Shop page	148
Cart page	148
Order History page	149
Delivery Address page	150
Support menu	152
Tickets page	152
Account menu	154
Account Details page	154
Notifications (My Account Settings) page	155
Account Reports page	157
Account Audit Log page	159

About this guide

This guide is designed to help you understand how to use the SIM Information and Management (SIAM) Portal. It describes the fields on each page and the SIM-related tasks you may need to perform.

Extra reading

For more information, see the online help: <https://docs.eseye.com>

Standards and conventions


This guide uses consistent visual cues and standard text styles to help you locate and interpret information easily.

Style	Description
 Note	Extra information or a recommendation related to the current topic.
 Tip	Good-to-know information that helps users complete a procedure or understand a topic.
 Warning	Information that alerts the user about significant or critical actions or outcomes.

<i>Title names</i>	Window or section names, denoting a title, appear in italics.
Field or button name	Element names in a user interface, for example fields and buttons, appear in bold.
Ctrl+X; Ctrl+click	A key combination with a plus sign separating two key names or a key name and a mouse action, indicates that you hold down the first key while pressing the second key or performing the mouse action.
Cross reference <i>Title</i> and page	Cross references appear in italics, for example: For more information, see <i>Copyright</i> on page 2. Select the cross reference to view it.
Hyperlinks	Underlined cross references are hyperlinks to electronic forms of the document. Select the hyperlink to open the cross reference.
AT Commands	
Commands	Command formats are displayed in monospaced typeface.
<Parameter>	Angle brackets enclose the AT Command parameter, for example <topic>. The brackets do not appear in the command line.
"ParameterString"	Quotation marks enclose parameter strings.
<i>CommandValue</i>	Italics in a command depicts values or examples that need replacing with your specific parameters.
[CommandOptionalEntry]	Square brackets display optional entries.
ATCommandResponse	Returned responses to AT Commands are displayed in monospaced bold typeface.
<ASCIICHARACTERS>	Returned ASCII characters are in uppercase.

About SIAM v3

The SIM Information and Account Management portal (SIAM) is a web interface that enables users to manage SIM and account information. It contains all of the information about your SIM estate and pulls live network data for your subscribers via Eseye's localised data centres.

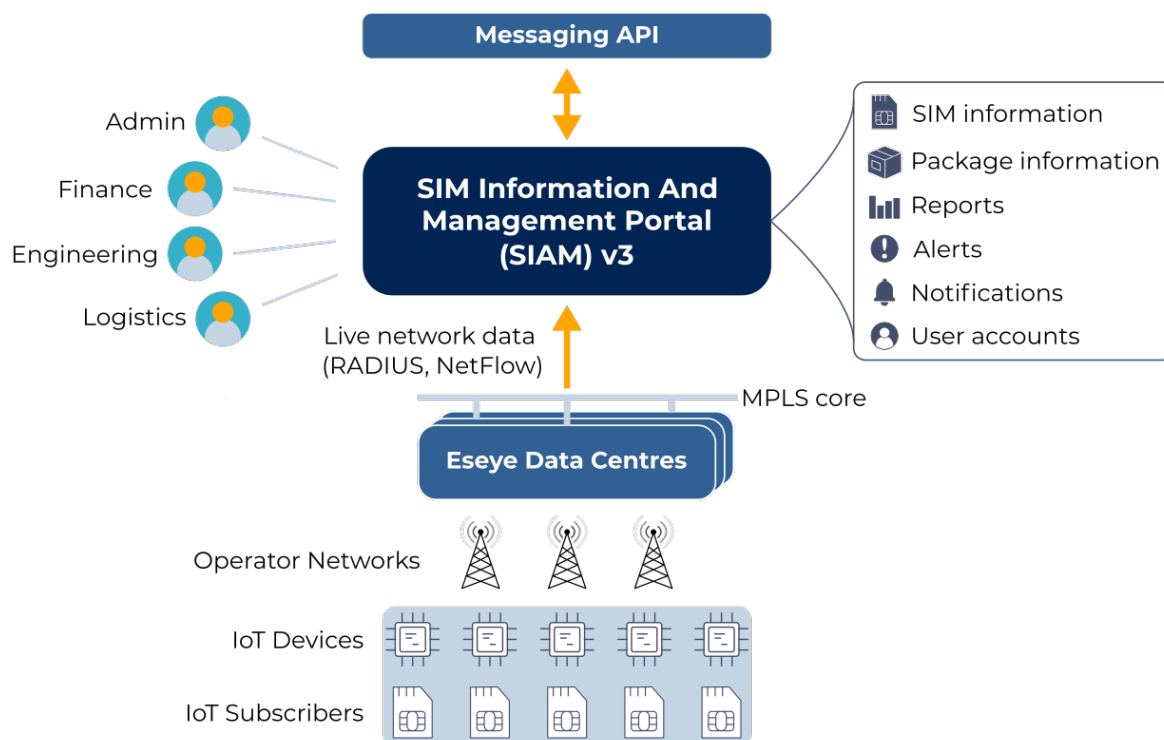

Menus

The SIAM v3 user interface is organised into the following menus:



- [SIMs](#) – activate, suspend, terminate SIMs and manage SIM information.
- [Settings](#) – configure SIM packages, alert profiles, reporting profiles, devices and the messaging API.
- [Activity](#) – configure notifications, alerts, reports and the messaging API.
- [Admin](#) – configure users, referral codes and sub accounts.
- [Finance](#) – view and edit finance settings, billing details and account transactions.
- [Ordering](#) – order new SIMs and manage order history and delivery addresses.
- [Support](#) – raise, view, edit and close support tickets.
- [Account](#) – view account-specific details, notifications, reports, alerts and audit logs.



Some menus are hidden based on [user roles](#).

Accessing SIAM v3

After purchasing Eseye SIMs and signing up for a SIAM v3 account, Eseye sends a verification email with the following details:

- From: support@eseye.com
- Subject: Your Eseye SIM management account
- Body: Contains an account verification link



Before you can log in, you must verify the account via the link in the email.

To log in to SIAM v3:

1. Navigate to the following URL: <https://siam3.eseye.com/user/login/>
2. Enter you supplied username and password and select **Sign In**.



Account login

Username *

Password *

3. If [two factor authentication is enabled](#) for your portfolio, specify an authentication code and select **Submit**.



Verify Your Google Authenticator Code

You have enabled the Two-factor authentication provided by Google.
Please, enter your 6 digits code from Google Authenticator App.

Code *

Don't have Code. [Click here](#) to setup 2FA QR Code

To log out of SIAM v3:

From the <Username> menu, select **Logout**.

To reset your SIAM v3 password:

1. Navigate to the following URL: <https://siam3.eseye.com/user/login/>
2. Select **Request password**.

3. Specify your **Username** or **Email address** and select **Reset Password**.

Eseye Support sends an email address with a link to reset your password.

4. Select the link in the Password Reset email.
5. Specify a new password and select **Set new password**.

To change your password in SIAM v3:

1. Log in to SIAM v3 then go to: **<Username> > Details**.
2. Select **Change Password**.
3. In the *Change Password* dialog box, type your **Current Password**.
4. Type a **New Password**.
5. Alongside **Confirm New Password**, type the new password again.
6. Select **Update** to save your changes.

Managing user accounts

This section describes how to create new [user accounts](#) and [sub accounts](#) that can access Eseye tools to manage the SIM estate. You require user accounts to access Eseye's [SIM Information And Management \(SIAM\) portal](#) and developer APIs.

User accounts

User accounts restrict access to Eseye tools and APIs.

User roles in SIAM v3

SIAM v3 users are categorised into the following user roles:

- **Admin** users can access all menus including the [admin menu](#), which enables creating and managing users, creating and sending referral codes, managing and using sub accounts.



All SIAM v3 accounts have at least one Admin user, which has permissions to [add additional users](#) and [sub accounts](#).

- **Finance** users can access and edit the [Finance](#), [Ordering](#) and [Support](#) menus. Finance users also receive an emailed copy of all invoices.
- **Logistics** users can access and edit the [Ordering](#) menu, and can view (but not edit) the [Activity](#), [Settings](#) and [SIMs](#) menus.
- **Engineering** users can access the [Activity](#), [Settings](#), [SIMs](#) and [Support](#) menus.

Each role has access to different areas of the SIAM v3 portal, as defined in the following table.

SIAM page	Admin	Finance	Logistics	Engineering
SIMs menu (SIM List, Bulk Activate, Bulk Termination, SIM Audit Log)	Full access		View only	Full access
SIMs menu (Activate)	Full access			Full access
SIM List Actions (Bulk Action > Change Settings, SIM Control Panel)	Full access			Full access
SIM List Actions (SIM Summary, SIM Settings, Network Settings, Contract Settings, Billing, Messaging, Radius, NetFlow, Audit)	Full access		View only	Full access
Settings menu (SIM Packages, Alert Profiles, Device Models, Reporting Profile, Messaging API, Audit Log)	Full access		View only	Full access
Settings menu (Bulk Update and Bulk Activate)	Full			Full access

SIAM page	Admin	Finance	Logistics	Engineering
	access			
Activity menu (Notifications, Alerts, Reports, Messaging API)	Full access		View only	Full access
Admin menu (Users, Referral Codes, Sub Accounts, Admin Audit Log)	Full access			
Finance menu (Overview, Details, Transactions, Audit Log)	Full access	Full access		
Ordering menu (Shop, Cart, Order History, Delivery Address)	Full access	Full access	Full access	
Support menu	Full access	Full access	Full access	Full access
Account menu (Account Details, Notifications / Account Settings, Account Reports, Account Audit Log)	Full access			

To change the user roles in SIAM v3:

1. Log in to SIAM v3 then go to: **Admin > Users**.

Users


Username	Email Address	Admin	Finance	Engineering	Logistics	Enabled	Action
blatbridge@eseye.com	blatbridge@eseye.com	☒	☒	☒	☒	☒	
chuckel	chuckel@eseye.com	☒	☒	☒	☒	☒	
gourty@eseye.com	gourty@eseye.com	☒	☒	☒	☒	☐	
jmaguachivuk@eseye.com	jmaguachivuk@eseye.com	☒	☒	☒	☒	☒	
jssidil	jssidil@eseye.com	☒	☒	☒	☒	☒	
kevren	kevren@eseye.com	☒	☒	☒	☒	☒	
michaels	michaels@eseye.com	☒	☒	☒	☒	☒	
MarcDana	mparmagiani@eseye.com	☒	☒	☒	☒	☒	
mparmagiani	mparmagiani@eseye.com	☒	☒	☒	☒	☒	
richardd	richardd@eseye.com	☒	☒	☒	☒	☒	
tyyine	tyyine@eseye.com	☒	☒	☒	☒	☒	

2. Use the check boxes to select the user roles for each user.
3. Select **Save changes**.

Creating user accounts

To create a new SIAM v3 account:

1. Log in to SIAM v3 then go to: **Admin > Users**.
2. Select **Add user**.
3. Complete the fields on the [User Details](#) dialog.

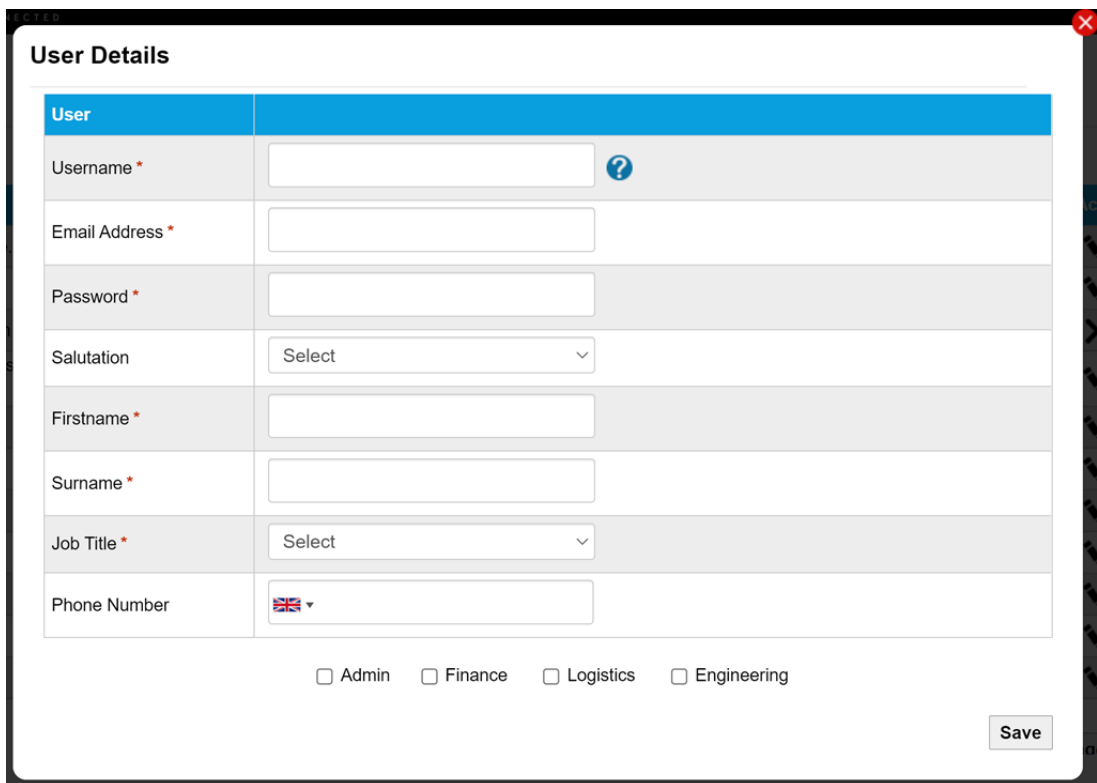

User	
Username *	?
Email Address *	
Password *	
Salutation	Select ▼
Firstname *	
Surname *	
Job Title *	Select ▼
Phone Number	 ▼

☐ Admin
 ☐ Finance
 ☐ Logistics
 ☐ Engineering

Save

Fields with an asterisk are mandatory.

4. Select one or more credential check boxes: **Admin**, **Finance**, **Logistics**, or **Engineering**.
5. Select **Save**.

The User Details saves and closes. An automatic email is sent to the new user with the following details:

- From: support@eseye.com
- Subject: Your account on <https://siam3.eseye.com/>
- Body: Contains an account verification link.

Sub accounts

Sub accounts are created by SIAM users with one or more customers who wish to use SIAM's functionality. SIMs which are moved to a sub account will be separate from those in the parent account, and any other child accounts. Sub accounts can be used to give customers access to a group of SIMs, rather than the entire portfolio.

Account users can log in as sub account users and use the SIAM portal as if they were the sub account user.

Creating sub accounts


Creating sub accounts involves sending referral codes to new users who can then gain access to Eseye's SIAM portal. The new users will only have access to SIMs allocated to the sub account.



Once created, you can only edit or delete sub accounts by contacting Eseye Support.

To create sub accounts in SIAM v3:

1. Log in to SIAM v3.
2. Create a referral code as follows:
 - a. Select **Admin > Referral Codes**.
 - b. Select **Add Sub Account Referral Code**, which displays the following dialog:

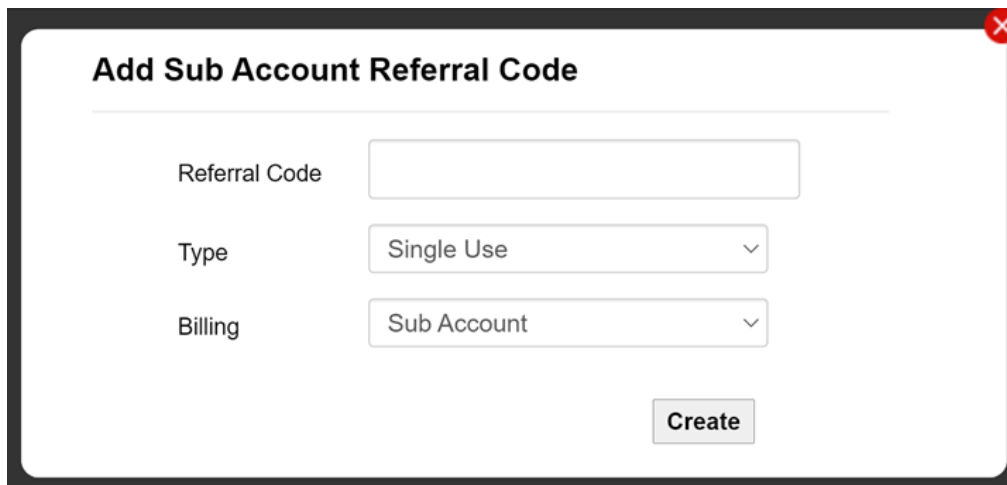

- c. Specify a unique referral code, at least six characters in length, to send to the user.
- d. Specify one of the following referral code types to send to the user:
 - **Single Use** – creates a code for a sub account that can only be used once.
 - **Perpetual** – creates a reusable code for sub accounts.
 - **Tie** – creates a new user on your account.
- e. Under *Billing*, select **Sub Account**.
- f. Select **Create**.

3. Send the referral code to the sub account user as follows:
 - a. On the [Referral Codes pages](#) page, select the message icon ().
 - b. Specify one or more email addresses to add to the sub account. Use a comma-separated list for multiple addresses.
 - c. Select **Send Email**.
4. Wait for the user to [validate the email](#).

To log in to a sub account:

1. Log in to SIAM v3 then go to: **Admin > Sub Accounts**.
2. Select alongside the relevant sub account.
3. Confirm that you want to log out of your current account.

SIAM logs in to the sub account, which has access to the [SIMs](#), [Settings](#), [Activity](#), [Admin](#) and [Support](#) menus.

To validate a sub account after receiving a referral code:

1. Check for an email from support@eseye.com with the following subject line: *Invitation to set up a SIM Management portal account*.
2. Open the email and select the link to validate your account.

SIAM displays the *Sign up account* page.

Required fields are indicated by a red star [*]. Most fields are free text fields or dropdown menus, the only fields with text rules are:

- **Username** – must be between 6 and 32 characters in length, and should contain only letters, digits, '-', '_', or be a valid email address.
- **Password** – must be between 6 and 32 characters in length, and contain at least one lower case letter, one upper case letter, and a numeric digit.
- **Phone number flag** – select the flag icon to select the appropriate international code for your phone number.

3. Complete the fields on the *Sign up account* page, then select **Sign up**.

Two factor authentication

Two factor authentication provides an additional layer of security by requiring two independent authentication factors. The first authentication factor is your user credentials. The second authentication factor requires a six-digit authentication code generated by a third-party authenticator application that runs on the user's mobile phone. The authentication codes expire after a short time, for example every 30 seconds.

We recommend using one of the following authentication applications:

- [Google Authenticator](#)
- [Authy](#)
- [LastPass Authenticator](#)

In SIAM, two factor authentication must be requested to be enabled for a portfolio. If enabled, all users assigned to that portfolio will require two factor authentication when they log in. The first time they log in after two factor authentication is enabled will trigger an email with instructions to use it.

To log in to SIAM for the first time with two factor authentication:

1. Navigate to the following URL: <https://siam3.eseye.com/user/login/>
2. Enter you supplied username and password and select **Sign In**.

After the first successful log in, SIAM emails a QR code and two factor authentication instructions to the user's email address.



All subsequent log in attempts will require the following additional step.

3. Specify an authentication code and select **Submit**.

To resend the two factor authentication QR code in SIAM:

1. Log in to SIAM as an *Admin* user.
2. Display the **Admin > User** menu (shown below).

Users

Username	Email Address	Admin	Finance	Engineering	Logistics	Enabled	Action
accounts	accounts@eseye.com	☐	☐	☐	☐	☐	
Test	enquiries@eseye.com	☒	☒	☒	☒	☒	
projects	imarsden@eseye.com	☐	☒	☒	☒	☒	

Save changes Add user

3. Next to the user to which to resend the QR code, select the  icon.

SIAM emails a QR code and two factor authentication instructions to the user's email address.

Managing SIMs

This section describes how to manage your SIMs through the [SIM lifecycle](#), which includes:

- *Changing SIM states* below
- *Updating SIM details* below
- *Creating SIM groups* on the next page
- *Ordering SIMs* on page 14
- *Activating SIMs* on page 15
- *Suspending SIMs* on page 20
- *Terminating SIMs* on page 22

Changing SIM states

The SIM state can be change from one state to another as described in the [SIM lifecycle](#).

To change individual SIM states in SIAM v3:

1. Go to: **SIMS > SIMs List > Action** 
2. Select **Change State**.
3. In the *Requested State* drop-down menu, select the required action.
4. Select **Request**.

Updating SIM details

You can update SIM details using the:

- **SIAM v3 portal**, which enables you to:
 - Update details for individual SIMs
 - Bulk update details for SIMs
- **Tigrillo API**, which provides a setSIMDetail API command to update individual SIM details.


To update details for individual SIMs using SIAM v3:

1. Go to: **SIMS > SIMs List > Action** 
2. Select **Edit**.
3. Edit the SIM Settings and select **Save**.

To bulk update details for multiple SIMs using SIAM v3:

1. Use the row check boxes to select the SIMs on which to perform the bulk action.
2. Below the results table, use the dropdown list to select **Change Settings**.

3. Select **Perform Bulk Actions** to display to Bulk change SIM Settings dialog.

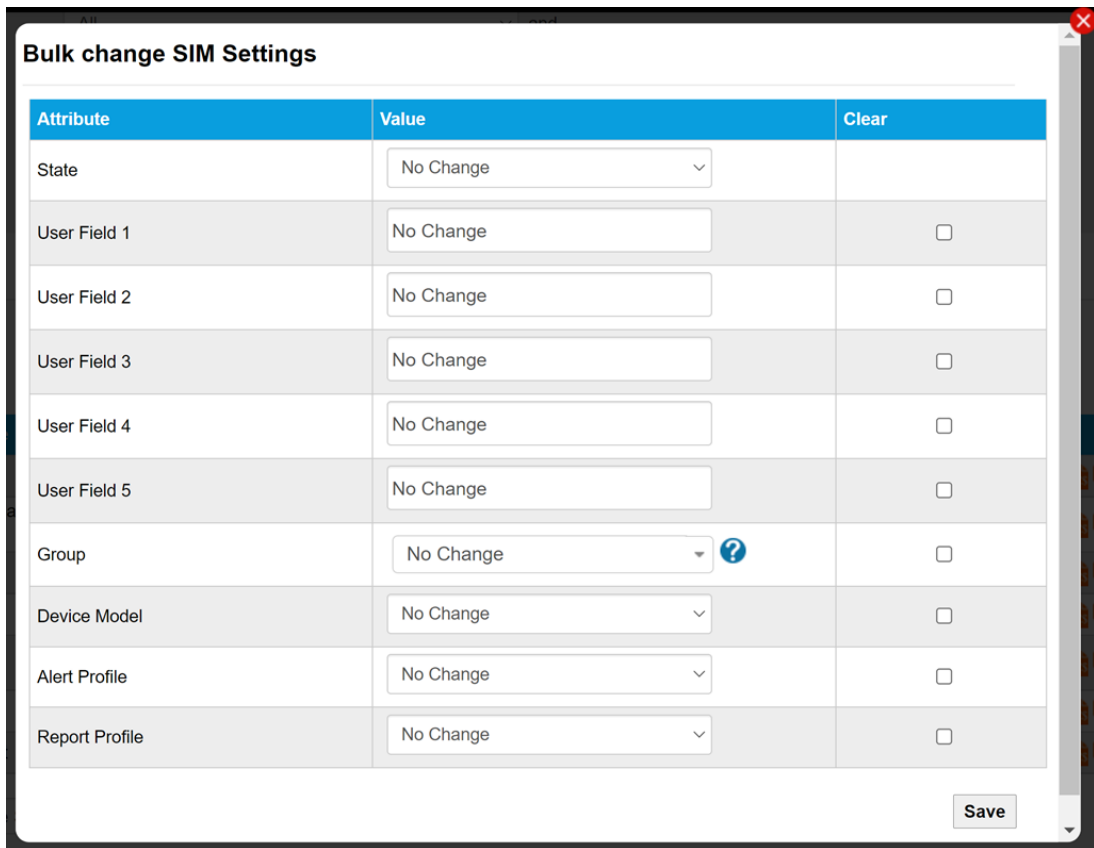

Bulk change SIM Settings

Attribute	Value	Clear
State	No Change	
User Field 1	No Change	☐
User Field 2	No Change	☐
User Field 3	No Change	☐
User Field 4	No Change	☐
User Field 5	No Change	☐
Group	No Change ?	☐
Device Model	No Change	☐
Alert Profile	No Change	☐
Report Profile	No Change	☐

Save

4. Update the required fields on the dialog and select **Save**.
5. Wait for the dialog to confirm the changes, then close the dialog.

Creating SIM groups

To configure a SIM Group name in SIAM v3:

1. Go to: **SIMS > SIM List > Action** 
2. On the *SIM Settings* page, select **Edit**.
3. In the **Group Name** drop-down menu, select an existing group.



Alternatively, type the name of a new group. This will appear in the Group list when you save your changes.

4. Select **Save**.

To assign a group to multiple SIMs in SIAM v3:

The first column in the SIM list is a checkbox.

1. Select the checkbox alongside each SIM you want to assign the Group Name to.



Select the column header checkbox to select all SIMs in the list.

2. At the bottom of the SIM list, in the drop-down box, select **Change Settings**.
3. Select **Perform Bulk Action**.

Reference Name	ICCID	MSISDN	IP
☒ JFU57VQ5PA			10.234
☐ TBU7KN8KKS			10.244
☐ DDWHSYBWCL			10.244
☒ ZMKRNNARS8			10.245
☒ VUS6YVAW6L			10.244
☒ XJ3XADFLLEE			10.244
☐ ALEZUWGB4R			10.244
☒ 6HKX9M5SDT			10.244
☐ 7LZC4FWK3Z			10.244
☒ DQJB6QLXSG			10.244

Change Settings Perform Bulk Action

The Bulk change SIM Settings form appears.

4. Using the **Group** drop-down menu, select the Group Name for the chosen SIMs.



Alternatively, type the name of a new group. This will appear in the Group list when you save your changes.

5. Select **Save** to save your changes.
6. Close *Bulk change SIM Settings*.

Ordering SIMs

The simplest way to order SIMs is via the SIAM v3 portal. This ensures that the SIMs you purchase are linked to your account which saves you entering your delivery and payment details.

To order SIMs in SIAM v3:

1. Using SIAM v3, go to: **Ordering > Shop**.
2. In the **Qty** column, type the number of SIMs you want to purchase.
3. Select  to add the items to your shopping cart.

Shop

Order Code	Description	Price	Qty	Action
17877	250MB Pooled data	\$3.00	1	
18184	250MB Pooled data	\$3.00	1	
18187	250MB Pooled data	\$3.00	1	

List of tariffs assigned to the account
 Cost of single SIM on this tariff
 Number of SIMs to purchase
 Add to shopping cart

4. Select  (top right) to view the shopping cart.
5. If you want to adjust the amount, type the new amount in the **Qty** column, then select  to refresh the amount.
6. If you want to delete a purchase, select .
7. Select **Checkout**.

The Delivery Address page appears.

8. If required, select **Edit this address** to update the details.
9. Select **Next Step**.

The Billing Address page appears.

10. If required, select **Edit this address** to update the details.
11. Select **Next Step**.

The Options page appears.

12. Select a mandatory Delivery Method.
13. Type an **Order Summary** to help you identify the account.
14. Type your Purchase Order number, which will appear on the invoice.
15. Request a shipping date.
16. If required, type **Additional Notes**.
17. Select **Next Step**.
18. Review your order, then select **Place Order**.

Next, you must pay for the SIMs.

Activating SIMs

A SIM must be activated before it can connect to a network. You can activate SIMs using the:

- **SIAM v3 portal**, which enables you to:
 - [Activate individual SIMs](#)
 - [Bulk activate a box of SIMs](#) (containing up to 200 SIMs with consecutive SIM numbers)
 - [Bulk activate up to 5000 SIMs non-consecutive SIMs](#) (using the bulk activation tool)
- **Tigrillo API**, which provides an activateSIMs API command to activate SIMs.

Activate individual SIMs

Activating individual SIMs uses the ICCID (SIM ID), which is typically printed on individual SIMs.

Before you begin

Before activating one or more SIM cards, you must:

- Have a signed Service Contract form agreeing to the associated costs.
- Ensure that all SIMs you want to activate in a single operation are of the same type (for example, all AnyNet SIMs and no other operator-supplied SIMs).
- Associate the SIMs with a package, using the tariff ID.
- Ensure that the tariff ID is the same for all SIMs you want to activate at the same time.
- Ensure your payments are up to date.
- For bulk activations, ensure you have set up Groups, Device Models and Alert Profiles.

To activate individual SIMs using SIAM v3:

1. Log in to SIAM v3, then select **SIMS > Activate**.
2. If you have pre-provisioned SIMs, select the link above the *SIM Activation* table to insert the SIMs into the table. For example:

 You will then be taken to step 2 where you can choose the package and other information for the SIMs.

You have **2 AnyNET** sims available to activate. [Click here](#) to load those sims.

(Please note that this will remove any SIMs you have listed below.)

ICCID/SIM ID	Friendly Name	IMEI
--------------	---------------	------

3. For each SIM you want to activate, type the **ICCID/SIM ID**, the optional **Friendly Name**, and the **IMEI**.

4. If you require more lines, select **Insert Line** in the drop-down list, then select **Perform Action**.

To delete a line, select the checkbox alongside the relevant SIM. Select **Delete Line** in the drop-down list, then select **Perform Action**. A confirmation box appears. Select **Yes** to remove the line.

To duplicate a line, select the checkbox alongside the relevant SIM. Select **Duplicate Line** in the drop-down list, then select **Perform Action**. A confirmation box appears. Select **Yes** to remove the line.

5. Activate the SIM(s):

- To activate specific SIMs, select the check boxes alongside the relevant SIMs, then select **Activate Selected SIMs**.
- To activate all the SIMs in the table, select **Activate All SIMs**.

The *Activate SIM - Step 2 of 2* page appears.

6. Using the **Select Compatible Package** drop-down list, which only displays tariffs assigned to the account, select the tariff to apply to all the SIMs.
7. Using the optional **Group** drop-down list, select the group name that will appear on invoices for easy SIM identification.
8. Using the optional **User Fields**, type in free text to help further identify the SIMs.
9. Using the **Device Model** drop-down list, select the device model to which the SIMs are assigned.
10. Using the **Alert Profile** drop-down list, select the alert profile for the SIMs.
11. Select **Activate Request** to activate the SIMs.



The activation process can take up to 60 minutes.

When activated, the SIMs become live on the network.

Bulk activate a box of SIMs

Eseye provide SIMs in boxes of 200. The SIMs in each box have consecutive SIM numbers which enables you to activate an entire box at a time using the first and last SIM numbers in the sequence of 200.

Before you begin

Before activating one or more SIM cards, you must:

- Have a signed Service Contract form agreeing to the associated costs.
- Ensure that all SIMs you want to activate in a single operation are of the same type (for example, all AnyNet SIMs and no other operator-supplied SIMs).
- Associate the SIMs with a package, using the tariff ID.
- Ensure that the tariff ID is the same for all SIMs you want to activate at the same time.
- Ensure your payments are up to date.
- For bulk activations, ensure you have set up Groups, Device Models and Alert Profiles.

To bulk activate a box of SIMs using SIAM v3:

1. Using SIAM, go to: **SIMs > Bulk Activate**.
2. In the **Bulk SIM boxfull activation** box, in the **First** field, type the lowest numerical SIM number from the box to activate.

3. In the **Last** field, type the highest numerical SIM number from the box to activate.
You can activate up to 200 consecutive SIMs.
The final digit in the SIM number is a check digit. .
4. Select **Activate**.
The Activate SIM - Step 2 of 2 page appears.
5. Using the **Select Compatible Package** drop-down menu, select the agreed tariff to apply to all the SIMs.
Only the tariffs assigned to the account are available for selection.
6. Using the optional **Group** drop-down menu, select the group name that will appear on invoices.
Groups can help identify SIMs.
7. Using the optional **User Fields**, type in free text to help further identify the SIMs.
8. Using the **Device Model** drop-down menu, select the device model to which the SIMs are assigned.
9. Using the **Alert Profile** drop-down menu, select the alert profile for the SIMs.

10. Select **Activate Request** to activate the SIMs.

The activation process can take up to 60 minutes. When activated, the SIMs become live on the network.

Bulk activate SIMs using the bulk activation tool

SIAM v3 provides a bulk activation tool which enables you to active up to 5000 SIMs by uploading a list of ICCID/SIM numbers.

Before you begin

Before activating one or more SIM cards, you must:

- Have a signed Service Contract form agreeing to the associated costs.
- Ensure that all SIMs you want to activate in a single operation are of the same type (for example, all AnyNet SIMs and no other operator-supplied SIMs).
- Associate the SIMs with a package, using the tariff ID.
- Ensure that the tariff ID is the same for all SIMs you want to activate at the same time.
- Ensure your payments are up to date.
- For bulk activations, ensure you have set up Groups, Device Models and Alert Profiles.

To bulk activate SIMs using the SIAM v3 Bulk Activation tool:

1. Using SIAM, go to: **SIMs > Bulk Activate**.
2. In the **Bulk Activation** box, use the **Select Compatible Package** drop-down menu to select the agreed tariff to apply to all the SIMs.

Only the tariffs assigned to the account are available for selection.

3. Using the optional **Group** drop-down menu, select the group name that will appear on invoices. Groups can help identify SIMs.

4. In the **ICCID** box, paste the list of SIM numbers you want to activate, one per line.

You can paste up to 5000 non-consecutive SIM numbers.

Select **Clear** to remove all ICCID values from the list.

5. Select **Activate SIM** to activate the SIMs.

The activation process can take up to 60 minutes. When activated, the SIMs become live on the network.

Suspending SIMs

Suspending a SIM disables all services on it (i.e. Data, SMS and Voice), although you will still be charged the agreed monthly tariff. A suspended SIM is still provisioned. To re-enable services (i.e. Data, SMS and Voice), the SIM should be unsuspended.



Unsuspending a SIM can only be achieved after at least two hours of suspension because the suspension process may take up to two hours to complete.

You can suspend SIMs using the:

- **SIAM v3 portal**, which enables you to:
 - [Suspend or unsuspend individual SIMs](#)
 - [Bulk suspend SIMs](#) (via email)
- **Tigrillo API**, which provides suspendSIMs and unsuspendSIMs API commands to suspend/unsuspend SIMs.

Suspending individual SIMs

You can suspend or unsuspend SIMs by changing the SIM state in SIAM v3.

To suspend an individual SIM using SIAM v3:

1. Go to: **SIMS > SIMs List > Action** .
2. Select **Change State**.
3. In the *Requested State* drop-down menu, select **Suspend SIM**.
4. Select **Request**.



The suspension process takes up to two hours. When suspended, the SIM will continue to connect to the network, and service charges will continue.

To unsuspend an individual SIM using SIAM v3:



You can only unsuspend a SIM after it has completed the suspension process (this takes up to two hours). When unsuspended, the SIM will authenticate on the network, and can use available services.

1. Go to: **SIMS > SIMs List > Action** .
2. Select **Change State**.
3. In the *Requested State* drop-down menu, select **Reactivate SIM**.
4. Select **Request**.

Suspending SIMs in bulk

You can only bulk suspend SIMs via email.

To suspend multiple SIMs via email:

1. Use this [email](#) link, or create your own email.
2. Add the following information:
 - SIAM account username.
 - List of SIM ICCIDs you want to suspend (without quotation marks).
 - I understand that Service Charges will continue for these SIMs.
3. Send the email to support@eseye.com.

Terminating SIMs

When a SIM is terminated, the SIM stops connecting to the network. Service charges will stop unless the SIM is in contract, in which case you are liable for the rest of the service charges up until the end date of the contract.



Termination is not instant – Eseye must verify the termination. There may also be cancellation costs associated with terminating a SIM.

Once a SIM is terminated it can be re-provisioned by changing the state.

You can terminate SIMs using the:

- **SIAM v3 portal**, which enables you to:
 - [Terminate individual SIMs](#)
 - [Bulk terminate up to 5000 SIMs non-consecutive SIMs](#) (using the bulk termination tool)
- **Tigrillo API**, which provides a terminateSIMs API command to terminate SIMs.

Terminating individual SIMs

To terminate an individual SIM requires you to identify the SIM using its ICCID (SIM ID).

To terminate an individual SIM in SIAM v3:

1. Using SIAM, go to: **SIMs > SIMs List**.
2. Use the [search fields](#) to find the SIM to terminate.

- For the SIM to terminate, in the **Actions** column, select the  icon to display the [network settings](#) for the SIM.

SIM Network Settings - 894453852301

PDF CSV

ICCID	8944538523018828718	Action
Status	Active	<button>Change State</button>

Attribute	Value
IMSI	2345885586
MSISDN (Primary)	+447624978
IP Address	10.221.14.164

Attribute	Value
IMSI	2040807480
MSISDN	+999080748
IP Address	10.112.173.245
IP Address	10.240.173.245

- Select **Change State**.
- In the *Requested State* drop-down menu, select **Terminate SIM**.
- Select **Request**.



SIMs that are not in contract are queued for termination. Termination is not instant – Eseye must verify the termination.

Terminating SIMs in bulk

You can [terminate](#) up to 5000 non-consecutive SIMs at a time using the *Bulk Termination* tool.

To bulk terminate SIMs in SIAM v3:



If you terminate SIMs that are currently in contract, you are liable for the rest of the service charges up until the end date of the contract.

1. Using SIAM, go to: **SIMs > Bulk Termination**.

Bulk Termination

- i** You can paste a list of **ICCID's** into the text area below.
- i** You can terminate up to **5000** SIMs at a time.

Bulk Termination (Paste data below)

ICCID

Terminate

Clear

2. In the **ICCID** box, paste the list of SIM numbers you want to terminate, one per line.
 You can paste up to 5000 non-consecutive SIM numbers.
 Select **Clear** to remove all ICCID values from the list.
3. Select **Terminate** to terminate the SIMs.
 SIMs that are not in contract are queued for termination. Termination is not instant – Eseye must verify the termination.
 SIMs that are currently in contract will incur further service charges.
4. If a warning appears listing in contract SIMs, and you want to continue with the termination, select **Terminate All SIMs**.
 You will receive a separate termination invoice with the remaining service charges in one lump sum, unless you have made a prior alternative arrangement with Accounts.

Monitoring SIMs and devices

This section describes how to monitor your SIMs and devices, including:

- *Managing Alerts* on page 26
- *Managing Reports* on page 29
- *Locating devices using a cellular connection* on page 63
- *Displaying SIM Timelines* on page 66

Viewing aggregated connection and data flow metrics

The Margay tool enables you to observe patterns, problems and anomalies with your network performance, using a web interface or the Margay API. You can access connection metrics, such as authentication and data throughput statistics, and display these by geographic region for a specified time period.

Monitoring tools in SIAM v3

The [SIM Actions](#) on the *SIMs > SIM List* page also enable you to monitor the following:

- [Billing information](#) including data, SMS and voice usage.
- [Messaging usage](#) including SMS, USSD and API messages.
- [RADIUS authentication information](#) including session timings and MCC/MNC values.
- [NetFlow data](#) including traffic flow and volume per SIM.
- Connectivity using the [Control Panel](#) which can send ping messages to the device.

Managing Alerts

In this section, you will learn how to set up Alert Profiles for your SIAM v3 account.

We highly recommend you set up SIM alerts to notify you when SIM usage exceeds data limits within a calendar month.

You can also set up alerts to automatically suspend SIMs when their usage goes beyond the limits you set. This prevents excessive and unexpected charges to your account.

You can receive SIM alert notifications via SIAM and via email.

Viewing alerts


To view alerts in SIAM v3:

Go to: **ACTIVITY > Alerts**

OR

Go to: **SIMS > SIM List**

If a SIM has breached data limits defined in an alert, these are displayed in the SIM List *Alert* column:

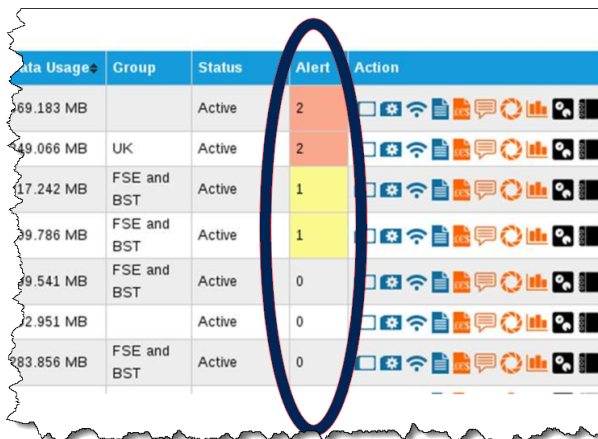

Data Usage	Group	Status	Alert	Action
69.183 MB		Active	2	[Icons]
49.066 MB	UK	Active	2	[Icons]
17.242 MB	FSE and BST	Active	1	[Icons]
39.786 MB	FSE and BST	Active	1	[Icons]
9.541 MB	FSE and BST	Active	0	[Icons]
2.951 MB		Active	0	[Icons]
83.856 MB	FSE and BST	Active	0	[Icons]

Using alert profiles

To create an alert profile in SIAM v3:

Go to: **SETTINGS > Alert Profiles**

1. Select **Add New Alert Profile**
2. Type a Profile name.
3. Select the **Default Profile** check box if you want this profile to become the default profile for newly activated SIMs.
4. Set up the financial, data, messaging and device alerts for this profile.
5. Select **Save**.

The profile saves and closes.

To assign an alert profile to an individual SIM in SIAM v3:

1. Go to: **SIMS > SIMs List > Action** 
2. On the *SIM Settings* form, select **Edit**.
3. Using the **Alert Profile** drop-down menu, select the Alert Profile for the SIM.
4. Select **Save** to save your changes.
5. Close *SIM Settings*.

To assign an alert profile to multiple SIMs in SIAM v3:

1. Using SIAM v3, go to: **SIMS > SIM List**
2. Select the checkbox alongside each SIM you want to assign an Alert Profile to.



Select the column header checkbox to select all SIMs in the list.

3. At the bottom of the SIM list, in the drop-down box, select **Change Settings**.
4. Select **Perform Bulk Action**.

☒	Friends Name	ICCID	MSISDN	IP
☒	JFU5TVQ5PA			10.234
☐	TBU7KN8KKS			10.244
☐	DDIWH5YBWCL			10.244
☒	ZMKRNNARS8			10.245
☒	VUS6YVAW6L			10.244
☒	XJ3XADFLIE			10.244
☐	ALEZUWGB4R			10.244
☒	6HKX9MS5DT			10.244
☐	7LZC4FWK3Z			10.244
☒	DQJIB6QLXSG			10.244

The Bulk change SIM Settings form appears.

5. Using the **Alert Profile** drop-down menu, select the Alert Profile for the chosen SIMs.
6. Select **Save** to save your changes.
7. Close *Bulk change SIM Settings*.

To view or edit an alert profile in SIAM v3:

1. Go to: **SETTINGS > Alert Profiles**
2. Alongside the Alert Profile you want to edit, select .

Enabling email alerts

To enable SIM alert emails in SIAM v3:



If an account has multiple users, then each user must set up this feature if they want to receive alerts via email.

1. Go to: **<Username> > Notifications**
2. In the *Alert Profile Notifications* box, select the **Enable Alert Notification** check box.
3. Select **Update** to save your changes.

Alert notification emails are sent to the Account holder's email address.

To view or edit your email address, go to: **<Username> > Details**

Managing Reports

Eseye generate monthly reports, which help you to better understand your SIM estate. These detail:

- A range of information about the SIMs, such as data usage, costs involved, current SIM status, and location, and so on.
- Information about network connectivity.
- SIAM account usage and audit trails to keep staff accountable.

You can access all these reports using SIAM. You need permission to see specific reports.

Creating report profiles

To create a report profile in SIAM v3:

1. Go to: **SETTINGS > Reporting Profile**
2. Select **Add New Report Profile**
3. Type a **Profile Name**.
4. Select the **Default Profile** check box if you want this profile to become the default profile for newly activated SIMs.
5. Select the **Enable** checkbox for each report you want to generate.
6. Select a report frequency using the **Interval** drop-down menu.
7. Select **Save**.

The profile saves and closes.

8. If you edit the profile, the **Run Now** action is available to generate the report immediately.

Managing report profiles

To view a report profile:

1. Go to: **Activity > Reports**
2. Alongside the report you want to see, select a format to instantly download.

The following formats may be available, depending on the report:



To edit a report profile:

1. Go to: **Settings > Reporting Profile**
2. Alongside the Report Profile you want to edit, select .

To enable report notification emails:



If an account has multiple users, then each user must set up this feature if they want to receive email notifications that a report has become available in SIAM.

1. Go to: **<Username> > Notifications**
2. In the *Report Profile Notifications* box, select the checkbox alongside the notifications you want to receive for:
 - **SIM Admin Reports** – reports describing what was done to the SIM
 - **SIM Usage Reports** – reports describing service used by the SIM
3. Select **Update** to save your changes.

Report notification emails are sent to the Account holder's email address.

To view or edit your email address, go to: **<Username> > Details**

Assigning report profiles to SIMs

To assign a report profile to an individual SIM:

1. Go to: **SIMS > SIMs List > Action** 
2. On the *SIM Settings* form, select **Edit**.
3. Using the **Report Profile** drop-down menu, select the Report Profile for the SIM.
4. Select **Save** to save your changes.
5. Close *SIM Settings*.

To assign a report profile to multiple SIMs:

1. Using SIAM v3, go to: **SIMS > SIM List**
2. Select the checkbox alongside each SIM you want to assign the Report Profile to.



Select the column header checkbox to select all SIMs in the list.

3. At the bottom of the SIM list, in the drop-down box, select **Change Settings**.

4. Select **Perform Bulk Action**.

Name	ICCID	MSISDN	IP
☒ JFU57VQ5PA			10.234
☐ TBU7KN8KKS			10.244
☐ DDIWHSYBWCL			10.244
☒ ZMKRNNARS8			10.245
☒ VUS6YVAW6L			10.244
☒ XJ3XADFL			10.244
☐ ALEZUWGB4R			10.244
☒ 6HKX9M5SDT			10.244
☐ 7LZC4FWK3Z			10.244
☒ DQJIB6QLXSG			10.244

Change Settings **Perform Bulk Action**

The Bulk change SIM Settings form appears.

5. Using the **Report Profile** drop-down menu, select the Report Profile for the chosen SIMs.
6. Select **Save** to save your changes.
7. Close *Bulk change SIM Settings*.

Finance Reports

The following finance reports help you to understand your agreed contract and current costs across your entire SIM card estate, or per SIM card:

- [Summary invoice](#)
- [Detailed invoice](#)
- [Account statement report](#)
- [SMS billing activity](#)
- [Service contract](#)

Summary Invoice (PDF)

Billing overview for your SIM card estate. The amount owing is summarised on the first page of this report and the total (including VAT) is listed under the *TOTAL* field. You may want to print the first page (shown below) financial overview to keep on record.

INVOICE			
The invoice summary. We recommend you print the first page for your records.			
Invoice Date	Invoice Number	Customer PO Reference	Customer VAT Number
<Invoice date>, for example 01/11/2020 The invoice includes all charges up until (but not including) this date.	<Unique reference number>	<Related customer Purchase Order number>	<VAT ID>
Eseye Ltd 20 Nugent Road Surrey Research Park Guildford GU2 7AF, UK			
Invoice To:		Ship To:	
Business/Customer name Customer address		Provided if different from the invoice name and address.	
Mobile Connectivity Service			
Connections Under Management	The total number of SIM cards billed on this invoice, including: - All active SIM cards. - All suspended SIM cards (for which the service charge continues). - SIM cards terminated in the last month (allows for any usage within the month before termination, as Data, SMS, and Voice charges are billed in arrears).		
Invoice Items	Invoice Amount	Invoice VAT	
Service Charges	Total for all SIM cards in currency agreed on contract.	VAT per item.	
Data Charges	Total data charges for all SIM cards; only listed if one or more SIMs have data charges.		
Messaging Charges	Total messaging charges for all SIM cards; only listed if one or more SIMs have SMS Charges.		
Calls Charges	Total calls charges for all SIM cards; only listed if one or more SIMs have Voice charges.		
SUBTOTAL	Nett invoice total (before VAT).		
VAT TOTAL	Total VAT owed.		
TOTAL	Gross invoice total (including VAT).		
Electronic payment is preferred Account Name: Eseye Ltd USD Account Number: 71xxxxxx USD Sort Code: 40-xxx-xx USD IBAN: GBxxxxxx53 Bank Identifier Code (BIC8): xxxxxxxx Swift / Bank Identifier Code (BIC11): xxxxxxxxxx	Bank Details: HSBC Bank 5 Great Underbank Stockport, Cheshire SK1 1LH, UK	CompanyNumber: 06397669 VAT Number: GB921298326	Contact Details: Phone: +44 1483 802507 E-mail: accounts@eseye.com Web Site: www.eseye.com
How to pay You can also pay using SIAM.			

The Eseye-specific payment information is also provided on the first page.

If the estate is under 1000 SIMs, a list of individual SIM card costs is summarised in the PDF. If the estate is over 1000 SIM cards, these records are not provided in the PDF. Use the Detailed Invoice to view the individual SIM card records instead, and to see more details about each SIM card.

SIM Number:	89445xxxxxxxxxxxxxx	The SIM card ICCID.
Phone Number:	+44762xxxxxxxxxx	The SIM card MSISDN.
Package:	55555: CompanyX Widget 2MB pooled data	The Eseye SIM Contract number defining SIM card pricing and configuration.
Friendly Name:	London Widget	Customer defined in SIAM, to aid SIM card recognition (we recommend using the site location or data connection purpose). For more information, see the SIAM User Guide .
Group Name:	Group1	Customer-defined in SIAM, for grouping similar SIM cards.
Service Charges		
Covers both the active subscription on the HLR MNO and any bundled usage, billed in advance.		
Service Charge	Period 01/11/2020 through 31/11/2020	\$ 0.30
	Service charge for this invoice. Billed in advance.	
Service Charge	Period 22/10/2020 through 30/10/2020	\$ 0.15
	Partial pro rata charge covering the period from activation. Billed in arrears.	
Data Charges		
Data used by the SIM card in the billing period. Billed in arrears.		
Zone 1 Data - 5.54MB in excess of 2MB bundle	Period 21/10/2020 through 31/10/2020	\$ 1.00
Charges for one or more zones (geographic regions) uniquely defined on your SIM contract.	Dates during which charges were accrued. Billed in arrears.	
Connection Total		\$ 1.45
SIM Number:	89445xxxxxxxxxxxxxx	
Phone Number:	+44762xxxxxxxxxx	
Package:	44444: CompanyX 3MB/Month AnyNet (SMS+Voice)	
Friendly Name:	UK_Airfreight	
Group Name:	Group2	
Service Charges		
Service Charge	Period 01/11/2020 through 30/11/2020	\$ 1.15
Data Charges		
Zone 1 Pooled Data - 0.29MB in excess of 3MB bundle	Period 01/10/2020 through 24/10/2020	\$ 0.00
Zone 3 Data - 1.86MB within 2GB bundle	Period 25/10/2020 through 31/10/2020	\$ 0.00
SMS Charges		
SMS (small messaging service) used by the SIM card in the billing period. Billed in arrears.		
Zone 1 SMS MO - 3 SMS messages within 5 bundle	Period 01/10/2020 through 01/10/2020	\$ 1.71
OffNetVoice Charges		
Voice calls used by the SIM card in the billing period. Billed in arrears.		
Zone 1 Voice - 5 Mins dialled calls	Period 20/10/2020 through 24/10/2020	\$ 1.71
Connection Total		\$ 2.86

If pooled usage is applied to the current invoice, the section below is also displayed in the billing report. Data, SMS, or Voice charges are listed if the usage is in excess of the pooled allowance. You can see further details in the CSV file (detailed invoice), for example: which package the charge was made against.

Data Charges (Pooled data charge example)		
Zone 1 Data - 1.14GB in excess of 40MB bundle	Period 01/10/2020 through 31/10/2020	\$ 11.68
Connection Total		\$ 11.68
Data Charges		
Zone 1 Data - 37.6MB in excess of 3.59GB bundle	Period 01/10/2020 through 31/10/2020	\$ 7.53
Connection Total		\$ 7.53

To generate the report:

- Automatically generated by Eseye.

To find the report in SIAM:

- From the menu, select **Finance > Transactions** to display the [Transactions page](#).
- Alongside **Invoice**, select .

Detailed Invoice (CSV)

Detailed billing invoice for your SIM card estate, reporting accounts for each ICCID with details including charge type (Data, SMS, or Voice), charge amount in a chosen currency, charge period, activation, current MCC.

Use this file to analyse your data usage and examine trends.

Eseye CSV Invoice Example							
Invoice Date: 01/11/2020	ItemRef	ICCID	MSISDN	DataMSISDN	PackageID	Package	Description
	Service	'1321'	'116'	'17677'	'17677 - CompanyX 250MB Pooled data'	'0'	Service Charge
	Service	'1321'	'116'	'17677'	'17677 - CompanyX 250MB Pooled data'	'0'	Service Charge
	Data	'1321'	'116'	'17677'	'17677 - CompanyX 250MB Pooled data'	'68827'	Zone 1 Data - 71.3MB within 250MB bundle
	Service	'1351'	'119'	'17677'	'17677 - CompanyX 250MB Pooled data'	'0'	Service Charge
	Service	'1953'	'179'	'17677'	'17677 - CompanyX 250MB Pooled data'	'0'	Service Charge
	Data	'1953'	'179'	'17677'	'17677 - CompanyX 250MB Pooled data'	'68827'	Zone 1 Data - 1.13GB in excess of 250MB bundle
	SMS DR	'1953'	'179'	'17677'	'17677 - CompanyX 250MB Pooled data'	'70249'	SMS - 2 SMS messages
	Service	'1257'	'110'	'18103'	'18103 - CompanyX 200min Pooled voice'	'0'	Service Charge
	OffNetVoice	'1257'	'110'	'18103'	'18103 - CompanyX 200min Pooled voice'	'70963'	Zone 1 Voice 100min within 200min bundle
	Service	'1255'	'109'	'18187'	'18187 - CompanyX 250MB Pooled data'	'0'	Service Charge
	Data	'1255'	'109'	'18187'	'18187 - CompanyX 250MB Pooled data'	'70822'	Zone 1 Data - 125MB in excess of 250MB bundle
	SMS	'1255'	'109'	'18187'	'18187 - CompanyX 250MB Pooled data'	'70826'	Zone 1 SMSMO - 3 SMS messages
	APISMSMT	'4534'	'524'	'10033'	'10033 - CompanyX - SMS API'	'33067'	Zone 1 API SMS MT - 136 APISMSMT messages
	SMS	'4534'	'524'	'10033'	'10033 - CompanyX - SMS API'	'34348'	Zone 1 SMS - 130 SMS messages

The detailed invoice CSV contains the following fields: Invoice date, Item reference, ICCID, MSISDN, Data MSISDN, Package ID, Package, Package item ID, Description, Start, Stop, Quantity, Currency, Rate, Amount, Friendly name, Group name, Activated, Bundle quantity, In bundle quantity and MCC.

To generate the report:

- Automatically generated by Eseye.

To find the report in SIAM:

- From the menu, select **Finance > Transactions** to display the [Transactions page](#).
- Alongside **Invoice**, select .

SMS Billing Activity (PDF, CSV)

Displays Data, SMS, and Voice activity for an individual SIM, including start and stop date time stamps, usage quantity and cost information.


eseye
 INTELLIGENTLY CONNECTED

SIM Billing Activity - 89445385123456789012

Activity	Description	Start	Stop	Quantity	Price
Data	Zone 1 Data	2021-12-13 00:28:42	2021-12-13 02:41:02	4096	£0.00
Data	Zone 1 Data	2021-12-13 02:41:02	2021-12-13 04:53:21	4096	£0.00
Data	Zone 1 Data	2021-12-13 04:53:21	2021-12-13 07:05:39	6144	£0.00
Data	Zone 1 Data	2021-12-13 07:05:39	2021-12-13 07:07:10	6144	£0.00
Data	Zone 1 Data	2021-12-13 07:07:10	2021-12-13 07:40:30	6144	£0.00
Data	Zone 1 Data	2021-12-13 07:40:30	2021-12-13 09:52:45	4096	£0.00

Use the CSV file to analyse your data usage and examine trends.

	A	B	C	D	E	F
1	Activity	Description	Start	Stop	Quantity	Price
2	Data	Zone 1 Data	18/12/2021 01:11	18/12/2021 03:24	7168	0
3	Data	Zone 1 Data	18/12/2021 03:24	18/12/2021 05:36	4096	0
4	Data	Zone 1 Data	18/12/2021 05:36	18/12/2021 05:38	3072	0
5	Data	Zone 1 Data	18/12/2021 05:38	18/12/2021 07:50	7168	0
6	Data	Zone 1 Data	18/12/2021 07:50	18/12/2021 10:02	6144	0
7	Data	Zone 1 Data	18/12/2021 10:02	18/12/2021 12:15	7168	0
8	Data	Zone 1 Data	18/12/2021 12:15	18/12/2021 14:27	4096	0

To find and generate the report in SIAM:

1. From the menu, select **SIMs** > **SIM List** to display the [SIM List page](#).
2. Alongside a SIM card, select  to display the [Billing page](#).
3. To download the information in a particular format, select either:  or .

Service Contract (PDF)

Your service contract with Eseye contains agreed costs per SIM card, such as monthly charge, purchase charge, activation charge, and networking type.

Eseye Limited / Package Reference: 9368			
		Eseye Limited, 8 Frederick Sanger Road, Guildford, Surrey, GU2 7YD, UK Tel: +44 (0) 1483 685200 Fax: +44 (0) 1483 685201 Email: enquiries@eseye.com Company Number: 06387648 VAT Number: 921296035	
Service Contract Package ref: [9368]			
Customer Billing Details			
Company Name: eseye - demo		Contact: Mr. demoExample eseye	
Address: 8 Frederick Sanger Road guildford surrey GB gu27yd		Position: Phone Number: +441483685200 Email Address: demo@eseye.com Company No: VAT reg no:	
Signature:		Date:	
By signing this Service Contract you are agreeing to be bound by the Eseye Standard Terms and Conditions			
Contract Type 3 months		Monthly charge per SIM: £ 0.00 GBP	
SIM Purchase Charge: £ 0 GBP		Activation Charge: £ 0.00 GBP	
Data Enable	SMS Enable	Voice Disable	Networking NAT
Should you use the Equipment or services other than as agreed on an order form (for example in a different country not specified) we reserve the right to apply extra charges in accordance with our Standard Charges (as amended from time to time and which can be obtained on request).			

The terms also include your designated countries for Zones 1, 2 and 3, and the costs for bundled and out of bundle usage for Data, SMS, and Voice, as well as contract length.

Countries: Anguilla, Antigua and Barbuda, Australia, Austria, Azerbaijan, Barbados, Belgium, Brazil, Bulgaria, Canada, Cayman Islands, Chile, China, Colombia, Croatia, Cyprus, Czech Republic, Denmark, Dominica, El Salvador, Estonia, Finland, France, French Guiana, Gambia, Germany, Gibraltar, Greece, Grenada, Guadeloupe, Hong Kong, Hungary, Iceland, Ireland, Israel, Italy, Jamaica, Japan, Kenya, Kuwait, Latvia, Lesotho, Liechtenstein, Lithuania, Luxembourg, Malaysia, Malta, Mexico, Monaco, Montserrat, Netherlands, New Zealand, Nigeria, Norway, Oman, Panama, Peru, Poland, Portugal, Puerto Rico, Qatar, Republic of Korea, Reunion, Romania, San Marino, Singapore, Slovakia, Slovenia, South Africa, Spain, Sweden, Switzerland, Taiwan, Thailand, Uganda, United Kingdom, United Republic of Tanzania, United States	Zone 1 Data [31457]	
	Bundled: 20MB (rounded up to nearest 1KB)	Out of Bundle: £0.2 GBP per MB (rounded up to nearest 1KB)
Countries: Anguilla, Antigua and Barbuda, Australia, Austria, Azerbaijan, Barbados, Belgium, Brazil, Bulgaria, Canada, Cayman Islands, Chile, China, Croatia, Cyprus, Czech Republic, Denmark, Dominica, El Salvador, Estonia, Finland, France, French Guiana, Germany, Gibraltar, Greece, Grenada, Guadeloupe, Hong Kong, Hungary, Iceland, Ireland, Israel, Italy, Jamaica, Kenya, Kuwait, Latvia, Lesotho, Liechtenstein, Lithuania, Luxembourg, Malaysia, Malta, Monaco, Montserrat, Netherlands, New Zealand, Norway, Oman, Panama, Peru, Poland, Portugal, Puerto Rico, Qatar, Republic of Korea, Reunion, Romania, San Marino, Singapore, South Africa, Spain, Sweden, Switzerland, Thailand, United Kingdom, United Republic of Tanzania, United States	Zone 1 SMS MO [31460]	
	Bundled: 20	Out of Bundle: £0.10 GBP
Countries: Afghanistan, Albania, Algeria, American Samoa, Andorra, Angola, Anguilla, Antigua and Barbuda, Argentina, Armenia, Aruba, Australia, Austria, Azerbaijan, Bahamas, Bahrain, Bangladesh, Barbados, Belarus, Belgium, Belize, Benin, Bermuda, Bhutan, Bosnia and Herzegovina, Botswana, Brazil, British Virgin Islands, Brunei Darussalam, Bulgaria, Burkina Faso, Burundi, Cambodia, Cameroon, Canada, Cape Verde, Cayman Islands, Central African Republic, Chad, Chile, China, Colombia, Comoros, Congo, Cook Islands, Costa Rica, Cote D'Ivoire, Croatia, Cuba, Cyprus, Czech Republic, Democratic People's Republic of Korea, Denmark, Djibouti, Dominica, Dominican Republic, Ecuador, Egypt, El Salvador, Equatorial Guinea, Eritrea, Estonia, Ethiopia, Falkland Islands, Faroe Islands, Federated States of Micronesia, Fiji, Finland, France, French Guiana, French Polynesia, Gabon, Gambia, Georgia, Germany, Ghana, Gibraltar, Greece, Greenland, Grenada, Guadeloupe, Guam, Guatemala, Guinea, Guinea-Bissau, Guyana, Haiti, Honduras, Hong Kong, Hungary, Iceland, India, Indonesia, Iraq, Ireland, Islamic Republic of Iran, Israel, Italy, Jamaica, Japan, Jordan, Kazakhstan, Kenya, Kiribati, Kuwait, Kyrgyzstan, Lao People's Democratic Republic, Latvia, Lebanon, Lesotho, Liberia, Libyan Arab Jamahiriya, Liechtenstein, Lithuania, Luxembourg, Macao, Madagascar, Malawi, Malaysia, Maldives, Mali, Malta, Marshall Islands, Mauritania, Mauritius, Mexico, Monaco, Mongolia, Montenegro, Montserrat, Morocco, Mozambique, Myanmar, Namibia, Nauru, Nepal, Netherlands, New Caledonia, New Zealand, Nicaragua, Niger, Nigeria, Non-terrestrial and Private networks, Northern Mariana Islands, Norway, Oman, Pakistan, Palau, Panama, Papua New Guinea, Paraguay, Peru, Philippines, Plurinational State of Bolivia, Poland, Portugal, Puerto Rico, Qatar, Republic of Korea, Republic of Moldova, Reunion, Romania, Russian Federation, Rwanda, Saint Kitts and Nevis, Saint Lucia, Saint Pierre and Miquelon, Saint Vincent and the Grenadines, Samoa, San Marino, Sao Tome and Principe, Saudi Arabia, Senegal, Serbia, Seychelles, Sierra Leone, Singapore, Slovakia, Slovenia, Solomon Islands, Somalia, South Africa, South Sudan, Spain, Sri Lanka, Sudan, Suriname, Swaziland, Sweden, Switzerland, Syrian Arab Republic, Taiwan, Tajikistan, Thailand, The Democratic Republic of the Congo, The Former Yugoslav Republic of Macedonia, Timor-Leste, Togo, Tonga, Trinidad and Tobago, Tunisia, Turkey, Turkmenistan, Turks and Caicos Islands, Tuvalu, U.S. Virgin Islands, Uganda, Ukraine, United Arab Emirates, United Kingdom, United Republic of Tanzania, United States, Uruguay, Uzbekistan, Vanuatu, Vatican City State, Venezuela, Viet Nam, Wallis and Futuna, Yemen, Zambia, Zimbabwe	MTSMS [31463]	
	Bundled: None	Out of Bundle: £0.00 GBP
	API MT SMS [34678]	
	Bundled: None	Out of Bundle: £0.00 GBP

To find the document in SIAM:

1. From the menu, select **Settings** > **SIM Packages** to display the [SIM Packages page](#).
2. Alongside the **Package ID**, select .

Audit Reports

The following audit reports give you visibility on your user interactions with the SIAM portfolio and the SIM card estate:

- [Account audit report](#)
- [Finance audit report](#)
- [Logistics audit report](#)
- [Packages audit report](#)
- [Profiles audit report](#)

- [Messaging audit report](#)
- [Networking audit report](#)
- [SIM audit report](#)
- [SIM audit log per SIM](#)
- [SIM audit log for the estate](#)

Account Audit Report (PDF)

Date and time stamps user access to the account, as well as notifications sent. Use this file to track SIAM access and who is responsible for received notifications.




Account Audit Report

Report Details

Portfolio Name	Period Start	Period End
eseye - Demo	2022-01-07 00:00:00	2022-01-12 00:00:00

ID	Date	Description	Reference	Information	User
151273367	2022-01-11 14:58:46	Account login	User logged in	Username : michaelm logged in to Siam	Mr. Michael isidore
151269293	2022-01-11 14:17:38	Account login	User logged in	Username : MarcoDemo logged in to Siam	Mr. Marco Fiamplari
151202942	2022-01-10 12:57:35	Account login	User logged in	Username : MarcoDemo logged in to Siam	Mr. Marco Fiamplari
150872891	2022-01-07 15:56:24	Account login	User logged in	Username : MarcoDemo logged in to Siam	Mr. Marco Fiamplari
150823895	2022-01-07 12:08:24	Account login	User logged in	Username : MarcoDemo logged in to Siam	Mr. Marco Fiamplari

To generate the report in SIAM:


1. From the menu, select **Account > Reports** to display the [Account Reports page](#).
2. Select the **Enable** checkbox for each report you want to generate.
3. Select **Run Now** to generate the report.

To find the report in SIAM:

1. From the menu, select **Activity > Reports** to display the [Reports page](#).
2. Alongside **Account Audit Report**, select  .

Finance Audit Report (PDF)

Date and time stamps user changes to billing information, such as password and address updates, or payment method approval and so on.

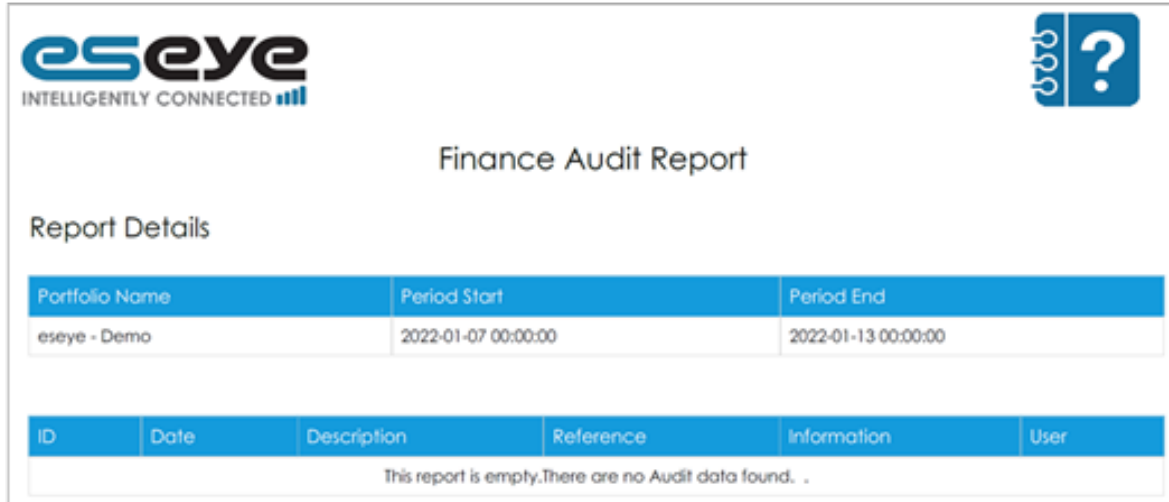

eseye
INTELLIGENTLY CONNECTED

Finance Audit Report

Report Details

Portfolio Name	Period Start	Period End
eseye - Demo	2022-01-07 00:00:00	2022-01-13 00:00:00

ID	Date	Description	Reference	Information	User
This report is empty. There are no Audit data found. .					

To generate the report in SIAM:

1. From the menu, select **Account > Reports** to display the [Account Reports page](#).
2. Select the **Enable** checkbox for each report you want to generate.
3. Select **Run Now** to generate the report.

To find the report in SIAM:

1. From the menu, select **Activity > Reports** to display the [Reports page](#).
2. Alongside **Finance Audit Report**, select .

Logistics Audit Report (PDF)

Date and time stamps user activity on an order, such as when the order is placed, shipping prepared, or dispatched.



eseye
INTELLIGENTLY CONNECTED

Logistics Audit Report

Report Details

Portfolio Name	Period Start	Period End
eseye - Demo	2022-01-07 00:00:00	2022-01-13 00:00:00

ID	Date	Description	Reference	Information	User
This report is empty. There are no Audit data found. .					

To generate the report in SIAM:

1. From the menu, select **Account > Reports** to display the [Account Reports page](#).
2. Select the **Enable** checkbox for each report you want to generate.
3. Select **Run Now** to generate the report.

To find the report in SIAM:

1. From the menu, select **Activity > Reports** to display the [Reports page](#).
2. Alongside **Logistics Audit Report**, select .

Packages Audit Report (PDF)

Date and time stamps when a signed Service Contract form is uploaded on a SIM package, and the user responsible for the change.

eseye
INTELLIGENTLY CONNECTED

Packages Audit Report

Report Details

Portfolio Name	Period Start	Period End
eseye - Demo	2022-01-07 00:00:00	2022-01-13 00:00:00

ID	Date	Description	Reference	Information	User
This report is empty. There are no Audit data found.					

To generate the report in SIAM:

1. From the menu, select **Account > Reports** to display the [Account Reports page](#).
2. Select the **Enable** checkbox for each report you want to generate.
3. Select **Run Now** to generate the report.

To find the report in SIAM:

1. From the menu, select **Activity > Reports** to display the [Reports page](#).
2. Alongside **Packages Audit Report**, select .

Profiles Audit Report (PDF)

Date and time stamps user activity on the [Reporting Profile](#), such as when a new profile is created or edited.



eseye

INTELLIGENTLY CONNECTED



Profiles Audit Report

Report Details

Portfolio Name	Period Start	Period End
eseye - Demo	2022-01-07 00:00:00	2022-01-13 00:00:00

ID	Date	Description	Reference	Information	User
151368908	2022-01-12 16:52:23	Reporting Profile Edited	184	Report Profile "" updated from SIAM	Mr. demoExample eseye
151203248	2022-01-10 12:59:51	Alert Profile Edited	355	Alert Profile "example" and Alert Profile items updated from SIAM, Data alert Level 1 set to 200.00 KB.	Mr. demo eseye

To generate the report in SIAM:

1. From the menu, select **Account > Reports** to display the [Account Reports page](#).
2. Select the **Enable** checkbox for each report you want to generate.
3. Select **Run Now** to generate the report.

To find the report in SIAM:

1. From the menu, select **Activity > Reports** to display the [Reports page](#).
2. Alongside **Profiles Audit Report**, select .

Messaging Audit Report (PDF)

Date and time stamps user activity on the SMS API or against an individual SIM card, such as password and MO POST URL changes.

eseye
INTELLIGENTLY CONNECTED

Messaging Audit Report

Report Details

Portfolio Name	Period Start	Period End
eseye - Demo	2022-01-07 00:00:00	2022-01-13 00:00:00

ID	Date	Description	Reference	Information	User
This report is empty. There are no Audit data found. .					

To generate the report in SIAM:

1. From the menu, select **Account > Reports** to display the [Account Reports page](#).
2. Select the **Enable** checkbox for each report you want to generate.
3. Select **Run Now** to generate the report.

To find the report in SIAM:

1. From the menu, select **Activity > Reports** to display the [Reports page](#).
2. Alongside **Messaging Audit Report**, select .

Networking Audit Report (PDF)

Details network changes, such as assigned IP addresses. This report gives system administrators visibility of network changes to help assess the impact of those changes on devices.




Networking Audit Report

Report Details

Portfolio Name	Period Start	Period End
eseye - Demo	2022-01-07 00:00:00	2022-01-13 00:00:00

ID	Date	Description	Reference	Information	User
150860546	2022-01-07 14:34:05	IP address assigned	89445385230	Allocated 10.213.29.40 as Enabled to +44745256567952 / 89445385230 (was 10.244.25.58)	Mr Tigrilo System
150838391	2022-01-07 13:10:31	IP address assigned	89445385230	Allocated 10.244.25.58 to +44745256567952 (source: bulk alloc by MSISDN)	Mr Marco Parmegiani

To generate the report in SIAM:

1. From the menu, select **Account > Reports** to display the [Account Reports page](#).
2. Select the **Enable** checkbox for each report you want to generate.
3. Select **Run Now** to generate the report.

To find the report in SIAM:

1. From the menu, select **Activity > Reports** to display the [Reports page](#).
2. Alongside **Networking Audit Report**, select .

SIM Audit Report (PDF)

Details alert triggers on specified SIMs, and to whom they were sent. This is helpful for tracking high usage SIM cards and limiting costs, as well as who is responsible for the SIM cards.





Audit Report

Report Details

Portfolio Name	Report Profile Name	Period Start	Period End
GPPProjects	GPP Reporting Profile	2021-12-01 00:00:00	2022-01-01 00:00:00

ID	Date	Description	Reference	Information	User
147581465	2021-12-01 03:13:09	Report notified	1888082	sden@eseye.com user notified for reporting profile GPP Reporting Profile .	Mr. Ian [redacted]
147581462	2021-12-01 03:13:09	Report notified	1888082	i@gpprojects.com user notified for reporting profile GPP Reporting Profile .	Mr. Ian [redacted]
147581459	2021-12-01 03:13:09	Report generated	1888082	Estate Report generated for reporting profile GPP Reporting Profile .	Mr. Ian [redacted]
147579095	2021-12-01 03:07:07	Report notified	1887647	sden@eseye.com user notified for reporting profile GPP Reporting Profile .	Mr. Ian [redacted]
147579092	2021-12-01 03:07:07	Report notified	1887647	sden@gpprojects.com user notified for reporting profile GPP Reporting Profile .	Mr. Ian [redacted]

To generate the report in SIAM:

- See [Creating report profiles](#).

To find the report in SIAM:

1. From the menu, select **Activity > Reports** to display the [Reports page](#).
2. Alongside **SIM Audit Report**, select .

SIM Audit Log – per SIM (PDF, CSV)

Details every action taken and change made to a selected SIM card by description, date, user and reference. For example, a new SIM audit log entry is added when a SIM is queued for provisioning or for every usage alert that is triggered on the SIM.

				
Audit Log				
Description	Date	User	Ref	Information
Anynet SIM queued for provisioning	2022-01-07	Marco from Eseye	8944538523010	Provision queued by preprovision for package 9368
SIM Usage alert triggered	2022-01-13	Mr. Ben [redacted]	8944538523010	Usage Alert (200.00KB) sent to external email [redacted]@eseye.com.
SIM Usage alert triggered	2022-01-13	Ms. Gabrielle [redacted]	8944538523010	Usage Alert (200.00KB) sent to external email [redacted]@eseye.com.
SIM Usage alert triggered	2022-01-13	Mr. Jacques [redacted]	8944538523010	Usage Alert (200.00KB) sent to external email [redacted]@eseye.com.
SIM Usage alert triggered	2022-01-13	Mr. Kevin [redacted]	8944538523010	Usage Alert (200.00KB) sent to external email [redacted]@eseye.com.

To find and generate the report in SIAM:

- From the menu, select **SIMs** > **SIM List**.
- Alongside a SIM card, select  to display the *SIM Audit Log* on page 119.
- To download the information in a particular format, select either:  or .

SIM Audit Log – Estate (PDF, CSV)

Details every action taken and change made across your SIM card estate by description, date, user and reference.

	A	B	C	D	E	F
1	Description	Date	User	Ref	Information	
2	Report generated	18/12/2021	Mr. Ben [redacted]	1913237	SIM Location Report	
3	Report notified	18/12/2021	Mr. Ben [redacted]	1913237	[redacted]@eseye.c	
4	SIM unsuspended	01/01/2022	Tigrillo f from Eseye	9.95E+15	SIM unsuspended by	
5	SIM Financial alert triggered	04/01/2022	Mr. Ben [redacted]	9.95E+15	Financial Alert (2.00	
6	Anynet SIM queued for provisioning	07/01/2022	Marco from Eseye	8.94E+18	Provision queued by	
7	SIM Usage alert triggered	13/01/2022	Mr. Ben [redacted]	8.94E+18	Usage Alert (200.00)	
8						

To find and generate the report in SIAM:

1. From the menu, select **SIMs > Audit Log**.
2. To download the information in a particular format, select either:  or .

Estate Reports

The following estate reports help you administer your current SIM card estate, giving you a breakdown of individual SIM card usage and details, as well as contract terms, network changes, and SIM card status, authentication, and location information:

- [Account snapshot report](#)
- [Estate report](#)
- [Group usage report](#)
- [No data used report](#)
- [SIM settings report](#)
- [SIM location report](#)

Account Snapshot Report (CSV)

Lists portfolio details, including active users, current packages, total data usage. This report gives you a broad understanding of the data your SIM card estate consumes, and who is accessing the estate.




Account Snapshot Report

Report Details

Portfolio Name
eseye - Demo

Active Users on the Account

Name	Last SIAM login
Jacques Magnuszewski	1st October 2021
Jeremy Wilson	10th February 2021
Michael Mehmet	16th December 2021
Marco Pierangeli	21st December 2021

Packages

ID	Description	Number of SIMs
9368	9368 - PoC, G8P, 14 digit, 20 Mb, SMS, all pricing region 1s, 3 months	0
15858	15858 - PoC, G8P, IMSI 14 digit, 50 Mb, SMS MT, all pricing region 1s, 3 months	3

Total Data Use this month

Package : 9368	Data Usage
Data 20MB	0 (0 %)
Zone 3 Data	0 (-)

Package : 15858	Data Usage
Data 50MB	0 (0 %)

To generate the report in SIAM:

- See [Creating report profiles](#).

To find the report in SIAM:

1. From the menu, select **Activity > Reports** to display the [Reports page](#).
2. Alongside **Account Snapshot Report**, select .

Estate Report (CSV)

Reports details about each SIM card in the portfolio estate, including current status, data usage in the last month, last authenticated, country, last IMEI.

This report is helpful for tracking and managing individual SIM cards. Use the CSV file to analyse your data usage and examine trends.

The screenshot displays a CSV report titled 'Estate Report 2018-09-01'. The table contains the following columns: SIM ID, SIM Name, SIM Status, Month's Data used, Month's Data used (bytes), Activated Date, Removal Date, Detected Network, Last Authenticated, Last Seen, Country, Last IMEI, and Last RST. The data rows list various SIM cards, including those from 'PAG Kanto NODUA' and 'PAG Kanto NODUA', with details on their status, data usage, and authentication dates.

To generate the report in SIAM:

- See [Creating report profiles](#).


To find the report in SIAM:

1. From the menu, select **Activity > Reports** to display the [Reports page](#).
2. Alongside **Estate Report**, select .


Group Usage Report (PDF)

Graph displaying daily data usage across all SIM cards, showing devices using the least data and devices using the most data.

This graph can help you analyse your data and troubleshoot changes in data usage.

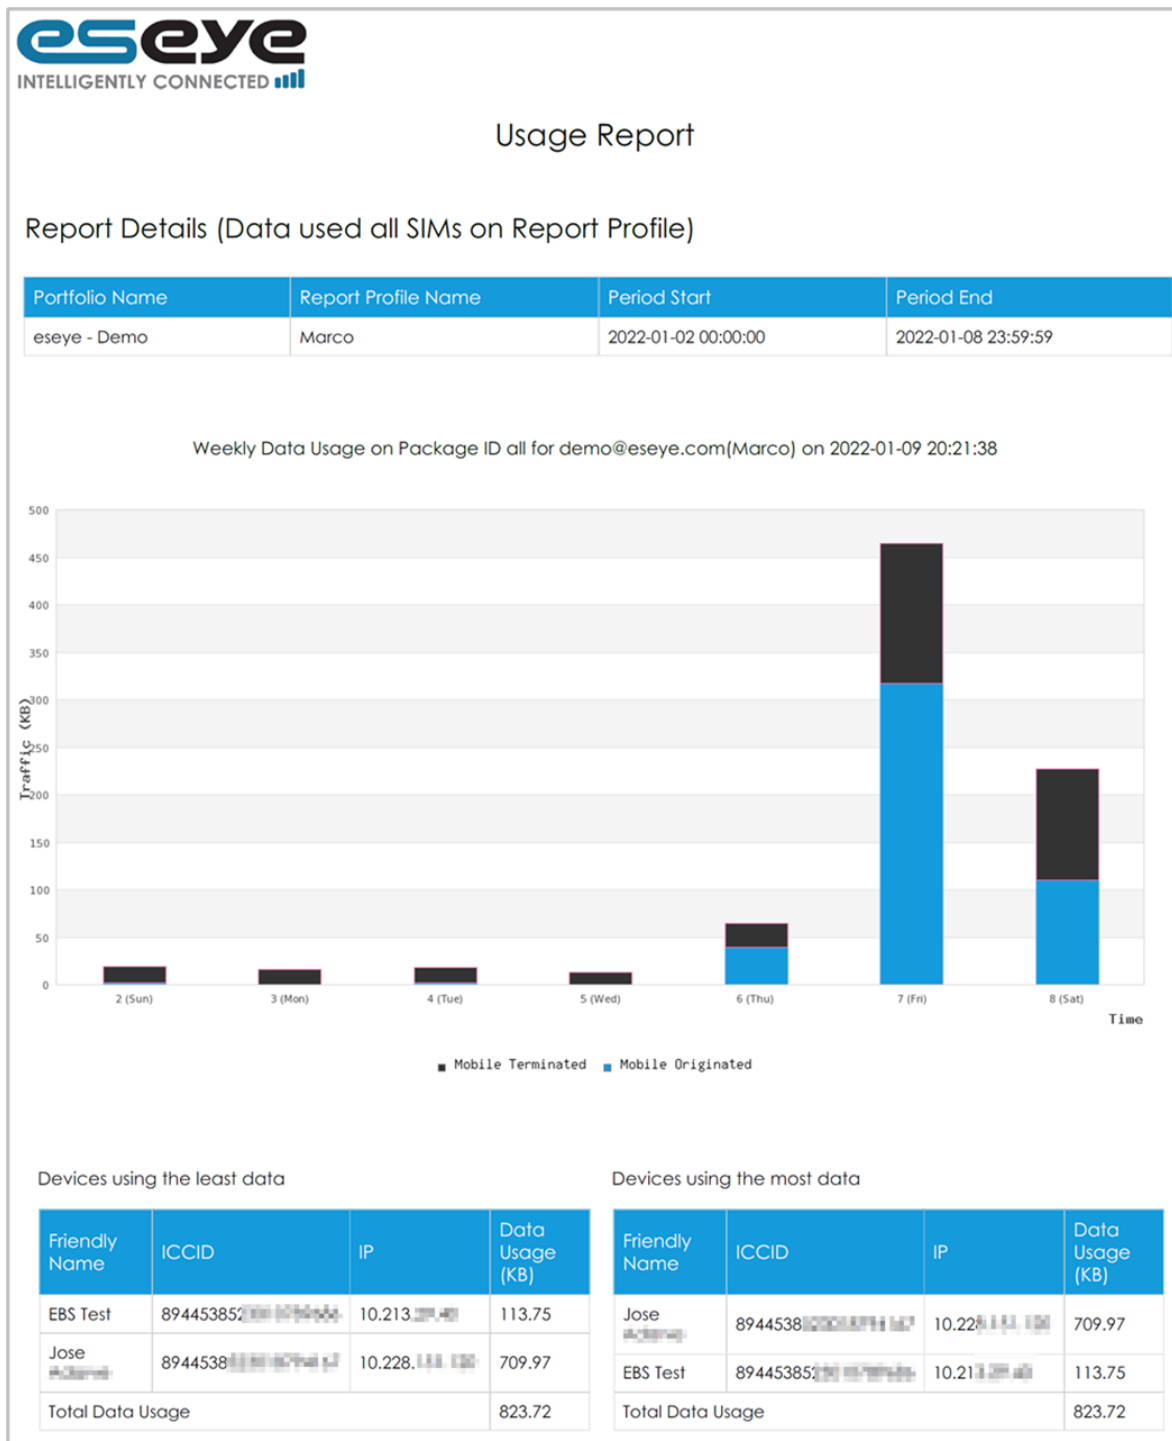

Reports are generated for all SIMs (above) or for SIMs on specific packages (below).

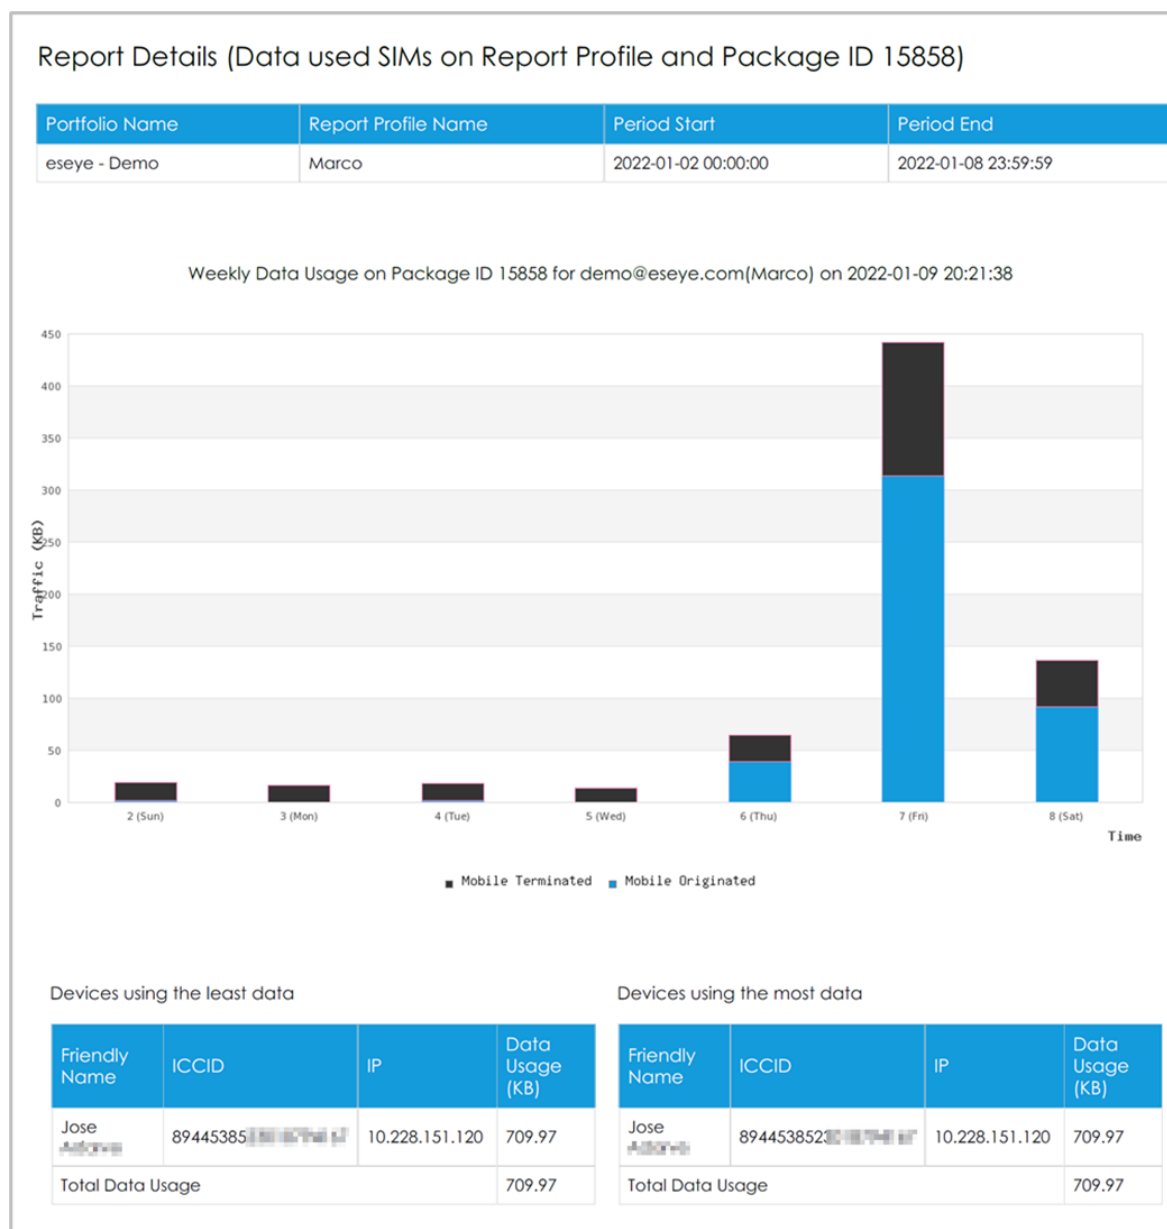

To generate the report in SIAM:

- See [Creating report profiles](#).

To find the report in SIAM:

1. From the menu, select **Activity > Reports** to display the [Reports page](#).
2. Alongside **Group Usage Report**, select .

No Data Used Report (CSV)

Details the ICCID and MSISDN of active devices that have not used any data in the past month, including SIM status and where the device was last seen. This report helps you to troubleshoot device issues, or understand device usage, which can inform your decisions about the device.

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
1	This report was generated at 2020-03-01 09:15:10													
2	ICCID	MSISDN	IP	Friendly Name	Group Name	SIM Status	Last Authenticated	Last Seen	Last Country	Last LAI / CI	Package ID	Package Name		
3	'89445385'	'4479249'	30.252.194	KAFUBU V NDIOLA		Active	31/12/2019 16:31	31/12/2019 16:32	Zambia	31021, 30126	11254	11254 - Barclays Bank Zambia		
4	'89445385'	'4479249'	30.252.194	AVIANI VK LIVINGSTONE		Active	28/12/2019 14:27	28/12/2019 14:28	Zambia	22061, 157	11254	11254 - Barclays Bank Zambia		
5	'89445385'	'4479249'	30.252.204	PICK N PA KAFUE		Active	28/12/2019 08:34	28/12/2019 10:11	Zambia	32081, 40298	11254	11254 - Barclays Bank Zambia		
6	'89445385'	'4479249'	30.252.211	CHOPPHES LUSAKA		Active	20/12/2019 12:34	20/12/2019 14:28	Zambia	22061, 10936	11254	11254 - Barclays Bank Zambia		
7	'89445385'	'4479249'	30.252.211	JET STORE KITWE		Active	17/12/2019 13:58	17/12/2019 15:20	Zambia	22061, 157	11254	11254 - Barclays Bank Zambia		
8	'89445385'	'4479249'	30.252.204	MINILANI LUSAKA		Active	16/12/2019 11:24	16/12/2019 11:24	Zambia	32081, 30541	11254	11254 - Barclays Bank Zambia		
9	'89445385'	'4479249'	30.252.211	KANSANS KITWE		Active	01/12/2019 11:07	06/12/2019 15:36	Zambia	31021, 47292	11254	11254 - Barclays Bank Zambia		
10	'89445385'	'4479249'	30.252.211	PICK N PA KITWE		Active	05/12/2019 06:50	05/12/2019 06:50	Zambia	22061, 157	11254	11254 - Barclays Bank Zambia		
11	'89445385'	'4479249'	30.252.221	MITN ZAM LUSAKA		Active	22/11/2019 20:22	22/11/2019 20:22	Zambia	32061, 32698	11254	11254 - Barclays Bank Zambia		
12	'89445385'	'4479249'	30.252.194	David Livi LIVINGSTONE		Active	21/11/2019 18:32	22/11/2019 12:41	Zambia	31010, 33526	11254	11254 - Barclays Bank Zambia		
13	'89445385'	'4479249'	30.252.211	Copperbelt KITWE		Active	12/11/2019 10:59	12/11/2019 10:59	Zambia	31021, 21046	11254	11254 - Barclays Bank Zambia		
14	'89445385'	'4479249'	30.252.204	Chimundu LUSAKA		Active	08/08/2019 10:14	08/11/2019 10:47	Zambia	32081, 20163	11254	11254 - Barclays Bank Zambia		
15	'89445385'	'4479249'	30.252.194	AUTO WID KAFUE		Active	01/10/2019 13:27	06/11/2019 11:57	Zambia	22042, 9592	11254	11254 - Barclays Bank Zambia		
16	'89445385'	'4479249'	30.252.211	HASHAUT LUSAKA		Active	04/10/2019 08:12	04/11/2019 09:22	Zambia	32051, 31877	11254	11254 - Barclays Bank Zambia		
17	'89445385'	'4479249'	30.252.211	Pick N Pay NDIOLA		Active	18/10/2019 03:09	31/10/2019 13:38	Zambia	31011, 21073	11254	11254 - Barclays Bank Zambia		
18	'89445385'	'4479249'	30.252.204	HILTON G LUSAKA		Active	29/10/2019 00:02	29/10/2019 12:57	Zambia	22061, 158	11254	11254 - Barclays Bank Zambia		
19	'89445385'	'4479249'	30.252.211	MUNGIRI L NDIOLA		Active	23/10/2019 17:27	23/10/2019 17:27	Zambia	31011, 21095	11254	11254 - Barclays Bank Zambia		
20	'89445385'	'4479249'	30.252.204	MUNGIRI L LUSAKA		Active	23/08/2019 13:27	14/10/2019 13:47	Zambia	32081, 20157	11254	11254 - Barclays Bank Zambia		
21	'89445385'	'4479249'	30.252.204	GENUINE LUSAKA		Active	09/10/2019 04:44	09/10/2019 10:26	Zambia	22041, 6061	11254	11254 - Barclays Bank Zambia		
22	'89445385'	'4479249'	30.252.221	MITN ZAM LUSAKA		Active	09/10/2019 06:53	09/10/2019 08:21	Zambia	32051, 29757	11254	11254 - Barclays Bank Zambia		
23	'89445385'	'4479249'	30.252.204	HILTON G LUSAKA		Active	28/09/2019 17:08	28/09/2019 17:10	Zambia	32081, 31724	11254	11254 - Barclays Bank Zambia		
24	'89445385'	'4479249'	30.252.211	SOUTHERN LUSAKA		Active	24/09/2019 08:46	24/09/2019 08:48	Zambia	32081, 31894	11254	11254 - Barclays Bank Zambia		
25	'89445385'	'4479249'	30.252.211	RUTLAND SOUTHEAST		Active	22/07/2019 17:14	19/09/2019 14:25	Zambia	880, 8804	11254	11254 - Barclays Bank Zambia		

To generate the report in SIAM:

- See [Creating report profiles](#).

To find the report in SIAM:

1. From the menu, select **Activity > Reports** to display the [Reports page](#).
2. Alongside **No Data Used Report**, select **CSV**.

SIM Settings Report (PDF, CSV)

Contains general information about an individual SIM card, including friendly name, users, IMEI, Alert Profile and Report Profile. This can feed into the administration and change management of the individual SIM cards.



SIM Settings - 8944538523010789686


Attribute	Value
Friendly Name	EBS Test
User Field 1	
User Field 2	
User Field 3	
User Field 4	
User Field 5	
Group	Test
IMEI	
Device Model	
Messaging Profile	
Alert Profile	example
Report Profile	Marco

To find and generate the report in SIAM:

1. From the menu, select **SIMs** > **SIM List**.
2. Alongside a SIM card, select  to display the [Settings page](#).
3. To download the information in a particular format, select either:  or .

SIM Location Report (PDF)

World graphic displaying number of devices per country for all SIM cards in your estate. This visual representation helps you to understand the geographic spread of your SIM card estate, which may help you plan for expansion into other countries, or within a specific country.

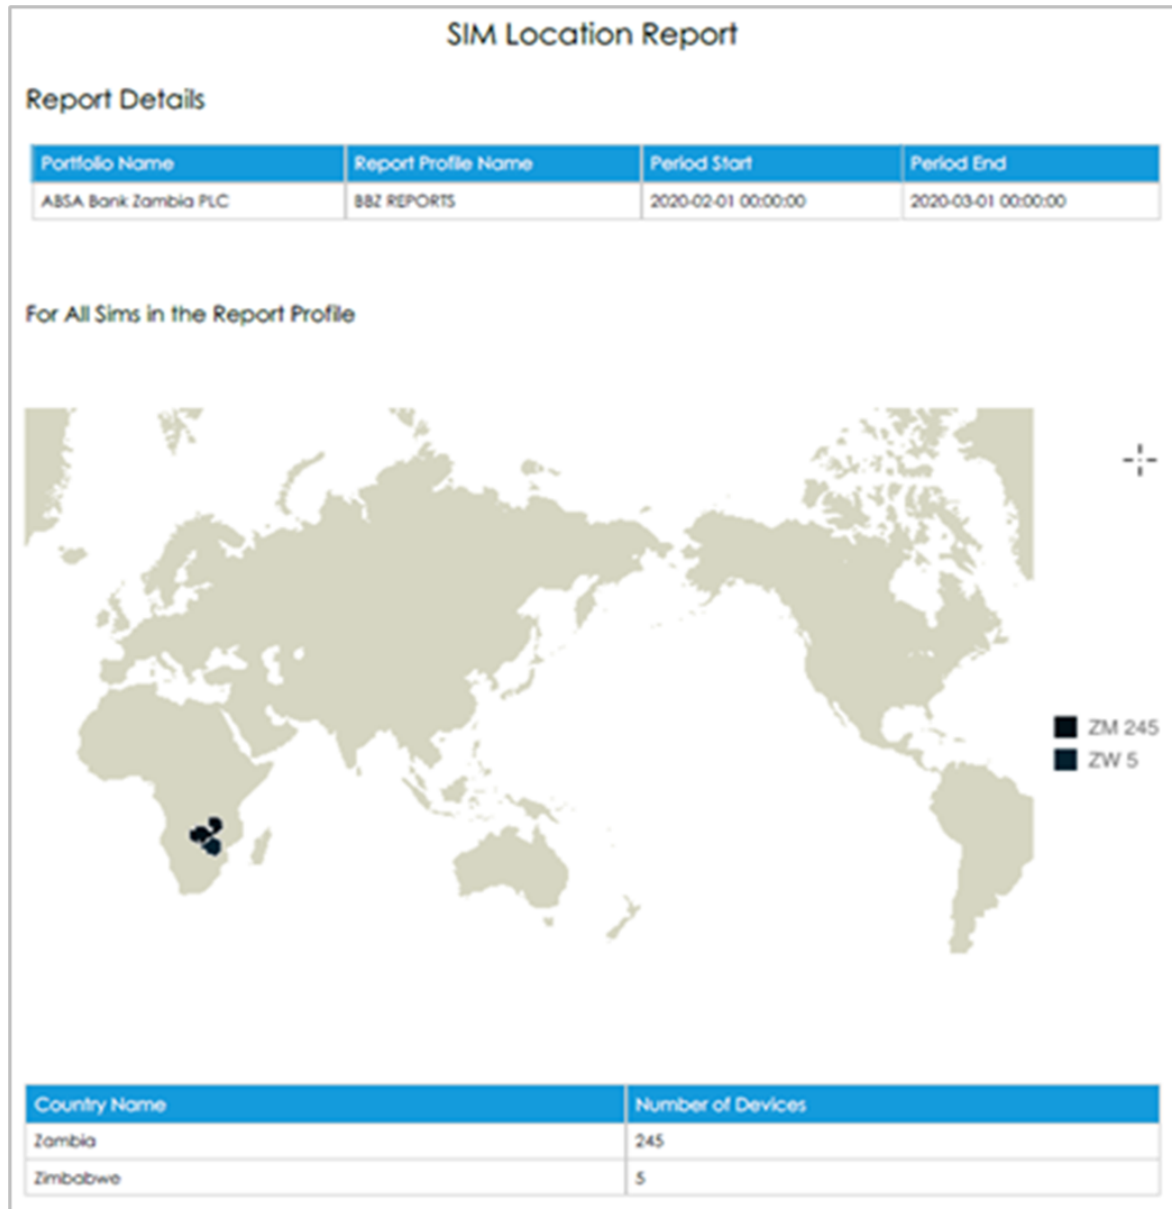

To generate the report in SIAM:

- See [Creating report profiles](#).

To find the report in SIAM:

1. From the menu, select **Activity > Reports** to display the [Reports page](#).
2. Alongside **SIM Location Report**, select .

Status and Connectivity Reports

The following status and connectivity reports hold information about a SIM card's status and connection activity so that you can understand the SIM card's current performance:

- [SIM contract settings](#)
- [Suspension and termination report](#)

SIM Contract Settings (PDF, CSV)

Lists a SIM card's status, activation and termination dates, and package, contract and costs information, for administrative purposes.

	
SIM Contract Settings - 8944538523010789686	
ICCID	8944538523010789686
Status	Provisioned
Attribute	Value
Activation Date	2022-01-07
Termination Date	
Contract Start	2022-01-07
Contract End	2022-04-07
Billing Interval	1 Months
Billing Date	2022-02-01
Package Identifier	9368
Package Description	Trial SIM GBP, all pricing region 1 14 digit 20MB Data SMS MO enabled SMS MT enabled Voice Disabled USSD enabled
Package Name	9368 - PoC, GBP, 14 digit, 20 Mb, SMS, all pricing region 1s, 3 months

To find and generate the report in SIAM:

1. From the menu, select **SIMs > SIM List**.
2. Alongside a SIM card, select  to display the *Contract settings* on page 111.
3. To download the information in a particular format, select either:  or .

Suspension and Termination Report (PDF, CSV)

Details when a SIM card status was initiated, including all activations, terminations, manual suspensions, and alerted suspensions, by ICCID and MSISDN.



eseye
INTELLIGENTLY CONNECTED

Activation and Termination Report

Report Details

Portfolio Name	Report Profile Name	Period Start	Period End
ABSA Bank Zambia Plc	BBZ REPORTS	2020-02-01 00:00:00	2020-03-01 00:00:00

Activations

ICCID	MSISDN	Friendly Name	Group Name	Package ID	Package Name	Activation Date
No activation record found						

Terminations

ICCID	MSISDN	Friendly Name	Group Name	Package ID	Package Name	Termination Date
No deactivation record found						

Manual Suspensions

To generate the report in SIAM:

- See [Creating report profiles](#).

To find the report in SIAM:

1. From the menu, select **Activity > Reports** to display the [Reports page](#).
2. Alongside **Suspension and Termination Report**, select  or .

Diagnostic Reports

The following diagnostic reports help you to detect network and SIM card issues, and to track data usage to identify connectivity problems:

- [SIM summary report](#)
- [SIM RADIUS activity report](#)
- [SIM NetFlow activity report](#)
- [SIM network settings report](#)
- [SIM messaging activity report](#)

SIM summary (PDF, CSV)

Gives details about the SIM card, including the latest connection and location details, IMEI, last data session datetime stamp and data usage, cumulative data usage for the month, and last voice and messaging events.

			
SIM Summary - ICCID [8944538523010789686] SIM ID [8944538523010789686]			
Network Events	Date Time	Value	Action
Last MCC / MNC	2022-01-13 17:17:51	234 15(GB - Vodafone)	
Last LAI / CI	2022-01-13 17:17:51	130 493c	
Device Events	Date Time	Value	Action
Last IMEI	2022-01-13 17:17:51	861445034438015	
Data Events	Value	Action	
Last User Name	user		
Last Session Start	2022-01-13 10:29:02		
Last Session Stop	2022-01-13 07:00:50		
Last Session Total	6.335 KB		
This Month Total	540 KB		
Messaging Events	Date Time	MSISDN	
Last MT SMS	2020-07-24 12:39:06		
Last MO SMS			

To find and generate the report in SIAM:

1. From the menu, select **SIMs** > **SIM List**.
2. Alongside a SIM card, select  to display the [Summary of activity page](#).
3. To download the information in a particular format, select either:  or .

SIM RADIUS Activity (PDF, CSV)

Shows SIM card data sessions, including start and stop times, data usage, IMSI and network operator.

Use this report to identify trends in your network usage and identify networking issues. For example, poor signal strength is often indicated where a device is constantly switching networks.



SIM Radius Activity - 8944538523010789686

Search for
 Startdate: 2021-12-13 00:00:00
 Stopdate: 2022-01-13 23:59:59

Session Start	Session Stop	Data Usage	IMSI	MCC MNC (Network Name)
2022-01-12 21:12:22	2022-01-12 22:10:50	6.29 KB	234588525385952	234 15 (GB - Vodafone)
2022-01-12 21:10:54	2022-01-12 21:12:22	5.815 KB	234588525385952	234 15 (GB - Vodafone)
2022-01-12 21:09:25	2022-01-12 21:10:54	5.18 KB	234588525385952	234 15 (GB - Vodafone)
2022-01-12 18:56:59	2022-01-12 19:55:25	5.672 KB	234588525385952	234 15 (GB - Vodafone)
2022-01-12 16:44:34	2022-01-12 17:43:02	5.241 KB	234588525385952	234 15 (GB - Vodafone)

To find and generate the report in SIAM:


1. From the menu, select **SIMs > SIM List**.
2. Alongside a SIM card, select  to display the [RADIUS page](#).
3. To download the information in a particular format, select either:  or .

SIM NetFlow Activity (PDF, CSV, PNG)

Graphic reporting daily data flows in kilobytes to a SIM card (MT) and from the SIM card (MO) either:

- Per day for a selected month
- Per hour for a selected day
- Per minute for a selected hour

Use this report to understand data usage and changes in SIM card behavior, which may be a result of network issues.

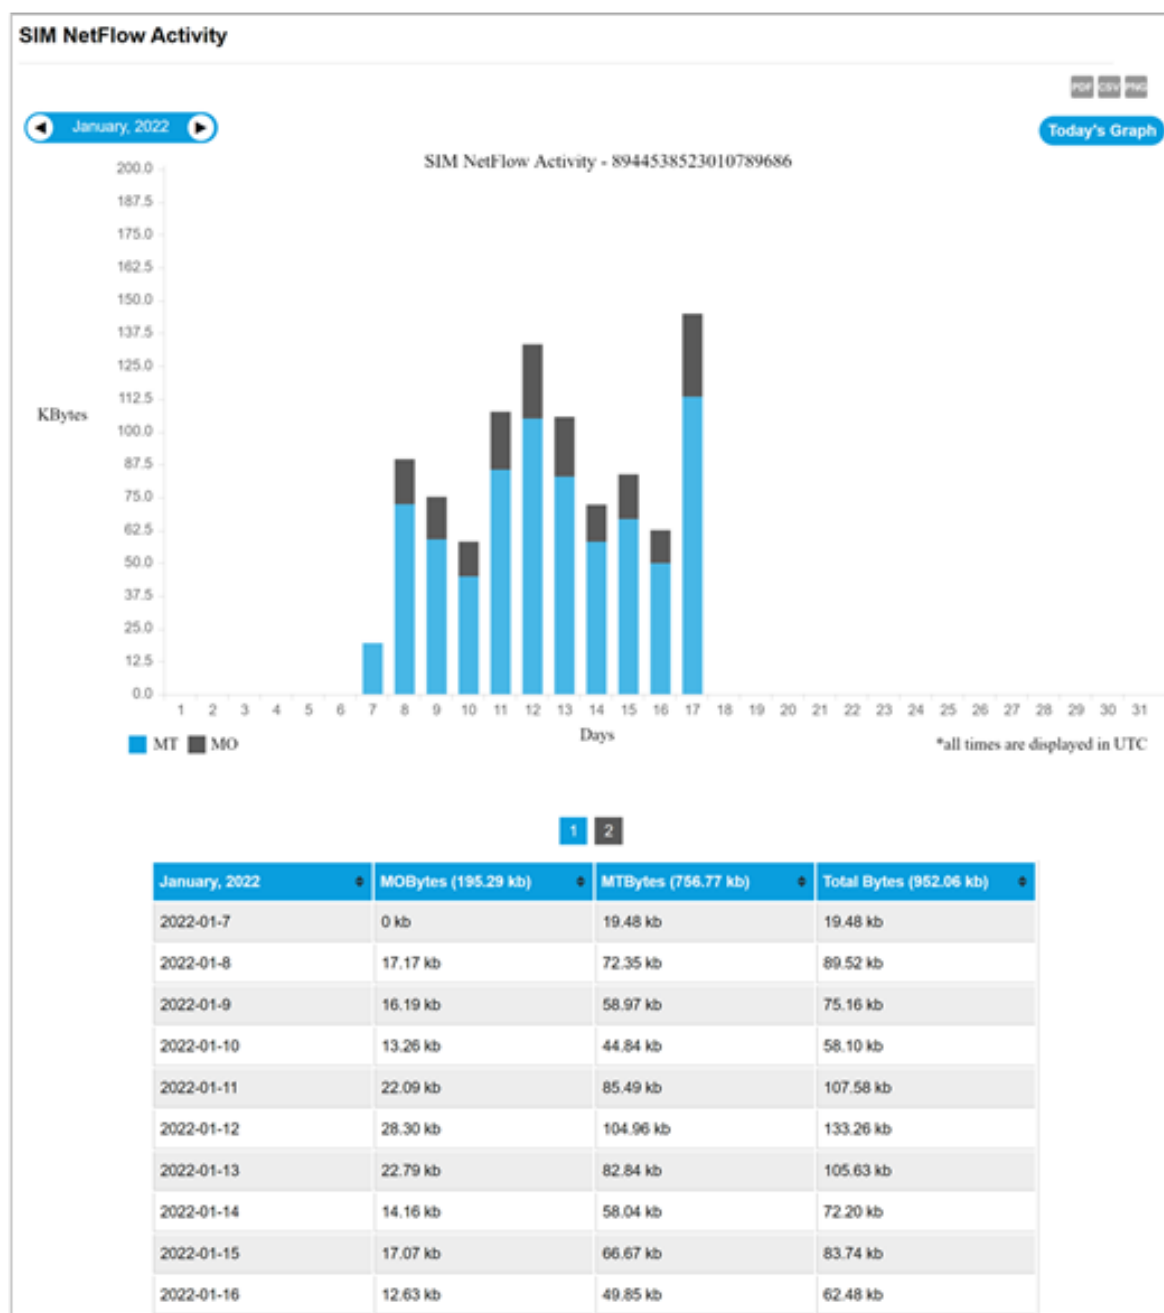

To find and generate the report in SIAM:

1. From the menu, select **SIMs** > **SIM List**.
2. Alongside a SIM card, select to display the [NetFlow page](#).
3. To download the information in a particular format, select either: , or .

SIM Network Settings (PDF, CSV)

Displays the current status and network information (IMSI, MSISDN, and if relevant, IP address) for an individual SIM. Use this report to understand your device connectivity. This report can feed into other reports to check if network changes have occurred that may affect the device.


	
SIM Network Settings - 8944538523010789686	
ICCID	8944538523010789686
Status	Provisioned
Attribute	Value
IMSI	234588525000000
MSISDN (Primary)	+447452560000000
IP Address	10.213.20.40
Attribute	Value
IMSI	204046539000000
Attribute	Value
IMSI	234103020000000

To find and generate the report in SIAM:

1. From the menu, select **SIMs** > **SIM List**.
2. Alongside a SIM card, select  to display the [Network settings page](#).
3. To download the information in a particular format, select either:  or .

SIM Messaging Activity (PDF, CSV)

Contains details about every SMS sent and received per MSISDN, as well as message status (such as Delivered) and Text details. Use this report to track SMS usage per SIM card.

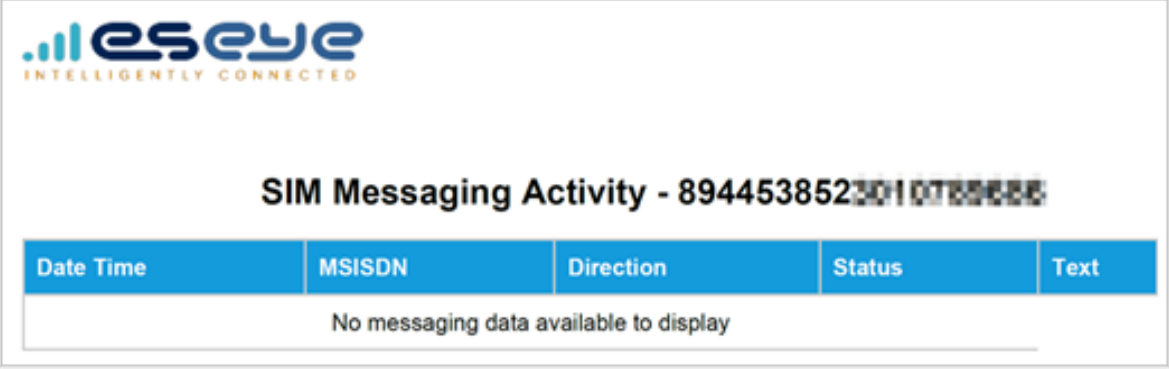

Date Time	MSISDN	Direction	Status	Text
No messaging data available to display				

To find and generate the report in SIAM:

1. From the menu, select **SIMs** > **SIM List**.
2. Alongside a SIM card, select  to display the [Messaging page](#).
3. To download the information in a particular format, select either:  or .

Managing Notifications

You can set up various system notifications to email you when any of the following events occur:

- New products and upgrades
- Purchase orders
- Reported network issues and maintenance
- Reported SIAM application portal issues
- Reported management issues
- User permission changes

Creating notifications

To set up notifications in SIAM v3:

1. Go to: <Username> > **Notifications**.
2. Select the **Enable** checkbox for each notification you want to receive.

Locating devices using a cellular connection

You may require device tracking for all your devices, including those that exist in a fixed location.

Eseye can locate devices using a cellular connection in the following ways:

- [Country location service](#)
- [Standard location service](#)
- [Premium location service](#)

Country location service

Provides the last recorded country in which the device was located, for billing purposes. Eseye records the three-digit Mobile Country Code (MCC) with each billable event so that the activity is billed correctly. For more information, see http://en.wikipedia.org/wiki/Mobile_country_code.

The system uses a variety of sources for this information, and updates when new information becomes available.

This feature is included in your monthly service charge. You can view MCC information using the CSV invoice, *SIM Summary* in the SIAM portal, or JSON API.

The *SIM summary* in the SIAM portal displays location information as follows:

SIM summary - ICCID [REDACTED] | SIM ID [REDACTED] | Last updated - [2021-01-13 14:06:19]

Standard location service

Provides an approximate location using information supplied by the mobile networks when the device authenticates on Eseye RADIUS servers.

The system uses a number of cell lookup databases, which update periodically with location information. The information varies – sometimes the network supplies a good approximation of the location, at other times only the country is available. Occasionally, no information is supplied at all.

This feature is included in your monthly service charge. This information is only available using the *SIM Summary* on the SIAM portal. If Location Area Identity (LAI) and Cell Identification (CI) information are available, you can view the device location on a map. Select to view the map:



Premium location service

Provides approximate device coordinates, both latitude and longitude, using information from the Home Location Register (HLR) and by performing a cell tower lookup from an application on the SIM. If the device is offline, then the last recorded location is used.

The Premium location service has a monthly subscription charge. This information is only available using the JSON Location API. As part of the service, users can also register to receive an HTTP POST notification if the location information changes. The Location API displays location information as follows:

```
{
  "status": {
    "status": "OK",
    "errorCode": "",
    "errorMessage": ""
  },
  "machine": {
    "iccid": "8944538523005960607",
    "location": {
      "lat": 53.593197362939,
      "lon": -3.0687352174615
    }
  }
}
```

For information about Location API, see the [Location API 1.0 Developer Guide \(PDF\)](#).

If you want to subscribe to the Location API, speak to your Account Manager.

Comparison of available location services


	Country location	Standard location	Premium location
Detail supplied:	Mobile Country Code (MCC)	Map view	Latitude/longitude coordinates
Interface:	CSV invoice, <i>SIM Summary</i> in the SIAM portal, or via JSON API	<i>SIM Summary</i> in the SIAM portal	On request/push using the <i>Location API</i>
Availability:	Last billing record	Last authentication	On demand

	Country location	Standard location	Premium location
	from host network		
Resolution:	Country	Variable, depending on available network information. Maximum resolution: up to two decimal places of the latitude and longitude	Full latitude and longitude
Cell database used:	N/A	Standard	Premium

Displaying SIM Timelines

The SIM Timelines feature provides an interactive graphical view of the previous 24 hours of connectivity, messaging and data usage for a SIM. After [displaying the timeline for a SIM](#), you can:

- [Show or hide information](#)
- [Zoom in to specific times](#)
- [Display detailed information for specific data points](#)

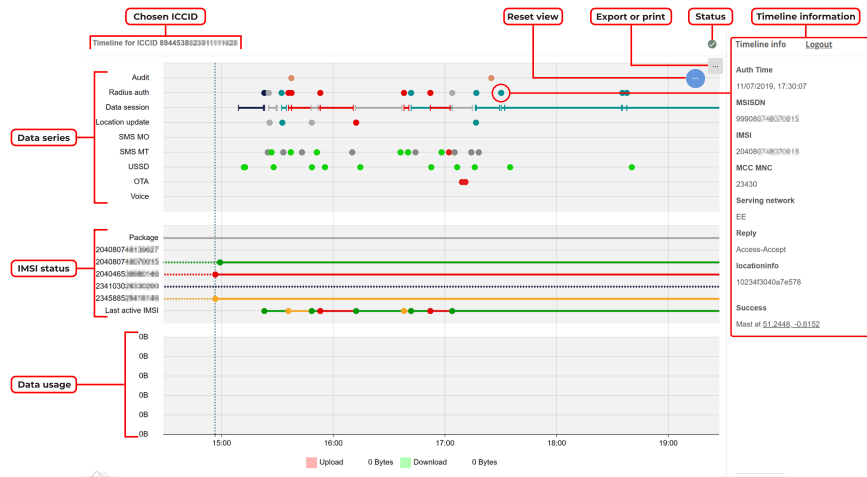

All times shown on the SIM timeline are in UTC.

The SIM timeline displays the following:

- **Chosen ICCID** – displays the ICCID of the SIM for this SIM timeline.
- **Reset view** – select to reset the SIM timeline view to the initial display.
- **Export or print** – select to export the current view of the SIM timeline to an image (PNG, JPEG, SVG or PDF formats supported) or to print the current view of the SIM timeline.
- **Status** – displays the current status of the SIM timeline:
 - – successful download of SIM data.
 - – error downloading some data. Hover on the icon to see a breakdown of the data that failed to download.
- **Timeline information** – displays data related to the selected data point on the SIM timeline. For example, in the screenshot above, the timeline information pane displays the RADIUS

authentication data for the selected data point (circled in the above screenshot).

- **Data series timelines** – see [data series timelines](#).
- **IMSI status timelines** – see [IMSI status timelines](#).
- **Data usage timelines** – displays the number of bytes uploaded (shown in red) and downloaded (shown in green).

To display a SIM timeline for a SIM:

1. [Log in to the SIAM v3 user interface](#).
2. Go to: **SIMS > SIMs List**.
3. On the table row containing the ICCID of the required SIM, under *Action* select  (SIM Control Panel).



The SIM must be in an active state to display the SIM Control Panel.

4. On the [SIM Control Panel](#), select **SIM Timeline**.

The SIAM v3 user interface opens a new tab and loads the SIM timeline for the selected SIM.

To show or hide a timeline data series:

Select the name of the data series in the margin.



This can be useful to hide the RADIUS authentication data points, which can negatively impact the performance of the SIM timeline.

To zoom in to a specific time on the timeline:

Perform one of the following:

- Hold the CTRL key then left-click and drag your cursor across the region of the timeline to enlarge.
- Use the scroll wheel on your mice to zoom in and out of the timeline.

To display more information about a data point on the SIM timeline:

Select a data point (or series) on the timeline to display additional information about the data point (or series) in the *Timeline information* pane.

Data series timelines

Displays multiple network and messaging data series for the SIM. The colour of the data points for the Audit, RADIUS auth, Data session and Location update series represent different service networks.

The following table describes the data series available on the SIM timeline.

Data series	Description
Audit	Each data point represents an audit log entry for a change to the SIM lifecycle

Data series	Description
	state.
RADIUS authentication	Each data point represents a successful RADIUS authentication performed by the SIM.
Data session	Displays the start and end points of each data session.
Location update	Each data point represents a location update. Select a data point to display time stamp and status information retrieved from the live network via the MAP protocol.
SMS MO	Each data point represents a successful mobile originated SMS sent by the SIM.
SMS MT	Each data point represents a successful mobile terminated SMS received by the SIM.
USSD	Each data point represents a successful USSD message received by the SIM.
OTA	Each data point represents a successful over-the-air (OTA) message received by the SIM.
Voice	Displays the start and end of every voice session.

IMSI status timelines

Displays the status of individual IMSIs in the SIM over time.

The following table describes the data series on the IMSI status timelines.

Data series	Description
Package	Displays the package assigned to the SIM. Select the package data series to display package information in the timeline information pane.
<IMSI>	Displays the provisioning status of the IMSI, where the colour of the data points and lines differ for each IMSI provider. Solid lines represent activated IMSIs and dotted lines represent provisioned but inactive IMSIs.
Last active IMSI	Displays the active IMSI in the SIM with each data point representing a change to a different IMSI. The colour of the data points and lines matches the colour of the individual IMSI series.  This data series is calculated from the <i>RADIUS authentication</i> and <i>Location update</i> data series which must be visible. If either of these data series are disabled, the last active IMSI data will not display correctly.

About Billing

Eseye has a complex billing system that calculates the charges for each customer's SIM estate. Each customer has a unique set of Service Contracts that defines the packages provided to them and the costs involved, which are tailored to their exact requirements. This document describes some of the more complex billing options that are available, and how these are calculated.

Eseye standard terms and conditions

You can view the latest billing terms and conditions here: [Standard Terms and Conditions](#).

Viewing an invoice

Eseye invoices are sent via email. If you have not received an invoice, ensure your *Billing Contact Details* are correct in SIAM.


For more information, see *Editing your SIAM contact details* on page 75.

To view an invoice:

1. Log in to SIAM: <https://siam3.eseye.com/user/login>
2. Select **Finance > Transactions**.

Account transactions are listed in chronological order, with the most recent transaction first.

3. Expand the number of results returned to 100 per page.

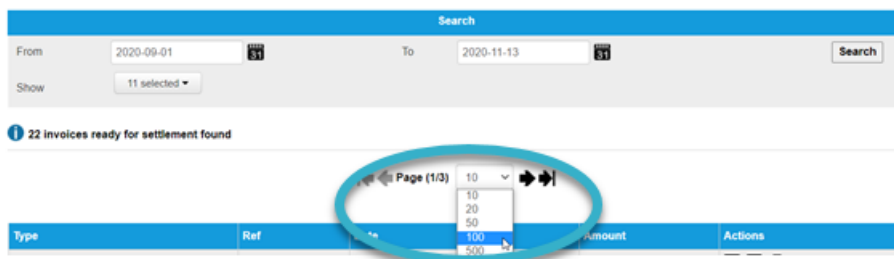

4. In the *Type* column, locate the relevant *Invoice*.
5. Alongside the *Invoice*, in the *Actions* column, select any of the following icons to view the file:

	Download the invoice for viewing in your default PDF application.
	Open the invoice in your browser window for printing without downloading it.
	Download a detailed CSV file, containing a cost breakdown.
	Download an XML invoice.
	Immediately email the invoice to yourself as an attached PDF.



See the back of this guide for detailed examples of the PDF and CSV invoices. For examples of the PDF and CSV invoices, see [PDF Invoice Example.pdf](#) or [CSV Invoice Example.pdf](#).

Making a payment

You can pay Eseye using the following methods through the SIAM portal:

- Direct Debit – for UK customers with bills under £2000
- Bank to bank transfer (BACS payment)
- Debit or credit card, with the option for repeat monthly billing
- PayPal

Setting up a Direct Debit payment

Only for UK customers with bills under £2000. Notice is given ten days in advance. Payment is usually collected a month in arrears.

To set up a direct debit:

1. Log in to SIAM: <https://siam3.eseye.com/user/login>
2. Select **Finance** > **Overview** to view the *Finance overview* page.
3. Under *Finance settings*, alongside *Payment method*, select .
The Payment Settings Change Request dialog box appears.
4. Select the **Direct Debit(Monthly)** option.
5. Select **Request change**.
The Direct Debit Setup Request form appears.
6. Select  to download the *DDI MANDATE NEW.doc* form.
7. Complete the form details, then save the form.
8. Select **Choose file** to browse and select the saved form.
9. Select **Open** to attach the form to the Direct Debit Setup Request.
10. Select **Upload Form** to send the form to Eseye.
If the upload is successful, a Direct Debit Request Sent Successfully message appears in the Payment Settings Change Request window.
If the upload is not successful, contact Support: support@eseye.com.
11. Eseye will send you an email confirming that the direct debit is set up.

Making a BACS payment

1. Log in to SIAM: <https://siam3.eseye.com/user/login>
2. View a PDF invoice to find the Eseye BACS Payment Details.

For more information, see *Viewing an invoice* on page 70.

3. Set up the payment using your bank account.
4. Notify Eseye that you have paid the bill using a BACS payment: accounts@eseye.com.



Include the following information in your email: invoice number as a payment reference, as well as the amount paid.

Paying with Paypal or a debit or credit card

Eseye accepts payments from:

- VISA Credit, VISA Debit, VISA Electron
- Debit Mastercard, Mastercard
- Paypal

After you complete an initial credit or debit card payment, Eseye offers a recurring payment service.

Before you begin

You will need:

- Purchase Order number
- Debit or Credit card, unless you are using Paypal

To pay the outstanding bill:

1. Log in to SIAM: <https://siam3.eseye.com/user/login>
2. Select **Finance** > **Overview** to view the *Finance overview* page.
3. If you want to pay an amount, then select **Make payment by Credit Card** alongside either of the following amounts:

Amount due – overdue amount. You owe this immediately.

Account balance – total amount owed, including the overdue amount.

Statement	Amount	Actions
Amount due	£ 13260	Make payment by Credit Card
Account balance	£ 56397.78	Make payment by Credit Card
		Make Ad-hoc Payment By Credit Card

The shopping cart appears, with the amount listed.

4. Alternatively, if you want to pay a specific amount, enter the required amount in the *Amount* field, then select **Make Ad-hoc Payment By Credit Card**.

Statement	Amount	Actions
Amount due	£ 13260	Make payment by Credit Card
Account balance	£ 56397.78	Make payment by Credit Card
	10000	Make Ad-hoc Payment By Credit Card

The shopping cart appears, with the specified amount listed.

5. Select **Checkout**.
6. On the *Billing Address* tab, ensure the Billing Address is correct.
7. If you need to change the billing address details, select **Edit this address**.

8. Select **Next Step** to view the *Options* tab.
9. Type a mandatory *Order Summary* to help you identify this order.
10. Type a mandatory *PO Number* to reference your Purchase Order.
11. Type *Additional Notes*.
12. Select **Next Step** to view the *Review Cart* tab.
13. Review the payment, then select **Make Payment**.

The Sage Pay - Payment Selection window appears.

14. Select Paypal or your payment card provider.
15. If required, enter your debit or credit card details.
You may be required to authenticate your card.
16. Complete the payment.
17. If the payment fails, check that your SIAM contact details are correct.

For more information, see *Editing your SIAM contact details* on page 75.

If you have any problems, contact Accounts: accounts@eseye.com

Editing your SIAM contact details

If you have not received an invoice, or you cannot process a payment, check that your contact details are correct in SIAM.

To check your contact details:

1. Log in to SIAM: <https://siam3.eseye.com/user/login>
2. Select **Finance** > **Details** to view the *Finance details* page.
3. If you need to edit the details, select **Edit**.

The Update Finance Details page appears.


4. Make your changes, then select **Save**.

If your contact details are correct and you are having problems processing a payment or receiving invoices, contact Accounts: accounts@eseye.com

Understanding the SIM lifecycle

SIMs in normal operation go through a lifecycle. As they transition between states, the charges can vary.

EnterpriseM2M+ SIM Lifecycle

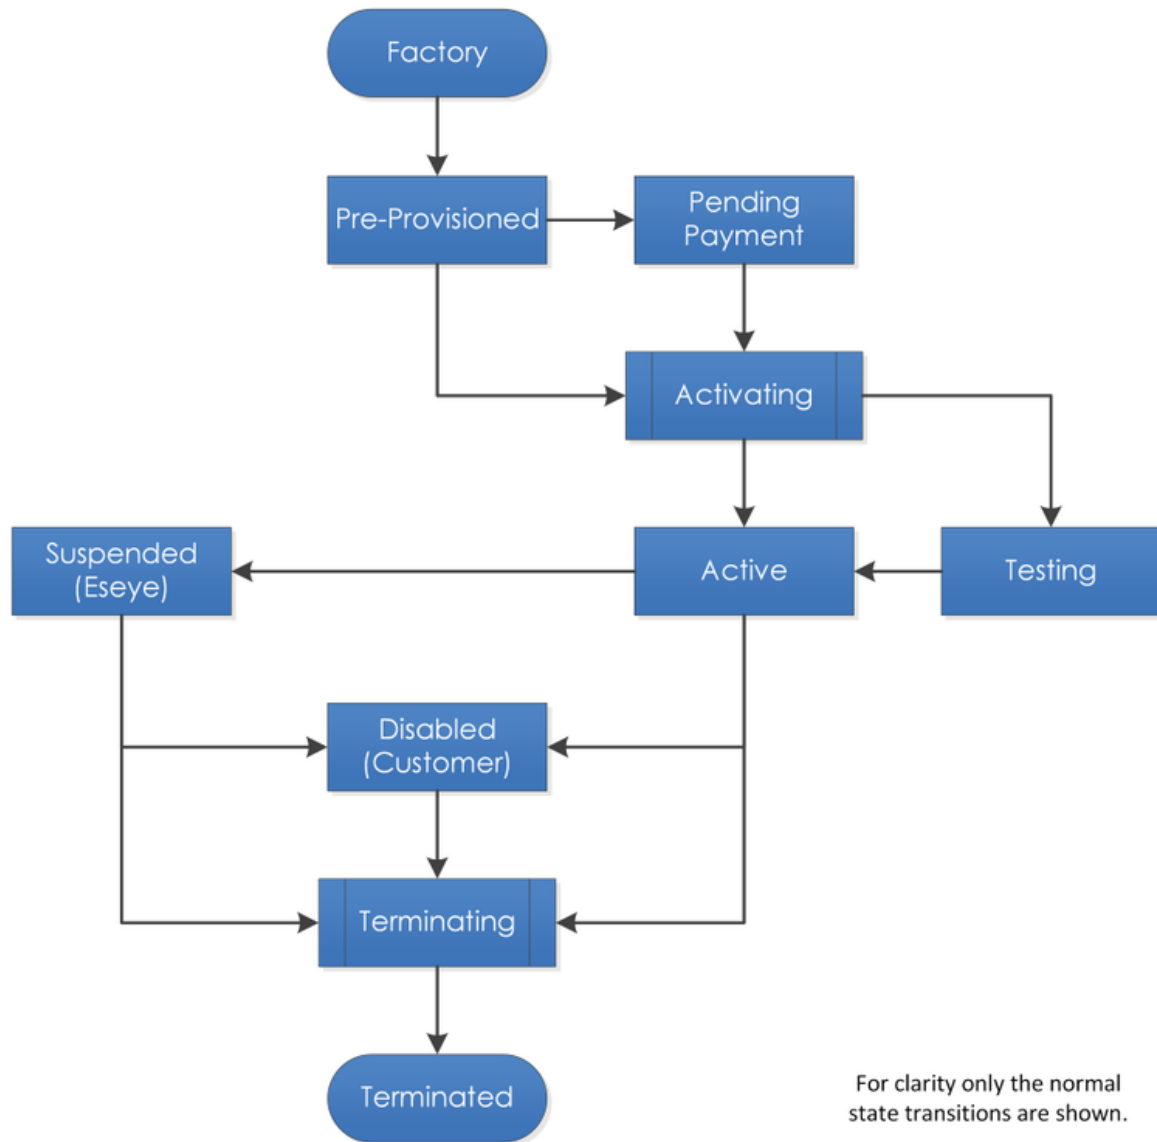

Factory: The SIM is manufactured and sent to Eseye. At this point, the SIM belongs to Eseye.

Pre-provisioned: Before a customer can activate one or more SIMs, they must sign a service contract, agreeing to the associated costs. To ensure activation can take place successfully, all Eseye SIMs are pre-provisioned for shipping and linked to an account. Some SIMs may have a package or SIM contract assigned. At this point, the SIM belongs to the customer. Any associated charges will start when the SIM is activated.

Pending payment: Depending on the service contract, a customer must purchase the SIM hardware before they can activate the SIM. When payment is acknowledged, the customer can activate the SIM.

Activating: Activation is a process that may take a while to complete while the SIM is provisioned. During this process, the security and identity information is downloaded and programmed into the SIM.

Testing: Depending on the service contract, customers may have a test phase for their SIMs. Speak to your Account Manager for more information.

Active: The SIM is fully provisioned on the network and ready for use. The SIM is charged at standard service charge rates.

Suspended (Eseye): Eseye has temporarily suspended the SIM functionality using an Eseye-configured rule. Eseye suspends SIMs for non-payment, or if the SIM is not used for a period of time. At this point, the SIM is able to connect to a network, although nobody can use it. Standard rate service charges continue.

Disabled (Customer): The customer has temporarily suspended the SIM functionality using a customer-configured rule. Customers may choose to suspend their SIM for the following reasons:

- To prevent unauthorised usage if the device is lost or stolen
- They want to move the SIM to a different device, but not immediately
- They are not using the device for a significant period of time, but want to maintain the same SIM number for that device

At this point, the SIM is able to connect to a network, although nobody can use it. Standard rate service charges continue.

Terminating: Eseye or the customer have requested termination.

Eseye may terminate a SIM for the following reasons:

- If the SIM is unused for a long period of time
- If the SIM is used outside of the terms of the service contract
- The SIM is broken
- If the customer account is in arrears

Customers may terminate their SIM for the following reasons:

- They are leaving Eseye
- The SIM or device is written off as lost or stolen
- The device is obsolete or destroyed
- Their customer no longer wants service
- Their customer stopped paying the bill

For more information, see *Eseye standard terms and conditions* on page 69.

Termination is not instant – Eseye must verify the termination to ensure no charges are owed on the SIM. If the SIM is in contract, the customer is liable for the rest of the service charges up until the end date of the contract. If charges are owed, the customer is sent a separate termination invoice. If all outstanding charges are paid, the SIM progresses to Terminated.

Terminated: If terminated, the SIM stops connecting to the network and nobody can use the SIM. Service charges stop. The physical SIM and its associated numbers remain the property of the customer for an extended period. After this, the number will revert to the pool of numbers that belongs to Eseye and the physical SIM will need replacing if the customer wants to reuse the device.

Understanding Service Contracts and packages

About Service Contracts

Service Contracts describe the agreed commercial contract between Eseye and the customer, including:

- Where the SIMs will be deployed
- Services available – SMS and data



Voice is no longer offered, as it is not required for M2M communication. Voice is included in this document for legacy reasons.

- SIM purchase price
- SIM activation charge
- Billing and rating
- Bundles
- Billing currency – Eseye does not support mixed currency billing within a portfolio account

If you need multiple currency billing, you must set up a new portfolio account and a new Service Contract per currency. After a portfolio account is set up, you cannot change its currency.

- Contract length – describes the minimum contract term

When the contract length lapses, SIMs are not automatically terminated, and service will continue on a rolling monthly contract. An active SIM will continue to accrue charges.

- Customer notes

For information about setting up one or more Service Contracts on your Eseye SIM estate, speak to your Account Manager. Eseye will set up a package for you.

About packages

A package contains the information required for Eseye to supply, provision and operate SIMs for a customer. It defines commercial data (such as the tariff and billing terms), the available SIM services (such as data, voice, SMS), and the technical provisioning data that is used to activate and operate SIMs.

About package items

Your invoice details various package items and the price of consuming those services in a particular country.

SIM usage is charged monthly in arrears for both monthly and annual service charge intervals.

Package items may include:

- [Service charges](#)
- [SMS, data, and voice billing](#)
 - [Bundled usage](#)
 - Pooling – see page 90
- [Activation charges](#)

Mobile Network Operator (MNO) billing

If MNOs send out their invoices after the Eseye billing date, then these charges are deferred to your next monthly invoice.

SIM purchase price

The cost of purchasing Eseye SIMs is either:

- Amortised into the service charge
- Charged as a component charge when you buy the Eseye SIM

If the cost is charged as a component charge, you are billed once on a separate hardware invoice, rather than on the monthly service invoice.

Understanding Activation charges

Eseye may apply a charge when a SIM is first activated.

This charge may cover the cost of the SIM, or provide an initial testing period. Speak to your Account Manager for more information.

Activation charges

Eseye may apply a charge when a SIM is first activated.

This charge may cover the cost of the SIM, or provide an initial testing period. Speak to your Account Manager for more information.

Service charges

While you are billed monthly to cover your SIM usage, the service charge per SIM can either be paid incrementally as a monthly charge, or in a lump sum annually.

Service charges cover the following:

- Active subscription on the mobile network




Suspended SIMs are active SIMs.

- Any bundled usage

Monthly billing service charges

Each active SIM on your account is billed a service charge a month in advance. A newly activated SIM incurs a partial service charge from the day the SIM is activated for the number of days the SIM is active. This is billed in arrears on the next invoice, in addition to the monthly service charge.

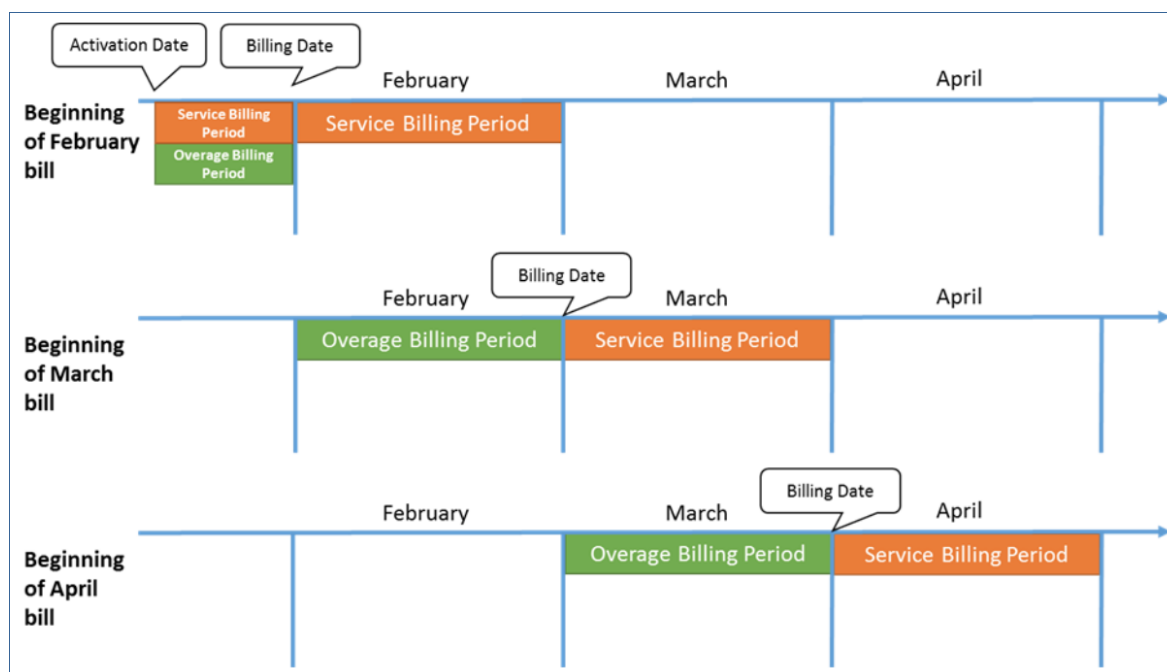

Annual billing service charges


You pay service charges as a lump sum annually when you activate a SIM on an annual Service Contract. Service renewal then occurs on the anniversary of activation for each SIM.

Customers who pay annual service charges for their SIMs will receive monthly bills, which include:

- The amount of out-of-bundle services used in the last month
- The annual service charge for each SIM that was activated during the past month
- Advance service charge renewal for each SIM approaching its activation anniversary within the next month

For example:

A SIM activated on 10/03/2021 is billed for service charges from the 10/03/2021 through to the 09/03/2022 on the 01/04/2021 invoice. The 01/05/2021 invoice includes the SIM's usage for the month of April, but no service charges as these are already billed. The following year, the annual service charge renewal for that SIM will appear on the 01/03/2022 bill, and the renewed service will start on the 10/03/2022.

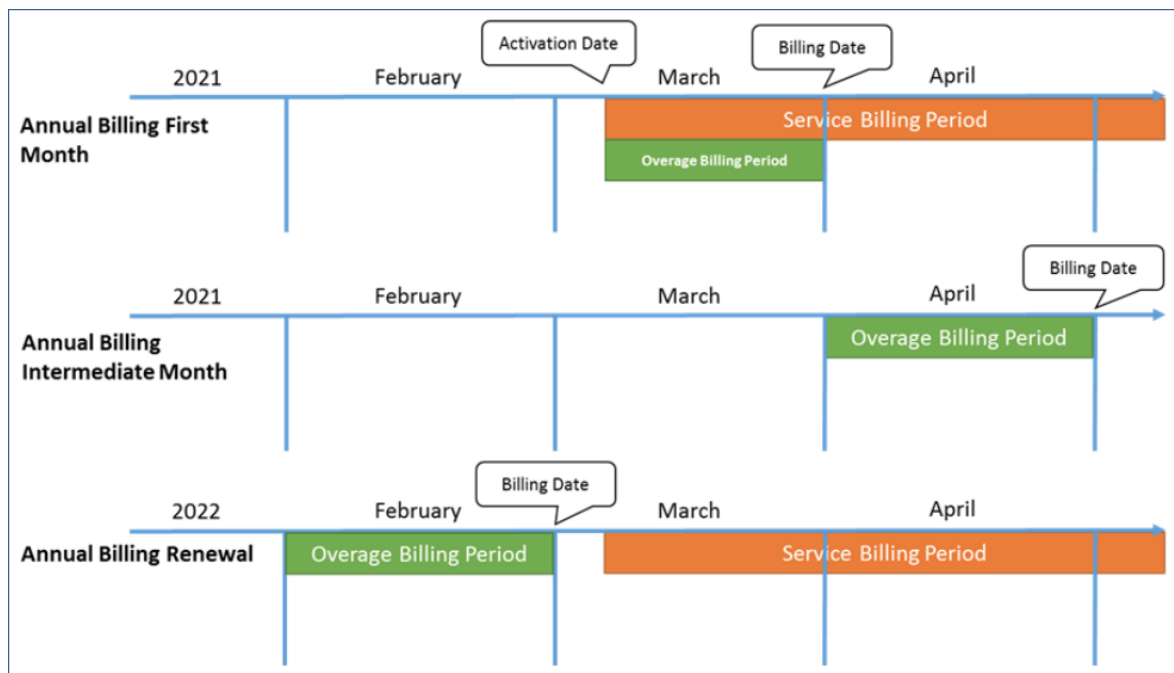

SMS, data, and voice billing

Eseye differentiates between SMS, data, and voice billing:

- SMS – the number of SMS messages sent by a SIM
- Data – the mobile data used by a SIM
- Voice – the voice calls used by a SIM



Voice is no longer offered, as it is not required for M2M communication. Voice is included in this document for legacy reasons.

Usage is calculated within a calendar month, and billed in arrears.

For simplicity, SMS, data and voice charges are billed in priority zones, designed to provide standardised pricing across multinational regions. The zones are defined in your Service Contract and tailored for your use. Zone 1 often includes your countries of highest deployment. Where device deployment is required globally, further zones are tailored to group countries and networks with similar cost tariffs.

You can include the usage type in a bundle that you allocate to your SIM cards.

Understanding data usage per SIM

Use the CSV Invoice to understand how much data each SIM uses.

To view SIM data usage in the CSV Invoice:

1. Select the row containing the *ItemRefData* (Column A).
2. Navigate to *Description* (column H) to view a description of Data.
3. Total data usage in bytes = *Quantity* + *InBundleQuantity*, where:
Quantity (column K) is the number of excess (overage) bytes used
InBundleQuantity (column S) is the number of bytes used inside the bundled amount
4. For kilobytes, divide the total by 1024.
5. For megabytes, divide the total by 1048576.

Understanding SMS charges on the CSV invoice

Eseye may apply SMS charges for:

- Cellular network usage
- SMS API usage (subscription only)


The amount charged depends on your SIM contract and (if relevant) SMS API contract.

SMS message charges on the SIM contract

Depending on your SIM contract, charges may apply for AnyNet SIM cellular network usage, which includes SMS messages and delivery receipts.

The SIM contract may have an agreed number of in-bundle SMS messages. You are not charged extra for these unless you use more than the agreed amount. For information about bundles, see *Understanding bundled usage* on page 89.

On the CSV invoice, the SMS charges for the SIM contract are shown against the relevant SIM number. The transmission types and charges are described in the image and table below:

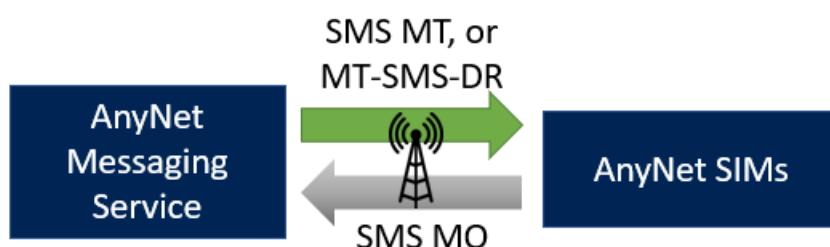

Transmission type	Description	Charge?
SMS MT, or MT-SMS-DR	SMS mobile terminated, incoming message to the AnyNet SIM, or the delivery receipt.	Usually no charge
SMS MO	SMS mobile originated. Outgoing message from the AnyNet SIM. Charge depends on the agreed SIM contract terms.	✔

SMS message charges on the SMS API contract

If you subscribe to the SMS API service, the usage charges are agreed in the SMS API contract.




Your SMS API contract terms may differ from those on your SIM contract.

SMS API charges include:

- Incoming internet use of the AnyNet Messaging Service from the customer server.
- Sending or receiving SMS messages between the AnyNet Messaging Service and third party SIMs.

On the CSV invoice, the SMS API contract charges are totalled per package according to transmission type. The transmission types and charges are described in the image and table below:

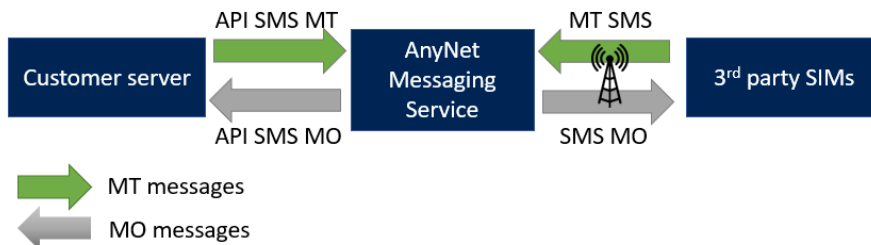

Transmission type	Description	Charge?
API SMS MT	Incoming messages (mobile terminated) from the customer server to the AnyNet Messaging Service. Charge depends on the agreed SMS API contract terms.	✓
API SMS MO	Outgoing messages (mobile originated) from the AnyNet Messaging Service to the customer server.	Usually no charge
MT SMS	SMS mobile terminated. Incoming message from a third party SIM to the AnyNet Messaging Service. Charge depends on the agreed SMS API contract terms.	✓
SMS MO	SMS mobile originated. Outgoing message from the AnyNet Messaging Service to a third party SIM, or the delivery receipt. Charge depends on the agreed SMS API contract terms.	✓

Understanding bundled usage

You can prepay monthly for SIM usage bundles, which will give you a better price for data or SMS usage than pay-as-you-go. Bundles are included in a SIM's monthly service charge. For example, a SIM may have a 250MB data bundle, where it can use up to 250MB of data a month before incurring further charges.



Any usage amount in excess of the bundle is known as the overage.



Voice is no longer offered, as it is not required for M2M communication. Voice is included in this document for legacy reasons.

On the CSV invoice, the following columns show the SIM usage:

- *Quantity* – bundle overage
- *Amount* – the overage cost
- *BundleQuantity* – total bundle allowance
- *InBundleQuantity* – usage amount within the bundle allowance

Late billed usage from a network operator will cause a bundle adjustment for the previous month. This is billed in arrears.

Understanding pooling



You must request pooling for your service contract.

If you have allocated bundles with your SIMs, you can request to accumulate them into a pool, where a set amount of service usage is shared across multiple SIMs. For example, five SIMs that are each on a 10 SMS bundle can be pooled to share the 50 SMS total between them. This means that if one SIM uses 5 SMSs, and another uses 15 SMSs, no overage is charged between them as they have pooled resources. If the five SIMs use more than the 50 SMSs allocated in the pool, you are charged for the overage (usage in excess of the pooled allowance). The overage is charged according to the *OutOfBundle* tariff listed on your contract.



A pooled usage line is only listed at the bottom of an invoice when there is an overage.

Pooling only applies when it is set up for specific services on your service contract. For example, it might apply to data but not SMS messages.

On your CSV invoice, the pool type is identified using the *ItemRef*, *PackageID* and *PackageItemID*.

If a SIM is pooled, its usage is recorded against the individual SIM, but any associated costs are calculated against the pooled allowance.

If a pooled usage line appears on the CSV invoice, the following columns show the pooled usage:

- *Quantity* – pooled allowance overage
- *Amount* – the overage cost
- *BundleQuantity* – total pooled allowance
- *InBundleQuantity* – usage amount within the pooled allowance

Late billed usage will not cause a recalculation of pooled data.

SIM termination fees

You can terminate a SIM at any time. If you terminate a SIM that has a monthly or annual service charge, the following charges apply:

- If a SIM is still in contract, you are liable for the service charge to the end of that contract. You will receive a separate termination invoice with the remaining service charges in one lump sum, unless you have made a prior alternative arrangement with Accounts.
- If a SIM is no longer in contract, you may terminate it without incurring further service charges. The deactivated SIM may appear on the next bill to allow for any usage within the last month, prior to termination. SMS, data and voice overages are billed in arrears.

Service charges are non-refundable. You will not receive a refund for unused service if you terminate a SIM part way through the billing period.



Termination is not instant – Eseye must first verify the termination.




Terminating a SIM is not the same as suspending a SIM. A suspended SIM will continue connecting to the network, and service charges will continue. However, you cannot use the SIM card in its suspended state. A terminated SIM cannot connect to the network.



For information about Eseye's standard terms and conditions, see [Standard Terms and Conditions](#).

The following example is for a SIM termination on a monthly service charge contract:

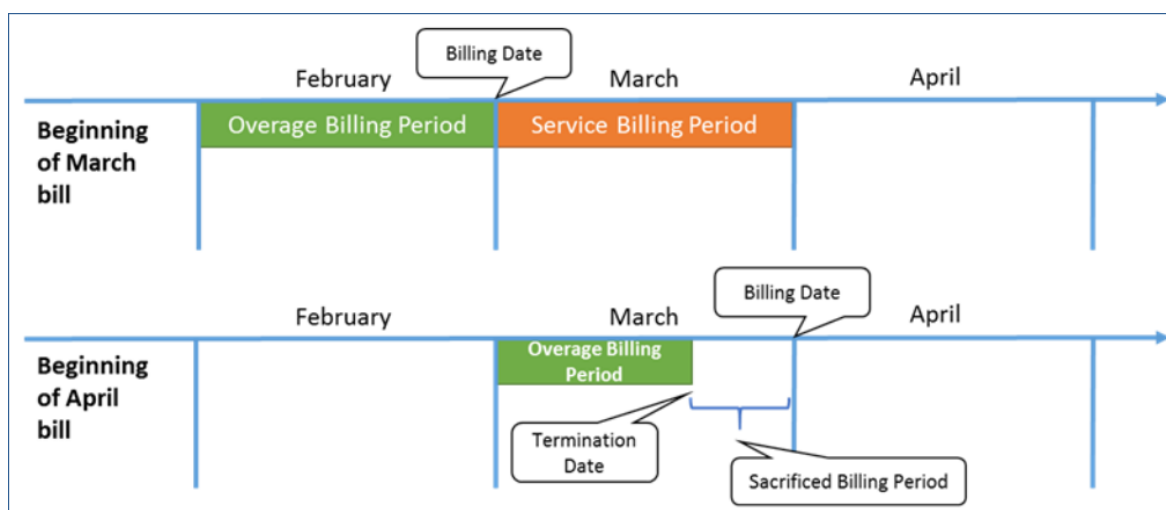

INVOICE

The invoice summary. We recommend you print the first page for your records.



Invoice Date	Invoice Number	Customer PO Reference	Customer VAT Number
<Invoice date>, for example 01/11/2020 The invoice includes all charges up until (but not including) this date.	<Unique reference number>	<Related customer Purchase Order number>	<VAT ID>

Eseye Ltd
 20 Nugent Road
 Surrey Research Park
 Guildford
 GU2 7AF, UK

Invoice To:	Ship To:
Business/Customer name Customer address	Provided if different from the invoice name and address.

Mobile Connectivity Service	
Connections Under Management	The total number of SIM cards billed on this invoice, including: - All active SIM cards. - All suspended SIM cards (for which the service charge continues). - SIM cards terminated in the last month (allows for any usage within the month before termination, as Data, SMS, and Voice charges are billed in arrears).

Invoice Items	Invoice Amount	Invoice VAT
Service Charges	Total for all SIM cards in currency agreed on contract.	VAT per item.
Data Charges	Total data charges for all SIM cards; only listed if one or more SIMs have data charges.	
Messaging Charges	Total messaging charges for all SIM cards; only listed if one or more SIMs have SMS Charges.	
Calls Charges	Total calls charges for all SIM cards; only listed if one or more SIMs have Voice charges.	
SUBTOTAL	Nett invoice total (before VAT).	
VAT TOTAL	Total VAT owed.	
TOTAL	Gross invoice total (including VAT).	

Electronic payment is preferred Account Name: Eseye Ltd USD Account Number: 71xxxxxx USD Sort Code: 40-xx-xx USD IBAN: GBxxxxxxxxxxxxxxxxx53 Bank Identifier Code (BIC8): xxxxxxxx Swift / Bank Identifier Code (BIC11): xxxxxxxxxxxx	Bank Details: HSBC Bank 5 Great Underbank Stockport, Cheshire SK1 1LH, UK	CompanyNumber: 06397669 VAT Number: GB921298326	Contact Details: Phone: +44 1483 802507 E-mail: accounts@eseye.com Web Site: www.eseye.com	How to pay You can also pay using SIAM.
---	--	---	--	--

Eseye PDF Invoice Example

Example SIM card billing

For accounts with less than 1000 SIM cards, the SIM cards are individually listed in the PDF. You can see further details for each SIM card in the accompanying CSV file, for example: Activation date.

SIM Number:	89445xxxxxxxxxxxxxxThe SIM card ICCID.	
Phone Number:	+44762xxxxxxxxxxThe SIM card MSISDN.	
Package:	55555: CompanyX Widget 2MB pooled data The Eseye SIM Contract number defining SIM card pricing and configuration.	
Friendly Name:	London Widget Customer defined in SIAM, to aid SIM card recognition (we recommend using the site location or data connection purpose). For more information, see the SIAM User Guide.	
Group Name:	Group1 Customer-defined in SIAM, for grouping similar SIM cards.	
Service Charges Covers both the active subscription on the HLR MNO and any bundled usage, billed in advance.		
Service Charge	Period 01/11/2020 through 31/11/2020 Service charge for this invoice. Billed in advance.	\$ 0.30
Service Charge	Period 22/10/2020 through 30/10/2020 Partial pro rata charge covering the period from activation. Billed in arrears.	\$ 0.15
Data Charges Data used by the SIM card in the billing period. Billed in arrears.		
Zone 1 Data - 5.54MB in excess of 2MB bundle Charges for one or more zones (geographic regions) uniquely defined on your SIM contract.	Period 21/10/2020 through 31/10/2020 Dates during which charges were accrued. Billed in arrears.	\$ 1.00
Connection Total		\$ 1.45
SIM Number:	89445xxxxxxxxxxxxxx	
Phone Number:	+44762xxxxxxxxxx	
Package:	44444: CompanyX 3MB/Month AnyNet (SMS+Voice)	
Friendly Name:	UK_Airfreight	
Group Name:	Group2	
Service Charges		
Service Charge	Period 01/11/2020 through 30/11/2020	\$ 1.15
Data Charges		
Zone 1 Pooled Data - 0.29MB in excess of 3MB bundle	Period 01/10/2020 through 24/10/2020	\$ 0.00
Zone 3 Data – 1.86MB within 2GB bundle	Period 25/10/2020 through 31/10/2020	\$ 0.00
SMS Charges SMS (small messaging service) used by the SIM card in the billing period. Billed in arrears.		
Zone 1 SMS MO - 3 SMS messages within 5 bundle	Period 01/10/2020 through 01/10/2020	\$ 1.71
OffNetVoice Charges Voice calls used by the SIM card in the billing period. Billed in arrears.		
Zone 1 Voice - 5 Mins dialled calls	Period 20/10/2020 through 24/10/2020	\$ 1.71
Connection Total		\$ 2.86

Eseye PDF Invoice Example

Usage in excess where there is pooled bundle allowance

The following section appears after the SIM card list, if pooled usage is applied to the current invoice. Data, SMS, or Voice charges are listed if usage is in excess of the pooled allowance. You can see further details for each listing in the accompanying CSV file, for example: which package the charge was made against.

Data Charges (Pooled data charge example)		
Zone 1 Data - 1.14GB in excess of 40MB bundle	Period 01/10/2020 through 31/10/2020	\$ 11.68
Connection Total		\$ 11.68
Data Charges		
Zone 1 Data - 37.6MB in excess of 3.59GB bundle	Period 01/10/2020 through 31/10/2020	\$ 7.53
Connection Total		\$ 7.53

	Invoice Date: 01/11/2020							
	ItemRef	ICCID	MSISDN	DataMSISDN	PackageID	Package	PackageItemID	Description
Description:	Package items charged per SIM.	SIM card ICCID.	SIM card MSISDN.	Circuit switched data number. Only assigned if package needs it.	Eseye SIM contract number. For defining SIM card pricing and configuration.	Eseye SIM contract description.	Package item number defined on the SIM contract. Based on item usage type and tailored country zone.	Package item description.
Data format:	String	Integer	Integer	Integer	Integer	String	Integer	String
	Service	'*****1321'	'*****116'	"	'17677'	'17677 - CompanyX 250MB Pooled data'	'0'	Service Charge
	Service	'*****1321'	'*****116'	"	'17677'	'17677 - CompanyX 250MB Pooled data'	'0'	Service Charge (Example partial charge)
	Data	'*****1321'	'*****116'	"	'17677'	'17677 - CompanyX 250MB Pooled data'	'68827'	Zone 1 Data - 71.3MB within 250MB bundle
	Service	'*****1351'	'*****119'	"	'17677'	'17677 - CompanyX 250MB Pooled data'	'0'	Service Charge
	Service	'*****1953'	'*****179'	"	'17677'	'17677 - CompanyX 250MB Pooled data'	'0'	Service Charge
	Data	'*****1953'	'*****179'	"	'17677'	'17677 - CompanyX 250MB Pooled data'	'68827'	Zone 1 Data - 1.13GB in excess of 250MB bundle
	SMS DR	'*****1953'	'*****179'	"	'17677'	'17677 - CompanyX 250MB Pooled data'	'70249'	SMS - 2 SMS messages
	Service	'*****1257'	'*****110'	"	'18103'	'18103 - CompanyX 200min Pooled voice'	'0'	Service Charge
	OffNetVoice	'*****1257'	'*****110'	"	'18103'	'18103 - CompanyX 200min Pooled voice'	'70963'	Zone 1 Voice 100min within 200min bundle
	Service	'*****1255'	'*****109'	"	'18187'	'18187 - CompanyX 250MB Pooled data'	'0'	Service Charge
	Data	'*****1255'	'*****109'	"	'18187'	'18187 - CompanyX 250MB Pooled data'	'70822'	Zone 1 Data - 125MB in excess of 250MB bundle
	SMS	'*****1255'	'*****109'	"	'18187'	'18187 - CompanyX 250MB Pooled data'	'70826'	Zone 1 SMSMO - 3 SMS messages
	APISMSMT	'*****4524'	'*****524'	"	'10033'	'10033 - CompanyX - SMS API'	'33067'	Zone 1 API SMS MT - 136 APISMSMT messages
	SMS	'*****4524'	'*****524'	"	'10033'	'10033 - CompanyX - SMS API'	'34348'	Zone 1 SMS - 130 SMS messages
For monthly billing, each SIM card is charged for Service in advance. If the SIM card was activated within the last month, a partial pro rata Service charge covering the initial activation period is also included, and billed in arrears.								
For annual billing, each SIM card is charged for Service in advance.								
Data, SMS, and Voice are billed in arrears.								
In the example above, each SIM card is grouped with grey or white shading to help you understand that a SIM card might have multiple package items charged against it. Shading is not applied in the CSV invoice.								

Start	Stop	Quantity	Currency	Rate	Amount	FriendlyName	GroupName	Activated	BundleQuantity	InBundleQuantity	MCC
First recorded use.	Last recorded use.	Amount item used in excess of allocated bundle during the billing period. Data=bytes; SMS=no. of messages; Voice=seconds	Billing currency.	Currently, both Rate and Amount display the total billed amount for each item.		Customer-defined in SIAM, for SIM card recognition.	Customer-defined in SIAM, for grouping similar SIM cards.	Date and time stamp when the SIM card was activated.	Total amount included in allocated bundle. Data=bytes; SMS=no. of messages; Voice=seconds	Amount used within the allocated bundle during the billing period. Data=bytes; SMS=no. of messages; Voice=seconds	Last recorded Mobile Country Code.
DD/MM/YYYY	DD/MM/YYYY	Integer	String	Decimal	Decimal	String	String	YYYY-MM-DD hh:mm:ss	Integer	Integer	Integer
01/11/2020	30/11/2020		USD	5.5	5.5	G11Warehouse1	'prod'	'2020-10-20 00:00:00'			530
20/10/2020	30/10/2020		USD	0.63	0.63	G11Warehouse1	'prod'	'2020-10-20 00:00:00'			530
09/10/2020	28/10/2020	0	USD	0	0	G11Warehouse1	'prod'	'2020-06-25 00:00:00'	262144000	74754048	530
01/11/2020	30/11/2020		USD	5.5	5.5	G11Warehouse2	'prod'	'2020-06-28 00:00:00'			530
01/11/2020	30/11/2020		USD	5.5	5.5	F17	'prod'	'2020-08-20 00:00:00'			311
01/10/2020	31/10/2020	1214911488	USD	0	0	F17	'prod'	'2020-08-20 00:00:00'	262144000	262144000	311
08/10/2020	08/10/2020	2	USD	0	0	F17	'prod'	'2020-08-20 00:00:00'	0	0	311
01/11/2020	30/11/2020	0	USD	0	0	G12	'prod'	'2020-09-09 00:00:00'			530
09/10/2020	29/10/2020	0	USD	0	0	G12	'prod'	'2020-09-09 00:00:00'	12000	6000	530
01/11/2020	30/11/2020		USD	15	15	H33	'prod'	'2020-09-09 00:00:00'			730
01/10/2020	31/10/2020	130882560	USD	0	0	H33	'prod'	'2020-09-09 00:00:00'	262144000	262144000	730
28/10/2020	29/10/2020	3	USD	0.15	0.15	H33	'prod'	'2020-09-09 00:00:00'	0	0	730
05/10/2020	01/11/2020	136	USD	2.72	2.72	"	'API'	'2020-09-09 00:00:00'	0	0	530
07/10/2020	01/11/2020	130	USD	6.5	6.5	"	'API'	'2020-09-09 00:00:00'	0	0	530

SIAM Web Interface

The following sections describes the menus on the SIAM web interface.

SIMs menu

The SIMs menu provides the following pages which enable you to search for and edit SIM information:

- *SIM List page* below
- *Activate page* on page 100
- *Bulk Activate page* on page 101
- *SIMs menu* above
- *SIM Audit Log page* on page 103

SIM List page

The SIMs List page provides search filters to identify SIMs that meet a certain criteria, a table of results to list the filtered SIMs and action buttons to perform actions on one or more SIMs in the list.

By default, the SIM List page displays the SIMs provisioned on your account.

Select the export to PDF (), export to CSV () or print () buttons to export or print the information displayed on the page.

Search filters

The search filters provide different ways to filter the list of SIMs and only show results which match the criteria defined in **all** of the applied search filters.

The following table describes the fields available on the search filters pane.

Field	Description
Search For	Specify a search string, the fields to which it is compared and the criteria that defines whether the SIM matches. To use the Search For filters

Field	Description
	- Select one or more of the following fields from the drop-down list: • ICCID • MSISDN • SIMID • IP • Friendly Name • IMEI - Select one of the following criteria, which determine how the search string (below) is compared to the selected fields (above): • Starting With – show results where any of the selected fields (above) start with the search string (below). • Ending With – show results where any of the selected fields (above) end with the search string (below). • Containing – show results where any of the selected fields (above) contain the search string. • Matching – show results where any of the selected fields (above) exactly match the search string. - Specify the search string used to compare to the selected fields. Leave the search string blank to search across all SIMs assigned to your account.
Group	Select the name of the group to restrict the results to only include SIMs that are part of the selected SIM group/collection.
SIM State	Select to only show SIMs that are currently in one of the following SIM states : • All – show SIMs in any SIM state. • Terminated • Available • Active • Suspended • PendingTermination
SIM Package	Select a package to only show SIMs that belong to the selected package. Select All to show SIMs that belong to any package.
SIM Data Usage	Select to filter SIMs based on the amount of data they have used. • All SIMs


Field	Description
	• Only SIMs with no data usage • Only SIMs with data usage
Search	Select to display the results table for the selected search filters.

Results table

Search results are displayed in pages with a configurable number of records shown on each page (10, 20, 50, 100 and 500). Use the previous , next , first page  and last page  buttons to navigate the list of results.

The following table describes the columns displayed after performing a search.

Field	Description
Friendly Name	An optional, user-defined name that can be used to help identify the SIM. For example, the site location or purpose of the data connection.
ICCID	Integrated Circuit Card Identifier. Unique identifier (up to 20 characters in length) for SIM cards or profiles (when using an eUICC SIM).
MSISDN	Mobile Station International Subscriber Directory Number. Unique identifier for a mobile phone number that includes an international country code and a national destination code identifying the subscriber's operator.
IP	The IPv4 address of the device containing the SIM.
Data Usage	The total monthly data usage by the SIM for the current billing period.
Group	The name of the group (SIM collection) to which you assigned the SIM.
Status	The current state of the SIM: • Terminated • Available • Active • Suspended
Alert	Displays the level of the data alert (if threshold is reached) defined in the alert profile associated with the SIM. If there is a data alert level shown, the table cell is highlighted and you can select the cell to display the SIM Alerts Summary.

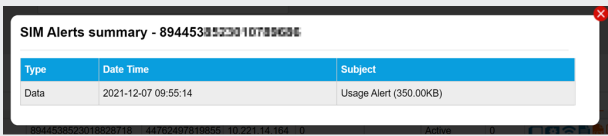Field	Description
	
Action	 – Summary of activity  – Settings  – Network settings  – Contract settings  – Billing  – Messaging  – RADIUS  – NetFlow  – Control Panel  – SIM Audit Log
Perform Bulk Action	Only the Change Settings bulk action is available on this page. Select Change Settings to display the SIM Settings dialog, where you change the SIM state and other settings for the selected rows.

Activate page

The Activate page provides a table where you specify the SIMs to [activate](#). If you have a number of pre-provisioned SIMs, this page displays a link which loads the ICCID numbers of all pre-provisioned SIMs into the table.

- Enter the SIM card numbers you wish to activate.
- Please note that pressing the '**Activate All SIMs**' button will activate all SIMs on the page. If you want to activate a limited number of the SIMs on the page, please tick the checkbox next to each one that you want to activate, and press the '**Activate SelectedSIMs**' button.
- You will then be taken to step 2 where you can choose the package and other information for the SIMs.

You have 2 **AnyNET** sims available to activate. [Click here](#) to load those sims.

(Please note that this will remove any SIMs you have listed below.)

[Load pre-provisioned SIMs into table](#)

ICCID/SIM ID	Friendly Name	IMEI
☒	mySIM	11111111
☐	mySIM2	11111112
☐		
☐		

[Activate selected SIMs in the table](#)

[Activate Selected SIMs](#) [Activate All SIMs](#)

[Insert Line](#) [Perform Action](#)

To activate SIMs in bulk, see *Bulk Activate page* below.

The following table describes the fields on the Activate page.

Field	Description
ICCID/SIM ID	Integrated Circuit Card Identifier. Unique identifier (up to 20 characters in length) for SIM cards or profiles (when using an eUICC SIM).
Friendly Name	An optional, user-defined name that can be used to help identify the SIM. For example, the site location or purpose of the data connection.
IMEI	The International Mobile Equipment Identity number that identifies the device in which the SIM currently exists.
Activate Selected SIMs	Select check boxes next to the SIMs you want to activate and select Activate Selected SIMs .
Activate All SIMs	Select Activate All SIMs to activate all of the SIMs in the table.
Perform Action	Use the Insert Line , Delete Line , Duplicate Line actions and Perform Action button to add/remove/duplicate rows in the table of SIMs to activate.

Bulk Activate page

You can activate consecutive SIMs one box at a time (up to 200 SIMs), or using the Bulk Activation tool (up to 5000 non-consecutive SIMs).

Bulk SIM boxfull activation

- Enter a start and end ICCID to activate a range of SIMs if e.g. you have a box of 200 SIMs to activate
- You can activate up to 1 complete box of SIMs at a time (200 SIMs).
- When you have input the first and last SIM numbers to be activated, press the '**Activate**' button to move on to **step 2**.

Enter a first and last SIM number to activate a range of SIMs:

First

Last

[Activate](#)

The following table describes the fields on the Bulk Activate page.

Field	Description
Bulk SIM boxfull activation	Activates consecutive SIMs one box at a time (up to 200 SIMs). The final digit in the SIM number is a check digit.
First	The lowest numerical SIM number from the box to activate.
Last	The highest numerical SIM number from the box to activate.
Activate	Select to activate the SIMs.
Bulk Activation	Activates up to 5000 non-consecutive SIMs.
Select Compatible Package	The agreed tariff to apply to all the SIMs. Only the tariffs assigned to the account are available for selection.
Group	The group name that will appear on invoices. Groups can help identify SIMs.
ICCIDs	A list of SIM numbers you want to activate, one per line. You can paste up to 5000 non-consecutive SIM numbers.
Activate SIM	Select to activate the SIMs. The activation process can take up to 60 minutes. When activated, the SIMs become live on the network.
Clear	Removes all ICCID values from the list.

Bulk Termination page

You can [terminate](#) up to 5000 non-consecutive SIMs at a time using the *Bulk Termination* tool.



If you terminate SIMs that are currently in contract, you are liable for the rest of the service charges up until the end date of the contract.

Bulk Termination

-  You can paste a list of **ICCID's** into the text area below.
-  You can terminate up to **5000** SIMs at a time.

Bulk Termination (Paste data below)

ICCID

Terminate

Clear

The following table describes the fields on the Bulk Termination page.

Field	Description
ICCIDs	A list of SIM numbers you want to terminate, one per line. You can paste up to 5000 non-consecutive SIM numbers.
Terminate	Select to terminate the SIMs. SIMs that are not in contract are queued for termination. Termination is not instant – Eseye must verify the termination. SIMs that are currently in contract will incur further service charges.
Clear	Removes all ICCID values from the list.

SIM Audit Log page

The SIM Audit Log enables you to search records of every action taken and every change made to all SIMs associated with the user account.

Select the export to PDF (), export to CSV () or print () buttons to export or print the information displayed on the page.

Search

The search enables you to filter the list of SIM audit log records between a **From** and **To** date.

Select the calendar icon () to display a calendar from which you can select the required date.

Results

Search results are displayed in pages with a configurable number of records shown on each page (10, 20, 50, 100 and 500). Use the previous , next , first page and last page buttons to navigate the list of results.

The following table describes the columns displayed for the SIM Audit Log records.

Field	Description
Description	Description of the activity or change.
Date	The date of the change in the following format YYYY-MM-DD.
User	The name of the user that made the change.
Ref	The ICCID of the SIM on which the user made the change.
Information	Detailed description about the change made.

SIM Actions

The following SIM actions are displayed for each SIM on the [SIM List](#) page.



Where the icons are as follows:

-  – [Summary of activity](#)
-  – [Settings](#)
-  – [Network settings](#)
-  – [Contract settings](#)
-  – [Billing](#)
-  – [Messaging](#)
-  – [RADIUS](#)
-  – [NetFlow](#)
-  – [Control Panel](#)
-  – [SIM Audit Log](#)

Summary of activity

To display the summary of activity for a SIM, on the *SIM List page* on page 97 menu, select  next to the chosen SIM.

SIM summary - ICCID [89411010000000000000] | SIM ID [89411010000000000000] | Last updated - [2021-12-03 09:41:09]

PDF CSV Print

Network Events	Date Time	Value	Action
Last MCC / MNC	2021-12-03 08:46:55	234, 30 (GB - EE UK)	
Last LAI / CI	2021-12-03 08:46:55	2009, 19661	

Device Events	Date Time	Value	Action
Last IMEI	2021-12-03 08:46:55	861440004438015	

Data Events	Value	Action
Last User Name	overwrite	
Last Session Start	2021-12-03 08:46:55	
Last Session Stop	2021-12-02 17:52:18	
Last Session Total	3.362 KB	
This Month Total	91 KB	

Messaging Events	Date Time	MSISDN
Last MT SMS	2020-07-24 12:39:06	
Last MO SMS		

Voice Events	Date Time	MSISDN
Total voice this month (seconds)	0	
Last MT Voice Call		
Last MO Voice Call		

Select the export to PDF () , export to CSV () or print () buttons to export or print the information displayed on the page.

The following table describes the fields displayed in the summary of activity report.


Field	Description
Report title	Title of the report including the ICCID number and date and time of report generation.
Network events	
Last MCC / MNC	The date and time of the last connection. The <i>Value</i> column displays the mobile country code (MCC) and mobile network code (MNC), with the network name shown in brackets.
Last LAI / CI	The date and time of the last connection. The <i>Value</i> column displays the last location area identifier (LAI) and

Field		Description
		cellular identifier (CI). The <i>Action</i> column displays a map icon () if LAI and CI data is present. Select the map icon to display the last recorded location information in map form.
Device events		
	Last IMEI	The 'Date Time' of the last IMEI connection. The 'Value' column will display the last IMEI(International Mobile Equipment Identity) that the SIM connected to.
Data Events		
	Last User Name	The user name of the last person to use the device.
	Last Session Start	The start time of the last session.
	Last Session Stop	The end time of the last session.
	Last Session Total	The quantity of data used (in bytes, kilobytes, megabytes or gigabytes) in the last session.
	This Month Total	The total amount of data used this month (in bytes, kilobytes, megabytes or gigabytes).
Messaging Events		
	Last MT SMS	The 'Date Time' of the last received SMS. The 'MSISDN' column displays the MSISDN of the device that sent the SMS.
	Last MO SMS	The 'Date Time' of the last sent SMS. The 'MSISDN' column displays the MSISDN of the device that received the SMS.
Voice Events		
	Total voice this month (seconds)	The total number of seconds of voice calls used this month.
	Last MT Voice Call	The data and time of the last mobile terminated voice call.
	Last MO Voice	The data and time of the last mobile originated voice call.

Field	Description
Call	

Settings

To display or edit the settings for a SIM, on the *SIM List* page on page 97 menu, select  next to the chosen SIM.

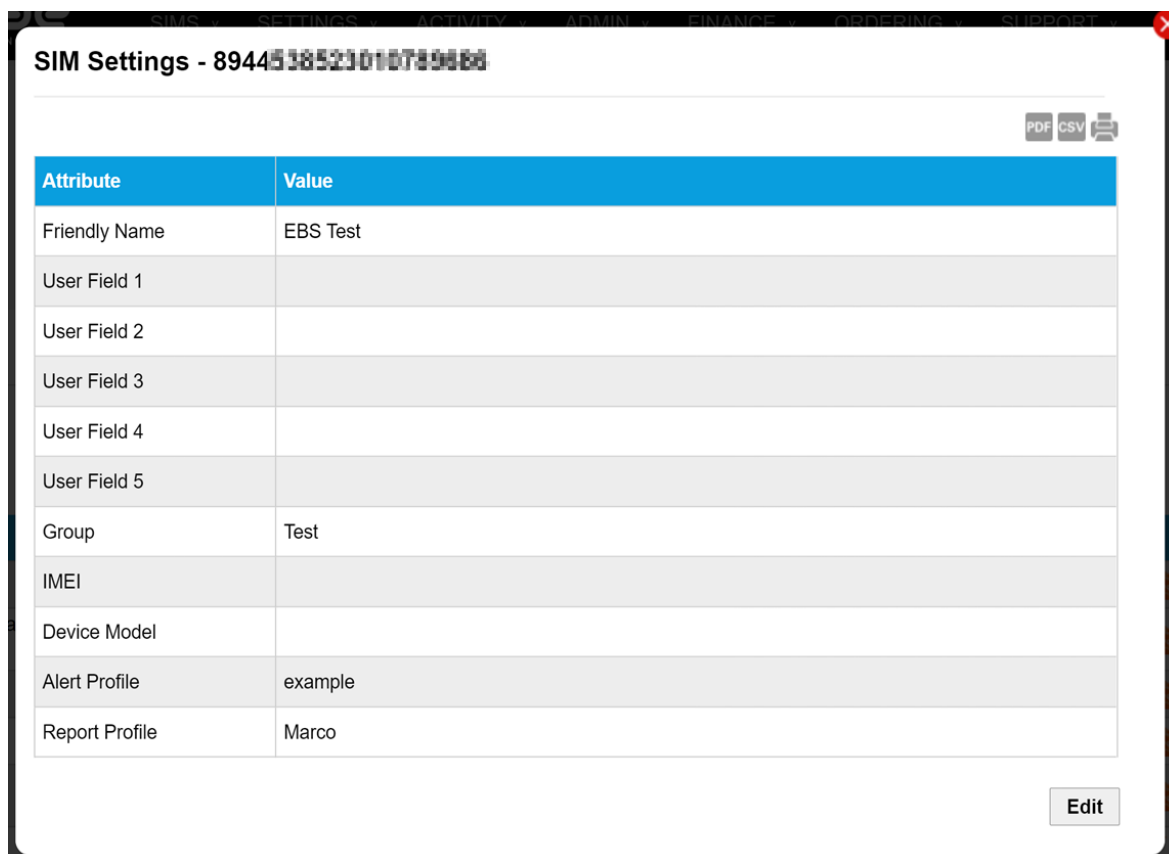

SIM Settings - 8944538523010789688

PDF CSV Print

Attribute	Value
Friendly Name	EBS Test
User Field 1	
User Field 2	
User Field 3	
User Field 4	
User Field 5	
Group	Test
IMEI	
Device Model	
Alert Profile	example
Report Profile	Marco

Edit

Select the export to PDF () , export to CSV () or print () buttons to export or print the information displayed on the page.

The following table describes the fields displayed in the SIM settings report.

Field	Description
Friendly Name	An optional, user-defined name that can be used to help identify the SIM. For example, the site location or purpose of the data connection.
User Field 1 ... 5	Optional text boxes used to identify the SIM.
Group	The name of the group (SIM collection) to which you assigned the SIM. When editing this field, use the text box to define a new group box or use the drop-down list to select an existing group.

Field	Description
IMEI	The International Mobile Equipment Identity number that identifies the device in which the SIM currently exists.
Device Model	The device model(s) created on your account.
Alert Profile	Lists the alert profiles assigned to the SIM.
Report Profile	Lists the report profiles assigned to the SIM.
Edit	Select to edit the fields for this SIM.

Network settings

To display the settings for a SIM, on the *SIM List page* on page 97 menu, select  next to the chosen SIM.

SIM Network Settings - 894453852301




ICCID	8944538523018828718	Action
Status	Active	<button>Change State</button>

Attribute	Value
IMSI	2345885586
MSISDN (Primary)	+447624978
IP Address	10.221.14.164

Attribute	Value
IMSI	2040807480
MSISDN	+999080748
IP Address	10.112.173.245
IP Address	10.240.173.245

Select the export to PDF (), export to CSV () or print () buttons to export or print the information displayed on the page.

The following table describes the fields displayed in the Network settings report.

Field		Description
ICCID		Integrated Circuit Card Identifier. Unique identifier (up to 20 characters in length) for SIM cards or profiles (when using an eUICC SIM).
	Status	The current state of the SIM: • Terminated • Available • Active • Suspended  If the SIM status is available, the Change State button is not displayed.
	Change State	Select to display the SIM Change State dialog where you can change the state of the SIM from Active to Terminated or Suspended.  This dialog does not allow you to change the state once a SIM is terminated or suspended.
Attribute		
	IMSI	The unique International Mobile Subscriber Identity number that identifies a cellular network subscriber. Network operators use the IMSI to authenticate a SIM on the network. If the SIM has multiple IMSIs, each is displayed as a new row (attribute) in this table.
	MSISDN	Mobile Station International Subscriber Directory Number. Unique identifier for a mobile phone number that includes an international country code and a national destination code identifying the subscriber's operator. For SIMs with multiple IMSIs, one MSISDN is designated as the primary MSISDN.  For IoT devices that support receiving instructions via SMS, you must use the primary MSISDN when sending MT SMS messages from your mobile phone or when using the SMS API.
	IP Address	One or more IPv4 addresses associated with the IMSI. When using regionalised routing, this table displays multiple IP addresses for the same IMSI, where each IP address corresponds to either the:

Field	Description
	- Home data centre – the data centre at which the operator's network terminates. - Local data centre – a region-specific data centre based on proximity to devices on the operator's network.  Internet traffic is normally egressed onto the internet from the data centre connected to the operator. This means that the source IP address may change if the device is routed from a different data centre. When Eseye use OTA messages to switch IMSIs or profiles, the IP address will change because the Eseye data centres that assign the IP addresses use different IP address ranges for each operator.

Contract settings

To display the settings for a SIM, on the *SIM List page* on page 97 menu, select  next to the chosen SIM.

SIM Contract Settings - 8944538123010789638

PDF CSV

ICCID	8944538123010789638	Action
Status	Active	Change State

Attribute	Value
Activation Date	2020-06-11
Termination Date	
Contract Start	2020-06-11
Contract End	2020-09-11
Billing Interval	1 Months
Billing Date	2021-12-01
Package Identifier	9368
Package Description	Trial SIM GBP, all pricing region 1 14 digit 20MB Data SMS MO enabled SMS MT enabled Voice Disabled USSD enabled
Package Name	9368 - PoC, GBP, 14 digit, 20 Mb, SMS, all pricing region 1s, 3 months


Select the export to PDF () , export to CSV () or print () buttons to export or print the information displayed on the page.

The following table describes the fields displayed in the *SIM Contract Settings* report.

Field		Description
ICCID		Integrated Circuit Card Identifier. Unique identifier (up to 20 characters in length) for SIM cards or profiles (when using an eUICC SIM).
	Status	The current state of the SIM: • Terminated • Available • Active • Suspended
	Change State	Select to display the SIM Change State dialog where you can change the state of the SIM from Active to Terminated or Suspended.  This dialog does not allow you to change the state once a SIM is terminated or suspended.
Attribute		
	Activation Date	The date of the most recent activation.
	Termination Date	The date the SIM contract is due to be terminated (if applicable).
	Contract Start	The date on which the SIM contract started.
	Contract End	The date the SIM contract ends.
	Billing Interval	The frequency of invoices.
	Billing Date	The date of the next billing invoice.
	Package Identifier	Unique identifier for the package.
	Package Description	Brief summary of the package contents.
	Package Name	The user-defined name assigned to the package.

Billing

To display the settings for a SIM, on the *SIM List page* on page 97 menu, select  next to the chosen SIM. This displays a breakdown of the activity of the SIM. This is the only place to view the SMS activity of a SIM including the data, SMS, and voice usage and subsequent charges.

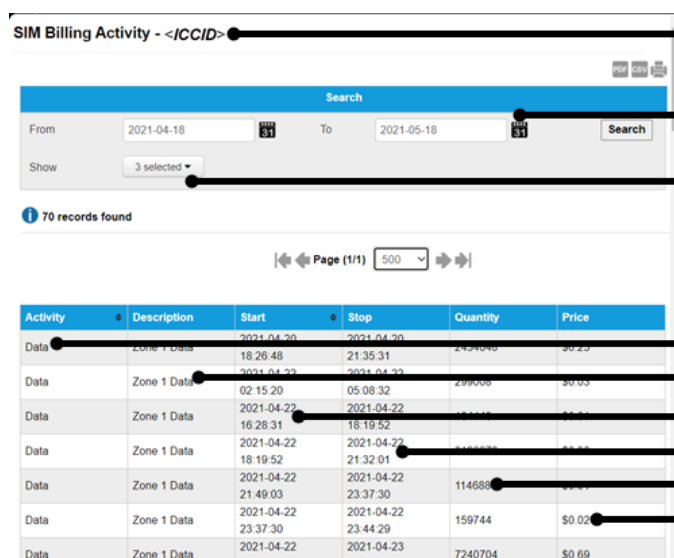

Activity displayed for the specified SIM

Filter results using the date range

Filter results by usage type - Data, SMS, or Voice

Select **Search** to filter results.

Usage type

Assigned tariff

Usage start date and time

Usage stop date and time

Usage amount

Usage charge

Select the export to PDF () , export to CSV () or print () buttons to export or print the information displayed on the page.

Search

The search enables you to filter the billing records.

Field	Description
From	Filter the list of billing records between the From and To dates.
To	Select the calendar icon () to display a calendar from which you can select the required date.
Show	Select which activities are shown. By default, all activities (Data, SMS and Voice) are shown.
Search	Select to filter the billing records using the values in the From, To and Show fields.

Results


Search results are displayed in pages with a configurable number of records shown on each page (10, 20, 50, 100 and 500). Use the previous , next , first page  and last page  buttons to navigate the list of results.

The following table describes the fields displayed in the Billing report.

Field	Description
Activity	The usage type: Data, SMS or Voice.
Description	Textual description of the assigned tariff.
Start	Start date and time for the usage measurement.
Stop	Stop date and time for the usage measurement.
Quantity	The amount of data (bytes, unless otherwise stated), SMS (number of SMS messages) or voice (seconds) used.
Price	The calculated charge for the current usage.

Messaging

To display a log of the messaging activity for a SIM, on the *SIM List page* on page 97 menu, select  next to the chosen SIM.

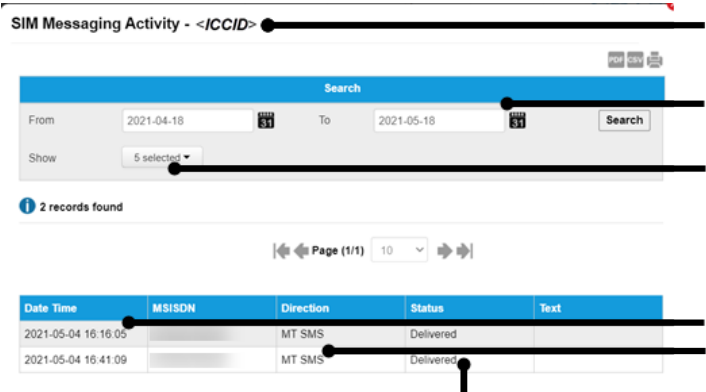

SIM Messaging Activity - <ICCID>

Activity displayed for the specified SIM

Filter results using the date range

Filter results by message type - MT SMS, MO SMS, MT USSD, MO USSD, or API

Select **Search** to filter results.

Message date and time stamp

Message received or sent

Delivery status

Date Time	MSISDN	Direction	Status	Text
2021-05-04 16:16:05		MT SMS	Delivered	
2021-05-04 16:41:09		MT SMS	Delivered	

Search

The search enables you to filter the messaging records.

Field	Description
From	Filter the list of messages between the From and To dates.
To	Select the calendar icon () to display a calendar from which you can select the required date.
Show	Select which messages to show in the results table: Select all – shows all messages. MT SMS – Mobile-terminated SMS (sent to the device)

Field	Description
	• MO SMS – Mobile-originated SMS (sent from the device) • MT USSD – Unstructured Supplementary Service Data (USSD) message (sent to the device) • MO USSD – USSD message (sent from the device) • API – API-generated message
Search	Select to filter the billing records using the values in the From, To and Show fields.

Results

Search results are displayed in pages with a configurable number of records shown on each page (10, 20, 50, 100 and 500). Use the previous , next , first page  and last page  buttons to navigate the list of results.

The following table describes the fields displayed in the messaging report.

Field	Description
Date Time	The date and time that the device sent or received the message.
MSISDN	Mobile Station International Subscriber Directory Number. Unique identifier for a mobile phone number that includes an international country code and a national destination code identifying the subscriber's operator.
Direction	Whether the message was an MT SMS, MO SMS, MT USSD, MO USSD or API message.
Status	The status of the SMS message: Recieved, Sent, Blocked or Delivered.
Text	The text contained in the SMS message.

RADIUS

To display the log of network authentication information for a SIM, on the *SIM List page* on page 97 menu, select  next to the chosen SIM.

Search

From To

410 records found

Page (1/41) 10

Session Start	Session Stop	Data Usage	IMSI	MCC MNC (Network Name)
2021-12-08 13:25:21		0 bytes	234588525389952	234 30 (GB - EE UK)
2021-12-08 11:13:08		3.413 KB	234588525389952	234 30 (GB - EE UK)
2021-12-08 09:00:53		3.261 KB	234588525389952	234 30 (GB - EE UK)
2021-12-08 06:48:43		6.296 KB	234588525389952	234 30 (GB - EE UK)
2021-12-08 06:36:14		0 bytes	234588525389952	234 30 (GB - EE UK)
2021-12-08 04:24:05		4.042 KB	234588525389952	234 30 (GB - EE UK)
2021-12-08 02:11:54		3.901 KB	234588525389952	234 30 (GB - EE UK)
2021-12-07 23:59:42		6.347 KB	234588525389952	234 30 (GB - EE UK)
2021-12-07 21:47:26	2021-12-07 23:59:42	4.003 KB	234588525389952	234 30 (GB - EE UK)
2021-12-07 19:35:11	2021-12-07 21:47:26	3.94 KB	234588525389952	234 30 (GB - EE UK)
Total over all found records		35.203 KB		

Select the export to PDF () , export to CSV () or print () buttons to export or print the information displayed on the page.

If you would like to receive RADIUS data in greater detail, speak to your Account Manager about the Push API.

Search

The search enables you to filter the list of RADIUS log records between a **From** and **To** date.

Select the calendar icon () to display a calendar from which you can select the required date.

Results

Search results are displayed in pages with a configurable number of records shown on each page (10, 20, 50, 100 and 500). Use the previous , next , first page and last page buttons to navigate the list of results.


The following table describes the fields displayed in the RADIUS session log.

Field	Description
Session Start	The date and time that the RADIUS session started.
Session Stop	The date and time that the RADIUS session stopped.
Data Usage	The data usage of the session.
IMSI	The unique International Mobile Subscriber Identity number that identifies a cellular network subscriber. Network operators use the IMSI to authenticate a SIM on the network.
MCC MNC	The MCC and MNC connected to in the session.
Total	Total data usage across all sessions in the search results.

NetFlow

To display the NetFlow activity for a SIM, on the *SIM List page* on page 97 menu, select  next to the chosen SIM. NetFlow data enables you to track traffic flow and volume per SIM, and outputs Mobile Terminated (MT) and Mobile Originated (MO) data in a graph that you can drill into.

The NetFlow dialog displays a graphical breakdown of data transmission over time. The blue bars are MT (received), and the black bars are MO (sent) data transmissions. The default view displays an entire month of data, with each bar representing one day. You can change the current data window using the arrows above the graph.

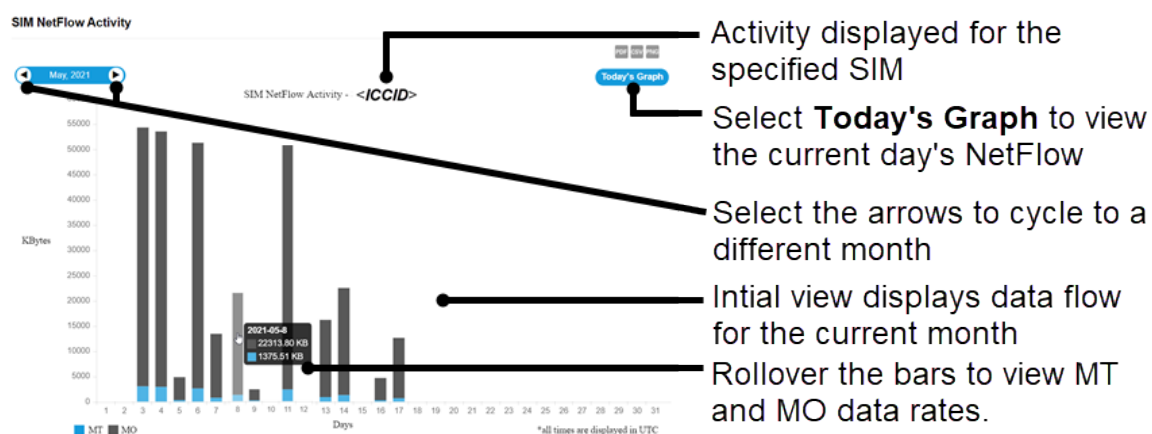

Selecting one bar will update to show a new graph with one bar representing an hour and the whole graph covering a day. Selecting an hour bar will update to show a new graph, with one bar representing a minute and the whole graph covering an hour.

If you would like to receive NetFlow data in greater detail, speak to your Account Manager about the Push API.

Results table

The table below the graph provides a breakdown of the data in the graph in tabular form.

1

December, 2021	MOBytes (96.75 kb)	MTBytes (288.77 kb)	Total Bytes (385.52 kb)
2021-12-1	12.45 kb	42.74 kb	55.19 kb
2021-12-2	12.45 kb	30.06 kb	42.51 kb
2021-12-3	13.50 kb	37.56 kb	51.06 kb
2021-12-4	13.53 kb	41.13 kb	54.66 kb
2021-12-5	13.42 kb	43.00 kb	56.42 kb
2021-12-6	14.58 kb	35.13 kb	49.71 kb
2021-12-7	16.82 kb	59.15 kb	75.97 kb

To scroll through all of the pages, use the numbers above the table.

The following table describes the fields represented in the table and graph.

Field	Description
Date (Day/Hour/Minute)	Displays the day, hour or minute representing one of the bars on the bar chart.
MO Bytes	The data usage for mobile originated data for the SIM over the selected time window.
MT Bytes	The data usage for mobile terminated data for the SIM over the selected time window.
Total Bytes	The total data usage across all bars on the chart.

Control Panel

To send a test SMS, test USSD, or ICMP ping to the SIM, on the *SIM List page* on page 97 menu, select



next to the chosen SIM.

The following table describes the fields displayed on the SIM Control Panel.

Field	Description
Enter Payload	Specify the text to send to the SIM via SMS or USSD.
Send via SMS	Select to send the payload (defined above) to the device via a test SMS message.
Send via USSD	Select to send the payload (defined above) to the device via a test USSD message.
ICMP Ping	Select to perform an ICMP ping.
Cancel Location	Select to remove the subscriber from the HLR using the location cancellation procedure defined in sections 3.6.1.3 and 4.2 in 3GPP TS 23.012. This causes a failure in the next attempt (by the modem in the device) to send data, which typically causes the device firmware to restart the connection.  Restarting the connection can be useful if you suspect the firmware or modem are in an unusual state, or to terminate data sessions. For example, if an operator API gateway does not support RADIUS packet of disconnect (PoD) messages, the cancel location procedure can terminate the data session between the device and the operator API gateway.
SIM Timeline	Select to display a timeline of SIM activity for all IMSIs related to the ICCID.

SIM Audit Log

To display the settings for a SIM, on the [SIM List](#) menu, select  next to the chosen SIM. This displays the [SIM Audit Log](#) page in a dialog.

SIM Audit Log

PDF CSV

Search

From

2021-11-08

31

To

2021-12-08

31

Search

21 records found

Page (1/3)

10

Description	Date	User	Ref	Information
SIM Usage alert triggered	2021-11-12	Mr. Ben Harbridge	8944538523010780000	Usage Alert (750.00KB) sent to external email bharbridge@eseye.com.
SIM Usage alert triggered	2021-11-12	Ms. Gabriella Curry	8944538523010780000	Usage Alert (750.00KB) sent to external email gcurry@eseye.com.
SIM Usage alert triggered	2021-11-12	Mr. Jacques Macruszewski	8944538523010780000	Usage Alert (750.00KB) sent to external email

The SIM Audit Log displays a record of every action taken, and change made, to all SIMs associated with the selected SIM.

Settings menu

The Settings menu provides the following pages which enable you to view package information, create alerts, generate reports and define device models:

- *SIM Packages page* below
- *Alert Profiles page* on the next page
- *Device Models page* on page 127
- *Reporting Profile page* on page 127
- *Messaging API page* on page 129
- *Audit Log page* on page 130

SIM Packages page

The SIM packages page lists all of the packages associated with this account, and enables you to view and edit package information.

Packages





Search

Show
4 selected ▼
Search

 4 records found.



Page (1/1)

10




Package Id	Package Name	Status	No. Of Sims	Action
9368	9080 - PoD, GBP, 14 digit, 30 Mo, SMS, all pricing region 14, 3 months	active	1	 
11431	Building Technology systems - 3 Year - Anynet Dual - 500MB	unsigned	0	 
15858	15858 - PoD, GBP, KPH 8824 14 digit, 30 Mo, 3000 MT, all pricing region 14, 3 months	active	3	
18178	Edinburgh Lease - 1 MB Priced Data Bill Annual Contract - Fixed IP	suspended	0	

Search

Use **Show** to filter the packages to display: Select All, Active, Suspended, Legacy, Unsigned.

Select **Search** to update the records in the results table.

Results

Select the export to PDF () , export to CSV () or print () buttons to export or print the information displayed on the page.

The following table describes the columns displayed for the SIM Audit Log records.

Field	Description
Package ID	Unique identifier for the package .
Package Name	Name of the package which typically contains information about the package items.
Status	The status of the package: • Active • Suspended • Unsigned • Legacy
No. of SIMs	The number of SIMs assigned to the package.
Actions	 – edit package details (friendly name, status)  – download service contracts .

Alert Profiles page

The Alert profiles page enables you to send [alerts](#), or suspend SIMs when Financial, Data, Messaging, Voice or Device limits are reached.

Alert Profiles

 Alert profiles define the alerting rules that should be applied to a SIM.

Profile Name	Default	No. of Devices	Action
example		2	 
Marco	Default	35	 
Voice Alerts		1	 
No Alerts profile		2	 
Tracker Alerts		12	 

Add New Alert Profile

Select the export to PDF () , export to CSV () or print () buttons to export or print the information displayed on the page.

The following table describes the fields on the alert profile page.

Field	Description
Profile Name	Unique name for the alert profile.
Default	If a profile is set as the Default , this indicates that all new SIMs are assigned to this profile unless otherwise specified.
No. of Devices	The number of devices using this alert profile.

Field	Description
Action	 – edit the alert profile .  – delete the alert profile.
Add New Alert Profile	Select to add a new alert profile .

Add/Edit alert profile dialog

To display the Alert Profile dialog, add or edit an [alert profile](#).

Alert Profile

Name	Value	
Profile Name *	Auto No Alerts profile ?	
Default Profile	☒ ?	

Financial Alerts	Enable	Value of Overage (£) per month
Level 1	Not Used ▾	?
Level 2	Not Used ▾	?
Level 3	Not Used ▾	?

Data Alerts	Enable	Value
Level 1	Not Used ▾	? Bytes ▾
Level 2	Not Used ▾	? Bytes ▾
Level 3	Not Used ▾	? Bytes ▾

Messaging Alerts	Enable	Messages per month
Level 1	Not Used ▾	?
Level 2	Not Used ▾	?
Level 3	Not Used ▾	?

Voice Alerts	Enable	Calls per month
Level 1	Not Used ▾	? Seconds ▾
Level 2	Not Used ▾	? Seconds ▾
Level 3	Not Used ▾	? Seconds ▾

Device Alerts	Enable
IMEI Alert	Not Used ▾ ?

Save

The following table describes the fields on the Alert Profile dialog.

Field	Description
Name	
Profile Name	Unique name for the alert profile.
Default Profile	If a profile is set as the Default , this indicates that all new SIMs are assigned to this profile unless otherwise specified.
Financial Alerts	Define up to three levels of financial alerts that are triggered when the SIM charges for the current billing period exceed the overage thresholds defined (below) for each level.
Enable	For each alert level, select one of the following: • Not used – do not alert users when SIM exceeds the configured alert level threshold. • Alert – sends an email to every user assigned to the package for the SIM that exceeded the alert level threshold. • Suspend – suspends the SIM that has exceeded the the alert level threshold.
Value of Overage per month	For each alert level, specify a value for the amount over the agreed monthly cost of the bundle that will trigger an alert. The values for alert level 1 must be lower than alert level 2, which must be lower than alert level 3.  You must not include the currency icon in the value.
Data Alerts	Define up to three levels of data alerts that are triggered when the data usage for the SIM in the current billing period exceeds the thresholds defined (below) for each level.
Enable	For each alert level, select one of the following: • Not used – do not alert users when SIM exceeds the configured alert level threshold. • Alert – sends an email to every user assigned to the package for the SIM that exceeded the alert level threshold. • Suspend – suspends the SIM that has exceeded the the alert level threshold.
Value	For each alert level, specify the value and units for the amount of data used in the current billing period that will trigger an alert. The units can be bytes, kilobytes, megabytes, gigabytes or expressed as a percentage of the data usage defined in the bundle.

Field	Description
	The values for alert level 1 must be lower than alert level 2, which must be lower than alert level 3.
Messaging Alerts	Define up to three levels of messaging alerts that are triggered when the number of SMS messages sent in the current billing period exceeds the thresholds defined (below) for each level.
Enable	For each alert level, select one of the following: • Not used – do not alert users when SIM exceeds the configured alert level threshold. • Alert – sends an email to every user assigned to the package for the SIM that exceeded the alert level threshold. • Suspend – suspends the SIM that has exceeded the the alert level threshold.
Messages per month	For each alert level, specify the number of SMS messages sent in the current billing period that will trigger an alert. The values for alert level 1 must be lower than alert level 2, which must be lower than alert level 3.
Voice Alerts	Define up to three levels of voice alerts that are triggered when total duration of all calls in the current billing period exceeds the thresholds defined (below) for each level.
Enable	For each alert level, select one of the following: • Not used – do not alert users when SIM exceeds the configured alert level threshold. • Alert – sends an email to every user assigned to the package for the SIM that exceeded the alert level threshold. • Suspend – suspends the SIM that has exceeded the the alert level threshold.
Calls per month	For each alert level, specify the total duration of calls (in seconds, minutes or hours) in the current billing period that will trigger an alert. The values for alert level 1 must be lower than alert level 2, which must be lower than alert level 3.
Device Alerts	Trigger a device alert when the SIM is being used by an IMEI for which it is not registered.
IMEI Alert	Select one of the following: • Not used – do not use device alerts. • Alert – sends an email to every user assigned to the package for the SIM when there is an IMEI mismatch.

Field	Description
	Suspend – suspends the SIM when there is an IMEI mismatch.
Save	Select to save the changes to the alerts.

Device Models page

The Device Models page defines devices that you assign to SIMs on the [SIM Settings page](#).

Select the export to PDF () , export to CSV () or print () buttons to export or print the information displayed on the page.

The following table describes the fields on the Device Models page.

Field	Description
Profile Name	Unique name for the device profile.
Default	If a profile is set as the Default , this indicates that all new SIMs are assigned to this profile unless otherwise specified.
No. of Devices	The number of SIMs assigned to this device model. You assign SIM to devices on the SIM Settings page .
Action	 – edit the Device Name and Default values..  – delete the device model.
Add New Device Model	Select to add a new device model.

Reporting Profile page

The Reporting Profile page defines [report profiles](#) that you assign to SIMs on the [SIM Settings page](#).

Select the export to PDF () , export to CSV () or print () buttons to export or print the information displayed on the page.


The following table describes the fields on the Reporting Profile page.

Field	Description
Profile Name	Unique name for the report profile.
Default	If a profile is set as the Default , this indicates that all new SIMs are assigned to this profile unless otherwise specified.
No. of Devices	The number of SIMs assigned to this reporting profile. You assign SIMs to devices on the SIM Settings page .

Field	Description
Action	 – edit the report profile.  – delete the reporting profile.
Add New Report Profile	Select to display the Add Report Profile dialog (below) where you add a new report profile .

Add/Edit report profile dialog

The Add/Edit Report Profile dialog is where you can add a new report profile or edit existing report profiles.

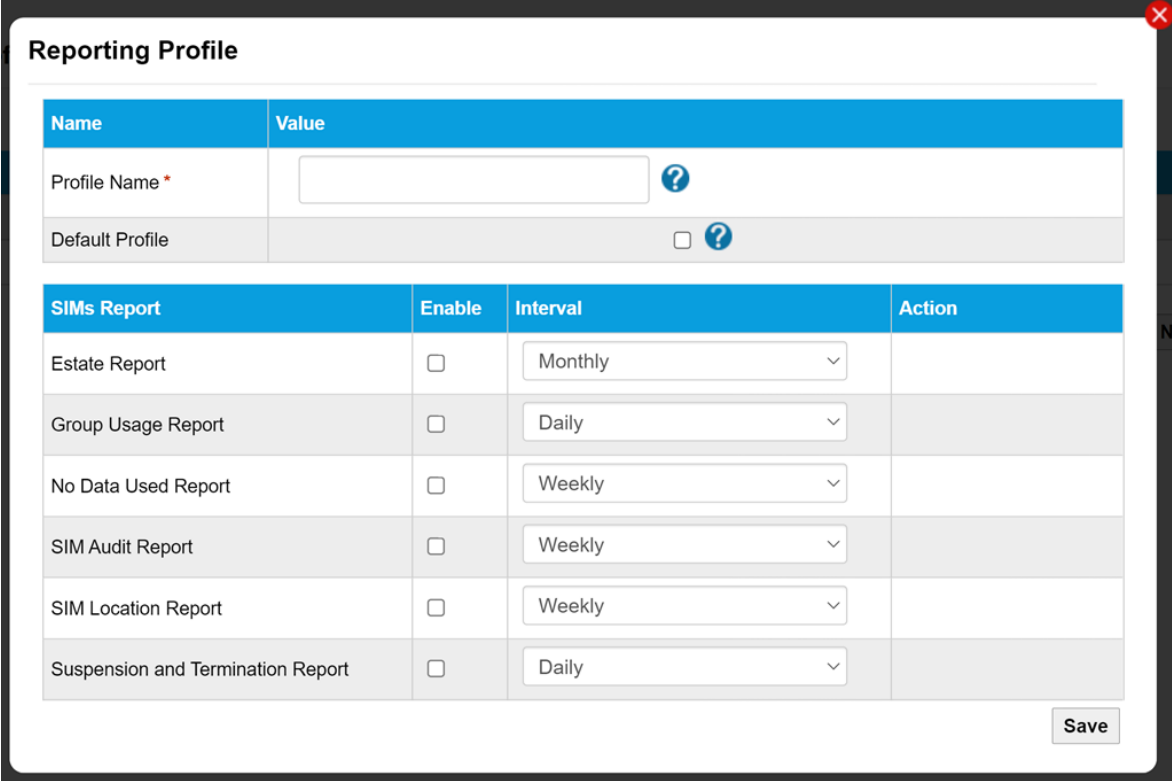

Reporting Profile

Name	Value
Profile Name *	?
Default Profile	☐ ?

SIMs Report	Enable	Interval	Action
Estate Report	☐	Monthly	
Group Usage Report	☐	Daily	
No Data Used Report	☐	Weekly	
SIM Audit Report	☐	Weekly	
SIM Location Report	☐	Weekly	
Suspension and Termination Report	☐	Daily	

Save

The following table describes the fields on the Add/Edit Report Profile dialog.

Field	Description
Profile Name	Unique name for the report profile.
Default	If a profile is set as the Default , this indicates that all new SIMs are assigned to this profile unless otherwise specified.
SIMs Report	Displays a row for each of the following SIM reports:

Field	Description
	- Estate Report – monthly report that provides a breakdown of individual SIM usage and details, contract terms, network changes, and SIM status, authentication and location information. - Group Usage Report – daily, weekly or monthly report that displays data usage across all SIMs. - No Data Used Report – weekly or monthly report that displays the ICCID and MSISDN of active devices that have not used any data in the past month, including the SIM status and where the device was last seen. - SIM Audit Report – weekly or monthly report that displays alert triggers on specified SIMs. - SIM Location Report – weekly or monthly report that displays the number of devices per country for all SIM cards in your estate. - Suspension and Termination Report – daily, weekly or monthly report that displays when a SIM card status was initiated, including all activations, terminations, manual suspensions, and alerted suspensions, by ICCID and MSISDN.
Enable	Select the check box to enable the report.
Interval	Specify whether the report is generated Daily , Weekly or Monthly .
Action	 Only displayed when editing the report profile. Select Run Now to trigger the report.
Save	Select the add/edit the reporting profile.

Messaging API page

The Messaging API page is where you configure the API user details.

Messaging API

						PDF CSV Print
API Username	MT Enable	MO Enable	MO POST URL	API MSISDN	API Whitelist of IP Addresses	Action
demo	Yes	Yes		447924404571	No	

Select the export to PDF () , export to CSV () or print () buttons to export or print the information displayed on the page.

The following table describes the fields on the Add/Edit Report Profile dialog.

Field	Description
API Username	Unique username for the messaging API user.
API Password	Only displayed when editing information. The password for the messaging API user.
MT Enable	Whether the user is permitted to send MT messages.
MO Enable	Whether the user is permitted to send MO messages.
MO POST URL	The mobile originated POST URL.
API MSISDN	The MSISDN to use for the messages.
API Whitelist of IP Addresses / API Whitelist Enable	A list of IP addresses that are allowed to use the messaging API to send and receive messages.
Action	 – edit the messaging API.

Audit Log page

The Settings Audit Log displays a record of every action taken, and change made, to the settings associated with your account.

Settings Audit Log





Search

From


To


 2 records found



Page (1/1)



Description	Date	User	Ref	Information
New Reporting Profile Created	09/12/2021	Mr. demoExample eseye	5876	Report Profile "test" created from SIAM
Reporting Profile Deleted	09/12/2021	Mr. demoExample eseye	5876	Report Profile "test" deactivated successfully

Select the export to PDF () , export to CSV () or print () buttons to export or print the information displayed on the page.

Search

The search enables you to filter the list of Settings audit log records between a **From** and **To** date.

Select the calendar icon () to display a calendar from which you can select the required date.

Results

Search results are displayed in pages with a configurable number of records shown on each page (10, 20, 50, 100 and 500). Use the previous , next , first page  and last page  buttons to navigate the list of results.

The following table describes the columns displayed for the SIM Audit Log records.

Field	Description
Description	Description of the activity or change.
Date	The date of the change in the following format YYYY-MM-DD.
User	The name of the user that made the change.
Ref	The package identifier on which the user made the change.
Information	Detailed description about the change made.

Activity menu

The Activity menu provides the following pages which enable you to view notification, report and alert information:

- *Notifications page* below
- *Alerts page* on the facing page
- *Reports page* on page 134

Notifications page

The Notifications page displays all of the notification messages sent.

Notifications





Search

From 

To 

Show

 6 records found



 Page (1/1)




Date Time	Classification	Severity	Message
2021-11-23 15:20:48	Network	Major	Degraded service using Digicel IMSI (pre-fix 374130)
2021-11-23 19:40:54	Network	Major	UPDATE: Service fully restored on Digicel IMSI (pre-fix 374130)
2021-11-29 16:09:14	Network	Planned	Planned Maintenance - Router Upgrade
2021-12-03 08:06:23	Network	Major	Degraded Service using Conecto IMSI pre-fix (310460)
2021-12-03 08:18:46	Network	Major	UPDATE: Degraded Service using Conecto IMSI pre-fix (310460) - RESOLVED
2021-12-05 10:06:37	Network	Planned	UPDATE: Planned Maintenance - Router Upgrade postponed

Select the export to PDF () , export to CSV () or print () buttons to export or print the information displayed on the page.

Search

The search enables you to filter the notifications.

Field	Description
From	Filter the list of notifications between the From and To dates.
To	Select the calendar icon () to display a calendar from which you can select the required date.
Show	Select which notification classifications to show. By default, all activities (Network, Management and Application) are shown.
Search	Select to filter the notification records using the values in the From, To and Show fields.

Results

The following table describes the columns displayed for the SIM Audit Log records.

Field	Description
Date Time	The date and time of the notification.
Classification	Whether the notification is related to network, management or application information.
Severity	The severity of the notification: Minor, Major or Severe.
Message	The notification text.

Alerts page

The Alerts page displays read-only information about Finance, Data, Messaging and IMEI Alerts. Alerts are also sent via e-mails to Engineering users.

Alerts





Search

From 

To 

Show

ICCID

 5 records found



 Page (1/1)




Date Time	Type	ICCID	Subject
2021-11-12 22:50:32	Data	894453	Usage Alert (750.00KB)
2021-11-16 20:15:11	Data	894453	Usage Alert (1.00MB)
2021-12-02 17:50:50	Finance	995344	Financial Alert (5.00 GBP)
2021-12-07 09:55:14	Data	894453	Usage Alert (350.00KB)
2021-12-09 13:55:16	Finance	995344	Suspension Alert (30 GBP)

Select the export to PDF () , export to CSV () or print () buttons to export or print the information displayed on the page.

Search

The search enables you to filter the alerts.

Field	Description
From	Filter the list of alerts between the From and To dates.
To	Select the calendar icon () to display a calendar from which you can select the required date.

Field	Description
Show	Select which alerts type to show. By default, all types (Finance, Data, Messaging, IMEI and Calls) are shown.
ICCID	Integrated Circuit Card Identifier. Unique identifier (up to 20 characters in length) for SIM cards or profiles (when using an eUICC SIM).
Search	Select to filter the notification records using the values in the From, To and Show fields.

Results

The following table describes the columns displayed for the SIM Audit Log records.

Field	Description
Date Time	The date and time of the alert.
Type	Whether the alert is about Finance, Data, Messaging, IMEI or Calls.
ICCID	Integrated Circuit Card Identifier. Unique identifier (up to 20 characters in length) for SIM cards or profiles (when using an eUICC SIM).
Subject	Whether reaching this limit triggered an alert or a suspension

Reports page

The Reports page displays a history of the generated reports.

Reports
PDF CSV

Search

From  To 

Show ▼ Search

i 12 records found

◀◀ Page (1/2) ▶▶

Date Time	Type	Subject	Action
2021-12-04	SIM	Group Usage Report	
2021-12-04	Account	Account Snapshot Report	
2021-12-04	SIM	SIM Location Report	
2021-12-01	SIM	Estate Report	
2021-12-01	SIM	Estate Report	

Select the export to PDF () , export to CSV () or print () buttons to export or print the information displayed on the page.

Search

The search enables you to filter the reports.

Field	Description
From	Filter the list of reports between the From and To dates.
To	Select the calendar icon () to display a calendar from which you can select the required date.
Show	Select which report type to show. By default, SIM and Account types are shown.
Search	Select to filter the notification records using the values in the From, To and Show fields.

Results

The following table describes the columns displayed for the reports.

Field	Description
Date Time	The date and time of the report.
Type	Whether the report is a SIM or Account report.
Subject	The subject of the report.
Action	 – download a PDF version of the report.  – download a CSV version of the report.

Messaging API page

See *Messaging API page* on page 129.

Admin menu

The Admin menu provides management of user accounts and sub-accounts using the following sub-menu options:

- *Users page* below
- *Referral Codes page* on page 138
- *Sub Accounts page* on page 139
- *Audit Log page* on page 140

Users page

The Users page lists the users for this account and their [user role](#) privileges.

Users





Username	Email Address	Admin	Finance	Engineering	Logistics	Enabled	Action
bluetridge@eseye.com	bluetridge@eseye.com	☒	☒	☒	☒	☒	 
chuckit	chuckit@eseye.com	☒	☒	☒	☒	☒	 
gourty@eseye.com	gourty@eseye.com	☒	☒	☒	☒	☐	
jivagruachenuk@eseye.com	jivagruachenuk@eseye.com	☒	☒	☒	☒	☒	 
jivacal	jivacal@eseye.com	☒	☒	☒	☒	☒	 
kyvies	kyvies@eseye.com	☒	☒	☒	☒	☒	 
michaelm	michaelm@eseye.com	☒	☒	☒	☒	☐	
MisocoDama	mparnegiani@eseye.com	☒	☒	☒	☒	☒	 
mparnegiani	mparnegiani@eseye.com	☒	☒	☒	☒	☒	 
richardit	richardit@eseye.com	☒	☒	☒	☒	☒	 
tyyine	tyyine@eseye.com	☒	☒	☒	☒	☒	 

Select the export to PDF (), export to CSV () or print () buttons to export or print the information displayed on the page.

The following table describes the fields on the Users Page.

Field	Description
Username	The username used to log in to the SIAM portal. Must be between 6 and 32 characters in length, and should contain only letters, digits, '-', '_', or be a valid email address.
Email Address	The email address for the user.
Admin	Select to give this user Admin user role privileges.
Finance	Select to give this user Finance user role privileges.

Field	Description
Engineering	Select to give this user Engineering user role privileges.
Logistics	Select to give this user Logistics user role privileges.
Enabled	Enable or disable the user's SIAM account.
Action	– edit – delete – email two factor authentication QR code to user. This icon indicates that two factor authentication is enabled for all users of this portfolio.
Save changes	Select to save the changes to the user privileges.
Add user	Select to display the Add User Details dialog where you can add information for a new SIAM user.

Add/Edit User Details dialog

The Add/Edit User Details dialog lets you add or edit user details.

The screenshot shows the 'User Details' dialog box. It has a title bar with a close button (X). The dialog contains a table with the following fields:

User	
Username *	?
Email Address *	
Password *	
Salutation	Select ▼
Firstname *	
Surname *	
Job Title *	Select ▼
Phone Number	▼

Below the table, there are four checkboxes: ☐ Admin, ☐ Finance, ☐ Logistics, and ☐ Engineering. A 'Save' button is located at the bottom right of the dialog.

The following table describes the fields on the User Details dialog.

Field	Description
Username	The username used to log in to the SIAM portal. Must be between 6 and 32 characters in length, and should contain only letters, digits, '-', '_', or be a valid email address.
Email Address	The email address for the user.  This email address will be used to verify the user before they can log in to SIAM.
Password	The SIAM login password for this user. Must be a minimum of 6 characters, and contain at least one lower case letter, one upper case letter, and a numeric digit.
Salutation	Salutation for the user. Choose between: Mr, Mrs, Dr, Ms, Miss, Sir or Prof.
Firstname	First name of the user. Must be at least two characters long.
Surname	Surname of the user. Must be at least two characters long.
Job Title	The job title of the user. This is useful to identify their required user privileges.
Phone Number	A contact number for the user.
User privileges	Select which user role(s) to provide to this user: Admin, Finance, Logistics, Engineering.
Save	Select to save the changes.

Referral Codes page

The Referral Codes page is where you [create unique referral codes](#) that you can send to [create new users](#) on this account. A referral code is a code or password you create to give a user access to a sub-account.



We recommend a secure password of a mixture of characters.

Manage Child Account Referral Codes

Referral Code	Code Type	Billing	Status	Action
qwerty	SingleUse	ForceParent	New	  

PDF CSV

Add Sub Account Referral Code

The following table describes the fields on the referral codes page.

Field	Description
Referral Code	Specify a unique referral code, at least six characters in length, to send to the user.
Code Type	Specify one of the following referral code types to send to the user: • Single Use – creates a code for a sub account that can only be used once. • Perpetual – creates a reusable code for sub accounts. • Tie – creates a new user on your account.
Billing	Specify whether to add the user, who will be sent this referral code, to the Parent account or a Sub Account .
Status	Displays New for newly created referral codes.
Action	 – edit the referral code information (Referral Code, Type and Billing fields).  – delete the referral code.  – specify one or more email addresses to which to send the referral code. When specifying a list of email addresses, use commas (,) or semi-colons (;) to separate the email addresses.
Add Sub Account Referral Code	Select to add a new referral code by specifying the Referral Code, Type and Billing fields and selecting Create .

Sub Accounts page

The Sub Accounts page enables you to view and log in to SIAM [sub accounts](#).

Sub Accounts

 1 records found.		  
  Page (1/1)		10   

Company Name	Portfolio Name	Created	SIMs	Action
Stellio	Stellio	2016-11-09	0	

The following table describes the fields on the sub accounts page.

Field	Description
Company Name	The name of the company for which the user works.
Portfolio	The name of the portfolio assigned to the user.

Field	Description
Name	
Created	The date on which the sub account was created. The date format is: YYYY-MM-DD.
SIMs	The number of SIMs assigned to this sub account.
Action	– select to log in as the sub account, which only has access to the <i>SIMs menu</i> on page 97, <i>Settings menu</i> on page 121, <i>Activity menu</i> on page 132, <i>Admin menu</i> on page 136 and <i>Support menu</i> on page 152 menus. Logging in on a sub account will automatically log you out of your current account.

Audit Log page

The Audit Log page enables you to search for all changes made on the Admin menu options.

Audit Log

PDF CSV Print

Search

From To Search

37 records found

Page (1/4) 10

Event	Ref	Date	User	Information
Report generated	1852055	2021-11-06	Mr. Ben Harbridge	SIM Location Report generated for reporting profile Marco .
Report generated	1854200	2021-11-06	Mr. Ben Harbridge	Account Snapshot Report generated for reporting profile .
SIM Usage alert triggered	8944584000107896	2021-11-06	Mr. Ben Harbridge	Usage Alert (350.00KB) sent to external email bharbridge@eseye.com.
SIM Usage alert triggered	8944584000107896	2021-11-06	Mr. Malcolm Curry	Usage Alert (350.00KB) sent to external email gcurry@eseye.com.
SIM Usage alert triggered	8944584000107896	2021-11-06	Mr. Jacques Magnuszewski	Usage Alert (350.00KB) sent to external email jmagnuszewski@eseye.com.
SIM Usage alert triggered	8944584000107896	2021-11-06	Mr. Kevin Maher	Usage Alert (350.00KB) sent to external email kmaher@eseye.com.

Select the export to PDF (), export to CSV () or print () buttons to export or print the information displayed on the page.

Search

Filter the list of audit log records between the **From** and **To** dates.

Select the calendar icon () to display a calendar from which you can select the required date.

Select **Search** to update the records in the results table.

Results

Search results are displayed in pages with a configurable number of records shown on each page (10, 20, 50, 100 and 500). Use the previous , next , first page  and last page  buttons to navigate the list of results.

The following table lists the fields in the results table on the audit log page.

Field	Description
Event	Description of the admin event or change.
Ref	A reference number for the event. Typically it's the ICCID of the SIM on which the user made the change.
Date	The date (YY-MM-DD) of the audit log event.
User	The name of the user that made the change.
Information	Detailed description about the change made.

Finance menu

The Finance menu enables you to make payments, edit billing details and view transaction history using the following pages:

- *Overview page* below
- *Details page* on the facing page
- *Transactions page* on page 145
- *Audit Log page* on page 146

Overview page

The Overview page enables you to download forms to change the contractual name and payment methods, and to make payments.

Finance overview




Contractual name	Actions	
eseye - Demo	 	

Finance settings		Actions
Payment method		
Email Statement	☐	 

Statement	Amount	Actions
Amount due	£ 0.00	
Account balance	£ 0	
	Amount	Make Ad-hoc Payment By Credit Card

Select the export to PDF () or print () buttons to export or print the information displayed on the page.

The following table describes the fields on the Overview page.

Field	Description
Contractual Name	The name of the portfolio who is liable for this account.  – select to download the party name change request form, which you must complete and upload to request the name change.
Finance Settings	
Payment method	Displayed the current payment method, which is one of: • Invoiced – payments are made in response to invoices.

Field	Description
	• Credit Card (Monthly) – Eseye will contact you to confirm credit card details. • Direct Debit (Monthly) – Eseye will contact you and request you to complete a DirectDebit form.  – select to edit the payment method and select Request change .
Email Statement	Select the check box to enable receiving monthly statements via email. If you change this setting, select the update icon () to request the changes.
Statement	
Amount due	The amount overdue on this account.
Account Balance	The total amount outstanding on this account.
Amount	The amount of the payment made using the Make Ad-hoc Payment by Credit Card button.
Make Ad-hoc Payment by Credit Card	Select to make a payment to Eseye for the amount in the Amount field above.

Details page

The Details page enables you to view and edit billing details.

Finance details

Billing Address Details	
Billing Company	eseye - demo
Address line 1	8
Address line 2	Frederick (Gangon Road)
Town or City	guildford
State or County	surrey
Postcode	GU27 9PL
Country	United Kingdom

Billing Contact Details	
Contact Name	Mr. demoExample eseye
Telephone	+441 888 888 888
Email Address	demo@eseye.com

Billing References	
VAT reference	Example
Company number	
PO reference	

Select the export to PDF (), export to CSV () or print () buttons to export or print the information displayed on the page.

The following table describes the fields on the Details page.

Field	Description
Billing Address Details	
Billing Company	The name of the company that placed the order.
Address Line 1	The first line of the address to which the order will be sent.
Address Line 2	The second line of the address to which the order will be sent.
Town or City	The town or city to which the order will be sent.
State or County	The state or county to which the order will be sent.
Postcode	The postcode to which the order will be sent.
Country	The country to which the order will be sent.
Billing Contact Details	
Contact Name	The name of the billing contact who will pay for this order.

Field	Description
	 This should be a finance specific contact. For example, an employee in the accounts department.
Telephone	A contact number for the billing contact.
Email Address	Email address of the billing contact.
Billing References	
VAT reference	The VAT reference number for the company.
Company number	The unique company registration number for the company.
PO reference	The unique reference number for the purchase order.
Edit	Select to edit the billing details.

Transactions page

The Transactions page displays a list of historical transaction records.

Account Transactions

We have upgraded our systems and your old transaction history is no longer available online, but if you would like a copy please send an email request to accounts@eseye.com

PDF CSV

Search

From

2021-06-03

31

To

2021-12-03

31

Search

Show

11 selected

0 record(s) found

Select the export to PDF (), export to CSV () or print () buttons to export or print the information displayed on the page.

Search

The search enables you to filter the transaction records.

Field	Description
From	Filter the list of transaction records between the From and To dates.
To	Select the calendar icon () to display a calendar from which you can select the required date.
Show	Select which transaction records are shown. By default, all activities (Data, SMS and Voice) are shown.

Field	Description
Search	Select to filter the billing records using the values in the From, To and Show fields.

Results

Search results are displayed in pages with a configurable number of records shown on each page (10, 20, 50, 100 and 500). Use the previous , next , first page  and last page  buttons to navigate the list of results.

The following table describes the fields in the results table on the Transactions page.

Field	Description
Type of transaction	The type of transaction, which is one of the following: • Credit Note • Cheque • DirectDebit • Bank Transfer • Credit Card • Debit Card • Cash • Standing Order • Journal • Payment • Invoice
Transaction reference number	Unique identifier for this transaction.
Date of transaction	The date of the transaction.
Due date, only for invoices	The due date for payments made after receiving invoices.
Amount (in the agreed currency)	The amount of money in the transaction (in the agreed currency).
Tax	The amount of tax in the transaction (in the agreed currency).
Balance (in the agreed currency)	The balance (in the agreed currency) before the transaction was made.

Audit Log page

The Audit Log page enables you to search for all changes made on the Finance menu.

Finance Audit Log





Search

From


To


 0 records found

Select the export to PDF () , export to CSV () or print () buttons to export or print the information displayed on the page.

Search

Filter the list of audit log records between the **From** and **To** dates.

Select the calendar icon () to display a calendar from which you can select the required date.

Select **Search** to update the records in the results table.

Results

Search results are displayed in pages with a configurable number of records shown on each page (10, 20, 50, 100 and 500). Use the previous  , next  , first page  and last page  buttons to navigate the list of results.

The following table describes the fields in the results table on the audit log page.

Field	Description
Description	The type of change made.
Date	The date of the change.
User	The user who made the changes.
Reference	The reference number for the change.
Information	Textual description of the change.

Ordering menu

The Ordering menu enables you to manage previous and new orders using the following pages:

- *Shop page* below
- *Cart page* below
- *Order History page* on the facing page
- *Delivery Address page* on page 150

Shop page

The Shop page displays a list of products you can buy directly through the SIAM portal.



For a full list of available products or services, contact your Eseye Account Manager.

Shop

Order Code	Description	Price	Qty	Action
7800	DEMO PACKAGE FOR TEST PURPOSES ONLY	£9.990000000000	1	
8986	8986 - Greenfield - Project S&S Data	£0.000000000000	1	
9100	AnyNet Office Test Package	£0.000000000000	1	
11431	Building technology systems - 10 Year - AnyNet (Qual - 100MB)	£0.000000000000	1	

Select the export to PDF () , export to CSV () or print () buttons to export or print the information displayed on the page.

The following table describes the fields on the Shop page.

Field	Description
Order Code	Code that uniquely identifies the order.
Description	Textual description of the package which typically includes data limits or available services.
Price	The cost of purchasing a single order.
Qty	The quantity of the item you wish to purchase.
Action	 – adds the order to the shopping cart .

Cart page

The Cart page displays the items currently in the shopping cart.

Cart

PDF CSV			
Description	Qty	Amount	Action
AnyNet Office Test Package	1	£0	
	Total	£0	

Checkout

Select the export to PDF () , export to CSV () or print () buttons to export or print the information displayed on the page.

The following table describes the fields on the shopping cart page.

Field	Description
Description	Textual description of the package which typically includes data limits or available services.
Qty	The quantity of the item you wish to purchase.  If you update a quantity, select the  action to update the shopping cart.
Amount	Displays the cost of each item and the total cost of the order.
Action	 – select to update any changes made to the row item in the shopping cart.  – select to remove the item from the cart.
Checkout	Select to proceed to the checkout page where you must: - Supply or edit the delivery address and contact details. - Specify a billing address. - Edit order-specific delivery options - Review and place your order.

Order History page

The Order History page enables you to search for and view all of the orders in the last four months.

Order History

PDF CSV			
Search			
From	2021-11-03 	To	2021-12-03 
Show	New 	Search	

 0 records found

Select the export to PDF () , export to CSV () or print () buttons to export or print the information displayed on the page.

Search

The search enables you to filter the order history.

Field	Description
From	Filter the list of order records between the From and To dates.
To	Select the calendar icon () to display a calendar from which you can select the required date.
Show	Select which types of orders are shown. By default, all order types (New, Pending and Dispatched) are shown.
Search	Select to filter the order history records the values in the From, To and Show fields.

Results

The following table describes the fields on the Order History page.

Field	Description
Reference	The unique reference number for the order. Select the reference number to display delivery details and addresses.
Date	The date of the order.
User	The user that placed the order.
Status	The status of the order: New, Pending or Dispatched.

Delivery Address page

The Delivery Address page is where you view and edit the device address and delivery contact details.

View Delivery Address

Delivery Address Details	
Company Name	eseye - demo
Address Line1	
Address Line2	
Town or City	guildford
State or County	surrey
Postcode	GU1 1YD
Country	United Kingdom

Delivery Contact Details	
Contact Name	Mr. demo eseye
Telephone Number	+1 958 401 4000

[Edit](#)

Select the export to PDF (), export to CSV () or print () buttons to export or print the information displayed on the page.

The following table describes the fields on the Delivery Address page.

Field	Description
Delivery Address Details	
Company Name	The name of the company that placed the order.
Address Line 1	The first line of the address to which the order will be sent.
Address Line 2	The second line of the address to which the order will be sent.
Town or City	The town or city to which the order will be sent.
State or County	The state or county to which the order will be sent.
Postcode	The postcode to which the order will be sent.
Country	The country to which the order will be sent.
Delivery Contact Details	
Contact Name	The name of the delivery contact who will receive this order.
Telephone Number	A contact number for the user.
Edit	Select Edit to update the delivery address and delivery contact details.

Support menu

The Support page is where you raise new, and manage existing, support tickets.

Tickets page

The Tickets page lets you search all of your support tickets.

Tickets

Search

From

2021-12-01

31

To

2021-12-03

31

Search

i Showing Tickets Between 2021-12-01 and 2021-12-03 - Total 2 found.

Page (1/1)

10

Ticket	Created Date	Status	Subject	Priority	Reported	Action
412636	2021-12-02 11:52:42 AM	solved	Application for the post of Research Associate Consultant/Consultant.	low	Heba Dail	
412508	2021-12-01 20:35:56 PM	solved	FW Link Labs SuperTag Tracker Discontinuing - look reference 4/2218	low	Mr. Mohamed Eya	

Raise New Ticket

Search

Filter the list of support tickets created between the **From** and **To** dates.

Select the calendar icon () to display a calendar from which you can select the required date.

Select **Search** to update the records in the results table.

Results

Search results are displayed in pages with a configurable number of records shown on each page (10, 20, 50, 100 and 500). Use the previous , next , first page  and last page  buttons to navigate the list of results.

The following tables describes the fields on the tickets page.

Field	Description
Ticket	Unique identifier for the ticket that SIAM assigns after the ticket is raised.
Created Date	The date (YY-MM-DD) and time (hh:mm:ss) that the ticket was raised.
Status	The current status of the ticket, which can be: New, Pending, On hold, Solved or Closed.
Subject	The title of the ticket.
Priority	The importance of the ticket: Low, Normal, High and Critical.

Field	Description
Reported	The name of the user who raised the ticket.
Action	 – Edit ticket information.  – Close the ticket.
Raise New Ticket	Select to raise a new ticket.

To raise a new ticket

1. Display the **Support > Ticket** menu.
2. Select **Raise New Ticket**, which displays the New Ticket page.
3. Supply the following information:
 - Title
 - Message
 - Classification
 - Priority
4. Select **Create New Ticket**.

To edit an existing ticket

1. Display the **Support > Ticket** menu.
2. Search for and identify the ticket you want to edit in the results table.
3. Select the  icon, which displays the View Ticket dialog.
4. Edit the following information:
 - Title
 - Message
 - Classification
 - Priority
5. Select **Create New Ticket**.

Account menu

The Account menu provides the following menus which enable you to view and edit information specific to your user account:

- *Account Details page* below
- *Notifications (My Account Settings) page* on the facing page
- *Account Reports page* on page 157
- *Account Audit Log page* on page 159
- Logout – logs the current user out of the SIAM v3 portal.

Account Details page

The Account Details page enables you to view and edit your user details and password.

Account details





User Name	michaelm
Salutation	Mr.
Firstname	Michael
Surname	Michael
Job Title	Technical
Business Sector	
Email Address	michaelm@eseye.com
Phone Number	+1 959 307 9299

[Edit Details](#)
[Change Password](#)

Select the export to PDF () , export to CSV () or print () buttons to export or print the information displayed on the page.

The following table describes the fields displayed on the account details page.

Field	Description
User Name	The username used to log in to the SIAM portal. Must be between 6 and 32 characters in length, and should contain only letters, digits, '-', '_', or be a valid email address.
Firstname	First name of the user. Must be at least two characters long.
Surname	Surname of the user. Must be at least two characters long.
Job Title	The job title of the user. This is useful to identify their required user privileges.
Business Sector	Description of the business sector in which the user's company operates.

Field	Description
Email Address	The email address for the user.
Phone Number	A contact number for the user.
Edit Details	Select to edit your user account details.
Change Password	Select to change your password.

Notifications (My Account Settings) page

The Notifications page configures when to notify you of certain events.

My Account Settings





Notifications	Enable	
New Products/News Updates	☒	

Logistics Notifications	Enable	Interval
Notify me of orders	☒	On Event ▼

Finance Notifications	Enable	Interval
Notify me on invoices	☒	On Event ▼

Report Profile Notifications	Enable	
SIM Admin Reports	☒	
SIM Usage Reports	☒	

Alert Profile Notifications	Enable	
Alert Notification	☒	

Tech Notifications	Enable	
Network Events	☒	
Application Events	☒	
Management Events	☒	

Admin Notifications	Enable	
User Permission Changes	☐	



Select the export to PDF () , export to CSV () or print () buttons to export or print the information displayed on the page.

The following table describes the fields on the notifications page.

Field	Description
Notifications	• Notifications • New Products/News Updates – send notification emails about new products and news updates. • Logistics Notifications • Notify me of orders – send notification emails when there is a new order on your account. • Finance Notifications • Notify me on invoices – send notification emails when there is a new invoice available for your account. • Report Profile Notifications • SIM Admin Reports – send notification emails for updated SIM admin reports. • SIM Usage Reports – send notification emails for updated SIM usage reports. • Alert Profile Notification • Alert Notification – send notification emails when there is a change to the SIM Settings. • Tech Notifications • Network Events – send notification emails when there are reported network issues. • Application Events – send notification emails when there are any application-related issues. For example, any issues with the SIAM portal. • Management Events – send notification emails when there are reported management issues. • Admin Notification • User Permission Changes – send notification emails when there are changes to user permissions.
Enable	Alongside each notification, select the enable check box to trigger sending notifications emails.
Interval	For some notifications, you can select when to trigger the notification emails. Currently, only On Event is supported.
Update	Select to save the changes to the enabled notifications.

Account Reports page

The Accounts Reports page enables and updates the frequency of [reports](#).

Account Reports

Please note that to update the Interval or Enable press 'Update' button..

Admin Reports	Enable	Interval	Action
Account Audit Report	☐	weekly	
Account Snapshot Report	☒	weekly	<button>Run Now</button>
Packages Audit Report	☐	weekly	
Profiles Audit Report	☐	weekly	

Finance Reports	Enable	Interval	Action
Account Statement Report	☐	monthly	
Finance Audit Report	☐	weekly	

Logistics Reports	Enable	Interval	Action
Logistics Audit Report	☐	weekly	

Engineering Reports	Enable	Interval	Action
Messaging Audit Report	☐	weekly	
Networking Audit Report	☐	weekly	

Update

Select the export to PDF () , export to CSV () or print () buttons to export or print the information displayed on the page.

The following table describes the fields on the Accounts Reports page.

Field	Description
Report	Displays one of the following reports:

Field	Description
	• Admin Reports • Account Audit Report – date and time stamps user access to the account, as well as notifications sent. Use this PDF report to track SIAM access and who is responsible for received notifications. • Account Snapshot Report – lists portfolio details, including active users, current packages, total data usage. This report gives you a broad understanding of the data your SIM card estate consumes, and who is accessing the estate. • Packages Audit Report – date and time stamps when a signed Service Contract form is uploaded on a SIM Package, and the user responsible for the change. • Profiles Audit Report – date and time stamps user activity on the Reporting Profile, such as when a new profile is created or edited. • Finance Reports • Account Statement Report – billing statement that enables you to quickly see any outstanding balance owed to Eseye. Your connectivity will cease functioning when bills are unpaid. • Finance Audit Report – date and time stamps user changes to billing information, such as password and address updates, or payment method approval and so on. • Logistics Reports • Logistics Audit Report – date and time stamps user activity on an order, such as when the order is placed, shipping prepared, or dispatched. • Engineering Reports • Messaging Audit Report – date and time stamps user activity on the SMS API or against an individual SIM card, such as password and MO POST URL changes. • Networking Audit Report – details network changes, such as assigned IP addresses. This report gives system administrators visibility of network changes to help assess the impact of those changes on devices. For information about reports, see 8680 Available Reports Overview (PDF).
Enable	Select to enable the report generation.
Interval	Specify the frequency of report generation: Daily, Weekly or Monthly.
Action	Select Run Now to generate the report.
Update	Select to save the changes.

Account Audit Log page

The Account Audit Log page enables you to search for all changes made on the Account menu.

My Account Audit Log





Search			
From	2021-11-03 	To	2021-12-03 
			Search

 17 records found



Page (1/2)



Description	Date	Ref	Information
Account verified through password change	2021-11-30	Username : michaelm	Account marked verified through password change
Siam password reset	2021-11-30	Username : michaelm	Siam password changed
Account login	2021-11-30	User logged in	Username : michaelm logged in to Siam
Account login	2021-12-01	User logged in	Username : michaelm logged in to Siam
Account login	2021-12-01	User logged in	Username : michaelm logged in to Siam
Account login	2021-12-01	User logged in	Username : michaelm logged in to Siam

Select the export to PDF () , export to CSV () or print () buttons to export or print the information displayed on the page.

Search

Filter the list of account audit log records between the **From** and **To** dates.

Select the calendar icon () to display a calendar from which you can select the required date.

Select **Search** to update the records in the results table.

Results

Search results are displayed in pages with a configurable number of records shown on each page (10, 20, 50, 100 and 500). Use the previous , next , first page  and last page  buttons to navigate the list of results.

The following table lists the fields in the results table on the account audit log page.

Field	Description
Description	The account event or change.
Date	The date (YY-MM-DD) of the audit log event.
Ref	The user action or username of the account.
Information	Detailed description about the change made.