



Securitas Direct Alarm

User manual





Welcome to Securitas Direct

Congratulations! You have just installed a Securitas Direct Alarm, an advanced security system designed to offer you maximum protection and, at the same time, guarantee easy and comfortable use.

We recommend that you carefully read the manual you have in your hands and take full advantage of the possibilities offered by your alarm system.

In this manual, you will find basic concepts that will help you to familiarize yourself with the alarm system during initial use and tips for handling it in different situations. You can use it as a reference document by searching in the index and instantly answering your queries in the “Frequently Asked Questions and Dictionary” section.

We remind you of the importance of installing the “My Verisure” App on your smart devices. This application will allow you to know what is happening in your home or business at all times, remotely control your alarm system, and call for help in any emergency - wherever you are - thanks to the Guardián Verisure service.

If you have any questions after reading this manual, please contact our Customer Service channels:

 My Verisure App chat

 info@securitasdirect.es

 [Chat del área de clientes de la web](#)

 910 121 122

Thanks for trusting us.



Index

Overview of your alarm system8

Your keys and contacts10

How to activate and deactivate your alarm14

What happens when your alarm goes off?.....16

How to ask for help at home18

Personal protection away from home.....20

Get to know your Control Panel22

Get to know your Sentinel Anti-jamming Alarm.....28

Get to know your Remote control30

Get to know your My Verisure App.....32

Maintaining and Using Your Alarm42

Frequently Asked Questions and Dictionary44



Overview of your alarm system

Deterrent Panels

Placed in outdoor areas, they deter intruders.

Sentinel Anti-Jamming Alarm



Protection against burglary with a frequency inhibitor. We also look out for your security by detecting possible risks and emergencies in your home or business while also monitoring temperature, humidity and air quality at all times.

Control Panel with 2-way communication, siren and smart keys



Located at the entrance, it allows you to easily arm and disarm your alarm by presenting the key, entering a code, or via the hands free remote control. You can also use the 2-way communication feature to talk to an ARC expert in the case of an emergency (more information on [page 22](#)).

Photo Detectors

Protects the interior of your home or business. When detecting motion, they activate and take a sequence of high-resolution images that are sent to our ARC where we verify the alarm trigger within seconds.

My Verisure App







Allows you to control the alarm, monitor activity and call for emergency assistance from anywhere thanks to Guardián Verisure (more information on [page 32](#)).

Remote Control



Control and change the alarm status or call for help in an emergency (more information on [page 30](#)).

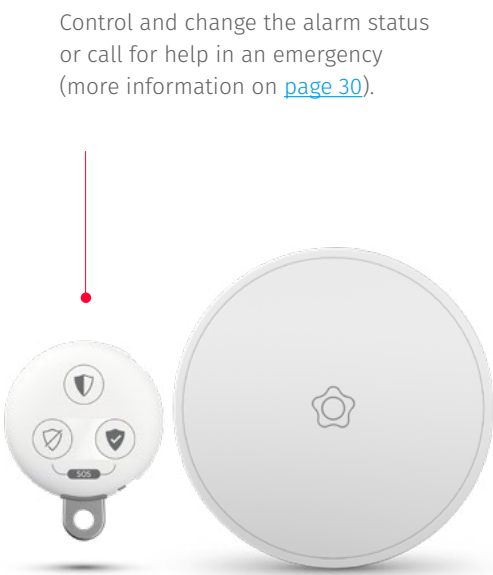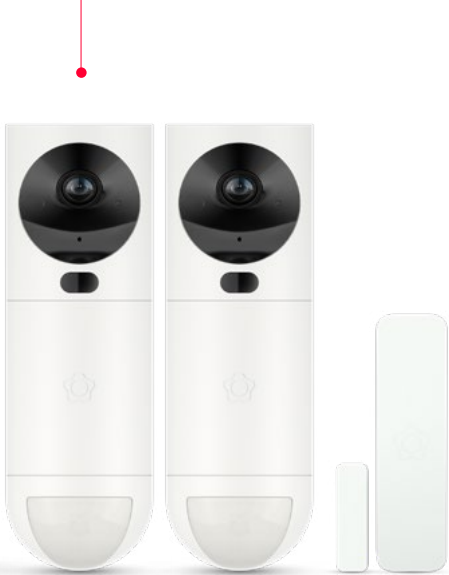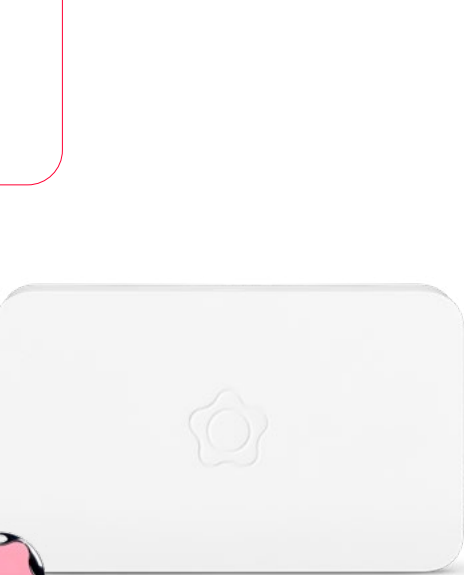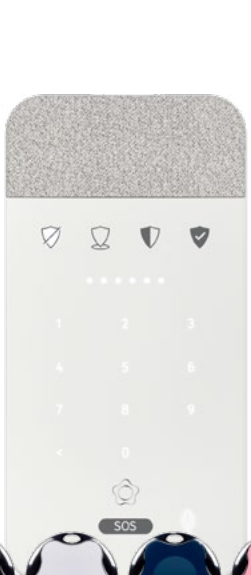

Elements with which the user interacts.



The SOS button works even when the alarm is switched off.

Central Unit

This device can be placed discreetly in the house, and has several secure communication channels with the rest of the alarm system. It is in charge of managing the alarm signals and sending them to our ARC.

Shock Sensors

Protect doors and windows thanks to a triple detection system, which is sensitive to openings, shocks, and vibrations. This allows us to detect the intruder before they enter the premises.

ZeroVision

Activated by one of our agents after they verify a real intrusion. The device releases a dense smoke that hinders the burglar's vision to prevent the theft.

All devices and components of the alarm systems marketed by Securitas Direct have been certified following the scheme accredited by the National Accreditation Entity (ENAC), after having undergone product testing and demanding manufacturing and follow-up audits.



Your keywords and contacts

These are the passwords and data you need to manage your alarm. We recommend that you memorize the passwords, familiarize yourself with their use and keep them in a safe place. Remember you can change both the user passwords and the people in your action plans at any time in the My Verisure App.

Codes

To arm and disarm your alarm in the Control Panel, you can identify yourself either with the smart key  or with your PIN.

PIN

This is the four-digit number that you will need to enter in the Control Panel to identify yourself when you arm or disarm your alarm, unless you use other devices such as a smart key, remote control or your My Verisure App.

Panic PIN


This is used to silently communicate to us that you are being coerced to disconnect your alarm. When entered into the Control Panel with the alarm connected, the alarm will be disconnected normally, but we will immediately trigger the security protocol to come to your aid. Your Panic PIN is your PIN number, except the last digit changes adding two units.

Example:
PIN: 1234/Panic PIN: 1236.
PIN: 1239/Panic PIN: 1231.

We recommend that you assign each user of the alarm (individuals living in the home or working in the business) a different PIN and a different smart key colour). This way you will be able to keep track in the My Verisure App when the alarm is armed and disarmed by each user. Each user with a PIN also has a Panic PIN.

We advise you to change the PIN supplied during installation for one of your choice:

In the App, click on the **<More>** section in the bottom menu and then in **<My system>** clickon **<Users>** where you can consult and modify them.

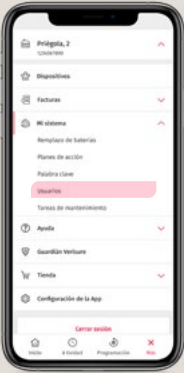

Keywords

Securitas Direct Keyword

If your alarm is triggered, this is the keyword by which the Securitas Direct agent will identify himself/herself when contacting you. It is used to prevent others from impersonating Securitas Direct during an incident.

Customer Keyword


This is the word you will have to respond with when we call you when the alarm goes off. Similar to the Securitas Direct keyword, it is used to let us know that no one is impersonating you during an incident.

Panic Keyword

Use this word instead of the “customer keyword” when someone is forcing you to disconnect the alarm under threat. When we call you after the alarm has gone off and we hear this word, we will know that you are in danger: we will disconnect the alarm and immediately alert the police to come to your aid, if necessary.

During the installation of your alarm system, we have provided you with some provisional keywords. We recommend you change them in your My Verisure App:

In the App, click on the **<More>** section in the bottom menu and then in **<My system>** click on **<Keywords>** where you can consult and change them.

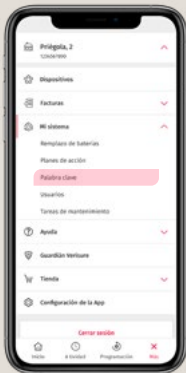

Your new keywords must meet these requirements:

- From 2 to 20 letters.
- No numbers.
- No special characters.
- No proper names.
- No crass/offensive words.
- No compound words.

Action Plan Contacts

General Action Plan Regular Contacts

These are the people we will usually call when your alarm is triggered or in case of an incident. This is the action plan that will always be activated by default.

Holiday Action Plan

These are the people we will call if your alarm goes off during periods when you are not available: holidays, business trips, etc. The main contact must also be included in the holiday action plan, although you can change the order. Whenever you wish, activate the holiday action plan in your My Verisure App and enter the date and time of your holidays.


Guardián Verisure Action Plan

The Guardián Verisure service protects you personally both inside and outside the home from emergencies and dangerous situations. The contacts in this plan are the people we will notify when you have an emergency, in addition to dispatching assistance if necessary.

Remember that the order in which we will call your contacts in the event of an incident is the same order in which they appear in your App.

You can replace the contacts and change the order whenever you want by logging in to your My Verisure App:

In the App, click on the **<More>** section of the bottom menu and then under **<My system>** click on **<Action plans>** where you can consult your contacts.

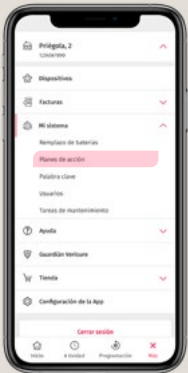

My Verisure Login and Password

My Verisure App Username

This is the name by which you will be identified each time you access the App.

My Verisure App Password

The App password must contain at least 6 characters, at least one uppercase letter, at least one lowercase letter and at least one number.



The username and password are the same for accessing the customer area of the website
www.customers.securitasdirect.es.



My Verisure



How to connect and disconnect your alarm?

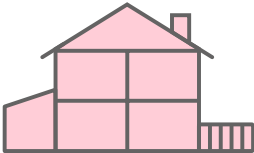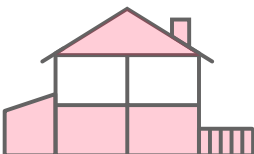		CONTROL PANEL	MY VERISURE APP	REMOTE CONTROL
	WHEN YOU LEAVE YOUR HOME OR BUSINESS Total Mode connection All devices are armed and your home or business is fully protected.		 Press the button 	 
	WHEN ENTERING YOUR HOME OR BUSINESS Disconnection All devices are disarmed so you can access and move freely throughout your home or business.		 Press the button  and then identify yourself*.	 
	WHEN YOU ARE AT HOME OR IN YOUR BUSINESS Partial Mode connection Only devices configured as Partial Mode are activated to protect certain areas of your home or business. You will be able to move freely within these areas without triggering the alarm. We recommend that you activate this option whenever you are inside your home or business.		 Press the button 	 
	WHEN YOU ARE AT HOME OR IN YOUR BUSINESS Outdoor Mode connection Only the perimeter devices are activated so only the outside area is under surveillance.		 Press the button 	 
	WHEN YOU NEED HELP SOS button When you are in an emergency situation and need help, send us an SOS and we will help you immediately. It works even with the alarm disarmed.	 Press the button  for 3 seconds (until all LEDs light up)		 Press both buttons   at the same time for 2 seconds


* You can identify yourself in your Control Panel in 2 ways:
1.  Hold your smart key close to the centre of the Control Panel. 2.  Enter your PIN.

What happens after an alarm trigger?

At Securitas direct, we are prepared to respond in seconds to any intrusion attempt or emergency. We respond to every alarm and activate the corresponding security protocol to guarantee your protection. Our experts watch over your security 24 hours a day, 365 days a year.


However, if you or another authorized user has unintentionally triggered the alarm, you don't have to worry: the system has enough time to disarm it (delay time*).

If an intruder is trying to break into your home or business...

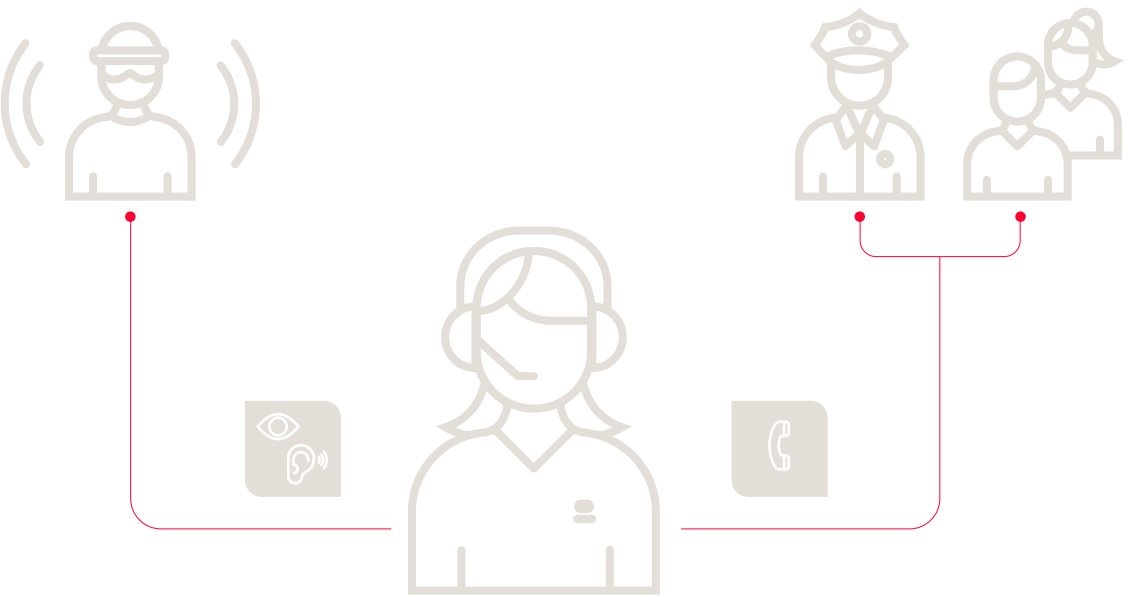

- 1 In seconds, a security expert from the Alarm Receiving Center performs an audio and image verification.
- 2 If we confirm an intrusion attempt, we immediately notify the police and call the first contact in your action plan to inform them of what is happening. If we are unable to locate them, we call the next contact in your action plan.

If you or another authorized user mistakenly set off the alarm...

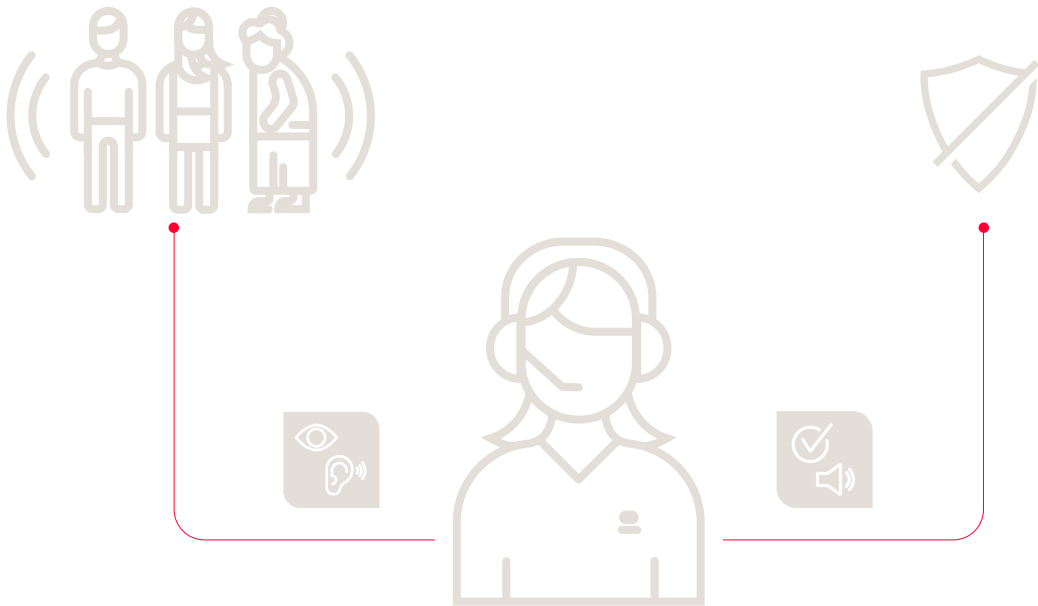

- 1 Within seconds, a security expert from the Alarm Receiving Center performs an audio and image verification.
- 2 If we confirm that no intrusion attempt has been made, we cancel the incident and inform you that your alarm has been disconnected correctly.

*See "Delay time" on [page 25](#) to learn how to customize your alarm reaction times.

How to ask for help at home

You might find yourself in need of help: if you are at your home or business and someone tries to break in, if you arrive at your property and see that someone has forced entry, or if you have an accident or medical emergency at home.


In situations like these, speed is key. That is why your Securitas Direct alarm has an SOS button on different devices, allowing you to call for help even if your alarm has been disarmed.

From our Alarm Receiving Center, our experts will assist you immediately, accompany you and notify emergency services (police, ambulance, fire department) if necessary.

Via Control Panel

Press the SOS button for 3 seconds until all indicator lights light up.

Our security experts will respond through the Control Panel speaker, while accessing the security cameras to verify the situation live.

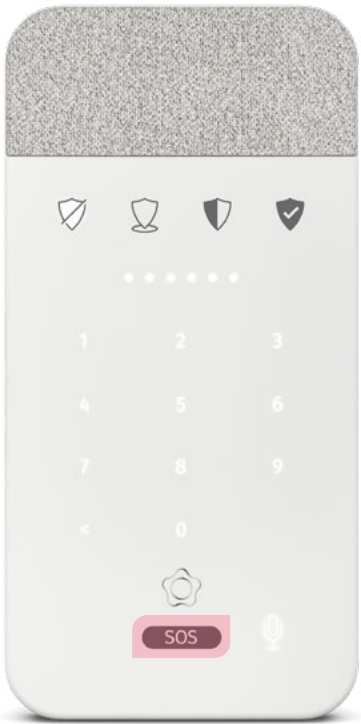

Via Sentinel Anti-Jamming Alarm

Press the SOS button until the message "Sending SOS" appears on the display.

We will immediately contact you through the Control Panel speaker.



Via Remote Control

Press the full connection and disconnection buttons at the same time for 2 seconds.

We will immediately contact you through the Control Panel speaker while we view the security cameras to identify the nature of the emergency.



On your mobile

Tap the SOS button on your mobile phone in the Guardián Verisure section of the My Verisure App.

At that time, we will receive the alert along with your exact location and notify the emergency services and your family members, and accompany you until help arrives.



Personal protection outside the home

Guardián Verisure


With the Guardián Verisure service, available in My Verisure App, we are there to protect you, outside your home or business. Once you have activated Guardián Verisure on your mobile (see “How to activate Guardián Verisure” on [page 38](#)), you have two modes:



SOS



WALK WITH ME

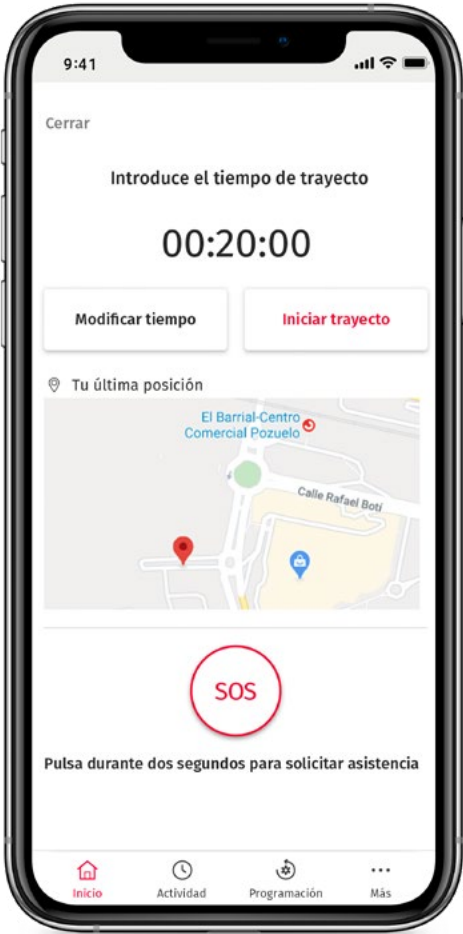

SOS Button Guardián Verisure

In case of an accident, fall or any other emergency, press the Guardián Verisure SOS button on your mobile phone and we will help you immediately from our Emergency Center.

- 1  Press the Guardián Verisure SOS button.
- 2  We receive the alert with your exact location.
- 3  We activate the emergency protocol and stay on the line with you.
- 4  We notify emergency services and your family.

Video tutorial:
[How to use Guardián Verisure SOS](#)



[Watch video](#)



[Watch video](#)

“Walk with me” by Guardián Verisure

If you are going to make a trip that you consider risky, you can activate this functionality in your mobile phone, indicating the estimated time of the trip. At Securitas Direct, we will receive periodic signals with your location in real time and, in case you do not confirm your arrival, we will activate the assistance protocol.

- 1  Define the estimated time to reach your destination.
- 2  We receive periodic notifications with your location.
- 3  If you do not confirm your arrival, we activate the emergency protocol.
- 4  We notify emergency services and your family.

Video tutorial:
[How to use Guardián Verisure Walk with me](#)



[Watch video](#)



[Watch video](#)

Get to know your Control Panel



SMART KEYS



- 1 SPEAKER AND SIREN
- 2 ALARM STATUS



Disconnection: all devices are disarmed.



Outdoor Mode connection: only the perimeter detectors of the house are armed.



Partial Mode connection: only detectors configured in Partial Mode are armed.

If you have perimeter detectors and you wish to connect your alarm in Partial Mode excluding the perimeters, press the button for 2 seconds (long press).



Total Mode connection: all detectors are armed.

If you have perimeter detectors and you wish to connect your alarm in Total Mode excluding the perimeter ones, press the button for 2 seconds (long press).

- 3 LIGHT INDICATORS
- 4 NUMERIC CONTROL PANEL AND KEY READER
- 5 CANCEL/DELETE
- 6 SOS BUTTON If you need immediate help, press and hold for 3 seconds until all LEDs light up.
- 7 LISTEN TO NOTIFICATIONS
- 8 MICROPHONE

To connect your alarm

- 1. Press the button of the alarm status you want to activate. 
- 2. A voice notification will sound to confirm the action performed.

We recommend that you activate your alarm on Partial mode or Outdoor mode to be protected when you are inside your home or business.

To disconnect your alarm

Follow the steps below:

- 1. Press the disconnection button 
- 2. Next, identify yourself. To do so, you have two options:
 -  **Option 1:** Hold your smart key close to the centre of the Control Panel.
 -  **Option 2:** Enter your PIN.
- 3. A voice notification will sound to confirm the action performed.



If you are forced to disconnect the alarm under threat, you can enter the Panic PIN instead of your usual PIN. The alarm will be disconnected, but we at Securitas Direct we will know that you are in danger and we will immediately notify the police to come to your aid, if necessary.

To check your alarm status

- 1. Move your hand closer to the icons of alarm status.
- 1. The current status icon lights up.



Delay Time

The alarm emits several beeps to warn you of the time interval you have to enter and exit your property without triggering your alarm.

Entry delay time: this is the number of seconds you have to disarm the alarm when entering your home before it goes off.

Exit delay time: the number of seconds you have to leave your home once the alarm has been set.

You can modify the length of this time delay in your My Verisure App.

Click on the **<More>** section in the bottom menu and then under **<Devices>** click on **<Device information>**.




Video tutorial: Discover how to use your alarm.

Light indicators

The light indicators on your Control Panel light up when you have issues pending review.

Incidents in the alarm system

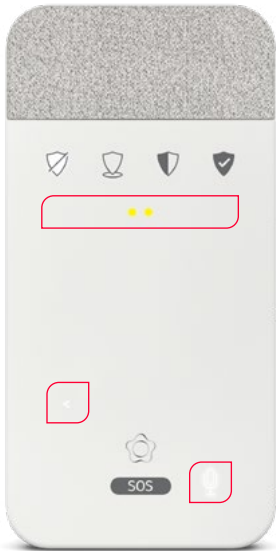


The two central yellow dots and the microphone icon light up. To listen to the notification, follow the steps below:

- 1. Press the microphone icon.
- 2. Identify yourself by tapping your smart key or entering your PIN.
- 3. Listen to the notification and follow the instructions to resolve the issue.
- 4. To delete the notification, press **“cancel/delete”** <.

The indicators will remain illuminated in yellow until the incident is resolved.

Incidents when connecting your alarm

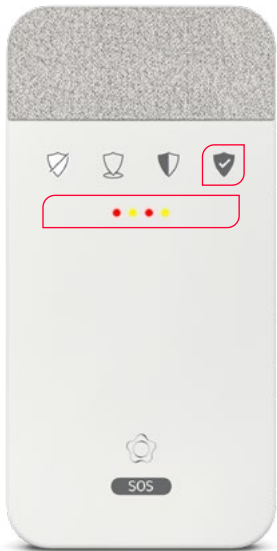


If the four central dots light up red and yellow after trying to arm your alarm, it means that an incident has been detected in the connections.

Listen to the notifications that start automatically, resolve the problem, and press the desired connection button again to arm your alarm correctly.

Voice notifications will inform you in the event that you are unable to turn on your alarm until the issue is resolved.

Incidents when disconnecting your alarm

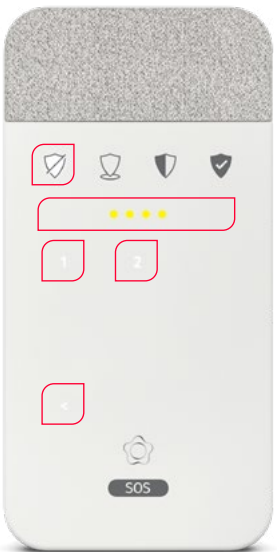

If the four central dots light up yellow after you have switched off your alarm, it means that an alarm was triggered while it was switched on.

The Control Panel will display the numbers associated with the devices that have been affected in the alarm trigger.

To confirm that you have been informed, press the **“cancel/clear”** button < and the indicator lights will go off.

Get to know your Sentinel Anti-jamming Alarm



 **JAMMING DETECTION:**
Capable of detecting and alerting our central station if a thief tries to block your alarm communication.

 **HUMIDITY:**
Monitoring of relative air humidity levels.

 **TEMPERATURE:**
Measurement and warning of temperature spikes and when comfort thresholds are exceeded.

 **AIR QUALITY:**
Immediate alert when air quality reaches levels not recommended for health.

GOOD 0 - 200	REGULAR 200 - 300	BAD 300 - 450
-----------------	----------------------	------------------

 **SOS:**
Includes an SOS button which you can use to contact us immediately in case of emergency.

Through your My Verisure App, you can set your own humidity and temperature alerts. You will receive a notification on your mobile phone when the humidity and/or temperature limits you set are exceeded.

Get to know your Remote Control



DISCONNECTION: all devices are disarmed.



PARTIAL MODE CONNECTION: only detectors in Partial Mode are activated.

If your alarm has perimeter devices, these will also be connected (you can exclude them by pressing and holding the )



TOTAL MODE CONNECTION: all detectors are armed.

If your alarm has perimeter devices and you do not wish to leave them connected, press and hold the button  when switching on the alarm.



IF YOU NEED IMMEDIATE ASSISTANCE:
press the  and  at the same time for 2 seconds.



TO LOCK THE REMOTE CONTROL:
slide the switch until a red stripe appears.

We recommend that you keep the remote control locked whenever you are not using it to avoid accidentally arming or disarming your alarm.



TO VIEW THE ALARM STATUS: Unlock the remote control by sliding the switch until the red stripe disappears.

How can I be sure that I have activated the desired option?
Each time you press a button on your remote control, the button lights up and the remote control emits a short vibration. This confirms that you have activated the desired option.

Use of the remote control is limited to the immediate vicinity of the property.

Learn about your My Verisure App

My Verisure is the application that we put at your disposal to control your Securitas Direct alarm system from your mobile phone or tablet, wherever you are. This innovative application allows you not only to arm and disarm the alarm, but also to request photos of what is happening in your home or business and to comfortably configure the whole system, including: contacts, invoice queries, user management... In addition, it also protects you when you are away from home with the SOS button and the Guardián Verisure “Walk with me” service.



My Verisure

How to install the My Verisure App on your mobile phone

1. Download My Verisure App here:



2. Enter your username and password.

Remember that the password must have:

- At least 6 characters
- At least 1 uppercase letter
- At least 1 lowercase letter
- At least 1 number

The username and password are the same as the ones you use to access the Client Area of the website www.customers.securitasdirect.es.

3. Click the <Enter> button

Secure access via facial recognition and fingerprint. Available for Android and iOS devices.



Home screen

The home screen contains the most important information about your alarm and gives you access to the main features of My Verisure, customized to each customer’s products and services.

1

Securitas Direct

Priégola 2, Madrid

Estado de alarma

Conectada

Desconectar

Otros modos

2

FOTOGRAFÍAS

Entrada

Hace 27 min.

Salón

Hace 27 min.

Galería de imágenes

3

CONFORT Y CLIMA

Cocina

Hace 28 min

Aire Buena

21,3°C

68,3%

Habitación

Hoy, 9:35

Aire Regular

23,2°C

68,3%

Salón

Hoy, 7:24

Aire Mala

21,3°C

68,3%

Madrid

Sol y nubes

21,3°C

87%

4

GUARDIÁN SECURITAS DIRECT

SOS

Para solicitar ayuda, mantener pulsado durante 2 segundos.

ACOMPÑAME

00:00:00

Pulsa para iniciar

5

LLAVES Y MANDOS

Hoy

11:48

Alarma conectada

Modo total

Por Jorge

9:17

Dispositivo desactivado

Llave verde

Por María desde iPhone

6

ATENCIÓN AL CLIENTE

Si tienes alguna duda, ponte en contacto con nosotros:

Chat

Envíanos un mensaje

7

Inicio

Actividad

Programación

Más

1

ALARM STATUS

Displays the mode in which your alarm is armed or disarmed at the moment.

To change it, click on the icon or on the <on/off> and <other modes> buttons.

2

PHOTOGRAPHS

See the latest pictures taken by the Photo Detectors and perimeter detectors of your alarm.

3

COMFORT AND CLIMATE

If you own the Sentinel Anti-Jamming Alarm, you can check the temperature, humidity and air quality of your home, and set alerts.

4

GUARDIÁN VERISURE

Request immediate help in any emergency by pressing the SOS button, or activate “Walk with me” for risky journeys.

5

KEYS AND CONTROLS

Check the last actions carried out by each smart key, PIN and remote control of your alarm.

6


CUSTOMER SERVICE

Direct access to the Customer Service channels to resolve any questions or incidents.

7

BOTTOM NAVIGATION MENU AND <MORE> MENU.

<More> menu

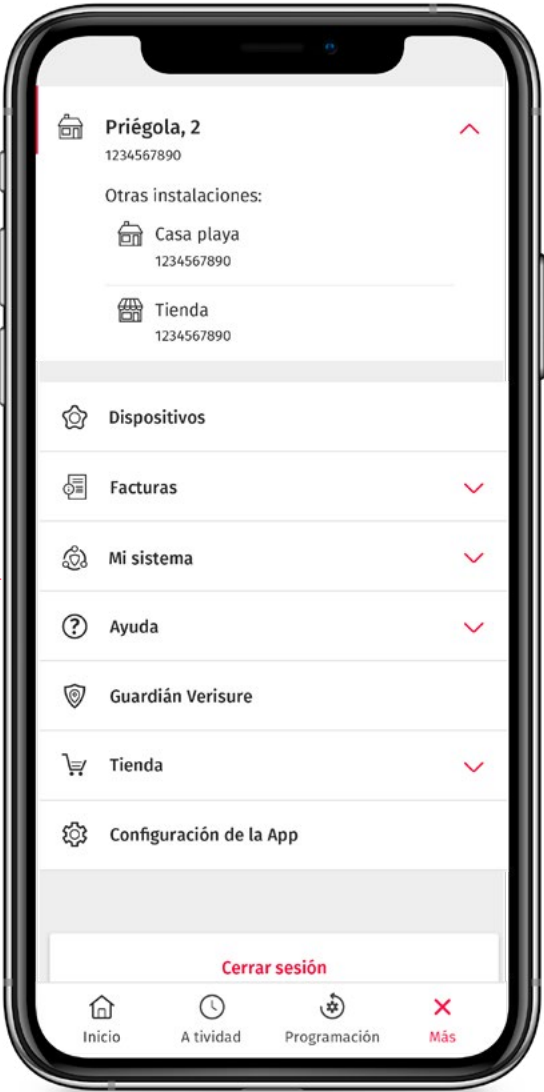

- 1

ADDRESS OF YOUR PREMISES

If you have Securitas Direct alarm systems in more than one home or business, you can choose here the one you want to manage.
- 2

DEVICES

Consult and manage your devices: access the functionalities of each service (video surveillance, photos, smart keys, delay times, remote controls...) and their configuration.
- 3

INVOICES

Here you can check and download your invoices for the last 24 months.
- 4

MY SYSTEM

Control all the configuration options of your security system: users, keywords, action plan contacts, Partial Mode configuration...
- 5

HELP

Directly contact our customer service channels and consult the user manuals.
- 6

GUARDIÁN VERISURE

Ask for immediate help via the SOS button in case of an emergency, or activate the “Walk with me” functionality before starting a risky journey.
- 7

ONLINE STORE

Discover the security innovations that can best help you increase your protection.
- 8

APP CONFIGURATION


Here you can customize the My Verisure App to suit your needs.

User management

With the My Verisure App, you are in control of your alarm, regardless of the number of people using it. You can easily add, delete or modify each user and their PIN, instantly deactivate any smart keys if lost, and know when the alarm is armed or disarmed and by whom.

How to register a new user?

- 

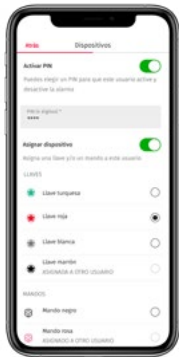1. Once you have accessed the App, click on the **<More>** section in the bottom menu and then in **<My system>**, click on **<Users>**.
- 

2. Enter the new user's details and enable tracking and notifications for their interactions with the alarm. Then click **<Next>** to set the level of alarm access that user will have.
- 

3. If you wish, you can assign each user a different PIN, a smart key and/or a remote control to keep track of their alarm arming and disarming actions.
- 

4. You can also give them access to the My Verisure App. To do this, create a name and password for each user so that each user can access the App from their own smart device.

How to activate Guardián Verisure?

1. Log in to the My Verisure App on your mobile device and then tap on the **<Guardián Verisure>** section.
2. Enable the service and accept the conditions.
3. Add your contact details and enter the verification code that you will receive by SMS.

Remember to allow access to your location whenever you are going to use Guardián Verisure. We need to access this functionality in case of emergency.

Video tutorial: How to activate Guardián Verisure on your mobile phone.



How to create a widget for Guardián Verisure on your home screen

For Android

- 1. Choose an empty area of your home screen and press for several seconds until a menu of options appears.
- 2. In the **<Widgets>** option, look for My Verisure. You will be given the option to create a short cut to the SOS service only. **SOS**, or to the two Guardián Verisure services (SOS and Walk with me).
- 3. Drag the icon of the desired option to an empty space on your home screen, preferably in an easy-to-find place.
- 4. Your direct access is now ready to request immediate assistance from Securitas Direct.



Video tutorial: Installing direct access on Android.
[Watch video](#)




For iOS

- 1. Slide your mobile home screen to the right. Then press the **<Edit>** option and then **<Customize>**.
- 2. Locate the Guardián Verisure icon and click on the **<Add>** button.
- 3. We recommend that you drag it to the first place.
- 4. Your direct access is now ready to request immediate assistance from Securitas Direct.



Video tutorial: Installing direct access on iOS.
[Watch video](#)

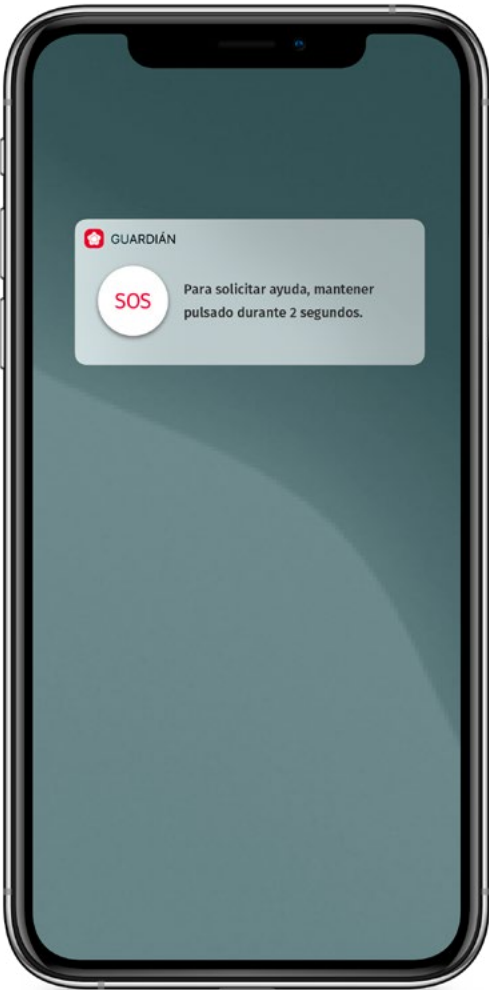

Maintenance and proper use of your alarm

At Securitas Direct, we check the operation of your alarm remotely, contacting you to resolve any maintenance needs that may arise. In this way, you can rest assured that the system is working properly at all times.

To assist us in this maintenance work, please make proper use of your alarm, taking into account the following recommendations:



Always keep the action plans up to date, as these are the contacts we will call in case of an incident or if the alarm goes off.



Before leaving your home, make sure that all doors and windows are securely closed.



If you are planning to carry out works in your home or business, please let us know in advance through Securitas Direct's contact channels.



Do not open, move or knock the devices of your alarm system, as they are tamper-protected and some are electrically hazardous. You should only open the devices if instructed to do so by Securitas Direct authorized personnel.




Do not cover the devices with curtains, furniture or other items that obstruct their field of vision.



Do not paint or decorate the devices with any other material.



Keep the devices clean using a dry cloth. Do not use water or detergent.




Do not place objects in the safety area of the ZeroVision device.

- Distance to ceiling: minimum 30 cm.
- Distance to ground: minimum 1 m. Maximum 2 m.
- Side distance: minimum 1 m
- Front distance: minimum 2.5m

In case of activation, the resulting residue does not damage the premises.

Can I throw away the devices at the end of their useful life?

In accordance with the Disposal of Waste Electrical and Electronic Equipment for Household Use, products identified with this symbol (crossed-out garbage can) must not be disposed of as household waste, but must be handed over at a collection point in the local community for recycling. It should not be mixed or disposed of with commercial waste. Improper handling poses risks to health or the environment. By reusing and recycling materials, Securitas Direct makes an important contribution to environmental protection.



LITHIUM BATTERIES

Risk of explosion and fire
When handling the battery, follow the following recommendations:

- Do not recharge the battery
- Do not hit, deform, perforate or disassemble it
- Do not expose it to temperatures higher than 60 °C.
- Do not incinerate

FAQ and dictionary

Operation and devices

When should I connect my alarm?

We recommend that you always connect your alarm. Your security system protects your home or business when you are away, and protects you and your family when you're inside.

- Connect it in Total Mode when you leave home, thus arming all devices and leaving your home completely protected.
- Connect it in Partial Mode when you are inside the house to keep the areas you want under surveillance, while being able to move freely without triggering the alarm.
- Connect it in Outdoor Mode when you are inside the house if your alarm has outdoor devices, thus leaving the outdoor area protected.

How do I arm my alarm when I leave home?

Remember to arm the alarm in Total Mode when no one is going to be at home. You can do this from any of the devices by pressing the Total Mode connection icon:

- At the Control Panel, just before leaving the house.
- From the remote control, when you have already left the house and are still at the door.
- Using the My Verisure App, you can also arm the alarm from your cell phone, wherever you are.

How long do I have to turn off the alarm before the siren goes off?

When you enter your home, you have a few seconds to turn off the alarm before it goes off. You can view and modify the delay time in the My Verisure App at any time (see section "Learn about your My Verisure App" on [page 32](#)).

How do I know that my alarm is working properly?

At Securitas Direct, we check up on the operation of your alarm remotely, contacting you to resolve any maintenance needs that may arise. In addition, the Control Panel has light indicators that will warn you of any incidents (see section "Incidents in the alarm system" on [page 26](#)):

- Yellow + Yellow + Yellow + Microphone: Warning of system incident.
- Red + Yellow + Yellow + Red + Yellow: Warning of connect incident.
- Yellow + Yellow + Yellow + Yellow + Yellow + Yellow: Warning of alarm trigger.

How can I view and modify the contacts in my action plans?

To review and modify the people we will alert under each action plan, log in to the My Verisure App, click on the <More> menu and then under <My System> click <Action Plans>, where you can manage each contact.

How do I order a smart key or a new remote control?

To request new devices, either due to loss or the addition of users, please contact Securitas Direct through the channel of your choice:

- Via the My Verisure App.
- By email to info@securitasdirect.es
- Via chat in the customer area of our website www.customers.securitasdirect.es
- By phone on 910 121 122

How can I know who has armed or disarmed my alarm?

To find out which users arm and disarm the alarm using their smart keys, access the My Verisure App, click <More> menu and then under <Devices> click <Keys and Remotes>, where you can see the last 2 activations.

You can also view all the activity for the last 6 months in the <Activity> button in the App.

How can I check my invoices?

To view and download your invoices for the last 24 months, log in to the My Verisure App, click <More> menu and then <Invoices>. If you would like us to send you invoices for previous periods, please contact us at:

- Via the My Verisure App.
- By email to info@securitasdirect.es
- Via chat in the customer area of our website www.customers.securitasdirect.es
- By phone on 910 121 122

Your privacy is protected

Who can see the images and videos recorded by my security cameras?

Only you can view the photos and videos through the My Verisure App, whenever and wherever you are. In the event of an alarm, a security expert from the Alarm Receiving Center will have access to the images as part of the verification process.

Why is it important to place deterrent signs on the façade and on the door?

The signs and stickers serve to differentiate the properties that are protected by Securitas Direct, the leading alarm company in Europe, and have a powerful deterrent effect that repels thieves and intruders.

What to do when...

What do I do if the alarm goes off when I am away from home?

Once the incident has been verified by our security experts, we will immediately notify the police and call the contacts you have defined in your action plans, indicating the steps to follow according to the nature of the incident.

What do I do if the alarm goes off by mistake?

If you or another user has forgotten to disarm the alarm upon arrival or has armed it by mistake, a warning tone will start sounding from the Control Panel. If no one disarms the alarm within the delay time, the alarm will be triggered and a security expert will verify what happened to activate the corresponding security protocol.

What do I do if I am in danger or facing a medical emergency inside my home or business?

Call for help by pressing the SOS button on the Control Panel, the Remote Control or your mobile phone, or on the Guardián Verisure SOS button. We will respond immediately and send the help you need: police, ambulance, fire department, etc.

What do I do if I am in danger or have a medical emergency away from home?

Press the Guardián Verisure SOS button on your mobile phone. We will automatically receive the distress signal and your exact location in our Central Station, and send the help you need to your location. If necessary, we will also notify your family or contacts in your action plan and accompany you until help arrives.

What do I do if someone forced me to disarm my alarm system?

It is very important that you always remember your Panic keyword and your Panic PIN, which you must use to let us know that you are disarming your alarm under threat. You can use them in two ways:

- Disarm the alarm on the Control Panel using the Panic PIN, instead of the usual PIN: the alarm will be disarmed but we will immediately activate the security protocol to send you protection.
- If the alarm is triggered, we will ask you by voice for your keyword. Use the Panic PIN instead of your keyword: we will turn off the alarm but, without mentioning it, will immediately activate the security protocol to send you protection.

What do I do if I lose or suspect that my smart key, remote control or keywords have been stolen?

Access to My Verisure App to deactivate your smart keys and remote control. Also you can change your keywords.

If you need another smart key or remote control, please contact us through any of the following channels:

- Via the My Verisure App.
- By email to info@Securitasdirect.es
- Via chat in the customer area of our website www.customers.securitasdirect.es
- By phone on 910 121 122

Securitas Direct dictionary

A

Action Plan

These are the people chosen by the client to be called by Securitas Direct if the alarm is triggered or in case of an incident, depending on the action plan to which they are assigned (General, Holidays, Guardián Verisure).

Alarm Trigger

This is the signal we receive in our ARC when there is an intrusion attempt in a client’s property. Our security experts verify the situation and activate the corresponding action protocol.

ARC

Securitas Direct’s Alarm Receiving Center, where security experts receive alarm signals from our customers and activate the corresponding security protocols.

Authentication or Identification

How we confirm the identity of a customer or user when arming and disarming the alarm. This can be done via the smart key, or by entering the PIN.

C

Central Unit

The device of your alarm system that receives the signals from all other devices and sends them to Securitas Direct’s Alarm Receiving Center.

Connection in Partial Mode

This is the alarm mode in which only the devices chosen by the user are connected to keep certain areas of the home under surveillance while people can move freely around them without triggering the alarm.

Connection in Perimeter or Outdoor Mode

This is the alarm mode in which only the perimeter devices are connected, so that only the area outside the home is monitored.

Control Panel

The device that is located inside the home next to the entrance door, and allows you to arm and disarm the alarm, talk and listen to the experts of our ARC in case of an incident, and request help in case of an emergency through the SOS button.

D

Delay times

These are the seconds the user has to leave the house when the alarm is switched on when leaving (exit delay time) or to disarm when entering the house (entry delay time) before the alarm is triggered. During this time the Control Panel beeps to indicate that the alarm is armed. The number of seconds can be modified in the My Verisure App.

G

Guard service

This is the service of sending a guard to the client’s property when a lack of protection is suspected, or if on-site verification is necessary after an alarm has been triggered.

**Service not available in: Cuenca, Huesca, Soria, Teruel, Ceuta, Melilla and the islands of La Gomera, El Hierro and La Palma.*

Guardián Verisure

The personal protection service to safeguard customers when away from home, available through the My Verisure App.

K

Keywords

These are the words required by Securitas Direct when an alarm is triggered. They are used to confirm the customer’s identity to ensure maximum security during communication.

N

Numeric Control Panel

The central part of the Control Panel where the numbers are illuminated to enter the PIN, or where the smart key is held up for identification when arming or disarming the alarm.

P

Panic PIN

This is the same as the PIN except the last digit changes to the next number in ascending order. It is for the user to inform us silently that they are being coerced into disconnecting the alarm, in which case we proceed to activate the security protocol.

PIN

The four-digit numerical code with which each user must identify himself/herself when arming and disarming the alarm.

Photo-petition

The request for images by the alarm system’s cameras, which the user can perform through the My Verisure App.

S

Smart Key

The keychain device used by each user to identify himself/herself when arming or disarming the alarm at the Control Panel.

Speak-Listen

The functionality of some Securitas Direct devices by which the user can talk to a security expert at our ARC.

SOS Signal

This is the signal we receive in our ARC when a user requests urgent help in an emergency situation. It is a priority signal.

Shock Sensor

The technology used in our access detectors thanks to which they detect shocks, vibrations and openings.

U

Users

These are the individuals authorized by the customer to arm, disarm, and or manage the alarm.

W

Walk with me

The Guardián Verisure functionality by means of which the user indicates that they are going to make a risky trip, so Securitas Direct can follow their location along the way and activate the action protocol if the user does not confirm their arrival.

Widget

Direct access to an application from the home screen of a mobile phone. In the case of Guardián Verisure, the user can install widgets for the two functionalities (SOS and “Walk with me”).

24-hour customer service:

-  My Verisure App chat
-  info@securitasdirect.es
-  [Customer area website chat](#)
-  910 121 122