



Instruction Manual

In this instruction manual, BT-W300 Series means the BT-W300/W300G/W300GM/W300GI and the BT-W350/W350G/W350GM/W350GI/W350GN/W370/W370G and BT-W200 Series means the BT-W200/W200G/W200GM/W200GI and the BT-W250/W250G/W250GM/W250GI/W250GN.

	Indicates a hazardous situation which, if not avoided, will result in death or serious injury.
	Indicates a hazardous situation which, if not avoided, could result in death or serious injury.
	Indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.
	Indicates a situation which, if not avoided, could result in product damage as well as property damage.

- IEEE802.11a/b/g/n Wireless LAN standards established by 802 committee which has designed standards of LAN technology in IEEE (Institute of Electrical and Electronics Engineers).
- Bluetooth® wordmark and logo belong to Bluetooth SIG, Inc. and KEYENCE uses them under license. Other trademarks or trade names belong to each owner.
- microSD™ is a trademark of SD Card Association.
- Microsoft, Windows, Internet Explorer and Visual Studio are registered trademarks or trademarks of Microsoft Corporation in the United States and other countries.
- The official name for Windows is "Windows® operating system".
- ARM (Armv7) is a trademark and registered trademark of ARM Limited in EU and other countries.
- Other company names or product names described in this manual are registered trademarks or trademarks of each company.
- It is prohibited to use or copy all or any part of this manual without prior approval.
- The information contained in this manual is subject to change without notice.

	Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.
	• Do not disassemble this product. Laser emission from this product is not automatically stopped when it is disassembled.
	WARNING
	Class 2 Laser Product • Do not stare into the direct or specularly reflected beam. • Do not direct the beam at other people or into areas where other people unconnected with the laser work might be present. • Be careful of the path of the laser beam. If there is a possibility that the operator may be exposed to the specular or diffuse reflections, block the beam by installing a protective enclosure. • Install this product so that the path of the laser beam is not as the same height as that of human eye.

Item	BT-W300/W300G/W300GM/W300GI BT-W200/W200G/W200GM/W200GI	BT-W350/W350G/W350GM/W350GI W350GN/W370/W370G BT-W250/W250G/W250GM/W250GI/ W250GN
Wavelength	650 nm	657 nm
Output	1.0 mW	1.0 mW
Laser class	Class 2 laser product (IEC60825-1)	Class 2 laser product (IEC60825-1)

Diagram illustrating the back of the device with labels:

- Included label
- (Laser emission part)
- Warning/explanation label

W250GN

Scanner (Laser emission part)

Included label

Warning/explanation label

レーザ光 注意：681nm
ビームをのぞき込まないこと 出力：1.2mW
クラス2レーザ製品 JIS C 6802 2004

* Depending on the country/region in which the product is used, affix the included warning/explanation label in the position shown in the figure for the included label.

	- Do not use this product for the purpose of protecting a human body or a part of human body. - This product is not intended for use as an explosion-proof product.
	Do not use this product in a hazardous location and/or potentially explosive atmosphere.
	Do not use this product in an application that may cause death, serious injury or serious property damage due to a failure with this product should occur, such as nuclear power plants, on aircraft, trains, ships, vehicles, used with medical equipment, playground equipment, roller coasters and other rides, etc.

WARNING • If the equipment is used in a manner not specified by the manufacturer, the protection provided by the equipment may be impaired.

 **CAUTION**

- Be sure to check that this product performs properly before starting the work or operation.
- If this product malfunctions, take adequate safety precautions to prevent various types of damage.
- Do not use this product in a manner not specified herein. It may result in fire, electric shock or malfunction.

- Do not modify this product or use it in any way other than described in the specifications. Otherwise, the functions and performance cannot be guaranteed.
- The LCD panel may generate microscopic spots (black/bright spot), uneven brightness or crosstalk (phenomenon that non-existent lines or patterns are displayed), depending on the conditions.
- If the same display remains on the screen for a long time, afterimage may occur due to the characteristics of LCD.

WARNING • Using batteries other than BT-B5 may cause fire or explosion. Be sure to use the specified battery.

- Never use the rechargeable battery pack with devices other than those specified. If used with devices of which using conditions are different, the rechargeable battery pack may deteriorate earlier than expected or the devices may be damaged.
- Use an AC power supply cord that coincides the shape of plug used in each country. Also, check that the cord is compliant with regulations and standards in each country.

Disposal methods of lithium ion battery differ among countries and regions. Follow the instructions in your area.

When disposing of lithium ion batteries, remaining capacity may cause heat generation, explosion or fire due to contact with other metals. Be sure to cover the positive and negative terminals with adhesive insulation tape.

WARNING Remove the main battery of the BT-W300/W200 Series near locations where using wireless devices is banned at medical institutions or near electric devices for medical purposes. Carry and use the product away from an implanted cardiac pacemaker.

Important

- * The BT-W300G/W300G/W300GM/W350G/W350G/W350GM/W350GN/W370G/W200G/W200GM/W200GM/W250G/W250GM/W250GM/W250GN uses the radio waves of the 5 GHz band. BT-W300G/W350G/W370G/W200GM can also use the 2.4 GHz band (W52: 36, 40, 44, 48 ch, 5.2 GHz band (W51: 52, 56, 60, 64 ch), and 5.6 GHz band (W56: 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140 ch). The BT-W300G/W300GM/W350G/W350GM/W350GN/W370G/W200G/W200GM/W250G/W250GM/W250GN can use the 5.2 GHz band (W52: 36, 40, 44, 48 ch) and 5.3 GHz band (W53: 52, 56, 60, 64 ch). Using 5.2GHz band (W52) and 5.3 GHz band (W53) outdoors is prohibited by Radio Act. (BT-W300G/W350G/W250G/W250GM do not use the 5.3 GHz band.)

- Depending on the environment, communication may be impossible. Check the communication availability before using.

- If this product is used near devices with the same frequency band, such as a wireless LAN device, microwave oven, heating equipment for industrial use, high-frequency equipment for medical use, etc., radio wave interference may occur and the communication speed will become slow or communication may become impossible.

- If a wireless LAN and Bluetooth are used at the same time, radio wave interference may occur and the communication speed will become slow or communication may be interrupted. If there is communication failure, stop using either the wireless LAN or Bluetooth

- Communication may be impossible at locations near metallic objects, locations surrounded with metallic walls or where there is a lot of metallic powder.
- With the frequency band for this unit, premise radio stations (license required), specified low power radio stations (license not required) and amateur radio stations (license required) for identifying mobile objects used for industrial, scientific and medical equipment or factory production lines are operating.
 1. Before using this unit, be sure to check that premise radio stations, specified low power radio stations and amateur radio stations for identifying mobile objects are not operating in the vicinity.
 2. If radio wave interference occurs from the this unit against premise radio stations for identifying mobile objects, change

the usable frequency immediately or stop the electric wave generation, and then contact the below phone number in regard to taking necessary measures (e.g. setting a partition) to avoid interference.

[Thai] BT-W300G/W350G/W370G/W200G/W250G only
This telecommunication equipment is in compliance with NBTC requirements.

[Singapore] BT-W300G/W300GM/W350G/W350GM/W370G/ W200G/
W200GM/W250G/W250GM only
This telecommunication equipment is in compliance with the
regulation requirement for Singapore.

**Complies with
IMDA Standards
DA104049**

WARNING	Remove the main battery of the BT-W300/W200 Series near locations where using wireless devices is banned at medical institutions or near electric devices for medical purposes. Carry and use the product away from an implanted cardiac pacemaker.
--	--

- Depending on the environment, communication may be impossible. Before starting actual operation, be sure to test the operation.
- If this product is used near devices with the same frequency band, such as a wireless LAN device, microwave oven, heating equipment for industrial use, high-frequency equipment for medical use, etc., radio wave interference may occur and the communication speed will become slow or communication may become impossible.
- If a wireless LAN and Bluetooth are used at the same time, radio wave interference may occur and the communication speed will become slow or communication may be interrupted. If there is communication failure, stop using either the wireless LAN or Bluetooth.
- Communication may be impossible at locations near metallic objects, locations surrounded with metallic walls or where there is a lot of metallic powder.
- Possible communication distance is approx. 10 m of vision, however, even within 10 m, communication may become impossible depending on the environment. Check the communication availability before using.
- With the frequency band for this unit, premise radio stations (license required), specified low power radio stations (license not required) and amateur radio stations (license required) for identifying mobile objects used for industrial, scientific and medical equipment or factory production lines are operating.
 1. Before using this unit, be sure to check that premise radio stations, specified low power radio stations and amateur radio stations for identifying mobile objects are not operating in vicinity.
 2. If radio wave interference occurs from the this unit against premise radio stations for identifying mobile objects, change the usable frequency immediately or stop the electric wave generation, and then contact the below phone number in regard to taking necessary measures (e.g. setting a partition) to avoid interference.

[Thai] BT-W300G/W350G/W370G/W200G/W250G only
This telecommunication equipment is in compliance with NBTC requirements.

[Singapore] BT-W300G/W300GM/W350G/W350GM/W370G/ W200G/
W200GM/W250G/W250GM only
This telecommunication equipment is in compliance with the
regulation requirement for Singapore.

**Complies with
IMDA Standards
DA104049**

NOTICE	• Use or store this product within the temperature range described in "Specifications" (4 page). Do not leave the product inside a closed car or at a place exposed to direct sunlight. Doing so may damage the unit or change its reading performance. If you find that it becomes difficult to perform reading, execute "camera calibration" in the system menu.
	• Use within the humidity range described in "Specifications" (4 page). Do not use the product at locations where condensation occurs due to the rapid temperature change. Doing so may damage the unit or change its reading performance.
	• This is a precision instrument. Dropping this product or subjecting it to shock may cause damage. Be careful when carrying or using this unit.
	• Do not place the BT-W300/W200 Series in a location with high humidity or a dusty area. Doing so may damage the unit or change its reading performance.
	• The BT-W300/W350/W370/W200/W250 has been designed and manufactured to be used only in Japan. Do not use outside Japan.

Do not insert a sharp object such as a needle into the buzzer hole on the back side of the BT-W300/W200 Series. The tarpaulin may be damaged.

Precautions for proper use


■ Handling of packing

- The BT-W300/W200 Series has an enclosure rating of IP64, however, if the "battery attachment cover" is not properly attached, these enclosure ratings cannot be guaranteed. When using in environments where water or dust is present, check if these are properly attached.
- Dropping the BT-W300/W200 Series or subjecting it to extreme shock may lead to the loss of water-proofing.


Cleaning

Clean the following parts with air blow periodically.
If removing dirt is difficult, use a cotton swab to clean the terminals directly.
(Use absolute ethanol if dirt is stuck on them.)
Remove the battery attachment cover before cleaning the battery terminal.


BT-W300/W300G/W300GM/W300GI



BT-W370/W370G



BT-W200/W200G/W200GM/W200GI




- If dirt or dust is attached, contact failure may occur on the battery/charging/communication terminals. This may cause charging function to deteriorate and instantaneous interruption.
Make sure that waste textile is not attached to the battery/charging/communication terminals when cleaning.


Checking the Package

When opening the package, check the following items are all included.
If there is something missing, product failure or damage, contact your nearest KEYENCE sales office.


■ BT-W300/W300G/W300GM/W300GI/W350/W350G/W350GM/W350GI/W350GN

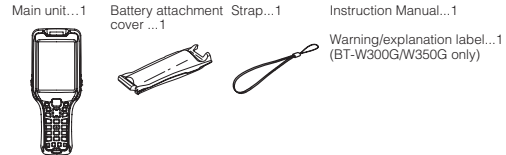

■ BT-W370/W370G

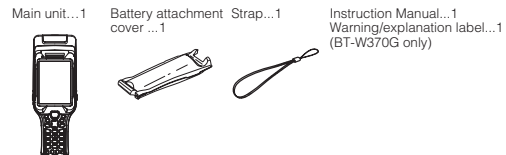

■ BT-W200/W200G/W200GM/W200GI/W250/W250G/W250GM/W250GI/W250GN

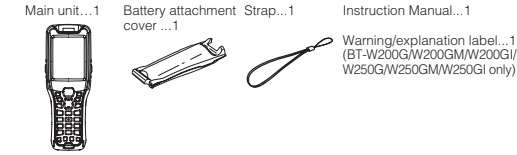

▶ Important BT-W300/W350/W370/W200/W250 can be used only in Japan.

Specifications

● BT-W300 Series

Item		Specifications	
Model		BT-W300/ W300G/ W300GM/ W300GI	BT-W350/ W350G/ W350GM/ W350GI/ W350GN
Type		Laser type	Camera type
Controller	CPU	ARM Cortex® Triple Core	
	OS	Microsoft® Windows® Embedded Compact 7	
	RAM	512 MB (disk area: 32 MB)	
	ROM	512 MB (disk area: 222 MB) flash-ROM	
Display	LCD	Display method	3.5-inch transmissive TFT color LCD, VA method
		Resolution (number of dots)	480 (W) × 640 (H) (VGA)
		Number of display colors	65,536
	Font	MS P Gothic, MS UI Gothic, MS Gothic, Segoe UI, Courier New, Symbol,Tahoma, Times New Roman, Wingdings	
		* Simsun and Nsimun need to be installed	
Operation confirmation LED	3-color LED		
	(red, green, blue, yellow, cyan, magenta, white)		
	Analogue resistive-film method (reinforced glass specifications)		
	High-intensity white LED		
Touch panel	Set of arrow keys × 1 (4 directions), trigger keys × 3 (center × 1, side × 2), function keys × 8 (F1 key, F2 key, F3 key, F4 key, Fn key, Tab key, character key, SFT key), data input keys × 14 (0 to 9 keys, ENT key, clear key, minus key, symbol key), power key × 1		
	3-color LED		
	(red, green, blue, yellow, cyan, magenta, white)		
	Analogue resistive-film method (reinforced glass specifications)		
Hard keys	Type	Set of arrow keys × 1 (4 directions), trigger keys × 3 (center × 1, side × 2), function keys × 8 (F1 key, F2 key, F3 key, F4 key, Fn key, Tab key, character key, SFT key), data input keys × 14 (0 to 9 keys, ENT key, clear key, minus key, symbol key), power key × 1	
		3-color LED	
		(red, green, blue, yellow, cyan, magenta, white)	
		Analogue resistive-film method (reinforced glass specifications)	
Backlight	LED (orange)		
	High-intensity white LED		
	Visible semiconductor laser (657 nm)		
	Output 1.0 mW Class 2 laser product (IEC60825-1)		
Reading light source	Visible light semiconductor laser (650 nm)		
	Output 1.0 mW Class 2 laser product (IEC60825-1)		
	High-intensity white LED		
	Visible semiconductor laser (657 nm)		
Pointer light source	-		
	Output 1.0 mW Class 2 laser product (IEC60825-1)		
	100 scans/second		
	-		
Scanning rate	100 scans/second		
	-		
Minimum resolution	0.127 mm		
	2D code: 0.127 mm		
	Barcode: 0.076 mm		
	-		
Reading distance	10 to 1250 mm (narrow bar width 0.508 mm) 5 to 630 mm (narrow bar width 0.25 mm)	30 to 840 mm (CODE39 narrow bar width 0.508 mm) 25 to 450 mm (CODE39 narrow bar width 0.254 mm) 30 to 480 mm (QR cell size 0.508 mm) 25 to 280 mm (QR cell size 0.254 mm)	0 to 700 mm (CODE39 narrow bar width 0.508 mm) 0 to 360 mm (CODE39 narrow bar width 0.254 mm) 0 to 380 mm (QR cell size 0.508 mm) 25 to 200 mm (QR cell size 0.254 mm)
		124 x 76 mm (Reading distance 130 mm) 40 x 24 mm (Reading distance 10 mm)	
		124 x 76 mm (Reading distance 130 mm) 40 x 24 mm (Reading distance 10 mm)	
		124 x 76 mm (Reading distance 130 mm) 40 x 24 mm (Reading distance 10 mm)	
Reading width · Field range	-		
	-		
	-		
	-		
PCS	0.45 or more (reflection rate of space part 70% or more)		
	-		
	-		
	-		
Supported codes	JAN/EAN/UPC (add-on code support), CODE128, GS1-128, CODE39, NW-7 (Codabar), CODE93, ITF, 2of5 (Industrial 2of5), GS1 DataBar		JAN/EAN/UPC (add-on code support), CODE128, GS1-128, CODE39, NW-7 (Codabar), CODE93, ITF, 2of5 (Industrial 2of5), QR, Micro QR, DataMatrix (ECC200), PDF417, GS1 DataBar, Composite

Item		Specifications	
Wireless communication	Wireless standards	BT-W300/W350/W370: IEEE802.11a/b/g/h BT-W300G/W300GM/W350G/W350GM/W350GN/W370G: IEEE802.11a/b/g/h BT-W300GI/W350GI: IEEE802.11b/g/h	
		BT-W300/W350/W370: 2.4 GHz (b: 1 to 14ch / g, n: 1 to 13ch) 5.2 GHz, 5.3 GHz, 5.6 GHz (a / n) *W52/W53 can only be used indoors. BT-W300G/W300GM/W350G/W350GM/W350GN/W370G: 2.4 GHz (b, g, n: 1 to 13ch) 5.2 GHz, 5.3 GHz(a/h) BT-W300GI/W350GI: 2.4 GHz (b, g, n: 1 to 13ch)	
	Radio frequency	Security: WEP (64/128bit)/WPA/WPA2 WPA encryption method: TKIP/AES Authentication method: PSK/EAP-TLS/PEAP-MSCHAP-V2	
		Bluetooth® V2.1 +EDR	
External recording media	Supported media	microSD or microSD (SDHC)	
		32 GB max.	
	Supported capacity	32 GB max.	
		32 GB max.	
Power supply	Main battery	Type	Dedicated lithium ion battery pack
		Capacity	3250 mAh
	Continuous usage time ²	Charge mode 1	Approx. 19 hours
		Charge mode 2	Approx. 22 hours
Backup battery	Clock	Approx. 19 hours	Approx. 18 hours
		Approx. 22 hours	Approx. 21 hours
	RAM data	Approx. 19 hours	Approx. 18 hours
		Approx. 22 hours	Approx. 21 hours
Others	Charging time		Approx. 8.0 hours (ambient temperature)
	Clock		Built-in lithium secondary battery approx. 1 month ³
	RAM data		Electric double layer capacitor approx. 1 minutes ³
	Buzzer		Scale: 16 levels, Volume: 3 levels
Environmental resistance	Vibration function		Available
	Calendar/clock		Automatic calendar (year, month, day, hour, minute, second; up to year 2079), accurate within 80 seconds per month (normal temperature)
	Enclosure rating		IP64
	Drop resistance ⁴		Onto concrete from 2.0 m (from 3.5 m with protector); Up to 20000 impacts from 30 cm
EMI	Ambient operating temperature ⁵		-20 to +50°C (no freezing)
	Ambient operating humidity		20 to 85% RH (no condensation)
	Ambient storage temperature		-20 to +60°C (no freezing)
	Ambient storage humidity		20 to 85% RH (no condensation)
Dimensions	VCCI Class A		
	193 × 75.2 × 38.5 (30.3) mm (The value in parenthesis is the grip dimension.)		218 × 75.2 × 54.2 (30.3) mm (The value in parenthesis is the grip dimension.)
	Approx. 259 g (with rechargeable battery pack attached)		Approx. 256 g (with rechargeable battery pack attached)
	Approx. 295 g (with rechargeable battery pack attached)		Approx. 295 g (with rechargeable battery pack attached)
Weight	Hand strap		
	Hand strap		
	Hand strap		
	Hand strap		

* BT-W300/W350/W370 can be used only in Japan.

¹ Activation of a separate license is required to enable character recognition. Refer to the manual for character recognition specifications.

² This is the continuous usage time with the operation confirmation LED and vibration function turned off, with the buzzer turned on (with low volume), with the backlight turned on (with low luminance), at normal temperature, and when barcode reading is performed and round trip wireless communication is made once per 20 seconds.

³ When the main battery is not attached or has no remaining charge.

⁴ This is a test value. The value is not guaranteed.

⁵ In a low-temperature environment, the lithium ion battery's continuous usage time decreases. Be sure to check operations before using the product.

● BT-W200 Series

Item		Specifications	
Model		BT-W200/W200G/ W200GM/W200GI	BT-W250/W250G/ W250GM/W250GI/ W250GN
Type		Laser type	Camera type
Controller	CPU	ARM Cortex® Triple Core	
	OS	Microsoft® Windows® Embedded Compact 7	
Main memory	RAM	512 MB (disk area: 32 MB)	
	ROM	512 MB (disk area: 222 MB) flash-ROM	
Display	LCD	Display method	2.7-inch transmissive TFT color LCD, VA method
		Resolution (number of dots)	240 (W) × 320 (H) (QVGA)
		Number of display colors	65,536
	Font	MS P Gothic, MS UI Gothic, MS Gothic, Segoe UI, Courier New, Symbol, Tahoma, Times New Roman, Wingdings	
		* Simsun and Nsimun need to be installed	
Backlight	High-intensity white LED		
	High-intensity white LED		
	High-intensity white LED		
	High-intensity white LED		
Operation confirmation LED	3-color LED		
	(red, green, blue, yellow, cyan, magenta, white)		
	Analogue resistive-film method (reinforced glass specifications)		
	High-intensity white LED		
Touch panel	Set of arrow keys × 1 (4 directions), trigger keys × 3 (center × 1, side × 2), function keys × 8 (F1 key, F2 key, F3 key, F4 key, Fn key, Tab key, character key, SFT key), data input keys × 14 (0 to 9 keys, ENT key, clear key, minus key, symbol key), power key × 1		
	3-color LED		
	(red, green, blue, yellow, cyan, magenta, white)		
	Analogue resistive-film method (reinforced glass specifications)		
Hard keys	Type	Set of arrow keys × 1 (4 directions), trigger keys × 3 (center × 1, side × 2), function keys × 8 (F1 key, F2 key, F3 key, F4 key, Fn key, Tab key, character key, SFT key), data input keys × 14 (0 to 9 keys, ENT key, clear key, minus key, symbol key), power key × 1	
		3-color LED	
		(red, green, blue, yellow, cyan, magenta, white)	
		Analogue resistive-film method (reinforced glass specifications)	
Backlight	LED (orange)		
	High-intensity white LED		
	Visible light semiconductor laser (650 nm)		
	Output 1.0 mW Class 2 laser product (IEC60825-1)		
Reading light source	Visible light semiconductor laser (650 nm)		
	Output 1.0 mW Class 2 laser product (IEC60825-1)		
	High-intensity white LED		
	Visible light semiconductor laser (657 nm)		
Pointer light source	-		
	Output 1.0 mW Class 2 laser product (IEC60825-1)		
	100 scans/second		
	-		
Scanning rate	100 scans/second		
	-		
Minimum resolution	0.127 mm		
	2D code: 0.127 mm		
	Barcode: 0.076 mm		
	-		
Reading distance	10 to 1250 mm (narrow bar width 0.508 mm) 5 to 630 mm (narrow bar width 0.25 mm)	30 to 840 mm (CODE39 narrow bar width 0.508 mm) 25 to 450 mm (CODE39 narrow bar width 0.254 mm) 30 to 480 mm (QR cell size 0.508 mm) 25 to 280 mm (QR cell size 0.254 mm)	0 to 700 mm (CODE39 narrow bar width 0.508 mm) 0 to 360 mm (CODE39 narrow bar width 0.254 mm) 0 to 380 mm (QR cell size 0.508 mm) 25 to 200 mm (QR cell size 0.254 mm)
		124 x 76 mm (Reading distance 130 mm) 40 x 24 mm (Reading distance 10 mm)	
		124 x 76 mm (Reading distance 130 mm) 40 x 24 mm (Reading distance 10 mm)	
		124 x 76 mm (Reading distance 130 mm) 40 x 24 mm (Reading distance 10 mm)	
Reading width · Field range	-		
	-		
	-		
	-		
PCS	0.45 or more (reflection rate of space part 70% or more)		
	-		
	-		
	-		
Supported codes	JAN/EAN/UPC (add-on code support), CODE128, GS1-128, CODE39, NW-7 (Codabar), CODE93, ITF, 2of5 (Industrial 2of5), GS1 DataBar		JAN/EAN/UPC (add-on code support), CODE128, GS1-128, CODE39, NW-7 (Codabar), CODE93, ITF, 2of5 (Industrial 2of5), QR, Micro QR, DataMatrix (ECC200), PDF417, GS1 DataBar, Composite

Item		Specifications		
Wireless communication	Wireless standards	BT-W200/W250: IEEE802.11a/b/g/n BT-W200G/W200GM/W250G/W250GM/W250GN: IEEE802.11a/b/g/n BT-W200G/W250G: IEEE802.11b/g/n		
		Radio frequency	BT-W200/W250: 2.4 GHz (b: 1 to 14ch / g, n: 1 to 13ch) 5.2 GHz, 5.3 GHz, 5.6 GHz (a / n) *W52/W53 can only be used indoors. BT-W200G/W200GM/W250G/W250GM/W250GN: 2.4 GHz (b,g,n:1 to 13ch) 5.2 GHz, 5.3 GHz(a/n) BT-W200G/W250G: 2.4 GHz (b,g,n:1 to 13ch)	
	Security method		Security: WEP (64/128bit)/WPA/WPA2 WPA encryption method: TKIP/AES Authentication method: PSK/EAP-TLS/PEAP-MSCHAP-V2	
	Bluetooth®		Wireless standards	Bluetooth® V2.1 +EDR
		Supported profiles	SPP, PAN(PANU), FTP(Client), HSP(AG), HID(Host/Device)	
		Communication distance	Approx. 10 m (line-of-sight)	
External recording media	Supported media	microSD or microSD (SDHC)		
	Supported capacity	32 GB max.		
Power supply	Main battery	Type	Dedicated lithium ion battery pack	
		Capacity	3250 mAh	
		Continuous usage time ²		
		Charge mode 1	Approx. 28 hours	
		Charge mode 2	Approx. 32 hours	
		Charge mode 3	Approx. 28 hours	
	Charging time	Approx. 8.0 hours (ambient temperature)		
	Backup battery	Clock	Built-in lithium secondary battery approx. 1 month ³	
RAM data		Electric double layer capacitor approx. 1 minutes ³		
Others	Buzzer	Scale: 16 levels, Volume: 3 levels		
	Vibration function	Available		
	Calendar/clock	Automatic calendar (year, month, day, hour, minute, second; up to year 2079), accurate within 80 seconds per month (normal temperature)		
Environmental resistance	Enclosure rating	IP64		
	Drop resistance ⁴	Onto concrete from 3.0 m (from 4.0 m with protector); Up to 20000 impacts from 30 cm		
	Ambient operating temperature ⁵	-20 to +50°C (no freezing)		
	Ambient operating humidity	20 to 85% RH (no condensation)		
	Ambient storage temperature	-20 to +60°C (no freezing)		
	Ambient storage humidity	20 to 85% RH (no condensation)		
EMI		VCCI Class A		
Dimensions	173 × 61.6 × 43 (30.3) mm (The value in parenthesis is the grip dimension.)		173 × 61.6 × 42 (30.3) mm (The value in parenthesis is the grip dimension.)	
	Weight	Approx. 222 g (with rechargeable battery pack attached)	Approx. 217 g (with rechargeable battery pack attached)	
Accessory	Hand strap			

* BT-W300/W350 can be used only in Japan.
*1 Activation of a separate license is required to enable character recognition. Refer to the manual for character recognition specifications.
*2 This is the continuous usage time with the operation confirmation LED and vibration function turned off, with the buzzer turned on (with low volume), with the backlight turned on (with low luminance), at normal temperature, and when barcode reading is performed and round trip wireless communication is made once per 20 seconds.
*3 When the main battery is not attached or has no remaining charge.
*4 This is a test value. The value is not guaranteed.
*5 In a low-temperature environment, the lithium ion battery's continuous usage time decreases. Be sure to check operations before using the product.

WARRANTIES AND DISCLAIMERS

- (1) KEYENCE warrants the Products to be free of defects in materials and workmanship for a period of one (1) year from the date of shipment. If any models or samples were shown to Buyer, such models or samples were used merely to illustrate the general type and quality of the Products and not to represent that the Products would necessarily conform to said models or samples. Any Products found to be defective must be shipped to KEYENCE with all shipping costs paid by Buyer or offered to KEYENCE for inspection and examination. Upon examination by KEYENCE, KEYENCE, at its sole option, will refund the purchase price of, or repair or replace at no charge any Products found to be defective. This warranty does not apply to any defects resulting from any action of Buyer, including but not limited to improper installation, improper interfacing, improper repair, unauthorized modification, misapplication and mishandling, such as exposure to excessive current, heat, coldness, moisture, vibration or outdoors air. Components which wear are not warranted.
- (2) KEYENCE is pleased to offer suggestions on the use of its various Products. They are only suggestions, and it is Buyer's responsibility to ascertain the fitness of the Products for Buyer's intended use. KEYENCE will not be responsible for any damages that may result from the use of the Products.
- (3) The Products and any samples ("Products/Samples") supplied to Buyer are not to be used internally in humans, for human transportation, as safety devices or fail-safe systems, unless their written specifications state otherwise. Should any Products/Samples be used in such a manner or misused in any way, KEYENCE assumes no responsibility, and additionally Buyer will indemnify KEYENCE and hold KEYENCE harmless from any liability or damage whatsoever arising out of any misuse of the Products/Samples.
- (4) **OTHER THAN AS STATED HEREIN, THE PRODUCTS/SAMPLES ARE PROVIDED WITH NO OTHER WARRANTIES WHATSOEVER. ALL EXPRESS, IMPLIED, AND STATUTORY WARRANTIES, INCLUDING, WITHOUT LIMITATION, ANY DAMAGES RESULTING FROM LOSS OF USE, BUSINESS INTERRUPTION, LOSS OF INFORMATION, LOSS OR INACCURACY OF DATA, LOSS OF PROFITS, LOSS OF SAVINGS, THE COST OF PROCUREMENT OF SUBSTITUTED GOODS, SERVICES OR TECHNOLOGIES, OR FOR ANY MATTER ARISING OUT OF OR IN CONNECTION WITH THE USE OR INABILITY TO USE THE PRODUCTS, EVEN IF KEYENCE OR ONE OF ITS AFFILIATED ENTITIES WAS ADVISED OF A POSSIBLE THIRD PARTY'S CLAIM FOR DAMAGES OR ANY OTHER CLAIM AGAINST BUYER.** In some jurisdictions, some of the foregoing warranty disclaimers or damage limitations may not apply.

BUYER'S TRANSFER OBLIGATIONS:

If the Products/Samples purchased by Buyer are to be resold or delivered to a third party, Buyer must provide such third party with a copy of this document, all specifications, manuals, catalogs, leaflets and written information provided to Buyer pertaining to the Products/Samples.

E 1101-3

KEYENCE CORPORATION

1-3-14, Higashi-Nakajima, Higashi-Yodogawa-ku,
Osaka, 533-8555, Japan
PHONE: +81-6-6379-2211

www.keyence.com/glb

AUSTRIA Ph: +43 (0)2236 378266 0	HONG KONG Ph: +852-3104-1010	NETHERLANDS Ph: +31 (0)40 206 6100	TAIWAN Ph: +886-2-2721-8080
BELGIUM Ph: +32 (0)15 281 222	HUNGARY Ph: +36 1 802 7360	PHILIPPINES Ph: +63-(0)2-8981-5000	THAILAND Ph: +66-2-078-1090
BRAZIL Ph: +55-11-3045-4011	INDIA Ph: +91-44-4963-0900	POLAND Ph: +48 71 368 61 60	UK & IRELAND Ph: +44 (0)1900-096-900
CANADA Ph: +1-905-366-7655	INDONESIA Ph: +62-21-2966-0120	ROMANIA Ph: +40 (0)269 232 808	USA Ph: +1-201-930-0100
CHINA Ph: +86-21-3357-1001	ITALY Ph: +39-02-6688220	SINGAPORE Ph: +65-6392-1011	VIETNAM Ph: +84-24-3772-5555
CZECH REPUBLIC Ph: +420 220 184 700	KOREA Ph: +82-31-789-4300	SLOVAKIA Ph: +421 (0)2 5939 6461	
FRANCE Ph: +33 1 56 37 78 00	MALAYSIA Ph: +60-3-7883-2211	SLOVENIA Ph: +386 (0)1 4701 666	
GERMANY Ph: +49-6102-3689-0	MEXICO Ph: +52-55-8850-0100	SWITZERLAND Ph: +41 (0)43 455 77 30	

Specifications are subject to change without notice.
Copyright (c) 2022KEYENCE CORPORATION. All rights reserved.
17161GB 2022-1 [96M17161] Printed in Japan



* 9 6 M 1 7 1 6 1 - 1 *

KEYENCE

96M17161

ハンディターミナル

BT-W300/W200 シリーズ

取扱説明書

お使いになる前に、この取扱説明書を必ずお読みください。お読みになった後は、いつでも使用できるように保管してください。

この取扱説明書において、BT-W300 シリーズとは BT-W300/W300G/W300GM/W300GI、BT-W350/W350G/W350GM/W350GI/W350GN/W370/W370G、BT-W200 シリーズとは BT-W200/W200G/W200GM/W200GI、BT-W250/W250G/W250GM/W250GI/W250GN を意味します。

記号の見方

この取扱説明書では、次のような記号を用いて重要な部分がひとめでわかるようにしています。必ずお読みください。

	ここに記載されている記載事項を遵守しない場合、結果的に死亡又は重傷を引き起こす危険が発生します。
	ここに記載されている記載事項を遵守しない場合、結果的に死亡又は重傷を引き起こす危険が発生する可能性があります。
	ここに記載されている記載事項を遵守しない場合、中程度の傷害又は軽傷を引き起こす危険が発生する可能性があります。
	ここに記載されている記載事項を遵守しない場合、商品自体の損害（自損）のみならず、他の財物に対する損傷を引き起こす可能性があります。

	かならずおこなう操作などについての注意を示しています。
	読みやすい操作などについての注意を示しています。

本文の理解を深める事項や、知っておくと役に立つ情報を示しています。

- IEEE802.11a/b/g/n : IEEE (Institute of Electrical and Electronics Engineers「米国電気電子学会」) で LAN 技術の標準を策定している 802 委員会が定めた無線 LAN 規格です。
- Bluetooth® ブランドマークおよびロゴは、Bluetooth SIG, Inc. の所有物であり、ライセンスは許可を受けて使用しています。他の商標または商標名は、各所有者に帰属します。
- microSD™ は SD Card Association の商標です。
- Microsoft、Windows、Internet Explorer、Visual Studio は、米国 Microsoft Corporation の米国及びその他の国における登録商標または商標です。
- Windows の正式名称は、Windows® operating system です。
- ARM Cortex は ARM Limited の EU およびその他の国における商標および登録商標です。
- その他、本取扱説明書に記載されている会社名、および製品名は、それぞれ各社の登録商標または商標です。
- 本取扱説明書の一部または全部を無断で使用、複製することはできません。
- 本取扱説明書に記載されている情報は、予告なく変更され場合があります。

レーザー商品に関する注意事項

BT-W300/W200 シリーズは、光源に可視光半導体レーザーを使用しています。人体（目や皮膚など）に障害を引き起こす可能性がありますので、以下の事項を必ず遵守してください。


	ここに規定した以外の手順による制御および調整は、危険なレーザー放射の露光に結びつくことがあります。 - この商品は、分解時にレーザー光の放射を停止する機構を備えていません。絶対に分解しないでください。 クラス2レーザー製品に関して人体（目や皮膚など）に障害を引き起こす可能性がありますので、以下の事項を必ず遵守してください。 - レーザー光、および鏡面反射光を凝視しないでください。 - レーザー光を意図的に人に向けしないでください。 - レーザー光の光路に十分な配慮をしてください。レーザー光が鏡面反射/拡散反射され、その反射光にさらされる危険がある場合は、その反射光を遮る面を覆ってください。 - レーザーの光路が目の高さにならないように設置してください。
--	--

BT-W300/W200 シリーズは、JIS C 6802 に基づき以下のように分類されます。


項目	BT-W300/W300G/W300GM/W300GI BT-W200/W200G/W200GM/W200GI	BT-W350/W350G/W350GM/W350GI/W350GN/ W370/W370G BT-W250/W250G/W250GM/W250GI/W250GN
波長	650nm	657nm
出力	1.0mW	1.0mW
レーザークラス	クラス2 レーザ製品 (JIS C6802)	クラス2 レーザ製品 (JIS C6802)

●警告 / 説明ラベルの貼り付け位置


BT-W300/W300G/W300GM/W300GI




BT-W370/W370G




BT-W200/W200G/W200GM/W200GI



BT-W350/W350G/W350GM/W350GI/
W350GN



BT-W250/W250G/W250GM/W250GI/
W250GN



●警告 / 説明ラベルの一覧

BT-W300	BT-W300G	BT-W300GM	BT-W300GI
BT-W350	BT-W350G	BT-W350GM	BT-W350GI
BT-W350GN	BT-W370	BT-W370G	
BT-W200	BT-W200G	BT-W200GM	BT-W200GI
BT-W250	BT-W250G	BT-W250GM	BT-W250GI
BT-W250GN			

●同梱されている 警告 / 説明ラベルの一覧

BT-W300G	BT-W350G	BT-W200G/ W200GM/W200GI	BT-W250G/ W250GM/W250GI
BT-W370G			

※使用される国・地域によって、同梱されている警告 / 説明ラベルを図中の同梱ラベルの位置に貼り付けてください。

■技適マークの電磁的表示について

本端末は、電波法ならびに電気通信事業法に基づく技術基準に適合し、技適マークを画面に表示することができます。

表示の操作方法は、システムメニューの「111. 基本情報」にあるボタンを押下してください。画面内に認証情報が表示されます。

安全にご使用いただくために

■ 一般的な注意事項

	● 人体、および人体の一部を保護する目的でこの商品を使用してはいけません。 ● この商品は、防爆型で使用することを想定していない商品ですので、防爆工法では決して使用しないでください。 ● この商品の動作状態によって人および財物に大きな危害が及ぶ可能性のある用途（発電所、航空、鉄道、船舶、車両、医療機器、娯楽遊具等）では使用しないでください。
	● この商品を当社の規定通りに使用しただけでない場合、商品の保証が有効に機能しない可能性があります。
	● 始業または操作時には、当社の製品の機能、および性能が正常に動作していることを確認してからご使用ください。 ● 当社の製品を故障したとき、各種の損害を防止するための十分な安全対策を講じてください。 ● ここに規定された以外の使用をしないでください。火災、感電、故障の原因となります。
	● 仕様に表示された規格以外でのご使用、または改造された製品については、機能および性能の保証はできかねますので留意ください。 ● 液晶パネルは条件によって、微細な斑点（黒点・暗点）や明るさのムラ、グローストーク（本来存在しない線や模様が表示される現象）が発生する場合があります。 ● 液晶の特性上、長時間、同じ画面を表示し続けると、残像が発生する場合があります。

■ 充電機パック (BT-B5) の取り扱い

- ▲ **BT-B5** 以外の電池を使用されず、火災または爆発の恐れがありますので、必ず指定の電池を使用してください。
- 充電電池パックを、指定の機器以外では絶対に使用しないでください。使用条件が異なる機器で使用する場合は、充電電池パックの劣化を早め、廃棄を促進します。
- AC 電源コードは各国で使用されるプラグ形状に合わせたものを使用してください。また、コードが関連する各国の規制 / 規格に適合していることを確認してください。

● 充電電池のリサイクルについて

キーエスでは、一般社団法人JBRCに加盟し小容量乾電池のリサイクルに取り組んでいます。回収はJBRCが窓口となりますので、JBRC（処理方法をご相談ください）に、リサイクルにご協力をお願いします。

お問い合わせ先
一般社団法人 JBRC
TEL : 03-6403-5673
ホームページ : <http://www.jbrc.com>

リチウム電池の廃棄方法は国・地域によって処理・処分の方法が異なっていますので、事前に確認してください。

なお、リチウム電池を廃棄する場合は、電容量が残っている場合、他の金属と接触すると発熱・破裂・発火するおそれがありますので、必ず端子（+・-）を粘着性の絶縁テープなどで覆ってください。

■ 無線 LAN に関する注意事項

警告 医療機関での無線機器使用禁止場所や医療電気機器の近くでは、BT-W300/W200 シリーズの主電池を取り外してください。埋め込み型心臓ペースメーカー装置部からは離して携行、ご使用ください。

- BT-W3/W300G/W300G/W350/W350G/W350G/W350G/W370/W370G/W200/W200G/W200G/W250/W250G/W250G/W250G/W52GHz帯の電波を使用しており、BT-W300/W350/W370/W200/W250は5.2GHz帯（W52：36, 40, 44, 48ch）、5.3GHz帯（W53：52, 56, 60, 64ch）、5.6GHz帯（W56：100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140ch）の電波、BT-W300/W300G/W350G/W350G/W370/W370G/W200G/W200G/W250G/W250G/W250G/W52GHz帯は5.2GHz帯（W52：36, 40, 44, 48ch）5.3GHz帯（W53：52, 56, 60, 64ch）が利用できます。5.2GHz帯（W52）及び5.3GHz帯（W53）の電波を屋外で使用するときは、電波波で禁止されています。（BT-W300/W350G/W350G/W200G/W250Gは、5GHz帯の電波を使用していません）
- 使用する環境によっては、通信できない場合がありますので、導入前に必ず通信確認をおこなってください。
- 無線LAN 機器、電子レンジ、工業用加熱設備、医療用高周波設備など本機と同一周波数帯を使用する機器近くで使用するときは、電波干渉が発生し、通信速度が低下した通信ができなくなる場合があります。
- 無線LANとBluetoothを同時使用するとき、電波干渉が発生し、通信速度の低下や通信が切断される場合があります。通信に支障がある場合は、無線LAN、Bluetoothいずれかの使用を停止してください。
- 金属物、近く、金属粉の多い場所、金属筐に囲まれた場所では通信できない場合があります。
- この機器の使用周波数帯では、産業・科学・医療用機器等のほか工場の製造ラインなどで使用されている移動体通信用の機器（無線LAN）（免許を要する無線LAN）及び特定小電力無線局（免許を要しない無線局）並びにアマチュア無線局（免許を要する無線局）が適用されています。
- ① この機器を使用する前に、近くで移動体通信用の携帯無線局及び特定小電力無線局並びにアマチュア無線局が運営されていないことを確認してください。
- ② 万一、この機器が移動体通信用の無線LAN内に設置して対して電波干渉の事例が生じた場合には、速やかに使用周波数を変更するか又は電波の発射を停止した上、下記連絡先にご連絡いただき、混信回避のための処置等（例えば、パーティションの設置など）についてご相談ください。

3. その他、この機器から移動体識別用の特定小電力無線局あるいはアマチュア無線局に対して有害な電波干渉の事例が発生した場合など、何かお困りのことが起きた場合は、次の連絡先にお問い合わせください。
- 連絡先：株式会社キーエンス 電話：06-6379-1151

[日本]

- 本機の分解、改造は電波法で禁じられていますので、絶対におこなわないでください。本機は、日本国電波法に基づく特定無線設備に該当し、電波法に定められる基準に従って工事設計認証を取得しております。
- 5.2GHz帯登録局と通信する場合、屋外において使用可能です。

■ Bluetoothに関する注意事項

【注意】 医療機器の無線機能を使用禁止場所や医療電気機器の近くでは、BT-W300/W200 シリーズの充電部を取り外してください。埋め込み型心臓ペースメーカー装置部からは離して持ち、ご使用ください。

▶ 使用上の注意

- 使用する環境によっては、通信できない場合がありますので、本格導入する前に、必ず試験的な運用テストを実施してください。
- 無線LANと電波レンジ、工業用加熱設備、医療用高周波設備など本機と同じ周波数帯を使用する機器の近くで使用すると、電波干渉が発生し、通信速度が低下したり通信がとまってしまう場合があります。
- 無線LANとBluetoothを同時使用すると、電波干渉が発生し、通信速度の低下や通信が切断されることがあります。通信に支障がある場合は、無線LAN、Bluetoothいずれかの使用を停止してください。
- 廃棄物の近く、金属物の多い場所、金属壁で囲まれた場所では通信できない場合があります。
- 通信可能距離の目安は見通して約10mですが、10m以内であっても使用環境により通信できない場合があります。導入前に必ず通信確認をおこなってください。
- この機器の使用周波数帯では、産業・科学・医療用機器等のほか工場の製造ラインなどで使用されている移動体識別用の構内無線局（免許を要する無線局）及び特定小電力無線局（免許を要しない無線局）並びにアプテック無線局（免許を要する無線局）が運用されています。
 - ① この機器を使用する前に、近くで移動体識別用の構内無線局及び特定小電力無線局並びにアプテック無線局が運営されていないことを確認してください。
 - ② 万一、この機器から移動体識別用の構内無線局に対して電波干渉の被害が生じた場合には、速に使用周波数帯を変更するか又は電波の発射を停止した上、下記連絡先へ連絡したいただき、滞り回滅のための処置等（例えば、パーティションの設置など）についてご相談ください。
 - ③ その他、この機器から移動体識別用特定小電力無線局あるいはアプテック無線局に対して有害な電波干渉の事例が発生した場合は、どうかお困りのことが起きた場合は、次の連絡先にお問い合わせください。

■ BT-W300/W200シリーズの取り扱い

・【仕様】（４ページ）に記載されている使用温度範囲内で使用し、保存してください。窓を閉め切った自動車の中や、直射日光が当たる場所に放置しないください。故障や誤取性能化の原因となります。【以前より読み取りにくい】と感じたり、システムメニューからカメラ補正を実施してください。

・【仕様】（４ページ）に記載されている使用温度範囲内で使用してください。急激な温度変化が生じると、結果するところでは使用しないでください。故障の原因となります。

・本機は精密機械ですと、落下させたり、強い衝撃を加えると、破損する恐れがあります。持ち運びする際、ご使用の際は必ずご注意ください。BT-W300/W200/W250は、消費電力がホウの多い場所などに置かないでください。故障の原因となります。

・BT-W300/W305/W370/W200/W250は、日本国内でのみ使用されることを前提に設計、製造されています。日本国外では使用しないでください。

■ BT-W300/W200シリーズ本体の取り扱い

注 記 BT-W300/W200 シリーズ下面のブザー穴に針など先の尖ったものを挿入しないでください。防水シートが破損するおそれがあります。


正しくご使用いただくために

■ VCCI について

この内容は日本国内で使用する場合でのみ適用されます。

この装置は、クラスA情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。

※ BT-WUC8U/WUC8Lを使用する際は、以下のようにフェライトコア (①) を取り付けください。

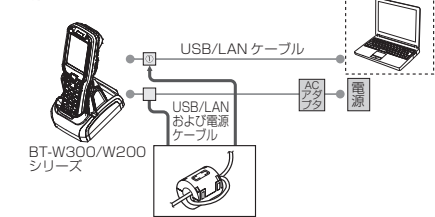

※ フェライトコアは以下の製品をご使用ください。

※ フェライトコアは以下の製品をご使用ください。

番号	フェライトコア（メーカー）
①	ZCAT2436-1330A または ZCAT2035-0930A 2ターン
②	BT-WUC84 をご使用の際は以下のようにフェライトコア（②）をください。



※ フェライトコアは以下の製品をご使用ください。

番号	フェライトコア（メーカー）
②	ZCAT2436-1330A または ZCAT2035-0930A 6ターン

装置は、VCCI 自主規制措置運用規程に基づく技術基準に適合した文言を画面に電
子的に表示しています。
表示の操作方法は、システムメニューの「111. 基本情報」にある認証情報ボタンを押
してください。

BT-W370/W370G の場合、フェライトコアの取り付けは不要です。


■ パッキンの取り扱い

注記	● BT-W300/W200シリーズの保護構造はIP64となっておりますが、「電池取付カバー」が正しく取り付けられていないと、これを満足することはできません。水や粉塵などがある環境で使用される場合は、これらが正しく取り付けられていることを確認してください。 ● BT-W300/W200 シリーズを落下させたり、過度な衝撃を加えると、防水を保てなくなる場合があります。取り扱いには十分注意してください。
----	--

清掃について

下記の部分は定期的にエアブローで清掃してください。
 汚れが取れにくい場合は乾いた綿棒で端子を直接清掃してください。
 (さらに汚れの付着がひどい場合は無水アルコールをご使用ください)
 電池端子部の清掃は、電池取付カバーを外しておこなってください。

BT-W300/W300G/W300GM/W300GI BT-W350/W350G/W350GM/W350GI

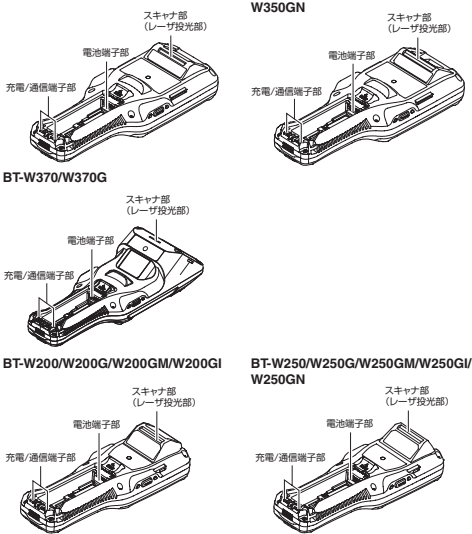

注 記	汚れやゴミが付着すると、電池/充電/通信端子部の接触が悪くなり、充電機能の低下や瞬断の原因になります。 清掃の際においても、布の繊維クズが電池/充電/通信端子部に付着しないように注意してください。
-----	--

梱包品の確認

パッケージを開けたら、まず、次のものが揃っているかをお確かめください。
万一、足りないもの、不良、破損などがありましたら最寄りの営業所へご連絡ください。

■ BT-W300/W300G/W300GM/W300GI/W350/W350G/W350GM/W350GI/
W350GN



■ BT-W370/W370G



■ BT-W200/W200G/W200GM/W200GI/W250/W250G/W250GM/W250GI/W250GN



▶ 重要 BT-W300/W350/W370/W200/W250は日本国内でのみご利用になれます。

仕様

● BT-W300 シリーズ

項目		仕様	
型式		BT-W300/ W300G/ W300GM/ W300GI	BT-W350/ W350G/ W350GM/ W350GI/ W350GN BT-W370/ W370G
タイプ		レーザータイプ	カメラタイプ
制御部	CPU	ARM Cortex® Triple Core	
	OS	Microsoft® Windows® Embedded Compact 7	
主記憶部	RAM	512MB (Disk 領域: 32MB)	
	ROM	512MB (Disk 領域: 222MB) Flash-ROM	
表示部	LCD	表示方式	3.5 型 透視型TFT カラーLCD VA 方式
		解像度 (表示ドット数)	横480× 縦640 ドット (VGA)
		表示色数	65536 色
		フォント	MS Pゴシック、MS UI Gothic、MS ゴシック、 Segoe UI、Courier New、Symbol、 Tahoma、Times New Roman、Wingdings ※ SimSun、NSimSun はインストールが必要
		バックライト	高輝度白色LED
		動作確認LED	3 色LED (赤、緑、青、黄、シアン、マゼンタ、白)
操作部	ハード キー	タッチパネル	アナログ抵抗式 (強化ガラス仕様)
		種類	十字キー1 個 (4 方向)、 トリガキー3 個 (センター1 個、サイド2 個)、 ファンクションキー8 個 (F1 キー、F2 キー、F3 キー、F4 キー、Fn キー、 タブキー、文字キー、SFT キー)、 デタッチャブル14 個 (デンキー、ENT キー、クリアキー、マイナスキー、 記号キー)、電源キー1 個
スキャ ナ部 ^{※1}	光学 特性		
		読み取り光源	可視光半導体 レーザー (650nm) 出力1.0mW クラス2 レーザ 製品 (JIS C 6802)
		ポインタ光源	—
		スキャン回数	100 スキャン/ 秒

項目		仕様			
スキャナ部 ^{※1}	光学特性	最小分解能	0.127mm	2次元コード：0.127mm バーコード：0.076mm	
		読み取り距離	10 ～ 1250mm (ナローバー幅 0.508mm) 5 ～ 630mm (ワイドバー幅 0.25mm)	30 ～ 840mm (CODE39 ナローバー幅 0.508mm) 25 ～ 450mm (CODE39 ナローバー幅 0.254mm) 30 ～ 480mm (QR セルサイズ 0.508mm) 25 ～ 280mm (QR セルサイズ 0.254mm)	0 ～ 700mm (CODE39 ナローバー幅 0.508mm) 0 ～ 360mm (CODE39 ナローバー幅 0.254mm) 0 ～ 380mm (QR セルサイズ 0.508mm) 25 ～ 200mm (QR セルサイズ 0.254mm)
		読み取り幅・視野範囲	—	124×76mm (読取距離180mm)	124×76mm (読取距離130mm) 40×24mm (読取距離10mm)
		PCS	0.45 以上 (スベ ース部の反射 率70%以上)	—	—
	対応コード	JAN/EAN/UPC (アドオンコード 対応) CODE128, GS1-128, CODE39, GS1-128, CODE93, ITF CODE39, NW-7, CODE93, ITF, インダストリアル2of5, COOP2of5, GS1 DataBar			
	無線通信部	無線規格	BT-W300G/W350G/W370：IEEE802.11a/b/g/n BT-W300G/W300GM/W350G/W350GM/W350GNI/ W370G：IEEE802.11a/b/g/n BT-W300GI/W350GI：IEEE802.11b/b/g/n		
		無線周波数	BT-W300G/W350G/W370： 2.4GHz (b：1～14ch / g, n：1～13ch) 5.2GHz, 5.3GHz, 5.6GHz (a / n) ※ W52/W53 は屋内使用限定 BT-W300G/W300GM/W350G/W350GM/ W350GNI/W370G： 2.4GHz (b, g, n：1～13ch) 5.2GHz, 5.3GHz (a/n) BT-W300GI/W350GI： 2.4GHz (b, g, n：1～13ch)		
		セキュリティ方式	セキュリティ：WEP (64/128bit) / WPA/WPA2 WPA 暗号化方式：TKIP/AES 認証方式：PSK/EAP-TLS/PEAP-MSCHAP-V2		
		無線規格	Bluetooth® V2.1+EDR		
		対応プロファイル	SPP, PAN (PANU), FTP (Client), HSP (AG), HID (Host/Device)		
外部記録 メディア部	通信距離	見通し 約10m			
	対応メディア	microSD/SDHC カード			
電源部	対応容量	32GB 以下			
	主電池	種別	専用リチウムイオンバッテリーパック		
		容量	3250mAh		
		連続使用時間 ^{※2}			
		充電モード1	約 19 時間	約 18 時間	
		充電モード2	約 22 時間	約 21 時間	
	充電モード3	約 19 時間	約 18 時間		
	充電時間	約 8 時間 (常温)			
バック アップ 電池	時計	内蔵リチウム2 次電池 約1ヶ月 ^{※3}			
	RAM データ	電気二重層コンデンサ 約1分 ^{※3}			
その他	ブザー	音階：16 段階 音量：3 段階			
	バイブレーション機能	あり			
耐環境性	カレンダー・時計	年、月、日、時、分、秒オートカレンダー (207 年まで) 月差±60 秒 (常温)			
	保護構造	IP64 (JIS 防沫型)			
	耐落下 ^{※4}	コンクリート上 2.0m (プロテクタ装着時3.5m) 30cm×20000 回			
	使用周囲温度 ^{※5}	-20 ～ +50 ℃ (氷結しないこと)			
	使用周囲湿度	20 ～ 85%RH (結露しないこと)			
EMI	保存周囲温度	-20 ～ +60 ℃ (氷結しないこと)			
	保存周囲湿度	20 ～ 85%RH (結露しないこと)			
外形寸法	VCCI クラスA				
質量	193 × 75.2 × 38.5(30.3) mm () 内はグリップ部		218 × 75.2 × 54.3(30.3) mm ()内はグリップ部		
	約259g (充電池/バック 装着時)	約256g (充電池/バック 装着時)	約295g (充電池/バック 装着時)		
付属品	ハンドストラップ				

- ※ BT-W300/W350/W370 は日本国内のみで利用に耐れます。
- ※ 1: 文字認識を利用するためには別途ライセンスのアクティベーションが必要です。文字認識の仕様についてはマニュアルをご確認ください。
- ※ 2: 動作温度 LED バッテリー機能 OFF、プザーオン (音無し)、バックライト ON (低輝度)、常温において、20 秒間に 1 回 (リコーコードを読み取り失敗した際) 連続点滅をおこなう場合の連続使用時間です。
- ※ 3: 主電池を装着していても、主電池には充電ができません。
- ※ 4: 試験設備より、保証値ではありません。
- ※ 5: リチウムイオンバッテリーは低温環境において連続使用時間が短くなります。必ず動作温度のうえ、ご使用ください。

● BT-W200 シリーズ

項目			仕様	
型式			BT-W200W/200Q/ W200GM/W200GI	BT-W250W/250Q/ W250GM/W250GI/ W250GN
タイプ			レーザータイプ	カメラタイプ
制御部	CPU	ARM Cortex® Triple Core		
	OS	Microsoft® Windows® Embedded Compact 7		
主記憶部	RAM	512MB (Disk 領域：32MB)		
	ROM	512MB (Disk 領域：222MB) Flash-ROM		
表示部	LCD	表示方式	2.7 型 透過型TFT カラーLCD VA 方式	
		解像度 (表示ドット数)	横240× 縦320 ドット (QVGA)	
		表示色数	65536 色	
		フォント	MS Pゴシック、MS UI Gothic、MS ゴシック、 Segoe UI、Courier New、Symbol、 Tahoma、Times New Roman、Wingdings ※ SimSun、NSimSunはインストールが必要	
		バックライト	高輝度白色LED	
	動作確認LED		3 色 LED (赤、緑、青、黄、シアン、マゼンタ、白)	
	タッチパネル		アナログ抵抗膜式 (強化ガラス仕様)	
操作部	ハード キー	種類	十字キー1 個(4 方向)、 トリガキー3 個(センター1 個、サイド2 個)、 ファンクションキー8 個 (F1 キー、F2 キー、F3 キー、F4 キー、Fn キー、 タブキー、文字キー、SFT キー)、 データ入力キー14 個 (テンキー、ENT キー、クリアキー、マイナスキー、 記号キー)、電源キー1 個	
		バックライト	LED (橙色)	
スキャ ナ部 ^{※1}	光特性	読み取り光源	可視光半導体レーザ (650nm) 出力1.0mW クラス2 レーザ製品 (JIS C 6802)	高輝度白色LED
		ポインタ光源	—	可視光半導体レーザ (657nm) 出力1.0mW クラス2 レーザ製品 (JIS C 6802)
		スキャン回数	100 スキャン/秒	—
		最小分解能	0.127mm	2次元コード：0.127mm バーコード：0.07mm
		読み取り距離	10 ～ 1250mm (ナローバー幅0.508mm) 5 ～ 630mm (ナローバー幅0.25mm)	30 ～ 840mm (CODE39 ナローバー幅0.508mm) 25 ～ 450mm (CODE39 ナローバー幅0.254mm) 30 ～ 480mm (QR セル サイズ0.508mm) 25 ～ 280mm (QR セル サイズ0.254mm)
		読み取り幅・ 視野範囲	—	124×76mm (読み取り距離180 mm)
		PCS	0.45 以上(スベース部の 反射率70% 以上)	—
		対応コード	JAN/EAN/UPC (アド オンコード対応)、 CODE128、GS1-128、 CODE39、NW-7、 CODE93、ITF、 COOP2of5、 インダストリアル2of5、 COOP2of5、 GS1 DataBar	JAN/EAN/UPC (アド オンコード対応)、 CODE128、 GS1-128、CODE39、 NW-7、CODE93、ITF、 COOP2of5、 インダストリアル2of5 QRコード、マイクロQR、 DataMatrix (ECC200)、 PDF417、GS1 DataBar、 合成シンボル

項目		仕様		
無線通信部	無線規格	BT-W200/W250：IEEE802.11a/b/g/n BT-W200G/W200GM/W250G/W250GM/W250GN： IEEE802.11a/b/g/n BT-W200G/W250G：IEEE802.11b/g/n		
	無線LAN	無線周波数	BT-W200/W250： 2.4GHz (b：1～14ch/g、n：1～13ch) 5.2GHz、5.3GHz、5.6GHz (a/n) ※ W52/W53は屋内使用限定 BT-W200G/W200GM/W250G/W250GM/ W250GN： 2.4GHz (b、g、n：1～13ch) 5.2GHz、5.3GHz(a/n) BT-W200G/W250G： 2.4GHz (b、g、n：1～13ch)	
			セキュリティ方式	セキュリティ：WEP (64/128bit) /WPA/WPA2 WPA 暗号化方式：TKIP/AES 認証方式：PSK/EAP-TLS/PEAP-MSCHAP-V2
			Bluetooth®	無線規格 Bluetooth® V2.1 +EDR 対応プロファイル SPP, PAN(PANU), FTP(Client), HSP(AG), HID(Host/Device)
		通信距離	見通し 約10m	
	外部記録メディア部	対応メディア	microSD/SDHC カード	
		対応容量	32GB 以下	
電源部	主電池	種別	専用リチウムイオンバッテリーバック	
		容量	3250mAh	
		連続使用時間※2		
		充電モード1	約 28 時間	
		充電モード2	約 32 時間	
	充電モード3	約 28 時間		
	充電時間	約 8 時間 (常温)		
バックアップ電池	時計	内蔵リチウム2次電池 約1ヶ月※3		
	RAM データ	電気二重層コンデンサ 約1分※3		
その他	ブザー	音階：16段階 音量：3段階		
	バイブレーション機能	あり		
	カレンダー・時計	年、月、日、時、分、秒・オートカレンダー (2079 年まで) 月差±80 秒 (常温)		
耐環境性	保護構造	IP64 (JIS 防沫型)		
	耐落下※4	コンクリート上、3.0m (プロテクタ装着時4.0m) 30cm×20000 回		
	使用周囲温度※5	-20 ～ +50℃ (氷結しないこと)		
	使用周囲湿度	20 ～ 85%RH (結露しないこと)		
	保存周囲温度	-20 ～ +60℃ (氷結しないこと)		
保存周囲湿度	20 ～ 85%RH (結露しないこと)			
EMI		VCCI クラスA		
外形寸法		173 × 61.6 × 43 (30.3) mm () 内はグリッパ部	173 × 61.6 × 42 (30.3) mm () 内はグリッパ部	
質量		約222g (充電電池/バック装着時)	約217g (充電電池/バック装着時)	
付属品		ハンドストラップ		

- ※ BT-W200/W250 は日本国内のみでご利用になります。
- ※ 1. 文字認識を利用するために別途ライセンスのアクテベーションが必要で、
必ず必要です。詳細は仕様については、マニュアルを必ずご確認ください。
- ※ 2. 電源は LED、バックライトは OFF、電源は ON の状態で、バックライト ON（低輝度）、常照にて 20 秒間（1 回）バックライトを
読み取り、復元後無通信をおこなった場合の連続使用時間です。
- ※ 3. 干渉波を放射しない場合、または量産がない場合。
- ※ 4. リチウムイオン電池保証期間は、低温環境において連続使用時間が短くなり
ます。必ず必ず保証の範囲で、ご使用ください。

正について

1. 対象製品

以下に規定する保証は、当社が製造・販売する製品（以下「対象製品」という）に適用します。
 なお、対象製品に内蔵されているリレーや電池などの消耗品は対象外とさせていただきます。

2. 保証期間

対象製品の保証期間は、貴社のご指定場所に納入後 1 年間とします。

3. 保証範囲

- (1) 上記保証期間内において、当社の責任による故障が発生した場合は、無償での代用品との交換または修理をさせていただきます。但し、保証期間内であっても、次に該当する故障の場合は保証対象外とさせていただきます。なお、代用品との交換または修理を行った場合でも保証期間の起算日は対象製品の当初ご納入日よりさせていただきます。
- (2) 取扱説明書、ユーザーズマニュアル、別添取付方法に添付された書面などに記載された以外の不適当な改修・環境・取扱い・使用方法に起因した故障。
- (3) お客様の装置または、ソフトウェアの設計内容など、対象製品以外に起因した故障。
- (4) 当社以外による改修、修理に起因した故障。
- (5) 取扱説明書、ユーザーズマニュアルなどに記載している消耗部品が正しく保守、交換されていない、防止できないと認めざるべき故障。
- (6) 当社出荷時の材料、技術水準で、予見不可能だった事由による故障。
- (7) 火災、洪水、地震、水害などの災害及び他種異常な事故の責任ではないお客様要因による故障。
- (8) 保証期間は上記(1)を限度とし、対象製品の故障に起因するお客様の二次損害（表層の損傷、機会損失、逸失利益等）及びいかなる損害も保証の対象外とさせていただきます。

4. 適用用途

当社製品は、一般工業向けの汎用品として設計・製造されております。
従来まして、下記のような用途での使用は意図しておりませんので適用外とさせていただきます。

ただし、事前に当社までご相談いただき、お客様の責任において製品の仕様をご確認のうえ、定格・性能に対してご了承いただき、必要な安全対策を講じていただく場合は適用可能とさせていただきます。

なお、下記の場合においても保証範囲は上記と同様といたします。

- ① 電機、電子機器、鉄道、船舶、車両、医療機器等の人命や財産に多大な影響が予想される設備
- ② 電気、ガス、水道等の公共設備
- ③ 屋外での使用および、それに準ずる取扱説明書などで規定していない条件・環境での使用

上記①及び②に準じる安全に関して高度な配慮と注意が要求される用途

J 1040-1

■お問い合わせ

0120-267-911

最寄りの担当営業所に直接つながります。
一部のIP電話からはご利用いただけません。

■情報サービス

www.keyence.co.jp

カタログ、取扱説明書、マニュアル、CADデータ等をダウンロードできます。

■輸出書類サービス

www.kevence.co.in/yushutsu

株式会社 キーエンス

自動認識事業部

〒533-8555 大阪市東淀川区東中島1-3-14

仕様は改良のため予告なく変更することがあります。

記載されている会社名、製品名等は、

それぞれ各社の商標または登録商標です。

自動1-1036 2022-1 96M17161

Copyright© 2022 KEYENCE CORPORATION

Copyright © 2022 REFERENCE SERVICE ORGANIZATION
All rights reserved

KEYENCE 基恩士

条形码读码器

BT-W300/W200 系列

使用说明书

在使用之前，请务必阅读本使用说明书。
在阅读之后，请保管在可随时查阅的地方。

本使用说明书中，BT-W300 系列是指 BT-W300/W300G/W300GM/W300GI、BT-W350/W350G/W350GM/W350GI/W350GN/W370/W370G、BT-W200 系列是指 BT-W200/W200G/W200GM/W200GI、BT-W250/W250G/W250GM/W250GI/W250GN。

符号

以下符号为本手册中的重要提示信息。请务必仔细阅读。

	表示若不遵守该注意事项，将导致人员伤亡。
	表示若不遵守该注意事项，可能导致人员伤亡。
	表示若不遵守该注意事项，可能导致人员遭受轻微或中度的伤害。
	表示若不遵守该注意事项，将导致本产品损害以及财产损失。
	表示使用过程中，必须遵守的注意事项和使用限制等。
	表示正确使用本产品所必须注意的其它信息。
	表示了为了更好地理解和使用有关信息所给出的一些小诀窍。

- IEEE802.11a/b/g/n：是由 IEEE（Institute of Electrical and Electronics Engineers「美国电气与电子工程师协会」）中 LAN 技术标准的制定者 802 委员会所制定的无线局域网标准。
- Bluetooth® 文字商标和徽标归 Bluetooth SIG, Inc. 所有，基恩士获得许可而使用。其他商标或者商标名称属于其各所有者所有。
- microSD™ 是 SD Card Association 的商标。
- Microsoft、Windows、Internet Explorer、Visual Studio 是美国 Microsoft Corporation 在美国及其他国家的注册商标或者商标。
- Windows 的正式名称是 Windows® operating system。
- ARM Cortex 是 ARM 有限公司在欧盟及其他国家的商标或者注册商标。
- 除此以外，本使用说明书中所记载的公司名称和商标名称分别是各公司的注册商标或者商标。
- 不得擅自使用、复制本使用说明书的一部分或全部。
- 本使用说明书所记载的内容如有更改，恕不预先通知。

关于激光产品的注意事项

BT-W300/W200 系列使用了可见光半导体激光器作为光源。
请务必遵守以下事项，否则有可能对人体（眼睛或皮肤等）造成伤害。


	采用这里所规定以外的步骤进行控制和调整，将有被危险激光照射风险的危险。 本产品不具备拆卸时防止激光辐射的机构。为此请勿进行拆解。
	2 类激光产品的注意事项 - 切勿直视光束。 - 请勿将光束指向其他人员或其他与激光作业无关的人员所处区域。 - 小心激光光束路径。 如因镜面或漫反射，造成操作人员暴露于激光光束反射中的危险，则请通过安装具有合适反射率的防护屏来遮挡光束。 - 按照激光光束路径不与人眼等高的原则来安装产品。 - 切勿分解本产品。本产品发射的激光在分解时不会自动停止。

对于 BT-W300/W200 系列，根据 IEC60825-1 标准分类如下：

项目	BT-W300/W300G/W300GM/W300GI BT-W200/W200G/W200GM/W200GI	BT-W350/W350G/W350GM/W350GI/ W350GN/W370/W370G BT-W250/W250G/W250GM/W250GI/ W250GN
波长	650nm	657nm
输出	1.0mW	1.0mW
激光器类型	2 类激光产品（IEC60825-1）	2 类激光产品（IEC60825-1）

警告 / 说明标签的粘贴位置


BT-W300/W300G/W300GM/W300GI




BT-W350/W350G/W350GM/W350GI/
W350GN




BT-W370/W370G



BT-W200/W200G/W200GM/W200GI



BT-W250/W250G/W250GM/W250GI/
W250GN



警告 / 说明标签一览

BT-W300	BT-W300G	BT-W300GM	BT-W300GI

BT-W350	BT-W350G	BT-W350GM	BT-W350GI

BT-W350GN	BT-W370	BT-W370G	

BT-W200	BT-W200G	BT-W200GM	BT-W200GI

BT-W250	BT-W250G	BT-W250GM	BT-W250GI

BT-W250GN			

BT-W250GN			

● 随附的警告 / 说明标签一览

BT-W300G	BT-W350G	BT-W200G/W200GM/ W200GI	BT-W250G/W250GM/ W250GI

BT-W370G			



* 请根据使用的国家、地区，将随附的警告 / 说明标签粘贴到图中的随附标签位置。

安全使用注意事项

■ 一般注意事项

	- 不得以保护人体及人体的一部分为目的而使用本产品。 - 本产品未预设防爆区域内使用的情况，请勿在防爆区域加以使用。 - 不得将本产品用于因为本产品的动作状态可能严重危及人身及财产安全的用途。 - 例如：发电站、航空、铁路、船舶、车辆、医疗设备、游乐设施等。
	若在使用本产品时未遵守基恩士规定，产品的保护功能可能会无法有效发挥。
	- 在工作开始或操作期间，请务必确认基恩士产品的功能及其性能是否正常运转。 - 万一基恩士产品发生故障，请实施充分的安全措施，以防止各种损害。 - 请勿在此处规定使用的范围外使用。否则可能导致火灾、触电或故障。

	- 对于设计规范所列示以外的规格中使用、或已改造的产品，本公司确保保证其功能及性能，请事先了解。 - 由于使用条件不同，在液晶屏上可能出现细微的斑点（黑点或亮点）、亮度不均匀和串扰（显示本来不存在的线条和花纹的现象）。 - 因液晶特性，如果长时间持续显示同一画面则可能造成残影的发生。
--	--

■ 充电电池（BT-B5）使用中的注意事项

	请务必使用指定的电池，如果使用 BT-B5 以外的电池则有引起火灾或者爆炸的危险。
--	---

	- 请勿将充电电池盒用于指定装置以外的装置。在使用条件不同的装置中使用时，可能加速充电电池盒的退化或者造成装置的损伤。 - 请使用与各国的插头形状匹配的 AC 电源线。另外，请确认线符合有关各国的规定 / 标准。
--	--

● 关于充电电池的回收

锂电池的处理和处置方法因国家及地区不同而有所差异，其废弃方法请依照相应指示。同时，如果废弃锂离子电池时残存电容量，在与其他金属接触时可能导致发热破裂和起火。为此请务必用粘性绝缘胶带等覆盖盖端子（+、-）。

有毒有害物质或元素声明

部件名称	有毒有害物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	多溴联苯 (Cr6+)	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
印刷电路板	×	○	○	○	○	○
LCD	○	○	○	○	○	○
机箱、底座	○	○	○	○	○	○
连接零件 (螺丝类)	○	○	○	○	○	○
配线材料	○	○	○	○	○	○
标签	○	○	○	○	○	○

○：表示该有毒有害物质在该部件所有均质材料中的含量均在 GB/T26572 标准规定的限量要求以下。

×：表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 GB/T26572 标准规定的限量要求。

有关产品及其部件的环保使用期限，会在产品本身或其部件上对其另行标示。只有在本说明书所述的正常情况下使用本产品时，“环保使用期限”才有效。

※ 上述声明仅对以下型号产品有效。
BT-W300G/W350G/W370G/W200G/W250G

■ 关于无线局域网的注意事项

	在医疗机构中的禁止使用无线设备的场所或者医疗电气装置的附近，请取出 BT-W300/W200 系列上的主电池。携带和使用本产品时，请远离植入式心脏起搏器的装置部。
--	---

-
- BT-W300/W300G/W300GM/W350/W350G/W350GM/W350GN/W370/W370G/W200/W200G/W200GM/W250/W250G/W250GM/W250GN 使用了 5GHz 频段的电波，BT-W300/W350/W370/W200/W250 可利用 5.2GHz 频段（W52：36、40、44、48ch）、5.3GHz 频段（W53：52、56、60、64ch）以及 5.6GHz 频段（W56：100、104、108、112、116、120、124、128、132、136、140ch），BT-W300G/W300GM/W350G/W350GM/W350GN/W370G/W200G/W200GM/W250G/W250GM/W250GN 则可利用 5.2GHz 频段（W52：36、40、44、48ch）、5.3GHz 频段（W53：52、56、60、64ch）。日本电波法禁止在室外使用 5.2GHz 频段（W52）和 5.3GHz 频段（W53）的电波。（BT-W300GI/W350GI/W200GI/W250GI 未使用 5GHz 频段的电波）
 - 由于所使用的环境不同，可能无法通信，因此在导入之前请务必进行通信确认。
 - 如果在无线局域网装置、微波炉、工业加热设备和医疗高频装置等使用与本机同一频带的设备附近加以使用，则可能发生电波干扰，致使通信速度下降或者无法进行通信。
 - 如果同时使用无线局域网和蓝牙（Bluetooth），则可能发生电波干扰，致使通信速度下降或通信被切断。当通信出现障碍时，请停止使用无线局域网和牙（Bluetooth）其中之一。
 - 另外，在金属物的附近、金属粉末多的地方和周围金属环绕的场所使用时可能无法进行通信。
 - 本装置所使用的频带，除了产业、科学和医疗用设备以外，也被工厂的生产线等使用的移动体识别用区域内无线电台（需要取得执照的无线电台）特定小功率无线电台（不需要取得执照的无线电台）和业余无线电台（需要取得执照的无线电台）所运用。
 - 在使用本装置之前，请确认附近并无移动体识别用区域内无线电台、特定小功率无线电台以及业余无线电台运营。
 - 万一发生本装置对移动体识别用区域内无线电台造成电波干涉的事例，请立即变更所使用的频率或者停止电波的发射，然后与下列联系地址进行联络，咨询于回避干扰的处置方法等（譬如，分区设置等）。

[中国]
1.

- 使用频率：2.4 - 2.4835 GHz
- 等效全向辐射功率（EIRP）：
天线增益 < 10dBi 时：< 100 mW 或 < 20 dBm
- 最大功率谱密度：
天线增益 < 10dBi 时：< 10 dBm / MHz(EIRP)
- 载频容限：20 ppm
- 带外发射功率（在 2.4-2.4835GHz 频段以外）
< -80 dBm / Hz (EIRP)
- 杂散发射（辐射）功率（对应载波±2.5 倍信道带宽以外）：
< -36 dBm / 100 kHz (30 - 1000 MHz)
< -33 dBm / 100 kHz (2.4 - 2.4835 GHz)
< -40 dBm / 1 MHz (3.4 - 3.53 GHz)
< -40 dBm / 1 MHz (5.725 - 5.85 GHz)
< -30 dBm / 1 MHz（其它 1 - 12.75 GHz）

- 工作频率范围：5150 - 5350 MHz
- 等效全向辐射功率（EIRP）：< 200mW
- 最大功率谱密度：< 10 dBm / MHz
- 载频容限：20 ppm
- 带外发射功率(EIRP)：< -80 dBm / Hz
- 杂散发射（辐射）功率：
< -36 dBm / 100 kHz (30 ~ 1000 MHz)
< -54 dBm / 100 kHz (48.5 - 72.5MHz, 76- 118MHz, 167-223MHz, 470-798MHz)
< -40 dBm / 1 MHz (2400 - 2483.5 MHz)
< -33 dBm / 100 KHz (5150 - 5350 MHz)
< -40 dBm / 1 MHz (5470 - 5850 MHz)
< -30 dBm / 1 MHz（其它 1 - 40 GHz）

- 不得擅自更改发射频率、加大发射功率（包括额外加装射频功率放大器），不得擅自外接天线或改用其它发射天线；
- 使用时不得对各种合法的无线电通信业务产生有害干扰；一旦发现有干扰现象时，应立即停止使用，并采取措施消除干扰后方可继续使用；
- 使用低功耗无线电子设备，必须忍受各种无线电业务的干扰或工业、科学及医疗应用设备的辐射干扰；
- 不得在飞机和机场附近使用。

■ 关于蓝牙（Bluetooth）的注意事项

	在医疗机构中禁止使用无线设备的场所或者医疗电气装置的附近，应取出 BT-W300/W200 系列产品的主电池。携带和使用本产品时，请远离植入式心脏起搏器的装置部。
--	---

- 由于所使用的环境不同，可能无法进行通信，因此在正式导入之前，请务必实施试验性运用测试。
- 如果在无线局域网装置、微波炉、工业加热设备和医疗高频装置等使用与本机同一频带的设备附近加以使用，则可能发生电波干扰，致使通信速度下降或者无法进行通信。
- 如果同时使用无线局域网和蓝牙（Bluetooth），则可能发生电波干扰，致使通信速度下降或通信被切断。当通信出现障碍时，请停止使用无线局域网和牙（Bluetooth）其中之一。
- 另外，在金属物的附近、金属粉末多的地方和周围金属环绕的场所使用时可能无法进行通信。
- 可通信距离的大致基准约想约 10m，但即使在 10m 以内因使用环境不同可能无法进行通信。在导入之前请务必进行通信确认。
- 本装置所使用的频带，除了产业、科学和医疗用设备以外，也被工厂的生产线等使用的移动体识别用区域内无线电台（需要取得执照的无线电台）、特定小功率无线电台（不需要取得执照的无线电台）和业余无线电台（需要取得执照的无线电台）所运用。
 - 在使用本装置之前，请确认附近并无移动体识别用区域内无线电台、特定小功率无线电台以及业余无线电台运营。
 - 万一发生本装置对移动体识别用区域内无线电台造成电波干涉的事例，请立即变更所使用的频率或者停止电波的发射，然后与下列联系地址进行联络咨询于回避干扰的处置方法等（譬如，分区设置等）。

[中国]
1.

- 使用频率：2.4 - 2.4835 GHz
 - 等效全向辐射功率（EIRP）：
天线增益 < 10dBi 时：< 100 mW 或 < 20 dBm
 - 最大功率谱密度：
天线增益 < 10dBi 时：< 20 dBm / MHz(EIRP)
 - 载频容限：20 ppm
 - 带外发射功率（在 2.4-2.4835GHz 频段以外）
< -80 dBm / Hz (EIRP)
 - 杂散发射（辐射）功率（对应载波±2.5 倍信道带宽以外）：
< -36 dBm / 100 kHz (30 - 1,000 MHz)
< -33 dBm / 100 kHz (2.4 - 2.4835 GHz)
< -40 dBm / 1 MHz (3.4 - 3.53 GHz)
< -40 dBm / 1 MHz (5.725 - 5.85 GHz)
< -30 dBm / 1 MHz（其它 1 - 12.75 GHz）
- 不得擅自更改发射频率、加大发射功率(包括额外加装射频功率放大器)，不得擅自外接天线或改用其它发射天线；

3. 使用时不得对各种合法的无线电通信业务产生有害干扰；一旦发现有害干扰现象时，应立即停止使用，并采取措施消除干扰后方可继续使用；
4. 使用微功率无线电设备，必须忍受各种无线电业务的干扰或工业、科学及医疗应用设备的辐射干扰；
5. 不得在飞机和机场附近使用。

■ BT-W300/W200 系列产品的使用

注 意	• 请在「设计规范」(4页)所记载的使用温度范围内使用、保存本产品。请勿放置在门窗紧闭的汽车内、有直射阳光的场所。否则可能导致装置的故障或读取性能变化。如果感觉“比以往难以读取”，请通过系统菜单实施“摄像头校准”。
	• 请在「设计规范」(4页)所记载的使用温度范围内使用本产品。请勿在温度急剧变化时可能裸露的地方使用。否则可能导致装置故障或读取性能变化。
注 意	• 本机属于精密仪器，如果跌落、或对其施加强力冲击，可能会导致故障。在携带和使用时，请充分注意。
	• BT-W300/W200系列产品请勿放置在湿气大和灰尘多的场所等。否则可能导致装置故障或读取性能变化。
注 意	• BT-W300/W350/W370/W200/W250 产品是以仅在日本国内使用为前提而设计制造的。请勿在日本境外使用。

■ BT-W300/W200 系列本体的使用

注 意	请勿将针等前端尖状物插入BT-W300/W200系列背面的蜂鸣器孔中。否则，有可能导致防水密封件的破碎。
-----	--

正确使用使用方法


■ 填料的使用

注 意	• BT-W300/W200系列的保护结构采用IP64，但是如果“电池安装护盖”的安装不正确，则不能满足其要求。如果在有水和粉尘等的环境下使用，请确认已正确安装该护盖。
注 意	• 一旦BT-W300/W200 系列发生跌落或者施加过度的冲击，则有可能无法保证其防水性能。因此使用时请充分加以注意。

关于清扫作业

请定期地用吹尘器对以下部分加以清扫。
如果污垢难以去除，请用干的棉棒直接进行端子的清洁。
(如果沾附污垢十分严重，请使用无水酒精加以清洁)
清扫电池端子时，请拆下电池安装护盖后进行。


BT-W300/W300G/W300GM/W300GI



充电/通信端子

扫描部 (激光发射部)


BT-W350/W350G/W350GM/W350GI/W350GN



充电/通信端子

扫描部 (激光发射部)


BT-W370/W370G



充电/通信端子

扫描部 (激光发射部)


BT-W200/W200G/W200GM/W200GI



充电/通信端子

扫描部 (激光发射部)

BT-W250/W250G/W250GM/W250GI/W250GN



充电/通信端子

扫描部 (激光发射部)

注 意

如果沾附有污垢或灰尘，则电池/充电/通信端子会出现接触不良，导致充电功能降低和瞬间中断。

在清扫时，请注意避免纤维的纤维屑沾附到电池/充电/通信端子上。

随机装箱物件的确认

打开产品的包装之后，请首先检查以下物品是否齐全。
万一有缺少、不合格或破损等情况时，请与离您最近的营业所联系。

■ BT-W300/W300G/W300GM/W300GI/W350/W350G/W350GM/W350GI/W350GN

本体…1

电池安装护盖…1

手带…1

使用说明书…1

警告/说明贴纸…1
(仅限BT-W300G/W350G)



■ BT-W370/W370G


本体…1

电池安装护盖…1

手带…1

使用说明书…1

警告/说明贴纸…1
(仅限BT-W370G)

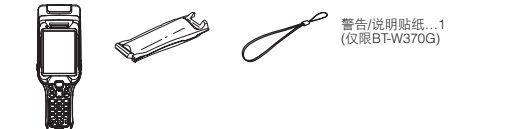

■ BT-W200/W200G/W200GM/W200GI/W250/W250G/W250GM/W250GI/W250GN


本体…1

电池安装护盖…1

手带…1

使用说明书…1

警告/说明贴纸…1
(仅限BT-W200G/W200GM/W200GI/W250G/W250GM/W250GI)

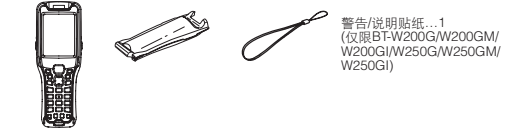

▶ 重要 BT-W300/W350/W370/W200/W250 仅限在日本国内使用。

设计规范

● BT-W300 系列

项目		设计规范		
型号		BT-W300/W300G/W300GM/W300GI	BT-W350/W350G/W350GM/W350GI	BT-W370/W370G
类型		激光型		
控制部分	CPU	ARM Cortex® Triple Core		
操作系统		Microsoft® Windows® Embedded Compact 7		
主记忆部分	RAM	512 MB (磁盘空间：32MB)		
	ROM	512 MB (磁盘空间：222 MB) Flash-ROM		
显示部分	LCD	显示方式	3.5 寸透射型 TFT 彩色 LCD VA 方式	
		分辨率 (显示点数)	宽 480 × 纵 640 点阵 (VGA)	
		显示色数	65536 色	
		字体	MS PGothic、MS UI Gothic、MS Gothic、Segoe UI、Courier New、Symbol、Tahoma、Times New Roman、Wingdings * Simsun、Nsimsun 需要安装	
操作部分	触摸屏	背光灯	高亮度白色 LED	
		操作确认 LED	3 色 LED (红色、绿色、蓝色、黄色、蓝绿色、紫红色、白色)	
		触摸屏	模拟电阻膜方式 (钢化玻璃规格)	
		种类	十字键 1 个 (4 个方向)、触发键 3 个 (中心位置 1 个、侧边 2 个)、功能键 8 个 (F1 键、F2 键、F3 键、F4 键、Fn 键、Tab 键、字符键、SFT 键)、数据输入键 14 个 (数字键、ENT 键、清除键、减号键、符号键)、电源键 1 个	
扫描器部分 ^{*1}	光学特性	背光灯	LED (橙色)	
		读取光源	可见光半导体激光 (650nm) 输出 1.0mW 2 类激光产品 (IEC60825-1)	高亮度白色 LED
		指示器光源	—	可见光半导体激光 (657nm) 输出 1.0mW 2 类激光产品 (IEC60825-1)
		读取距离	—	—

项目		设计规范	
扫描器部分 ^{*1}	光学特性	扫描次数	100 次扫描 / 秒
		最小分辨率	0.127 mm
		读取距离	10 ~ 1250 mm (窄条的宽度 0.508 mm) 5 ~ 630 mm (窄条的宽度 0.25 mm)
		读取宽度、视野范围	—
其他	无线通信部	PCS	0.45 以上 (空白部分的反射率 70% 以上)
		对应条码	JAN/EAN/UPC (支持附加代码)、CODE128、GS1-128、CODE39、NW-7 (Codabar)、CODE93、ITF、COOP2of5、CODE93、ITF、2of5 (Industrial 2of5)、PDF417、COOP2of5 GS1 DataBar
		无线标准	BT-W300/W350/W370：IEEE802.11a/b/g/n BT-W300G/W300GM/W350G/W350GM/W350GN/W370G：IEEE802.11a/b/g/n BT-W300GI/W350GI：IEEE802.11b/g/n
		无线频率	BT-W300/W350/W370: 2.4 GHz (b: 1 ~ 14ch / g, n: 1 ~ 13ch) 5.2 GHz, 5.3 GHz, 5.6 GHz (a/n) * W52/W53 仅限在室内使用 BT-W300G/W300GM/W350G/W350GM/W350GN/W370G: 2.4 GHz (b, g, n: 1 ~ 13ch) 5.2 GHz, 5.3 GHz (a/n) BT-W300GI/W350GI: 2.4 GHz (b, g, n: 1 ~ 13ch)
其他	外部记录媒体部分	安全机制	安全：WEP(64/128bit)/WPA/WPA2 WPA 加密方式：TKIP/AES 认证方式：PSK/EAP-TLS/PEAP-MSCHAP-V2
		无线标准	Bluetooth® V2.1 +EDR
		支持轮廓	SPP、PAN(PANU)、FTP(Client)、HSP(AG)、HID(Host/Device)
		通信距离	预计 约 10 m
其他	电源部分	支持的存储媒体	microSD/SDHC 卡
		支持容量	32 GB 以下
		类别	专用锂离子电池组
		容量	3250 mAh
其他	主电池	连续使用时间 ^{*1}	约 19 小时
		充电模式1:	约 19 小时
		充电模式2:	约 22 小时
		充电模式3:	约 19 小时
其他	备份电池	充电时间	约 8.0 小时 (常温)
		时钟	内置锂离子电池 约 1 个月 ^{*2}
		RAM 数据	电双层电容器 约 1 分 ^{*3}
		蜂鸣器	音阶：16 个等级 音量：3 个等级
其他	振动功能	振动功能	有
		日历、时钟	年、月、日、时、分、秒自动日历 (截至 2079 年) 月差 ±80 秒 (常温)
		外壳防护级	IP64
		耐跌性能 ^{*4}	混凝土上 2.0 m (安装防护罩时 3.5 m) 30 cm × 20000 次
其他	环境抗耐性	环境温度 ^{*5}	-20 ~ +50 °C (无冻结)
		环境湿度	20 ~ 85%RH (无凝结)
		存储环境温度	-20 ~ +60 °C (无冻结)
		存储环境湿度	20 ~ 85%RH (无凝结)

项目		设计规范	
EMI		VCCI A 级	
外形尺寸		193 × 75.2 × 38.5 (30.3) mm () 内为握柄部分	218 × 75.2 × 54.2 (30.3) mm () 内为握柄部分
重量		约 259 g (安装可充电电池组时)	约 256 g (安装可充电电池组时)
配件		手带	
* BT-W300/W350/W370 仅限在日本国内使用。 *1 如需使用字符识别功能，必须另行激活许可证。有关字符识别的规格，请参阅手册。 *2 操作确认 LED、关闭振动功能、开启蜂鸣器（音量小）、开启背光灯（低亮度）、常温下 20 秒读取 1 次条形码、进行往返无线通信时的连续使用时间。 *3 未安装主电池时，或电池电量用尽时。 *4 为试验值，并非保证值。 *5 在低温环境下锂离子电池的连续使用时间将缩短。使用前，请务必必须进行操作确认。			
● BT-W200 系列			
项目		设计规范	
型号		BT-W200/W200G/ W200GM/W200GI	BT-W250/W250G/ W250GM/W250GI/ W250GN
类型		激光型	相机型
控制部分	CPU	ARM Cortex® Triple Core	
操作系统		Microsoft® Windows® Embedded Compact 7	
主记忆部分	RAM	512 MB (磁盘空间：32 MB)	
	ROM	512 MB (磁盘空间：222 MB) Flash-ROM	
显示部分	LCD	显示方式	2.7 寸透射型 TFT 彩色 LCD
		分辨率 (显示点数)	宽 240 × 纵 320 点阵 (QVGA)
		显示色数	65536 色
		字体	MS PGothic、MS UI Gothic、MS Gothic、 Segoe UI、Courier New、Symbol、Tahoma、 Times New Roman、Wingdings * Simsun、Nsimsun 需要安装
	背光灯	高亮度白色 LED	
操作确认 LED		3 色 LED (红色、绿色、蓝色、黄色、蓝绿色、紫红色、白色)	
触摸屏		模拟电阻膜方式（钢化玻璃规格）	
操作部分	硬按钮	种类	十字键 1 个（4 个方向）、 触发键 3 个（中心位置 1 个、侧边 2 个）、 功能键 8 个（F1 键、F2 键、F3 键、F4 键、Fn 键、 Tab 键、字符键、SFT 键）、 数据输入键 14 个（数字键、ENT 键、清除键、 减号键、符号键）、 电源键 1 个
		背光灯	LED（橙色）
扫描器部分	光学特性	读取光源	可见光半导体激光 (650nm) 输出 1.0mW 2 类激光产品 (IEC60825-1)
		指示器光源	—
		扫描次数	100 次扫描 / 秒
		最小分辨率	0.127 mm
		读取距离	10 ～ 1250 mm (窄条的宽度 0.508 mm) 5 ～ 630 mm (窄条的宽度 0.25 mm)
		读取宽度、 视野范围	—
		PCS	0.45 以上（空白部分的 反射率 70% 以上）
对应条码	JAN/EAN/UPC (支持附加代码)、 CODE128、GS1-128、 CODE39、 NW-7 (Codabar)、 CODE93、ITF、 COOP2of5 2of5 (Industrial 2of5)、 COOP2of5 GS1 DataBar		
	JAN/EAN/UPC (支持附加代码)、 CODE128、GS1-128、 CODE39、 NW-7 (Codabar)、 CODE93、ITF、 COOP2of5 2of5 (Industrial 2of5)、 QR、MicroQR、 DataMatrix (ECC200)、 PDF417、 GS1 DataBar、合成符号		

项目		设计规范	
无线通信部	无线LAN	无线标准	BT-W200/W250：IEEE802.11a/b/g/n BT-W200G/W200GM/W250G/W250GM/W250GN: IEEE802.11a/b/g/n BT-W200G/W250Gi: IEEE802.11b/g/n
		无线频率	BT-W200/W250: 2.4 GHz (b: 1 ~ 14ch / g, n: 1 ~ 13ch) 5.2 GHz, 5.3 GHz, 5.6 GHz (a/n) * W52/W53 仅限在室内使用 BT-W200G/W200GM/W250G/W250GM/W250GN: 2.4 GHz (b,g,n: 1 ~ 13ch) 5.2 GHz, 5.3 GHz (a/n) BT-W200Gi/W250Gi: 2.4 GHz (b,g,n: 1 ~ 13ch)
		安全机制	安全：WEP(64/128bit)/WPA/WPA2 WPA 加密方式：TKIP/AES 认证方式：PSK/EAP-TLS/PEAP-MSCHAP-V2
	Bluetooth®	无线标准	Bluetooth® V2.1 +EDR
		支持轮廓	SPP、PAN(PANU)、FTP(Client)、HSP(AG)、HID(Host/Device)
		通信距离	预计 约 10 m
外部记录媒体部分	支持的存储媒体	microSD/SDHC 卡	
	支持容量	32 GB 以下	
电源部分	主电池	类别	专用锂离子电池组
		容量	3250 mAh
		连续使用时间 ²	
		充电模式 1:	约 28 小时
		充电模式 2:	约 32 小时
		充电模式 3:	约 28 小时
其他	充电时间	约 8.0 小时 (常温)	
		时钟	内置锂离子充电电池 约 1 个月 ³
	RAM 数据	电双层电容器	约 1 分 ³
	蜂鸣器	音阶: 16 个等级	音量: 3 个等级
	振动功能	有	
	日历、时钟	年、月、日、时、分、秒自动日历 (截至 2079 年) 月差 ±80 秒 (常温)	
环境抗耐性	外壳防护级	IP64	
	耐跌性能 ⁴	混凝土上 3.0 m (安装防护罩时 4.0 m) 30 cm x 20000 次	
	环境温度 ⁵	-20 ~ +50 °C (无冻结)	
	环境湿度	20 ~ 85%RH (无凝结)	
	存储环境温度	-20 ~ +60 °C (无冻结)	
EMI	存储环境湿度	20 ~ 85%RH (无凝结)	
	EMI	VCCI A 级	
外形尺寸	173 x 61.6 x 43 (30.3) mm () 内为握柄部分		173 x 61.6 x 42 (30.3) mm () 内为握柄部分
	重量		约 222 g (安装可充电电池组时) 约 217 g (安装可充电电池组时)
配件		手带	

* BT-W200/W250 仅限在日本国内使用。
1 如需使用字符识别功能，必须另行激活许可证。有关字符识别的规格，请参阅手册。
2 操作确认 LED。关闭振动功能。开启蜂鸣器 (音量小)、开启背光灯 (低亮度)、常温下 20 秒读取 1 次条形码、进行往返无线通信时的连续使用时间。
3 未安装主电池时，或电池电量用尽时。
4 为试验值，并非保证值。
5 在低温环境下锂离子电池的连续使用时间将缩短。使用前，请务必进行操作确认。

产品保证书

KEYENCE 的产品经过严格的出厂检验。如出现故障，请与就近的 KEYENCE 办事处联系，并提供故障详细情况。

1. 保质期

保质期为一年，从产品发送到购方指定地点之日起算。

2. 保修范围

- (1) 如果在上述保质期内出现 KEYENCE 公司造成的故障，我们将免费修理产品。但是以下情况不属于保修范围。
- 未按照操作手册、用户手册或购方与 KEYENCE 公司专门达成的技术要求中规定的条件、环境下的不正确操作，或不正确使用造成的故障。
 - 故障不是由于产品缺陷，而是购方设备或购方软件设计造成的。
 - 由非 KEYENCE 公司人员进行的修改或修理而造成的故障。
 - 按照操作手册或用户手册正确维修或更换易损件等规定可以完全避免的故障。
 - 在产品从 KEYENCE 公司发货后，因无法预料的科学技术水平变化等因素而造成的故障。
 - 由于火灾、地震和洪水等自然灾害，或异常电压等外部因素造成的故障，我公司不负责保修。
- (2) 保修范围只限于第 (1) 条规定的情况，KEYENCE 公司对其设备造成的购方间接损失 (设备损坏、机会丧失、利润损失等) 或其它损失不承担任何责任。

3. 产品适用性


KEYENCE 公司的产品是针对一般行业的通用产品而设计生产的。因此，我公司产品不得用于下列应用且不适合其使用。但是，如果购方以对自己负责的态度提前就产品的使用向我方进行了咨询并了解产品的技术规范，等级和性能，并采取必要的安全措施，则产品可以使用。在这种情况下，产品保修范围和上述相同。

- 对生命和财产有严重影响的设施，如核发电厂、机场、铁路、轮船、机动装置及医疗设备
- 公共事业如电力、气体及供水服务
- 相似条件或环境的户外使用

KC 1040-1


Outline dimensional drawing

■ BT-W300/W300G/W300GM/W300Gi




Unit: mm

■ BT-W350/W350G/W350GM/W350Gi/W350GN




Unit: mm

■ BT-W370/W370G




Unit: mm

■ BT-W200/W200G/W200GM/W200Gi



Unit: mm

■ BT-W250/W250G/W250GM/W250Gi/W250GN



Unit: mm

KEYENCE CORPORATION

1-3-14, Higashi-Nakajima, Higashi-Yodogawa-ku,
Osaka, 533-8555, Japan
电话: +81-6-6379-2211

www.keyence.com/glb

全球网络 -国家和地区-

奥地利 Ph: +43 (0)2236 378266 0	香港 Ph: +852-3104-1010	荷兰 Ph: +31 (0)40 206 6100	台湾 Ph: +886-2-2721-8080
比利时 Ph: +32 (0)15 281 222	匈牙利 Ph: +36 1 802 7360	菲律宾 Ph: +63-(0)2-8981-5000	泰国 Ph: +66-2-078-1090
巴西 Ph: +55-11-3045-4011	印度 Ph: +91-44-4963-0900	波兰 Ph: +48 71 368 61 60	英国及爱尔兰 Ph: +44 (0)1908-696-900
加拿大 Ph: +1-905-366-7655	印度尼西亚 Ph: +62-21-2966-0120	罗马尼亚 Ph: +40 (0)269 232 808	美国 Ph: +1-201-930-0100
中国 Ph: +86-21-3357-1001	意大利 Ph: +39-02-6688220	新加坡 Ph: +65-6392-1011	越南 Ph: +84-24-3772-5555
捷克共和国 Ph: +420 220 184 700	韩国 Ph: +82-31-789-4300	斯洛伐克 Ph: +421 (0)2 5939 6461	
法国 Ph: +33 1 56 37 78 00	马来西亚 Ph: +60-3-7883-2211	斯洛文尼亚 Ph: +386 (0)1 4701 666	
德国 Ph: +49-6102-3689-0	墨西哥 Ph: +52-55-8850-0100	瑞士 Ph: +41 (0)43 455 77 30	

有关规格等的变化不再另行通知。

A6CN1-MAN-2121

Copyright (c) 2022 KEYENCE CORPORATION. All rights reserved.

17161CN 2022-1 [96M17161] Printed in Japan



* 9 6 M 1 7 1 6 1 - 1 *