



HAC TEST REPORT

| | |
|----------------------|--|
| Product Name | WCDMA Digital Mobile Phone |
| Model Name | V.45 |
| Model Number | V2002 |
| Brand Name | Nextel |
| FCC ID | 2AA9WV2002 |
| Applicant | VSN Technologies Inc. d/b/a VSN Mobile |
| Manufacturer | MOBIWIRE MOBILES (NINGBO) CO.,LTD |
| Date of issue | June 18, 2014 |

TA Technology (Shanghai) Co., Ltd.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 2 of 62

GENERAL SUMMARY

| | |
|------------------------------|---|
| Reference Standard(s) | ANSI C63.19-2011 American National Standard Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids KDB285076 D01 HAC Guidance v04 Equipment Authorization Guidance for Hearing Aid Compatibility KDB285076 D02 T-Coil testing for CMRS IP v01r01 Guidance for Performing T-Coil tests for Air Interfaces Supporting Voice over IP (e.g., LTE and Wi-Fi) to support CMRS based Telephone Services |
| Conclusion | This portable wireless equipment has been measured in all cases requested by the relevant standards. General Judgment: M4 (RF Emission) |
| Comment | The test result only responds to the measured sample. |

Approved by Weizhong Yang
Weizhong Yang
Director

Revised by Minbao Ling
Minbao Ling
HAC Manager

Performed by Chen Shen
Chen Shen
HAC Engineer

TABLE OF CONTENT

| | |
|---|----|
| 1. General Information | 4 |
| 1.1. Notes of the Test Report..... | 4 |
| 1.2. Testing Laboratory | 4 |
| 1.3. Applicant Information | 5 |
| 1.4. Manufacturer Information | 5 |
| 1.5. Information of EUT | 6 |
| 1.6. The Ambient Conditions during Test..... | 9 |
| 1.7. The Total M-rating of each tested band | 9 |
| 1.8. Test Date | 9 |
| 2. Test Information | 10 |
| 2.1. Operational Conditions during Test..... | 10 |
| 2.1.1. General Description of Test Procedures | 10 |
| 2.1.2. GSM Test Configuration | 10 |
| 2.2. HAC RF Measurements System Configuration..... | 11 |
| 2.2.1. HAC Measurement Set-up..... | 11 |
| 2.2.2. Probe System | 12 |
| 2.2.3. Test Arch Phantom & Phone Positioner | 12 |
| 2.3. RF Test Procedures..... | 14 |
| 2.4. System Check..... | 16 |
| 2.5. Modulation interference factor | 17 |
| 2.6. Conducted Output Power Measurement..... | 18 |
| 2.7. Analysis of RF Air Interface Technologies | 19 |
| 2.8. Individual Mode Evaluations | 19 |
| 3. Test Results | 20 |
| 3.1. ANSI C63.19-2011 Limits..... | 20 |
| 3.2. Summary Test Results..... | 21 |
| 4. Measurement Uncertainty | 22 |
| 5. Main Test Instruments | 24 |
| ANNEX A: System Check Results..... | 25 |
| ANNEX B: Graph Results..... | 27 |
| ANNEX C: E-Probe Calibration Certificate | 39 |
| ANNEX D: CD835V3 Dipole Calibration Certificate | 49 |
| ANNEX E: CD1880V3 Dipole Calibration Certificate..... | 53 |
| ANNEX F: DAE4 Calibration Certificate | 58 |
| ANNEX G: The EUT Appearances and Test Configuration | 61 |

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RXA1405-0123HAC01

Page 4 of 62

1. General Information

1.1. Notes of the Test Report

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L2264.

TA Technology (Shanghai) Co., Ltd. guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

TA Technology (Shanghai) Co., Ltd. is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. The sample under test was selected by the Client. This report only refers to the item that has undergone the test.

This report alone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

If the electronic report is inconsistent with the printed one, it should be subject to the latter.

1.2. Testing Laboratory

| | |
|------------|--|
| Company: | TA Technology (Shanghai) Co., Ltd. |
| Address: | No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China |
| City: | Shanghai |
| Post code: | 201201 |
| Country: | P. R. China |
| Contact: | Yang Weizhong |
| Telephone: | +86-021-50791141/2/3 |
| Fax: | +86-021-50791141/2/3-8000 |
| Website: | http://www.ta-shanghai.com |
| E-mail: | yangweizhong@ta-shanghai.com |

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RXA1405-0123HAC01

Page 5 of 62

1.3. Applicant Information

Company: VSN Technologies Inc. d/b/a VSN Mobile
Address: 1975 E. Sunrise Blvd. Suite 400, Fort Lauderdale FL
Contact Person: Amit Verma
Telephone: 954-609-4912
Postcode: 33304

1.4. Manufacturer Information

Company: MOBIWIRE MOBILES (NINGBO) CO.,LTD
Address: No.999,Dacheng East Road,Fenghua City,Zhejiang
Contact Person: Xu Linzhong
Telephone: 0574 88916450
Postcode: 315500

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 6 of 62

1.5. Information of EUT

General Information

| | | |
|-----------------------------------|-------------------|-----------------|
| Device Type: | Portable Device | |
| State of Sample: | Prototype Unit | |
| Product IMEI: | 354044060001104 | |
| Hardware Version: | V01 | |
| Software Version: | V01 | |
| Antenna Type: | Internal Antenna | |
| Device Operating Configurations : | | |
| Tested Mode(s): | GSM 850/GSM 1900; | |
| Test Modulation: | (GSM)GMSK; | |
| Operating Frequency Range(s): | Mode | Tx (MHz) |
| | GSM 850 | 824.2 ~ 848.8 |
| | GSM 1900 | 1850.2 ~ 1909.8 |
| Power Class: | GSM 850: 4 | |
| | GSM 1900: 1 | |
| Power Level | GSM 850: level 5 | |
| | GSM 1900: level 0 | |

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 7 of 62

Auxiliary Equipment Details

| Name | Model | Manufacturer | S/N |
|-------------|--------------|---------------------|----------------|
| Battery 1 | 178069957 | / | MAX20140000253 |

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 8 of 62

| Air-Interface | Band (MHz) | Type | HAC tested | Simultaneous Transmissions Note: Not to be tested | Reduced power 20.19(c)(1) | Voice Over Digital Transport (Data) |
|----------------|-----------------------|------|-----------------|--|------------------------------|-------------------------------------|
| GSM | 850 | VO | Yes | Yes WIFI and BT | NA | NA |
| | 1900 | VO | | | NO | NA |
| | GPRS/EGPRS | DT | NA | Yes WIFI and BT | NA | NA |
| WCDMA | Band II | VO | NO [#] | Yes WIFI and BT | NA | NA |
| | Band IV | VO | NO [#] | Yes WIFI and BT | NA | NA |
| | Band V | VO | NO [#] | Yes WIFI and BT | NA | NA |
| | HSDPA/HSUPA/RMC/HSPA+ | DT | NA | Yes WIFI and BT | NA | NA |
| WIFI | 2450 | DT | NA | Yes GSM, WCDMA(RMC) ,BT | NA | Yes |
| Bluetooth (BT) | 2400 | DT | NA | Yes GSM,GPRS,EGPRS, HSDPA/HSUPA/RMC/HSPA+, WIFI | NA | NA |

VO Voice CMRS/PSTN Service only
Rating was based on concurrent voice and
V/D Voice CMRS/PSTN and Data Service
DT Digital Transport

#: Evaluated for MIF and Low power exemption

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 9 of 62

1.6. The Ambient Conditions during Test

| | |
|---|---------------------------|
| Temperature | Min. = 18°C, Max. = 28 °C |
| Relative humidity | Min. = 0%, Max. = 80% |
| Ground system resistance | < 0.5 Ω |
| Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards. | |

1.7. The Total M-rating of each tested band

| Mode | Rating |
|----------|-----------|
| GSM 850 | M4 |
| GSM 1900 | M4 |

1.8. Test Date

The test performed on May 25, 2014.

2. Test Information

2.1. Operational Conditions during Test

2.1.1. General Description of Test Procedures

The phone was tested in all normal configurations for the ear use. The EUT is mounted in the device holder equivalent as for classic dosimeter measurements. The acoustic output of the EUT shall coincide with the center point of the area formed by the dielectric wire and the middle bar of the arch's top frame. The EUT shall be moved vertically upwards until it touches the frame. The fine adjustment is possible by sliding the complete. The EUT holder is on the yellow base plate of the Test Arch phantom. These test configurations are tested at the high, middle and low frequency channels of each applicable operating mode; for example, GSM, WCDMA (UMTS), CDMA and TDMA.

No associated T-coil measurement has been made in accordance with the guidance issued by OET in KDB publication 285076 D02 T-Coil testing for CMRS IP.

2.1.2. GSM Test Configuration

A communication link is set up with a System Simulator (SS) by air link, and a call is established. The EUT is commanded to operate at maximum transmitting power. Using E5515C the power lever is set to "5" for GSM 850, set to "0" for GSM 1900. The test in the bands of GSM 850 and GSM 1900 are performed in the mode of speech transfer function.

2.2.1. HAC Measurement Set-up

2.2.2. Probe System

The HAC measurements were conducted with the E-Field Probe ER3DV6 and the H-Field Probe H3DV6 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

E-Field Probe Description

| | |
|---------------|---|
| Construction | One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges PEEK enclosure material |
| Calibration | In air from 100 MHz to 3.0 GHz (absolute accuracy $\pm 6.0\%$, $k=2$) |
| Frequency | 40 MHz to > 6 GHz (can be extended to < 20 MHz) Linearity: ± 0.2 dB (100 MHz to 3 GHz) |
| Directivity | ± 0.2 dB in air (rotation around probe axis) ± 0.4 dB in air (rotation normal to probe axis) |
| Dynamic Range | 2 V/m to > 1000 V/m; Linearity: ± 0.2 dB |
| Dimensions | Overall length: 330 mm (Tip: 16 mm) Tip diameter: 8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.5 mm |
| Application | General near-field measurements up to 6 GHz Field component measurements Fast automatic scanning in phantoms |



Figure 2 ER3DV6 E-field Probe

2.2.3. Test Arch Phantom & Phone Positioner

The Test Arch phantom should be positioned horizontally on a stable surface. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. It enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot (Dimensions: 370 x 370 x 370 mm).

The Device reference point is set for the EUT at 6.3 mm, the Grid reference point is on the upper surface at the origin of the coordinates, and the “user point \Height Check 0.5 mm” is 0.5mm above the center, allowing verification of the gap of 0.5mm while the probe is positioned there.

The Phone Positioner supports accurate and reliable positioning of any phone with effect on near field $\leq \pm 0.5$ dB.

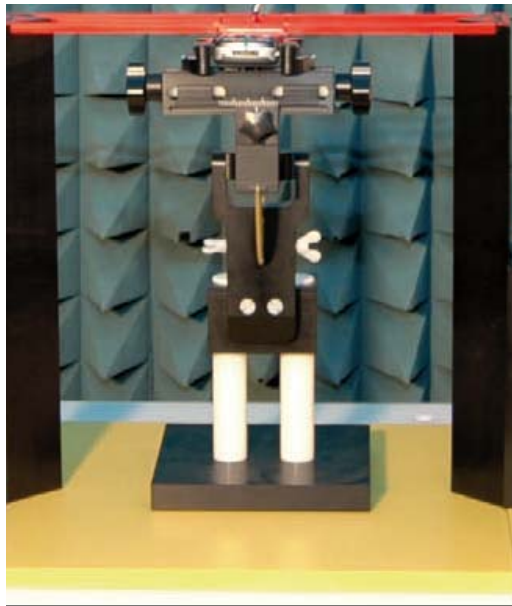


Figure 3 HAC Phantom & Device Holder

2.3. RF Test Procedures

The evaluation was performed with the following procedure:

1. Confirm proper operation of the field probe, probe measurement system and other instrumentation and the positioning system.
2. Position the WD in its intended test position. The gauge block can simplify this positioning. Note that a separate E-field gauge block will be needed if the center of the probe sensor elements is at different distances from the tip of the probe.
3. Configure the WD normal operation for maximum rated RF output power, at the desired channel and other operating parameters (e.g., test mode), as intended for the test.
4. The center sub-grid shall center on the center of the axial measurement point or the acoustic output, as appropriate. Locate the field probe at the initial test position in the 50 mm by 50 mm grid, which is contained in the measurement plane. If the field alignment method is used, align the probe for maximum field reception.
5. Record the reading.
6. Scan the entire 50 mm by 50 mm region in equally spaced increments and record the reading at each measurement point. The grid is 5 cm by 5 cm area that is divided into 9 evenly sized blocks or sub-grids. The distance between measurement points shall be sufficient to assure the identification of the maximum reading.
7. Identify the five contiguous sub-grids around the center sub-grid with the lowest maximum field strength readings. Thus the six areas to be used to determine the WD's highest emissions are identified and outlined for the final manual scan. Please note that a maximum of five blocks can be excluded for both E-field measurements for the WD output being measured. Stated another way, the center sub-grid and three others must be common to both the E-field measurements.
8. Identify the maximum field reading within the non-excluded sub-grids identified in Step 7.
9. Convert the maximum field strength reading identified in Step 8 to V/m or A/m, as appropriate. For probes which require a probe modulation factor, this conversion shall be done using the appropriate probe modulation factor and the calibration.
10. Repeat Step 1 through Step 10 for both the E-field measurements.
11. Compare this reading to the categories in ANSI C63.19 Clause 8 and record the resulting category. The lowest category number listed in 8.2, Table 8.3 obtained in Step 10 for either E-field determines the M category for the audio coupling mode assessment. Record the WD category rating.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 15 of 62



Figure 4 WD reference and plane for RF emission measurements

2.4. System Check

Validation Procedure

Place a dipole antenna meeting the requirements given in ANSI C63.19 D.11 in the position normally occupied by the WD. The dipole antenna serves as a known source for an electrical output. Position the E-field probe so that:

The probes and their cables are parallel to the coaxial feed of the dipole antenna.

The probe cables and the coaxial feed of the dipole antenna approach the measurement area from opposite directions.

Position the E-field probe at a 15 mm distance from the center of the probe element to the top surface. Validation was performed to verify that measured E-field is within +/-18% from the target reference values provided by the manufacturer. "Values within +/-18% are acceptable. Of which 12% is deviation and 13% is measurement uncertainty."

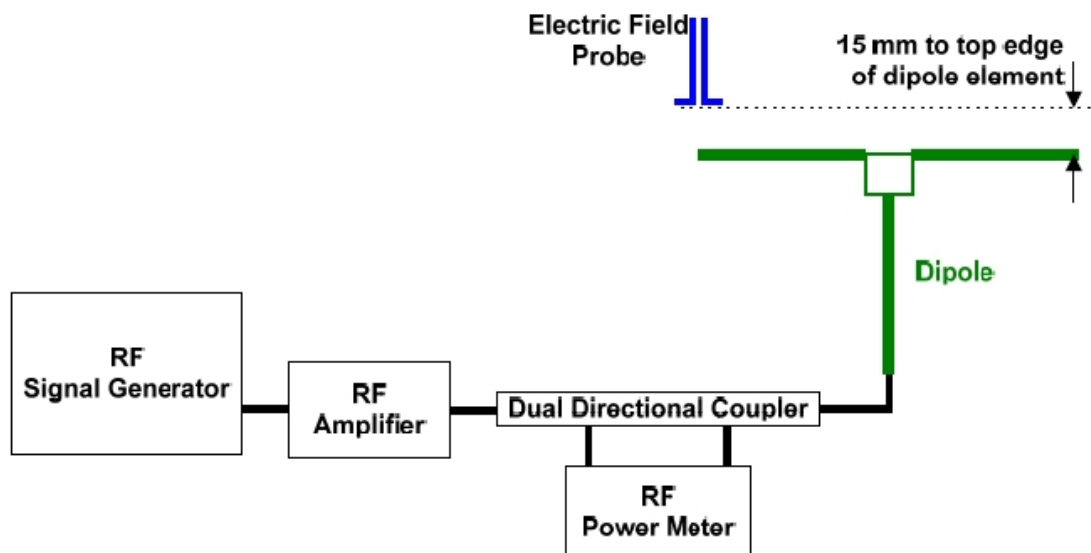


Figure 5 Dipole Validation Setup

Dipole Measurement Summary

| E-Field Scan | | | | | |
|--------------|-----------------|------------------|----------------------------------|-------|--------------------|
| Mode | Frequency (MHz) | Input Power (mW) | Value | | Test Date |
| CW | 835 | 100 | Target ¹ Value(V/m) | 105.4 | September 25, 2013 |
| | | | Measured ² Value(V/m) | 107.3 | May 25, 2014 |
| | | | Deviation ³ (%) | 1.80 | / |
| CW | 1880 | 100 | Target ¹ Value(V/m) | 94.2 | September 25, 2013 |
| | | | Measured ² Value(V/m) | 98.1 | May 25, 2014 |
| | | | Deviation ³ (%) | 4.14 | / |

2.5. Modulation interference factor

For any specific fixed and repeatable modulated signal, a modulation interference factor (MIF, expressed in dB) may be developed that relates its interference potential to its steady-state rms signal level or average power level. This factor is a function only of the audio-frequency amplitude modulation characteristics of the signal and is the same for field-strength and conducted power measurements. It is important to emphasize that the MIF is valid only for a specific repeatable audio-frequency amplitude modulation characteristic. Any change in modulation characteristic requires determination and application of a new MIF.

The MIF may be determined using a radiated RF field or a conducted RF signal.

- a) Using RF illumination or conducted coupling, apply the specific modulated signal in question to the measurement system at a level within its confirmed operating dynamic range.
- b) Measure the steady-state rms level at the output of the fast probe or sensor.
- c) Measure the steady-state average level at the weighting output.
- d) Without changing the square-law detector or weighting system, and using RF illumination or conducted coupling, substitute for the specific modulated signal a 1 kHz, 80% amplitudemodulated carrier at the same frequency and adjust its strength until the level at the weighting output equals the step d) measurement.
- e) Without changing the carrier level from step e), remove the 1 kHz modulation and again measure the steady-state rms level indicated at the output of the fast probe or sensor.
- f) The MIF for the specific modulation characteristic is provided by the ratio of the step e) measurement to the step c) measurement, expressed in dB ($20 \times \log(\text{step e})/\text{step b})$).

MIF

| Band | Worst case E-Field Modulation interference factor (dB) |
|---------------|--|
| GSM 850 | 3.61 |
| GSM 1900 | 3.49 |
| WCDMA Band II | -20.42 |
| WCDMA Band IV | -19.96 |
| WCDMA Band V | -20.32 |

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RXA1405-0123HAC01

Page 18 of 62

2.6. Conducted Output Power Measurement

Summary

The EUT is tested using an E5515C communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted power. Conducted output power was measured using an integrated RF connector and attached RF cable. This result contains conducted output power for the EUT.

Conducted Power Results

| | | | |
|---------------------|-----------------------------|--------------|--------------|
| GSM 850 | Conducted Power(dBm) | | |
| | Channel/Frequency(MHz) | | |
| | 128/824.2 | 190/836.6 | 251/848.8 |
| Test Results | 32.57 | 32.66 | 32.75 |
| GSM 1900 | Conducted Power(dBm) | | |
| | Channel/Frequency(MHz) | | |
| | Channel 512 | Channel 661 | Channel 810 |
| Test Results | 29.99 | 30.00 | 30.13 |
| UMTS Band II | Conducted Power(dBm) | | |
| | Channel/Frequency(MHz) | | |
| | Channel 9262 | Channel 9400 | Channel 9538 |
| 12.2kbps RMC | 22.73 | 22.54 | 22.53 |
| UMTS Band IV | Conducted Power(dBm) | | |
| | Channel/Frequency(MHz) | | |
| | Channel 1312 | Channel 1412 | Channel 1513 |
| 12.2kbps RMC | 22.73 | 23.02 | 22.73 |
| UMTS Band V | Conducted Power(dBm) | | |
| | Channel/Frequency(MHz) | | |
| | Channel 4132 | Channel 4183 | Channel 4233 |
| 12.2kbps RMC | 22.73 | 22.61 | 22.65 |

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 19 of 62

2.7. Analysis of RF Air Interface Technologies

RF air interface technologies that have low power have been found to produce sufficiently low RF interference potential, so that it is possible to exempt them from the product testing specified in Clause 5. As described in 5.4.4. An RF air interface technology of a device is exempt from testing when its average antenna input power plus its MIF is ≤ 17 dBm for any of its operating modes.

2.8. Individual Mode Evaluations

| Air Interface | Maximum average power (dBm) | Worst case MIF (dB) | Total (power +MIF,dBm) | C63.19 Testing Required |
|---------------|-----------------------------|---------------------|------------------------|-------------------------|
| GSM 850 | 32.75 | 3.61 | 36.36 | Yes |
| GSM 1900 | 30.13 | 3.49 | 33.62 | Yes |
| WCDMA Band II | 22.73 | -20.42 | 2.31 | No |
| WCDMA Band IV | 23.02 | -19.96 | 3.06 | No |
| WCDMA Band V | 22.73 | -20.32 | 2.41 | No |

Per ANSI C63.19-2011 RF Emissions testing for this device is required only for GSM voice modes. All other applicable air interfaces are exempt.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 20 of 62

3. Test Results

3.1. ANSI C63.19-2011 Limits

| Category | Telephone RF parameters < 960 MHz | |
|-------------|--------------------------------------|----------|
| Near field | E-field emissions | |
| Category M1 | 50 to 55 | dB (V/m) |
| Category M2 | 45 to 50 | dB (V/m) |
| Category M3 | 40 to 45 | dB (V/m) |
| Category M4 | < 40 | dB (V/m) |
| Category | Telephone RF parameters > 960 MHz | |
| Near field | E-field emissions | |
| Category M1 | 40 to 45 | dB (V/m) |
| Category M2 | 35 to 40 | dB (V/m) |
| Category M3 | 30 to 35 | dB (V/m) |
| Category M4 | < 30 | dB (V/m) |

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 21 of 62

3.2. Summary Test Results

GSM 850 Results

| Channel | Frequency (MHz) | MIF(dB) | E-Field Emissions dB (V/m) | Power Drift (dB) | Category | Graph Results |
|------------|-----------------|---------|----------------------------|------------------|----------|---------------|
| High/251 | 848.8 | 3.61 | 38.76 | 0.04 | M4 | Figure 8 |
| Middle/190 | 836.6 | 3.61 | 37.52 | -0.03 | M4 | Figure 9 |
| Low/128 | 824.2 | 3.61 | 35.66 | -0.04 | M4 | Figure 10 |

GSM 1900 Results

| Channel | Frequency (MHz) | MIF(dB) | E-Field Emissions dB (V/m) | Power Drift (dB) | Category | Graph Results |
|------------|-----------------|---------|----------------------------|------------------|----------|---------------|
| High/810 | 1909.8 | 3.49 | 27.21 | -0.01 | M4 | Figure 14 |
| Middle/661 | 1880 | 3.49 | 27.25 | -0.01 | M4 | Figure 15 |
| Low/512 | 1850.2 | 3.49 | 27.59 | 0.07 | M4 | Figure 16 |

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RXA1405-0123HAC01

Page 22 of 62

4. Measurement Uncertainty

| No. | Error source | Type | Uncertainty Value (%) | Prob. Dist. | k | $c_i E$ | $c_i H$ | Standard Uncertainty (%) u_i (%) E | Degree of freedom V_{eff} or v_i |
|-----|--------------------------------|------|-----------------------|-------------|------------|---------|---------|---|--------------------------------------|
| 1 | Probe Calibration | B | 5.1 | N | 1 | 1 | 1 | 5.1 | ∞ |
| 2 | Axial Isotropy | B | 4.7 | R | $\sqrt{3}$ | 1 | 1 | 2.7 | ∞ |
| 3 | Sensor Displacement | B | 16.5 | R | $\sqrt{3}$ | 1 | 0.145 | 9.5 | ∞ |
| 4 | Boundary Effects | B | 2.4 | R | $\sqrt{3}$ | 1 | 1 | 1.4 | ∞ |
| 5 | Test Arch | B | 7.2 | R | $\sqrt{3}$ | 1 | 0 | 4.1 | ∞ |
| 6 | Linearity | B | 4.7 | R | $\sqrt{3}$ | 1 | 1 | 2.7 | ∞ |
| 7 | Scaling to Peak Envelope Power | B | 2.0 | R | $\sqrt{3}$ | 1 | 1 | 1.2 | ∞ |
| 8 | System Detection Limit | B | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | ∞ |
| 9 | Readout Electronics | B | 0.3 | N | 1 | 1 | 1 | 0.3 | ∞ |
| 10 | Response Time | B | 0.8 | R | $\sqrt{3}$ | 1 | 1 | 0.5 | ∞ |
| 11 | Integration Time | B | 2.6 | R | $\sqrt{3}$ | 1 | 1 | 1.5 | ∞ |
| 12 | RF Ambient Conditions | B | 3.0 | R | $\sqrt{3}$ | 1 | 1 | 1.7 | ∞ |
| 13 | RF Reflections | B | 12.0 | R | $\sqrt{3}$ | 1 | 1 | 6.9 | ∞ |
| 14 | Probe Positioner | B | 1.2 | R | $\sqrt{3}$ | 1 | 0.67 | 0.7 | ∞ |
| 15 | Probe Positioning | A | 4.7 | R | $\sqrt{3}$ | 1 | 0.67 | 2.7 | ∞ |
| 16 | Extra. And Interpolation | B | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | ∞ |
| 17 | Device Positioning Vertical | B | 4.7 | R | $\sqrt{3}$ | 1 | 0.67 | 2.7 | ∞ |
| 18 | Device Positioning Lateral | B | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | ∞ |
| 19 | Device Holder and Phantom | B | 2.4 | R | $\sqrt{3}$ | 1 | 1 | 1.4 | ∞ |

Test Report

Page 23 of 62

| | | | | | | | | | |
|--|-------------------|---|-----|---|------------|---|------|-------|----------|
| 20 | Power Drift | B | 5.0 | R | $\sqrt{3}$ | 1 | 1 | 2.9 | ∞ |
| 21 | Phantom Thickness | B | 2.4 | R | $\sqrt{3}$ | 1 | 0.67 | 1.4 | ∞ |
| Combined standard uncertainty (%) | | | | | | | | 15.19 | |
| Expanded Std. uncertainty on power (K=2) | | | | | | | | 30.38 | |
| Expanded Std. uncertainty on field (K=2) | | | | | | | | 15.19 | |

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 24 of 62

5. Main Test Instruments

| No. | Name | Type | Serial Number | Calibration Date | Valid Period |
|-----|-----------------------------|----------------|---------------|--------------------------|--------------|
| 01 | Power meter | Agilent E4417A | GB41291714 | March 9, 2014 | One year |
| 02 | Power sensor | Agilent N8481H | MY50350004 | September 23, 2013 | One year |
| 03 | Signal Generator | HP 8341B | 2730A00804 | September 10, 2013 | One year |
| 04 | Amplifier | IXA-020 | 0401 | No Calibration Requested | |
| 05 | BTS | E5515C | MY48360988 | November 30, 2013 | One year |
| 06 | E-Field Probe | ER3DV6 | 2480 | February 28, 2014 | One year |
| 07 | DAE | DAE4 | 1317 | January 16, 2014 | One year |
| 08 | Validation Kit 835MHz | CD835V3 | 1023 | September 25, 2013 | One year |
| 09 | Validation Kit 1880MHz | CD1880V3 | 1018 | September 25, 2013 | One year |
| 10 | Hygrothermograph | WS-1 | 64591 | September 26, 2013 | One year |
| 11 | Audio Interference Analyzer | AIA | 1012 | No Calibration Requested | |

*****END OF REPORT *****

ANNEX A: System Check Results

HAC_System Performance Check at 835MHz_E

DUT: Dipole 835 MHz; Type: CD835V3; SN:1023

Date: 5/25/2014

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C

Phantom section: RF Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ER3DV6 - SN2480; ConvF(1, 1, 1); Calibrated: 2/28/2014

Electronics: DAE4 Sn1317; Calibrated: 1/16/2014

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

E Scan - measurement distance from the probe sensor center to CD835 Dipole = 15mm

2/Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 107.3 V/m

Applied MIF = 0.00 dB



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 91 V/m; Power Drift = 0.003 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|---------------------------|---------------------------|---------------------------|
| Grid 1 101.2 M4 | Grid 2 104.3 M4 | Grid 3 101.5 M4 |
| Grid 4 61.2 M4 | Grid 5 64.23 M4 | Grid 6 62.39 M4 |
| Grid 7 104.5 M4 | Grid 8 107.3 M4 | Grid 9 104.3 M4 |

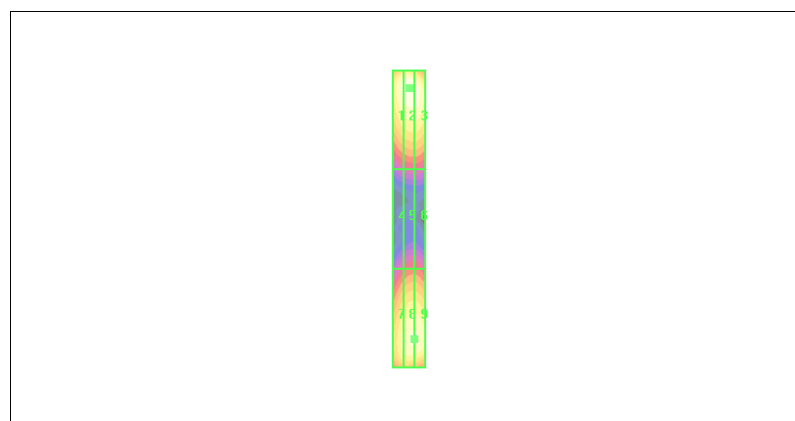

0 dB = 107.3V/m

Figure 6 System Performance Check 835MHz_E

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RXA1405-0123HAC01

Page 26 of 62

HAC_System Performance Check at 1880MHz_E

DUT: Dipole 1880 MHz; Type: CD1880V3; SN: 1018

Date: 5/25/2014

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C

Phantom section: RF Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ER3DV6 - SN2480; ConvF(1, 1, 1); Calibrated: 2/28/2014

Electronics: DAE4 Sn1317; Calibrated: 1/16/2014

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

E Scan - measurement distance from the probe sensor center to CD1880 Dipole = 15mm/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 98.1 V/m

Applied MIF = 0.00 dB

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 86V/m; Power Drift = 0.002 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak E-field in V/m

| | | |
|---------------------------|----------------------------|---------------------------|
| Grid 1 91.78 M2 | Grid 2 98.10 M2 | Grid 3 93.42M2 |
| Grid 4 71.76 M3 | Grid 5 73.56 M3 | Grid 6 71.17 M3 |
| Grid 7 87.15 M2 | Grid 8 89.46 M2 | Grid 9 89.01 M2 |

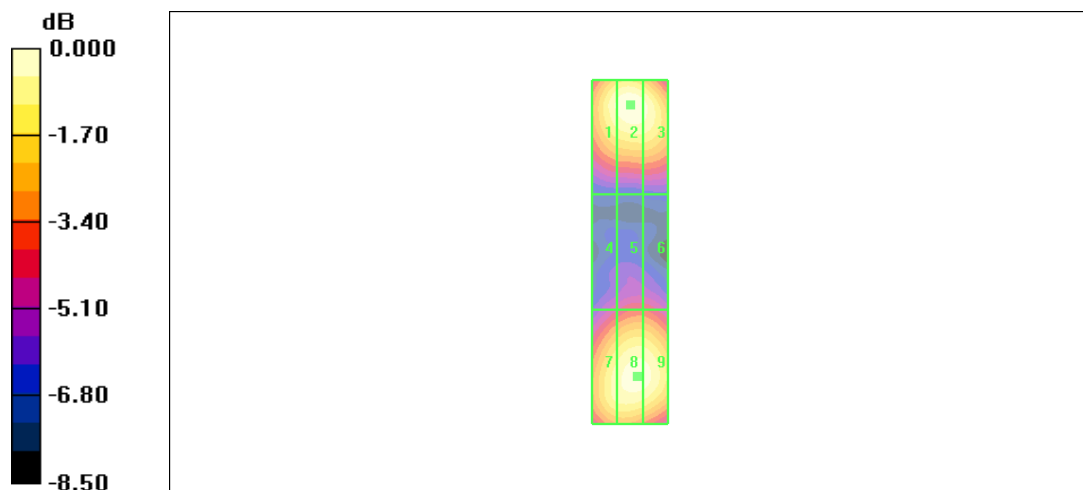


Figure 7 System Performance Check 1880MHz_E

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 27 of 62

ANNEX B: Graph Results

HAC RF E-Field GSM 850 High

Date: 5/25/2014

Communication System: UID 10021 - DAA, GSM-FDD (TDMA, GMSK); Frequency: 848.6 MHz; Duty Cycle: 1:8.6896

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C

Phantom section: RF Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ER3DV6 - SN2480; ConvF(1, 1, 1); Calibrated: 2/28/2014;

Electronics: DAE4 Sn1317; Calibrated: 1/16/2014

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

V45 GSM 850 HAC RF E-Field 2011 Device E-Field measurement (E-field scan for ANSI C63.19-2007 & -2011 compliance)/E Scan - ER3D: 15 mm from Probe Center to the Device High/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 68.50 V/m; Power Drift = -0.04 dB

Applied MIF = 3.61 dB

RF audio interference level = 38.76 dBV/m

Emission category: M4

MIF scaled E-field

| | | |
|---------------------------------|---------------------------------|---------------------------------|
| Grid 1 M4 37.23 dBV/m | Grid 2 M4 38.38 dBV/m | Grid 3 M4 38.36 dBV/m |
| Grid 4 M4 37.6 dBV/m | Grid 5 M4 38.76 dBV/m | Grid 6 M4 38.72 dBV/m |
| Grid 7 M4 37.88 dBV/m | Grid 8 M4 38.82 dBV/m | Grid 9 M4 38.74 dBV/m |

| Category | Limits for E-Field Emissions < 960MHz | Limits for E-Field Emissions > 960MHz |
|----------|---------------------------------------|---------------------------------------|
| M1 | 50 dBV/m - 55 dB V/m | 40 dBV/m - 45 dB V/m |
| M2 | 45 dBV/m - 50 dB V/m | 35 dBV/m - 40 dB V/m |
| M3 | 40 dBV/m - 45 dB V/m | 30 dBV/m - 35 dB V/m |
| M4 | <40 dBV/m | <30 dBV/m |

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 28 of 62

Cursor:

Total = 38.82 dBV/m

E Category: M4

Location: -5, 14.5, 8.7 mm

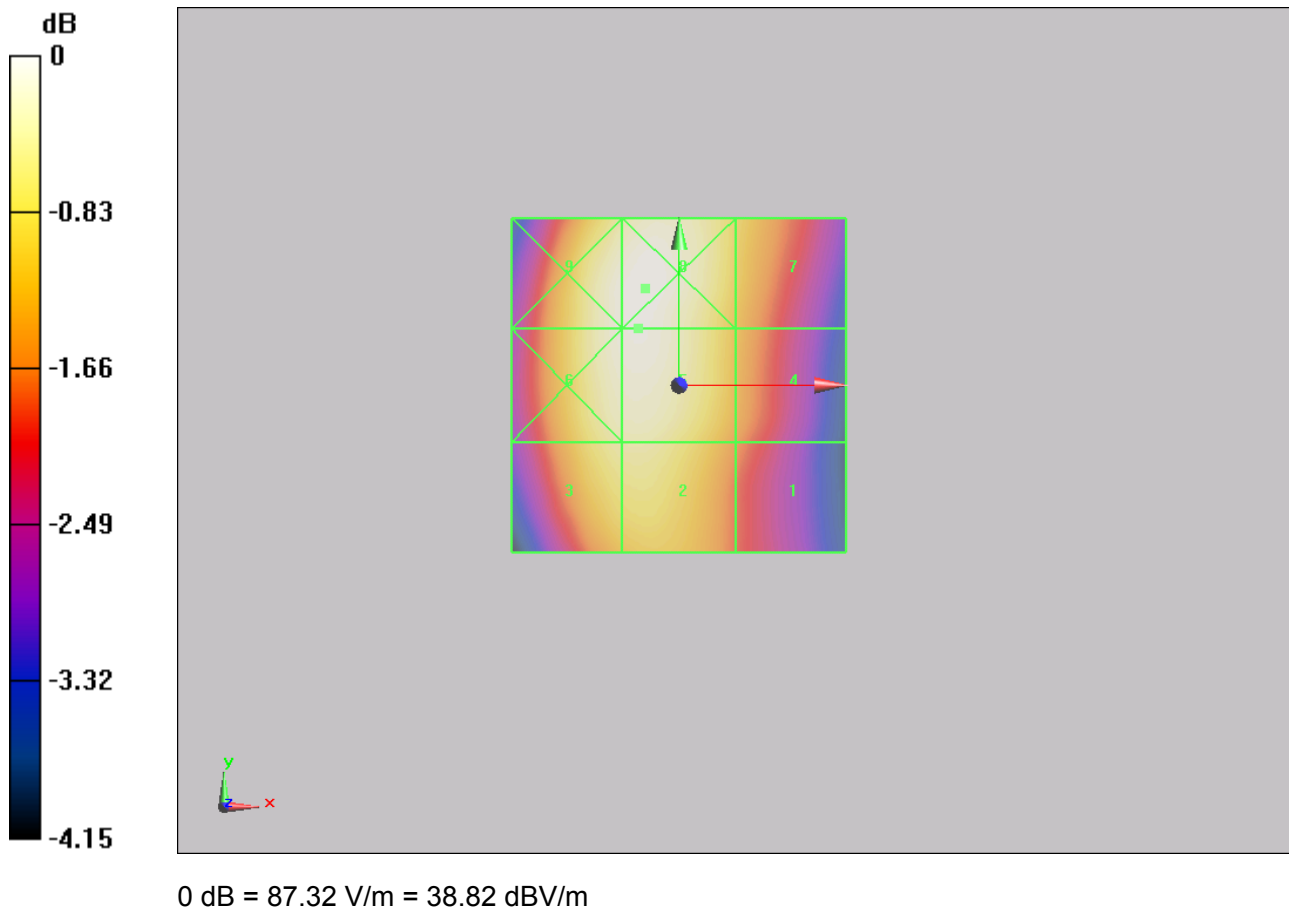


Figure 8 HAC RF E-Field GSM 850 Channel 251

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 29 of 62

HAC RF E-Field GSM 850 Middle

Date: 5/25/2014

Communication System: UID 10021 - DAA, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz; Duty Cycle: 1:8.6896

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C

Phantom section: RF Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ER3DV6 - SN2480; ConvF(1, 1, 1); Calibrated: 2/28/2014;

Electronics: DAE4 Sn1317; Calibrated: 1/16/2014

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

V45 GSM 850 HAC RF E-Field 2011 Device E-Field measurement (E-field scan for ANSI C63.19-2007 & -2011 compliance)/E Scan - ER3D: 15 mm from Probe Center to the Device Middle/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 61.19 V/m; Power Drift = -0.03 dB

Applied MIF = 3.61 dB

RF audio interference level = 37.52 dBV/m

Emission category: M4

MIF scaled E-field

| | | |
|--|--|--|
| Grid 1 M4 35.95 dBV/m | Grid 2 M4 37.1 dBV/m | Grid 3 M4 37.06 dBV/m |
| Grid 4 M4 36.54 dBV/m | Grid 5 M4 37.52 dBV/m | Grid 6 M4 37.46 dBV/m |
| Grid 7 M4 36.84 dBV/m | Grid 8 M4 37.58 dBV/m | Grid 9 M4 37.48 dBV/m |

| Category | Limits for E-Field Emissions < 960MHz | Limits for E-Field Emissions > 960MHz |
|----------|---------------------------------------|---------------------------------------|
| M1 | 50 dBV/m - 55 dB V/m | 40 dBV/m - 45 dB V/m |
| M2 | 45 dBV/m - 50 dB V/m | 35 dBV/m - 40 dB V/m |
| M3 | 40 dBV/m - 45 dB V/m | 30 dBV/m - 35 dB V/m |
| M4 | <40 dBV/m | <30 dBV/m |

Cursor:

Total = 37.58 dBV/m

E Category: M4

Location: -5, 14.5, 8.7 mm

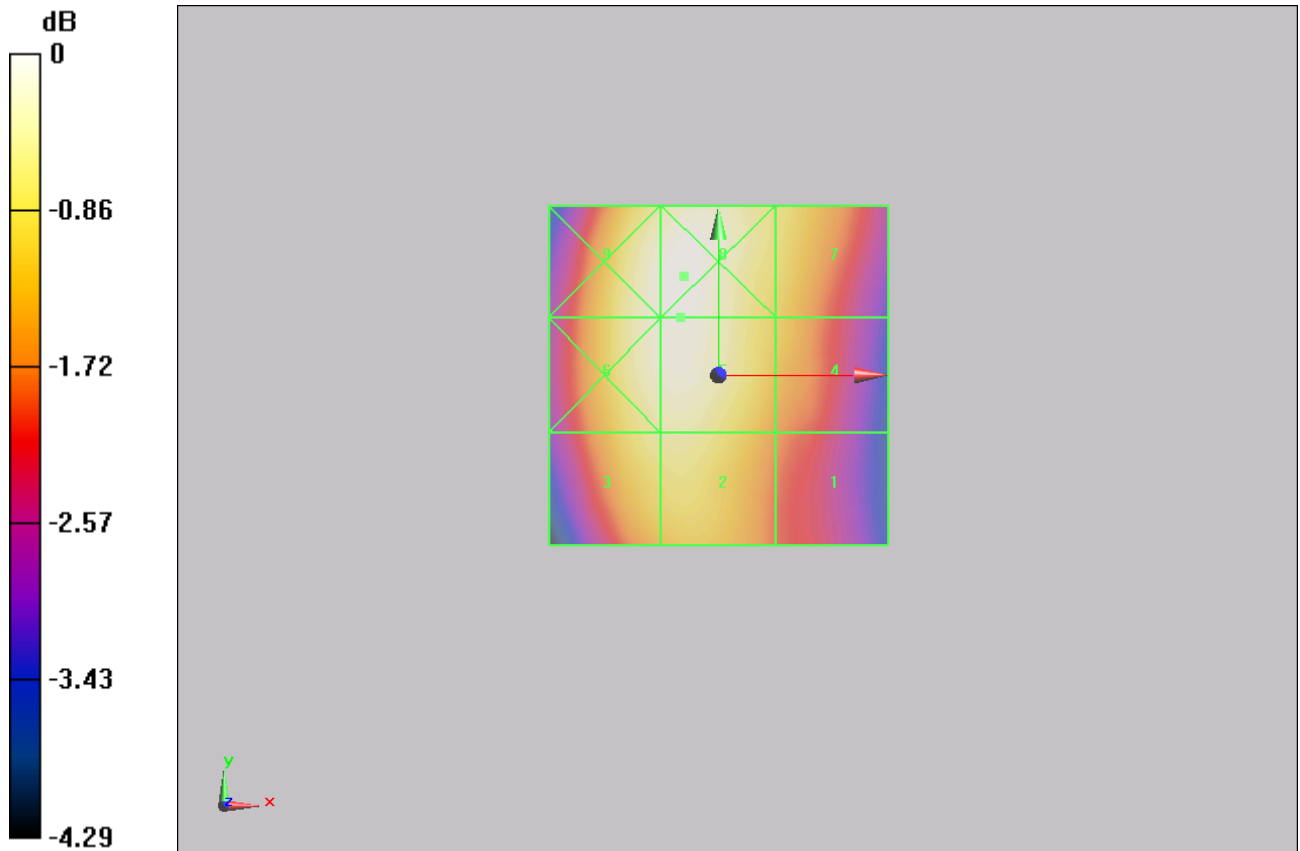


Figure 9 HAC RF E-Field GSM 850 Channel 190

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 31 of 62

HAC RF E-Field GSM 850 Low

Date: 5/25/2014

Communication System: UID 10021 - DAA, GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.6896

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C

Phantom section: RF Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ER3DV6 - SN2480; ConvF(1, 1, 1); Calibrated: 2/28/2014;

Electronics: DAE4 Sn1317; Calibrated: 1/16/2014

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

V45 GSM 850 HAC RF E-Field 2011 Device E-Field measurement (E-field scan for ANSI C63.19-2007 & -2011 compliance)/E Scan - ER3D: 15 mm from Probe Center to the Device Low/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 48.36 V/m; Power Drift = -0.04 dB

Applied MIF = 3.61 dB

RF audio interference level = 35.66 dBV/m

Emission category: M4

MIF scaled E-field

| | | |
|--|--|--|
| Grid 1 M4 34.21 dBV/m | Grid 2 M4 35.29 dBV/m | Grid 3 M4 35.25 dBV/m |
| Grid 4 M4 34.54 dBV/m | Grid 5 M4 35.66 dBV/m | Grid 6 M4 35.6 dBV/m |
| Grid 7 M4 34.8 dBV/m | Grid 8 M4 35.7 dBV/m | Grid 9 M4 35.6 dBV/m |


| Category | Limits for E-Field Emissions < 960MHz | Limits for E-Field Emissions > 960MHz |
|----------|---------------------------------------|---------------------------------------|
| M1 | 50 dBV/m - 55 dB V/m | 40 dBV/m - 45 dB V/m |
| M2 | 45 dBV/m - 50 dB V/m | 35 dBV/m - 40 dB V/m |
| M3 | 40 dBV/m - 45 dB V/m | 30 dBV/m - 35 dB V/m |
| M4 | <40 dBV/m | <30 dBV/m |

Cursor:

Total = 35.70 dBV/m

E Category: M4

Location: -4.5, 14.5, 8.7 mm

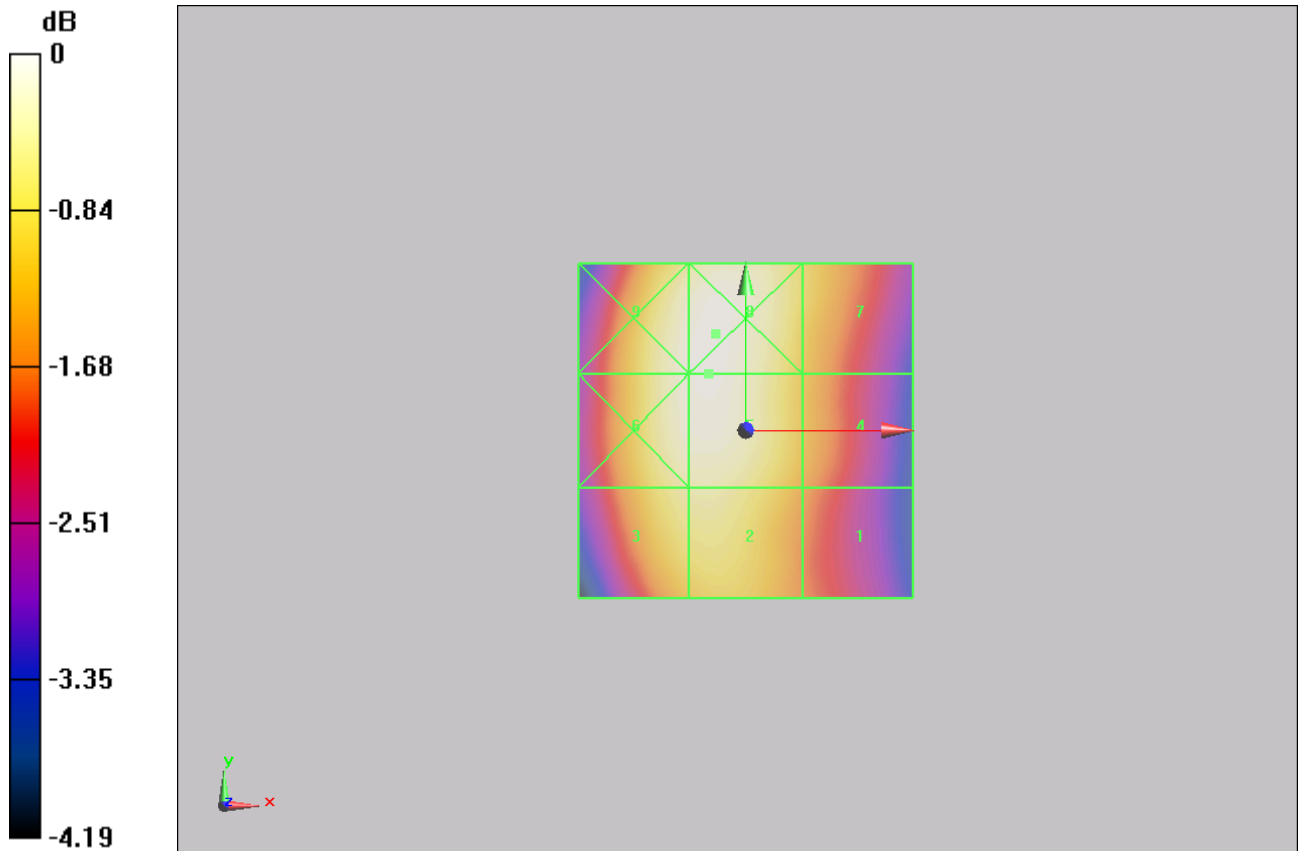

0 dB = 60.93 V/m = 35.70 dBV/m

Figure 10 HAC RF E-Field GSM 850 Channel 128

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 33 of 62

HAC RF E-Field GSM 1900 High

Date: 5/25/2014

Communication System: UID 10021 - DAA, GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.6896

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C

Phantom section: RF Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ER3DV6 - SN2480; ConvF(1, 1, 1); Calibrated: 2/28/2014;

Electronics: DAE4 Sn1317; Calibrated: 1/16/2014

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

V45 GSM 1900 HAC RF E-Field 2011 Device E-Field measurement (E-field scan for ANSI C63.19-2007 & -2011 compliance)/E Scan - ER3D: 15 mm from Probe Center to the Device High/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.595 V/m; Power Drift = -0.01 dB

Applied MIF = 3.49 dB

RF audio interference level = 27.21 dBV/m

Emission category: M4

MIF scaled E-field

| | | |
|---------------------------------|---------------------------------|---------------------------------|
| Grid 1 M4 27.12 dBV/m | Grid 2 M4 27.77 dBV/m | Grid 3 M4 27.38 dBV/m |
| Grid 4 M4 21.81 dBV/m | Grid 5 M4 23.37 dBV/m | Grid 6 M4 23.88 dBV/m |
| Grid 7 M4 26.45 dBV/m | Grid 8 M4 27.21 dBV/m | Grid 9 M4 27.08 dBV/m |

| Category | Limits for E-Field Emissions < 960MHz | Limits for E-Field Emissions > 960MHz |
|----------|---------------------------------------|---------------------------------------|
| M1 | 50 dBV/m - 55 dB V/m | 40 dBV/m - 45 dB V/m |
| M2 | 45 dBV/m - 50 dB V/m | 35 dBV/m - 40 dB V/m |
| M3 | 40 dBV/m - 45 dB V/m | 30 dBV/m - 35 dB V/m |
| M4 | <40 dBV/m | <30 dBV/m |

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 34 of 62

Cursor:

Total = 27.77 dBV/m

E Category: M4

Location: -1, -25, 8.7 mm

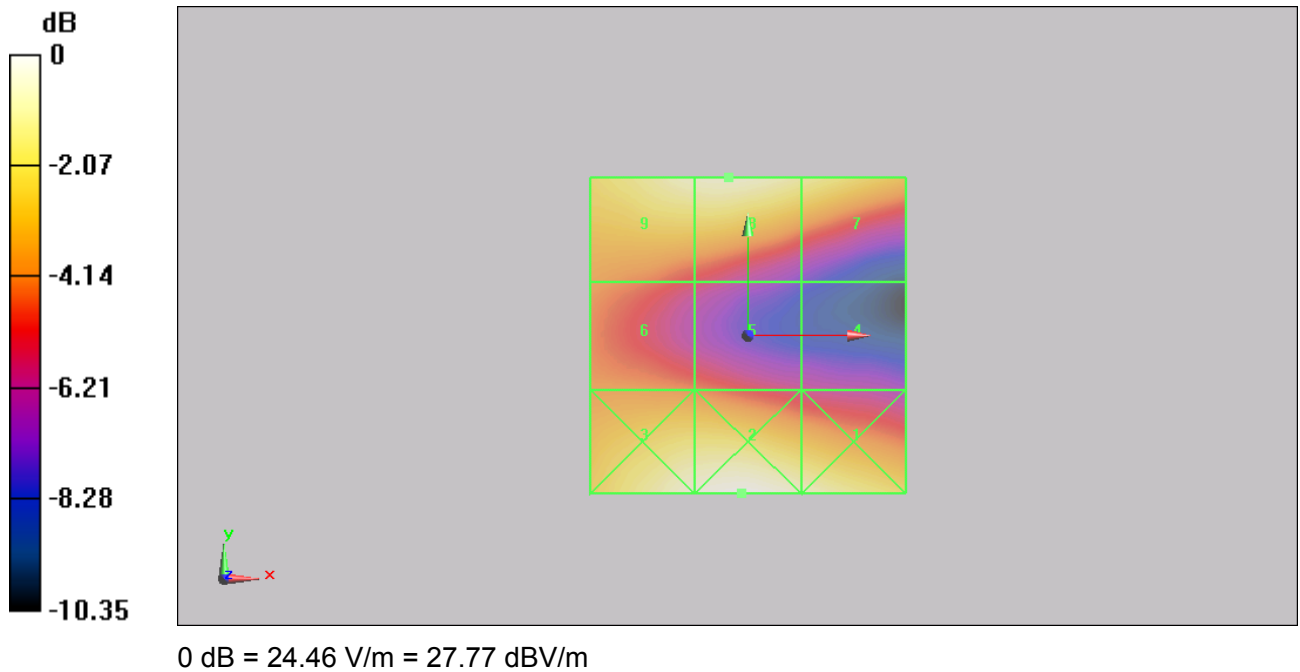


Figure 11 HAC RF E-Field GSM 1900 Channel 810

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 35 of 62

HAC RF E-Field GSM 1900 Middle

Date: 5/25/2014

Communication System: UID 10021 - DAA, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.6896

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C

Phantom section: RF Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ER3DV6 - SN2480; ConvF(1, 1, 1); Calibrated: 2/28/2014;

Electronics: DAE4 Sn1317; Calibrated: 1/16/2014

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

V45 GSM 1900 HAC RF E-Field 2011 Device E-Field measurement (E-field scan for ANSI C63.19-2007 & -2011 compliance)/E Scan - ER3D: 15 mm from Probe Center to the Device Middle/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.431 V/m; Power Drift = -0.01 dB

Applied MIF = 3.49 dB

RF audio interference level = 27.25 dBV/m

Emission category: M4

MIF scaled E-field

| | | |
|---------------------------------|---------------------------------|---------------------------------|
| Grid 1 M4 27.3 dBV/m | Grid 2 M4 28.02 dBV/m | Grid 3 M4 27.77 dBV/m |
| Grid 4 M4 21.94 dBV/m | Grid 5 M4 23.63 dBV/m | Grid 6 M4 24.25 dBV/m |
| Grid 7 M4 26.22 dBV/m | Grid 8 M4 27.25 dBV/m | Grid 9 M4 27.22 dBV/m |

| Category | Limits for E-Field Emissions < 960MHz | Limits for E-Field Emissions > 960MHz |
|----------|---------------------------------------|---------------------------------------|
| M1 | 50 dBV/m - 55 dB V/m | 40 dBV/m - 45 dB V/m |
| M2 | 45 dBV/m - 50 dB V/m | 35 dBV/m - 40 dB V/m |
| M3 | 40 dBV/m - 45 dB V/m | 30 dBV/m - 35 dB V/m |
| M4 | <40 dBV/m | <30 dBV/m |

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 36 of 62

Cursor:

Total = 28.02 dBV/m

E Category: M4

Location: -3, -25, 8.7 mm

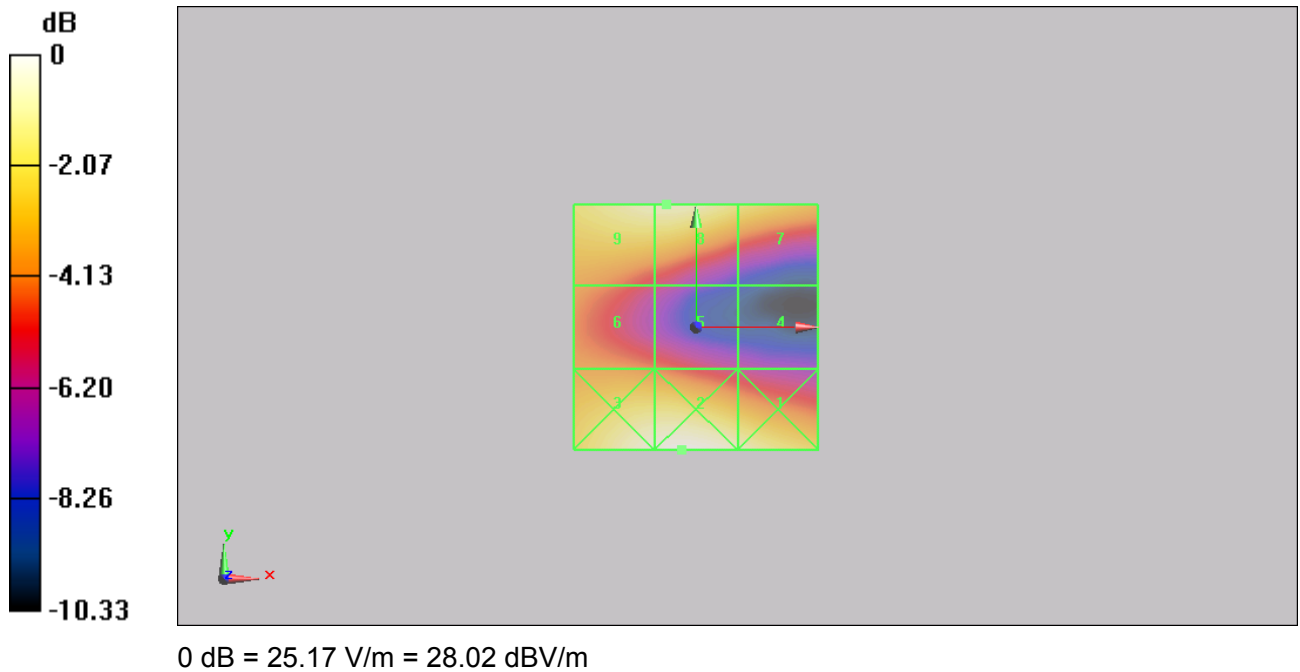


Figure 12 HAC RF E-Field GSM 1900 Channel 661

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 37 of 62

HAC RF E-Field GSM 1900 Low

Date: 5/25/2014

Communication System: UID 10021 - DAA, GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.6896

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C

Phantom section: RF Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ER3DV6 - SN2480; ConvF(1, 1, 1); Calibrated: 2/28/2014;

Electronics: DAE4 Sn1317; Calibrated: 1/16/2014

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

V45 GSM 1900 HAC RF E-Field 2011 Device E-Field measurement (E-field scan for ANSI C63.19-2007 & -2011 compliance)/E Scan - ER3D: 15 mm from Probe Center to the Device Low/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.435 V/m; Power Drift = 0.07 dB

Applied MIF = 3.49 dB

RF audio interference level = 27.59 dBV/m

Emission category: M4

MIF scaled E-field

| | | |
|---------------------------------|---------------------------------|---------------------------------|
| Grid 1 M4 26.74 dBV/m | Grid 2 M4 27.64 dBV/m | Grid 3 M4 27.35 dBV/m |
| Grid 4 M4 20.72 dBV/m | Grid 5 M4 22.35 dBV/m | Grid 6 M4 23.2 dBV/m |
| Grid 7 M4 26.57 dBV/m | Grid 8 M4 27.59 dBV/m | Grid 9 M4 27.47 dBV/m |

| Category | Limits for E-Field Emissions < 960MHz | Limits for E-Field Emissions > 960MHz |
|----------|---------------------------------------|---------------------------------------|
| M1 | 50 dBV/m - 55 dB V/m | 40 dBV/m - 45 dB V/m |
| M2 | 45 dBV/m - 50 dB V/m | 35 dBV/m - 40 dB V/m |
| M3 | 40 dBV/m - 45 dB V/m | 30 dBV/m - 35 dB V/m |
| M4 | <40 dBV/m | <30 dBV/m |

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 38 of 62

Cursor:

Total = 27.64 dBV/m

E Category: M4

Location: -1.5, -25, 8.7 mm

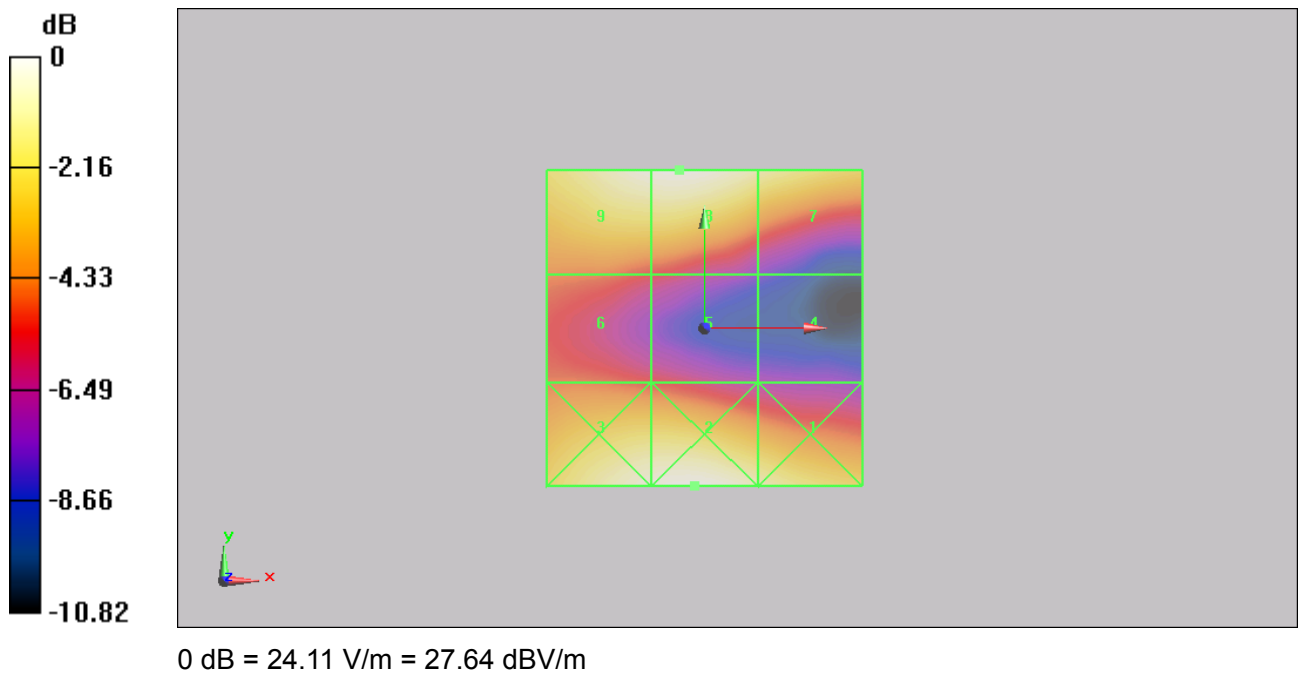


Figure 13 HAC RF E-Field GSM 1900 Channel 512

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RXA1405-0123HAC01

Page 39 of 62

ANNEX C: E-Probe Calibration Certificate

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **Auden**

Certificate No: **ER3-2480_Feb14**

CALIBRATION CERTIFICATE

Object **ER3DV6 - SN:2480**

Calibration procedure(s) **QA CAL-02.v8, QA CAL-25.v6**
Calibration procedure for E-field probes optimized for close near field
evaluations in air

Calibration date: **February 28, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B | GB41293874 | 04-Apr-13 (No. 217-01733) | Apr-14 |
| Power sensor E4412A | MY41498087 | 04-Apr-13 (No. 217-01733) | Apr-14 |
| Reference 3 dB Attenuator | SN: S5054 (3c) | 04-Apr-13 (No. 217-01737) | Apr-14 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 04-Apr-13 (No. 217-01735) | Apr-14 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 04-Apr-13 (No. 217-01738) | Apr-14 |
| Reference Probe ER3DV6 | SN: 2328 | 10-Oct-13 (No. ER3-2328_Oct13) | Oct-14 |
| DAE4 | SN: 789 | 15-May-13 (No. DAE4-789_May13) | May-14 |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| RF generator HP 8648C | US3642U01700 | 4-Aug-99 (in house check Apr-13) | In house check: Apr-16 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

| | Name | Function | Signature |
|---|----------------|-----------------------|-----------|
| Calibrated by: | Israe El-Naouq | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. | | | |

Issued: March 3, 2014

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RXA1405-0123HAC01

Page 40 of 62

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

| | |
|--------------------------|---|
| NORM _{x,y,z} | sensitivity in free space |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization ϕ | ϕ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005
- CTIA Test Plan for Hearing Aid Compatibility, April 2010.

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ for XY sensors and $\vartheta = 90$ for Z sensor ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart).
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- Spherical isotropy (3D deviation from isotropy)**: in a locally homogeneous field realized using an open waveguide setup.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 41 of 62

ER3DV6 – SN:2480

February 28, 2014

Probe ER3DV6

SN:2480

Manufactured: March 31, 2009
Calibrated: February 28, 2014

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RXA1405-0123HAC01

Page 42 of 62

ER3DV6- SN:2480

February 28, 2014

DASY/EASY - Parameters of Probe: ER3DV6 - SN:2480

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|--|----------|----------|----------|--------------|
| Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) | 2.05 | 1.48 | 1.83 | $\pm 10.1\%$ |
| DCP (mV) ^B | 98.6 | 100.1 | 100.7 | |

Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB $\sqrt{\mu\text{V}}$ | C | D dB | VR mV | Unc ^E (k=2) |
|---------------|---|---|---------|------------------------------|------|---------|----------|---------------------------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 189.9 | $\pm 2.7\%$ |
| | | Y | 0.0 | 0.0 | 1.0 | | 194.3 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 152.9 | |
| 10011- CAB | UMTS-FDD (WCDMA) | X | 3.19 | 66.3 | 18.6 | 2.91 | 113.2 | $\pm 0.7\%$ |
| | | Y | 3.16 | 66.1 | 18.2 | | 113.9 | |
| | | Z | 3.28 | 66.9 | 18.6 | | 122.0 | |
| 10012- CAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) | X | 3.24 | 70.6 | 20.1 | 1.87 | 118.8 | $\pm 0.7\%$ |
| | | Y | 2.44 | 65.2 | 17.1 | | 115.4 | |
| | | Z | 3.26 | 70.4 | 19.7 | | 124.7 | |
| 10021- DAB | GSM-FDD (TDMA, GMSK) | X | 21.47 | 99.2 | 28.8 | 9.39 | 130.8 | $\pm 1.9\%$ |
| | | Y | 11.84 | 91.8 | 25.6 | | 108.7 | |
| | | Z | 19.62 | 95.3 | 27.4 | | 100.1 | |
| 10039- CAB | CDMA2000 (1xRTT, RC1) | X | 4.85 | 66.8 | 19.4 | 4.57 | 115.3 | $\pm 0.9\%$ |
| | | Y | 4.63 | 66.0 | 18.7 | | 114.4 | |
| | | Z | 4.73 | 66.6 | 19.0 | | 122.4 | |
| 10081- CAB | CDMA2000 (1xRTT, RC3) | X | 3.89 | 65.6 | 18.6 | 3.97 | 111.7 | $\pm 0.7\%$ |
| | | Y | 3.78 | 65.2 | 18.2 | | 111.6 | |
| | | Z | 3.84 | 65.6 | 18.4 | | 118.9 | |
| 10082- CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate) | X | 52.11 | 99.8 | 23.0 | 4.77 | 113.1 | $\pm 3.0\%$ |
| | | Y | 4.25 | 73.2 | 14.2 | | 149.2 | |
| | | Z | 51.55 | 99.8 | 23.1 | | 127.1 | |
| 10295- AAB | CDMA2000, RC1, SO3, 1/8th Rate 25 fr. | X | 17.11 | 98.5 | 39.7 | 12.49 | 109.9 | $\pm 3.8\%$ |
| | | Y | 13.96 | 96.8 | 39.9 | | 95.0 | |
| | | Z | 19.00 | 99.3 | 38.8 | | 129.3 | |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^B Numerical linearization parameter; uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

TA Technology (Shanghai) Co., Ltd.
Test Report


Report No. RXA1405-0123HAC01

Page 43 of 62

ER3DV6- SN:2480

February 28, 2014

Frequency Response of E-Field
(TEM-Cell:ifi110 EXX, Waveguide: R22)

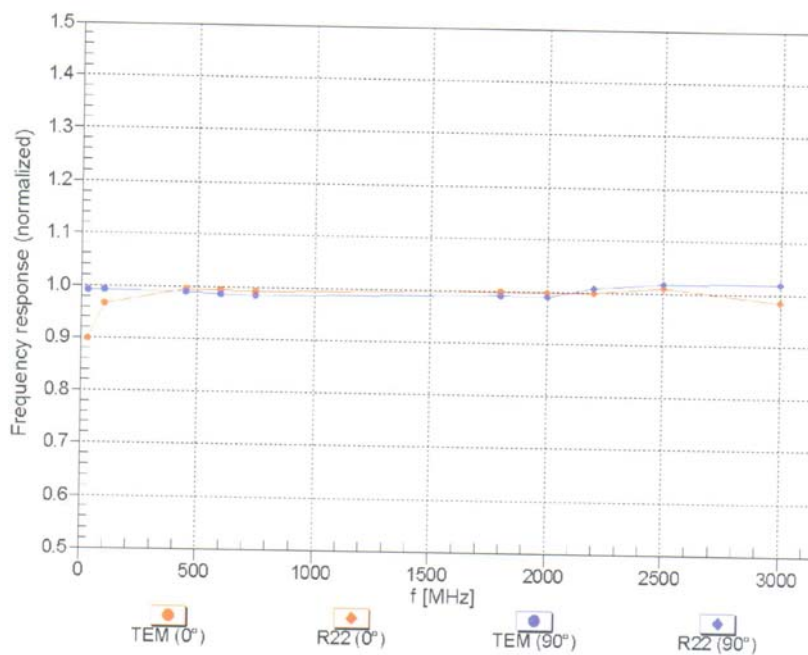

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

TA Technology (Shanghai) Co., Ltd.
Test Report


Report No. RXA1405-0123HAC01

Page 44 of 62


ER3DV6- SN:2480

February 28, 2014

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

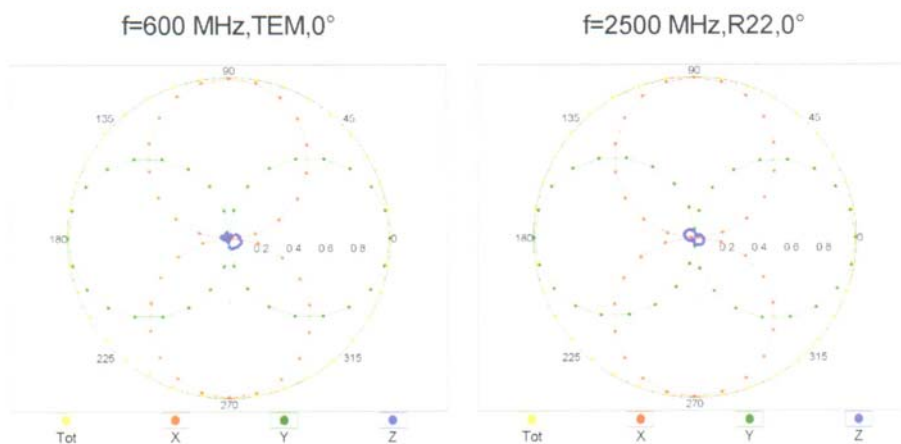


Receiving Pattern (ϕ), $\vartheta = 90^\circ$

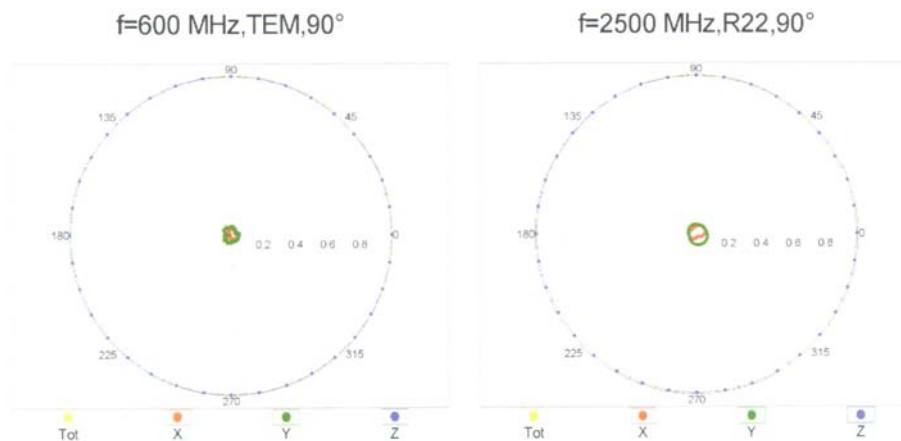

ER3DV6- SN:2480


February 28, 2014

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

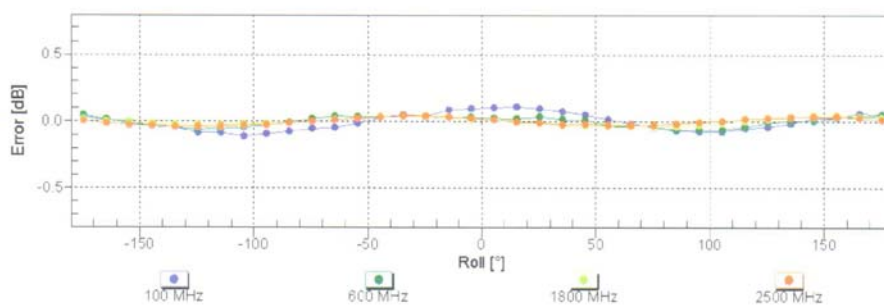

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Receiving Pattern (ϕ), $\vartheta = 90^\circ$

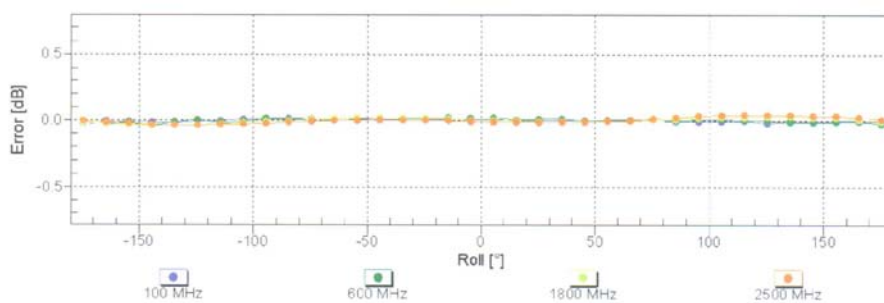

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RXA1405-0123HAC01


Page 46 of 62

ER3DV6- SN:2480

February 28, 2014

Dynamic Range f(E-field)

(TEM cell , f = 900 MHz)

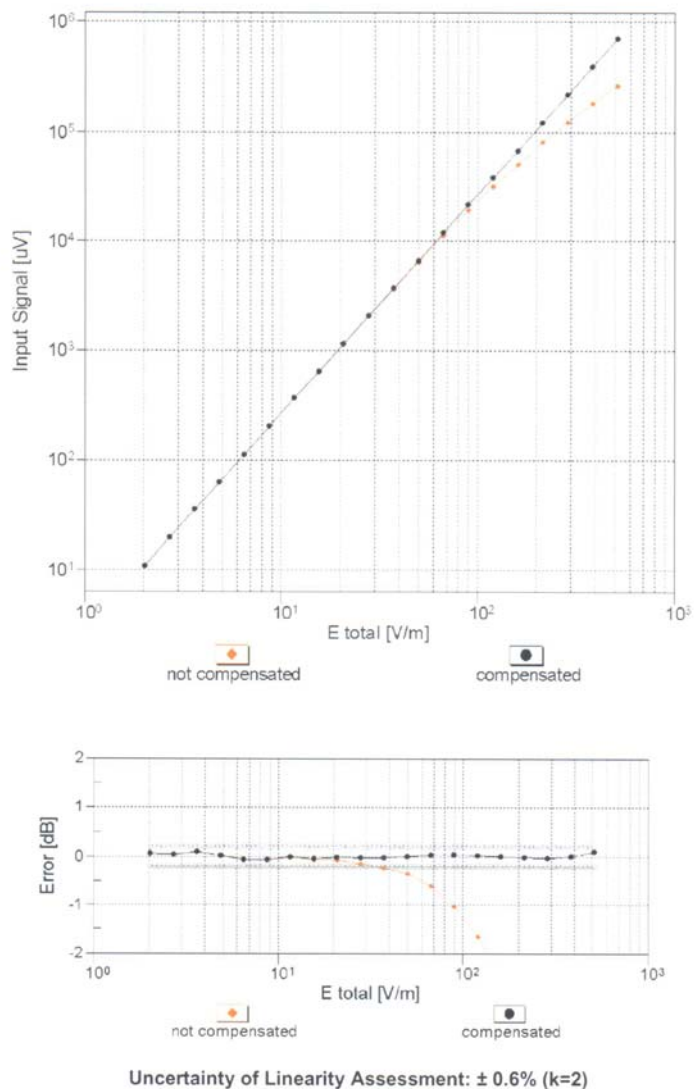

TA Technology (Shanghai) Co., Ltd.
Test Report


Report No. RXA1405-0123HAC01

Page 47 of 62

ER3DV6- SN:2480

February 28, 2014

Deviation from Isotropy in Air
Error (ϕ , θ), $f = 900$ MHz

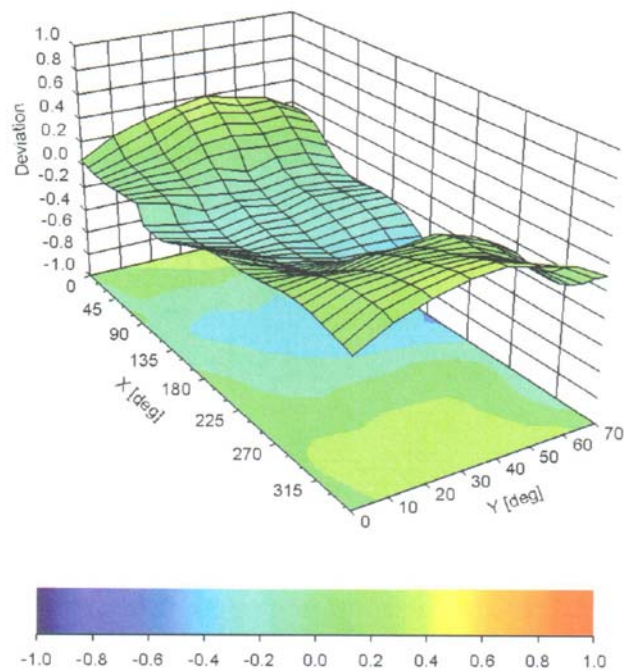

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 48 of 62

ER3DV6- SN:2480

February 28, 2014

DASY/EASY - Parameters of Probe: ER3DV6 - SN:2480

Other Probe Parameters

| | |
|---|-------------|
| Sensor Arrangement | Rectangular |
| Connector Angle (°) | 15.5 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 10 mm |
| Tip Diameter | 8 mm |
| Probe Tip to Sensor X Calibration Point | 2.5 mm |
| Probe Tip to Sensor Y Calibration Point | 2.5 mm |
| Probe Tip to Sensor Z Calibration Point | 2.5 mm |

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RXA1405-0123HAC01

Page 49 of 62

ANNEX D: CD835V3 Dipole Calibration Certificate

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TMC-BJ (Auden)**

Certificate No: **CD835V3-1023_Sep13**

CALIBRATION CERTIFICATE

Object **CD835V3 - SN: 1023**

Calibration procedure(s) **QA CAL-20.v6**
Calibration procedure for dipoles in air

Calibration date: **September 25, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|------------------|-----------------------------------|------------------------|
| Power meter EPM-442A | GB37480704 | 01-Nov-12 (No. 217-01640) | Oct-13 |
| Power sensor HP 8481A | US37292783 | 01-Nov-12 (No. 217-01640) | Oct-13 |
| Reference 10 dB Attenuator | SN: 5047.2 (10q) | 04-Apr-13 (No. 217-01731) | Apr-14 |
| Probe ER3DV6 | SN: 2336 | 28-Dec-12 (No. ER3-2336_Dec12) | Dec-13 |
| Probe H3DV6 | SN: 6065 | 28-Dec-12 (No. H3-6065_Dec12) | Dec-13 |
| DAE4 | SN: 781 | 13-Sep-13 (No. DAE4-781_Sep13) | Sep-14 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| Power meter Agilent 4419B | SN: GB42420191 | 09-Oct-09 (in house check Oct-12) | In house check: Oct-13 |
| Power sensor HP E4412A | SN: MY41495277 | 01-Apr-08 (in house check Oct-12) | In house check: Oct-13 |
| Power sensor HP 8482A | SN: US37295597 | 09-Oct-09 (in house check Oct-12) | In house check: Oct-13 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (in house check Oct-12) | In house check: Oct-13 |
| RF generator R&S SMT-06 | SN: 832283/011 | 27-Aug-12 (in house check Oct-12) | In house check: Oct-14 |

Calibrated by: **Claudio Leubler** **Laboratory Technician**

Approved by: **Fin Bomholt** **Deputy Technical Manager**

Signature

Issued: September 26, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RXA1405-0123HAC01

Page 50 of 62

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|------------------------------------|---------------------|---------|
| DASY Version | DASY5 | V52.8.7 |
| Phantom | HAC Test Arch | |
| Distance Dipole Top - Probe Center | 15mm | |
| Scan resolution | dx, dy = 5 mm | |
| Frequency | 835 MHz \pm 1 MHz | |
| Input power drift | < 0.05 dB | |

Maximum Field values at 835 MHz

| E-field 15 mm above dipole surface | condition | Interpolated maximum |
|------------------------------------|--------------------|--------------------------------|
| Maximum measured above high end | 100 mW input power | 105.4 V / m |
| Maximum measured above low end | 100 mW input power | 103.7 V / m |
| Averaged maximum above arm | 100 mW input power | 104.5 V / m \pm 12.8 % (k=2) |

Appendix

Antenna Parameters

| Frequency | Return Loss | Impedance |
|-----------|-------------|---------------------------------|
| 800 MHz | 17.1 dB | 44.0 Ω - 11.8 j Ω |
| 835 MHz | 24.8 dB | 50.9 Ω + 5.7 j Ω |
| 900 MHz | 15.3 dB | 61.4 Ω - 15.7 j Ω |
| 950 MHz | 23.1 dB | 46.7 Ω + 5.9 j Ω |
| 960 MHz | 16.9 dB | 53.8 Ω + 14.5 j Ω |

3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.


TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RXA1405-0123HAC01

Page 51 of 62

Impedance Measurement Plot

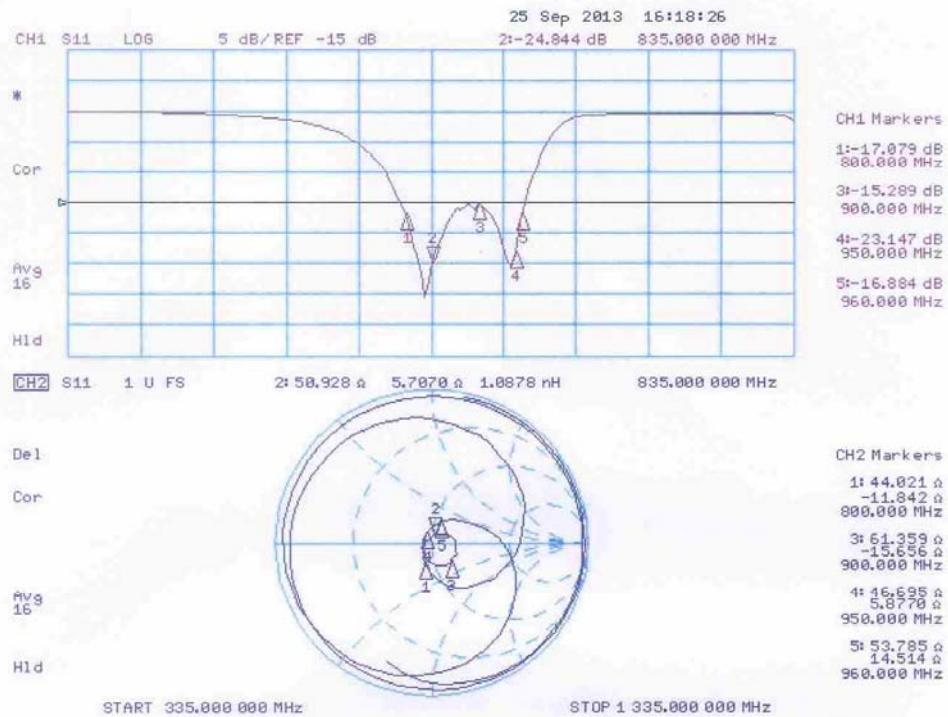

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RXA1405-0123HAC01

Page 52 of 62

DASY5 E-field Result

Date: 25.09.2013

Test Laboratory: SPEAG Lab2

DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: CD835V3 - SN: 1023

Communication System: UID 0 - CW ; Frequency: 835 MHz
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
Phantom section: RF Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ER3DV6 - SN2336; ConvF(1, 1, 1); Calibrated: 28.12.2012;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 13.09.2013
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole E-Field measurement @ 835MHz/E-Scan - 835MHz d=15mm/Hearing Aid Compatibility Test (41x361x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 107.7 V/m; Power Drift = 0.03 dB



PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 105.4 V/m

Near-field category: M4 (AWF 0 dB)

PMF scaled E-field

| | | |
|-----------|-----------|-----------|
| Grid 1 M4 | Grid 2 M4 | Grid 3 M4 |
| 101.9 V/m | 103.7 V/m | 102.4 V/m |
| Grid 4 M4 | Grid 5 M4 | Grid 6 M4 |
| 62.57 V/m | 63.29 V/m | 62.37 V/m |
| Grid 7 M4 | Grid 8 M4 | Grid 9 M4 |
| 103.1 V/m | 105.4 V/m | 104.3 V/m |

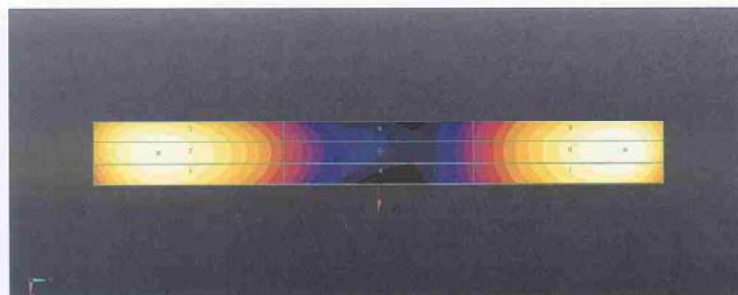

0 dB = 105.4 V/m = 40.46 dBV/m

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RXA1405-0123HAC01

Page 53 of 62

ANNEX E: CD1880V3 Dipole Calibration Certificate

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TMC-BJ (Auden)**

Certificate No: **CD1880V3-1018_Sep13**

CALIBRATION CERTIFICATE

Object **CD1880V3 - SN: 1018**

Calibration procedure(s) **QA CAL-20.v6**
Calibration procedure for dipoles in air

Calibration date: **September 25, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|------------------|-----------------------------------|------------------------|
| Power meter EPM-442A | GB37480704 | 01-Nov-12 (No. 217-01640) | Oct-13 |
| Power sensor HP 8481A | US37292783 | 01-Nov-12 (No. 217-01640) | Oct-13 |
| Reference 10 dB Attenuator | SN: 5047.2 (10q) | 04-Apr-13 (No. 217-01731) | Apr-14 |
| Probe ER3DV6 | SN: 2336 | 28-Dec-12 (No. ER3-2336_Dec12) | Dec-13 |
| Probe H3DV6 | SN: 6065 | 28-Dec-12 (No. H3-6065_Dec12) | Dec-13 |
| DAE4 | SN: 781 | 13-Sep-13 (No. DAE4-781_Sep13) | Sep-14 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| Power meter Agilent 4419B | SN: GB42420191 | 09-Oct-09 (in house check Oct-12) | In house check: Oct-13 |
| Power sensor HP E4412A | SN: MY41495277 | 01-Apr-08 (in house check Oct-12) | In house check: Oct-13 |
| Power sensor HP 8482A | SN: US37295597 | 09-Oct-09 (in house check Oct-12) | In house check: Oct-13 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (in house check Oct-12) | In house check: Oct-13 |
| RF generator R&S SMT-06 | SN: 832283/011 | 27-Aug-12 (in house check Oct-12) | In house check: Oct-14 |

Calibrated by: **Claudio Leubler** **Laboratory Technician**

Signature

Approved by: **Fin Bomholt** **Deputy Technical Manager**

Issued: September 26, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: CD1880V3-1018_Sep13

Page 1 of 5

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RXA1405-0123HAC01

Page 54 of 62

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

References

- [1] ANSI-C63.19-2011
American National Standard, Methods of Measurement of Compatibility between Wireless Communications
Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- **Coordinate System:** y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- **Measurement Conditions:** Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- **Antenna Positioning:** The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- **Feed Point Impedance and Return Loss:** These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- **E-field distribution:** E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RXA1405-0123HAC01

Page 55 of 62

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|------------------------------------|----------------------|---------|
| DASY Version | DASY5 | V52.8.7 |
| Phantom | HAC Test Arch | |
| Distance Dipole Top - Probe Center | 15mm | |
| Scan resolution | dx, dy = 5 mm | |
| Frequency | 1880 MHz \pm 1 MHz | |
| Input power drift | < 0.05 dB | |

Maximum Field values at 1880 MHz

| E-field 15 mm above dipole surface | condition | Interpolated maximum |
|------------------------------------|--------------------|-------------------------------|
| Maximum measured above high end | 100 mW input power | 94.2 V / m |
| Maximum measured above low end | 100 mW input power | 89.3 V / m |
| Averaged maximum above arm | 100 mW input power | 91.8 V / m \pm 12.8 % (k=2) |

Appendix

Antenna Parameters

| Frequency | Return Loss | Impedance |
|-----------|-------------|--------------------------------|
| 1730 MHz | 27.8 dB | 53.0 Ω + 2.9 j Ω |
| 1880 MHz | 21.6 dB | 49.5 Ω + 8.3 j Ω |
| 1900 MHz | 21.9 dB | 51.3 Ω + 8.0 j Ω |
| 1950 MHz | 30.5 dB | 52.3 Ω + 2.0 j Ω |
| 2000 MHz | 19.3 dB | 41.7 Ω + 5.6 j Ω |

3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.


TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RXA1405-0123HAC01

Page 56 of 62

Impedance Measurement Plot

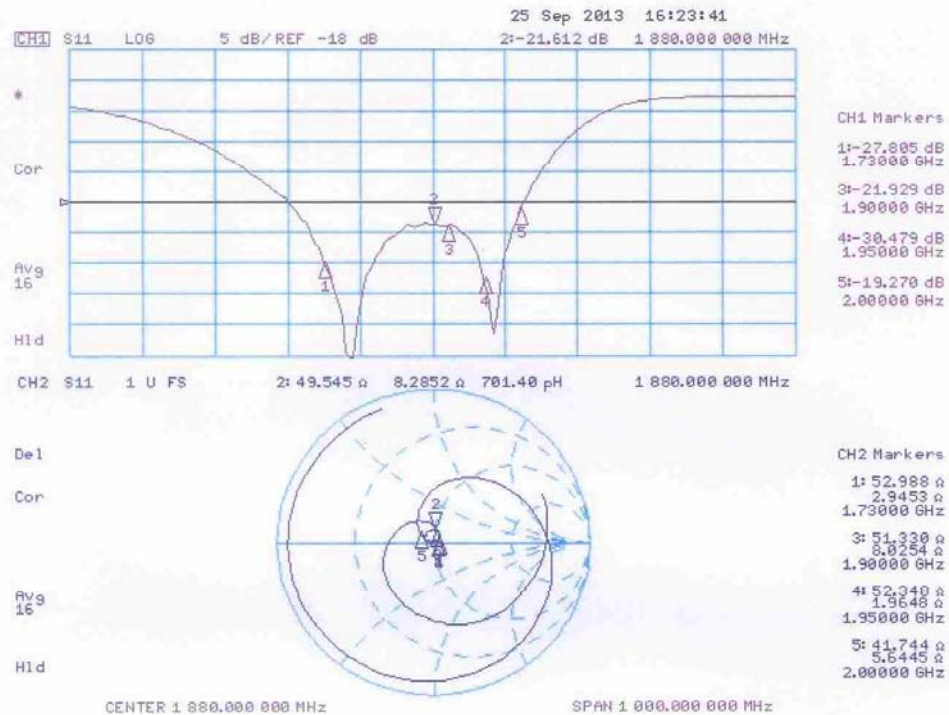

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RXA1405-0123HAC01

Page 57 of 62

DASY5 E-field Result

Date: 25.09.2013

Test Laboratory: SPEAG Lab2

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: CD1880V3 - SN: 1018

Communication System: UID 0 - CW ; Frequency: 1880 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ER3DV6 - SN2336; ConvF(1, 1, 1); Calibrated: 28.12.2012;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 13.09.2013
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole E-Field measurement @ 1880MHz/E-Scan - 1880MHz d=15mm/Hearing Aid Compatibility Test (41x181x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 157.6 V/m; Power Drift = -0.02 dB



PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 94.20 V/m

Near-field category: M3 (AWF 0 dB)

PMF scaled E-field

| | | |
|-----------|-----------|-----------|
| Grid 1 M3 | Grid 2 M3 | Grid 3 M3 |
| 91.75 V/m | 94.20 V/m | 93.34 V/m |
| Grid 4 M3 | Grid 5 M3 | Grid 6 M3 |
| 71.58 V/m | 72.68 V/m | 71.73 V/m |
| Grid 7 M3 | Grid 8 M3 | Grid 9 M3 |
| 87.01 V/m | 89.29 V/m | 88.31 V/m |

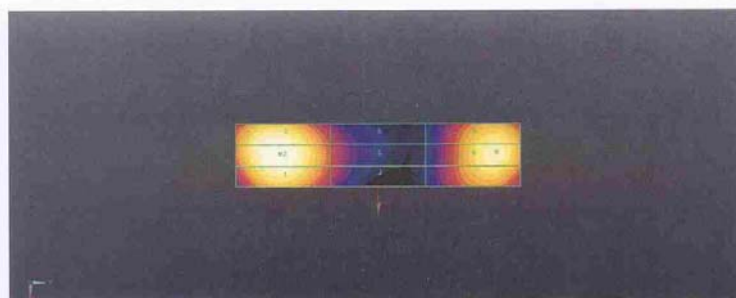

0 dB = 94.20 V/m = 39.48 dBV/m

TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RXA1405-0123HAC01

Page 58 of 62

ANNEX F: DAE4 Calibration Certificate



Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: info@emcste.com Http://www.emcste.com

In Collaboration with
s p e a g
CALIBRATION LABORATORY



Client : **TA(Shanghai)**

Certificate No: **J14-2-0052**

CALIBRATION CERTIFICATE

Object **DAE4 - SN: 1317**

Calibration Procedure(s) **TMC-OS-E-01-198**
Calibration Procedure for the Data Acquisition Electronics (DAEx)

Calibration date: **January 16, 2014**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|---------------------------------------|---------|--|-----------------------|
| Documenting Process Calibrator 753 | 1971018 | 01-July-13 (TMC, No:JW13-049) | July-14 |

| | Name | Function | Signature |
|----------------|-------------|-----------------------------------|-----------|
| Calibrated by: | Yu Zongying | SAR Test Engineer | |
| Reviewed by: | Qi Dianyuan | SAR Project Leader | |
| Approved by: | Lu Bingsong | Deputy Director of the laboratory | |

Issued: January 16, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: J14-2-0052

Page 1 of 3

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RXA1405-0123HAC01

Page 59 of 62



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No 52 Huayuanbei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: info@emcite.com Http://www.emcite.com

Glossary:

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters:

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 60 of 62



In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: info@emcite.com [Http://www.emcite.com](http://www.emcite.com)

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1μV, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X | Y | Z |
|---------------------|-----------------------|-----------------------|-----------------------|
| High Range | 404.058 ± 0.15% (k=2) | 404.060 ± 0.15% (k=2) | 403.954 ± 0.15% (k=2) |
| Low Range | 3.99002 ± 0.7% (k=2) | 3.99910 ± 0.7% (k=2) | 3.98303 ± 0.7% (k=2) |

Connector Angle

| | |
|---|-----------|
| Connector Angle to be used in DASY system | 119° ± 1° |
|---|-----------|

ANNEX G: The EUT Appearances and Test Configuration



EUT



Battery

Picture 1: Constituents of EUT

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RXA1405-0123HAC01

Page 62 of 62



Picture 2: Test Setup