


1.

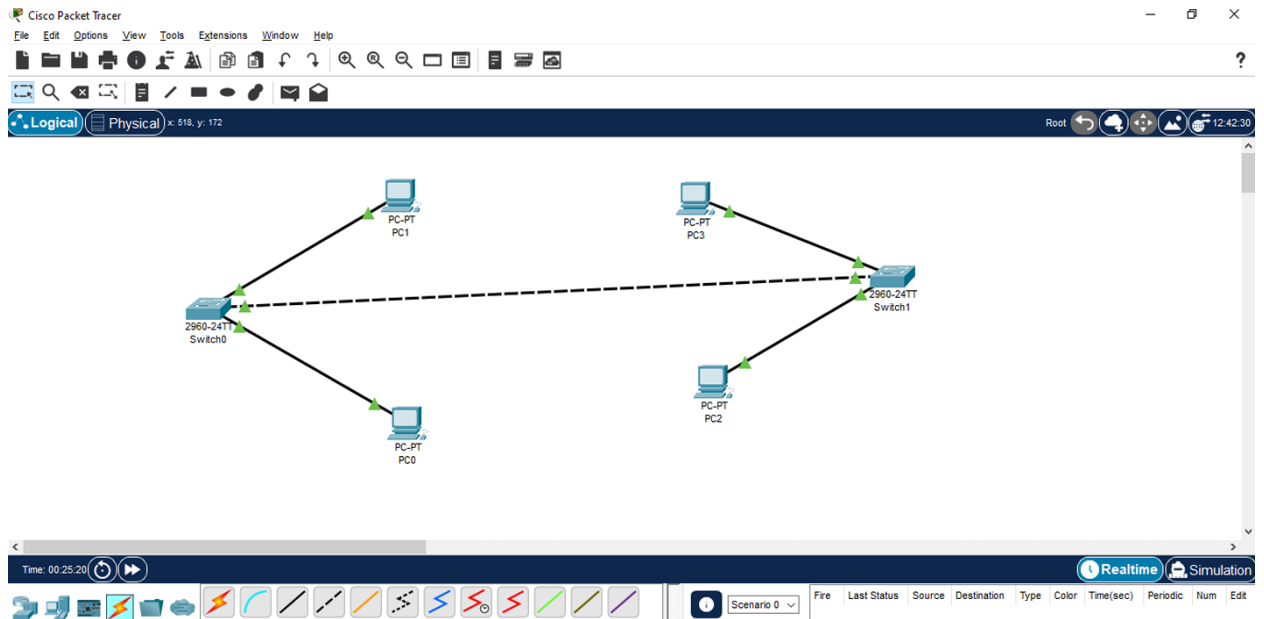

2.

```
Switch0
Physical Config CLI Attributes
IOS Command Line Interface
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up


Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#int fa0/1
Switch(config-if)#sw ac vl 10
^
% Invalid input detected at '^' marker.

Switch(config-if)#sw ac vl 10
% Access VLAN does not exist. Creating vlan 10
Switch(config-if)#no sh
Switch(config-if)#int fa0/2
Switch(config-if)#sw ac vl 20
% Access VLAN does not exist. Creating vlan 20
Switch(config-if)#no sh
Switch(config-if)#exit
Switch(config)#int gi0/1
Switch(config-if)#sw mode trunk
Switch(config-if)#no sh
Switch(config-if)#exit
Switch(config)#int gi0/1
Switch(config-if)#sw mode trunk
Switch(config-if)#
Switch(config-if)#exit
Switch(config)#interface FastEthernet0/1
Switch(config-if)#
```

Copy Paste

☐ Top

3.

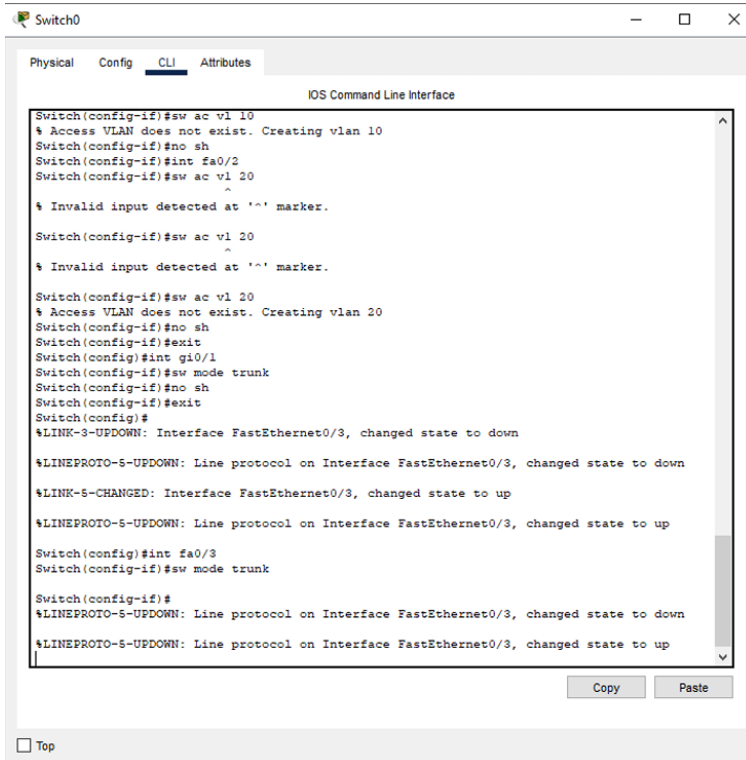

Switch0

Physical Config CLI Attributes


IOS Command Line Interface

```
Switch(config-if)#sw ac vl 10
% Access VLAN does not exist. Creating vlan 10
Switch(config-if)#no sh
Switch(config-if)#int fa0/2
Switch(config-if)#sw ac vl 20
^
% Invalid input detected at '^' marker.
Switch(config-if)#sw ac vl 20
^
% Invalid input detected at '^' marker.
Switch(config-if)#sw ac vl 20
% Access VLAN does not exist. Creating vlan 20
Switch(config-if)#no sh
Switch(config-if)#exit
Switch(config)#int gi0/1
Switch(config-if)#sw mode trunk
Switch(config-if)#no sh
Switch(config-if)#exit
Switch(config)#
%LINK-3-UPDOWN: Interface FastEthernet0/3, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to down
%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
Switch(config)#int fa0/3
Switch(config-if)#sw mode trunk
Switch(config-if)#
%LINK-3-UPDOWN: Interface FastEthernet0/3, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
```

Copy Paste

☐ Top

4.

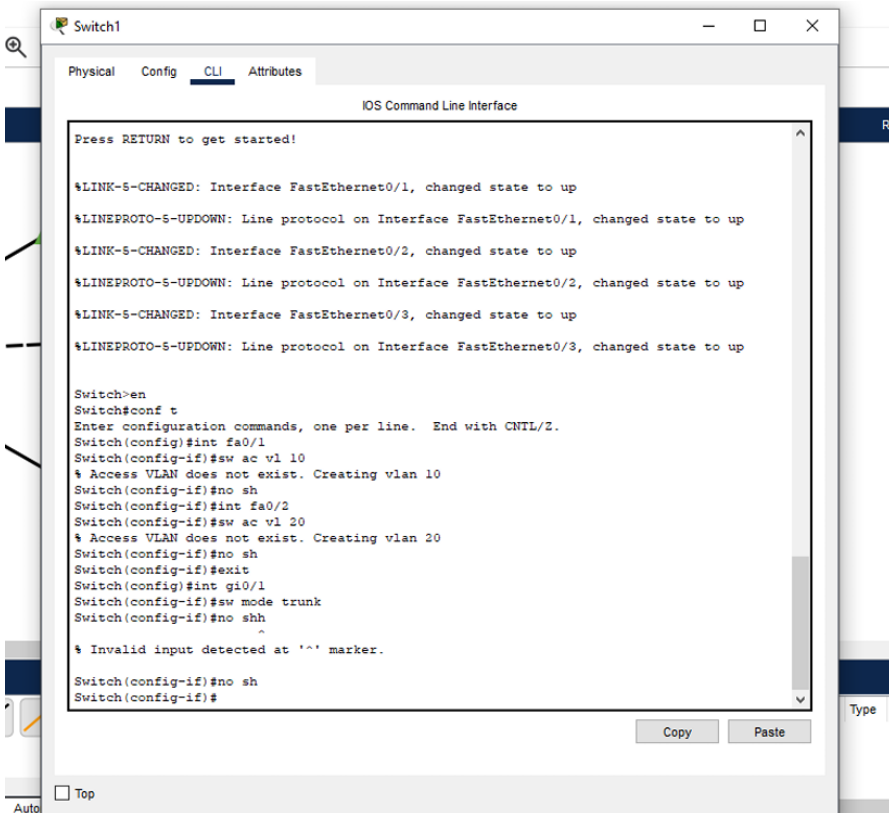

Switch1

Physical Config CLI Attributes

IOS Command Line Interface

```
Press RETURN to get started!

%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up


Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNIL/Z.
Switch(config)#int fa0/1
Switch(config-if)#sw ac vl 10
% Access VLAN does not exist. Creating vlan 10
Switch(config-if)#no sh
Switch(config-if)#int fa0/2
Switch(config-if)#sw ac vl 20
% Access VLAN does not exist. Creating vlan 20
Switch(config-if)#no sh
Switch(config-if)#exit
Switch(config)#int gi0/1
Switch(config-if)#sw mode trunk
Switch(config-if)#no shh
^
% Invalid input detected at '^' marker.
Switch(config-if)#no sh
Switch(config-if)#
```

Copy Paste


☐ Top

Auto


5.

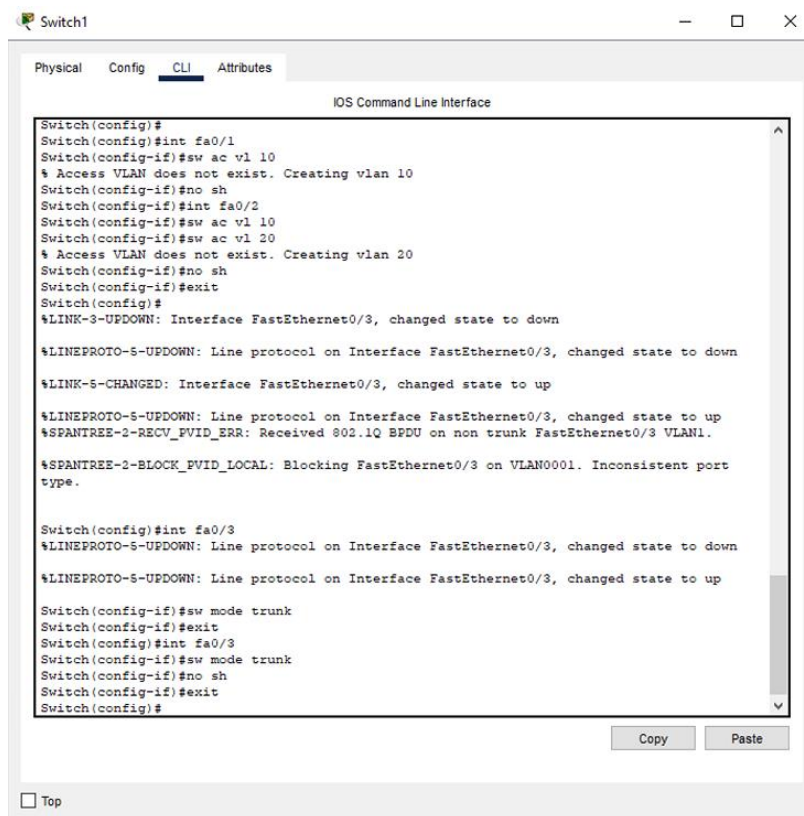


6.

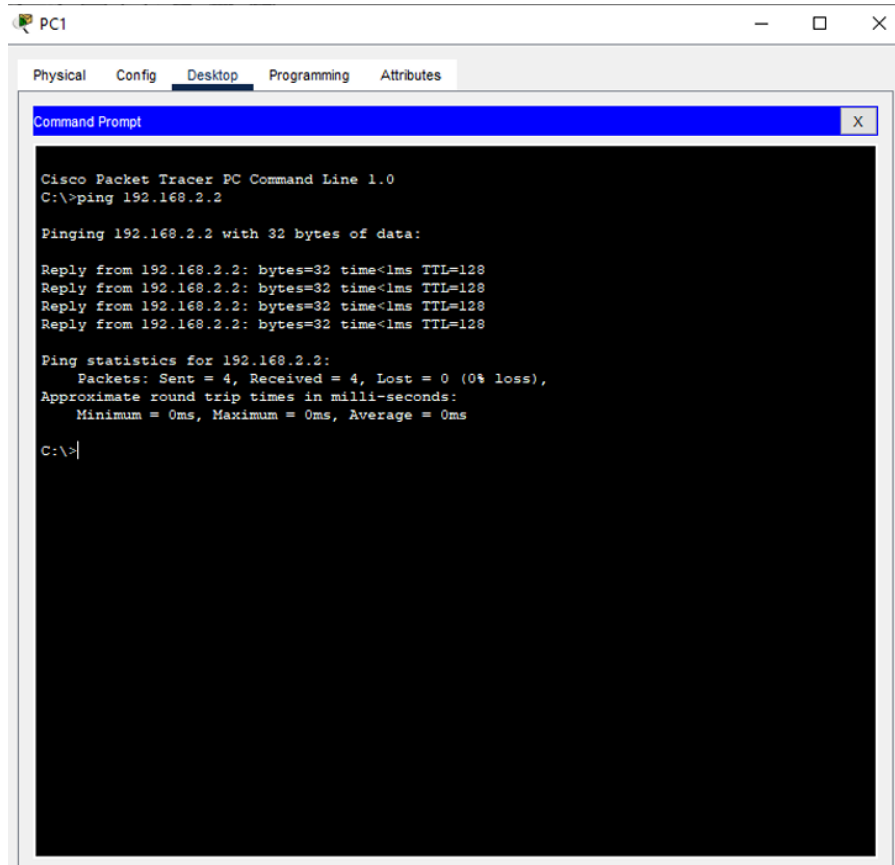

7.

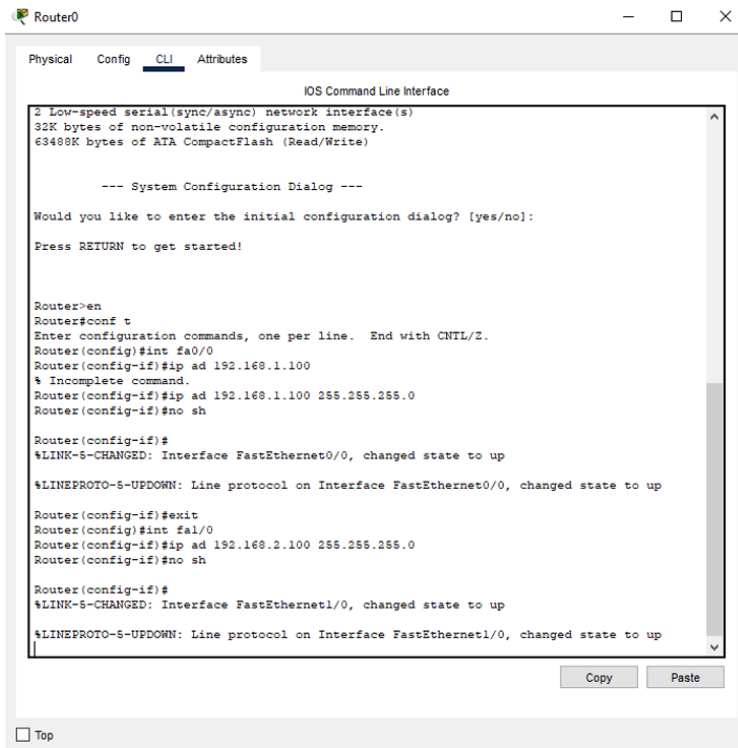

8.

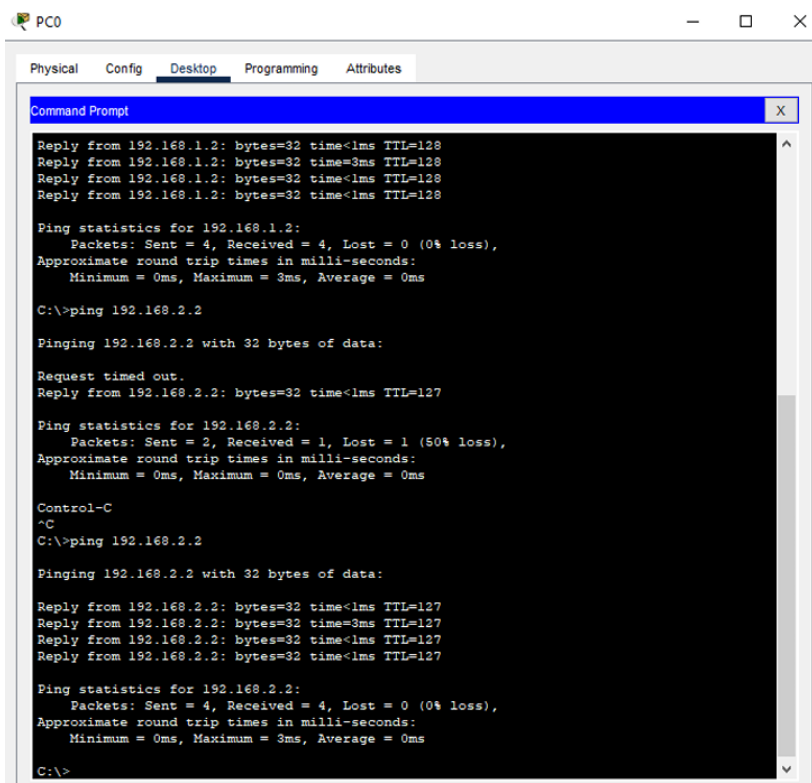

9.

