MARVEL
CAPTAIN AMERICA
THE WINTER SOLDIER

# Bluetooth Speaker
# User Manual

MARVEL

infoThink®

InfoThink Technology Co., LTD.

## 1. Description:

Captain America 2 Shield Bluetooth Speaker with Power Bank (hereafter is referred to as the product) is designed to be the shape of Shield, equipped with Bluetooth Speaker, Power Bank and Night Light functions.

## 2. Product Layout：



MASTER

SLAVE
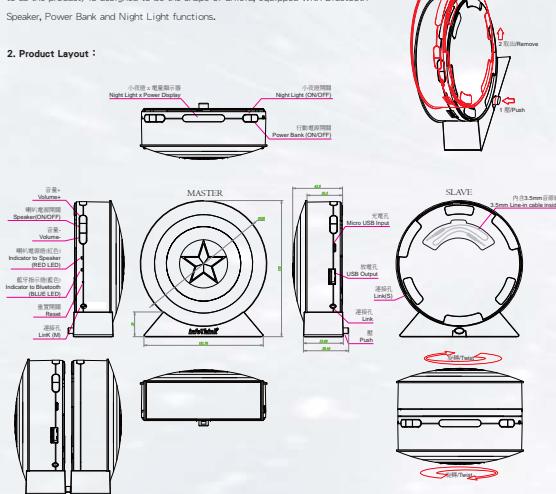
## 3. Features:

- Fashion and Luxury design / High quality shield made by Zinc Alloy
- Latest Bluetooth Stereo Audio Transmission technology keeps Hi-Fi sound without distortion
- Original Sound presented by high-performance full range monoblock
- Support iPad, iPhone, iPod and mobile phone/tablet and laptop with Bluetooth
- Support TV, iPad, iPhone, iPod and mobile phone/tablet and laptop with 3.5mm audio cable
- High Capacity Power Bank can be played up to 150hr/7800mAh
- Eala Stereo Expander technology increase 3D effects and the width of sound field.
- Advanced Technology of bass drivers deliver powerful and punchy bass sound
- Night Light additional function
- LED Indicator of Bluetooth and power capacity
- BSMI/CE/FCC/NCC certification
- Designed and Made in Taiwan

## 4. Direction:

4.1 Bluetooth Speaker function
● Instillation：
a. Follow the instruction OPEN arrow to separate the Master / Slave Speakers and put onto the Speaker base.
b. Connect Master (Link M) and Salve (Link S) speakers with the Line-in cable and put on the right and left side to increase the width of sound field.
c. If you are going to use line-in as audio input, connect it to your mobile device with cables.
**Note:** Master Speaker is designed for portable and working along but Slave Speaker is not for this purpose.

● Open Bluetooth Speaker：
Click "Speaker (ON/OFF)" button for 1second to Active the Speaker, The Indicator of Speaker (RED LED) is always on and the Indicator of Bluetooth (BLUE LED) is blinking for waiting connection.

● Paring Bluetooth Speaker:

Open the Bluetooth function of your mobile device and looking for , the Bluetooth device name of the product - "INFOTHINK CA2BSP" , Click the name to pair it.
Note: If you can't find the name under Bluetooth make sure the product is closed and long press the "Speaker (ON/OFF)" button for 3 seconds to force it goes into Bluetooth paring mode then you can find it.

● Tuning the Volume:
When playing the music, click the "Volume Control" button you can tune the volume of the product.

● Close Bluetooth Speaker:
Click the " Speaker (ON/OFF)" button for 2 second to Power off the Speaker.

## 4.2 Power Bank function
● First time use：
For the first time, please fully charge the battery before using it. During the charging process, LED has the power display; when battery is fully charged, All LED will be turn on.

● Charging your device：
Please click the "Power Bank (ON/OFF)" button to active it, and then plug charging cable into the "USB OUTPUT" port to start charging your devices.

● Close the charging function：
When not using the product, please disconnect all of the USB cables and click "Power Bank (ON/OFF)" button to enter power-saving mode, or leave the product for 30 seconds, it will automatically enter power-saving mode.

● LED Power Display：
When the product is activated, the LED displays the remaining power at four phases: 25% / 50% / 75% / 100% as shown below:

100% 75% 50% 25%

## 4.3 Night Light function
● Open/Close Night Light：
Click "Night Light (ON/OFF)" button will turn on the night light and click again will turn off it.

## 5. Warning:
● It is not recommended charge the product and your devices at the same time. In this condition the product can be charged only without charging your devices.

● Do not place the product in/near humid, high temperature or other extreme environments.
Please also keep it away from the fire and do not contact with other metal to avoid any dangerous circumstances.

● If not using the product for a long time, it is recommended that you fully charge the product and then use or keep it in a safe place.

● Do not use this product to knock any item and severe impact to the product, so as to avoid damage to the product.

● If the product cannot be used, please follow local environmental regulations to recycle batteries.

## 6. Specifications：
- Bluetooth : V3.0 with backward compatibility
- Supported Profiles: A2DP, AVRCP profile.
- Wireless Range : 5m for Bluetooth
- Speaker Watt: 5W
- Monoblock Drive : 50mm full range monoblock
- Monoblock:Full range monoblock and passive radiation device
- Play Time : CA2-BSP: 150 hours
- Frequency : 2402~2480MHz
- Power saving mode : Automatically power off at standby.
- Lithium battery : CA2-BSP: 7800mAh x 3.7V
- Charging Time : 3-10 hours depends on the power capacity and the charger

- Output rated capacity: CA2-BSP: 4680mAh x 5V
- Input Voltage/ Current : 5V / 1A (Max)
- Output Voltage/ Current : 5V / 2.1A (Max)
- Battery Type : Lithium battery
- Safeguards: Over charging, Over discharging, Over temperature, Over current, Over voltage, Short circuit, Automatically power off when it is on the brink of short circuit
- Weight : CA2-BSP(Master) : about 440g/(SLAVE),about200g
- Size : 108x108x42.5mm (without base)
- Country of origin : Taiwan

## 7. Contents:
● Captain America 2 Shield Bluetooth Speaker(Master) with Power Bank function x 1
★ Speaker (Slave) with 3.5mm Line-in cable inside x 1
★ 3.5mm Line-in cable x 1
★ CA2 flannel bag x 1
★ Micro USB charging cable x 1
★ User Manual x1
★ Speaker Base x2

MARVEL
CAPTAIN AMERICA
THE WINTER SOLDIER

AVENGERS