



RF TEST REPORT

Applicant iRay Technology Co., Ltd.

FCC ID 2ACHK-01070189

Product Focus 43C Detector,
TRIMAX 43C Detector

Brand 

Model Focus 43C, TRIMAX 43C

Report No. R1912A0724-R2V1

Issue Date February 11, 2020

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15E (2018)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory.....	5
1.1. Notes of the test report.....	5
1.2. Test facility.....	5
1.3. Testing Location.....	5
2. General Description of Equipment under Test.....	6
3. Applied Standards.....	7
4. Test Configuration.....	8
5. Test Case Results.....	10
5.1. Unwanted Emission.....	10
5.2. Conducted Emission.....	60
6. Main Test Instruments.....	65

Summary of measurement results

Number	Test Case	Clause in FCC rules	Verdict
1	Average conducted output power	15.407(a)	Refer to the module report: R1905A0235-R4
2	Occupied bandwidth	15.407(e)	Refer to the module report: R1905A0235-R4
3	Frequency stability	15.407(g)	Refer to the module report: R1905A0235-R4
4	Power spectral density	15.407(a)	Refer to the module report: R1905A0235-R4
5	Unwanted Emissions	15.407(b)	PASS
6	Conducted Emissions	15.207	PASS
Date of Testing: July 3, 2019 ~ July 5, 2019 and December 13, 2019 ~ December 16, 2019			

Focus 43C, TRIMAX 43C (Report No.: R19012A0724-R2V1) is a variant model of Mars1417V-TSI (Report No.: R1907A0426-R2). Test values partial duplicated from Original for variant. There is only tested Unwanted Emissions (802.11n (HT20) CH48) for variant in this report. The detailed product change description please refers to the 2ACHK-01070189_FCC class II permissive change application letter 2.

Test Case	Variant 1 Mars1417V-TSI (R1907A0426-R2)	Variant 2 Focus 43C, TRIMAX 43C (R19012A0724-R2V1)
Unwanted Emissions	Pass	Only tested with worst case of Variant 1 (802.11n (HT20) CH48)
Conducted Emissions	Pass	/

Note: This revised report (Report No.: R19012A0724-R2V1) supersedes and replaces the previously issued report (Report No.: R19012A0724-R2). Please discard or destroy the previously issued report and dispose of it accordingly.

Mars1417V-TSI (Report No.R1907A0426-R2) is a variant model of P-41(Report No.R1907A0346-R2V1).

Different	Original	Variant 1
model	P-41	Mars1417V-TSI
Product name	DIRECT DIGITIZER SKR 4000	Wireless Digital Flat Panel Detector
Charging port	3Pin	3Pin and 4Pin
Color	Black	White
Others	The same	The same
The difference between the two Configuration is only the Charging port and Color.		

The module WIFI-2-V897EA1 is a part of the EUT P-41. FCC ID duplicated from the module for the EUT.

Only Unwanted Emissions and Conducted Emissions were tested for P-41 (report No.: R1907A0346-R2V1). Other conducted test items refer to the WIFI-2-V897EA1 Module report (Report No. : R1905A0235-R4).

WIFI-2-V897EA1 (Report No.: R1905A0235-R4) is a variant model of WIFI-2-V897EA1 (Report No.: SHEM180400246702).Test values partial duplicated from Original for variant. There is only tested Unwanted Emissions, Conducted Emissions and add 802.11ac VHT80 for other items for variant in this report. The detailed product change description please refers to the FCC class II permissive change application letter.

Data tested case see the table below.

Test Case	Original P-41 (R1907A0346-R2V1)	Variant 1 Mars1417V-TSI (R1907A0426-R2)
Average conducted output power	Refer to the module report: R1905A0235-R4	Refer to the module report: R1905A0235-R4
Occupied bandwidth	Refer to the module report: R1905A0235-R4	Refer to the module report: R1905A0235-R4
Frequency stability	Refer to the module report: R1905A0235-R4	Refer to the module report: R1905A0235-R4
Power spectral density	Refer to the module report: R1905A0235-R4	Refer to the module report: R1905A0235-R4
Unwanted Emissions	Pass	Refer to the Original report: R1907A0346-R2V1
Conducted Emissions	Pass	add test result of 4Pin



1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

Client Information

Applicant	iRay Technology Co., Ltd.
Applicant address	RM 202, Building 7, No. 590, Ruiqing RD., Pudong, Shanghai, China
Manufacturer	Carestream Health, Inc.
Manufacturer address	150 Verona Street, Rochester, NY, USA 14608

General information

EUT Description	
Model	Focus 43C, TRIMAX 43C
SN	FC36F010T1106190004
Hardware Version	V2.2
Software Version	ARM:Core:1.10 Kernel:1.19 FPGA microblaze:2.25 FPGA main:1.10 MCU:1.0 SDK:4.0
Power Supply	Battery/AC adapter
Antenna Type	Coupling type (LDS)
Antenna Gain	6.00dBi
additional beamforming gain	NA
Test Mode(s)	U-NII-1(5150MHz-5250MHz) U-NII-3(5725MHz-5850MHz)
Modulation Type	802.11a/n (HT20/HT40) : OFDM 802.11ac (VHT20/VHT40/VHT80): OFDM
Operating Frequency Range(s)	U-NII-1: 5150-5250MHz U-NII-3: 5725-5850MHz
Operating temperature range:	5 ° C to 35° C
Operating voltage range:	100 V to 240 V
State DC voltage:	120V
EUT Accessory	
Battery	Manufacturer: Carestream Health, Inc. Model: BATTERY-KV Ratings:10.8Vdc,4125mAh
Adapter	Manufacturer: Shenzhen Longxc Power Supply Co., LTD Model: LXCP61-024300
Note: The information of the EUT is declared by the manufacturer.	



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR47 Part 15E (2018) Unlicensed National Information Infrastructure Devices

ANSI C63.10 (2013)

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

4. Test Configuration

Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Band	Data Rate		
	Antenna 1	Antenna 2	MIMO
802.11a	6 Mbps	6 Mbps	6 Mbps
802.11n HT20	MCS0	MCS0	MCS0
802.11n HT40	MCS0	MCS0	MCS0
802.11ac VHT20	MCS0	MCS0	MCS0
802.11ac VHT40	MCS0	MCS0	MCS0
802.11ac VHT80	MCS0	MCS0	MCS0

The worst case Antenna mode for each of the following tests for Wi-Fi:

Test Cases	Antenna 1	Antenna 2	MIMO
Unwanted Emissions	-	802.11a	802.11n HT20/40 802.11ac HT20/40/80
Conducted Emissions	-	O	-
Note: "O": test all bands			

According to RF Output power results in chapter 5.1, MIMO was selected as the worst antenna.

**Wireless Technology and Frequency Range**

Wireless Technology		Bandwidth	Channel	Frequency
Wi-Fi	U-NII-1	20 MHz	36	5180MHz
			40	5200MHz
			44	5220MHz
			48	5240MHz
		40 MHz	38	5190MHz
			46	5230MHz
		80 MHz	42	5210MHz
	U-NII-3	20 MHz	149	5745MHz
			153	5765MHz
			157	5785MHz
			161	5805MHz
			165	5825MHz
		40 MHz	151	5755MHz
			159	5795MHz
		80 MHz	155	5775MHz
Does this device support TPC Function? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No				
Does this device support TDWR Band? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No				

5. Test Case Results

5.1. Unwanted Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band range from 9kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz (detector: Peak and Quasi-Peak)

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz (detector: Peak):

I) Peak emission levels are measured by setting the instrument as follows:

- 1) RBW = 1 MHz.
- 2) VBW $\geq [3 \times \text{RBW}]$
- 3) Detector = peak.
- 4) Sweep time = auto.
- 5) Trace mode = max hold.
- 6) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, then the time required for the trace to stabilize will increase by a factor of approximately $1 / D$, where D is the duty cycle.

II) Average emission levels are measured by setting the instrument as follows:

- a) RBW = 1 MHz.
- b) VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq \text{RBW} / 2$. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
- d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set



for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.


3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Reduce the video bandwidth until no significant variations in the displayed signal are observed in subsequent traces, provided the video bandwidth is no less than 1 Hz. For regulatory requirements that specify averaging only over the transmit duration (e.g., digital transmission system [DTS] and Unlicensed National Information Infrastructure [U-NII]), the video bandwidth shall be greater than $[1 / (\text{minimum transmitter on time})]$ and no less than 1 Hz.


The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the loop antenna is vertical, others antenna are vertical and horizontal.

The test is in transmitting mode.


9KHz~~~30MHz

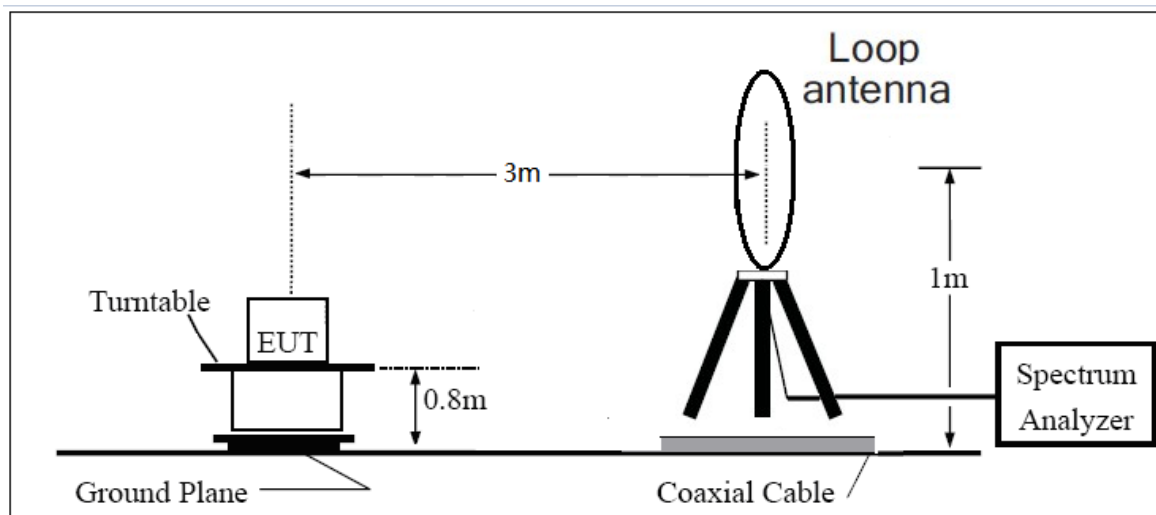

30MHz~~~ 1GHz

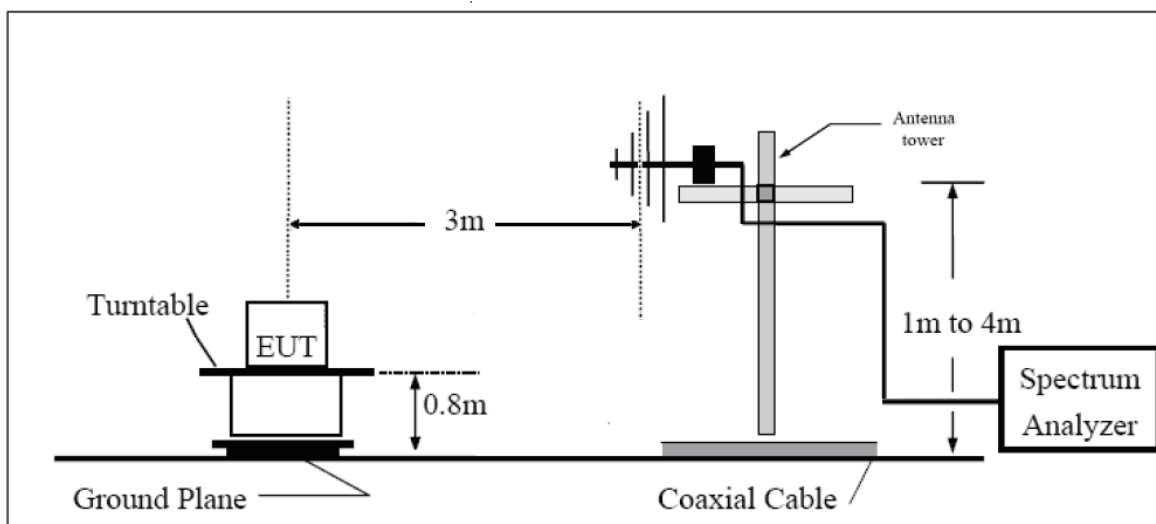

Above 1GHz

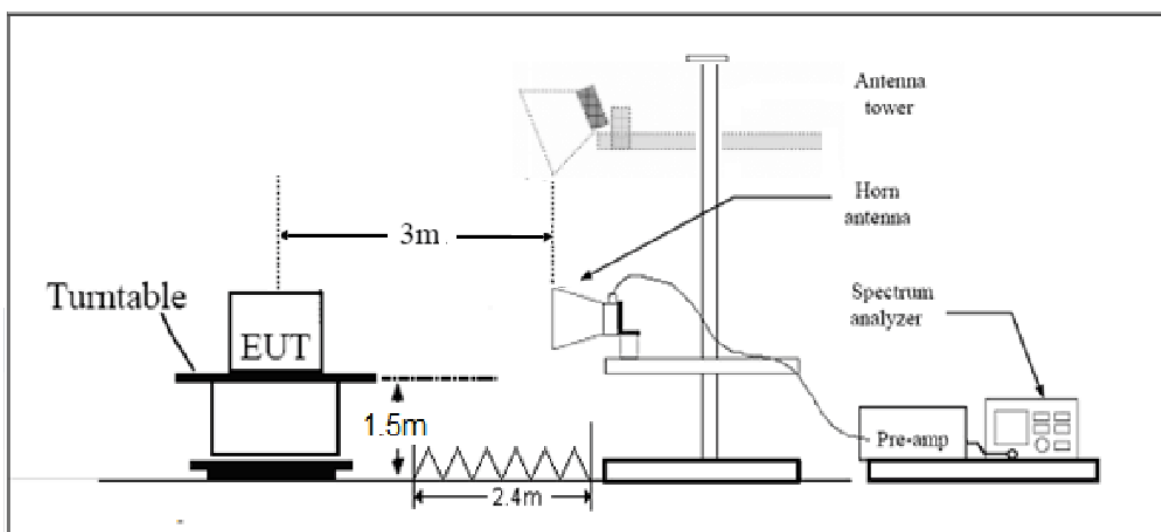

Note: Area side:2.4mX3.6m

Limits

- (1) For transmitters operating in the 5725-5850 MHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).
- (3) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).
- (4) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).

Note: the following formula is used to convert the EIRP to field strength

§1、 $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77$, where E = field strength and

d = distance at which field strength limit is specified in the rules;

§2、 $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2$, for d = 3 meters

- (5) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table.

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.02 dB
200MHz-1GHz	3.28 dB
1GHz-18G	3.70 dB
18GHz-26.5GHz	5.78 dB
26.5G-40GHz	5.82 dB

Test Results:

The modulation and bandwidth are similar for 802.11n mode for 20MHz/40MHz and 802.11ac mode for V20MHz/V40MHz, therefore investigated worst case to representative mode in test report.

The signal beyond the limit is carrier.


Variant 2 (Focus 43C, TRIMAX 43C)

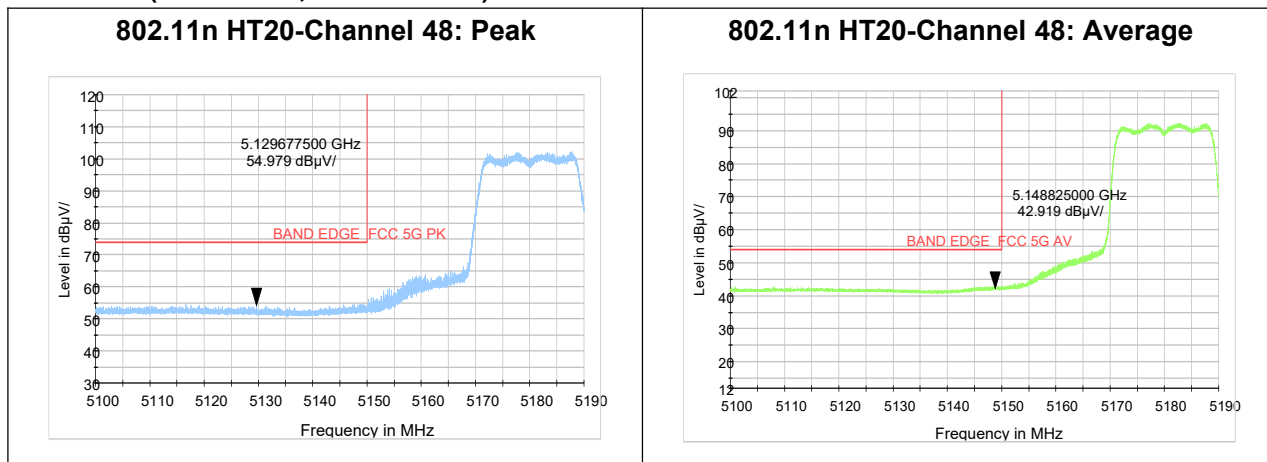


Original (P-41)

U-NII-1


802.11a-Channel 36: Peak

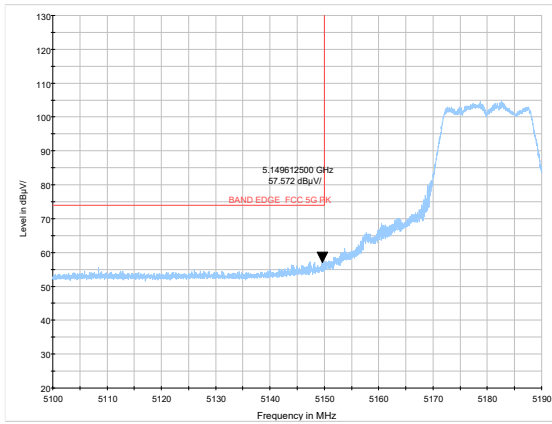


802.11a-Channel 48: Peak

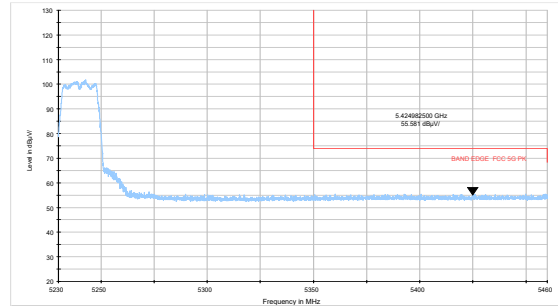


802.11a-Channel 36: Average

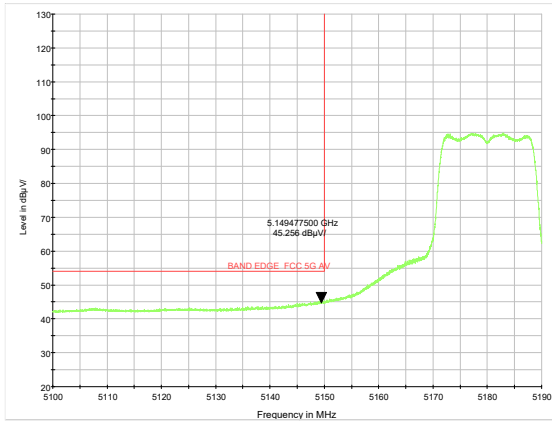


802.11a-Channel 48: Average

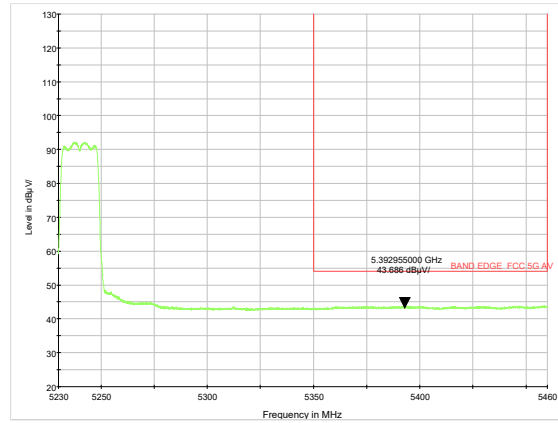


802.11n HT20-Channel 36: Peak

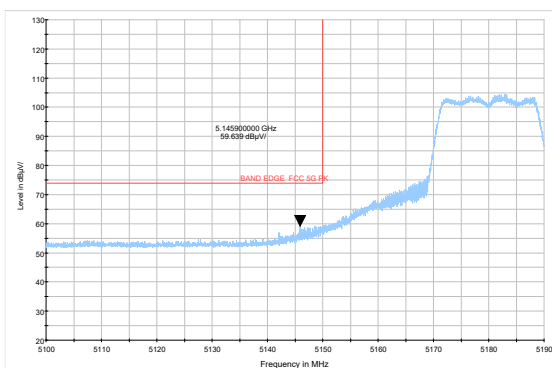


802.11n HT20-Channel 48: Peak

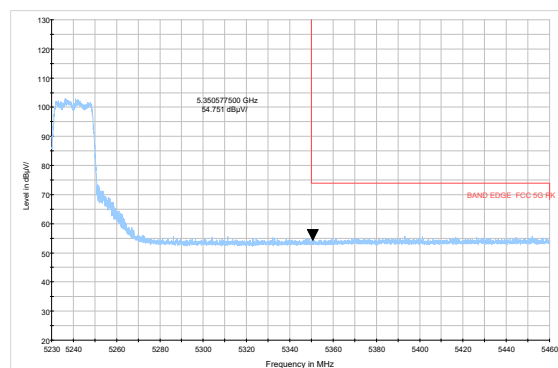


802.11n HT20-Channel 36: Average

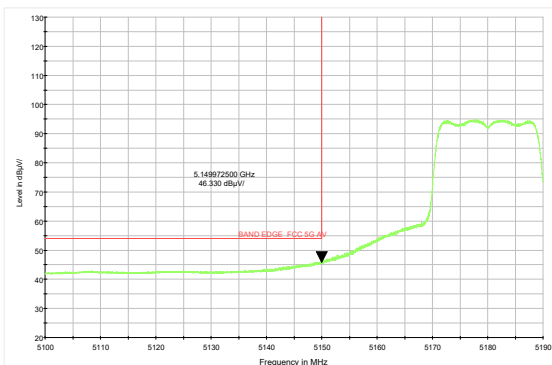


802.11n HT20-Channel 48: Average

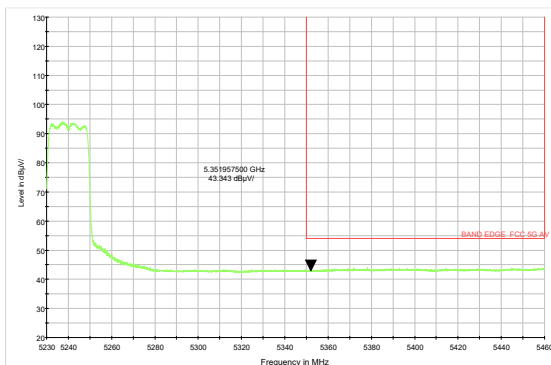


802.11n HT40-Channel 38: Peak

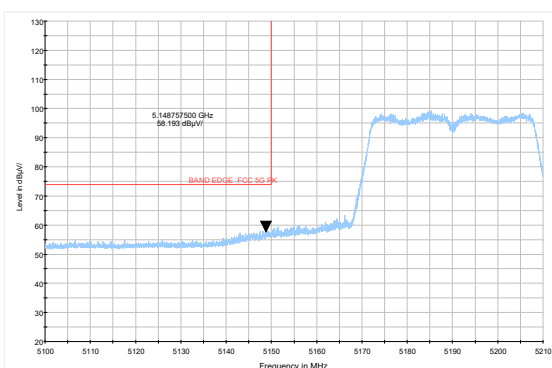


802.11n HT40-Channel 46: Peak

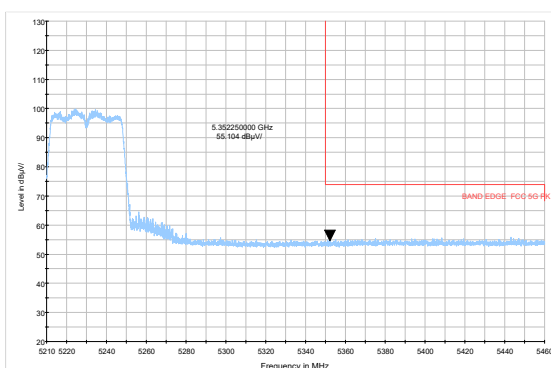

802.11n HT40-Channel 38: Average

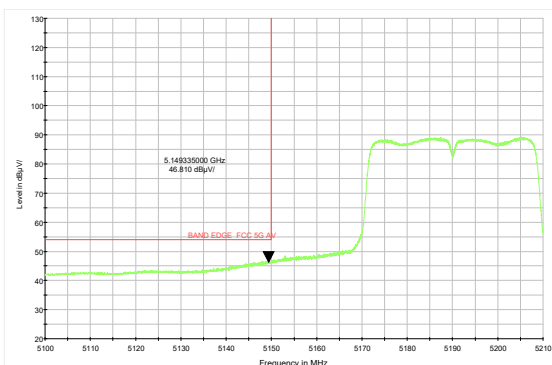


802.11n HT40-Channel 46: Average

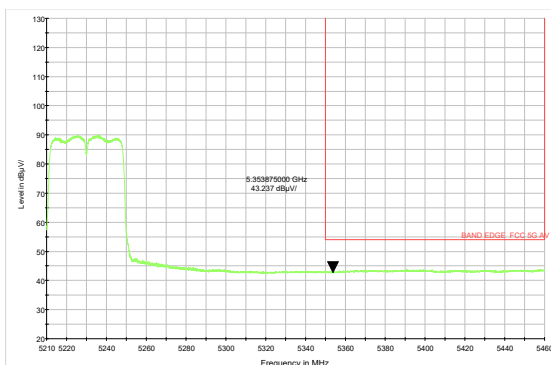




U-NII-3


802.11a-Channel 149: Peak

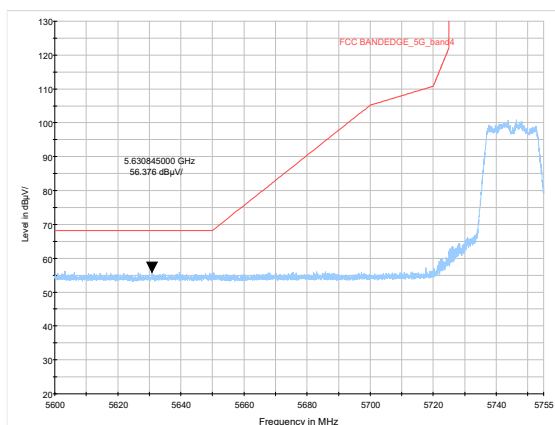


802.11a-Channel 165: Peak

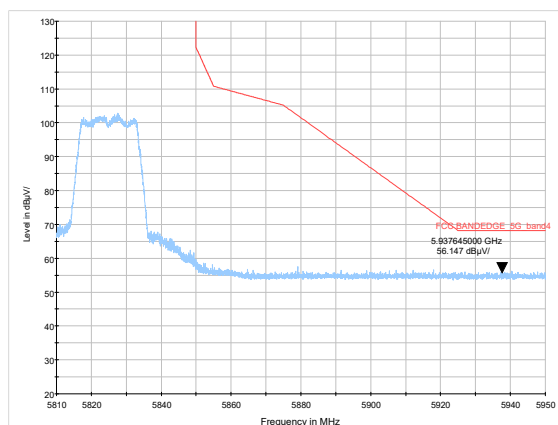


802.11n HT20-Channel 149: Peak

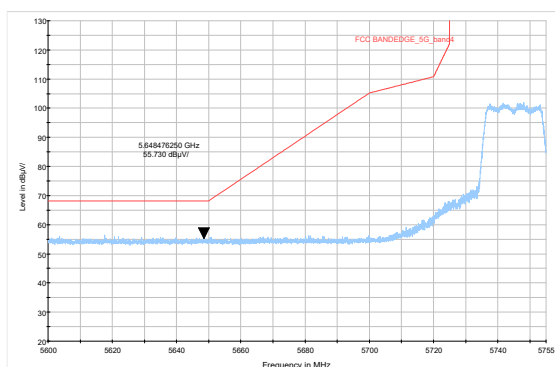


802.11n HT20-Channel 165: Peak

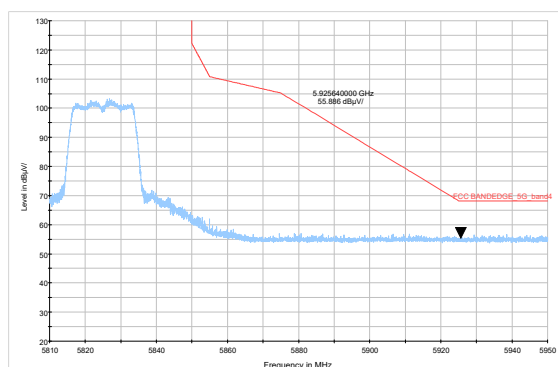


802.11n HT40-Channel 151: Peak

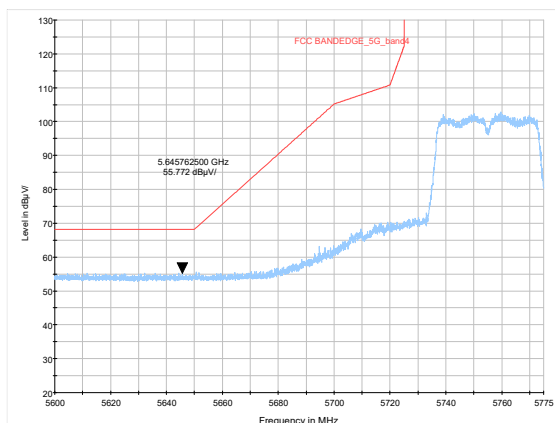

802.11n HT40-Channel 159: Peak

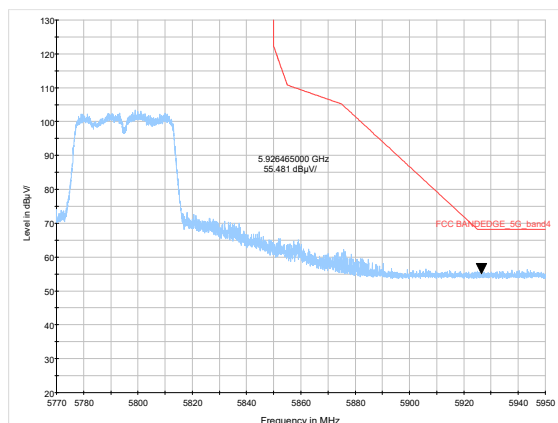

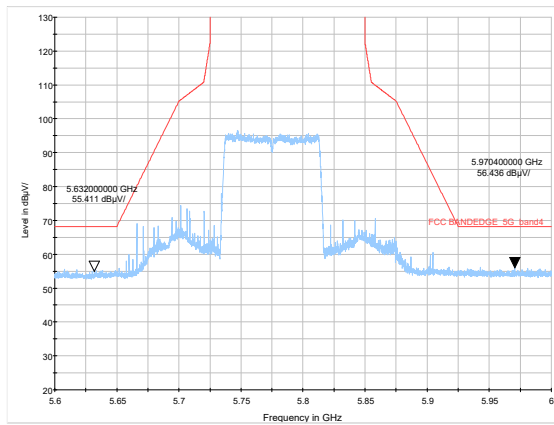**802.11ac VHT80- Channel 155: Peak**



Result of RE

Test result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the Emissions in the frequency band 9kHz-30MHz and 26.5GHz-40GHz are more than 20dB below the limit are not reported.


After the pretest, MIMO was selected as the worst antenna.

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11n (HT20) CH48 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Continuous TX mode:

Variant 2 (Focus 43C, TRIMAX 43C)

802.11n (HT20) CH48

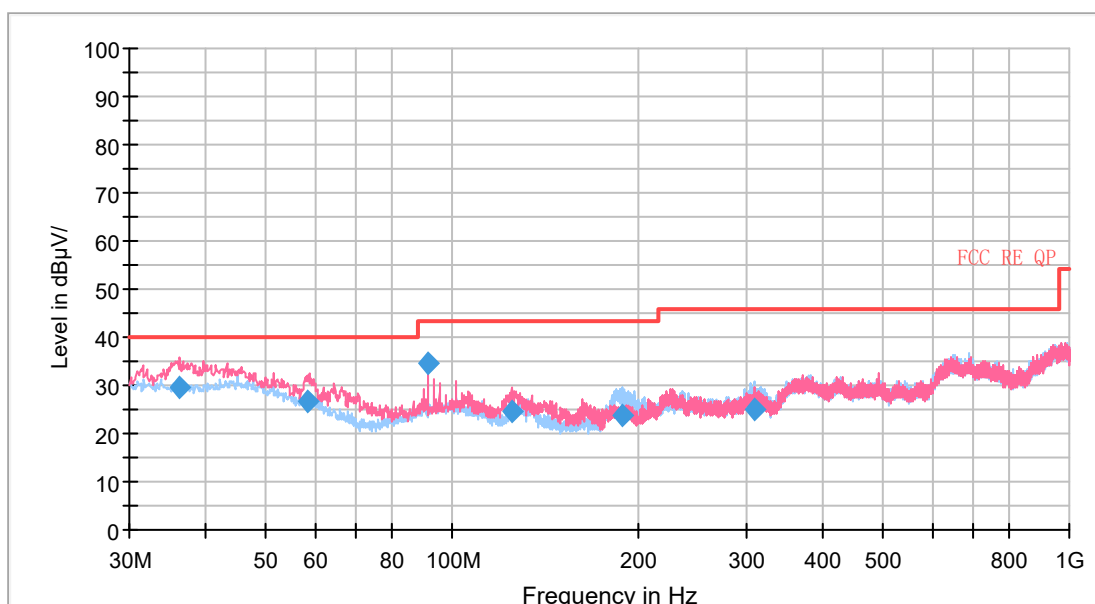


Radiates Emission from 30MHz to 1GHz


Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
36.133291	29.62	109.0	V	180.0	3.0	10.38	40.00
58.468463	26.55	100.0	V	335.0	-1.1	13.45	40.00
91.404119	34.66	123.0	V	227.0	-3.3	8.84	43.50
124.784510	24.76	100.0	V	268.0	-6.8	18.74	43.50
188.480672	23.92	109.0	H	196.0	-5.0	19.58	43.50
308.416250	24.84	100.0	H	187.0	-1.4	21.16	46.00

Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

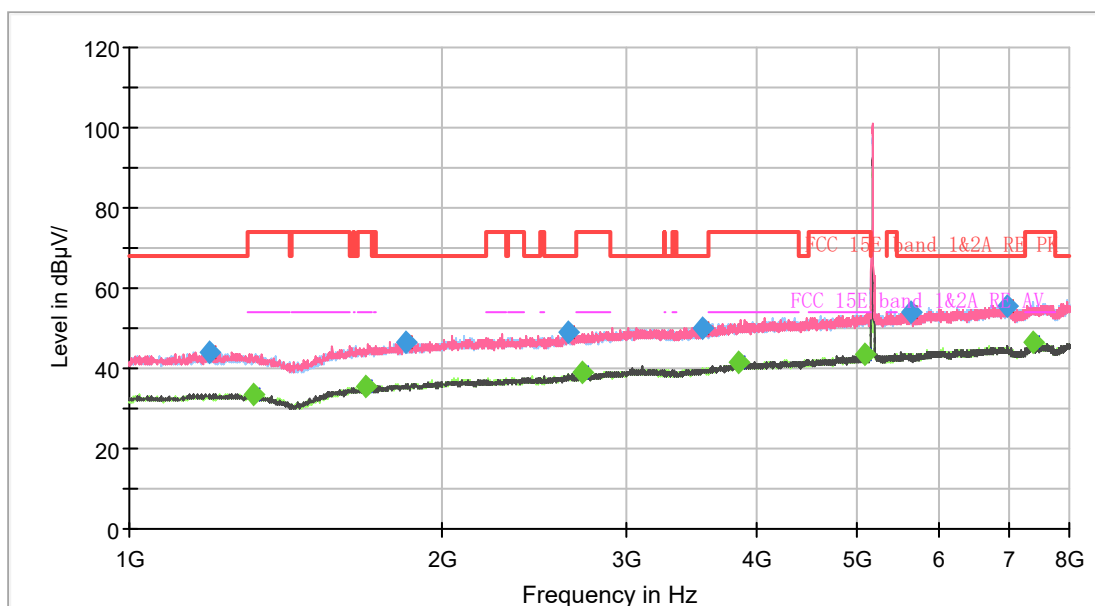

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

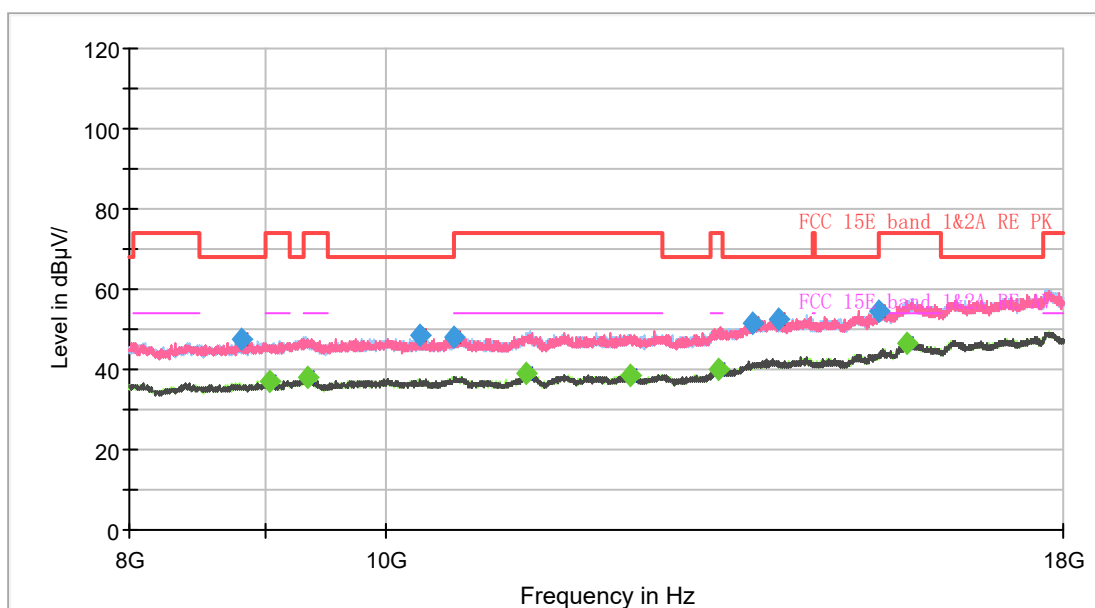

Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1195.125000	43.95	---	68.20	24.25	200.0	V	0.0	0.1
1318.500000	---	33.38	54.00	20.62	100.0	V	327.0	0.7
1687.750000	---	35.28	54.00	18.72	200.0	H	247.0	2.3
1842.625000	46.39	---	68.20	21.81	100.0	H	144.0	3.0
2645.000000	48.87	---	68.20	19.33	100.0	V	0.0	6.3
2723.750000	---	39.03	54.00	14.97	100.0	V	285.0	6.8
3557.625000	50.14	---	68.20	18.06	100.0	V	260.0	9.2
3857.750000	---	41.52	54.00	12.48	200.0	V	25.0	10.3
5082.750000	---	43.73	54.00	10.27	200.0	V	44.0	13.5
5632.250000	53.83	---	68.20	14.37	200.0	H	359.0	14.2
6978.875000	55.51	---	68.20	12.69	100.0	V	40.0	16.3
7383.125000	---	46.36	54.00	7.64	100.0	H	57.0	17.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Original (P-41)

RE 0.03-1GHz QP Class B

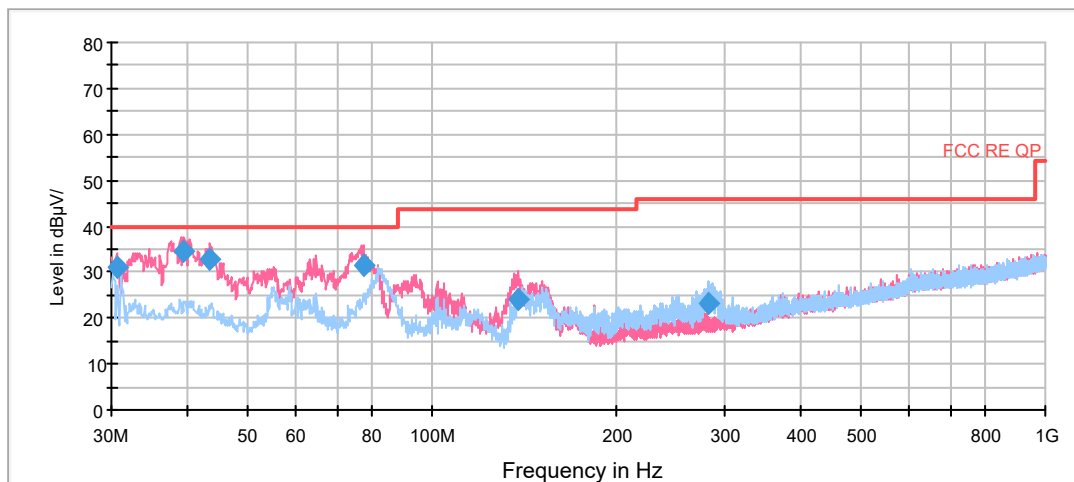


Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
30.606250	31.2	100.0	V	351.0	14.5	8.8	40.0
39.452500	34.5	100.0	V	92.0	16.9	5.5	40.0
43.498750	32.9	100.0	V	9.0	15.8	7.1	40.0
77.206250	31.4	100.0	V	314.0	10.3	8.6	40.0
137.797500	24.1	100.0	V	223.0	9.7	19.4	43.5
283.291250	23.0	100.0	H	291.0	14.9	23.0	46.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

802.11a CH36

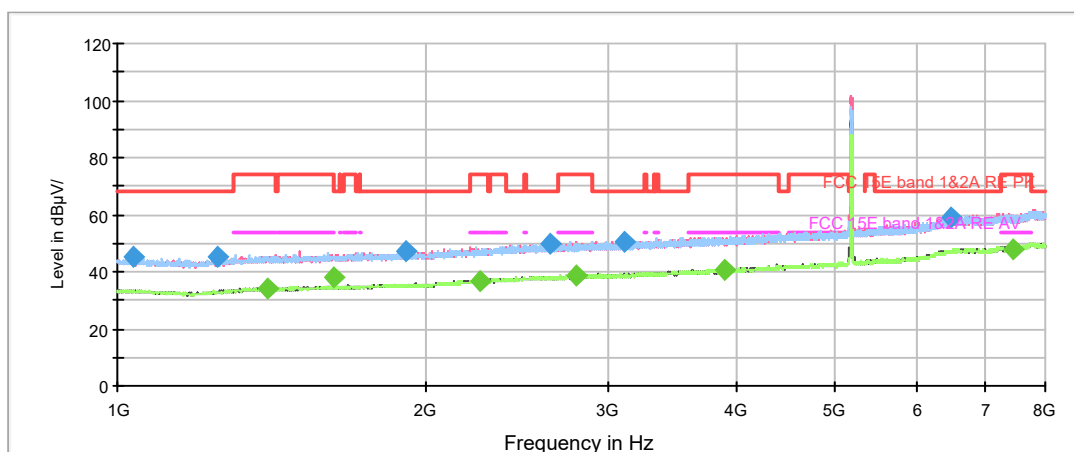

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

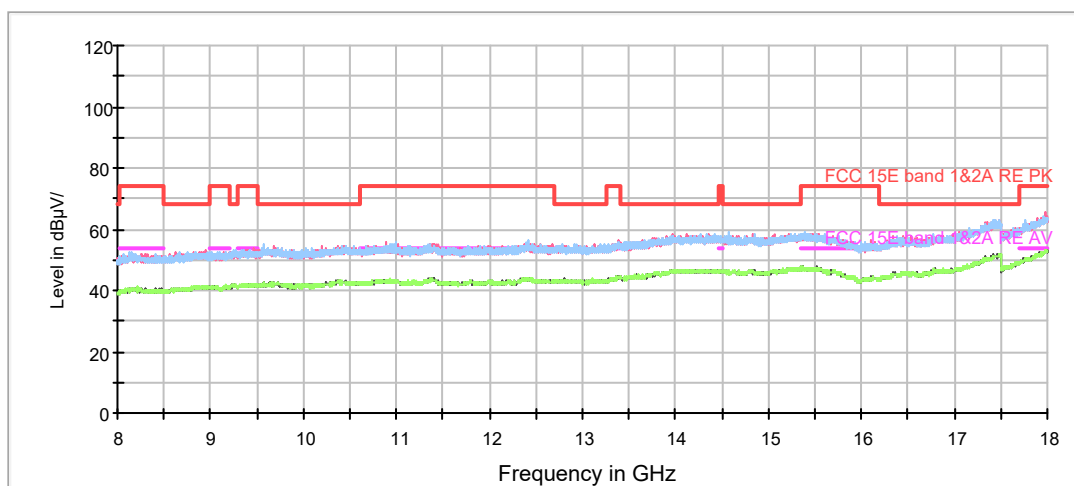

Radiates Emission from 8GHz to 18GHz


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1038.500000	45.2	200.0	V	53.0	-1.7	23.0	68.2
1250.250000	44.9	200.0	V	0.0	-1.1	23.3	68.2
1907.375000	47.4	200.0	H	289.0	0.9	20.8	68.2
2632.750000	49.7	100.0	H	0.0	3.9	18.5	68.2
3111.375000	50.3	100.0	H	275.0	5.0	17.9	68.2
6482.750000	59.1	100.0	V	75.0	14.7	9.1	68.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1399.000000	34.4	100.0	H	59.0	-0.7	19.6	54.0
1624.750000	38.0	100.0	V	167.0	0.1	16.0	54.0
2251.250000	36.4	100.0	V	0.0	2.4	17.6	54.0
2793.750000	38.8	200.0	V	12.0	4.3	15.2	54.0
3894.500000	40.8	200.0	H	25.0	7.1	13.2	54.0
7457.500000	48.1	100.0	V	313.0	16.0	5.9	54.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH40

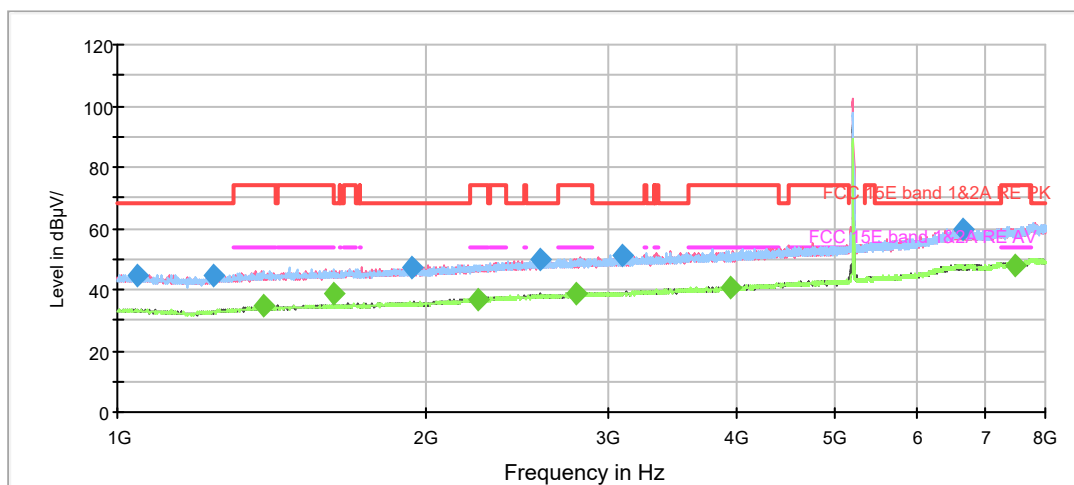

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

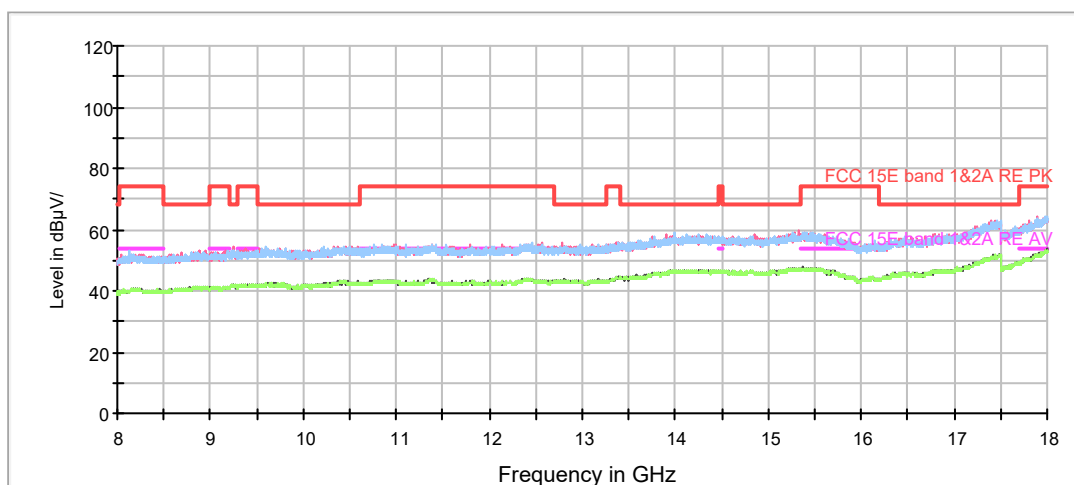

Note: The signal beyond the limit is carrier.

Radiates Emission from 8GHz to 18GHz


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1048.125000	44.9	100.0	H	37.0	-1.7	23.3	68.2
1239.750000	44.7	100.0	V	269.0	-1.1	23.5	68.2
1936.250000	47.5	100.0	V	358.0	1.0	20.7	68.2
2579.375000	49.8	100.0	V	355.0	3.8	18.4	68.2
3101.750000	50.8	100.0	H	55.0	5.0	17.4	68.2
6655.125000	59.4	200.0	H	297.0	15.0	8.8	68.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1388.500000	34.4	200.0	H	132.0	-0.7	19.6	54.0
1624.750000	38.5	100.0	V	160.0	0.1	15.5	54.0
2244.250000	36.6	100.0	V	322.0	2.4	17.4	54.0
2792.000000	38.8	200.0	V	76.0	4.3	15.2	54.0
3947.875000	40.8	100.0	H	308.0	7.1	13.2	54.0
7479.375000	47.9	100.0	V	0.0	16.0	6.1	54.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH48

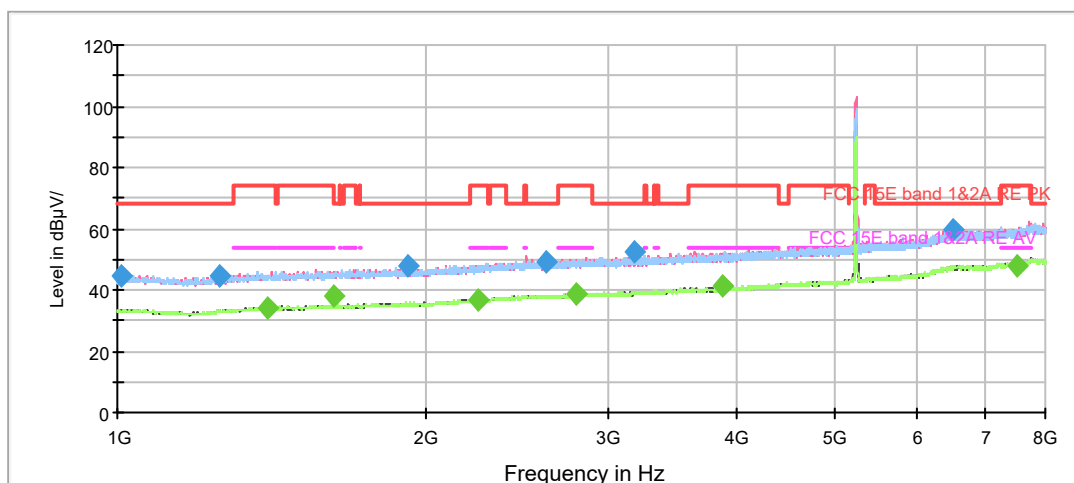

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

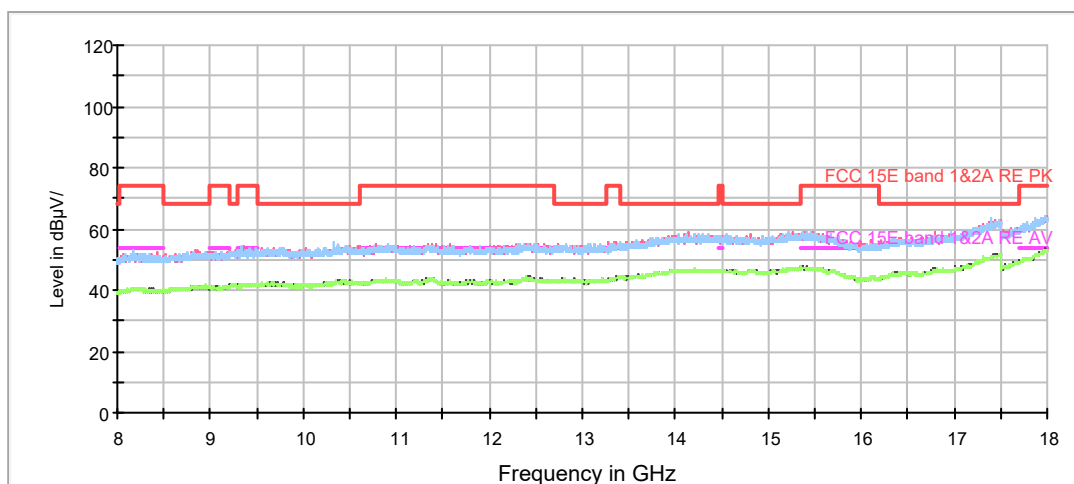

Radiates Emission from 8GHz to 18GHz


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1009.625000	44.9	100.0	H	0.0	-1.9	23.3	68.2
1256.375000	44.6	200.0	H	166.0	-1.1	23.6	68.2
1919.625000	47.7	100.0	V	350.0	1.0	20.5	68.2
2611.750000	48.9	200.0	V	294.0	3.8	19.3	68.2
3191.875000	52.3	200.0	V	49.0	5.3	15.9	68.2
6517.750000	59.5	100.0	H	141.0	14.9	8.7	68.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1400.750000	34.4	100.0	H	62.0	-0.7	19.6	54.0
1624.750000	38.3	200.0	V	66.0	0.1	15.7	54.0
2244.250000	36.5	200.0	V	136.0	2.4	17.5	54.0
2802.500000	38.7	200.0	H	356.0	4.3	15.3	54.0
3890.125000	41.2	100.0	H	273.0	7.1	12.8	54.0
7504.750000	47.9	200.0	V	24.0	16.1	6.1	54.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH149

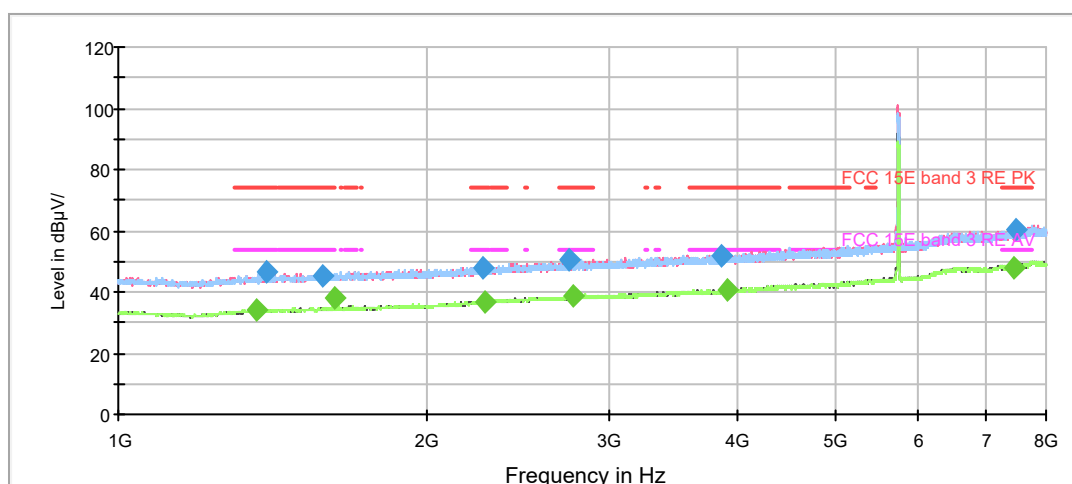

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

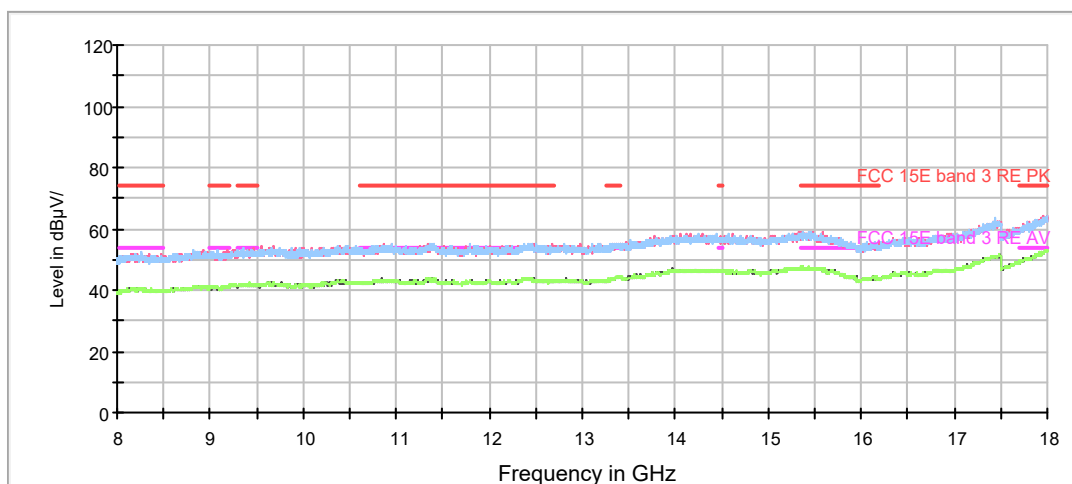

Radiates Emission from 8GHz to 18GHz


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1392.875000	46.3	200.0	H	332.0	-0.7	27.7	74.0
1581.875000	45.2	100.0	V	298.0	-0.1	28.8	74.0
2260.875000	48.0	100.0	H	2.0	2.5	26.0	74.0
2743.875000	50.3	200.0	V	146.0	4.1	23.7	74.0
3864.750000	52.1	200.0	H	306.0	6.9	21.9	74.0
7462.750000	60.2	100.0	V	140.0	16.0	13.8	74.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1365.750000	34.3	200.0	H	255.0	-0.8	19.7	54.0
1624.750000	38.3	100.0	V	149.0	0.1	15.7	54.0
2270.500000	36.9	100.0	H	174.0	2.6	17.1	54.0
2771.875000	38.7	200.0	V	146.0	4.2	15.3	54.0
3925.125000	40.7	100.0	V	315.0	7.1	13.3	54.0
7461.000000	47.9	100.0	H	0.0	16.0	6.1	54.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH157

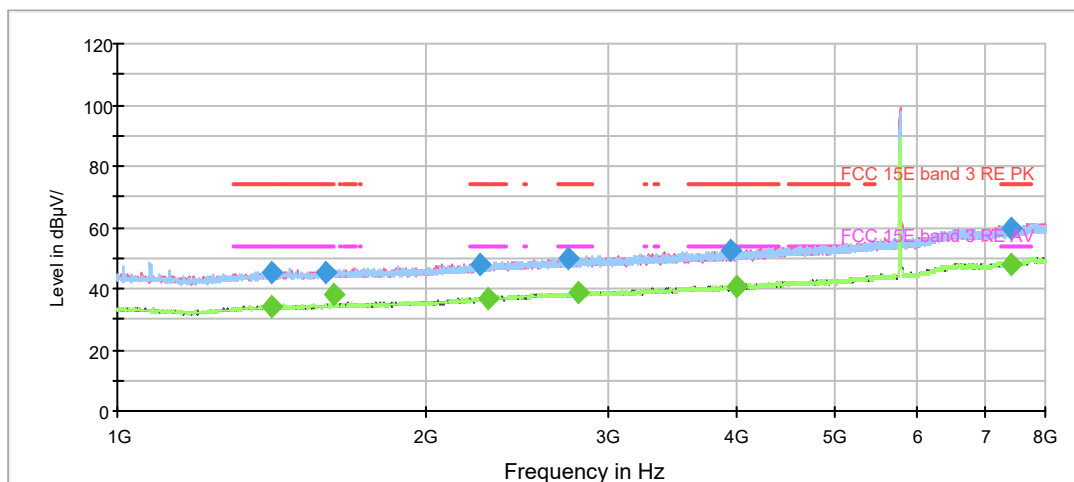

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

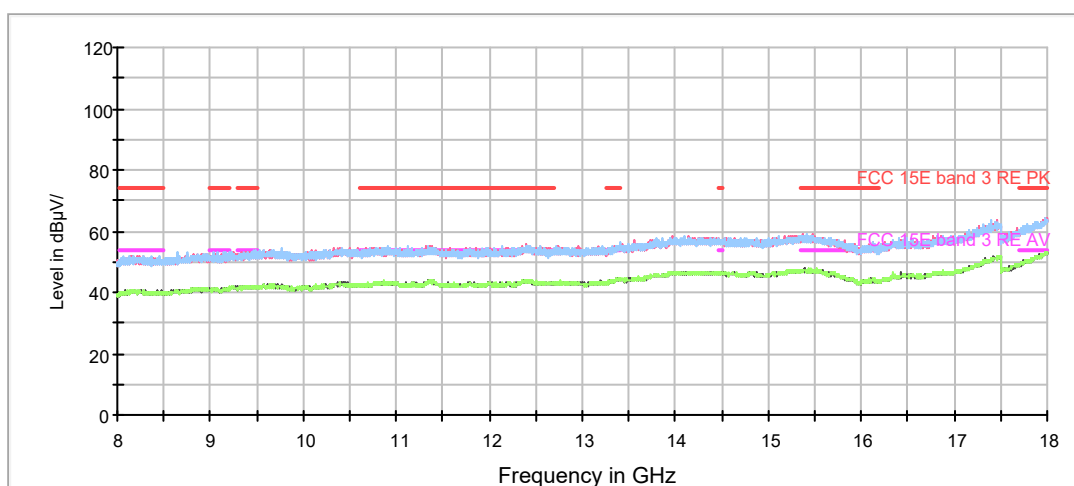

Radiates Emission from 8GHz to 18GHz


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1412.125000	45.3	200.0	H	327.0	-0.7	28.7	74.0
1593.250000	45.3	100.0	V	345.0	-0.1	28.7	74.0
2256.500000	47.7	200.0	H	358.0	2.7	26.3	74.0
2744.750000	49.9	200.0	H	357.0	4.1	24.1	74.0
3953.125000	52.2	100.0	H	0.0	7.1	21.8	74.0
7398.875000	59.9	200.0	H	174.0	15.8	14.1	74.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1412.125000	34.1	100.0	V	345.0	-0.7	19.9	54.0
1624.750000	38.0	100.0	V	144.0	0.1	16.0	54.0
2293.325000	36.8	100.0	V	223.0	2.7	17.2	54.0
2814.750000	38.5	100.0	V	94.0	4.3	15.5	54.0
3997.750000	40.8	100.0	V	0.0	7.3	13.2	54.0
7396.250000	48.1	100.0	V	188.0	15.8	5.9	54.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH165

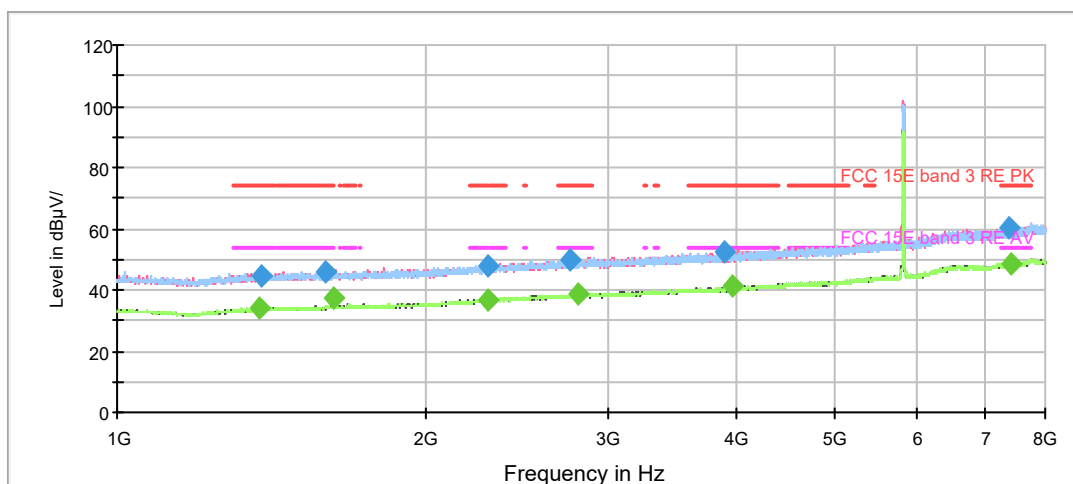

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

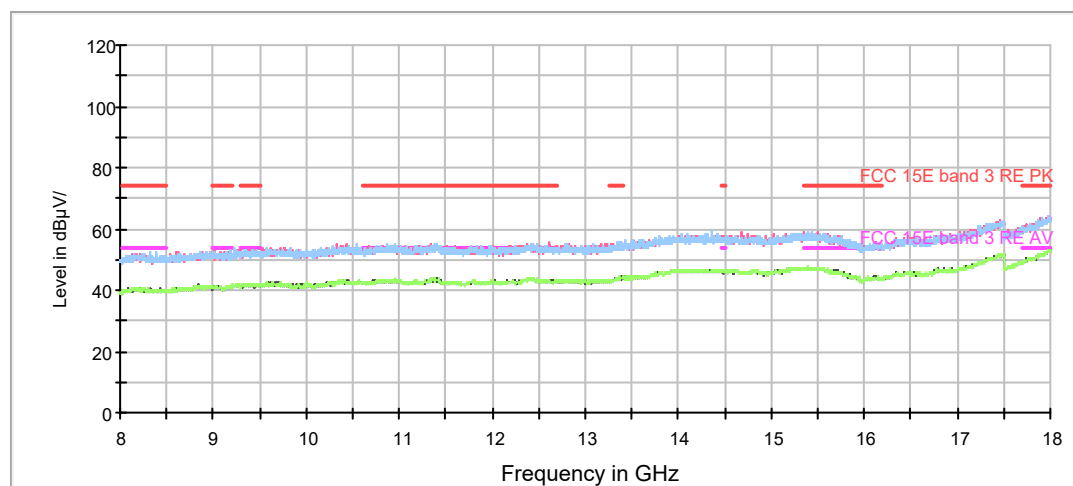

Radiates Emission from 8GHz to 18GHz


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1378.875000	44.7	200.0	H	25.0	-0.7	29.3	74.0
1597.625000	45.8	200.0	V	56.0	0.0	28.2	74.0
2293.300000	47.9	100.0	H	133.0	2.7	26.1	74.0
2754.375000	50.1	200.0	V	23.0	4.2	23.9	74.0
3894.500000	52.6	100.0	H	315.0	7.1	21.4	74.0
7387.500000	60.1	200.0	V	0.0	15.8	13.9	74.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1374.500000	34.2	100.0	V	182.0	-0.8	19.8	54.0
1624.750000	37.4	100.0	V	165.0	0.1	16.6	54.0
2296.800000	36.7	200.0	V	116.0	2.8	17.3	54.0
2807.750000	38.6	200.0	H	0.0	4.3	15.4	54.0
3975.875000	41.0	100.0	V	330.0	7.1	13.0	54.0
7398.000000	48.5	200.0	H	336.0	15.8	5.5	54.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH36

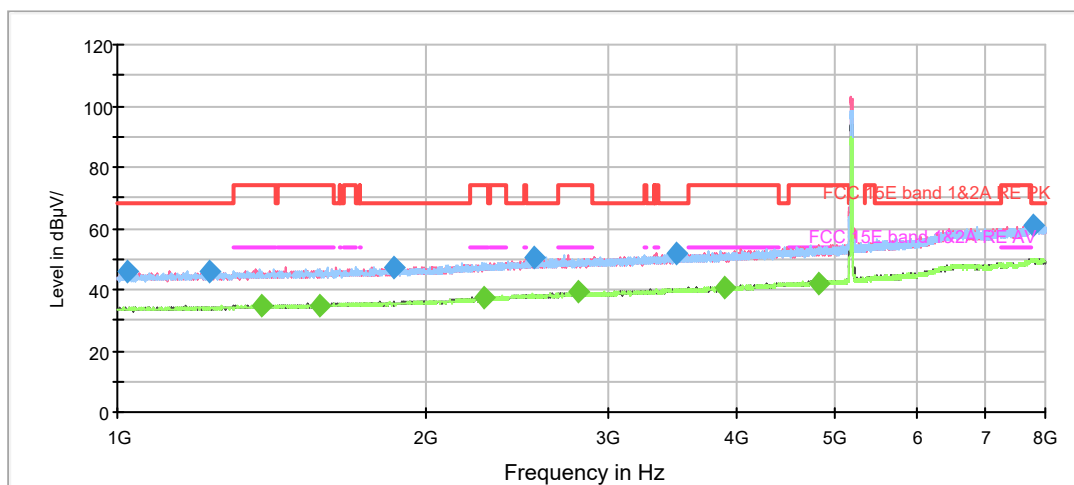

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

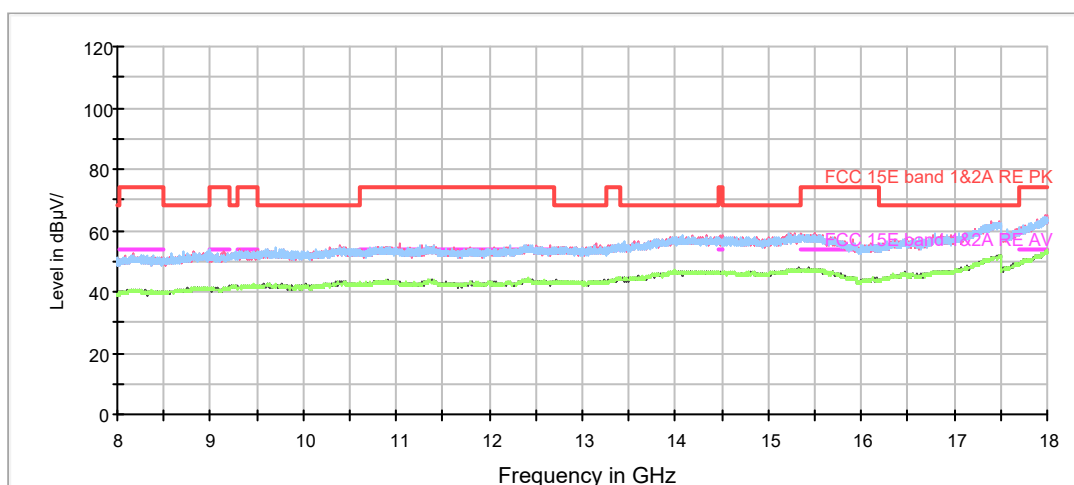

Radiates Emission from 8GHz to 18GHz


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1024.500000	46.1	200.0	V	48.0	-1.8	22.1	68.2
1229.250000	45.7	200.0	H	112.0	-1.2	22.5	68.2
1859.250000	47.3	200.0	V	257.0	0.8	20.9	68.2
2547.000000	50.4	200.0	H	358.0	3.7	17.8	68.2
3499.000000	51.8	200.0	V	73.0	6.1	16.4	68.2
7800.500000	61.2	200.0	V	248.0	17.3	7.0	68.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1378.875000	34.8	200.0	H	357.0	-0.7	19.2	54.0
1573.125000	34.8	200.0	V	32.0	-0.1	19.2	54.0
2274.875000	37.5	200.0	V	48.0	2.7	16.5	54.0
2806.000000	39.1	200.0	V	7.0	4.3	14.9	54.0
3895.375000	40.8	100.0	V	218.0	7.1	13.2	54.0
4822.875000	42.2	100.0	V	358.0	9.4	11.8	54.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH44

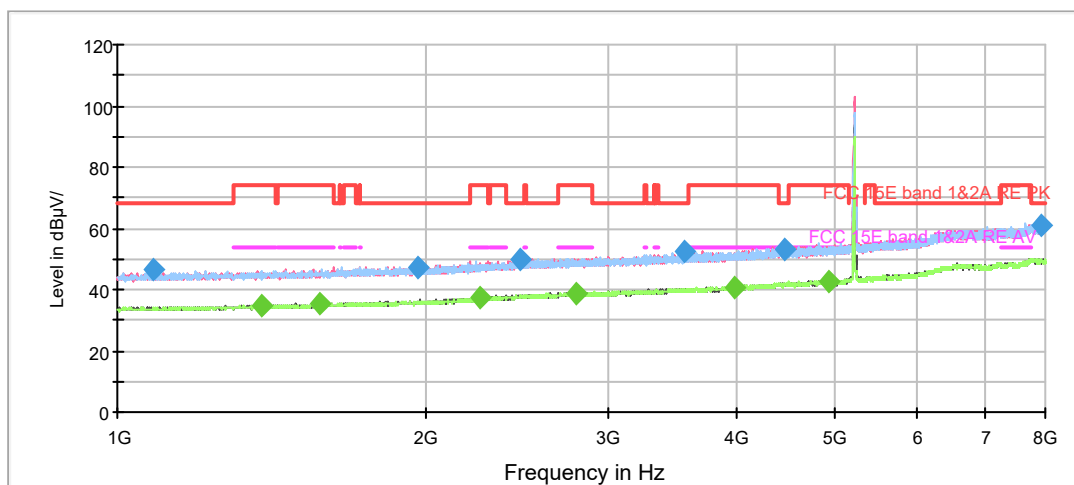

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

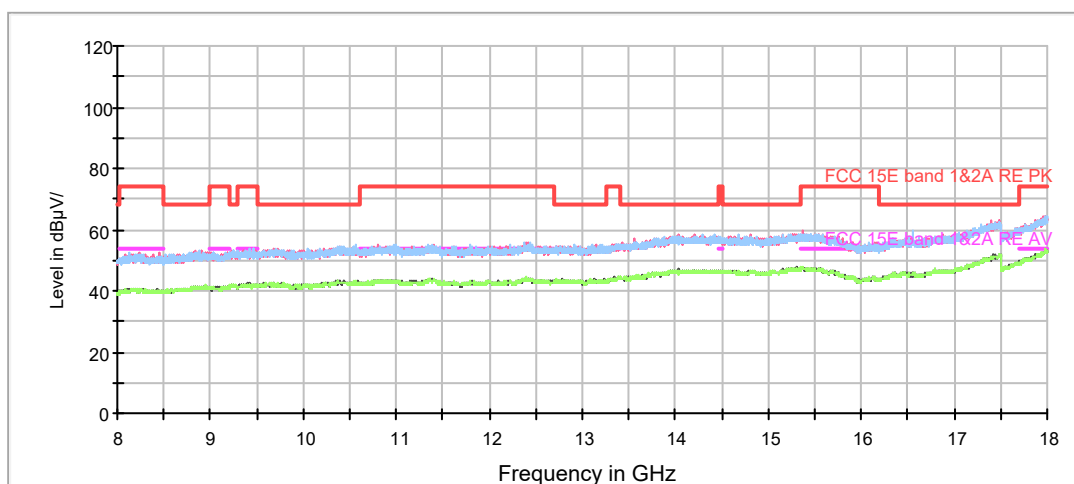

Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1084.875000	46.2	200.0	H	55.0	-1.4	22.0	68.2
1962.500000	47.4	100.0	H	13.0	1.0	20.8	68.2
2471.750000	50.0	200.0	V	0.0	3.5	18.2	68.2
3569.000000	52.6	200.0	V	258.0	6.3	15.6	68.2
4455.375000	52.9	200.0	V	70.0	8.7	15.3	68.2
7928.250000	61.1	100.0	H	17.0	17.8	7.1	68.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1382.375000	35.0	100.0	H	38.0	-0.7	19.0	54.0
1570.500000	35.1	200.0	V	3.0	-0.1	18.9	54.0
2259.125000	37.4	100.0	V	298.0	2.5	16.6	54.0
2799.000000	38.8	200.0	V	315.0	4.3	15.2	54.0
3993.375000	40.8	200.0	H	0.0	7.2	13.2	54.0
4934.875000	42.6	100.0	V	199.0	9.5	11.4	54.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT20) CH48

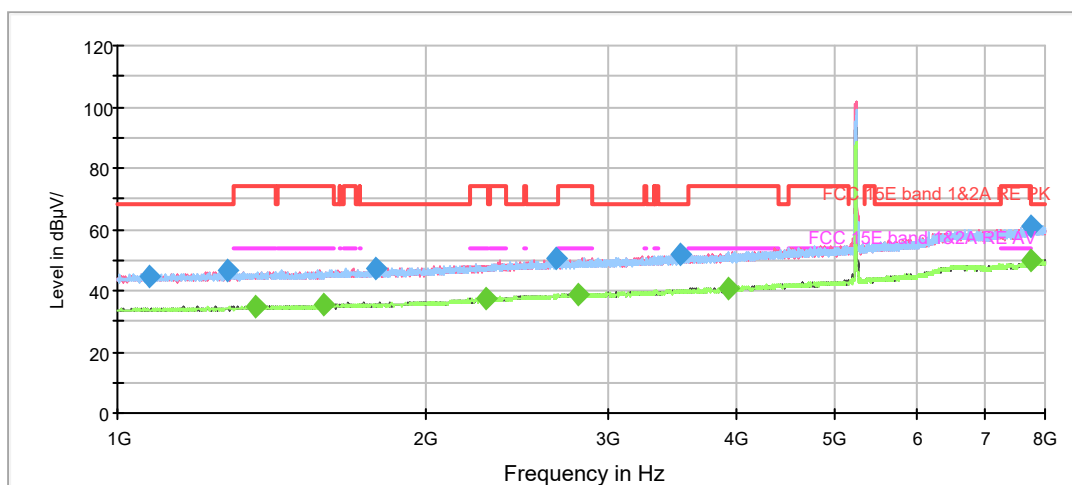

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

FCC RE 1G-18GHz PK+AV Class B

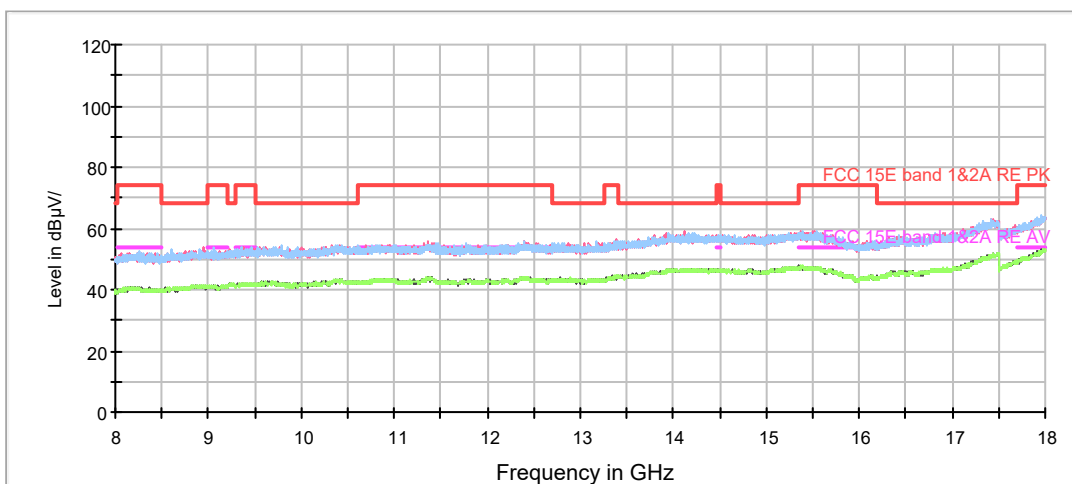

Radiates Emission from 8GHz to 18GHz


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1074.375000	44.7	100.0	H	142.0	-1.5	23.5	68.2
1280.875000	46.4	200.0	H	166.0	-1.0	21.8	68.2
1784.875000	47.4	100.0	V	358.0	0.6	20.8	68.2
2673.000000	50.4	200.0	V	112.0	3.9	17.8	68.2
3528.750000	51.7	200.0	V	43.0	6.3	16.5	68.2
7769.000000	61.0	100.0	H	204.0	17.2	7.2	68.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1364.000000	34.9	200.0	H	297.0	-0.8	19.1	54.0
1587.125000	35.1	100.0	H	3.0	-0.1	18.9	54.0
2281.875000	37.5	200.0	H	0.0	2.7	16.5	54.0
2806.875000	38.9	100.0	H	0.0	4.3	15.1	54.0
3943.500000	40.7	200.0	H	94.0	7.1	13.3	54.0
7741.875000	50.1	200.0	V	0.0	17.1	3.9	54.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH149

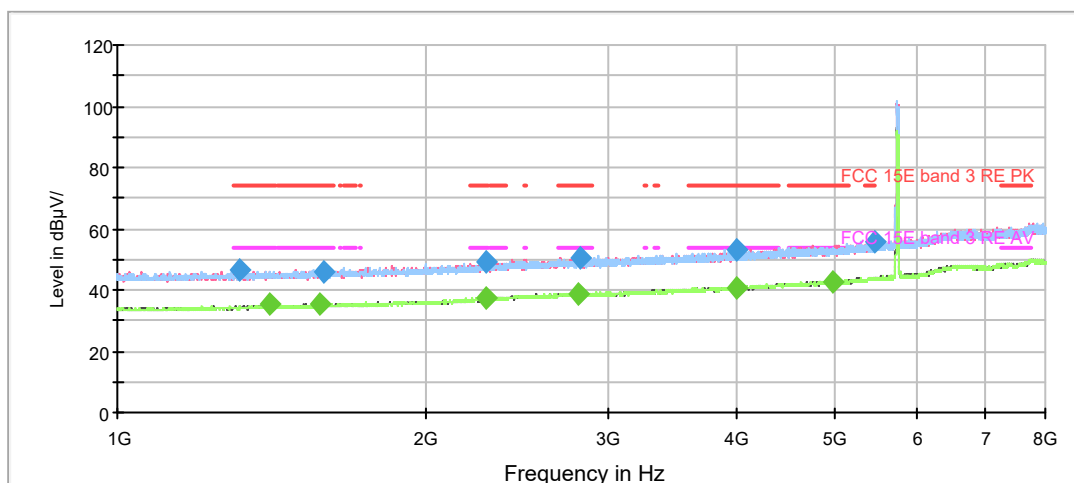

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

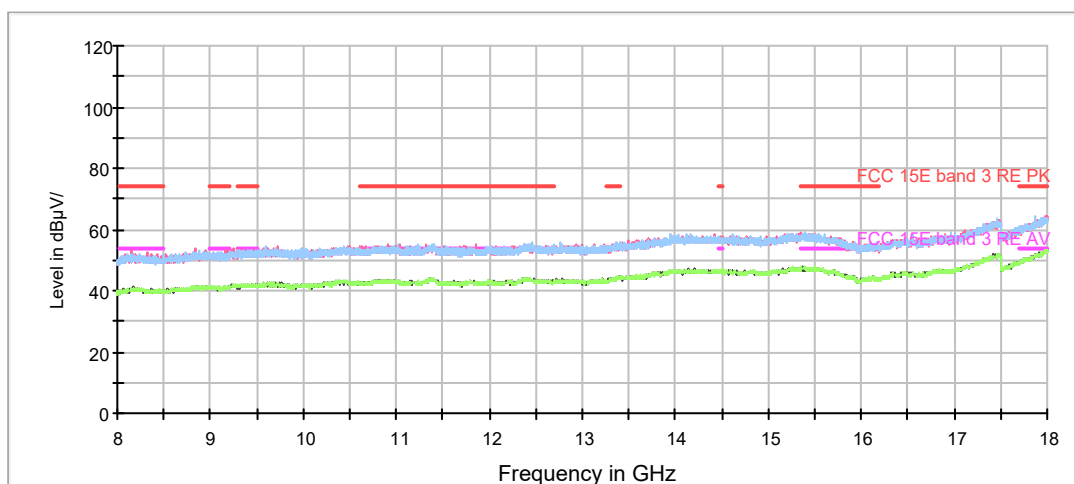

Radiates Emission from 8GHz to 18GHz


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1312.375000	46.3	200.0	H	206.0	-0.9	27.7	74.0
1586.250000	45.7	200.0	V	0.0	-0.1	28.3	74.0
2289.750000	49.0	200.0	H	0.0	2.7	25.0	74.0
2818.250000	50.4	200.0	V	115.0	4.3	23.6	74.0
3998.625000	53.1	200.0	H	0.0	7.3	20.9	74.0
5452.000000	56.1	100.0	H	63.0	11.1	17.9	74.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1408.625000	35.1	200.0	H	318.0	-0.7	18.9	54.0
1576.625000	35.2	200.0	V	5.0	-0.1	18.8	54.0
2284.500000	37.3	200.0	V	19.0	2.7	16.7	54.0
2806.875000	38.8	200.0	H	0.0	4.3	15.2	54.0
3998.625000	40.9	200.0	V	0.0	7.3	13.1	54.0
4959.375000	42.8	100.0	V	0.0	9.5	11.2	54.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH157

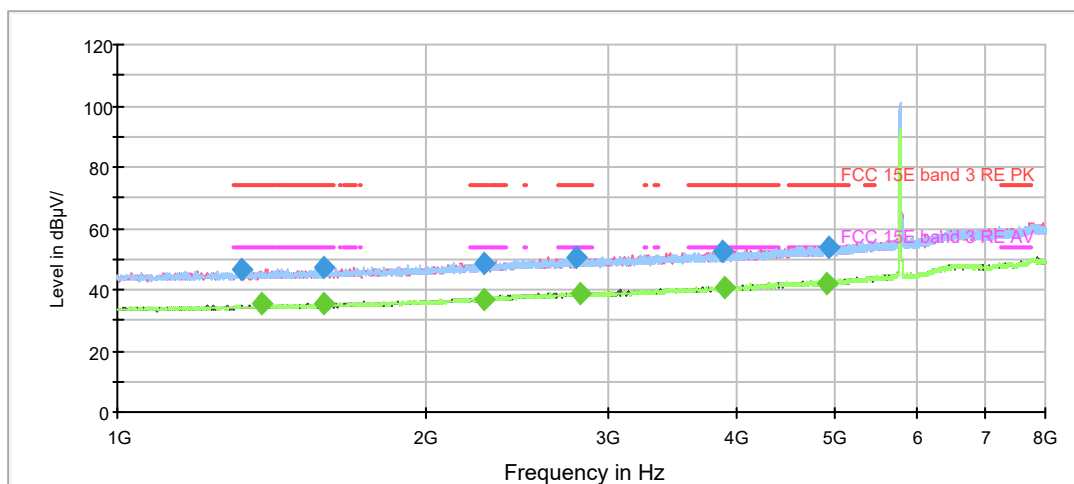

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

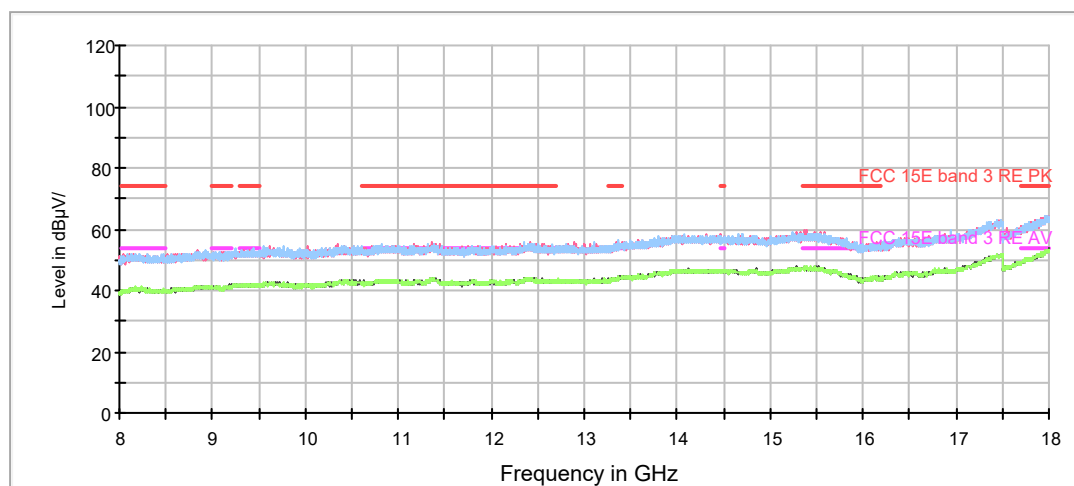

Radiates Emission from 8GHz to 18GHz


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1322.000000	46.8	100.0	H	211.0	-0.9	27.2	74.0
1588.875000	47.1	100.0	H	124.0	-0.1	26.9	74.0
2270.500000	48.4	200.0	H	342.0	2.6	25.6	74.0
2797.250000	50.7	100.0	H	62.0	4.3	23.3	74.0
3877.875000	52.2	100.0	V	0.0	7.0	21.8	74.0
4917.375000	53.7	200.0	V	100.0	9.5	20.3	74.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1380.625000	35.1	100.0	H	62.0	-0.7	18.9	54.0
1585.375000	35.2	200.0	V	108.0	-0.1	18.8	54.0
2276.625000	36.9	200.0	V	82.0	2.7	17.1	54.0
2826.125000	38.8	100.0	V	287.0	4.4	15.2	54.0
3891.875000	40.8	100.0	V	359.0	7.1	13.2	54.0
4901.625000	42.2	200.0	V	167.0	9.5	11.8	54.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH165

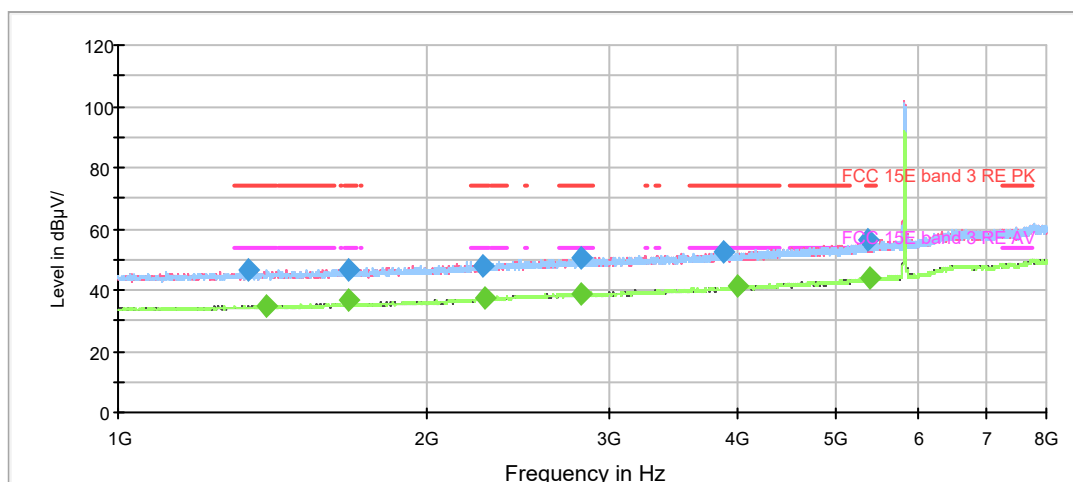

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

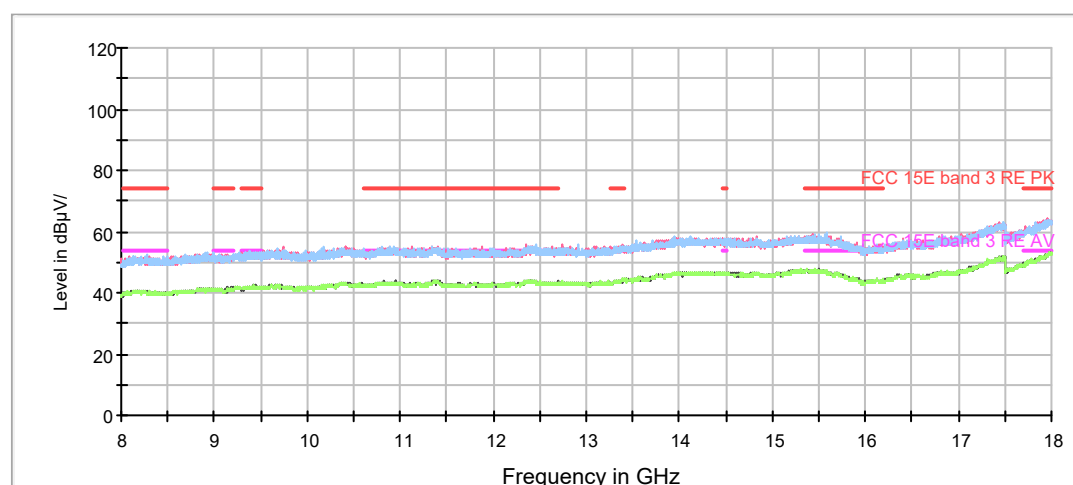

Radiates Emission from 8GHz to 18GHz


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1337.750000	46.4	100.0	V	320.0	-0.9	27.6	74.0
1676.375000	46.4	200.0	H	350.0	0.3	27.6	74.0
2267.000000	48.1	200.0	V	7.0	2.6	25.9	74.0
2822.625000	50.4	100.0	V	356.0	4.4	23.6	74.0
3885.750000	52.4	200.0	V	11.0	7.0	21.6	74.0
5358.375000	56.3	200.0	H	219.0	10.7	17.7	74.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1392.875000	34.9	100.0	V	341.0	-0.7	19.1	54.0
1679.875000	36.4	200.0	V	335.0	0.3	17.6	54.0
2274.000000	37.5	100.0	V	294.0	2.7	16.5	54.0
2820.875000	38.9	100.0	V	0.0	4.4	15.1	54.0
3999.500000	41.0	200.0	V	39.0	7.3	13.0	54.0
5385.500000	44.0	200.0	V	314.0	10.9	10.0	54.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH38

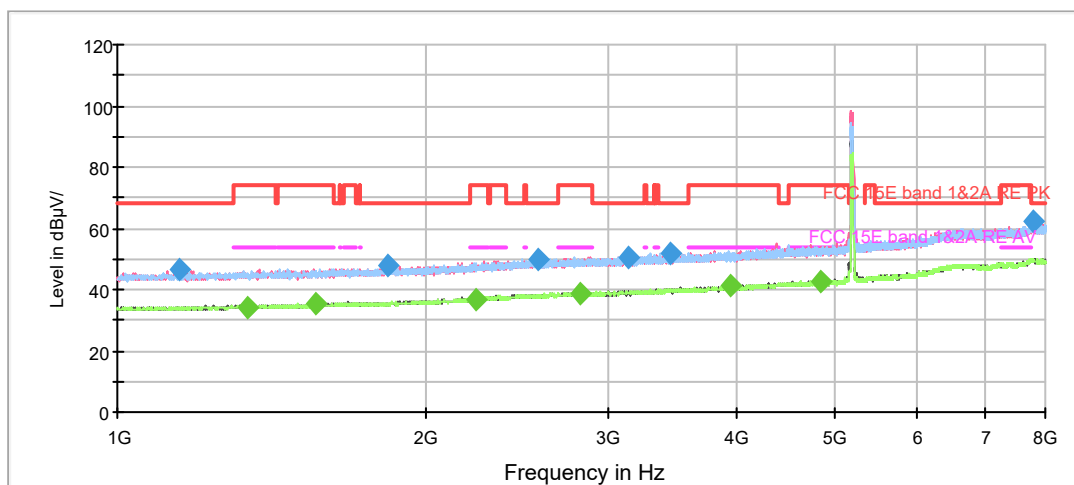

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

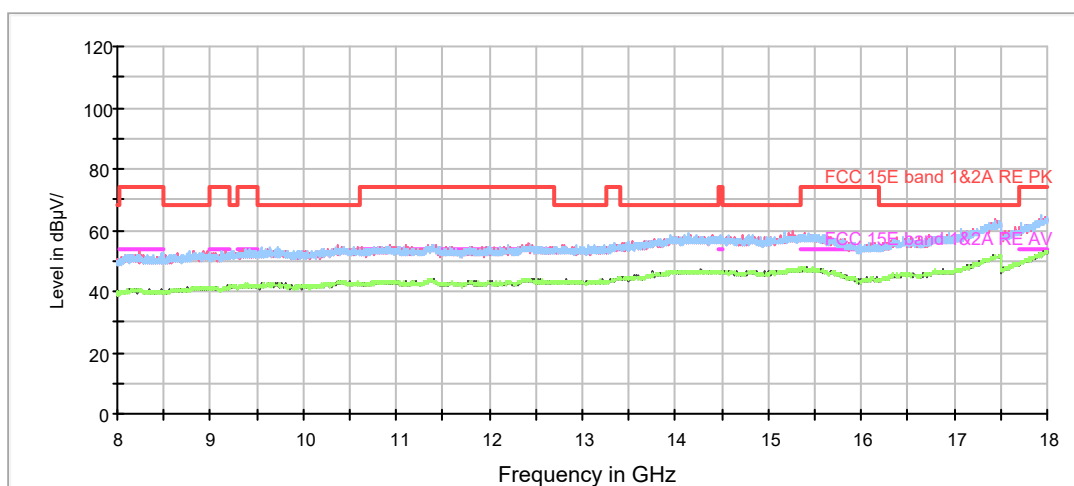

Radiates Emission from 8GHz to 18GHz


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1149.625000	46.3	100.0	V	0.0	-1.3	21.9	68.2
1837.375000	47.9	100.0	H	0.0	0.7	20.3	68.2
2571.500000	50.1	200.0	H	342.0	3.7	18.1	68.2
3136.750000	50.7	200.0	H	253.0	5.1	17.5	68.2
3459.625000	51.8	100.0	H	0.0	6.0	16.4	68.2
7783.875000	62.1	200.0	H	0.0	17.3	6.1	68.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1339.500000	34.2	200.0	V	41.0	-0.9	19.8	54.0
1556.500000	35.5	200.0	H	185.0	-0.2	18.5	54.0
2232.875000	37.0	100.0	V	356.0	2.4	17.0	54.0
2824.375000	38.8	100.0	H	104.0	4.4	15.2	54.0
3948.750000	41.1	200.0	V	92.0	7.1	12.9	54.0
4845.625000	42.8	200.0	V	41.0	9.4	11.2	54.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH46

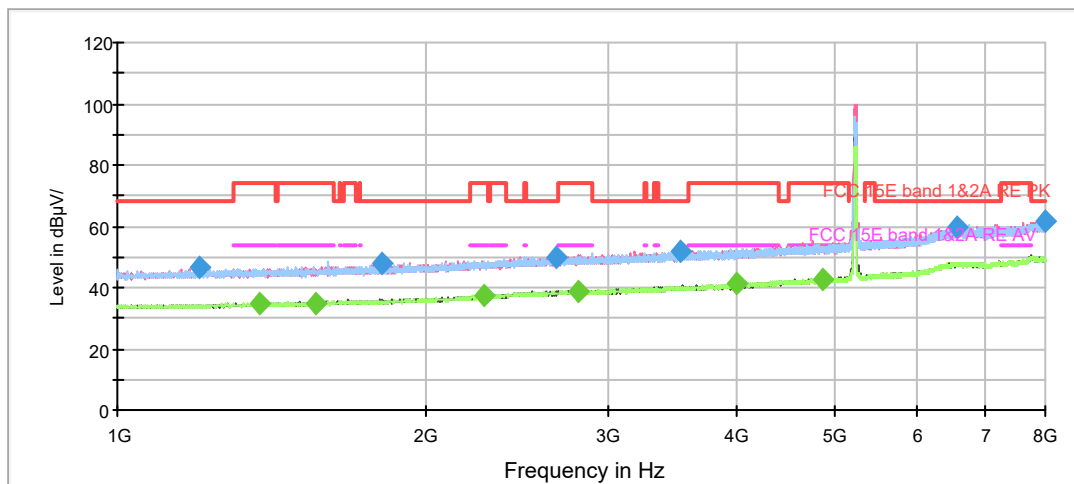

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

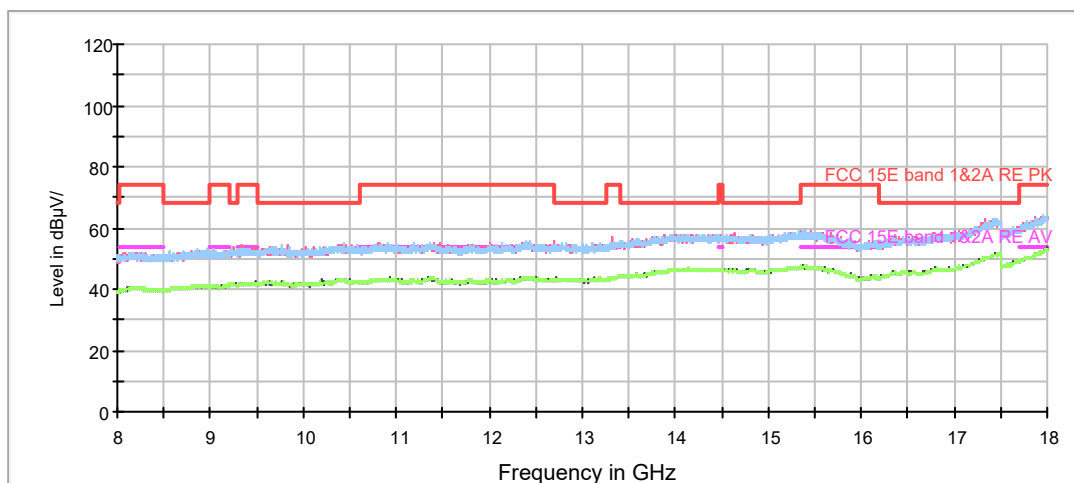

Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1203.875000	46.5	200.0	V	10.0	-1.2	21.7	68.2
1807.625000	48.1	200.0	H	0.0	0.7	20.1	68.2
2676.500000	50.0	100.0	V	0.0	3.9	18.2	68.2
3529.625000	52.0	200.0	V	3.0	6.3	16.2	68.2
6579.875000	60.0	200.0	V	355.0	15.0	8.2	68.2
7988.625000	61.8	200.0	V	161.0	18.1	6.4	68.2


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1376.250000	35.1	200.0	H	0.0	-0.7	18.9	54.0
1560.875000	34.8	200.0	V	58.0	-0.2	19.2	54.0
2272.250000	37.5	100.0	V	274.0	2.7	16.5	54.0
2808.625000	38.7	100.0	H	99.0	4.3	15.3	54.0
3998.625000	41.0	100.0	H	178.0	7.3	13.0	54.0
4870.125000	42.6	200.0	H	251.0	9.5	11.4	54.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)




802.11n (HT40) CH151

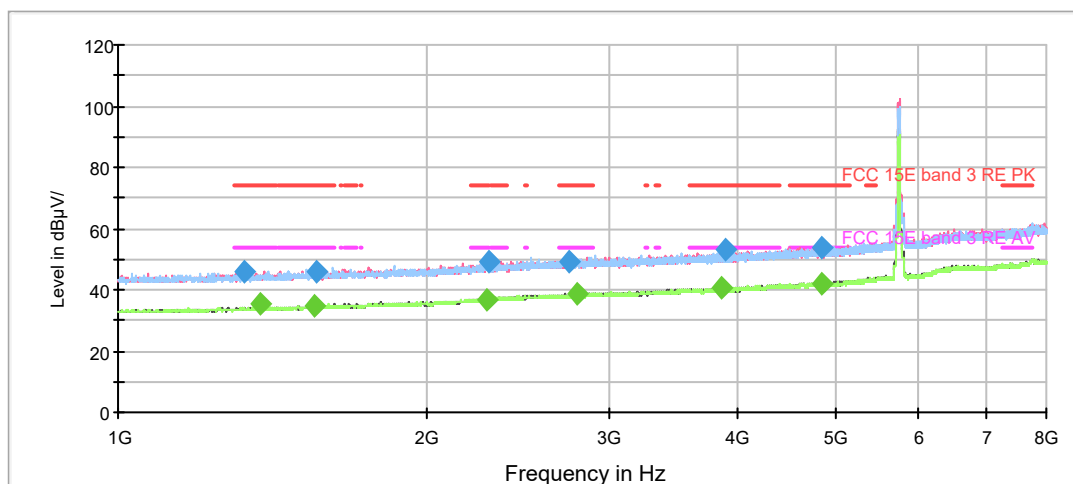

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

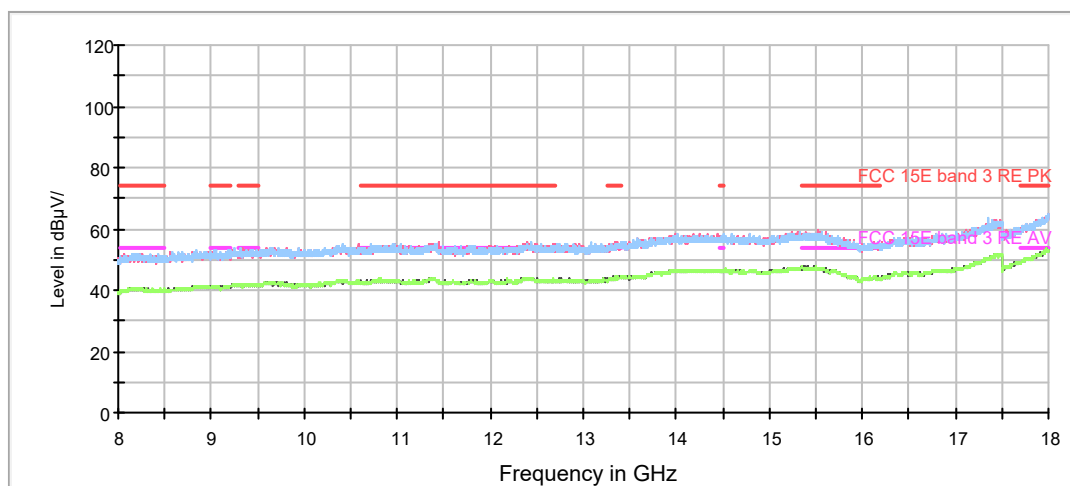

Radiates Emission from 8GHz to 18GHz


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1327.250000	45.9	200.0	H	210.0	-0.9	28.1	74.0
1557.375000	45.9	200.0	H	0.0	-0.2	28.1	74.0
2290.625000	49.2	200.0	H	329.0	2.7	24.8	74.0
2747.375000	49.3	100.0	V	335.0	4.1	24.7	74.0
3891.000000	53.1	100.0	V	335.0	7.1	20.9	74.0
4843.000000	54.1	100.0	H	49.0	9.4	19.9	74.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1374.500000	35.3	100.0	V	0.0	-0.8	18.7	54.0
1550.375000	34.7	200.0	V	0.0	-0.2	19.3	54.0
2288.000000	36.9	100.0	V	235.0	2.7	17.1	54.0
2792.875000	38.7	100.0	H	0.0	4.3	15.3	54.0
3869.125000	40.6	100.0	H	142.0	6.9	13.4	54.0
4845.625000	42.2	100.0	V	295.0	9.4	11.8	54.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH159

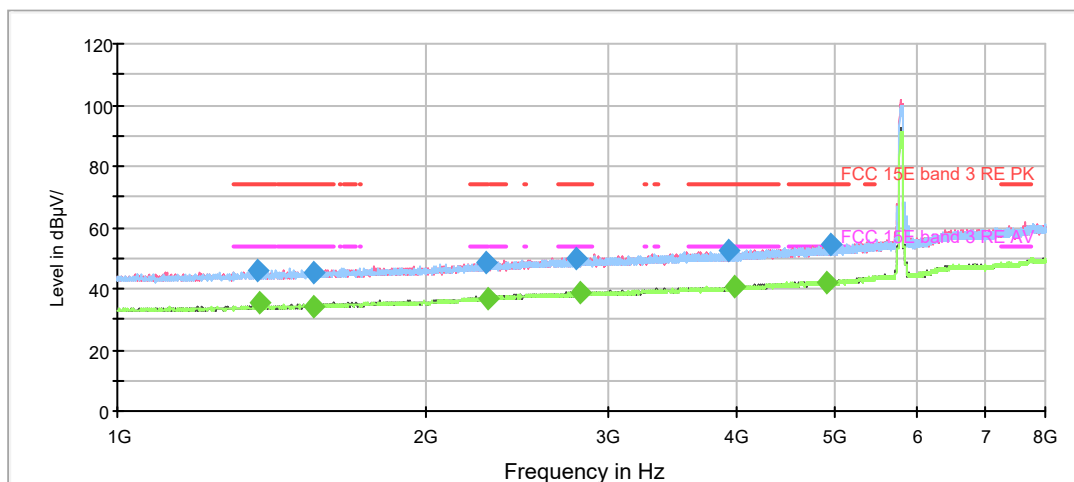

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

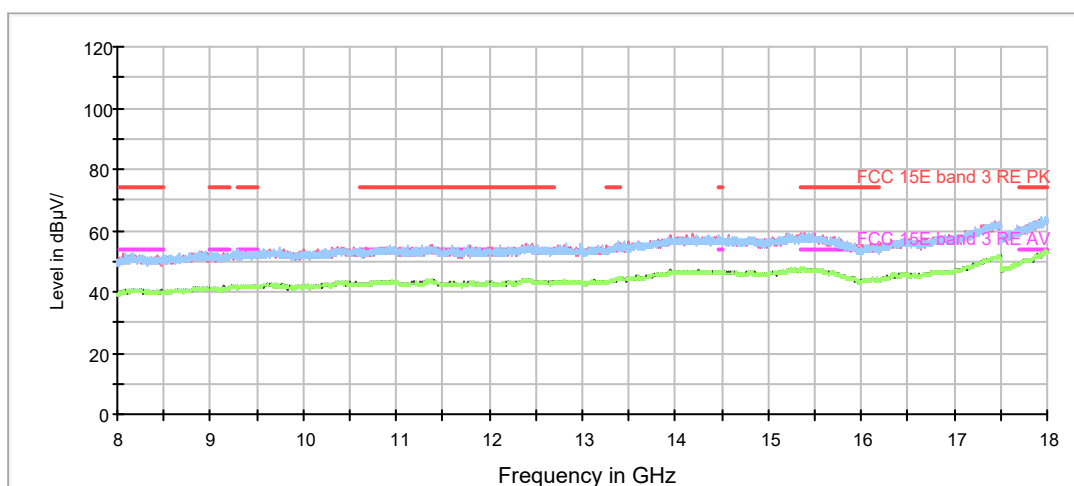

Radiates Emission from 8GHz to 18GHz


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1371.000000	46.0	200.0	H	359.0	-0.8	28.0	74.0
1555.625000	45.4	200.0	V	1.0	-0.2	28.6	74.0
2285.375000	48.3	100.0	H	1.0	2.7	25.7	74.0
2802.500000	50.1	200.0	H	359.0	4.3	23.9	74.0
3936.500000	52.5	200.0	V	84.0	7.1	21.5	74.0
4958.500000	54.3	200.0	V	188.0	9.5	19.7	74.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1374.500000	35.5	100.0	V	0.0	-0.8	18.5	54.0
1551.250000	34.3	200.0	H	146.0	-0.2	19.7	54.0
2294.125000	37.0	200.0	H	225.0	2.7	17.0	54.0
2826.125000	38.7	100.0	V	91.0	4.4	15.3	54.0
3985.500000	40.8	200.0	V	8.0	7.2	13.2	54.0
4905.125000	42.1	100.0	V	339.0	9.5	11.9	54.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ac (HT80) CH42

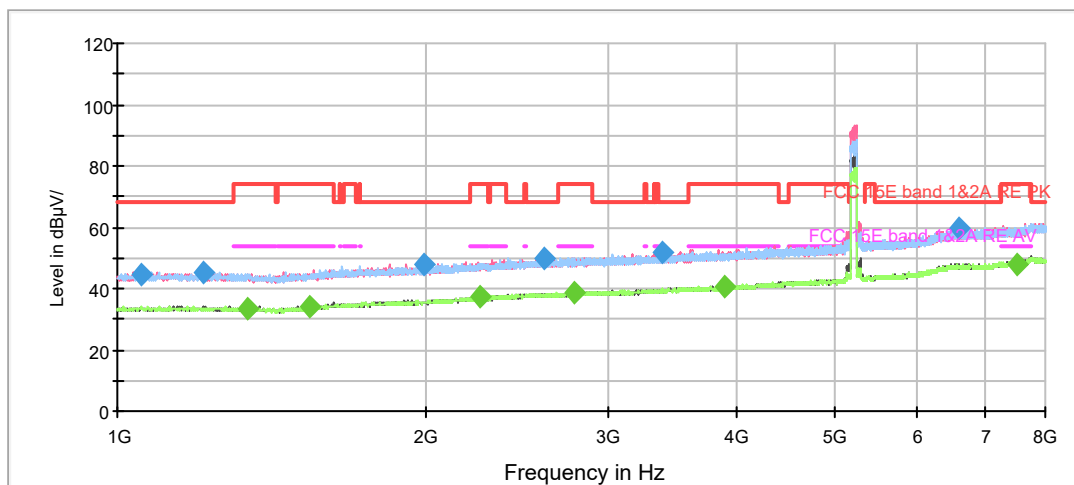

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

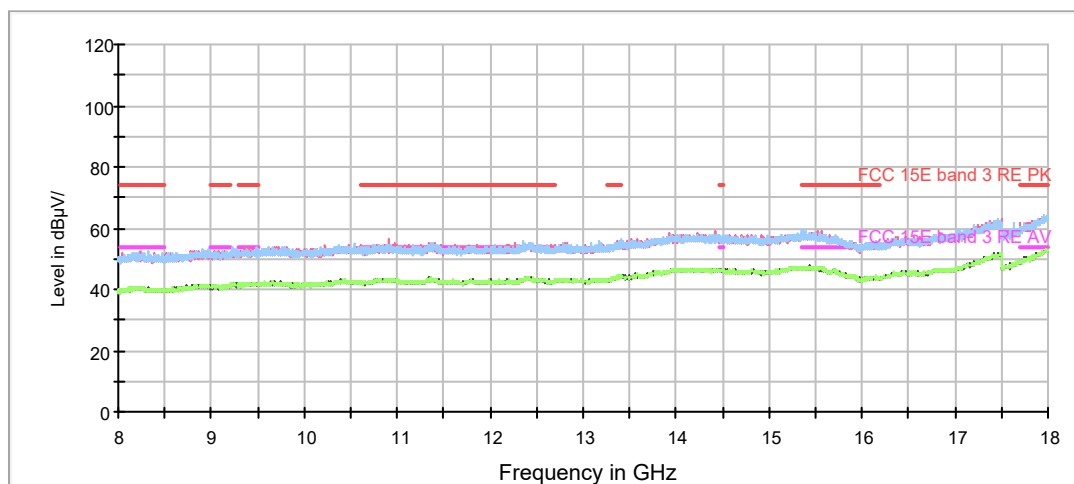

Radiates Emission from 8GHz to 18GHz


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1056.000000	44.9	100.0	H	128.0	-1.6	23.3	68.2
1212.625000	45.3	100.0	V	100.0	-1.2	22.9	68.2
1992.250000	47.9	200.0	V	6.0	1.1	20.3	68.2
2606.500000	49.8	200.0	V	210.0	3.8	18.4	68.2
3398.375000	51.7	200.0	H	344.0	5.7	16.5	68.2
6580.750000	59.5	200.0	V	43.0	15.0	8.7	68.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1338.625000	33.4	200.0	H	0.0	-0.9	20.6	54.0
1538.125000	34.0	200.0	V	27.0	-0.3	20.0	54.0
2259.125000	37.1	200.0	V	3.0	2.5	16.9	54.0
2784.125000	38.6	200.0	V	0.0	4.2	15.4	54.0
3901.500000	40.8	200.0	V	51.0	7.1	13.2	54.0
7505.625000	47.7	100.0	V	225.0	16.1	6.3	54.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ac (HT80) CH155

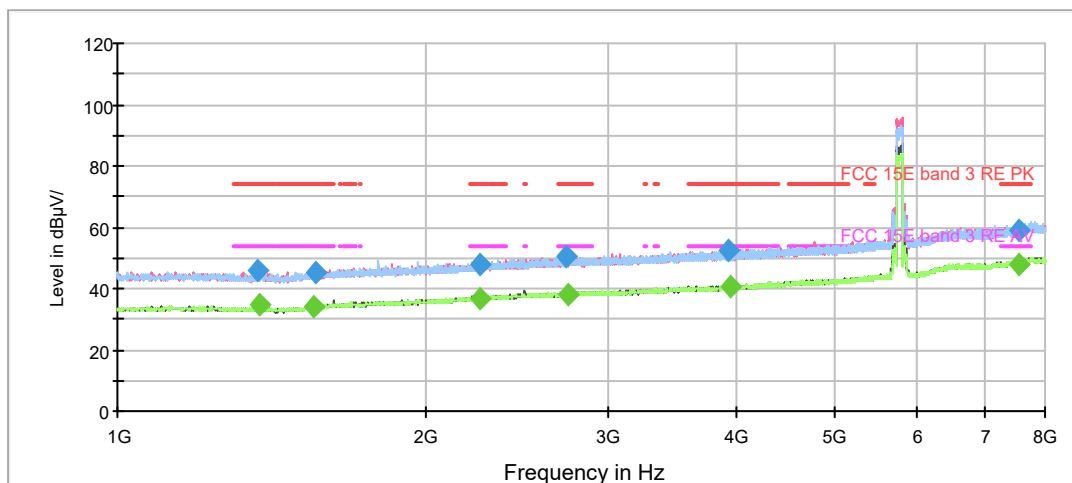

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

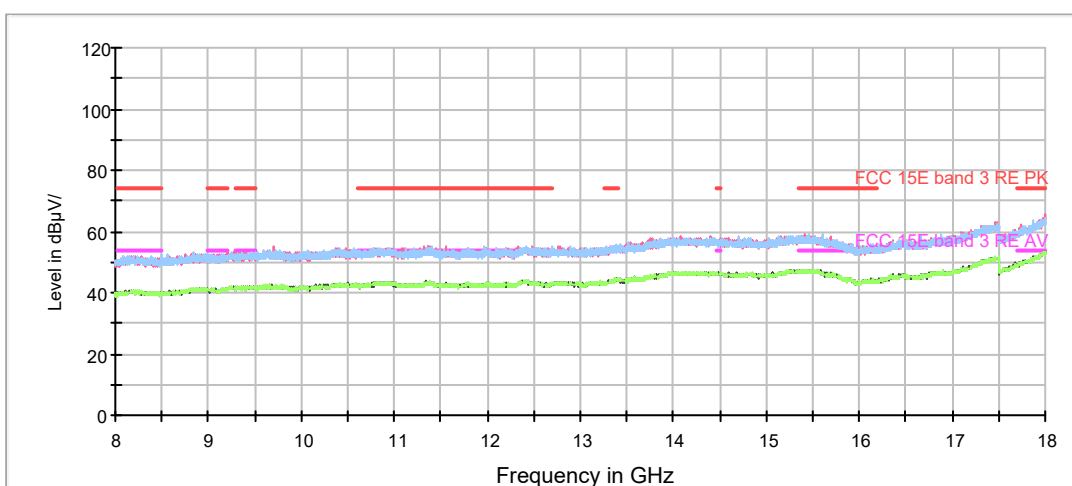

Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1367.500000	45.8	200.0	H	352.0	-0.8	28.2	74.0
1559.125000	45.3	200.0	V	95.0	-0.2	28.7	74.0
2253.875000	48.0	100.0	V	308.0	2.5	26.0	74.0
2736.000000	50.5	100.0	H	0.0	4.1	23.5	74.0
3943.500000	52.4	100.0	V	356.0	7.1	21.6	74.0
7555.500000	59.3	100.0	V	115.0	16.3	14.7	74.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1374.500000	34.6	100.0	V	124.0	-0.8	19.4	54.0
1552.125000	34.3	100.0	V	299.0	-0.2	19.7	54.0
2256.500000	37.0	100.0	H	130.0	2.5	17.0	54.0
2750.875000	38.2	200.0	V	52.0	4.2	15.8	54.0
3944.375000	40.9	100.0	H	175.0	7.1	13.1	54.0
7543.250000	48.1	200.0	V	0.0	16.2	5.9	54.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

5.2. Conducted Emission

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

The EUT IS placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the LISN Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9kHz, VBW is set to 30kHz The measurement result should include both L line and N line.

The test is in transmitting mode.

Test Setup

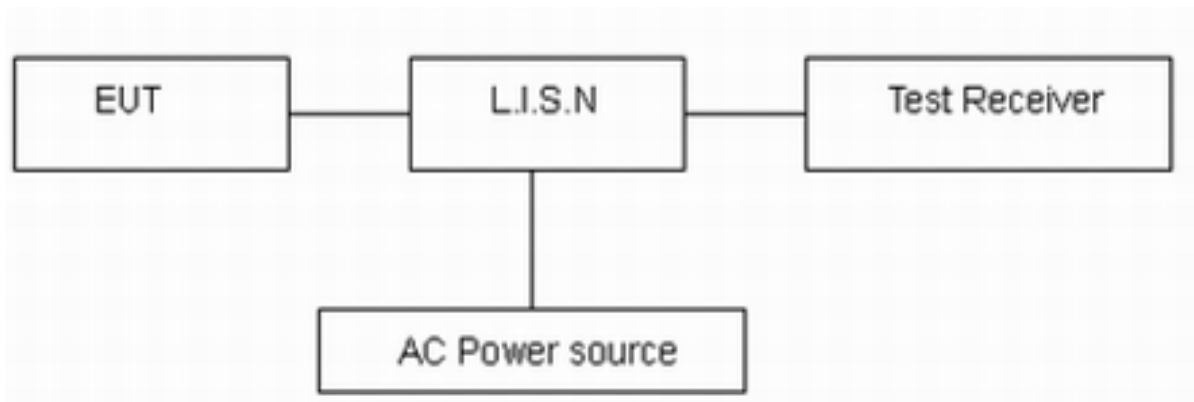

Note: AC Power source is used to change the voltage 110V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

*: Decreases with the logarithm of the frequency.


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.

Test Results:

Following plots, Blue trace uses the peak detection and Green trace uses the average detection. During the test, the Conducted Emission was performed in all modes with all channels, 802.11n (HT20) CH48 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.


Original(P-41)

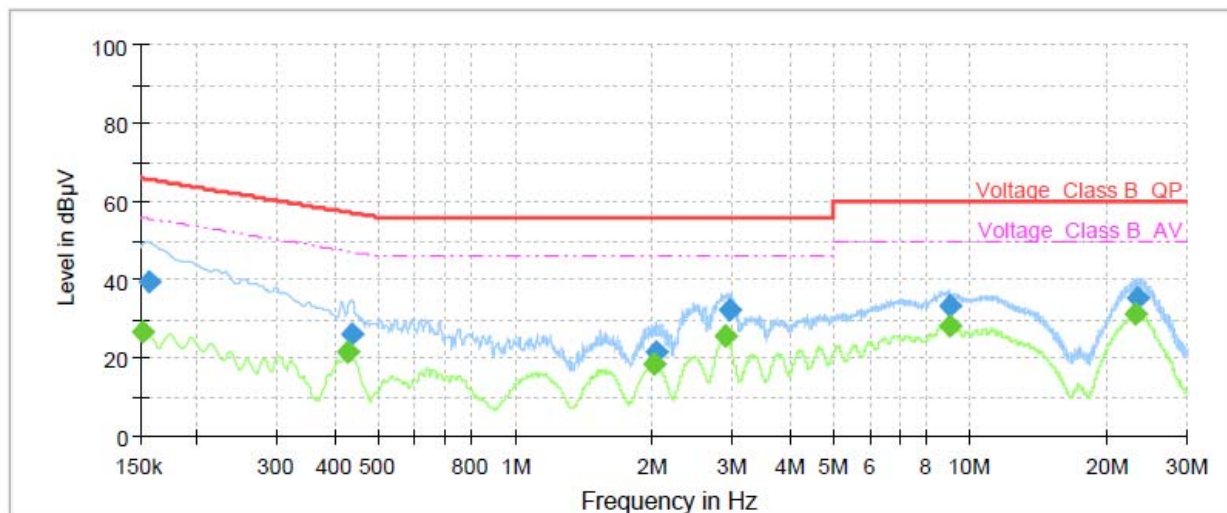

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.15	---	26.74	55.88	29.14	1000.0	9.000	L1	ON	19.05
0.16	39.55	---	65.63	26.08	1000.0	9.000	L1	ON	19.09
0.43	---	21.79	47.27	25.48	1000.0	9.000	L1	ON	19.23
0.44	26.10	---	57.14	31.04	1000.0	9.000	L1	ON	19.23
2.01	---	18.62	46.00	27.38	1000.0	9.000	L1	ON	19.13
2.04	21.56	---	56.00	34.44	1000.0	9.000	L1	ON	19.12
2.89	---	25.57	46.00	20.43	1000.0	9.000	L1	ON	19.06
2.96	32.27	---	56.00	23.73	1000.0	9.000	L1	ON	19.10
8.99	33.21	---	60.00	26.79	1000.0	9.000	L1	ON	19.28
9.00	---	28.31	50.00	21.69	1000.0	9.000	L1	ON	19.28
23.21	---	31.29	50.00	18.71	1000.0	9.000	L1	ON	19.64
23.32	35.46	---	60.00	24.54	1000.0	9.000	L1	ON	19.65

Remark: Correct factor=cable loss + LISN factor

L line Conducted Emission from 150 KHz to 30 MHz

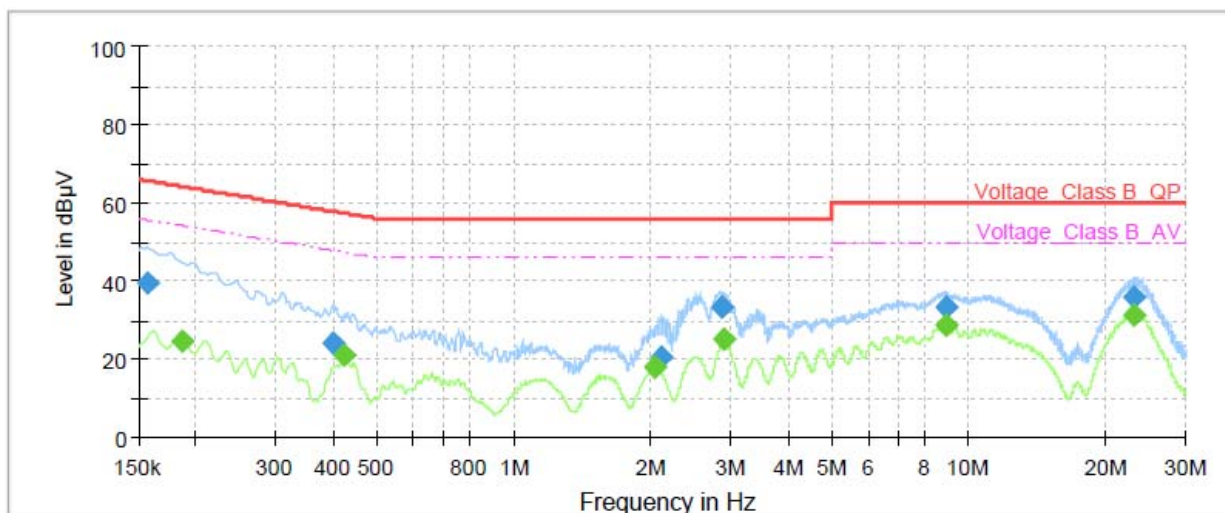


Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.16	39.34	---	65.63	26.29	1000.0	9.000	N	ON	19.11
0.19	---	24.77	54.21	29.44	1000.0	9.000	N	ON	19.18
0.40	24.18	---	57.86	33.68	1000.0	9.000	N	ON	19.23
0.42	---	21.26	47.36	26.10	1000.0	9.000	N	ON	19.23
2.05	---	17.95	46.00	28.05	1000.0	9.000	N	ON	19.11
2.12	20.60	---	56.00	35.40	1000.0	9.000	N	ON	19.08
2.87	33.56	---	56.00	22.44	1000.0	9.000	N	ON	19.05
2.89	---	25.17	46.00	20.83	1000.0	9.000	N	ON	19.07
8.93	---	28.70	50.00	21.30	1000.0	9.000	N	ON	19.29
8.95	33.52	---	60.00	26.48	1000.0	9.000	N	ON	19.29
23.19	35.75	---	60.00	24.25	1000.0	9.000	N	ON	19.55
23.21	---	31.42	50.00	18.58	1000.0	9.000	N	ON	19.55

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 KHz to 30 MHz


Variant 1(Mars1417V-TSI)

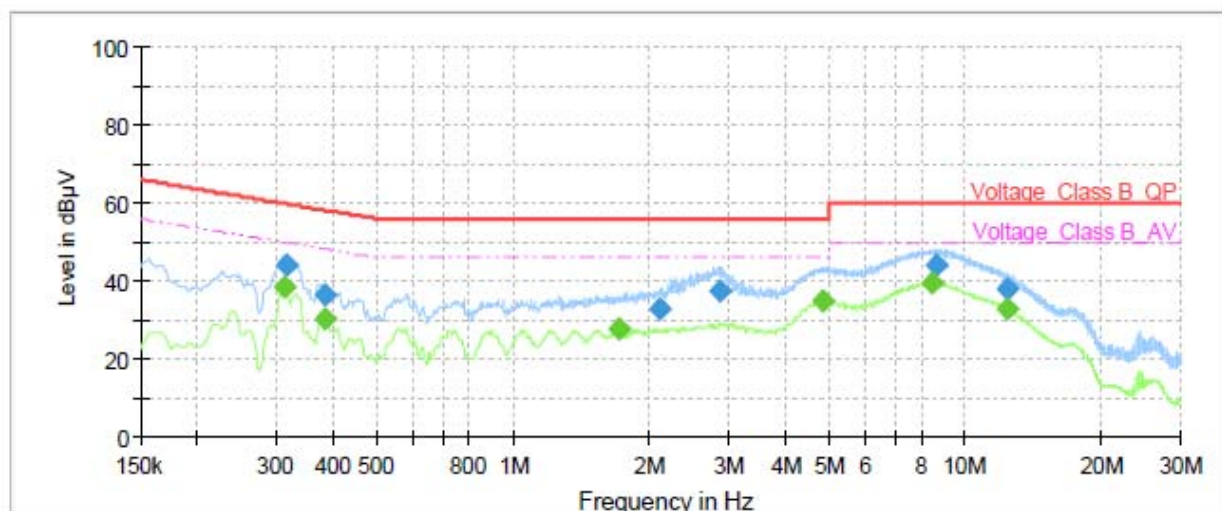

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.31	---	38.65	49.92	11.27	1000.0	9.000	L1	ON	19.18
0.31	44.08	---	59.86	15.78	1000.0	9.000	L1	ON	19.17
0.38	36.31	---	58.24	21.93	1000.0	9.000	L1	ON	19.23
0.38	---	30.43	48.19	17.76	1000.0	9.000	L1	ON	19.23
1.71	---	27.47	46.00	18.53	1000.0	9.000	L1	ON	19.18
2.12	32.63	---	56.00	23.37	1000.0	9.000	L1	ON	19.08
2.88	37.59	---	56.00	18.41	1000.0	9.000	L1	ON	19.06
4.86	---	34.82	46.00	11.18	1000.0	9.000	L1	ON	19.07
8.49	---	39.38	50.00	10.62	1000.0	9.000	L1	ON	19.23
8.68	44.20	---	60.00	15.80	1000.0	9.000	L1	ON	19.26
12.41	37.74	---	60.00	22.26	1000.0	9.000	L1	ON	19.43
12.44	---	32.84	50.00	17.16	1000.0	9.000	L1	ON	19.43

Remark: Correct factor=cable loss + LISN factor

L line Conducted Emission from 150 KHz to 30 MHz

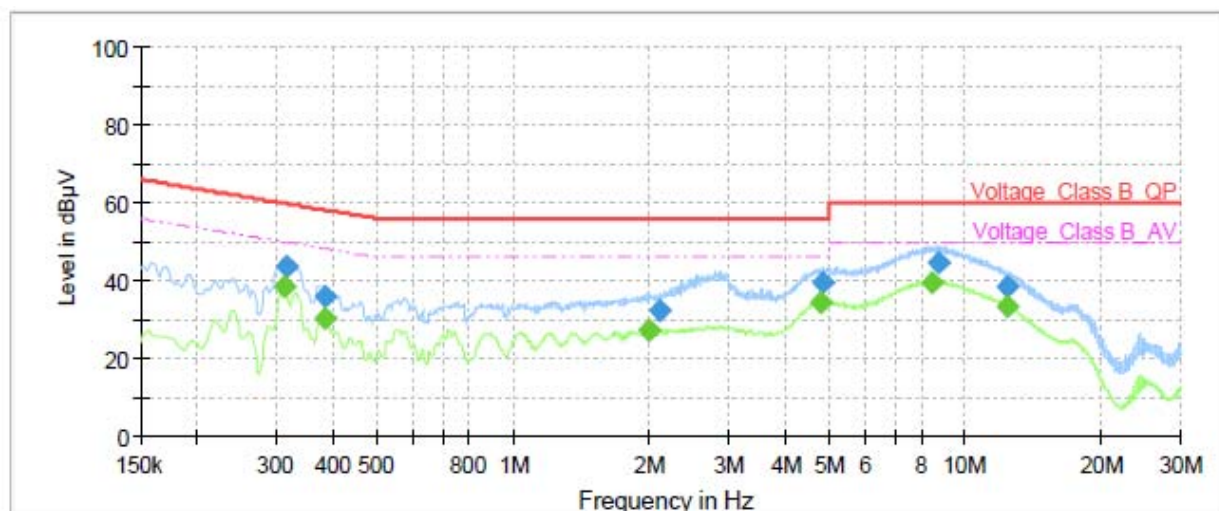

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.31	---	38.34	49.92	11.58	1000.0	9.000	N	ON	19.18
0.32	43.44	---	59.80	16.36	1000.0	9.000	N	ON	19.17
0.38	36.07	---	58.24	22.17	1000.0	9.000	N	ON	19.23
0.38	---	30.32	48.19	17.87	1000.0	9.000	N	ON	19.23
2.00	---	27.07	46.00	18.93	1000.0	9.000	N	ON	19.13
2.12	32.14	---	56.00	23.86	1000.0	9.000	N	ON	19.08
4.78	---	34.53	46.00	11.47	1000.0	9.000	N	ON	19.08
4.86	39.56	---	56.00	16.44	1000.0	9.000	N	ON	19.07
8.45	---	39.64	50.00	10.36	1000.0	9.000	N	ON	19.24
8.68	44.76	---	60.00	15.24	1000.0	9.000	N	ON	19.27
12.41	---	33.53	50.00	16.47	1000.0	9.000	N	ON	19.41
12.42	38.35	---	60.00	21.65	1000.0	9.000	N	ON	19.41

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 KHz to 30 MHz



6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Spectrum Analyzer	R&S	FSV40	15195-01-00	2019-05-19	2020-05-18
EMI Test Receiver	R&S	ESCI	100948	2019-05-19	2020-05-18
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2020-09-25
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	9163-201	2017-11-18	2020-11-17
Double Ridged Waveguide Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Standard Gain Horn	ETS-Lindgren	3160-09	00102643	2018-06-20	2020-06-19
Standard Gain Horn	STEATITE	QSH-SL-26-40-K-15	16779	2017-07-20	2020-07-19
Broadband Horn Antenna	SCHWARZBECK	BBHA 9120D	430	2018-07-07	2020-07-06
EMI Test Receiver	R&S	ESR	101667	2019-05-19	2020-05-18
LISN	R&S	ENV216	101171	2016-12-16	2019-12-15
LISN	R&S	ENV216	101171	2019-12-15	2022-12-14
Spectrum Analyzer	KEYSIGHT	N9020A	MY54420163	2018-12-16	2019-12-15
Spectrum Analyzer	KEYSIGHT	N9020A	MY54420163	2019-12-15	2020-12-14
RF Cable	Agilent	SMA 15cm	0001	2019-06-14	2019-12-13
RF Cable	Agilent	SMA 15cm	0001	2019-12-13	2020-06-12
TEMPERATURE CHAMBER	WEISS	VT4002	58226119450010	2018-12-16	2019-12-15
TEMPERATURE CHAMBER	WEISS	VT4002	58226119450010	2019-12-15	2020-12-14
WLAN AP	Cisco	Air-AP1262N-A-K9	LDK102073 (FCC ID)	/	/
AV Power Meter	R&S	NRP	104306	2019-05-19	2020-05-18
Power Probe	R&S	NRP-Z21	104799	2019-05-19	2020-05-18
DC Power Supply	GWINSTEK	GPS-3030D	GEP882653	2019-05-19	2020-05-18
Software	R&S	EMC32	9.26.0	/	/

*****END OF REPORT *****