QEye & QShooter Combo

Installation Guide

Model

QES-200

Installation Diagram
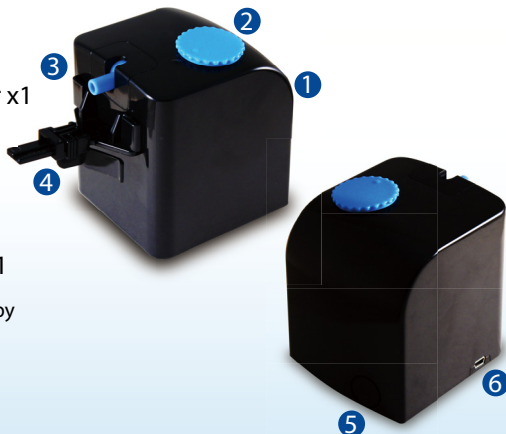
QEye

1 QEye x1

2 QEye Wet Side x1

3 Mini USB Port x2

(Mini USB Ports can be connected
either with power adapter or with
QShooter.)

QShooter

1 QShooter x1

2 Pellet Container x1

3 Pellet Tube x1

4 Holder x1

5 LED Window x1

6 Mini USB Port x1

(Connected with QEye by
connection Cable)

| Item	Pictures	Description
QEye		Viewing Aquarium
Wet Side Magnet for QEye		Mount QEye on The Tank (Max Tank Thickness : 0.75 inches)
QShooter		Auto Feeder to Shoot Pellets
Holder		Attach QShooter to The Tank (Max Wall Thickness : 1.0 inch)
Remote Control		IR Remote Control Feeding
Power Adapter		Universal Power Supply
Power Adapter Cable 200 cm		Connect QEye with Power Adapter
Connection Cable 50cm		Connect QEye with QShooter

1. Mount QEye on the wall of the tank.


2. Attach the holder to QShooter by sliding.


3. Hang QShooter on the glass of the tank.

4. Open the lid and pour the pellets.
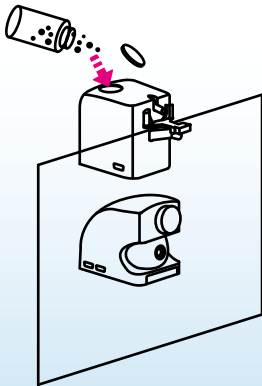
5. Please align the dot between QShooter and the lid when closing.

**6. Connect QEye with QShooter and plug power.**

7. Download "QSmart" APP.

QSmart

8. Set up AP Mode

8-1. Click setting to connect QEye SSID
(SSID: QEYE＊＊＊＊, Password: 12345678).

8-2. After connection, go back to QSmart APP and
     click "Add QEye".

8-3. Add QEye (3 Options).

I.Key in QEye ID Directly

or

II. Scan QR Code

or

III.LAN Search

*Remark

QEye ID & QR Code are on the bottom of QEye.

QEye_Aquarium WiFi Camera
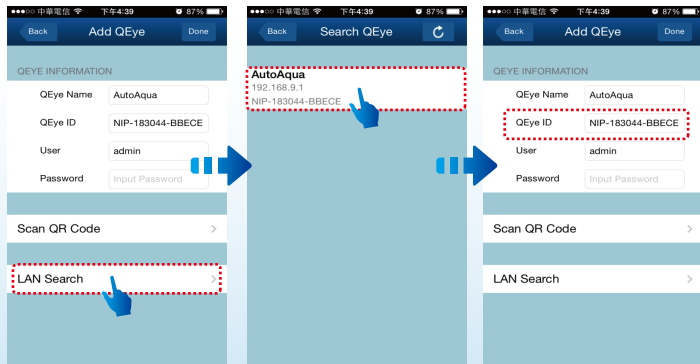
User:admin
Password:
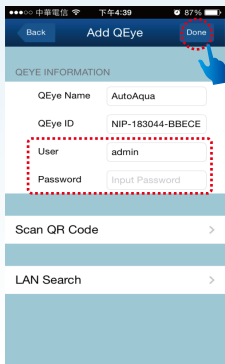ID:EYE-000020-ECCEA

I. Key in QEye ID.

II. Scan QR Code (Generate QEye ID Automatically).

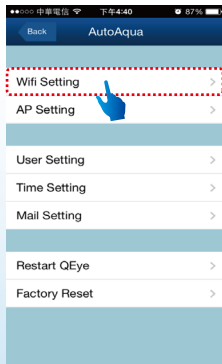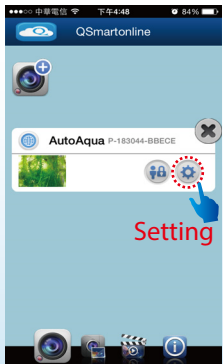### III. LAN Search (Recommendation).

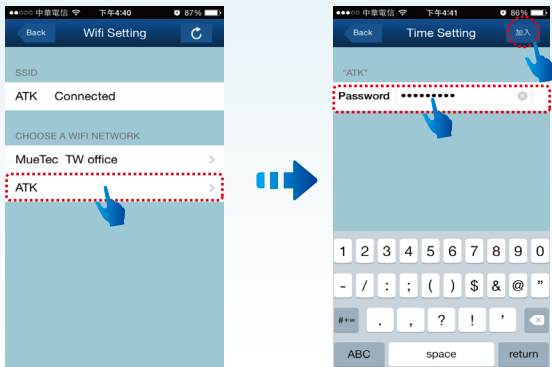8-4. Use default User Name and password to click done.

 (User : admin, Password:)

9. **Set up IP Mode from AP Mode.**
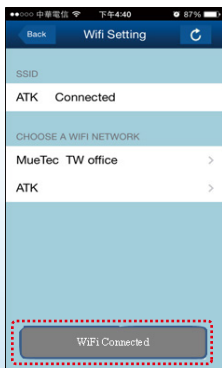
   9-1. Click setting and then go to WiFi setting.

9-2. Choose your WiFi Router, key in password and click done.

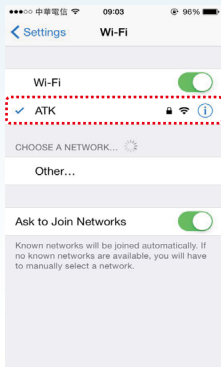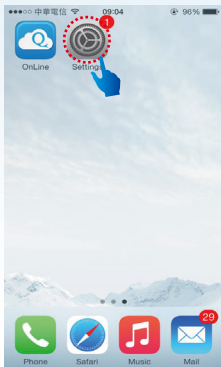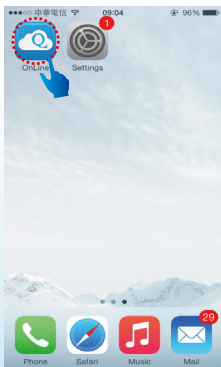9-3. WiFi setting is done.

Shows WiFi connected successfully.
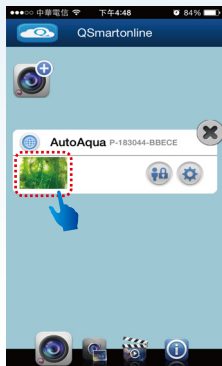(Please wait for a few minutes).

9-4. Go back to setting and choose your WiFi again.

(Choosing 3G or 4G / LTE are ok as well).

10. **Wait for one minute and click QSmart APP.**

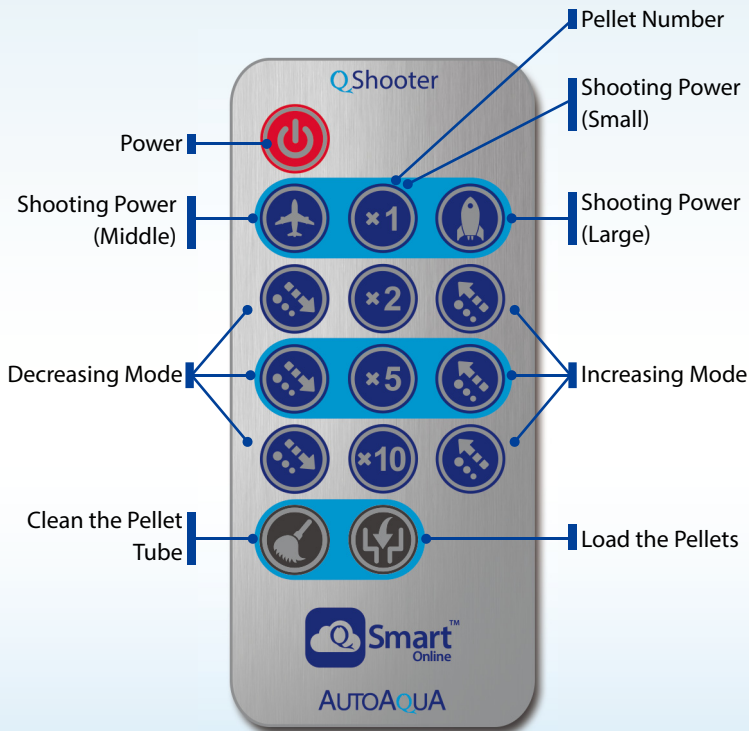11. **Click the picture to enjoy viewing & feeding your fish online.**

*Remark

🌐 Blue light : QEye connects successfully.

🌐 Red Light : QEye does not connect successfully.

🌐 Gray Light : QEye is not online..

Pellet Number

Shooting Power (Small)

Power

Shooting Power (Middle)

Shooting Power (Large)

Decreasing Mode

Increasing Mode

Clean the Pellet Tube

Load the Pellets

Notice

1. Please read the manual in detail before installation.

2. Keep the controller dry and away from water to prevent breakdown or any security issue.

3. 3.Keep all magnetic materials off the sensor to avoid mistaken reaction and watch out when using the magnet.

4. Please add pellets in mounted QShooter directly and do not take it down ; Please put QShooter horizontally.


Correct   Wrong

5. Please keep the pellet container empty before moving QShooter and follow the direction as bellow to pour the pellets out.


Correct   Wrong

QEye

1. Power Input : 100-240VAC 50/60HZ

2. Power Output (USB) : 5V   2000mA

3. Power Consumption : 5W (Max.)

4. Size : 60mm x 75mm x 86mm
         (Width*Height*Depth)

5. Wet Side Size : 30mm x 16 mm
                  (Diameter*Depth)

6. Max Tank Thickness : 0.75 inches (19.0mm)

QShooter

1. Power Input : 100-240VAC 50/60HZ

2. Power Output (USB) : 5V   2000mA

3. Power Consumption : 5W (Max.)

4. Size : 78mm x 94mm x 84mm
         (Width*Height*Depth)

5. Max Wall Thickness : 1.0 inch inch (25.4mm)

qsmartonline.com

**More Informaiton
For Instructions**

AUTOAQUA

AUTOAQUA Technologies Co., Ltd.

7F-7.,NO.229,Fuxing 2nd Rd.,Zhubei City, Hsinchu County,Taiwan

TEL:+886-3-658-6223 / FAX:+886-3-658-6702

E-mail : service@autoaqua.com.tw

www.autoaqua.com.tw

Made in China