User's Guide

for

GPS tracker watch ETK-GPS001

Dear Sir/Madam :

Sincerely thank you for purchasing the Children Positioning Watch which features locating the child. The main functions of this type of watch are listed as below:

Emergency calling: Child can call for help by pressing SOS button in case of emergency;

Precise localization: Guardian can obtain the child's accurate location at any moment;

Remote voice monitoring: Guardian can listen to the surrounding voices around the child;

Remote alarm clock: Alarm clock can be set to warn the child to do something in his/her power;

Electronic fence: Fence can be set to alarm the Guardian whenever the child enters or leaves the fence;

Bi-directional calling: Child can call his/her friends while the Guardian can call the child at any time.

In order to better use the watch, please read the following instructions carefully and operate the watch according to the following instructions and suggestions.

User's Guide for GPS tracker watch

Safety Warning

- Use only the original accessories recommended by the manufacturer. Different models may result in danger and lead this product with all relevant licenses invalid.

- Do not attempt to repair it yourself, for the modification to the product will affect the security of the product, and be careful of danger.

- Avoid using the watch in the following environment: places with excessive temperature fluctuations, places with the temperature higher than 60°C or lower than 0°C, places with high pressure, dust or electrostatic interference.

- Avoid touching with corrosive cleaning agents and chemicals, please use a soft, dry cloth to clean the watch.

- It is prohibited to use the watch at the gas stations, restricted chemical plants or near the oil depots, for the use of the watch in the above environment may raise the risk of explosion.

- When you are travelling on the airplane, please take care to place the watch in the baggage, and try not to place it in the handbag while going through the checkpoint, and the manufacturer is not responsible for the damage caused by such radiation.

Instructions on batteries & handling batteries

- Batteries are not allowed to be thrown into the trashcan. As a consumer, you are legally required to handle and collect the used batteries properly.
- Note that the battery positive and negative direction, if opposite, it may cause damage to the device.
- It is prohibited to try to open the batteries or throw batteries into fire.
- The liquid flowing from the batteries is very dangerous, and one cannot touch it unless wearing suitable gloves.
- Never place the battery in the hands of children.
- Remove the battery from the device if you do not use it for a long time.

Product Details

Speaker

Reset button

Charging interface

SOS dialing/Answer

MIC

Display screen

Speaker: Do not cover it when calling

MIC: Do not cover it when calling

Charging interface: Connect the watch with power input to charge it

Reset button: The watch can be reset by pressing the pinhole with fine needle in case of a dead halt

SOS dialing/answer: Press the button for 3 seconds to dial out an emergency number in case of emergency, and short press the button to answer the incoming call, while short press the button to hang up under the condition of normal conversation.

Tips: The watch will not be shutdown unless the battery is removed from it.

User's Guide for GPS tracker watch

Operation Guide

Plug-in card: Open the rear cover of the watch and place SIM/UIM card into the slot as per the direction shown in the slot and find the golden contact and place the battery into place, finally put on the rear cover.

Power on: Press SOS button for 3 seconds to start up the watch. (The mobile phone will not read its IMEI/SN unless the card has been plugged into the watch)

Install APP: Please install the watch APP on your mobile phone before using the watch.

- Scan QR code with your mobile phone on the back of packing box to download the watch APP; you can also enter http://dl.vmall.com/c0317gptlf   to obtain the watch APP.

- After installation, please create a new account and enter basic information when prompted, and then you'll get into the sign in interface to enter the phone number and password that you have entered while registering, and finally click "sign in" to enter.

Add Devices

Click " " on device interface or swipe left on the screen to enter management interface, and then click "Add" on the top right of the screen, finally scan the bar code or enter the device number to add the device (The bar code stays on the back of the packing box, while the number under the bar code is the device number).
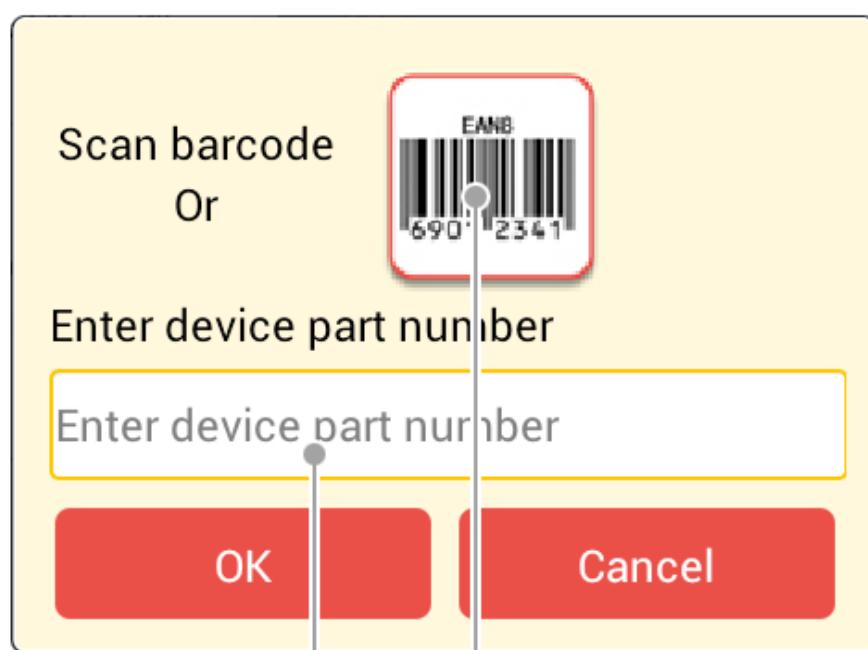
Click here to scan bar code

Click here to enter device part number

Manage Devices

Long press certain device on the management interface to delete the device; click device number to enter Modify interface on which basic information, emergency numbers, monitor numbers, friends numbers, alarm clock can be set and the password of the device can be altered.
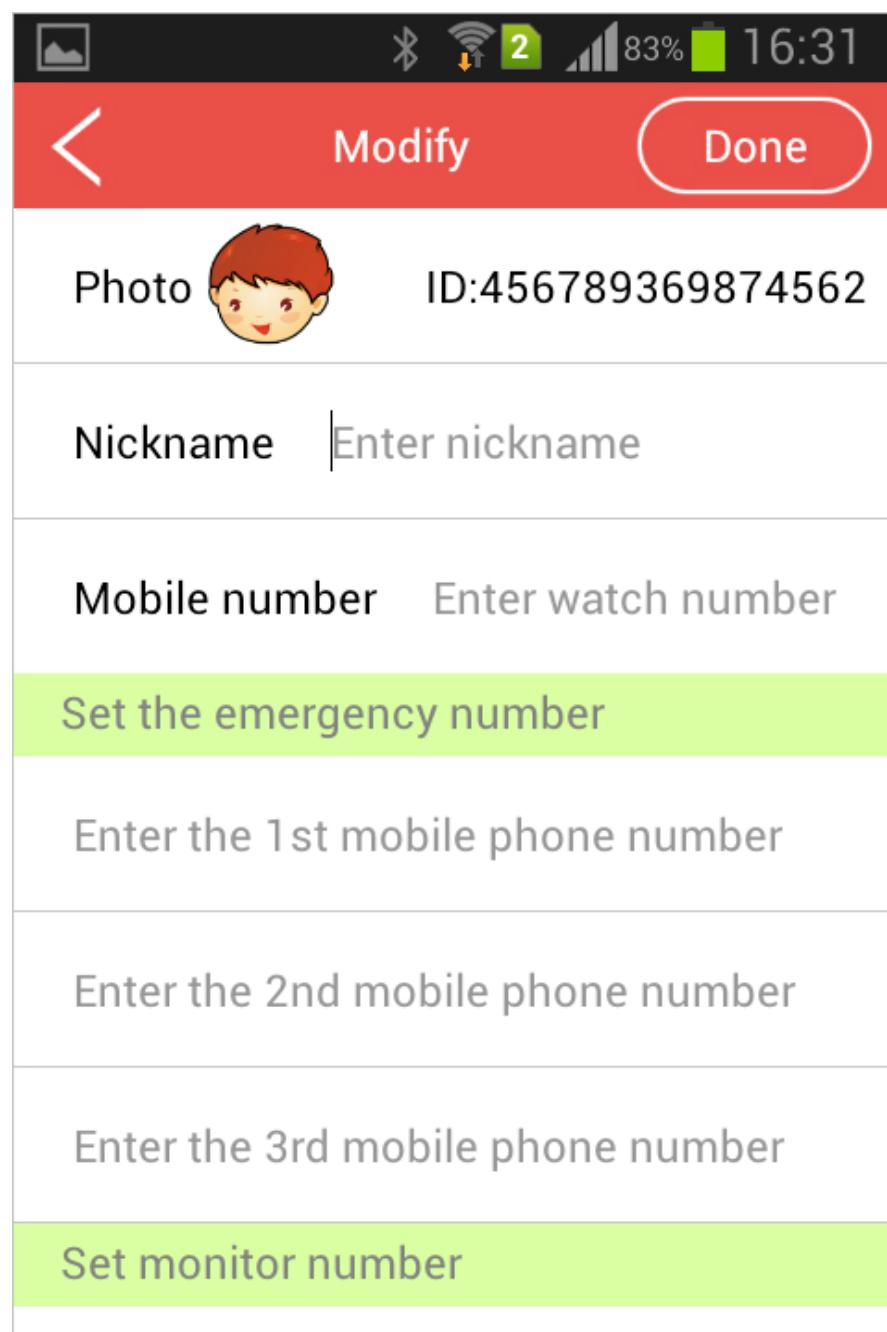
Emergency numbers: Three emergency numbers can be set to which the child can call for help by pressing SOS button for 3 seconds in case of emergency, and the watch will dial these 3 numbers for twice (the watch will stop dialing automatically once the call has been connected).

Monitor numbers: 2 monitor numbers can be set by which commands can be given from the phone to monitor the surrounding voices around the child.

Friends numbers: 5 numbers of friends can be set to which the child can call: list of friends numbers will be displayed by short pressing SOS button on home interface, and press it again to select one number from the list, and then after selection, long press SOS button to dial out.

Alarm clock: Set alarm clock for the watch from the mobile phone device and alarm will be received by the watch at the appointed time.

Call

The watch is designed for children only, thus through the watch, only the emergency numbers, friends numbers and monitor numbers that you have set previously can be connected for conversation; no other numbers can get communication with the watch.

- The watch end can only call the emergency numbers and friends number that you have set;

- When there is any call from the emergency numbers or friends' number, the calling interface will display on the watch and the child can press SOS button to answer the call;

- The calling interface will not be displayed on the watch when there is any call from monitor numbers, and the watch will answer the call automatically and the call will not be hanged up by pressing SOS button.

- The watch will not be connected when the watch is answering a call.

Tips: The option of displaying caller ID must be opened up for the SIM/UIM card inserted in the watch.

Devices

You will enter the Device list by default after logging in APP, and click certain device to enter Sitemap; on the Sitemap, positioning, monitoring, checking of historical tracks and setting of fences will be realized.

GPS indicates satellite positioning；LBS+ indicates cellular and WIFI positioning.

Positioning: At normal times, the watch will operate under normal work mode and report the current location at normal intervals. When the watch is required to operate under high-frequency positioning mode, please click "position" button, and then the watch will get positioning and report the current location at a high frequency. Click " ≪ " or " ≫ " to check historical tracks.

Monitoring: Monitoring the surrounding voices around the child, and click Monitor on the Sitemap to give the command of monitoring the surroundings.

Trace: Select the date to check the historical tracks, and date will be selected by rolling up and down.

Fence: Set a fence for the child, and once the child enters or leaves the fence region, the watch will sound an alarm to warn the child and push notifications on the phone will also alarm you.

- Click "Add" after clicking Fence and enter "Fence Name" and select "Notification Type", and then drag the region to be set within the blue circle, after that, the region within a 2km radius from the center will be the preset fence region, and click the "Done" on the top right of the screen to complete after setting.

- If you have set several fences, the fence list will be shown on the electronic fence interface, and the fence can be modified by clicking certain fence; and also the fence can be deleted by long press.

Notification

This function is designed for you to view the monitoring logs on the phone. Click " " on the Device interface or swipe right on the screen and click "Notification" to view the logs. In cases that the watch enters or leaves the fence, receives message, dials emergency numbers, your phone will receive the notification message.

Settings

Edit the basic information on the phone, for example, phone, name, notification settings & notification type and selection of Sitemap, etc.

About

View the version information of APP software.

Scan QR code to download APP

There will be continuous upgrading and updating to this product, thus the content will be different with the final operating steps which are subject to change without prior notice; the illustrations in the User's Guide are only for your reference, please in kind prevail; the manufacturer reserves the right of final explanation of the User's Guide.

User's Guide for GPS tracker watch

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

 --Reorient or relocate the receiving antenna.

 --Increase the separation between the equipment and receiver.

 --Connect the equipment into an outlet on a circuit

  different from that to which the receiver is connected.

User's Guide for GPS tracker watch

--Consult the dealer or an experienced radio/
TV technician for help.

This device complies with Part 15 of FCC Rules. Operation is subject to the following two conditions: (1)This device may not cause harmful interference, and (2)This device must accept any interference received, including interference that may cause undesired operation.

Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. such modifications could void the user's authority to operate this equipment.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Specific Absorption Rate (SAR) information

This watch meets the government's requirements for exposure to radio waves. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons regardless of age or health.

The SAR limit of USA (FCC) is 1.6 W/kg averaged over one gram of tissue for body, and 4 W/kg averaged over ten gram of tissue.

Device types: ETK-GPS001 (FCC ID:2AEZ6ETK-GPS001) has also been tested against this SAR limit. SAR information on this and other pad can be viewed on-line at http://www.fcc.gov/oet/ea/fccid/. Please use the device FCC ID number for search. This device was tested simulation typical 0mm wear on wrist and 10 mm to mouth.

To maintain compliance with FCC RF exposure requirements, use accessories should maintain a separation distance between the user's bodies mentioned above.

This device is restricted to worn on the wrist operations.

User's Guide for GPS tracker watch