

Note: Below data applicable for SNS210.

Electrical Information	
Input Voltage	Powered by SR driver low-voltage interface
Current Consumption	11mA
Nominal Power Consumption	130mW
Standby Power	< 1 W on luminaire level, including driver standby power
Occupancy Sensing	
Type	Passive infrared (PIR)
Enable/Disable	Default enabled
Detection	Off/Auto-on; Red LED indicates "on"
Eco On Level	0-100%
Hold Time	0.5-60 minutes
Viewing Angle	X=72°, Y = 86° (See detection pattern)
Background Light Level	0-100%
Prolong Time	0 minutes - infinity
Grace Fading	0-25 sec
Response Time/Fading to Switch On/Off	0.75Sec
Daylight Sensing	
Enable/Disable	Default enabled
Auto-calibration	Upon power-up
Viewing Angle	40° (half value sensitivity); 2% cut-off point at 75°
Task Tuning	
Full Light Setting	0-100%
Environment & Approbation	
Operating Ambient Temperature Range	0°C to 55°C
Operating Humidity	0-95% non condensing
Storage Temperature	-25°C to 85°C
Storage Humidity	0-95% non condensing
Max Case Temperature (Tcase)	55°C
Agency Approbations	UL, CSA, FCC; Tested and approved for use in plenums
Certification	California Title 20
Limited Warranty	5 years
Digital Interface	Xitanium SR
Other	
Status Indicators	Red, Yellow, Yellow LED on: Vacancy & Sensor is functional; Red LED on: Motion is detected
No. Drivers per Sensor	Four (max)
Field Configuration	Parameters set via MasterConnect app for Android and iPhone phones using Bluetooth Low Energy (Bluetooth LE).

Operation and Configuration via Mobile App

EasySense operates immediately upon installation and energization without further commissioning. If changes from default settings are desired, EasySense (SNS210) can be configured via MasterConnect app through Bluetooth LE. For a complete description of the features and default settings—as well as details on the app—refer to www.philips.com/easysense.

FCC and IC Statement

This device complies with part 15 of the FCC rules for the United States and Industry Canada (IC) license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by Signify could void the user's authority to operate this equipment. This product is intended for commercial use only.

This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.

Déclaration De Conformité À La Fcc/Ic

Ce dispositif est conforme à la partie 15 des règles de la Federal Communications Commission (FCC) des États-Unis et d'Industrie Canada (IC) exempts de licence RSS norme(s). Son fonctionnement est assujéti aux deux conditions suivantes : (1) Ce dispositif ne doit pas provoquer de brouillage préjudiciable, et (2) il doit accepter tout brouillage reçu, y compris le brouillage pouvant entraîner un mauvais fonctionnement. Tous les changements ou modifications non expressément approuvés par Signify, sont susceptibles d'annuler le droit de l'utilisateur à se servir de cet équipement. Ce produit est exclusivement destiné à un usage commercial.

Cet équipement doit être installé et utilisé avec une distance minimale de 20 cm entre le radiateur et votre corps.

© 2019 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify, Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.
philips.com/easysense



Signify North America Corporation
200 Franklin Square Drive
Somerset, NJ 08873
Tel. 855-486-2216

Signify Canada Ltd.
281 Hillmount Rd,
Markham, ON, Canada L6C 2S3
Tel. 800-668-9008



Philips EasySense Quick Installation Guide

Sensor Part Number


Commercial Product Name	Order Code
EasySense Fixture-Mount Sensor	SNS210

LED Drivers

Driver Model Number	Description
XI040C110V054VPT2	Xitanium 40W 0.1-1.1A 27-54V 120-277V SR
XI075C200V054VPT1	Xitanium 75W 0.1-2.0A 27-54V 120-277V SR

Specifications available at www.philips.com/XitaniumSR.

Wiring Diagram*

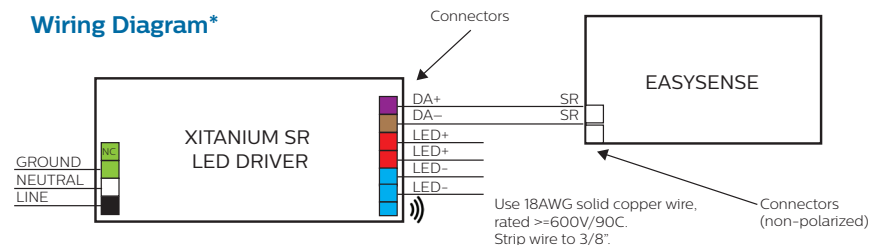


Connection	Color
Green	Ground
White	Neutral
Black	Line

Connection	Color
Purple	DA+
Brown	DA-
Red	LED+
Blue	LED-


* Wiring diagram for 40W driver shown. Other drivers have different wiring diagrams. Consult datasheet for driver for applicable wiring diagram.

Sensor Dimensions (in/mm)

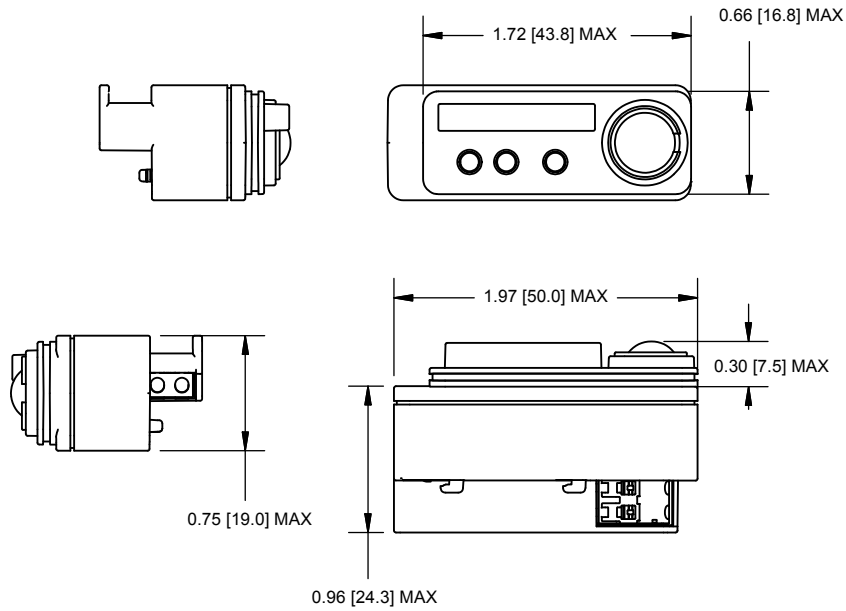


Mounting Dimensions (in/mm)

Mounting in U-shaped slot in sheet metal (max thickness 1 mm)

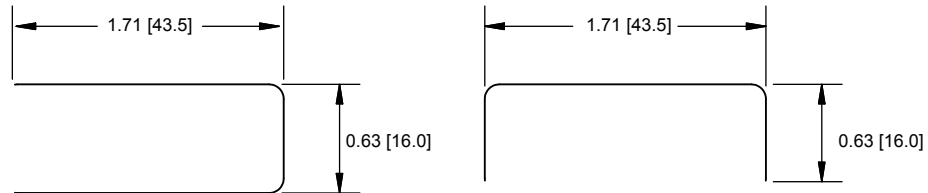


Mounting in cut-out in sheet metal (thickness 0.7 mm to 1.0 mm)

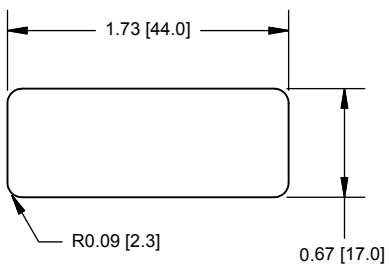


Note: Consult factory for accessory mounting ring to secure sensor to cut-out.


Fixture with EasySense installed

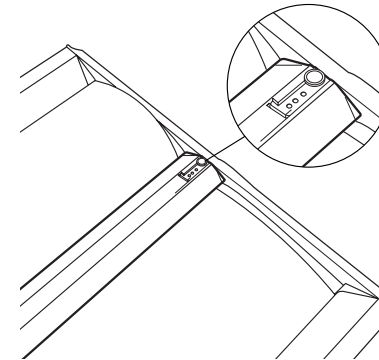

Mounting in a slot

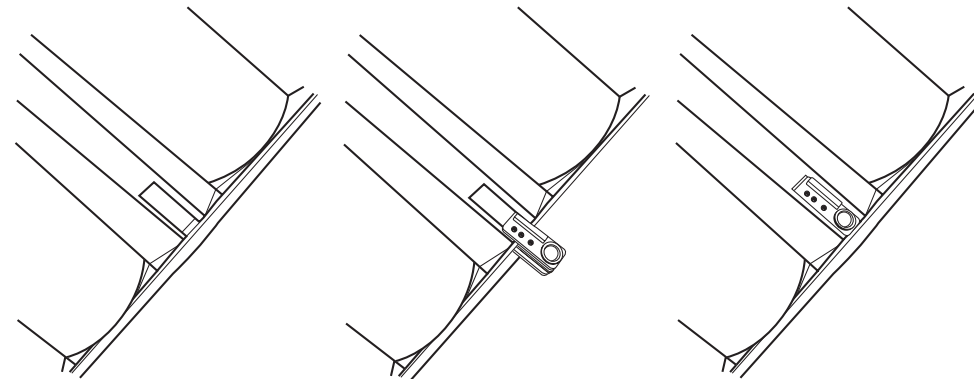

Mounting in a cut-out with mounting ring

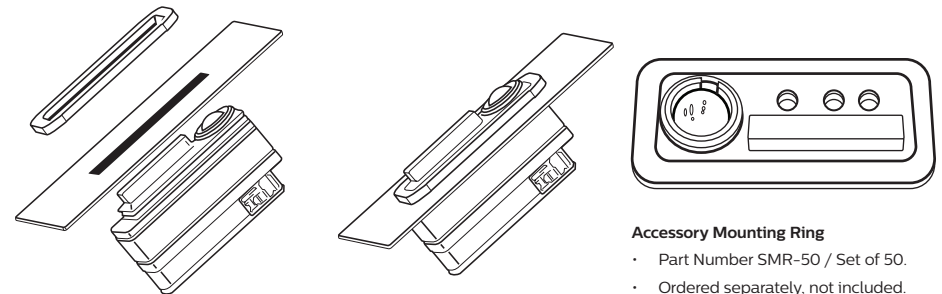

Accessory Mounting Ring

- Part Number SMR-50 / Set of 50.
- Ordered separately, not included.

Accessory Mounting Bracket

- Part Number SMB-50 / Set of 50.
- Ordered separately, not included.