



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For
Body worn, Cellular and GNSS enabled MPERS

**FCC ID: 2AGPI-EC21A
Model Names: MA01 and ANH0318-01**

**Report Number: 12040492-S1V3
Issue Date: 6/28/2018**

Prepared for
**Anelto Inc.
6270 Morningstar Drive
Suite 100
The Colony, TX 75056**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

| Rev. | Date | Revisions | Revised By |
|------|-----------|--|-------------|
| V1 | 6/19/2018 | Initial Issue | -- |
| V2 | 6/26/2018 | Section 1 – Corrected equipment class | Dave Weaver |
| V3 | 6/28/2018 | Section 6.3 – Corrected 'Appendix 1' to 'Appendix A' | Dave Weaver |
| | | | |

Table of Contents

| | | |
|------------|--|-----------|
| 1. | Attestation of Test Results | 5 |
| 2. | Test Specification, Methods and Procedures..... | 6 |
| 3. | Facilities and Accreditation | 6 |
| 4. | SAR Measurement System & Test Equipment | 7 |
| 4.1. | <i>SAR Measurement System.....</i> | 7 |
| 4.2. | <i>SAR Scan Procedures.....</i> | 8 |
| 4.3. | <i>Test Equipment.....</i> | 10 |
| 5. | Measurement Uncertainty..... | 10 |
| 6. | Device Under Test (DUT) Information | 11 |
| 6.1. | <i>DUT Description</i> | 11 |
| 6.2. | <i>Wireless Technologies.....</i> | 11 |
| 6.3. | <i>Test Rational</i> | 11 |
| 6.4. | <i>General LTE SAR Test and Reporting Considerations.....</i> | 12 |
| 7. | RF Exposure Conditions (Test Configurations)..... | 13 |
| 8. | Dielectric Property Measurements & System Check | 14 |
| 8.1. | <i>Dielectric Property Measurements</i> | 14 |
| 8.2. | <i>System Check.....</i> | 16 |
| 9. | Conducted Output Power Measurements..... | 17 |
| 9.1. | <i>W-CDMA</i> | 17 |
| 9.2. | <i>LTE.....</i> | 23 |
| 10. | Measured and Reported (Scaled) SAR Results..... | 30 |
| 10.2. | <i>W-CDMA Band II.....</i> | 31 |
| 10.3. | <i>W-CDMA Band IV</i> | 31 |
| 10.4. | <i>W-CDMA Band V</i> | 31 |
| 10.5. | <i>LTE Band 2 (20MHz Bandwidth)</i> | 32 |
| 10.6. | <i>LTE Band 4 (20MHz Bandwidth)</i> | 32 |
| 10.7. | <i>LTE Band 12 (10MHz Bandwidth)</i> | 32 |
| 11. | SAR Measurement Variability..... | 33 |
| 12. | Simultaneous Transmission SAR Analysis..... | 33 |
| | Appendixes | 34 |
| | <i>12040492-S1V1 Appendix A: SAR Setup Photos.....</i> | 34 |
| | <i>12040492-S1V1 Appendix B: SAR System Check Plots.....</i> | 34 |

12040492-S1V1 Appendix C: Highest SAR Test Plots 34

12040492-S1V1 Appendix D: SAR Liquid Tissue Ingredients..... 34

12040492-S1V1 Appendix E: SAR Probe Calibration Certificate 34



12040492-S1V1 Appendix F: SAR Dipole Calibration Certificates 34

1. Attestation of Test Results

| | | | | |
|---|---|-----|--|-----|
| Applicant Name | Anelto Inc. | | | |
| FCC ID | 2AGPI-EC21A | | | |
| Model Name | MA01 and ANH0318-01 | | | |
| Applicable Standards | FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013 | | | |
| Exposure Category | SAR Limits (W/Kg) | | | |
| | Peak spatial-average(1g of tissue) | | Extremities (hands, wrists, ankles, etc.) (10g of tissue) | |
| General population / Uncontrolled exposure | 1.6 | | 4 | |
| RF Exposure Conditions | Equipment Class - Highest Reported SAR (W/kg) | | | |
| | PCB | DTS | NII | DSS |
| Next to Mouth | 0.376 | N/A | N/A | N/A |
| Body-worn | 1.393 | | | |
| Simultaneous TX | N/A | | | |
| Date Tested | 5/14/2018 to 5/19/2018 | | | |
| Test Results | Pass | | | |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.

| | |
|--|--|
| Approved & Released By:  | Prepared By:  |
| Dave Weaver Operations Leader UL Verification Services Inc. | Coltyce Sanders Test Engineer UL Verification Services Inc. |

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure KDB procedures:

- 447498 D01 General RF Exposure Guidance v06
- 447498 D03 Supplement C Cross-Reference v01
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


| 47173 Benicia Street | 47266 Benicia Street |
|----------------------|----------------------|
| SAR Lab A | SAR Lab 1 |
| SAR Lab B | SAR Lab 2 |
| SAR Lab C | SAR Lab 3 |
| SAR Lab D | SAR Lab 4 |
| SAR Lab E | |
| SAR Lab F | |
| SAR Lab G | |
| SAR Lab H | |

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

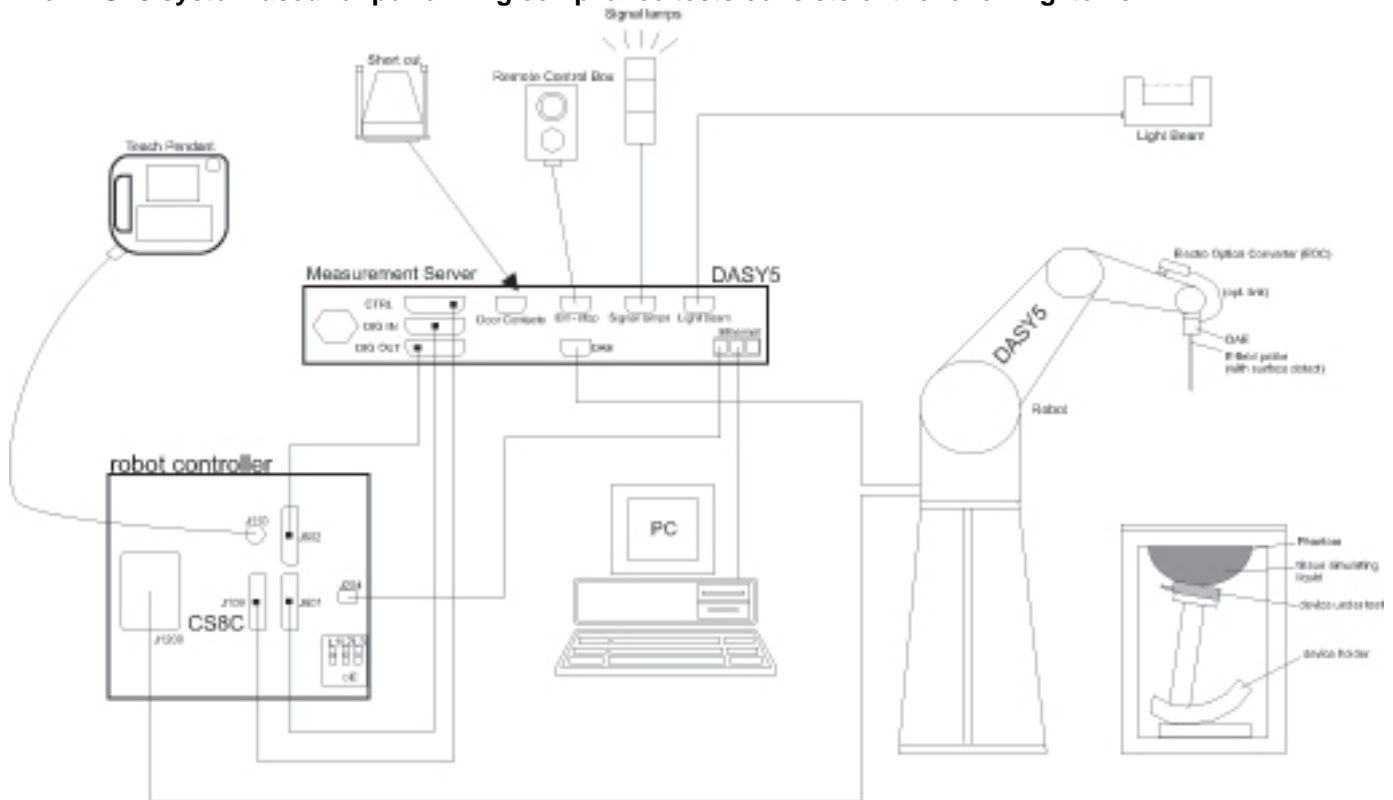

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

| | ≤ 3 GHz | > 3 GHz |
|--|--|--|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | 5 ± 1 mm | $\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location | $30^\circ \pm 1^\circ$ | $20^\circ \pm 1^\circ$ |
| Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$ | ≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm | $3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm |
| | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device. | |

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

| | | | ≤ 3 GHz | > 3 GHz |
|---|---|---|--|---|
| Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$ | | | ≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm* | 3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm* |
| Maximum zoom scan spatial resolution, normal to phantom surface | uniform grid: $\Delta z_{\text{Zoom}}(n)$ | | ≤ 5 mm | 3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm |
| | graded grid | $\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface | ≤ 4 mm | 3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm |
| | | $\Delta z_{\text{Zoom}}(n>1)$: between subsequent points | $\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$ | |
| Minimum zoom scan volume | x, y, z | | ≥ 30 mm | 3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm |
| Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. | | | | |
| * When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. | | | | |

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

| Name of Equipment | Manufacturer | Type/Model | Serial No. | Cal. Due Date |
|----------------------|-----------------------------------|---------------|---------------|---------------|
| Network Analyzer | Agilent | 8753ES | MY40001647 | 9/15/2018 |
| Dielectric Probe kit | SPEAG | DAK-3.5 | 1087 | 11/14/2018 |
| Shorting block | SPEAG | DAK-3.5 Short | SM DAK 200 BA | 11/14/2018 |
| Thermometer | Traceable Calibration Control Co. | 4242 | 122529162 | 12/8/2018 |

System Check

| Name of Equipment | Manufacturer | Type/Model | Serial No. | Cal. Due Date |
|------------------------------|--------------|------------------------|-------------|---------------|
| Synthesized Signal Generator | Agilent | N5181A | MY50140610 | 5/31/2018 |
| Power Meter | Agilent | N1912A | MY5519600 | 7/14/2018 |
| Power Sensor | Agilent | N1912A | MY52260009 | 1/8/2019 |
| Power Sensor | Agilent | N1912A | MY53020038 | 4/23/2019 |
| Amplifier | MITEQ | AMF-4D-00400600-50-30P | 1795093 | N/A |
| Directional coupler | Verlatone | C8060-102 | 2149 | N/A |
| DC Power Supply | HP | 6296A | 2841A-05955 | N/A |

Lab Equipment

| Name of Equipment | Manufacturer | Type/Model | Serial No. | Cal. Due Date |
|--|--------------|------------|------------|---------------|
| E-Field Probe (SAR Lab G) | SPEAG | EX3DV4 | 3871 | 8/23/2018 |
| Data Acquisition Electronics (SAR Lab G) | SPEAG | DAE4 | 1359 | 2/9/2019 |
| System Validation Dipole | SPEAG | D750V3 | 1019 | 3/16/2019 |
| System Validation Dipole | SPEAG | D835V2 | 4d142 | 10/12/2018 |
| System Validation Dipole | SPEAG | D1750V2 | 1077 | 10/5/2018 |
| System Validation Dipole | SPEAG | D1900V2 | 5d163 | 10/5/2018 |

Other

| Name of Equipment | Manufacturer | Type/Model | T Number | Serial No. | Cal. Due Date |
|------------------------|--------------|------------|----------|------------|---------------|
| Base Station Simulator | R & S | CMW500 | T1871 | 165411-Ci | 2/19/2019 |

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

| | | |
|---------------------------|--|--|
| Device Dimension | MA01 | ANH0318-01 |
| | (Length x Width x Height): 74 mm x 47.5 mm x 21.5 mm | (Length x Width x Height): 73 mm x 47 mm x 18 mm |
| Back Cover | Normal Battery Cover | |
| Battery Options | <input checked="" type="checkbox"/> Standard – Lithium-polymer battery, Rating 3.7Vdc, 2.8Wh | |
| Wireless Router (Hotspot) | Not Supported | |
| Wi-Fi Direct | Not Supported | |
| Test sample information | S/N | IMEI |
| | SMS000106 | 861108033412825 |
| | Photon | N/A |
| | | Notes |
| | | Conducted Unit |
| | | Radiated Unit |
| Hardware Version | Rev 2 | |
| Software Version | V5.10 | |

6.2. Wireless Technologies

| Wireless technologies | Frequency bands | Operating Mode | Duty Cycle used for SAR testing |
|--|---|--|---------------------------------|
| W-CDMA (UMTS) | Band II Band IV Band V | UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5) HSUPA (Rel. 6) DC-HSDPA (Rel. 9) | 100% |
| LTE | FDD Band 2 FDD Band 4 FDD Band 12 | QPSK UE Category 1 16QAM UE Category 1 Rel. 10 Does not support Carrier Aggregation (CA) | 100% (FDD) |
| Does this device support SV-LTE (1xRTT-LTE)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | | | |

6.3. Test Rational

The DUT is available in two models: MA01 and ANH0318-01. Each model uses the same PCB assembly and antenna. The only difference between the models is the plastic enclosure. The overall dimensions of ANH0318-01 are smaller than MA01. The MA01 is slightly narrower at one end but this is at the opposite end to the antenna location. SAR testing was performed only on ANH0318-01 as this was deemed to be the worst case scenario. Refer to Appendix A for images of the devices.

6.4. General LTE SAR Test and Reporting Considerations

| Item | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--|----------------------------------|------------------|------------------|------------------|------------------|------------------|------------|---|--|--|--|--|--|----------|---------|---------|-------|--------|--------|--------|------|-----|-----|-----|------|------|------|-----|--------|-----|-----|-----|------|------|------|-----|--------|-----|-----|-----|------|------|------|-----|--------|-----|-----|-----|------|------|------|-----|--------|-----|-----|-----|------|------|------|-----|---------|-----|--|--|--|--|--|-----|
| Frequency range, Channel Bandwidth, Numbers and Frequencies | Band 2 | Frequency range: 1850 - 1910 MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Channel Bandwidth | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 20 MHz | 15 MHz | 10 MHz | 5 MHz | 3 MHz | 1.4 MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Low | 18700 /1860 | 18675/ 1857.5 | 18650/ 1855 | 18625/ 1852.5 | 18615/ 1851.5 | 18607/ 1850.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Mid | 18900/ 1880 | 18900/ 1880 | 18900/ 1880 | 18900/ 1880 | 18900/ 1880 | 18900/ 1880 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | High | 19100/ 1900 | 19125/ 1902.5 | 19150/ 1905 | 19175/ 1907.5 | 19185/ 1908.5 | 19193/ 1909.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Band 4 | Frequency range: 1710 - 1755 MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Channel Bandwidth | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 20 MHz | 15 MHz | 10 MHz | 5 MHz | 3 MHz | 1.4 MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Low | 20050/ 1720 | 20025/ 1717.5 | 20000/ 1715 | 19975/ 1712.5 | 19965/ 1711.5 | 19957/ 1710.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Mid | 20175/ 1732.5 | 20175/ 1732.5 | 20175/ 1732.5 | 20175/ 1732.5 | 20175/ 1732.5 | 20175/ 1732.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | High | 20300/ 1745 | 20325/ 1747.5 | 20350/ 1750 | 20375/ 1752.5 | 20385/ 1753.5 | 20393/ 1754.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Band 12 | Frequency range: 699 – 716 MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Channel Bandwidth | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 20 MHz | 15 MHz | 10 MHz | 5 MHz | 3 MHz | 1.4 MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Low | | | 23060/ 704 | 23035/ 701.5 | 23025/ 700.5 | 23017/ 699.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Mid | | | 23095/ 707.5 | 23095/ 707.5 | 23095/ 707.5 | 23095/ 707.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | High | | | 23130/ 711 | 23155/ 713.5 | 23165/ 714.5 | 23173/ 715.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LTE transmitter and antenna implementation | Refer to Appendix A. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Maximum power reduction (MPR) | <p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table> <tr> <th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr> <tr> <th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr> <tr> <td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr> <tr> <td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr> <tr> <td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr> <tr> <td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr> <tr> <td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr> <tr> <td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr> </table> <p>MPR Built-in by design The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values. A-MPR (additional MPR) was disabled during SAR testing</p> | | | | | | | Modulation | Channel bandwidth / Transmission bandwidth (N _{RB}) | | | | | | MPR (dB) | 1.4 MHz | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz | QPSK | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 1 | 16 QAM | ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 1 | 16 QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 2 | 64 QAM | ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 2 | 64 QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 3 | 256 QAM | ≥ 1 | | | | | | ≤ 5 |
| Modulation | Channel bandwidth / Transmission bandwidth (N _{RB}) | | | | | | MPR (dB) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1.4 MHz | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| QPSK | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16 QAM | ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16 QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 64 QAM | ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 64 QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 256 QAM | ≥ 1 | | | | | | ≤ 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Power reduction | No | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Spectrum plots for RB configurations | A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Notes:

- SAR Testing for LTE was performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
- LTE QPSK configuration has the highest maximum average output power per 3GPP standard.

7. RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna location.

| Wireless technologies | RF Exposure Conditions | DUT-to-User Separation | Test Position | Antenna-to-edge/surface | SAR Required | Note |
|-----------------------|------------------------|------------------------|-----------------|-------------------------|--------------|------|
| WWAN | Next to Mouth | 10 mm | Front | N/A | Yes | |
| | Body-worn | 0 mm | Rear | N/A | Yes | |
| | | | Front | N/A | Yes | |
| | | | Edge 1 (Top) | > 25 mm | No | 1 |
| | | | Edge 2 (Right) | < 25 mm | Yes | |
| | | | Edge 3 (Bottom) | < 25 mm | Yes | |
| | | | Edge 4 (Left) | < 25 mm | Yes | |

Notes:

1. SAR is not required per KDB 447498 D01 §4.2.2 c).

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies ≤ 3 GHz.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

| Target Frequency (MHz) | Head | | Body | |
|------------------------|--------------|----------------|--------------|----------------|
| | ϵ_r | σ (S/m) | ϵ_r | σ (S/m) |
| 150 | 52.3 | 0.76 | 61.9 | 0.80 |
| 300 | 45.3 | 0.87 | 58.2 | 0.92 |
| 450 | 43.5 | 0.87 | 56.7 | 0.94 |
| 835 | 41.5 | 0.90 | 55.2 | 0.97 |
| 900 | 41.5 | 0.97 | 55.0 | 1.05 |
| 915 | 41.5 | 0.98 | 55.0 | 1.06 |
| 1450 | 40.5 | 1.20 | 54.0 | 1.30 |
| 1610 | 40.3 | 1.29 | 53.8 | 1.40 |
| 1800 – 2000 | 40.0 | 1.40 | 53.3 | 1.52 |
| 2450 | 39.2 | 1.80 | 52.7 | 1.95 |
| 3000 | 38.5 | 2.40 | 52.0 | 2.73 |
| 5000 | 36.2 | 4.45 | 49.3 | 5.07 |
| 5100 | 36.1 | 4.55 | 49.1 | 5.18 |
| 5200 | 36.0 | 4.66 | 49.0 | 5.30 |
| 5300 | 35.9 | 4.76 | 48.9 | 5.42 |
| 5400 | 35.8 | 4.86 | 48.7 | 5.53 |
| 5500 | 35.6 | 4.96 | 48.6 | 5.65 |
| 5600 | 35.5 | 5.07 | 48.5 | 5.77 |
| 5700 | 35.4 | 5.17 | 48.3 | 5.88 |
| 5800 | 35.3 | 5.27 | 48.2 | 6.00 |

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:

| SAR Lab | Date | Band (MHz) | Tissue Type | Frequency (MHz) | Relative Permittivity (ϵ_r) | | | Conductivity (σ) | | |
|---------|-----------|------------|-------------|-----------------|--|--------|-----------|---------------------------|--------|-----------|
| | | | | | Measured | Target | Delta (%) | Measured | Target | Delta (%) |
| G | 5/14/2018 | 1900 | Head | 1900 | 40.44 | 40.00 | 1.10 | 1.45 | 1.40 | 3.79 |
| | | | | 1710 | 40.73 | 40.15 | 1.45 | 1.33 | 1.35 | -1.59 |
| | | | | 1920 | 40.42 | 40.00 | 1.05 | 1.46 | 1.40 | 4.43 |
| G | 5/14/2018 | 1900 | Body | 1900 | 53.63 | 53.30 | 0.62 | 1.57 | 1.52 | 3.42 |
| | | | | 1710 | 53.79 | 53.54 | 0.46 | 1.42 | 1.46 | -2.57 |
| | | | | 1920 | 53.60 | 53.30 | 0.56 | 1.58 | 1.52 | 4.01 |
| G | 5/14/2018 | 835 | Head | 835 | 42.85 | 41.50 | 3.25 | 0.94 | 0.90 | 4.03 |
| | | | | 695 | 43.25 | 42.24 | 2.38 | 0.89 | 0.89 | -0.28 |
| | | | | 905 | 42.60 | 41.50 | 2.65 | 0.96 | 0.97 | -1.08 |
| G | 5/14/2018 | 835 | Body | 835 | 54.66 | 55.20 | -0.98 | 0.98 | 0.97 | 0.74 |
| | | | | 695 | 55.05 | 55.76 | -1.27 | 0.92 | 0.96 | -3.91 |
| | | | | 905 | 54.51 | 55.00 | -0.89 | 1.00 | 1.05 | -4.61 |
| G | 5/17/2018 | 1900 | Head | 1900 | 39.91 | 40.00 | -0.23 | 1.43 | 1.40 | 2.43 |
| | | | | 1710 | 40.17 | 40.15 | 0.06 | 1.31 | 1.35 | -3.08 |
| | | | | 1920 | 40.00 | 40.00 | 0.00 | 1.45 | 1.40 | 3.29 |
| G | 5/17/2018 | 1900 | Body | 1900 | 52.19 | 53.30 | -2.08 | 1.57 | 1.52 | 3.09 |
| | | | | 1710 | 52.28 | 53.54 | -2.36 | 1.42 | 1.46 | -3.12 |
| | | | | 1920 | 52.20 | 53.30 | -2.06 | 1.57 | 1.52 | 3.55 |
| G | 5/17/2018 | 835 | Head | 835 | 42.09 | 41.50 | 1.42 | 0.92 | 0.90 | 2.24 |
| | | | | 695 | 42.63 | 42.24 | 0.91 | 0.87 | 0.89 | -1.77 |
| | | | | 905 | 41.91 | 41.50 | 0.99 | 0.94 | 0.97 | -3.44 |
| G | 5/17/2018 | 835 | Body | 835 | 53.18 | 55.20 | -3.66 | 1.02 | 0.97 | 4.95 |
| | | | | 695 | 53.78 | 55.76 | -3.55 | 0.96 | 0.96 | -0.08 |
| | | | | 905 | 53.08 | 55.00 | -3.49 | 1.04 | 1.05 | -1.00 |
| G | 5/17/2018 | 750 | Body | 750 | 53.56 | 55.55 | -3.58 | 0.98 | 0.96 | 1.83 |
| | | | | 695 | 53.78 | 55.76 | -3.55 | 0.96 | 0.96 | -0.08 |
| | | | | 790 | 53.30 | 55.39 | -3.78 | 0.99 | 0.97 | 2.35 |
| G | 5/18/2018 | 750 | Head | 750 | 42.37 | 41.96 | 0.97 | 0.89 | 0.89 | -0.05 |
| | | | | 695 | 42.63 | 42.24 | 0.91 | 0.87 | 0.89 | -1.77 |
| | | | | 790 | 42.13 | 41.76 | 0.89 | 0.90 | 0.90 | 0.75 |

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 \pm 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be \geq 15.0 cm for SAR measurements \leq 3 GHz and \geq 10.0 cm for measurements $>$ 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

| SAR Lab | Date | Tissue Type | Dipole Type Serial # | Dipole Cal. Due Data | Measured Results for 1g SAR | | | | Measured Results for 10g SAR | | | | Plot No. |
|---------|-----------|-------------|-------------------------|-------------------------|-----------------------------|---------------------|------------------------|---------------------|------------------------------|---------------------|------------------------|---------------------|----------|
| | | | | | Zoom Scan to 100 mW | Normalize to 1 W | Target (Ref. Value) | Delta \pm 10 % | Zoom Scan to 100 mW | Normalize to 1 W | Target (Ref. Value) | Delta \pm 10 % | |
| G | 5/14/2018 | Head | D750V3 SN:1019 | 3/16/2019 | 0.843 | 8.43 | 8.22 | 2.55 | 0.561 | 5.61 | 5.39 | 4.08 | |
| G | 5/14/2018 | Body | D750V3 SN:1019 | 3/16/2019 | 0.835 | 8.35 | 8.76 | -4.68 | 0.560 | 5.60 | 5.80 | -3.45 | |
| G | 5/14/2018 | Head | D835V2 SN:4d142 | 10/12/2018 | 1.010 | 10.10 | 9.64 | 4.77 | 0.670 | 6.70 | 6.22 | 7.72 | 1,2 |
| G | 5/14/2018 | Body | D835V2 SN:4d142 | 10/12/2018 | 0.954 | 9.54 | 9.63 | -0.93 | 0.635 | 6.35 | 6.27 | 1.28 | |
| G | 5/14/2018 | Head | D1750V2 SN:1077 | 10/5/2018 | 3.650 | 36.50 | 36.26 | 0.66 | 1.970 | 19.70 | 19.34 | 1.86 | |
| G | 5/14/2018 | Body | D1750V2 SN:1077 | 10/5/2018 | 3.650 | 36.50 | 37.34 | -2.25 | 1.950 | 19.50 | 19.98 | -2.40 | 3,4 |
| G | 5/14/2018 | Head | D1900V2 SN:5d163 | 10/5/2018 | 4.020 | 40.20 | 38.77 | 3.69 | 2.110 | 21.10 | 20.10 | 4.98 | |
| G | 5/14/2018 | Body | D1900V2 SN:5d163 | 10/5/2018 | 4.040 | 40.40 | 42.99 | -6.02 | 2.110 | 21.10 | 21.97 | -3.96 | 5,6 |
| G | 5/17/2018 | Head | D750V3 SN:1019 | 3/16/2019 | 0.771 | 7.71 | 8.22 | -6.20 | 0.512 | 5.12 | 5.39 | -5.01 | 7,8 |
| G | 5/17/2018 | Body | D750V3 SN:1019 | 3/16/2019 | 0.877 | 8.77 | 8.76 | 0.11 | 0.587 | 5.87 | 5.80 | 1.21 | |
| G | 5/17/2018 | Head | D1750V2 SN:1077 | 10/5/2018 | 3.570 | 35.70 | 36.26 | -1.54 | 1.920 | 19.20 | 19.34 | -0.72 | |
| G | 5/17/2018 | Body | D1750V2 SN:1077 | 10/5/2018 | 3.690 | 36.90 | 37.34 | -1.18 | 1.960 | 19.60 | 19.98 | -1.90 | |
| G | 5/17/2018 | Head | D1900V2 SN:5d163 | 10/5/2018 | 3.860 | 38.60 | 38.77 | -0.44 | 2.010 | 20.10 | 20.10 | 0.00 | |
| G | 5/17/2018 | Body | D1900V2 SN:5d163 | 10/5/2018 | 4.510 | 45.10 | 42.99 | 4.91 | 2.340 | 23.40 | 21.97 | 6.51 | |
| G | 5/17/2018 | Body | D835V2 SN:4d142 | 10/12/2018 | 0.978 | 9.78 | 9.63 | 1.56 | 0.648 | 6.48 | 6.27 | 3.35 | |

9. Conducted Output Power Measurements

9.1. W-CDMA

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

| Mode | Subtest | Rel99 |
|------------------------|-------------------------|--------------|
| WCDMA General Settings | Loopback Mode | Test Mode 2 |
| | Rel99 RMC | 12.2kbps RMC |
| | Power Control Algorithm | Algorithm2 |
| | β_c/β_d | 8/15 |

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

Table C.10.2.4: β values for transmitter characteristics tests with HS-DPCCH

| | Mode | HSDPA | HSDPA | HSDPA | HSDPA |
|-------------------------|--|--------------|-------|-------|-------|
| | Subtest | 1 | 2 | 3 | 4 |
| W-CDMA General Settings | Loopback Mode | Test Mode 1 | | | |
| | Rel99 RMC | 12.2kbps RMC | | | |
| | HSDPA FRC | H-Set 1 | | | |
| | Power Control Algorithm | Algorithm 2 | | | |
| | β_c | 2/15 | 11/15 | 15/15 | 15/15 |
| | β_d | 15/15 | 15/15 | 8/15 | 4/15 |
| | Bd (SF) | 64 | | | |
| | β_c/β_d | 2/15 | 11/15 | 15/8 | 15/4 |
| | β_{hs} | 4/15 | 24/15 | 30/15 | 30/15 |
| HSDPA Specific Settings | MPR (dB) | 0 | 0 | 0.5 | 0.5 |
| | D _{ACK} | 8 | | | |
| | D _{NAK} | 8 | | | |
| | DCQI | 8 | | | |
| | Ack-Nack repetition factor | 3 | | | |
| | CQI Feedback (Table 5.2B.4) | 4ms | | | |
| | CQI Repetition Factor (Table 5.2B.4) | 2 | | | |
| | A _{hs} = β_{hs}/β_c | 30/15 | | | |

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in table C,11.1.3 of 3GPP TS 34.121-1

A summary of these settings are illustrated below:

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

| | Mode | HSPA | | | | |
|-------------------------------|--------------------------------------|---------------|-------|-------|-------|-------------|
| | Subtest | 1 | 2 | 3 | 4 | 5 |
| WCDMA General Settings | Loopback Mode | Test Mode 1 | | | | |
| | Rel99 RMC | 12.2 kbps RMC | | | | |
| | HSDPA FRC | H-Set 1 | | | | |
| | HSUPA Test | HSPA | | | | |
| | Power Control Algorithm | Algorithm 2 | | | | Algorithm 1 |
| | β_c | 11/15 | 6/15 | 15/15 | 2/15 | 15/15 |
| | β_d | 15/15 | 15/15 | 9/15 | 15/15 | 0 |
| | β_{ec} | 209/225 | 12/15 | 30/15 | 2/15 | 5/15 |
| | β_c/β_d | 11/15 | 6/15 | 15/9 | 2/15 | - |
| | β_{hs} | 22/15 | 12/15 | 30/15 | 4/15 | 5/15 |
| | β_{ed} | 1309/225 | 94/75 | 47/15 | 56/75 | 47/15 |
| HSDPA Specific Settings | CM (dB) | 1 | 3 | 2 | 3 | 1 |
| | MPR (dB) | 0 | 2 | 1 | 2 | 0 |
| | DACK | 8 | | | | 0 |
| | DNAK | 8 | | | | 0 |
| | DCQI | 8 | | | | 0 |
| | Ack-Nack repetition factor | 3 | | | | |
| | CQI Feedback (Table 5.2B.4) | 4ms | | | | |
| HSUPA Specific Settings | CQI Repetition Factor (Table 5.2B.4) | 2 | | | | |
| | $A_{hs} = \beta_{hs}/\beta_c$ | 30/15 | | | | |
| | E-DPDCCH | 6 | 8 | 8 | 5 | 0 |
| | DHARQ | 0 | 0 | 0 | 0 | 0 |
| | AG Index | 20 | 12 | 15 | 17 | 12 |
| | ETFCI (from 34.121 Table C.11.1.3) | 75 | 67 | 92 | 71 | 67 |
| | Associated Max UL Data Rate kbps | 242.1 | 174.9 | 482.8 | 205.8 | 308.9 |
| | Reference E-TFCIs | 5 | 5 | 2 | 5 | 1 |
| | Reference E-TFCI | 11 | 11 | 11 | 11 | 67 |
| | Reference E-TFCI PO | 4 | 4 | 4 | 4 | 18 |
| | Reference E-TFCI | 67 | 67 | 92 | 67 | 67 |
| | Reference E-TFCI PO | 18 | 18 | 18 | 18 | 18 |
| | Reference E-TFCI | 71 | 71 | 71 | 71 | 71 |
| | Reference E-TFCI PO | 23 | 23 | 23 | 23 | 23 |
| | Reference E-TFCI | 75 | 75 | 75 | 75 | 75 |
| | Reference E-TFCI PO | 26 | 26 | 26 | 26 | 26 |
| | Reference E-TFCI | 81 | 81 | 81 | 81 | 81 |
| | Reference E-TFCI PO | 27 | 27 | 27 | 27 | 27 |
| | Maximum Channelization Codes | 2xSF2 | | | | SF4 |

DC-HSDPA Setup Procedures used to establish the test signals

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1

Table E.5.0: Levels for HSDPA connection setup


| Parameter During Connection setup | Unit | Value |
|-----------------------------------|------|-------|
| P-CPICH_Ec/Ior | dB | -10 |
| P-CCPCH and SCH_Ec/Ior | dB | -12 |
| PICH_Ec/Ior | dB | -15 |
| HS-PDSCH | dB | off |
| HS-SCCH_1 | dB | off |
| DPCH_Ec/Ior | dB | -5 |
| OCNS_Ec/Ior | dB | -3.1 |

Call is set up as per 3GPP TS34.108 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

| Parameter | Unit | Value |
|--|------------|-------|
| Nominal Avg. Inf. Bit Rate | kbps | 60 |
| Inter-TTI Distance | TTI's | 1 |
| Number of HARQ Processes | Proces ses | 6 |
| Information Bit Payload (N_{INF}) | Bits | 120 |
| Number Code Blocks | Blocks | 1 |
| Binary Channel Bits Per TTI | Bits | 960 |
| Total Available SML's in UE | SML's | 19200 |
| Number of SML's per HARQ Proc. | SML's | 3200 |
| Coding Rate | | 0.15 |
| Number of Physical Channel Codes | Codes | 1 |
| Modulation | | QPSK |
| Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. | | |
| Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used. | | |

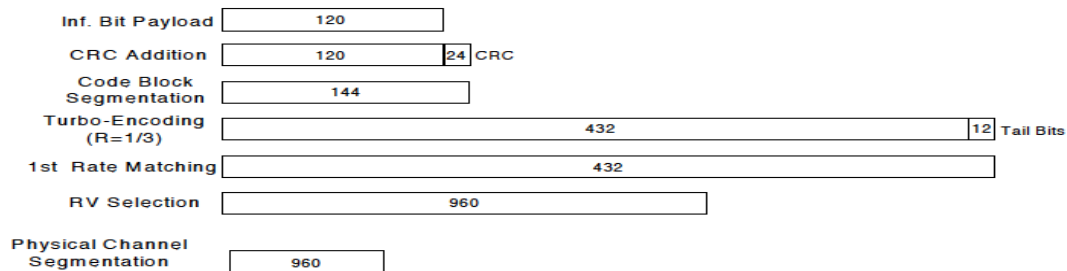**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

| | Mode | HSDPA | HSDPA | HSDPA | HSDPA |
|-------------------------|--|--------------|-------|-------|-------|
| | Subtest | 1 | 2 | 3 | 4 |
| WCDMA General Settings | Loopback Mode | Test Mode 1 | | | |
| | Rel99 RMC | 12.2kbps RMC | | | |
| | HSDPA FRC | H-Set 1 | | | |
| | Power Control Algorithm | Algorithm2 | | | |
| | β_c | 2/15 | 11/15 | 15/15 | 15/15 |
| | β_d | 15/15 | 15/15 | 8/15 | 4/15 |
| | β_d (SF) | 64 | | | |
| | β_c/β_d | 2/15 | 12/15 | 15/8 | 15/4 |
| | β_{hs} | 4/15 | 24/15 | 30/15 | 30/15 |
| HSDPA Specific Settings | MPR (dB) | 0 | 0 | 0.5 | 0.5 |
| | DACK | 8 | | | |
| | DNAK | 8 | | | |
| | DCQI | 8 | | | |
| | Ack-Nack Repetition factor | 3 | | | |
| | CQI Feedback | 4ms | | | |
| | CQI Repetition Factor | 2 | | | |
| | A _{hs} = β_{hs}/β_c | 30/15 | | | |

W-CDMA Band II Measured Results

| Mode | | UL Ch No. | Freq. (MHz) | Maximum Average Power (dBm) | | |
|------------|----------------------------|-----------|----------------|--------------------------------|-----|---------------|
| | | | | Measured Pwr | MPR | Tune-up Limit |
| Release 99 | Rel 99 (RMC, 12.2 kbps) | 9262 | 1852.4 | 18.07 | N/A | 18.50 |
| | | 9400 | 1880.0 | 18.10 | | |
| | | 9538 | 1907.6 | 18.10 | | |
| HSDPA | Subtest 1 | 9262 | 1852.4 | 17.10 | 0 | 18.50 |
| | | 9400 | 1880.0 | 17.10 | | |
| | | 9538 | 1907.6 | 17.20 | | |
| | Subtest 2 | 9262 | 1852.4 | 17.10 | 0 | 18.50 |
| | | 9400 | 1880.0 | 17.10 | | |
| | | 9538 | 1907.6 | 17.20 | | |
| | Subtest 3 | 9262 | 1852.4 | 16.60 | 0.5 | 18.00 |
| | | 9400 | 1880.0 | 16.60 | | |
| | | 9538 | 1907.6 | 16.60 | | |
| | Subtest 4 | 9262 | 1852.4 | 16.60 | 0.5 | 18.00 |
| | | 9400 | 1880.0 | 16.60 | | |
| | | 9538 | 1907.6 | 16.70 | | |
| HSUPA | Subtest 1 | 9262 | 1852.4 | 17.01 | 0 | 18.50 |
| | | 9400 | 1880.0 | 17.10 | | |
| | | 9538 | 1907.6 | 17.28 | | |
| | Subtest 2 | 9262 | 1852.4 | 15.12 | 2 | 16.50 |
| | | 9400 | 1880.0 | 15.55 | | |
| | | 9538 | 1907.6 | 15.82 | | |
| | Subtest 3 | 9262 | 1852.4 | 16.46 | 1 | 17.50 |
| | | 9400 | 1880.0 | 16.00 | | |
| | | 9538 | 1907.6 | 16.50 | | |
| | Subtest 4 | 9262 | 1852.4 | 15.12 | 2 | 16.50 |
| | | 9400 | 1880.0 | 15.55 | | |
| | | 9538 | 1907.6 | 15.82 | | |
| | Subtest 5 | 9262 | 1852.4 | 17.01 | 0 | 18.50 |
| | | 9400 | 1880.0 | 17.10 | | |
| | | 9538 | 1907.6 | 17.28 | | |
| DC-HSDPA | Subtest 1 | 9262 | 1852.4 | 17.10 | 0 | 18.50 |
| | | 9400 | 1880.0 | 17.20 | | |
| | | 9538 | 1907.6 | 17.10 | | |
| | Subtest 2 | 9262 | 1852.4 | 17.10 | 0 | 18.50 |
| | | 9400 | 1880.0 | 17.20 | | |
| | | 9538 | 1907.6 | 17.10 | | |
| | Subtest 3 | 9262 | 1852.4 | 16.60 | 0.5 | 18.00 |
| | | 9400 | 1880.0 | 16.70 | | |
| | | 9538 | 1907.6 | 16.70 | | |
| | Subtest 4 | 9262 | 1852.4 | 16.60 | 0.5 | 18.00 |
| | | 9400 | 1880.0 | 16.70 | | |
| | | 9538 | 1907.6 | 16.70 | | |

W-CDMA Band IV Measured Results

| Mode | | UL Ch No. | Freq. (MHz) | Maximum Average Power (dBm) | | |
|------------|----------------------------|-----------|----------------|--------------------------------|-----|---------------|
| | | | | Measured Pwr | MPR | Tune-up Limit |
| Release 99 | Rel 99 (RMC, 12.2 kbps) | 1312 | 1712.4 | 17.87 | N/A | 19.00 |
| | | 1413 | 1732.6 | 17.91 | | |
| | | 1513 | 1752.6 | 17.97 | | |
| HSDPA | Subtest 1 | 1312 | 1712.4 | 17.00 | 0 | 19.00 |
| | | 1413 | 1732.6 | 17.00 | | |
| | | 1513 | 1752.6 | 17.10 | | |
| | Subtest 2 | 1312 | 1712.4 | 17.00 | 0 | 19.00 |
| | | 1413 | 1732.6 | 17.00 | | |
| | | 1513 | 1752.6 | 17.10 | | |
| | Subtest 3 | 1312 | 1712.4 | 16.50 | 0.5 | 18.50 |
| | | 1413 | 1732.6 | 16.50 | | |
| | | 1513 | 1752.6 | 16.50 | | |
| | Subtest 4 | 1312 | 1712.4 | 16.50 | 0.5 | 18.50 |
| | | 1413 | 1732.6 | 16.50 | | |
| | | 1513 | 1752.6 | 16.60 | | |
| HSUPA | Subtest 1 | 1312 | 1712.4 | 16.97 | 0 | 19.00 |
| | | 1413 | 1732.6 | 16.94 | | |
| | | 1513 | 1752.6 | 17.00 | | |
| | Subtest 2 | 1312 | 1712.4 | 15.43 | 2 | 17.00 |
| | | 1413 | 1732.6 | 15.49 | | |
| | | 1513 | 1752.6 | 15.47 | | |
| | Subtest 3 | 1312 | 1712.4 | 16.26 | 1 | 18.00 |
| | | 1413 | 1732.6 | 16.23 | | |
| | | 1513 | 1752.6 | 16.48 | | |
| | Subtest 4 | 1312 | 1712.4 | 15.43 | 2 | 17.00 |
| | | 1413 | 1732.6 | 15.49 | | |
| | | 1513 | 1752.6 | 15.47 | | |
| | Subtest 5 | 1312 | 1712.4 | 16.97 | 0 | 19.00 |
| | | 1413 | 1732.6 | 16.94 | | |
| | | 1513 | 1752.6 | 17.00 | | |
| DC-HSDPA | Subtest 1 | 1312 | 1712.4 | 17.00 | 0 | 19.00 |
| | | 1413 | 1732.6 | 17.00 | | |
| | | 1513 | 1752.6 | 17.10 | | |
| | Subtest 2 | 1312 | 1712.4 | 17.00 | 0 | 19.00 |
| | | 1413 | 1732.6 | 17.00 | | |
| | | 1513 | 1752.6 | 17.10 | | |
| | Subtest 3 | 1312 | 1712.4 | 16.50 | 0.5 | 18.50 |
| | | 1413 | 1732.6 | 16.50 | | |
| | | 1513 | 1752.6 | 16.50 | | |
| | Subtest 4 | 1312 | 1712.4 | 16.50 | 0.5 | 18.50 |
| | | 1413 | 1732.6 | 16.50 | | |
| | | 1513 | 1752.6 | 16.60 | | |

W-CDMA Band V Measured Results

| Mode | | UL Ch No. | Freq. (MHz) | Maximum Average Power (dBm) | | |
|------------|-------------------------|-----------|-------------|-----------------------------|-----|---------------|
| | | | | Measured Pwr | MPR | Tune-up Limit |
| Release 99 | Rel 99 (RMC, 12.2 kbps) | 4132 | 826.4 | 24.22 | N/A | 25.00 |
| | | 4183 | 836.6 | 24.23 | | |
| | | 4233 | 846.6 | 24.23 | | |
| HSDPA | Subtest 1 | 4132 | 826.4 | 23.40 | 0 | 25.00 |
| | | 4183 | 836.6 | 23.40 | | |
| | | 4233 | 846.6 | 23.40 | | |
| | Subtest 2 | 4132 | 826.4 | 23.40 | 0 | 25.00 |
| | | 4183 | 836.6 | 23.40 | | |
| | | 4233 | 846.6 | 23.40 | | |
| | Subtest 3 | 4132 | 826.4 | 22.80 | 0.5 | 24.50 |
| | | 4183 | 836.6 | 22.70 | | |
| | | 4233 | 846.6 | 22.90 | | |
| | Subtest 4 | 4132 | 826.4 | 22.80 | 0.5 | 24.50 |
| | | 4183 | 836.6 | 22.70 | | |
| | | 4233 | 846.6 | 22.90 | | |
| HSUPA | Subtest 1 | 4132 | 826.4 | 22.71 | 0 | 25.00 |
| | | 4183 | 836.6 | 22.49 | | |
| | | 4233 | 846.6 | 22.80 | | |
| | Subtest 2 | 4132 | 826.4 | 21.40 | 2 | 23.00 |
| | | 4183 | 836.6 | 21.41 | | |
| | | 4233 | 846.6 | 21.79 | | |
| | Subtest 3 | 4132 | 826.4 | 21.30 | 1 | 24.00 |
| | | 4183 | 836.6 | 21.82 | | |
| | | 4233 | 846.6 | 21.00 | | |
| | Subtest 4 | 4132 | 826.4 | 22.00 | 2 | 23.00 |
| | | 4183 | 836.6 | 21.90 | | |
| | | 4233 | 846.6 | 21.81 | | |
| | Subtest 5 | 4132 | 826.4 | 22.58 | 0 | 25.00 |
| | | 4183 | 836.6 | 22.76 | | |
| | | 4233 | 846.6 | 22.91 | | |
| DC-HSDPA | Subtest 1 | 4132 | 826.4 | 23.40 | 0 | 25.00 |
| | | 4183 | 836.6 | 23.40 | | |
| | | 4233 | 846.6 | 23.40 | | |
| | Subtest 2 | 4132 | 826.4 | 23.40 | 0 | 25.00 |
| | | 4183 | 836.6 | 23.40 | | |
| | | 4233 | 846.6 | 23.40 | | |
| | Subtest 3 | 4132 | 826.4 | 22.80 | 0.5 | 24.50 |
| | | 4183 | 836.6 | 22.70 | | |
| | | 4233 | 846.6 | 22.90 | | |
| | Subtest 4 | 4132 | 826.4 | 22.80 | 0.5 | 24.50 |
| | | 4183 | 836.6 | 22.70 | | |
| | | 4233 | 846.6 | 22.90 | | |

9.2. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

| Modulation | Channel bandwidth / Transmission bandwidth (N_{RB}) | | | | | | MPR (dB) |
|------------|---|---------|-------|--------|--------|--------|----------|
| | 1.4 MHz | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz | |
| QPSK | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 1 |
| 16 QAM | ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 1 |
| 16 QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 2 |
| 64 QAM | ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 2 |
| 64 QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 3 |
| 256 QAM | ≥ 1 | | | | | | ≤ 5 |

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

| Network Signalling value | Requirements (subclause) | E-UTRA Band | Channel bandwidth (MHz) | Resources Blocks (N_{RB}) | A-MPR (dB) |
|--------------------------|--------------------------------|----------------------------------|-------------------------|--|-------------------|
| NS_01 | 6.6.2.1.1 | Table 5.5-1 | 1.4, 3, 5, 10, 15, 20 | Table 5.6-1 | N/A |
| NS_03 | 6.6.2.2.1 | 2, 4, 10, 23, 25, 35, 38, 66, 70 | 3 | >5 | ≤ 1 |
| | | | 5 | >6 | ≤ 1 |
| | | | 10 | >8 | ≤ 1 |
| | | | 15 | >8 | ≤ 1 |
| | | | 20 | >10 | ≤ 1 |
| NS_04 | 6.6.2.2.2, 6.6.3.3.19 | 41 | 5, 10, 15, 20 | Table 6.2.4-4, Table 6.2.4-4a | |
| NS_05 | 6.6.3.3.1 | 1 | 10, 15, 20 | ≥ 50 (NOTE 1) | ≤ 1 (NOTE 1) |
| | | | 15, 20 | Table 6.2.4-18 (NOTE 2) | |
| | | 65 (NOTE 3) | 10, 15, 20 | ≥ 50 | ≤ 1 (NOTE 1) |
| | | | 15, 20 | Table 6.2.4-18 (NOTE 2) | |
| NS_06 | 6.6.2.2.3 | 12, 13, 14, 17 | 1.4, 3, 5, 10 | Table 5.6-1 | N/A |
| NS_07 | 6.6.2.2.3 | 13 | 10 | Table 6.2.4-2 | |
| NS_08 | 6.6.3.3.2 | | | | |
| NS_08 | 6.6.3.3.3 | 19 | 10, 15 | > 44 | ≤ 3 |
| NS_09 | 6.6.3.3.4 | 21 | 10, 15 | > 40 | ≤ 1 |
| | | | | > 55 | ≤ 2 |
| NS_10 | | 20 | 15, 20 | Table 6.2.4-3 | |
| NS_11 | 6.6.2.2.1 | 23 | 1.4, 3, 5, 10, 15, 20 | Table 6.2.4-5 | |
| NS_12 | 6.6.3.3.13 | | | | |
| NS_12 | 6.6.3.3.5 | 26 | 1.4, 3, 5, 10, 15 | Table 6.2.4-6 | |
| NS_13 | 6.6.3.3.6 | 26 | 5 | Table 6.2.4-7 | |
| NS_14 | 6.6.3.3.7 | 26 | 10, 15 | Table 6.2.4-8 | |
| NS_15 | 6.6.3.3.8 | 26 | 1.4, 3, 5, 10, 15 | Table 6.2.4-9 Table 6.2.4-10 | |
| NS_16 | 6.6.3.3.9 | 27 | 3, 5, 10 | Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13 | |
| NS_17 | 6.6.3.3.10 | 28 | 5, 10 | Table 5.6-1 | N/A |
| NS_18 | 6.6.3.3.11 | 28 | 5 | ≥ 2 | ≤ 1 |
| | | | 10, 15, 20 | ≥ 1 | ≤ 4 |
| NS_19 | 6.6.3.3.12 | 44 | 10, 15, 20 | Table 6.2.4-14 | |
| NS_20 | 6.2.2 | 23 | 5, 10, 15, 20 | Table 6.2.4-15 | |
| | 6.6.2.2.1 | | | | |
| NS_21 | 6.6.3.3.14 | 30 | 5, 10 | Table 6.2.4-16 | |
| NS_22 | 6.6.2.2.1 | | | | |
| NS_22 | 6.6.3.3.15 | 42, 43 | 5, 10, 15, 20 | Table 6.2.4-17 | |
| NS_23 | 6.6.3.3.16 | 42, 43 | 5, 10, 15, 20 | N/A | |
| NS_24 | 6.6.3.3.17 | 65 (NOTE 4) | 5, 10, 15, 20 | Table 6.2.4-18 | |
| NS_25 | 6.6.3.3.20 | 65 (NOTE 4) | 5, 10, 15, 20 | Table 6.2.4-19 | |
| NS_26 | 6.6.3.3.21 | 68 | 10, 15 | Table 6.2.4-20 | |
| NS_26 | 6.6.3.3.22 | 68 | 10, 15 | Table 6.2.4-21 | |
| NS_27 | 6.6.2.2.5, 6.6.3.3.23 | 48 | 5, 10, 15, 20 | Table 6.2.4-22 | |
| NS_28 | 6.2.2A, 6.6.3.3.24 | 46 (NOTE 5) | 20 | Table 6.2.4-23 | |
| NS_29 | 6.2.2A, 6.6.2.3.1a, 6.6.3.3.25 | 46 (NOTE 5) | 20 | Table 6.2.4-24 | |
| NS_30 | 6.2.2A, 6.6.3.3.26 | 46 (NOTE 5) | 20 | Table 6.2.4-25 | |
| NS_31 | 6.2.2A, 6.6.3.3.27 | 46 (NOTE 5) | 20 | Table 6.2.4-26 | |
| NS_32 | - | - | - | - | - |

NOTE 1: Applicable when the lower edge of the assigned E-UTRA UL channel bandwidth frequency is larger than or equal to the upper edge of PHS band (1915.7 MHz) + 4 MHz + the channel BW assigned, where channel BW is as defined in subclause 5.6. A-MPR for

LTE Band 2 Measured Results

| BW (MHz) | Mode | RB Allocation | RB offset | Maximum Average Power (dBm) | | | | |
|-------------|------|------------------|--------------|-----------------------------|----------|------------|-----|------------------|
| | | | | 18700 | 18900 | 19100 | MPR | Tune-up Limit |
| | | | | 1860 MHz | 1880 MHz | 1900 MHz | | |
| 20 MHz | QPSK | 1 | 0 | 16.90 | 16.77 | 17.03 | 0 | 17.5 |
| | | 1 | 49 | 17.25 | 16.78 | 17.26 | 0 | 17.5 |
| | | 1 | 99 | 16.90 | 16.67 | 16.92 | 0 | 17.5 |
| | | 50 | 0 | 16.10 | 16.13 | 16.39 | 1 | 16.5 |
| | | 50 | 24 | 16.20 | 16.10 | 16.22 | 1 | 16.5 |
| | | 50 | 50 | 16.13 | 16.14 | 16.10 | 1 | 16.5 |
| | | 100 | 0 | 16.21 | 16.22 | 16.17 | 1 | 16.5 |
| BW (MHz) | Mode | RB Allocation | RB offset | Maximum Average Power (dBm) | | | | |
| | | | | 18675 | 18900 | 19125 | MPR | Tune-up Limit |
| | | | | 1857.5 MHz | 1880 MHz | 1902.5 MHz | | |
| 15 MHz | QPSK | 1 | 0 | 17.00 | 16.90 | 17.20 | 0 | 17.5 |
| | | 1 | 37 | 17.30 | 17.10 | 17.10 | 0 | 17.5 |
| | | 1 | 74 | 16.90 | 17.30 | 17.00 | 0 | 17.5 |
| | | 36 | 0 | 16.10 | 16.10 | 16.30 | 1 | 16.5 |
| | | 36 | 20 | 16.10 | 16.20 | 16.20 | 1 | 16.5 |
| | | 36 | 39 | 16.10 | 16.20 | 16.10 | 1 | 16.5 |
| | | 75 | 0 | 16.10 | 16.20 | 16.20 | 1 | 16.5 |
| BW (MHz) | Mode | RB Allocation | RB offset | Maximum Average Power (dBm) | | | | |
| | | | | 18650 | 18900 | 19150 | MPR | Tune-up Limit |
| | | | | 1855 MHz | 1880 MHz | 1905 MHz | | |
| 10 MHz | QPSK | 1 | 0 | 17.00 | 17.00 | 17.10 | 0 | 17.5 |
| | | 1 | 25 | 17.30 | 17.30 | 17.50 | 0 | 17.5 |
| | | 1 | 49 | 17.10 | 17.20 | 17.40 | 0 | 17.5 |
| | | 25 | 0 | 16.10 | 16.10 | 16.10 | 1 | 16.5 |
| | | 25 | 12 | 16.10 | 16.10 | 16.10 | 1 | 16.5 |
| | | 25 | 25 | 16.10 | 16.20 | 16.00 | 1 | 16.5 |
| | | 50 | 0 | 16.10 | 16.10 | 16.20 | 1 | 16.5 |

Note(s):

Device supports LTE UE Category 1 only. Therefore, 16QAM only supports channel bandwidths up to 5MHz per Table A.2.2.1.2-1 of 3GPP TS 36.101 version 13.2.1 Release 13.

LTE Band 2 Measured Results (continued)

| BW (MHz) | Mode | RB Allocation | RB offset | Maximum Average Power (dBm) | | | | |
|-------------|-------|------------------|--------------|-----------------------------|----------|------------|-----|------------------|
| | | | | 18625 | 18900 | 19175 | MPR | Tune-up Limit |
| | | | | 1852.5 MHz | 1880 MHz | 1907.5 MHz | | |
| 5 MHz | QPSK | 1 | 0 | 16.80 | 16.90 | 16.80 | 0 | 17.5 |
| | | 1 | 12 | 17.10 | 16.20 | 17.10 | 0 | 17.5 |
| | | 1 | 24 | 17.00 | 17.20 | 16.90 | 0 | 17.5 |
| | | 12 | 0 | 16.10 | 16.20 | 16.10 | 1 | 16.5 |
| | | 12 | 7 | 16.10 | 16.20 | 16.10 | 1 | 16.5 |
| | | 12 | 13 | 16.10 | 16.20 | 16.10 | 1 | 16.5 |
| | | 25 | 0 | 16.10 | 16.10 | 16.10 | 1 | 16.5 |
| | 16QAM | 1 | 0 | 15.50 | 15.60 | 15.50 | 1 | 16.5 |
| | | 1 | 12 | 15.30 | 15.60 | 15.40 | 1 | 16.5 |
| | | 1 | 24 | 15.60 | 15.70 | 15.50 | 1 | 16.5 |
| | | 12 | 0 | 14.90 | 15.00 | 15.10 | 2 | 15.5 |
| | | 12 | 7 | 15.00 | 15.00 | 15.00 | 2 | 15.5 |
| | | 12 | 13 | 15.00 | 15.10 | 15.10 | 2 | 15.5 |
| | | 25 | 0 | 15.30 | 15.30 | 15.20 | 2 | 15.5 |
| BW (MHz) | Mode | RB Allocation | RB offset | Maximum Average Power (dBm) | | | | |
| | | | | 18615 | 18900 | 19185 | MPR | Tune-up Limit |
| | | | | 1851.5 MHz | 1880 MHz | 1908.5 MHz | | |
| 3 MHz | QPSK | 1 | 0 | 17.00 | 17.10 | 17.20 | 0 | 17.5 |
| | | 1 | 8 | 17.00 | 16.90 | 17.20 | 0 | 17.5 |
| | | 1 | 14 | 16.90 | 17.10 | 17.20 | 0 | 17.5 |
| | | 8 | 0 | 16.10 | 16.10 | 16.10 | 1 | 16.5 |
| | | 8 | 4 | 16.10 | 16.10 | 16.10 | 1 | 16.5 |
| | | 8 | 7 | 16.00 | 16.10 | 16.10 | 1 | 16.5 |
| | | 15 | 0 | 16.10 | 16.00 | 16.00 | 1 | 16.5 |
| | 16QAM | 1 | 0 | 16.20 | 15.70 | 15.80 | 1 | 16.5 |
| | | 1 | 8 | 16.10 | 15.60 | 15.80 | 1 | 16.5 |
| | | 1 | 14 | 16.00 | 15.80 | 15.80 | 1 | 16.5 |
| | | 8 | 0 | 14.90 | 14.70 | 14.90 | 2 | 15.5 |
| | | 8 | 4 | 14.90 | 14.80 | 15.00 | 2 | 15.5 |
| | | 8 | 7 | 14.80 | 14.80 | 15.20 | 2 | 15.5 |
| | | 15 | 0 | 15.10 | 15.00 | 15.10 | 2 | 15.5 |
| BW (MHz) | Mode | RB Allocation | RB offset | Maximum Average Power (dBm) | | | | |
| | | | | 18607 | 18900 | 19193 | MPR | Tune-up Limit |
| | | | | 1850.7 MHz | 1880 MHz | 1909.3 MHz | | |
| 1.4 MHz | QPSK | 1 | 0 | 16.80 | 17.00 | 16.90 | 0 | 17.5 |
| | | 1 | 3 | 16.90 | 17.30 | 17.00 | 0 | 17.5 |
| | | 1 | 5 | 16.90 | 17.10 | 17.00 | 0 | 17.5 |
| | | 3 | 0 | 16.20 | 16.20 | 16.10 | 0 | 17.5 |
| | | 3 | 1 | 16.10 | 16.20 | 16.30 | 0 | 17.5 |
| | | 3 | 3 | 16.20 | 16.10 | 16.10 | 0 | 17.5 |
| | | 6 | 0 | 16.10 | 16.10 | 16.00 | 1 | 16.5 |
| | 16QAM | 1 | 0 | 16.00 | 16.10 | 15.80 | 1 | 16.5 |
| | | 1 | 3 | 15.70 | 16.20 | 15.80 | 1 | 16.5 |
| | | 1 | 5 | 15.70 | 16.20 | 15.80 | 1 | 16.5 |
| | | 3 | 0 | 15.20 | 14.90 | 14.90 | 1 | 16.5 |
| | | 3 | 1 | 15.00 | 15.10 | 15.00 | 1 | 16.5 |
| | | 3 | 3 | 14.90 | 15.00 | 15.20 | 1 | 16.5 |
| | | 6 | 0 | 14.80 | 15.40 | 15.10 | 2 | 15.5 |

LTE Band 4 Measured Results

| BW (MHz) | Mode | RB Allocation | RB offset | Maximum Average Power (dBm) | | | | |
|-------------|------|------------------|--------------|-----------------------------|------------|------------|-----|------------------|
| | | | | 20050 | 20175 | 20300 | MPR | Tune-up Limit |
| | | | | 1720 MHz | 1732.5 MHz | 1745 MHz | | |
| 20 MHz | QPSK | 1 | 0 | | 16.31 | | 0 | 17.5 |
| | | 1 | 49 | | 16.58 | | 0 | 17.5 |
| | | 1 | 99 | | 16.38 | | 0 | 17.5 |
| | | 50 | 0 | | 15.71 | | 1 | 16.5 |
| | | 50 | 24 | | 15.67 | | 1 | 16.5 |
| | | 50 | 50 | | 15.70 | | 1 | 16.5 |
| | | 100 | 0 | | 15.63 | | 1 | 16.5 |
| BW (MHz) | Mode | RB Allocation | RB offset | Maximum Average Power (dBm) | | | | |
| | | | | 20025 | 20175 | 20325 | MPR | Tune-up Limit |
| | | | | 1717.5 MHz | 1732.5 MHz | 1747.5 MHz | | |
| 15 MHz | QPSK | 1 | 0 | 16.30 | 16.20 | 16.40 | 0 | 17.5 |
| | | 1 | 37 | 16.60 | 16.40 | 16.80 | 0 | 17.5 |
| | | 1 | 74 | 16.70 | 16.50 | 16.50 | 0 | 17.5 |
| | | 36 | 0 | 15.30 | 15.40 | 15.40 | 1 | 16.5 |
| | | 36 | 20 | 15.40 | 15.40 | 15.30 | 1 | 16.5 |
| | | 36 | 39 | 15.40 | 15.40 | 15.30 | 1 | 16.5 |
| | | 75 | 0 | 15.30 | 15.40 | 15.20 | 1 | 16.5 |
| BW (MHz) | Mode | RB Allocation | RB offset | Maximum Average Power (dBm) | | | | |
| | | | | 20000 | 20175 | 20350 | MPR | Tune-up Limit |
| | | | | 1715 MHz | 1732.5 MHz | 1750 MHz | | |
| 10 MHz | QPSK | 1 | 0 | 16.20 | 16.20 | 16.40 | 0 | 17.5 |
| | | 1 | 25 | 16.60 | 16.60 | 16.50 | 0 | 17.5 |
| | | 1 | 49 | 16.60 | 16.30 | 16.50 | 0 | 17.5 |
| | | 25 | 0 | 15.30 | 15.40 | 15.30 | 1 | 16.5 |
| | | 25 | 12 | 15.40 | 15.40 | 15.40 | 1 | 16.5 |
| | | 25 | 25 | 15.40 | 15.40 | 15.40 | 1 | 16.5 |
| | | 50 | 0 | 15.40 | 15.50 | 15.30 | 1 | 16.5 |

Note(s):

- 20 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.
- Device supports LTE UE Category 1 only. Therefore, 16QAM only supports channel bandwidths up to 5MHz per Table A.2.2.1.2-1 of 3GPP TS 36.101 version 13.2.1 Release 13.

LTE Band 4 Measured Results (continued)

| BW (MHz) | Mode | RB Allocation | RB offset | Maximum Average Power (dBm) | | | | |
|-------------|-------|------------------|--------------|-----------------------------|------------|------------|-----|------------------|
| | | | | 19975 | 20175 | 20375 | MPR | Tune-up Limit |
| | | | | 1712.5 MHz | 1732.5 MHz | 1752.5 MHz | | |
| 5 MHz | QPSK | 1 | 0 | 16.20 | 16.60 | 16.30 | 0 | 17.5 |
| | | 1 | 12 | 16.70 | 16.60 | 16.90 | 0 | 17.5 |
| | | 1 | 24 | 16.20 | 16.60 | 16.60 | 0 | 17.5 |
| | | 12 | 0 | 15.30 | 15.50 | 15.30 | 1 | 16.5 |
| | | 12 | 7 | 15.40 | 15.50 | 15.30 | 1 | 16.5 |
| | | 12 | 13 | 15.40 | 15.60 | 15.50 | 1 | 16.5 |
| | | 25 | 0 | 15.40 | 15.60 | 15.40 | 1 | 16.5 |
| | 16QAM | 1 | 0 | 15.20 | 15.20 | 15.00 | 1 | 16.5 |
| | | 1 | 12 | 15.10 | 15.00 | 14.60 | 1 | 16.5 |
| | | 1 | 24 | 15.40 | 15.10 | 15.10 | 1 | 16.5 |
| | | 12 | 0 | 14.40 | 14.50 | 14.40 | 2 | 15.5 |
| | | 12 | 7 | 14.40 | 14.50 | 14.30 | 2 | 15.5 |
| | | 12 | 13 | 14.30 | 14.50 | 14.60 | 2 | 15.5 |
| | | 25 | 0 | 14.60 | 14.50 | 14.40 | 2 | 15.5 |
| BW (MHz) | Mode | RB Allocation | RB offset | Maximum Average Power (dBm) | | | | |
| | | | | 19965 | 20175 | 20385 | MPR | Tune-up Limit |
| | | | | 1711.5 MHz | 1732.5 MHz | 1753.5 MHz | | |
| 3 MHz | QPSK | 1 | 0 | 16.30 | 16.40 | 16.00 | 0 | 17.5 |
| | | 1 | 8 | 16.50 | 16.60 | 16.20 | 0 | 17.5 |
| | | 1 | 14 | 16.70 | 16.60 | 16.30 | 0 | 17.5 |
| | | 8 | 0 | 15.20 | 15.70 | 15.20 | 1 | 16.5 |
| | | 8 | 4 | 15.20 | 15.60 | 15.20 | 1 | 16.5 |
| | | 8 | 7 | 15.20 | 15.60 | 15.30 | 1 | 16.5 |
| | | 15 | 0 | 15.20 | 15.60 | 15.20 | 1 | 16.5 |
| | 16QAM | 1 | 0 | 15.10 | 15.50 | 14.80 | 1 | 16.5 |
| | | 1 | 8 | 14.90 | 15.40 | 14.90 | 1 | 16.5 |
| | | 1 | 14 | 15.00 | 15.40 | 14.90 | 1 | 16.5 |
| | | 8 | 0 | 14.30 | 14.50 | 14.00 | 2 | 15.5 |
| | | 8 | 4 | 14.40 | 14.60 | 14.00 | 2 | 15.5 |
| | | 8 | 7 | 14.50 | 14.60 | 14.00 | 2 | 15.5 |
| | | 15 | 0 | 14.40 | 14.50 | 14.30 | 2 | 15.5 |
| BW (MHz) | Mode | RB Allocation | RB offset | Maximum Average Power (dBm) | | | | |
| | | | | 19957 | 20175 | 20393 | MPR | Tune-up Limit |
| | | | | 1710.7 MHz | 1732.5 MHz | 1754.3 MHz | | |
| 1.4 MHz | QPSK | 1 | 0 | 16.40 | 16.40 | 16.30 | 0 | 17.5 |
| | | 1 | 3 | 16.50 | 16.70 | 16.40 | 0 | 17.5 |
| | | 1 | 5 | 16.50 | 16.50 | 16.40 | 0 | 17.5 |
| | | 3 | 0 | 16.30 | 16.50 | 16.30 | 0 | 17.5 |
| | | 3 | 1 | 16.50 | 16.50 | 16.20 | 0 | 17.5 |
| | | 3 | 3 | 16.40 | 16.50 | 16.40 | 0 | 17.5 |
| | | 6 | 0 | 15.30 | 15.40 | 15.30 | 1 | 16.5 |
| | 16QAM | 1 | 0 | 14.90 | 15.10 | 14.80 | 1 | 16.5 |
| | | 1 | 3 | 15.00 | 15.00 | 14.80 | 1 | 16.5 |
| | | 1 | 5 | 15.00 | 15.00 | 15.00 | 1 | 16.5 |
| | | 3 | 0 | 15.40 | 15.20 | 15.00 | 1 | 16.5 |
| | | 3 | 1 | 15.30 | 15.50 | 15.10 | 1 | 16.5 |
| | | 3 | 3 | 15.10 | 15.50 | 15.10 | 1 | 16.5 |
| | | 6 | 0 | 14.30 | 14.80 | 14.20 | 2 | 15.5 |

LTE Band 12 Measured Results

| BW (MHz) | Mode | RB Allocation | RB offset | Maximum Average Power (dBm) | | | | |
|-------------|-------|------------------|--------------|-----------------------------|-----------|-----------|-----|------------------|
| | | | | 23060 | 23095 | 23130 | MPR | Tune-up Limit |
| | | | | 704 MHz | 707.5 MHz | 711 MHz | | |
| 10 MHz | QPSK | 1 | 0 | | 23.40 | | 0 | 24 |
| | | 1 | 25 | | 23.80 | | 0 | 24 |
| | | 1 | 49 | | 23.80 | | 0 | 24 |
| | | 25 | 0 | | 22.58 | | 1 | 23 |
| | | 25 | 12 | | 22.68 | | 1 | 23 |
| | | 25 | 25 | | 22.67 | | 1 | 23 |
| | | 50 | 0 | | 22.56 | | 1 | 23 |
| BW (MHz) | Mode | RB Allocation | RB offset | Maximum Average Power (dBm) | | | | |
| | | | | 23035 | 23095 | 23155 | MPR | Tune-up Limit |
| | | | | 701.5 MHz | 707.5 MHz | 713.5 MHz | | |
| 5 MHz | QPSK | 1 | 0 | 23.50 | 23.50 | 23.40 | 0 | 24 |
| | | 1 | 12 | 23.80 | 23.80 | 23.80 | 0 | 24 |
| | | 1 | 24 | 23.30 | 23.70 | 23.40 | 0 | 24 |
| | | 12 | 0 | 22.60 | 22.60 | 22.40 | 1 | 23 |
| | | 12 | 7 | 22.60 | 22.50 | 22.50 | 1 | 23 |
| | | 12 | 13 | 22.40 | 22.40 | 22.50 | 1 | 23 |
| | | 25 | 0 | 22.60 | 22.50 | 22.50 | 1 | 23 |
| BW (MHz) | Mode | RB Allocation | RB offset | Maximum Average Power (dBm) | | | | |
| | | | | 23025 | 23095 | 23165 | MPR | Tune-up Limit |
| | | | | 700.5 MHz | 707.5 MHz | 714.5 MHz | | |
| 3 MHz | QPSK | 1 | 0 | 23.90 | 23.40 | 23.50 | 0 | 24 |
| | | 1 | 8 | 23.90 | 23.70 | 23.50 | 0 | 24 |
| | | 1 | 14 | 23.70 | 23.60 | 23.50 | 0 | 24 |
| | | 8 | 0 | 22.50 | 22.60 | 22.50 | 1 | 23 |
| | | 8 | 4 | 22.50 | 22.50 | 22.50 | 1 | 23 |
| | | 8 | 7 | 22.40 | 22.50 | 22.50 | 1 | 23 |
| | | 15 | 0 | 22.50 | 22.50 | 22.50 | 1 | 23 |
| | 16QAM | 1 | 0 | 22.40 | 22.20 | 22.20 | 1 | 23 |
| | | 1 | 8 | 22.10 | 22.30 | 22.10 | 1 | 23 |
| | | 1 | 14 | 22.10 | 22.30 | 22.10 | 1 | 23 |
| | | 8 | 0 | 21.90 | 22.00 | 21.30 | 2 | 22 |
| | | 8 | 4 | 21.80 | 21.90 | 21.20 | 2 | 22 |
| | | 8 | 7 | 21.50 | 21.90 | 21.80 | 2 | 22 |
| | | 15 | 0 | 21.40 | 21.50 | 21.60 | 2 | 22 |
| BW (MHz) | Mode | RB Allocation | RB offset | Maximum Average Power (dBm) | | | | |
| | | | | 23017 | 23095 | 23173 | MPR | Tune-up Limit |
| | | | | 699.7 MHz | 707.5 MHz | 715.3 MHz | | |
| 1.4 MHz | QPSK | 1 | 0 | 23.50 | 23.80 | 23.50 | 0 | 24 |
| | | 1 | 3 | 23.60 | 23.60 | 23.90 | 0 | 24 |
| | | 1 | 5 | 23.50 | 23.70 | 23.70 | 0 | 24 |
| | | 3 | 0 | 23.00 | 23.00 | 23.00 | 0 | 24 |
| | | 3 | 1 | 23.00 | 23.00 | 23.00 | 0 | 24 |
| | | 3 | 3 | 23.00 | 23.00 | 23.00 | 0 | 24 |
| | | 6 | 0 | 22.40 | 22.60 | 22.40 | 1 | 23 |
| | 16QAM | 1 | 0 | 22.30 | 22.20 | 22.10 | 1 | 23 |
| | | 1 | 3 | 22.20 | 22.70 | 22.30 | 1 | 23 |
| | | 1 | 5 | 22.40 | 22.50 | 22.30 | 1 | 23 |
| | | 3 | 0 | 22.00 | 22.00 | 21.90 | 1 | 23 |
| | | 3 | 1 | 22.00 | 22.00 | 22.00 | 1 | 23 |
| | | 3 | 3 | 21.90 | 22.00 | 22.00 | 1 | 23 |
| | | 6 | 0 | 21.57 | 21.65 | 21.85 | 2 | 22 |

Note(s):

- 10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.
- Device supports LTE UE Category 1 only. Therefore, 16QAM only supports channel bandwidths up to 5MHz per Table A.2.2.1.2-1 of 3GPP TS 36.101 version 13.2.1 Release 13.

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

Reported SAR(W/kg) for WWAN= Measured SAR *Tune-up Scaling Factor

Reported SAR(W/kg) for Wi-Fi and Bluetooth= Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

10.2. W-CDMA Band II

| RF Exposure Conditions | Mode | Dist. (mm) | Test Position | Ch #. | Freq. (MHz) | Power (dBm) | | 1-g SAR (W/kg) | | Plot No. |
|------------------------|------------|------------|---------------|-------|-------------|---------------|-------|----------------|--------------|----------|
| | | | | | | Tune-up limit | Meas. | Meas. | Scaled | |
| Next to Mouth | Rel 99 RMC | 10 | Front | 9400 | 1880.0 | 18.5 | 18.1 | 0.226 | 0.248 | 1 |
| Body-worn | Rel 99 RMC | 0 | Rear | 9262 | 1852.4 | 18.5 | 18.1 | 1.140 | 1.259 | 2 |
| | | | | 9400 | 1880.0 | 18.5 | 18.1 | 1.270 | 1.393 | |
| | | | | 9538 | 1907.6 | 18.5 | 18.1 | 1.180 | 1.294 | |
| | | | Front | 9262 | 1852.4 | 18.5 | 18.1 | 0.833 | 0.920 | |
| | | | | 9400 | 1880.0 | 18.5 | 18.1 | 0.866 | 0.950 | |
| | | | | 9538 | 1907.6 | 18.5 | 18.1 | 0.889 | 0.975 | |
| | | | Edge 2 | 9400 | 1880.0 | 18.5 | 18.1 | 0.197 | 0.216 | |
| | | | Edge 3 | 9262 | 1852.4 | 18.5 | 18.1 | 0.849 | 0.937 | |
| | | | | 9400 | 1880.0 | 18.5 | 18.1 | 0.887 | 0.973 | |
| | | | | 9538 | 1907.6 | 18.5 | 18.1 | 0.875 | 0.959 | |
| | | | Edge 4 | 9262 | 1852.4 | 18.5 | 18.1 | 0.762 | 0.841 | |
| | | | | 9400 | 1880.0 | 18.5 | 18.1 | 0.757 | 0.830 | |
| | | | | 9538 | 1907.6 | 18.5 | 18.1 | 0.690 | 0.757 | |

10.3. W-CDMA Band IV

| RF Exposure Conditions | Mode | Dist. (mm) | Test Position | Ch #. | Freq. (MHz) | Power (dBm) | | 1-g SAR (W/kg) | | Plot No. |
|------------------------|------------|------------|---------------|-------|-------------|---------------|-------|----------------|--------------|----------|
| | | | | | | Tune-up limit | Meas. | Meas. | Scaled | |
| Next to Mouth | Rel 99 RMC | 10 | Front | 1413 | 1732.6 | 19.0 | 17.9 | 0.175 | 0.225 | 3 |
| Body-worn | Rel 99 RMC | 0 | Rear | 1312 | 1712.4 | 19.0 | 17.9 | 0.910 | 1.180 | 4 |
| | | | | 1413 | 1732.6 | 19.0 | 17.9 | 0.913 | 1.173 | |
| | | | | 1513 | 1752.6 | 19.0 | 18.0 | 0.922 | 1.169 | |
| | | | Front | 1312 | 1712.4 | 19.0 | 17.9 | 0.715 | 0.927 | |
| | | | | 1413 | 1732.6 | 19.0 | 17.9 | 0.691 | 0.888 | |
| | | | | 1513 | 1752.6 | 19.0 | 18.0 | 0.759 | 0.962 | |
| | | | Edge 2 | 1413 | 1732.6 | 19.0 | 17.9 | 0.096 | 0.123 | |
| | | | Edge 3 | 1312 | 1712.4 | 19.0 | 17.9 | 0.857 | 1.112 | |
| | | | | 1413 | 1732.6 | 19.0 | 17.9 | 0.878 | 1.128 | |
| | | | | 1513 | 1752.6 | 19.0 | 18.0 | 0.844 | 1.070 | |
| | | | Edge 4 | 1413 | 1732.6 | 19.0 | 17.9 | 0.552 | 0.709 | |

10.4. W-CDMA Band V

| RF Exposure Conditions | Mode | Dist. (mm) | Test Position | Ch #. | Freq. (MHz) | Power (dBm) | | 1-g SAR (W/kg) | | Plot No. |
|------------------------|------------|------------|---------------|-------|-------------|---------------|-------|----------------|--------------|----------|
| | | | | | | Tune-up limit | Meas. | Meas. | Scaled | |
| Next to Mouth | Rel 99 RMC | 10 | Front | 4183 | 836.6 | 25.0 | 24.2 | 0.315 | 0.376 | 5 |
| Body-worn | Rel 99 RMC | 0 | Rear | 4132 | 826.4 | 25.0 | 24.2 | 0.862 | 1.032 | |
| | | | | 4183 | 836.6 | 25.0 | 24.2 | 0.827 | 0.987 | |
| | | | | 4233 | 846.6 | 25.0 | 24.2 | 0.884 | 1.055 | |
| | | | Front | 4132 | 826.4 | 25.0 | 24.2 | 0.909 | 1.088 | 6 |
| | | | | 4183 | 836.6 | 25.0 | 24.2 | 0.951 | 1.135 | |
| | | | | 4233 | 846.6 | 25.0 | 24.2 | 0.912 | 1.089 | |
| | | | Edge 2 | 4183 | 836.6 | 25.0 | 24.2 | 0.487 | 0.581 | |
| | | | Edge 3 | 4183 | 836.6 | 25.0 | 24.2 | 0.590 | 0.704 | |
| | | | Edge 4 | 4183 | 836.6 | 25.0 | 24.2 | 0.307 | 0.367 | |

10.5. LTE Band 2 (20MHz Bandwidth)

| RF Exposure Conditions | Mode | Dist. (mm) | Test Position | Ch #. | Freq. (MHz) | RB Allocation | RB offset | Power (dBm) | | 1-g SAR (W/kg) | | Plot No. |
|------------------------|------|------------|---------------|-------|-------------|---------------|-----------|---------------|-------|----------------|--------------|----------|
| | | | | | | | | Tune-up limit | Meas. | Meas. | Scaled | |
| Next to Mouth | QPSK | 10 | Front | 18900 | 1880.0 | 1 | 49 | 17.5 | 16.8 | 0.196 | 0.231 | 7 |
| | | | | | | 50 | 50 | 16.5 | 16.1 | 0.143 | 0.155 | |
| Body-worn | QPSK | 0 | Rear | 18700 | 1860.0 | 1 | 49 | 17.5 | 17.3 | 1.130 | 1.197 | 8 |
| | | | | | | 50 | 24 | 16.5 | 16.2 | 0.867 | 0.929 | |
| | | | | 18900 | 1880.0 | 1 | 49 | 17.5 | 16.8 | 1.170 | 1.381 | |
| | | | | | | 50 | 50 | 16.5 | 16.1 | 0.898 | 0.976 | |
| | | | | | | 100 | 0 | 16.5 | 16.2 | 0.849 | 0.906 | |
| | | | | | | 1 | 49 | 17.5 | 17.3 | 1.090 | 1.152 | |
| | | | Front | 19100 | 1900.0 | 50 | 0 | 16.5 | 16.4 | 0.877 | 0.899 | |
| | | | | | | 1 | 49 | 17.5 | 17.3 | 0.774 | 0.820 | |
| | | | | 18700 | 1860.0 | 1 | 49 | 17.5 | 16.8 | 0.757 | 0.894 | |
| | | | | | | 50 | 50 | 16.5 | 16.1 | 0.602 | 0.654 | |
| | | | | | | 1 | 49 | 17.5 | 16.2 | 0.732 | 0.983 | |
| | | | | | | 50 | 0 | 16.5 | 16.1 | 0.602 | 0.654 | |
| | | | Edge 2 | 18900 | 1880.0 | 1 | 49 | 17.5 | 16.8 | 0.104 | 0.123 | |
| | | | | | | 50 | 50 | 16.5 | 16.1 | 0.082 | 0.089 | |
| | | | Edge 3 | 18900 | 1880.0 | 1 | 49 | 17.5 | 16.8 | 0.649 | 0.766 | |
| | | | | | | 50 | 50 | 16.5 | 16.1 | 0.600 | 0.652 | |
| | | | Edge 4 | 18900 | 1880.0 | 1 | 49 | 17.5 | 16.8 | 0.477 | 0.563 | |
| | | | | | | 50 | 50 | 16.5 | 16.1 | 0.390 | 0.424 | |

10.6. LTE Band 4 (20MHz Bandwidth)

| RF Exposure Conditions | Mode | Dist. (mm) | Test Position | Ch #. | Freq. (MHz) | RB Allocation | RB offset | Power (dBm) | | 1-g SAR (W/kg) | | Plot No. |
|------------------------|------|------------|---------------|-------|-------------|---------------|-----------|---------------|-------|----------------|--------------|----------|
| | | | | | | | | Tune-up limit | Meas. | Meas. | Scaled | |
| Next to Mouth | QPSK | 10 | Front | 20175 | 1732.5 | 1 | 49 | 17.5 | 16.6 | 0.109 | 0.135 | 9 |
| | | | | | | 50 | 0 | 16.5 | 15.7 | 0.086 | 0.103 | |
| Body-worn | QPSK | 0 | Rear | 20175 | 1732.5 | 1 | 49 | 17.5 | 16.6 | 0.763 | 0.943 | 10 |
| | | | | | | 50 | 0 | 16.5 | 15.7 | 0.649 | 0.778 | |
| | | | | | | 100 | 0 | 16.5 | 15.6 | 0.817 | 0.998 | |
| | | | Front | 20175 | 1732.5 | 1 | 49 | 17.5 | 16.6 | 0.610 | 0.754 | |
| | | | | | | 50 | 0 | 16.5 | 15.7 | 0.480 | 0.576 | |
| | | | | | | 100 | 0 | 16.5 | 15.6 | 0.493 | 0.602 | |
| | | | Edge 2 | 20175 | 1732.5 | 1 | 49 | 17.5 | 16.6 | 0.061 | 0.075 | |
| | | | | | | 50 | 0 | 16.5 | 15.7 | 0.051 | 0.061 | |
| | | | Edge 3 | 20175 | 1732.5 | 1 | 49 | 17.5 | 16.6 | 0.666 | 0.823 | |
| | | | | | | 50 | 0 | 16.5 | 15.7 | 0.551 | 0.661 | |
| | | | Edge 4 | 20175 | 1732.5 | 1 | 49 | 17.5 | 16.6 | 0.561 | 0.685 | |
| | | | | | | 50 | 0 | 16.5 | 15.7 | 0.371 | 0.445 | |

10.7. LTE Band 12 (10MHz Bandwidth)

| RF Exposure Conditions | Mode | Dist. (mm) | Test Position | Ch #. | Freq. (MHz) | RB Allocation | RB offset | Power (dBm) | | 1-g SAR (W/kg) | | Plot No. |
|------------------------|------|------------|---------------|-------|-------------|---------------|-----------|---------------|-------|----------------|--------------|----------|
| | | | | | | | | Tune-up limit | Meas. | Meas. | Scaled | |
| Next to Mouth | QPSK | 10 | Front | 23095 | 707.5 | 1 | 49 | 24.0 | 23.8 | 0.338 | 0.354 | 11 |
| | | | | | | 25 | 12 | 23.0 | 22.7 | 0.252 | 0.271 | |
| Body-worn | QPSK | 0 | Rear | 23095 | 707.5 | 1 | 49 | 24.0 | 23.8 | 0.794 | 0.831 | 12 |
| | | | | | | 25 | 12 | 23.0 | 22.7 | 0.667 | 0.718 | |
| | | | | | | 50 | 0 | 23.0 | 22.6 | 0.638 | 0.706 | |
| | | | Front | 23095 | 707.5 | 1 | 49 | 24.0 | 23.8 | 0.902 | 0.945 | |
| | | | | | | 25 | 12 | 23.0 | 22.7 | 0.756 | 0.814 | |
| | | | | | | 50 | 0 | 23.0 | 22.6 | 0.740 | 0.819 | |
| | | | Edge 2 | 23095 | 707.5 | 1 | 49 | 24.0 | 23.8 | 0.581 | 0.608 | |
| | | | | | | 25 | 12 | 23.0 | 22.7 | 0.511 | 0.550 | |
| | | | Edge 3 | 23095 | 707.5 | 1 | 49 | 24.0 | 23.8 | 0.525 | 0.550 | |
| | | | | | | 25 | 12 | 23.0 | 22.7 | 0.462 | 0.497 | |
| | | | Edge 4 | 23095 | 707.5 | 1 | 49 | 24.0 | 23.8 | 0.387 | 0.405 | |
| | | | | | | 25 | 12 | 23.0 | 22.7 | 0.367 | 0.395 | |

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg (~ 10% from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

| Frequency Band (MHz) | Air Interface | RF Exposure Conditions | Test Position | Repeated SAR (Yes/No) | Highest Measured SAR (W/kg) | First | |
|----------------------|---------------|------------------------|---------------|-----------------------|-----------------------------|---------------------|-------------------------------|
| | | | | | | Measured SAR (W/kg) | Largest to Smallest SAR Ratio |
| 700 | LTE Band 12 | Body | Front | Yes | 0.902 | 0.867 | 1.04 |
| 850 | WCDMA Band V | Body | Front | Yes | 0.951 | 0.921 | 1.03 |
| 1700 | WCDMA Band IV | Body | Rear | Yes | 0.922 | 0.905 | 1.02 |
| | LTE Band 4 | Body | Rear | No | 0.817 | 0.802 | 1.02 |
| 1900 | WCDMA Band II | Body | Rear | Yes | 1.270 | 1.250 | 1.02 |
| | LTE Band 2 | Body | Rear | No | 1.170 | 1.160 | 1.01 |

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is < 1.20 .

12. Simultaneous Transmission SAR Analysis

The DUT does not support simultaneous transmission.

Appendixes

Refer to separated files for the following appendixes.

12040492-S1V1 Appendix A: SAR Setup Photos

12040492-S1V1 Appendix B: SAR System Check Plots

12040492-S1V1 Appendix C: Highest SAR Test Plots

12040492-S1V1 Appendix D: SAR Liquid Tissue Ingredients

12040492-S1V1 Appendix E: SAR Probe Calibration Certificate

12040492-S1V1 Appendix F: SAR Dipole Calibration Certificates

END OF REPORT