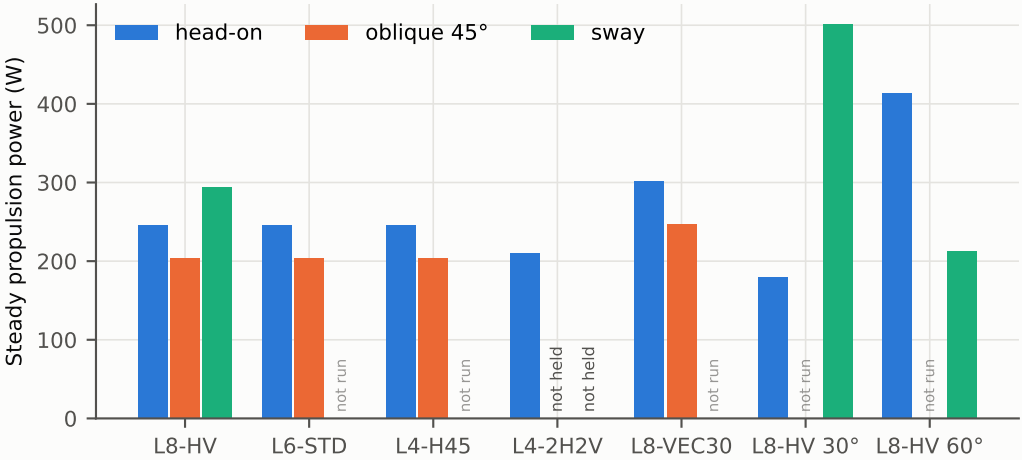
Steady propulsion power (W)
0
100
200
300
400
500
head-on
oblique 45°
sway
not run
not run
not held
not held
not run
not run
not run
L8-HV
L6-STD
L4-H45
L4-2H2V
L8-VEC30
L8-HV 30°
L8-HV 60°