

# FCC TEST REPORT

For

WISNETWORKS Technology Co., Ltd

Smart Wireless Router

Model No.: AirMesh

Prepared For : WISNETWORKS Technology Co., Ltd

Address : No.77, FuTe West 3 Road, Pilot Free Trade Zone, Shanghai, China

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited

Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

Tel: (86) 755-26066544 Fax: (86) 755-26014772

Report Number : R0217060259W1

Date of Test : Jun. 08~Jul. 10, 2017

Date of Report : Jul. 10, 2017

# Contents

1. General Information .....	5
1.1. Client Information .....	5
1.2. Description of Device (EUT) .....	5
1.3. Auxiliary Equipment Used During Test .....	6
1.4. Description of Test Modes.....	7
1.5. List of channels .....	8
1.6. Description Of Test Setup .....	9
1.7. Test Equipment List.....	10
1.8. Measurement Uncertainty .....	11
1.9. Description of Test Facility .....	11
2. Summary of Test Results.....	12
3. Conducted Emission Test .....	13
3.1. Test Standard and Limit.....	13
3.2. Test Setup .....	13
3.3. Test Procedure .....	13
3.4. Test Data.....	13
4. Radiation Spurious Emission and Band Edge .....	18
4.1. Test Standard and Limit.....	18
4.2. Test Setup .....	18
4.3. Test Procedure .....	19
4.4. Test Data.....	20
5. Maximum Peak Output Power Test.....	47
5.1. Test Standard and Limit.....	47
5.2. Test Setup .....	47
5.3. Test Procedure .....	47
5.4. Test Data.....	47
6. 6DB Occupy Bandwidth Test.....	53
6.1. Test Standard and Limit.....	53
6.2. Test Setup .....	53
6.3. Test Procedure .....	53
6.4. Test Data.....	53
7. Power Spectral Density Test.....	67
7.1. Test Standard and Limit.....	67
7.2. Test Setup .....	67
7.3. Test Procedure .....	67
7.4. Test Data.....	67
8. 100kHz Bandwidth of Frequency Band Edge Requirement .....	81
8.1. Test Standard and Limit.....	81
8.2. Test Setup .....	81
8.3. Test Procedure .....	81
8.4. Test Data.....	81
9. Antenna Requirement.....	103

9.1. Test Standard and Requirement .....	103
9.2. Antenna Connected Construction .....	103
APPENDIX I -- TEST SETUP PHOTOGRAPH .....	104
APPENDIX II -- EXTERNAL PHOTOGRAPH .....	106
APPENDIX III -- INTERNAL PHOTOGRAPH .....	107

Anbotek

## TEST REPORT

Applicant : WISNETWORKS Technology Co., Ltd  
Manufacturer : WISNETWORKS Technology Co., Ltd  
Product Name : Smart Wireless Router  
Model No. : AirMesh  
Trade Mark : N.A.  
Rating(s) : Input DC 12V 1A (Via adapter AC 100-240V, 50/60HZ, 0.5A)

**Test Standard(s) : FCC Part15 Subpart C 2016, Section 15.247**

**Test Method(s) : ANSI C63.10: 2013, KDB558074 D01 DTS Meas Guidance v04**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Jun. 08~Jul. 10, 2017

Prepared by :



*Winkey Wang*

(Tested Engineer / Winkey Wang)

Reviewer :

*Tangcy. T.*

(Project Manager / Tangcy. T)

Approved & Authorized Signer :

*Tom Chen*

(Manager / Tom Chen)

## 1. General Information

### 1.1. Client Information

Applicant	:	WISNETWORKS Technology Co., Ltd
Address	:	No.77, FuTe West 3 Road, Pilot Free Trade Zone, Shanghai, China
Manufacturer	:	WISNETWORKS Technology Co., Ltd
Address	:	No.77, FuTe West 3 Road, Pilot Free Trade Zone, Shanghai, China

### 1.2. Description of Device (EUT)

Product Name	:	Smart Wireless Router	
Model No.	:	AirMesh	
Trade Mark	:	N.A	
Test Power Supply	:	AC 120V, 60Hz for adapter/AC 240V, 60Hz for adapter	
Product Description	:	Operation Frequency:	WIFI 2.4G: 2412-2462MHz / 2422-2452MHz WIFI 5G: 5745MHz~5825MHz / 5755MHz~5795MHz/ 5775MHz
	:	Number of Channel:	WIFI 2.4G: 11 Channels for 802.11b/ g/ n(HT20) 7 Channels for 802.11n(HT40) WIFI 5G: 4 Channels for 802.11a 4 Channels for 802.11n(HT20) 4 Channels for 802.11ac(HT20) 2 Channels for 802.11n(HT40) 2 Channels for 802.11ac(HT40) 1 Channels for 802.11ac(HT80)
	:	Modulation Type:	OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a/g/n; OFDM with BPSK/QPSK/16QAM/64QAM/ 256QAM for 802.11ac
	:	Antenna Type:	Internal antenna 2X2 MIMO
	:	Antenna Gain(Peak):	2.4G WIFI ANT 1: 7dBi 2.4G WIFI ANT 2: 7dBi
<b>Remark:</b> 1) For a more detailed features description, please refer to the manufacturer’s specifications or the User’s Manual. 2) This report is for 2.4G WIFI. 3) For 802.11 802.11n/802.11ac mode, directional gain=GANT +10log(N)dBi =10.1dBi			

### 1.3. Auxiliary Equipment Used During Test

Adapter	:	M/N: HS36-1201000CH Input: 100-240V~50/60Hz 0.5A Max Output: DC 12V, 1A Remark: The adapter was provided by customer.
PC	:	Manufacturer: DELL
		M/N: Optiplex 3020 MT S/N: CN-079V51-70163-4AD-089K-A00 Input Rating: AC 100-240V, 50-60Hz 5.4A CE , FCC DOC, CCC
MONITOR	:	Manufacturer: DELL
		M/N: UZ2215Hf S/N: CN-035VN6-72872-45A-A3AB Input Rating: AC 100-240V, 50-60Hz, 1.5A Output Rating: DC 19.5V, 4.62A TUV-GS FCC CE KCC VCCI
KEYBOARD	:	Manufacturer: DELL
		M/N: SK-8120 S/N: CN-0DJ365-71616-49J-0MVR-A00 Input Rating: DC 5V,0.05A CE FCC VCCI KCC TUV-GS Cable: 1.8m, unshielded
MOUSE	:	Manufacturer: DELL
		M/N: MS111-T S/N: CN-0KW2YH-71616-488-1CBJ Input Rating: DC 5V,0.1A Cable: 1.8m, unshielded CE FCC VCCI KCC TUV-GS

## 1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

### RADIATED EMISSION TEST (BELOW 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Test Channel	Modulation Tech.	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1	CCK	DBPSK	1.0

For the test results, only the worst case was shown in test report.

### RADIATED EMISSION TEST (ABOVE 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Test Channel	Modulation Tech.	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

### POWER LINE CONDUCTED EMISSION TEST:

The EUT was tested with the following mode

EUT configure mode	Test Mode
-	Keeping TX mode

### BANDEDGE MEASUREMENT:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Test Channel	Modulation Tech.	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 9	OFDM	BPSK	13.5

#### ANTENNA PORT CONDUCTED MEASUREMENT:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Test Channel	Modulation Tech.	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3,6, 9	OFDM	BPSK	13.5


#### 1.5. List of channels

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		




## 1.6. Description Of Test Setup

CE

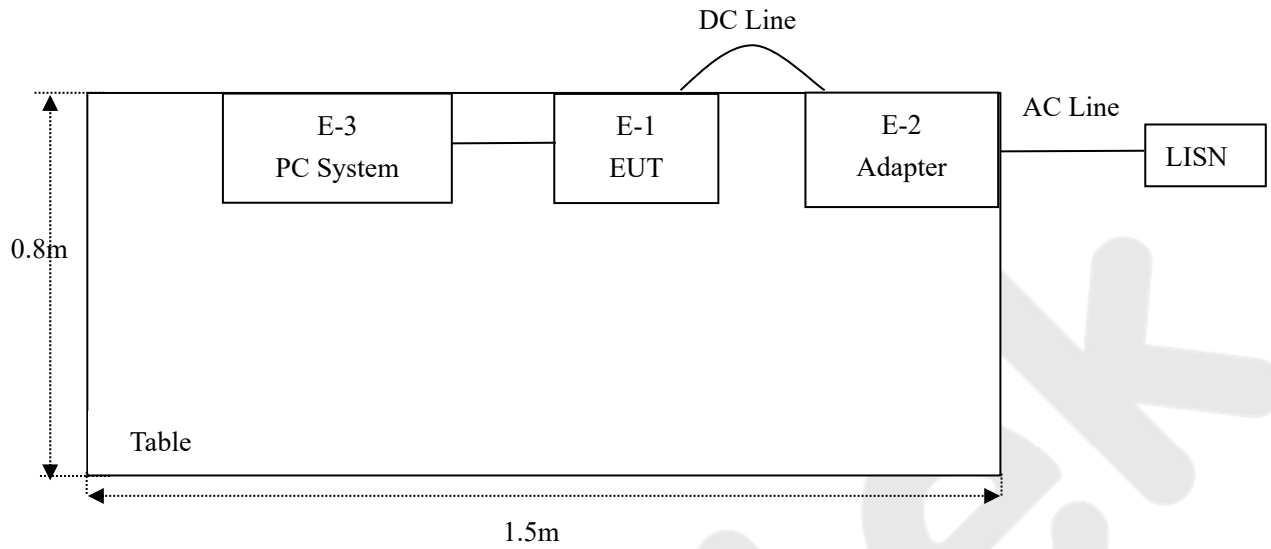

RE

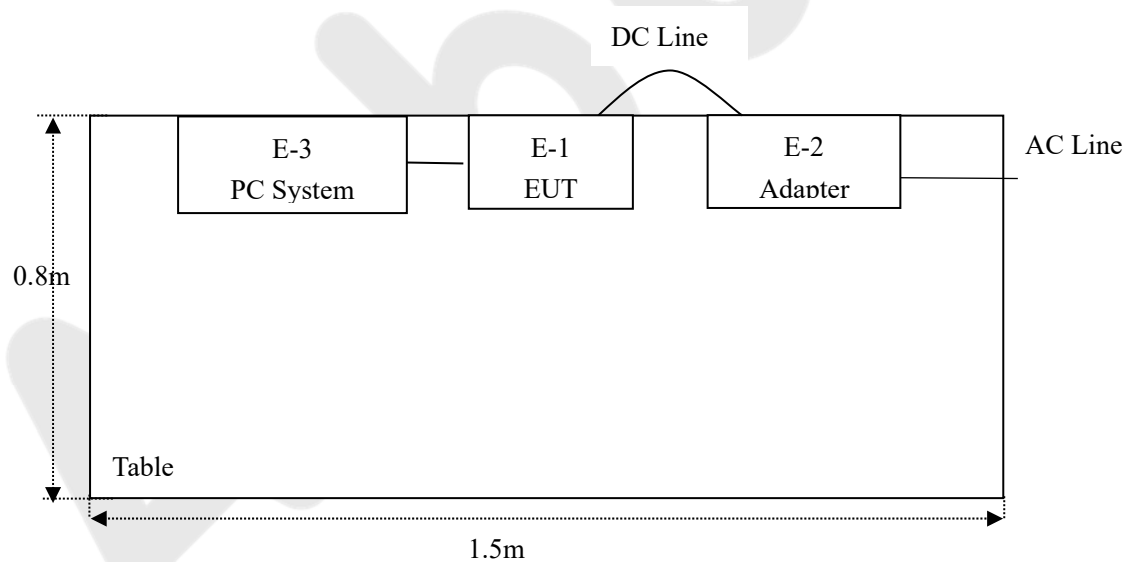

## 1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	May 27, 2017	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	May 27, 2017	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 27, 2017	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	May 27, 2017	1 Year
5.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	May 27, 2017	1 Year
6.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	May 27, 2017	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	May 31, 2017	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 31, 2017	1 Year
9.	Loop Antenna	Schwarzbeck	HFH2-Z2	100047	Apr. 03, 2017	1 Year
10.	Pre-amplifier	SONOMA	310N	186860	May 27, 2017	1 Year
11.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
12.	Power Sensor	DAER	RPR3006W	15I00041SN045	May 27, 2017	1 Year
13.	Power Sensor	DAER	RPR3006W	15I00041SN046	May 27, 2017	1 Year
14.	Power Meter	Agilent	N1914A	MY50001102	May 27, 2017	1 Year
15.	Power Sensor	Agilent	N8481H	MY51240001	May 27, 2017	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	May 27, 2017	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	May 27, 2017	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	May 27, 2017	1 Year
19.	DC Power supply	IVYTECH	IV6003	1601D6030007	May 26, 2017	1 Year
20.	TEMP&HUMI PROGRAMMABLE CHAMBER	Sertep	ZJ-HWHS80 B	ZJ-17042804	Mar. 03, 2017	1 Year

## 1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 4.1 dB (Horizontal)
		Ur = 4.3 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4dB

## 1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### FCC-Designation No.: CN5023

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation CN5023, July 31, 2017.

### ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

### Test Location

All Emissions tests were performed at

Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

## 2. Summary of Test Results

Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.247(b)(3)	Conducted Peak Output Power	PASS
15.247(a)(2)	6dB Occupied Bandwidth	PASS
15.247(e)	Power Spectral Density	PASS
15.247(d)	Band Edge	PASS
<b>Remark:</b> “N/A” is an abbreviation for Not Applicable.		


### 3. Conducted Emission Test

#### 3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

**Remark:** (1) \*Decreasing linearly with logarithm of the frequency.  
(2) The lower limit shall apply at the transition frequency.

#### 3.2. Test Setup

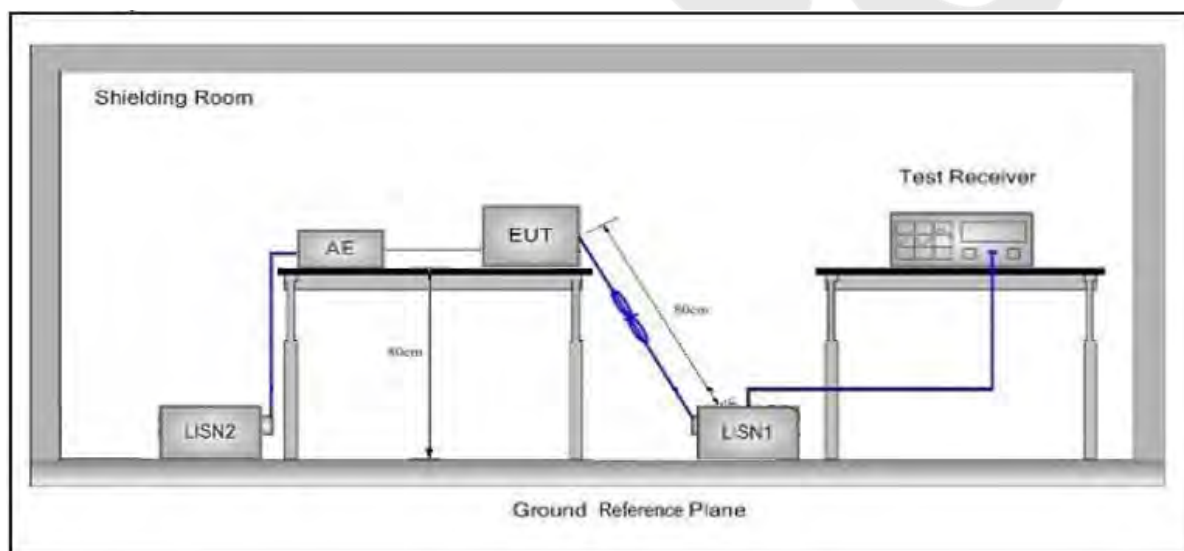

#### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

#### 3.4. Test Data

Please to see the following pages

## Conducted Emission Test Data

Test Site: 1# Shielded Room  
Operating Condition: Keeping TX mode  
Test Specification: AC 120V, 60Hz for adapter  
Comment: Live Line  
Tem.:25°C Hum.:50%

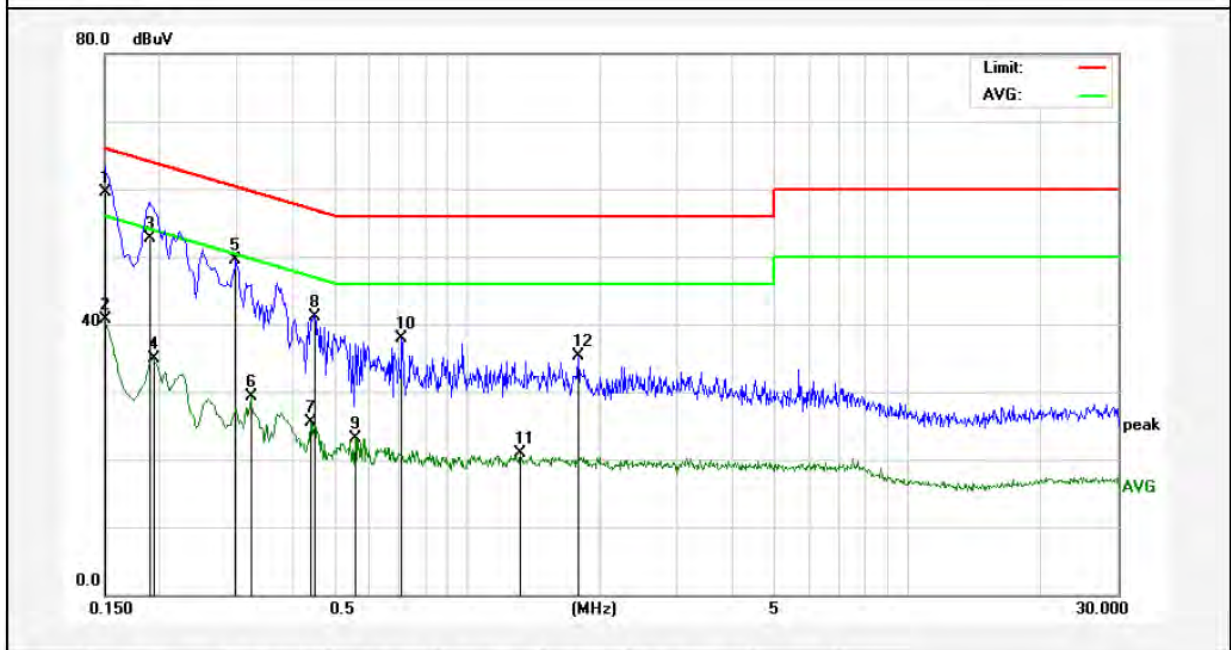


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	39.54	19.90	59.44	65.99	-6.55	QP	
2	0.1500	20.89	19.90	40.79	55.99	-15.20	AVG	
3	0.1900	32.87	19.90	52.77	64.03	-11.26	QP	
4	0.1940	14.98	19.90	34.88	53.86	-18.98	AVG	
5	0.2980	29.60	19.89	49.49	60.30	-10.81	QP	
6	0.3220	9.37	19.90	29.27	49.65	-20.38	AVG	
7	0.4420	5.46	19.95	25.41	47.02	-21.61	AVG	
8	0.4500	21.24	19.96	41.20	56.87	-15.67	QP	
9	0.5580	3.18	20.00	23.18	46.00	-22.82	AVG	
10	0.7100	17.93	20.04	37.97	56.00	-18.03	QP	
11	1.3180	0.79	20.13	20.92	46.00	-25.08	AVG	
12	1.7900	15.22	20.14	35.36	56.00	-20.64	QP	



### Conducted Emission Test Data


Test Site: 1# Shielded Room  
Operating Condition: Keeping TX mode  
Test Specification: AC 120V, 60Hz for adapter  
Comment: Neutral Line  
Tem.:25°C Hum.:50%

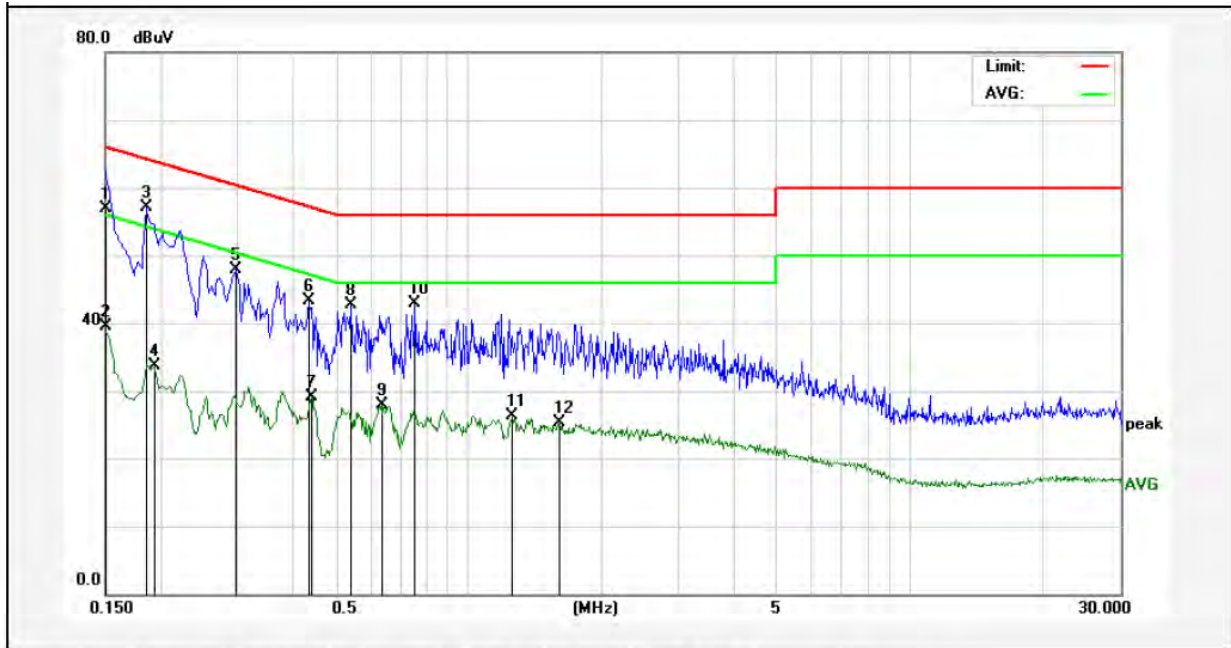

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	37.07	19.90	56.97	65.99	-9.02	QP	
2	0.1500	19.53	19.90	39.43	55.99	-16.56	AVG	
3	0.1860	37.16	19.90	57.06	64.21	-7.15	QP	
4	0.1940	13.85	19.90	33.75	53.86	-20.11	AVG	
5	0.2980	28.10	19.89	47.99	60.30	-12.31	QP	
6	0.4340	23.33	19.95	43.28	57.18	-13.90	QP	
7	0.4420	9.17	19.95	29.12	47.02	-17.90	AVG	
8	0.5420	22.80	19.99	42.79	56.00	-13.21	QP	
9	0.6380	7.82	20.02	27.84	46.00	-18.16	AVG	
10	0.7580	22.89	20.06	42.95	56.00	-13.05	QP	
11	1.2579	6.16	20.13	26.29	46.00	-19.71	AVG	
12	1.6060	5.10	20.13	25.23	46.00	-20.77	AVG	

### Conducted Emission Test Data

Test Site: 1# Shielded Room  
Operating Condition: Keeping TX mode  
Test Specification: AC 240V, 60Hz for adapter  
Comment: Live Line  
Tem.:25°C Hum.:50%

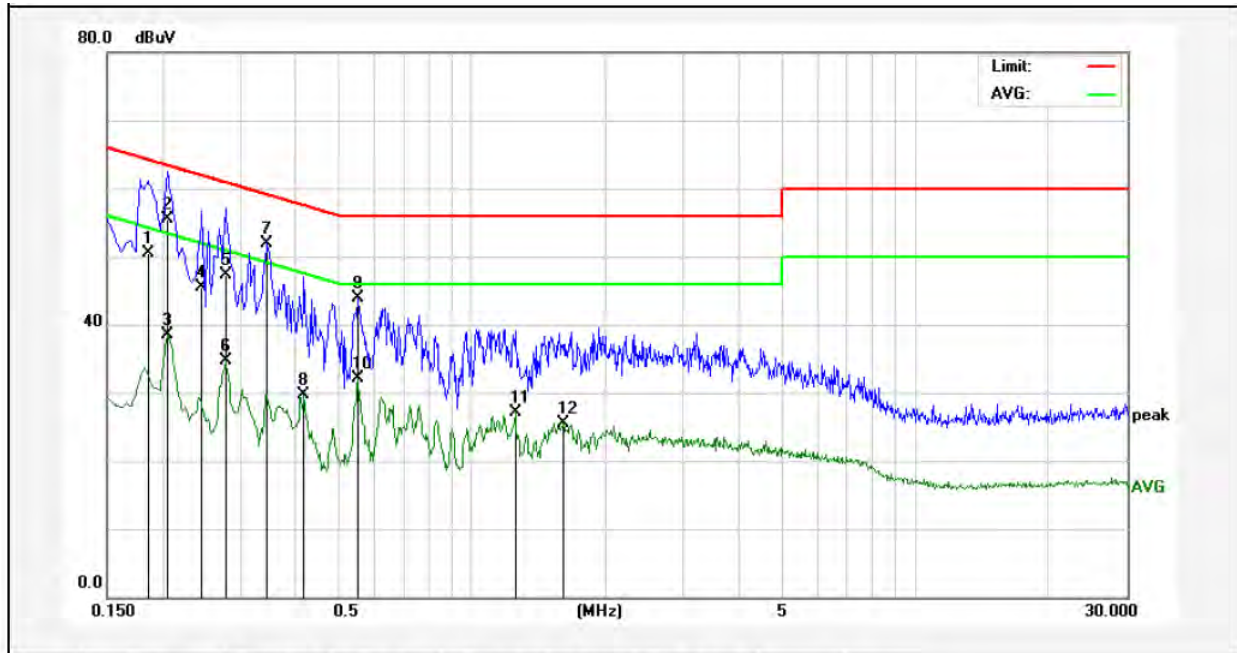


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1860	30.55	19.90	50.45	64.21	-13.76	QP	
2	0.2060	35.67	19.90	55.57	63.36	-7.79	QP	
3	0.2060	18.62	19.90	38.52	53.36	-14.84	AVG	
4	0.2460	25.71	19.89	45.60	61.89	-16.29	QP	
5	0.2779	27.49	19.89	47.38	60.88	-13.50	QP	
6	0.2779	14.73	19.89	34.62	50.88	-16.26	AVG	
7	0.3460	32.08	19.91	51.99	59.06	-7.07	QP	
8	0.4180	9.81	19.94	29.75	47.49	-17.74	AVG	
9	0.5540	23.99	20.00	43.99	56.00	-12.01	QP	
10	0.5540	12.11	20.00	32.11	46.00	-13.89	AVG	
11	1.2500	6.93	20.12	27.05	46.00	-18.95	AVG	
12	1.6060	5.32	20.13	25.45	46.00	-20.55	AVG	



### Conducted Emission Test Data

Test Site: 1# Shielded Room  
Operating Condition: Keeping TX mode  
Test Specification: AC 240V, 60Hz for adapter  
Comment: Neutral Line  
Tem.:25°C Hum.:50%

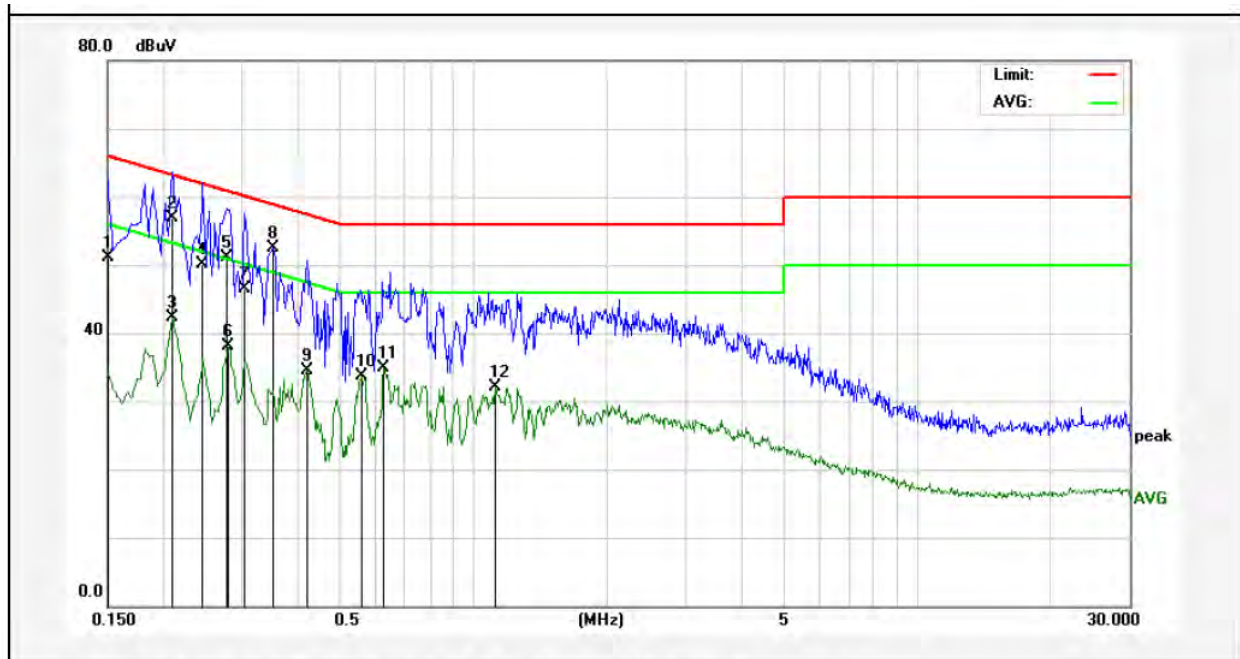

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	31.20	19.90	51.10	65.99	-14.89	QP	
2	0.2100	37.01	19.90	56.91	63.20	-6.29	QP	
3	0.2100	22.34	19.90	42.24	53.20	-10.96	AVG	
4	0.2460	30.23	19.89	50.12	61.89	-11.77	QP	
5	0.2779	31.14	19.89	51.03	60.88	-9.85	QP	
6	0.2819	18.16	19.89	38.05	50.76	-12.71	AVG	
7	0.3060	26.55	19.89	46.44	60.08	-13.64	QP	
8	0.3540	32.65	19.91	52.56	58.87	-6.31	QP	
9	0.4220	14.61	19.94	34.55	47.41	-12.86	AVG	
10	0.5620	13.76	20.00	33.76	46.00	-12.24	AVG	
11	0.6300	14.88	20.02	34.90	46.00	-11.10	AVG	
12	1.1220	12.07	20.12	32.19	46.00	-13.81	AVG	

## 4. Radiation Spurious Emission and Band Edge

### 4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

**Remark:**

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

### 4.2. Test Setup

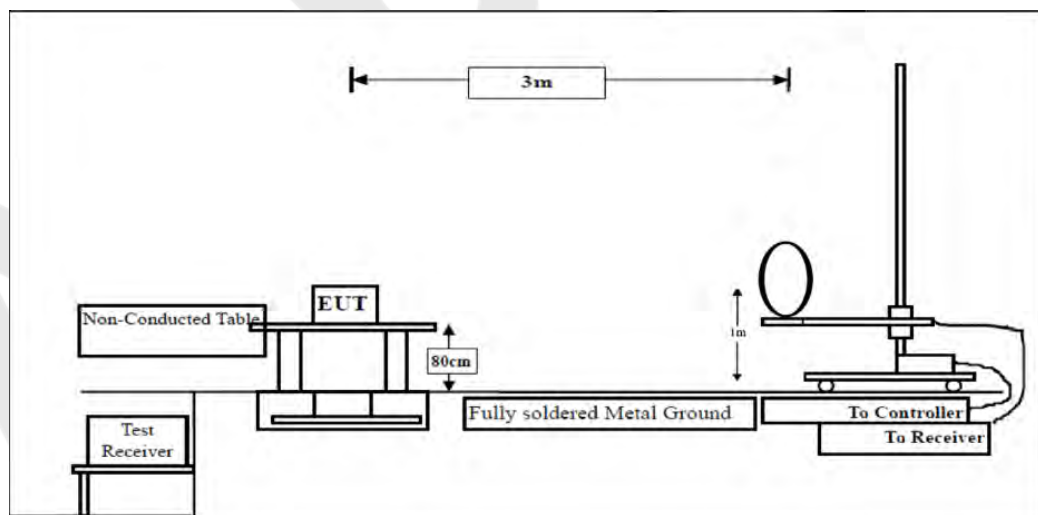


Figure 1. Below 30MHz

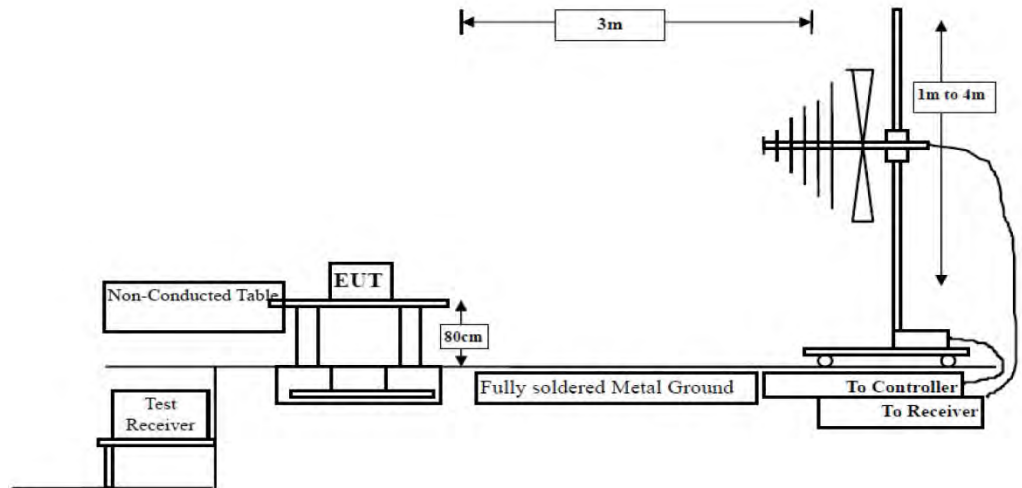


Figure 2. 30MHz to 1GHz

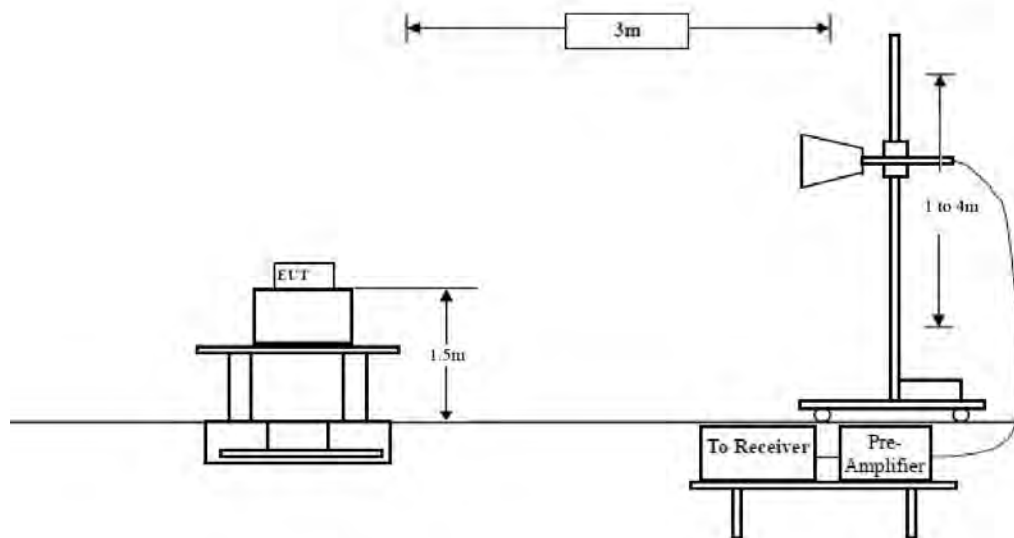


Figure 3. Above 1 GHz

### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

#### **4.4. Test Data**


##### **PASS**

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz and above 18000MHz are attenuated more than 20dB below the permissible limits, so the results don't record in the report.

**Test Results (30~1000MHz)**

Job No.: 0217060259W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH  
Standard: FCC PART 15C Power Source: AC 120V/60Hz for adapter  
Test Mode: TX Mode Polarization: Horizontal

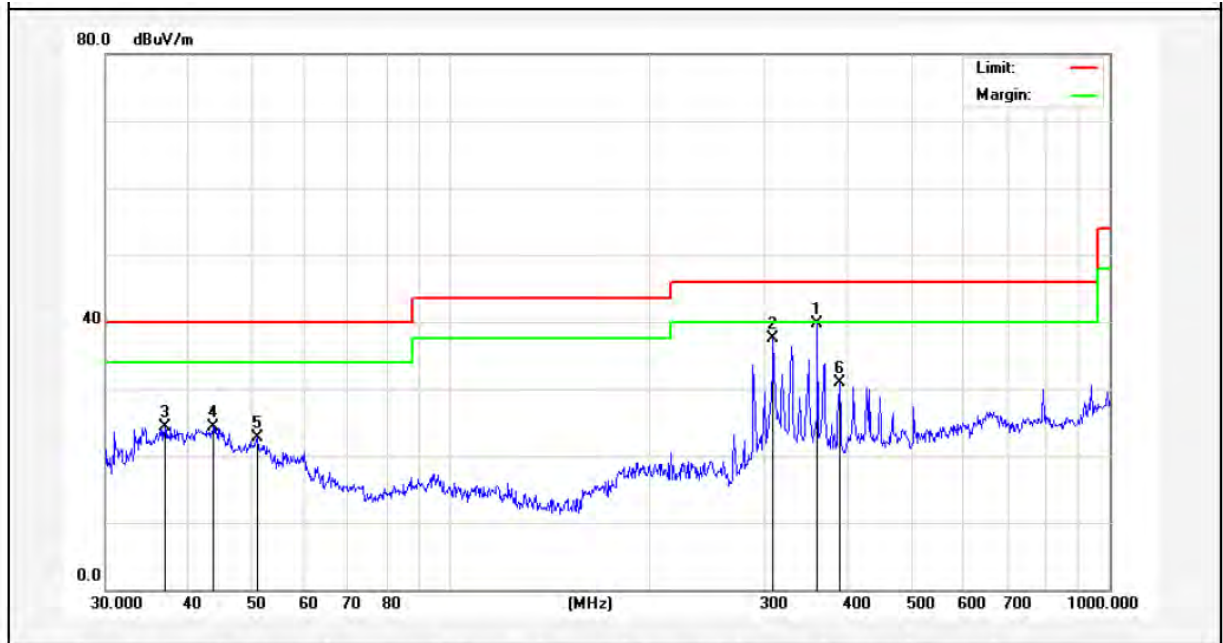


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	360.4476	53.32	-13.65	39.67	46.00	-6.33	QP	300	47	
2	308.9125	54.16	-16.61	37.55	46.00	-8.45	QP	300	82	
3	36.8952	37.17	-12.79	24.38	40.00	-15.62	QP	300	94	
4	43.6584	36.14	-11.80	24.34	40.00	-15.66	QP	300	147	
5	50.9420	37.28	-14.63	22.65	40.00	-17.35	QP	300	188	
6	389.3548	43.92	-13.09	30.83	46.00	-15.17	QP	300	297	



**Test Results (30~1000MHz)**

Job No.: 0217060259W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH  
Standard: FCC PART 15C Power Source: AC 120V/60Hz for adapter  
Test Mode: TX Mode Polarization: Vertical

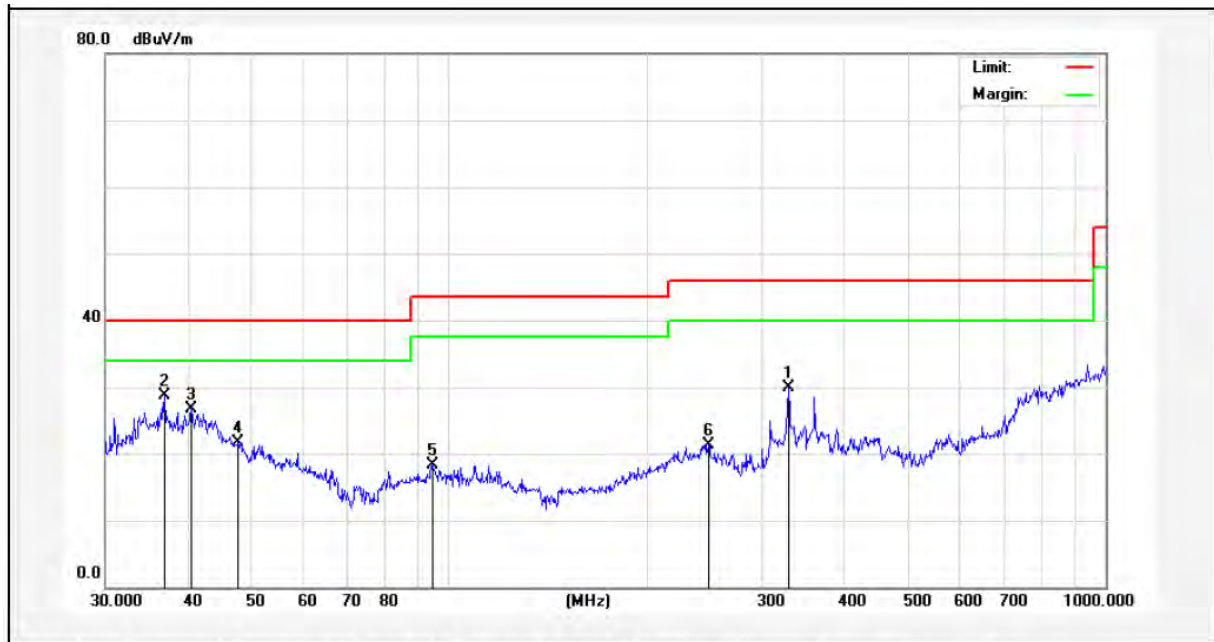

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	329.0389	43.74	-13.83	29.91	46.00	-16.09	QP	300	41	
2	36.8952	41.43	-12.79	28.64	40.00	-11.36	QP	300	94	
3	40.5591	37.32	-10.58	26.74	40.00	-13.26	QP	300	74	
4	47.8260	35.32	-13.60	21.72	40.00	-18.28	QP	300	174	
5	94.4282	34.52	-16.22	18.30	43.50	-25.20	QP	300	220	
6	248.5517	35.44	-14.06	21.38	46.00	-24.62	QP	300	301	

# Test Results (Above 1000MHz)

## ANT 1

Test Mode: 802.11b Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	41.19	34.13	6.61	34.09	47.84	74.00	-26.16	V
7236.00	34.78	37.14	7.74	34.51	45.15	74.00	-28.85	V
9648.00	33.12	39.35	9.26	34.80	46.93	74.00	-27.07	V
12060.00	*					74.00		V
14472.00	*					74.00		V
16884.00	*					74.00		V
4824.00	39.72	34.13	6.61	34.09	46.37	74.00	-27.63	H
7236.00	34.46	37.14	7.74	34.51	44.83	74.00	-29.17	H
9648.00	32.67	39.35	9.26	34.80	46.48	74.00	-27.52	H
12060.00	*					74.00		H
14472.00	*					74.00		H
16884.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	30.20	34.13	6.61	34.09	36.85	54.00	-17.15	V
7236.00	23.63	37.14	7.74	34.51	34.00	54.00	-20.00	V
9648.00	23.45	39.35	9.26	34.80	37.26	54.00	-16.74	V
12060.00	*					54.00		V
14472.00	*					54.00		V
16884.00	*					54.00		V
4824.00	29.21	34.13	6.61	34.09	35.86	54.00	-18.14	H
7236.00	23.03	37.14	7.74	34.51	33.40	54.00	-20.60	H
9648.00	22.40	39.35	9.26	34.80	36.21	54.00	-17.79	H
12060.00	*					54.00		H
14472.00	*					54.00		H
16884.00	*					54.00		H

# Test Results (Above 1000MHz)

## ANT 1

Test Mode: 802.11b Mode					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	40.09	34.35	6.67	34.09	47.02	74.00	-26.98	V
7311.00	34.76	37.21	7.77	34.53	45.21	74.00	-28.79	V
9748.00	34.07	39.45	9.33	34.80	48.05	74.00	-25.95	V
12185.00	*					74.00		V
14622.00	*					74.00		V
17059.00	*					74.00		V
4874.00	40.45	34.35	6.67	34.09	47.38	74.00	-26.62	H
7311.00	33.34	37.21	7.77	34.53	43.79	74.00	-30.21	H
9748.00	33.93	39.45	9.33	34.80	47.91	74.00	-26.09	H
12185.00	*					74.00		H
14622.00	*					74.00		H
17059.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	30.88	34.35	6.67	34.09	37.81	54.00	-16.19	V
7311.00	23.06	37.21	7.77	34.53	33.51	54.00	-20.49	V
9748.00	23.31	39.45	9.33	34.80	37.29	54.00	-16.71	V
12185.00	*					54.00		V
14622.00	*					54.00		V
17059.00	*					54.00		V
4874.00	30.53	34.35	6.67	34.09	37.46	54.00	-16.54	H
7311.00	22.41	37.21	7.77	34.53	32.86	54.00	-21.14	H
9748.00	23.63	39.45	9.33	34.80	37.61	54.00	-16.39	H
12185.00	*					54.00		H
14622.00	*					54.00		H
17059.00	*					54.00		H



# Test Results (Above 1000MHz)

## ANT 1

Test Mode: 802.11b Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	46.15	34.57	6.74	34.09	53.37	74.00	-20.63	V
7386.00	35.77	37.29	7.80	34.55	46.31	74.00	-27.69	V
9848.00	37.60	39.55	9.41	34.81	51.75	74.00	-22.25	V
12310.00	*					74.00		V
14772.00	*					74.00		V
17234.00	*					74.00		V
4924.00	45.26	34.57	6.74	34.09	52.48	74.00	-21.52	H
7386.00	34.57	37.29	7.80	34.55	45.11	74.00	-28.89	H
9848.00	33.73	39.55	9.41	34.81	47.88	74.00	-26.12	H
12310.00	*					74.00		H
14772.00	*					74.00		H
17234.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	36.97	34.57	6.74	34.09	44.19	54.00	-9.81	V
7386.00	25.66	37.29	7.80	34.55	36.20	54.00	-17.80	V
9848.00	26.08	39.55	9.41	34.81	40.23	54.00	-13.77	V
12310.00	*					54.00		V
14772.00	*					54.00		V
17234.00	*					54.00		V
4924.00	35.56	34.57	6.74	34.09	42.78	54.00	-11.22	H
7386.00	23.94	37.29	7.80	34.55	34.48	54.00	-19.52	H
9848.00	22.97	39.55	9.41	34.81	37.12	54.00	-16.88	H
12310.00	*					54.00		H
14772.00	*					54.00		H
17234.00	*					54.00		H

## Test Results (Above 1000MHz)

### ANT 2

Test Mode: 802.11b Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	40.85	34.13	6.61	34.09	47.50	74.00	-26.50	V
7236.00	34.57	37.14	7.74	34.51	44.94	74.00	-29.06	V
9648.00	32.97	39.35	9.26	34.80	46.78	74.00	-27.22	V
12060.00	*					74.00		V
14472.00	*					74.00		V
16884.00	*					74.00		V
4824.00	39.44	34.13	6.61	34.09	46.09	74.00	-27.91	H
7236.00	34.28	37.14	7.74	34.51	44.65	74.00	-29.35	H
9648.00	32.53	39.35	9.26	34.80	46.34	74.00	-27.66	H
12060.00	*					74.00		H
14472.00	*					74.00		H
16884.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	29.89	34.13	6.61	34.09	36.54	54.00	-17.46	V
7236.00	23.43	37.14	7.74	34.51	33.80	54.00	-20.20	V
9648.00	23.30	39.35	9.26	34.80	37.11	54.00	-16.89	V
12060.00	*					54.00		V
14472.00	*					54.00		V
16884.00	*					54.00		V
4824.00	28.94	34.13	6.61	34.09	35.59	54.00	-18.41	H
7236.00	22.85	37.14	7.74	34.51	33.22	54.00	-20.78	H
9648.00	22.26	39.35	9.26	34.80	36.07	54.00	-17.93	H
12060.00	*					54.00		H
14472.00	*					54.00		H
16884.00	*					54.00		H

## Test Results (Above 1000MHz)

### ANT 2

Test Mode: 802.11b Mode					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	39.81	34.35	6.67	34.09	46.74	74.00	-27.26	V
7311.00	34.58	37.21	7.77	34.53	45.03	74.00	-28.97	V
9748.00	33.94	39.45	9.33	34.80	47.92	74.00	-26.08	V
12185.00	*					74.00		V
14622.00	*					74.00		V
17059.00	*					74.00		V
4874.00	40.22	34.35	6.67	34.09	47.15	74.00	-26.85	H
7311.00	33.19	37.21	7.77	34.53	43.64	74.00	-30.36	H
9748.00	33.82	39.45	9.33	34.80	47.80	74.00	-26.20	H
12185.00	*					74.00		H
14622.00	*					74.00		H
17059.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	30.63	34.35	6.67	34.09	37.56	54.00	-16.44	V
7311.00	22.89	37.21	7.77	34.53	33.34	54.00	-20.66	V
9748.00	23.19	39.45	9.33	34.80	37.17	54.00	-16.83	V
12185.00	*					54.00		V
14622.00	*					54.00		V
17059.00	*					54.00		V
4874.00	30.31	34.35	6.67	34.09	37.24	54.00	-16.76	H
7311.00	22.27	37.21	7.77	34.53	32.72	54.00	-21.28	H
9748.00	23.52	39.45	9.33	34.80	37.50	54.00	-16.50	H
12185.00	*					54.00		H
14622.00	*					54.00		H
17059.00	*					54.00		H

## Test Results (Above 1000MHz)

### ANT 2

Test Mode: 802.11b Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	45.68	34.57	6.74	34.09	52.90	74.00	-21.10	V
7386.00	35.47	37.29	7.80	34.55	46.01	74.00	-27.99	V
9848.00	37.39	39.55	9.41	34.81	51.54	74.00	-22.46	V
12310.00	*					74.00		V
14772.00	*					74.00		V
17234.00	*					74.00		V
4924.00	44.86	34.57	6.74	34.09	52.08	74.00	-21.92	H
7386.00	34.31	37.29	7.80	34.55	44.85	74.00	-29.15	H
9848.00	33.53	39.55	9.41	34.81	47.68	74.00	-26.32	H
12310.00	*					74.00		H
14772.00	*					74.00		H
17234.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	36.53	34.57	6.74	34.09	43.75	54.00	-10.25	V
7386.00	25.37	37.29	7.80	34.55	35.91	54.00	-18.09	V
9848.00	25.88	39.55	9.41	34.81	40.03	54.00	-13.97	V
12310.00	*					54.00		V
14772.00	*					54.00		V
17234.00	*					54.00		V
4924.00	35.18	34.57	6.74	34.09	42.40	54.00	-11.60	H
7386.00	23.68	37.29	7.80	34.55	34.22	54.00	-19.78	H
9848.00	22.78	39.55	9.41	34.81	36.93	54.00	-17.07	H
12310.00	*					54.00		H
14772.00	*					54.00		H
17234.00	*					54.00		H

# Test Results (Above 1000MHz)

## ANT 1

Test Mode: 802.11g Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	39.59	34.13	6.61	34.09	46.24	74.00	-27.76	V
7236.00	33.77	37.14	7.74	34.51	44.14	74.00	-29.86	V
9648.00	32.39	39.35	9.26	34.80	46.20	74.00	-27.80	V
12060.00	*					74.00		V
14472.00	*					74.00		V
16884.00	*					74.00		V
4824.00	38.37	34.13	6.61	34.09	45.02	74.00	-28.98	H
7236.00	33.58	37.14	7.74	34.51	43.95	74.00	-30.05	H
9648.00	32.00	39.35	9.26	34.80	45.81	74.00	-28.19	H
12060.00	*					74.00		H
14472.00	*					74.00		H
16884.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	28.73	34.13	6.61	34.09	35.38	54.00	-18.62	V
7236.00	22.65	37.14	7.74	34.51	33.02	54.00	-20.98	V
9648.00	22.75	39.35	9.26	34.80	36.56	54.00	-17.44	V
12060.00	*					54.00		V
14472.00	*					54.00		V
16884.00	*					54.00		V
4824.00	27.94	34.13	6.61	34.09	34.59	54.00	-19.41	H
7236.00	22.17	37.14	7.74	34.51	32.54	54.00	-21.46	H
9648.00	21.76	39.35	9.26	34.80	35.57	54.00	-18.43	H
12060.00	*					54.00		H
14472.00	*					54.00		H
16884.00	*					54.00		H

# Test Results (Above 1000MHz)

## ANT 1

Test Mode: 802.11g Mode					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	38.76	34.13	6.61	34.09	45.41	74.00	-28.59	V
7311.00	33.92	37.14	7.74	34.51	44.29	74.00	-29.71	V
9748.00	33.47	39.35	9.26	34.80	47.28	74.00	-26.72	V
12185.00	*					74.00		V
14622.00	*					74.00		V
17059.00	*					74.00		V
4874.00	39.33	34.13	6.61	34.09	45.98	74.00	-28.02	H
7311.00	32.61	37.14	7.74	34.51	42.98	74.00	-31.02	H
9748.00	33.38	39.35	9.26	34.80	47.19	74.00	-26.81	H
12185.00	*					74.00		H
14622.00	*					74.00		H
17059.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	29.66	34.13	6.61	34.09	36.31	54.00	-17.69	V
7311.00	22.25	37.14	7.74	34.51	32.62	54.00	-21.38	V
9748.00	22.73	39.35	9.26	34.80	36.54	54.00	-17.46	V
12185.00	*					54.00		V
14622.00	*					54.00		V
17059.00	*					54.00		V
4874.00	29.48	34.13	6.61	34.09	36.13	54.00	-17.87	H
7311.00	21.70	37.14	7.74	34.51	32.07	54.00	-21.93	H
9748.00	23.10	39.35	9.26	34.80	36.91	54.00	-17.09	H
12185.00	*					54.00		H
14622.00	*					54.00		H
17059.00	*					54.00		H

# Test Results (Above 1000MHz)

## ANT 1

Test Mode: 802.11g Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	43.87	34.57	6.74	34.09	51.09	74.00	-22.91	V
7386.00	34.33	37.29	7.80	34.55	44.87	74.00	-29.13	V
9848.00	36.57	39.55	9.41	34.81	50.72	74.00	-23.28	V
12310.00	*					74.00		V
14772.00	*					74.00		V
17234.00	*					74.00		V
4924.00	43.33	34.57	6.74	34.09	50.55	74.00	-23.45	H
7386.00	33.31	37.29	7.80	34.55	43.85	74.00	-30.15	H
9848.00	32.78	39.55	9.41	34.81	46.93	74.00	-27.07	H
12310.00	*					74.00		H
14772.00	*					74.00		H
17234.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	34.87	34.57	6.74	34.09	42.09	54.00	-11.91	V
7386.00	24.27	37.29	7.80	34.55	34.81	54.00	-19.19	V
9848.00	25.09	39.55	9.41	34.81	39.24	54.00	-14.76	V
12310.00	*					54.00		V
14772.00	*					54.00		V
17234.00	*					54.00		V
4924.00	33.75	34.57	6.74	34.09	40.97	54.00	-13.03	H
7386.00	22.71	37.29	7.80	34.55	33.25	54.00	-20.75	H
9848.00	22.05	39.55	9.41	34.81	36.20	54.00	-17.80	H
12310.00	*					54.00		H
14772.00	*					54.00		H
17234.00	*					54.00		H

## Test Results (Above 1000MHz)

### ANT 2

Test Mode: 802.11g Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	39.47	34.13	6.61	34.09	46.12	74.00	-27.88	V
7236.00	33.70	37.14	7.74	34.51	44.07	74.00	-29.93	V
9648.00	32.34	39.35	9.26	34.80	46.15	74.00	-27.85	V
12060.00	*					74.00		V
14472.00	*					74.00		V
16884.00	*					74.00		V
4824.00	38.26	34.13	6.61	34.09	44.91	74.00	-29.09	H
7236.00	33.51	37.14	7.74	34.51	43.88	74.00	-30.12	H
9648.00	31.95	39.35	9.26	34.80	45.76	74.00	-28.24	H
12060.00	*					74.00		H
14472.00	*					74.00		H
16884.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	28.62	34.13	6.61	34.09	35.27	54.00	-18.73	V
7236.00	22.58	37.14	7.74	34.51	32.95	54.00	-21.05	V
9648.00	22.70	39.35	9.26	34.80	36.51	54.00	-17.49	V
12060.00	*					54.00		V
14472.00	*					54.00		V
16884.00	*					54.00		V
4824.00	27.85	34.13	6.61	34.09	34.50	54.00	-19.50	H
7236.00	22.11	37.14	7.74	34.51	32.48	54.00	-21.52	H
9648.00	21.71	39.35	9.26	34.80	35.52	54.00	-18.48	H
12060.00	*					54.00		H
14472.00	*					54.00		H
16884.00	*					54.00		H



## Test Results (Above 1000MHz)

### ANT 2

Test Mode: 802.11g Mode					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	38.67	34.13	6.61	34.09	45.32	74.00	-28.68	V
7311.00	33.86	37.14	7.74	34.51	44.23	74.00	-29.77	V
9748.00	33.42	39.35	9.26	34.80	47.23	74.00	-26.77	V
12185.00	*					74.00		V
14622.00	*					74.00		V
17059.00	*					74.00		V
4874.00	39.25	34.13	6.61	34.09	45.90	74.00	-28.10	H
7311.00	32.55	37.14	7.74	34.51	42.92	74.00	-31.08	H
9748.00	33.34	39.35	9.26	34.80	47.15	74.00	-26.85	H
12185.00	*					74.00		H
14622.00	*					74.00		H
17059.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	29.57	34.13	6.61	34.09	36.22	54.00	-17.78	V
7311.00	22.19	37.14	7.74	34.51	32.56	54.00	-21.44	V
9748.00	22.69	39.35	9.26	34.80	36.50	54.00	-17.50	V
12185.00	*					54.00		V
14622.00	*					54.00		V
17059.00	*					54.00		V
4874.00	29.40	34.13	6.61	34.09	36.05	54.00	-17.95	H
7311.00	21.65	37.14	7.74	34.51	32.02	54.00	-21.98	H
9748.00	23.06	39.35	9.26	34.80	36.87	54.00	-17.13	H
12185.00	*					54.00		H
14622.00	*					54.00		H
17059.00	*					54.00		H

## Test Results (Above 1000MHz)

### ANT 2

Test Mode: 802.11g Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	43.70	34.57	6.74	34.09	50.92	74.00	-23.08	V
7386.00	34.22	37.29	7.80	34.55	44.76	74.00	-29.24	V
9848.00	36.50	39.55	9.41	34.81	50.65	74.00	-23.35	V
12310.00	*					74.00		V
14772.00	*					74.00		V
17234.00	*					74.00		V
4924.00	43.19	34.57	6.74	34.09	50.41	74.00	-23.59	H
7386.00	33.21	37.29	7.80	34.55	43.75	74.00	-30.25	H
9848.00	32.71	39.55	9.41	34.81	46.86	74.00	-27.14	H
12310.00	*					74.00		H
14772.00	*					74.00		H
17234.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	34.71	34.57	6.74	34.09	41.93	54.00	-12.07	V
7386.00	24.16	37.29	7.80	34.55	34.70	54.00	-19.30	V
9848.00	25.02	39.55	9.41	34.81	39.17	54.00	-14.83	V
12310.00	*					54.00		V
14772.00	*					54.00		V
17234.00	*					54.00		V
4924.00	33.62	34.57	6.74	34.09	40.84	54.00	-13.16	H
7386.00	22.62	37.29	7.80	34.55	33.16	54.00	-20.84	H
9848.00	21.98	39.55	9.41	34.81	36.13	54.00	-17.87	H
12310.00	*					54.00		H
14772.00	*					54.00		H
17234.00	*					54.00		H

**Test Results (Above 1000MHz)**

**ANT 1+ANT 2**

Test Mode: 802.11n20 Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	40.27	34.13	6.61	34.09	46.92	74.00	-27.08	V
7236.00	34.20	37.14	7.74	34.51	44.57	74.00	-29.43	V
9648.00	32.70	39.35	9.26	34.80	46.51	74.00	-27.49	V
12060.00	*					74.00		V
14472.00	*					74.00		V
16884.00	*					74.00		V
4824.00	38.94	34.13	6.61	34.09	45.59	74.00	-28.41	H
7236.00	33.95	37.14	7.74	34.51	44.32	74.00	-29.68	H
9648.00	32.28	39.35	9.26	34.80	46.09	74.00	-27.91	H
12060.00	*					74.00		H
14472.00	*					74.00		H
16884.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	29.35	34.13	6.61	34.09	36.00	54.00	-18.00	V
7236.00	23.07	37.14	7.74	34.51	33.44	54.00	-20.56	V
9648.00	23.05	39.35	9.26	34.80	36.86	54.00	-17.14	V
12060.00	*					54.00		V
14472.00	*					54.00		V
16884.00	*					54.00		V
4824.00	28.48	34.13	6.61	34.09	35.13	54.00	-18.87	H
7236.00	22.54	37.14	7.74	34.51	32.91	54.00	-21.09	H
9648.00	22.03	39.35	9.26	34.80	35.84	54.00	-18.16	H
12060.00	*					54.00		H
14472.00	*					54.00		H
16884.00	*					54.00		H

# Test Results (Above 1000MHz)

## ANT 1+ANT 2

Test Mode: 802.11n20 Mode					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	39.33	34.13	6.61	34.09	45.98	74.00	-28.02	V
7311.00	34.28	37.14	7.74	34.51	44.65	74.00	-29.35	V
9748.00	33.72	39.35	9.26	34.80	47.53	74.00	-26.47	V
12185.00	*					74.00		V
14622.00	*					74.00		V
17059.00	*					74.00		V
4874.00	39.81	34.13	6.61	34.09	46.46	74.00	-27.54	H
7311.00	32.92	37.14	7.74	34.51	43.29	74.00	-30.71	H
9748.00	33.61	39.35	9.26	34.80	47.42	74.00	-26.58	H
12185.00	*					74.00		H
14622.00	*					74.00		H
17059.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	30.18	34.13	6.61	34.09	36.83	54.00	-17.17	V
7311.00	22.59	37.14	7.74	34.51	32.96	54.00	-21.04	V
9748.00	22.98	39.35	9.26	34.80	36.79	54.00	-17.21	V
12185.00	*					54.00		V
14622.00	*					54.00		V
17059.00	*					54.00		V
4874.00	29.93	34.13	6.61	34.09	36.58	54.00	-17.42	H
7311.00	22.01	37.14	7.74	34.51	32.38	54.00	-21.62	H
9748.00	23.33	39.35	9.26	34.80	37.14	54.00	-16.86	H
12185.00	*					54.00		H
14622.00	*					54.00		H
17059.00	*					54.00		H

# Test Results (Above 1000MHz)

## ANT 1+ANT 2

Test Mode: 802.11n20 Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	44.84	34.57	6.74	34.09	52.06	74.00	-21.94	V
7386.00	34.94	37.29	7.80	34.55	45.48	74.00	-28.52	V
9848.00	37.01	39.55	9.41	34.81	51.16	74.00	-22.84	V
12310.00	*					74.00		V
14772.00	*					74.00		V
17234.00	*					74.00		V
4924.00	44.16	34.57	6.74	34.09	51.38	74.00	-22.62	H
7386.00	33.85	37.29	7.80	34.55	44.39	74.00	-29.61	H
9848.00	33.18	39.55	9.41	34.81	47.33	74.00	-26.67	H
12310.00	*					74.00		H
14772.00	*					74.00		H
17234.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	35.76	34.57	6.74	34.09	42.98	54.00	-11.02	V
7386.00	24.86	37.29	7.80	34.55	35.40	54.00	-18.60	V
9848.00	25.52	39.55	9.41	34.81	39.67	54.00	-14.33	V
12310.00	*					54.00		V
14772.00	*					54.00		V
17234.00	*					54.00		V
4924.00	34.52	34.57	6.74	34.09	41.74	54.00	-12.26	H
7386.00	23.24	37.29	7.80	34.55	33.78	54.00	-20.22	H
9848.00	22.44	39.55	9.41	34.81	36.59	54.00	-17.41	H
12310.00	*					54.00		H
14772.00	*					54.00		H
17234.00	*					54.00		H

# Test Results (Above 1000MHz)

## ANT 1+ANT 2

Test Mode: 802.11n40 Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4844.00	38.92	34.21	6.64	34.09	45.68	74.00	-28.32	V
7266.00	33.35	37.17	7.75	34.52	43.75	74.00	-30.25	V
9688.00	32.09	39.39	9.29	34.80	45.97	74.00	-28.03	V
12060.00	*					74.00		V
14472.00	*					74.00		V
16884.00	*					74.00		V
4844.00	37.80	34.21	6.64	34.09	44.56	74.00	-29.44	H
7266.00	33.21	37.17	7.75	34.52	43.61	74.00	-30.39	H
9688.00	31.72	39.39	9.29	34.80	45.60	74.00	-28.40	H
12060.00	*					74.00		H
14472.00	*					74.00		H
16884.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4844.00	28.11	34.21	6.64	34.09	34.87	54.00	-19.13	V
7266.00	22.25	37.17	7.75	34.52	32.65	54.00	-21.35	V
9688.00	22.47	39.39	9.29	34.80	36.35	54.00	-17.65	V
12060.00	*					54.00		V
14472.00	*					54.00		V
16884.00	*					54.00		V
4844.00	27.41	34.21	6.64	34.09	34.17	54.00	-19.83	H
7266.00	21.81	37.17	7.75	34.52	32.21	54.00	-21.79	H
9688.00	21.49	39.39	9.29	34.80	35.37	54.00	-18.63	H
12060.00	*					54.00		H
14472.00	*					54.00		H
16884.00	*					54.00		H

# Test Results (Above 1000MHz)

## ANT 1+ ANT 2

Test Mode: 802.11n40 Mode					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	38.22	34.13	6.61	34.09	44.87	74.00	-29.13	V
7311.00	33.57	37.14	7.74	34.51	43.94	74.00	-30.06	V
9748.00	33.22	39.35	9.26	34.80	47.03	74.00	-26.97	V
12185.00	*					74.00		V
14622.00	*					74.00		V
17059.00	*					74.00		V
4874.00	38.87	34.13	6.61	34.09	45.52	74.00	-28.48	H
7311.00	32.30	37.14	7.74	34.51	42.67	74.00	-31.33	H
9748.00	33.15	39.35	9.26	34.80	46.96	74.00	-27.04	H
12185.00	*					74.00		H
14622.00	*					74.00		H
17059.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	29.16	34.13	6.61	34.09	35.81	54.00	-18.19	V
7311.00	21.91	37.14	7.74	34.51	32.28	54.00	-21.72	V
9748.00	22.49	39.35	9.26	34.80	36.30	54.00	-17.70	V
12185.00	*					54.00		V
14622.00	*					54.00		V
17059.00	*					54.00		V
4874.00	29.04	34.13	6.61	34.09	35.69	54.00	-18.31	H
7311.00	21.41	37.14	7.74	34.51	31.78	54.00	-22.22	H
9748.00	22.88	39.35	9.26	34.80	36.69	54.00	-17.31	H
12185.00	*					54.00		H
14622.00	*					54.00		H
17059.00	*					54.00		H

## Test Results (Above 1000MHz)

### ANT 1+ ANT 2

Test Mode: 802.11n40 Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4904.00	42.92	34.48	6.71	34.09	50.02	74.00	-23.98	V
7356.00	33.73	37.26	7.79	34.54	44.24	74.00	-29.76	V
9808.00	36.14	39.51	9.38	34.81	50.22	74.00	-23.78	V
12310.00	*					74.00		V
14772.00	*					74.00		V
17234.00	*					74.00		V
4904.00	42.53	34.48	6.71	34.09	49.63	74.00	-24.37	H
7356.00	32.78	37.26	7.79	34.54	43.29	74.00	-30.71	H
9808.00	32.38	39.51	9.38	34.81	46.46	74.00	-27.54	H
12310.00	*					74.00		H
14772.00	*					74.00		H
17234.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4904.00	33.99	34.48	6.71	34.09	41.09	54.00	-12.91	V
7356.00	23.69	37.26	7.79	34.54	34.20	54.00	-19.80	V
9808.00	24.68	39.51	9.38	34.81	38.76	54.00	-15.24	V
12310.00	*					54.00		V
14772.00	*					54.00		V
17234.00	*					54.00		V
4904.00	33.00	34.48	6.71	34.09	40.10	54.00	-13.90	H
7356.00	22.21	37.26	7.79	34.54	32.72	54.00	-21.28	H
9808.00	21.67	39.51	9.38	34.81	35.75	54.00	-18.25	H
12310.00	*					54.00		H
14772.00	*					54.00		H
17234.00	*					54.00		H

Remark:

1. During the test, pre-scan the 802.11b,g,n(HT20N),n(HT40N) mode, and found the 802.11b mode is worse case , the report only record this mode.
2. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. “\*”, means this data is the too weak instrument of signal is unable to test.



## Radiated Band Edge:

### ANT 1

Test Mode: 802.11b Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	51.61	29.15	3.41	34.01	50.16	74.00	-23.84	H
2400.00	60.61	29.16	3.43	34.01	59.19	74.00	-14.81	H
2390.00	53.29	29.15	3.41	34.01	51.84	74.00	-22.16	V
2400.00	62.39	29.16	3.43	34.01	60.97	74.00	-13.03	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	38.38	29.15	3.41	34.01	36.93	54.00	-17.07	H
2400.00	46.67	29.16	3.43	34.01	45.25	54.00	-8.75	H
2390.00	40.20	29.15	3.41	34.01	38.75	54.00	-15.25	V
2400.00	47.79	29.16	3.43	34.01	46.37	54.00	-7.63	V

Test Mode: 802.11b Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	52.25	29.28	3.53	34.03	51.03	74.00	-22.97	H
2500.00	48.09	29.30	3.56	34.03	46.92	74.00	-27.08	H
2483.50	54.50	29.28	3.53	34.03	53.28	74.00	-20.72	V
2500.00	50.59	29.30	3.56	34.03	49.42	74.00	-24.58	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	38.74	29.28	3.53	34.03	37.52	54.00	-16.48	H
2500.00	34.85	29.30	3.56	34.03	33.68	54.00	-20.32	H
2483.50	40.68	29.28	3.53	34.03	39.46	54.00	-14.54	V
2500.00	36.73	29.30	3.56	34.03	35.56	54.00	-18.44	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.

## ANT 2

Test Mode: 802.11b Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	51.58	29.15	3.41	34.01	50.13	74.00	-23.87	H
2400.00	60.58	29.16	3.43	34.01	59.16	74.00	-14.84	H
2390.00	53.26	29.15	3.41	34.01	51.81	74.00	-22.19	V
2400.00	62.36	29.16	3.43	34.01	60.94	74.00	-13.06	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	38.36	29.15	3.41	34.01	36.91	54.00	-17.09	H
2400.00	46.65	29.16	3.43	34.01	45.23	54.00	-8.77	H
2390.00	40.18	29.15	3.41	34.01	38.73	54.00	-15.27	V
2400.00	47.77	29.16	3.43	34.01	46.35	54.00	-7.65	V

Test Mode: 802.11b Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	52.21	29.28	3.53	34.03	50.99	74.00	-23.01	H
2500.00	48.06	29.30	3.56	34.03	46.89	74.00	-27.11	H
2483.50	54.46	29.28	3.53	34.03	53.24	74.00	-20.76	V
2500.00	50.56	29.30	3.56	34.03	49.39	74.00	-24.61	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	38.72	29.28	3.53	34.03	37.50	54.00	-16.50	H
2500.00	34.83	29.30	3.56	34.03	33.66	54.00	-20.34	H
2483.50	40.66	29.28	3.53	34.03	39.44	54.00	-14.56	V
2500.00	36.71	29.30	3.56	34.03	35.54	54.00	-18.46	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.

## Radiated Band Edge:

### ANT 1

Test Mode: 802.11g Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	50.35	27.53	5.47	33.92	49.43	74.00	-24.57	H
2400.00	58.93	27.55	5.49	29.93	62.04	74.00	-11.96	H
2390.00	51.94	27.53	5.47	33.92	51.02	74.00	-22.98	V
2400.00	60.38	27.55	5.49	29.93	63.49	74.00	-10.51	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	37.49	27.53	5.47	33.92	36.57	54.00	-17.43	H
2400.00	45.64	27.55	5.49	29.93	48.75	54.00	-5.25	H
2390.00	39.20	27.53	5.47	33.92	38.28	54.00	-15.72	V
2400.00	45.78	27.55	5.49	29.93	48.89	54.00	-5.11	V

Test Mode: 802.11g Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	50.45	29.28	3.53	34.03	49.23	74.00	-24.77	H
2500.00	46.70	29.30	3.56	34.03	45.53	74.00	-28.47	H
2483.50	52.45	29.28	3.53	34.03	51.23	74.00	-22.77	V
2500.00	48.96	29.30	3.56	34.03	47.79	74.00	-26.21	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	37.66	29.28	3.53	34.03	36.44	54.00	-17.56	H
2500.00	34.01	29.30	3.56	34.03	32.84	54.00	-21.16	H
2483.50	39.49	29.28	3.53	34.03	38.27	54.00	-15.73	V
2500.00	35.84	29.30	3.56	34.03	34.67	54.00	-19.33	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

## ANT 2

Test Mode: 802.11g Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	50.25	27.53	5.47	33.92	49.33	74.00	-24.67	H
2400.00	58.80	27.55	5.49	29.93	61.91	74.00	-12.09	H
2390.00	51.84	27.53	5.47	33.92	50.92	74.00	-23.08	V
2400.00	60.22	27.55	5.49	29.93	63.33	74.00	-10.67	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	37.42	27.53	5.47	33.92	36.50	54.00	-17.50	H
2400.00	45.56	27.55	5.49	29.93	48.67	54.00	-5.33	H
2390.00	39.12	27.53	5.47	33.92	38.20	54.00	-15.80	V
2400.00	45.78	27.55	5.49	29.93	48.89	54.00	-5.11	V

Test Mode: 802.11g Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	50.31	29.28	3.53	34.03	49.09	74.00	-24.91	H
2500.00	46.58	29.30	3.56	34.03	45.41	74.00	-28.59	H
2483.50	52.28	29.28	3.53	34.03	51.06	74.00	-22.94	V
2500.00	48.83	29.30	3.56	34.03	47.66	74.00	-26.34	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	37.57	29.28	3.53	34.03	36.35	54.00	-17.65	H
2500.00	33.94	29.30	3.56	34.03	32.77	54.00	-21.23	H
2483.50	39.39	29.28	3.53	34.03	38.17	54.00	-15.83	V
2500.00	35.76	29.30	3.56	34.03	34.59	54.00	-19.41	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

# **Radiated Band Edge:**

## **ANT 1+ANT 2**

Test Mode: 802.11n20 Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	50.64	27.53	5.47	33.92	49.72	74.00	-24.28	H
2400.00	59.31	27.55	5.49	29.93	62.42	74.00	-11.58	H
2390.00	52.25	27.53	5.47	33.92	51.33	74.00	-22.67	V
2400.00	60.83	27.55	5.49	29.93	63.94	74.00	-10.06	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	37.69	27.53	5.47	33.92	36.77	54.00	-17.23	H
2400.00	45.87	27.55	5.49	29.93	48.98	54.00	-5.02	H
2390.00	39.43	27.53	5.47	33.92	38.51	54.00	-15.49	V
2400.00	45.21	27.55	5.49	29.93	48.32	54.00	-5.68	V

Test Mode: 802.11n20 Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	50.86	29.28	3.53	34.03	49.64	74.00	-24.36	H
2500.00	47.01	29.30	3.56	34.03	45.84	74.00	-28.16	H
2483.50	52.91	29.28	3.53	34.03	51.69	74.00	-22.31	V
2500.00	49.33	29.30	3.56	34.03	48.16	74.00	-25.84	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	37.90	29.28	3.53	34.03	36.68	54.00	-17.32	H
2500.00	34.20	29.30	3.56	34.03	33.03	54.00	-20.97	H
2483.50	39.76	29.28	3.53	34.03	38.54	54.00	-15.46	V
2500.00	36.04	29.30	3.56	34.03	34.87	54.00	-19.13	V

Remark:

1. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

# **Radiated Band Edge:**

## **ANT 1+ ANT 2**

Test Mode: 802.11n40 Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	49.62	27.53	5.47	33.92	48.70	74.00	-25.30	H
2400.00	57.95	27.55	5.49	29.93	61.06	74.00	-12.94	H
2390.00	51.16	27.53	5.47	33.92	50.24	74.00	-23.76	V
2400.00	59.19	27.55	5.49	29.93	62.30	74.00	-11.70	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	36.96	27.53	5.47	33.92	36.04	54.00	-17.96	H
2400.00	45.04	27.55	5.49	29.93	48.15	54.00	-5.85	H
2390.00	38.62	27.53	5.47	33.92	37.70	54.00	-16.30	V
2400.00	46.01	27.55	5.49	29.93	49.12	54.00	-4.88	V

Test Mode: 802.11n40 Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	49.40	29.28	3.53	34.03	48.18	74.00	-25.82	H
2500.00	45.88	29.30	3.56	34.03	44.71	74.00	-29.29	H
2483.50	51.24	29.28	3.53	34.03	50.02	74.00	-23.98	V
2500.00	48.00	29.30	3.56	34.03	46.83	74.00	-27.17	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	37.02	29.28	3.53	34.03	35.80	54.00	-18.20	H
2500.00	33.51	29.30	3.56	34.03	32.34	54.00	-21.66	H
2483.50	38.78	29.28	3.53	34.03	37.56	54.00	-16.44	V
2500.00	35.31	29.30	3.56	34.03	34.14	54.00	-19.86	V

Remark:


1. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

## 5. Maximum Peak Output Power Test

### 5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	30dBm

### 5.2. Test Setup

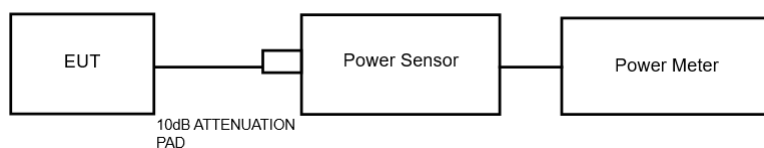

### 5.3. Test Procedure

1. The Transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

### 5.4. Test Data

Test Item	:	Max. peak output power	Test Mode	:	CH Low ~ CH High
Test Voltage	:	AC 120V/60Hz for adapter	Temperature	:	24°C
Test Result	:	PASS	Humidity	:	55%RH



Test Mode	Test Channel	Frequency (MHz)	Maximum Peak Conducted Output Power (PK) (dBm)			Maximum Peak Conducted Output Power (AV) (dBm)			Correctional Limit dBm	Results
			ANT1	ANT2	SUM	ANT1	ANT2	SUM		
802.11b	CH01	2412	18.63	18.94		8.54	8.62		29.00	PASS
	CH06	2437	18.19	18.88		9.13	9.20		29.00	PASS
	CH11	2462	18.46	18.90		9.55	9.52		29.00	PASS
802.11g	CH01	2412	18.70	18.28		8.15	8.13		29.00	PASS
	CH06	2437	19.54	19.01		8.77	8.65		29.00	PASS
	CH11	2462	19.54	19.47		9.35	9.26		29.00	PASS
802.11n(20)	CH01	2412	19.01	19.71	22.38	7.90	7.87	10.90	25.90	PASS
	CH06	2437	19.07	19.35	22.22	7.97	7.88	10.94	25.90	PASS
	CH11	2462	19.13	19.54	22.35	8.44	8.39	11.43	25.90	PASS
802.11n(40)	CH03	2422	18.95	18.80	21.89	7.39	7.24	10.33	25.90	PASS
	CH06	2437	18.64	18.67	21.67	7.75	7.66	10.72	25.90	PASS
	CH09	2452	19.23	19.81	22.54	8.14	8.15	11.16	25.90	PASS

**Note:**

- 1) For power test the duty cycle is 100% in continuous transmitting mode. Please see the plot of next page.
- 2) For 802.11b/g/n20 mode,  
Power limit Reduction=7-6=1dBm  
Correctional limit=30-1=29dBm

For 802.11n40 mode,


Directional gain=GANT +10log(N)dBm =7+10log2=10.1dBm

Power limit Reduction=10.1-6=4.1dBm


Correctional limit=30-4.1=25.9dBm

## Duty Cycle


ANT 1

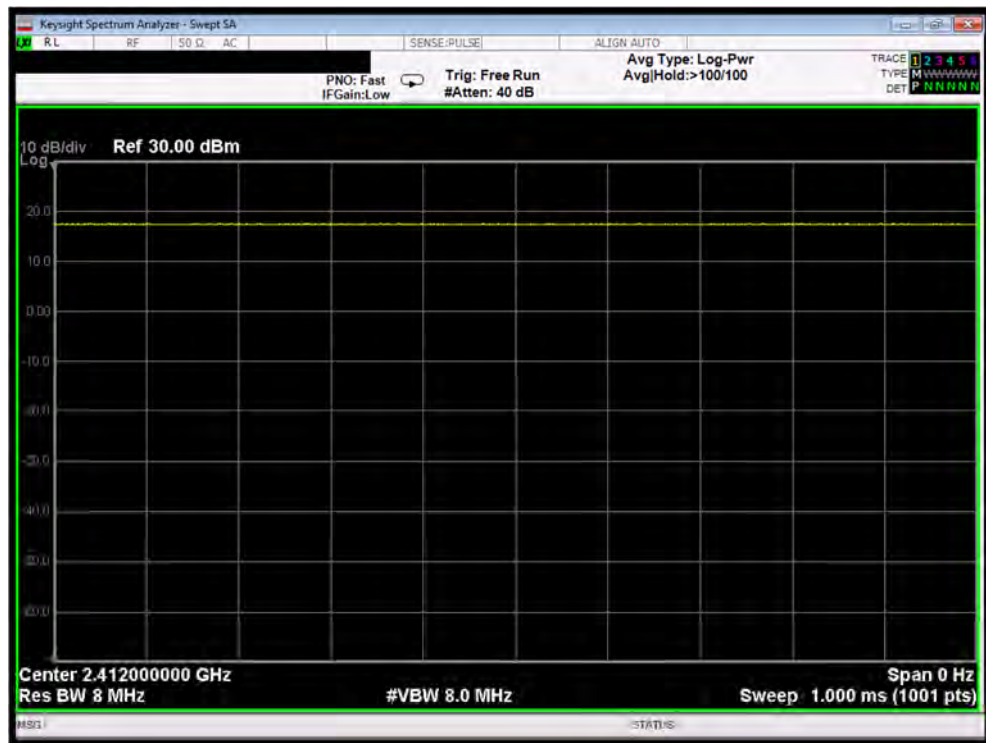


802.11b mode

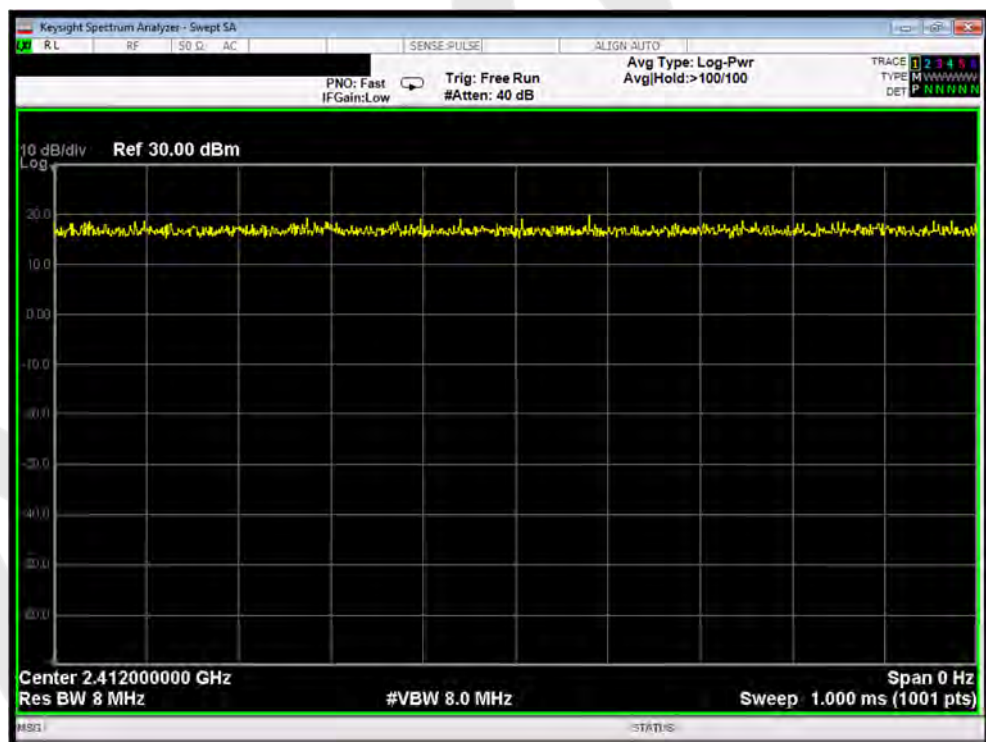

802.11g mode

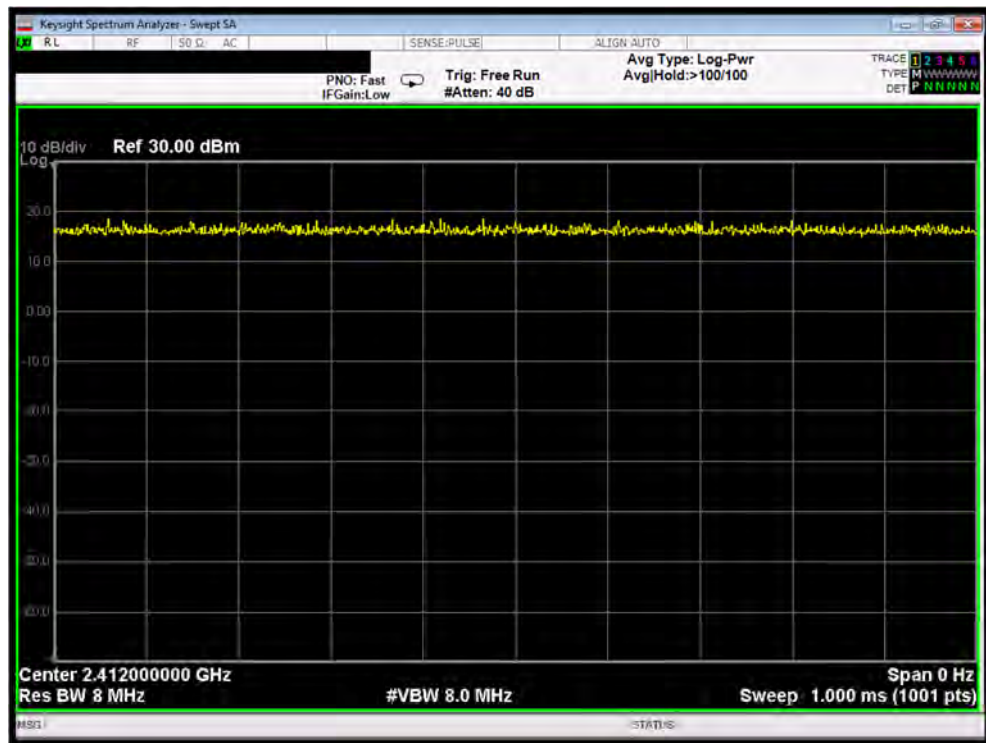

802.11n(HT20) mode

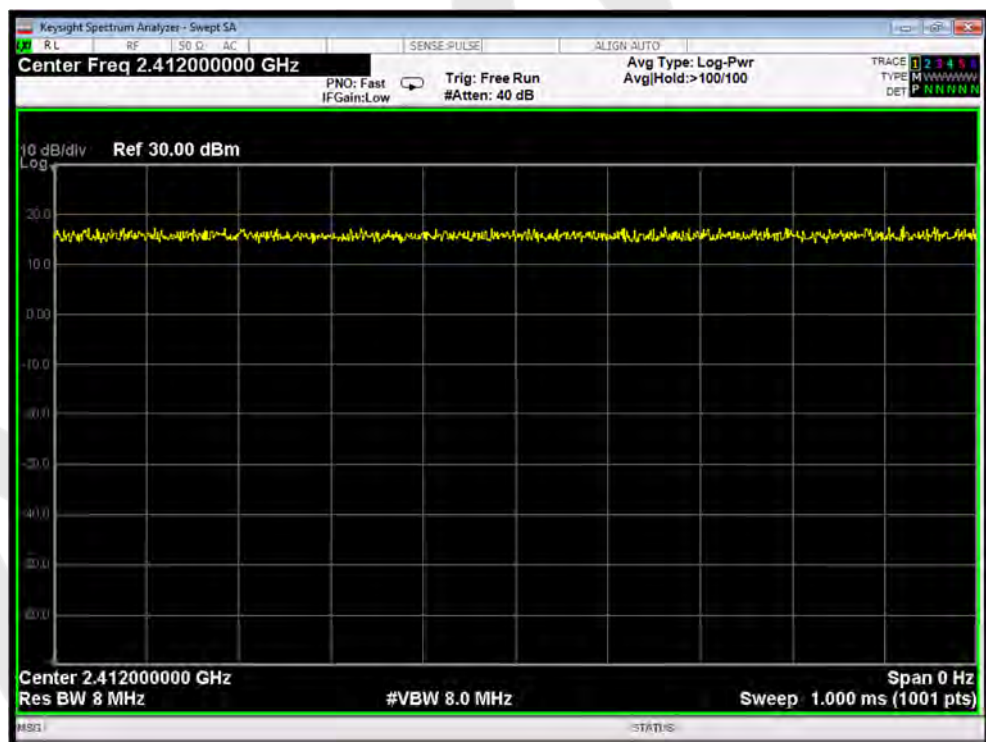


802.11n(HT40) mode

## Duty Cycle


ANT 2




802.11b mode

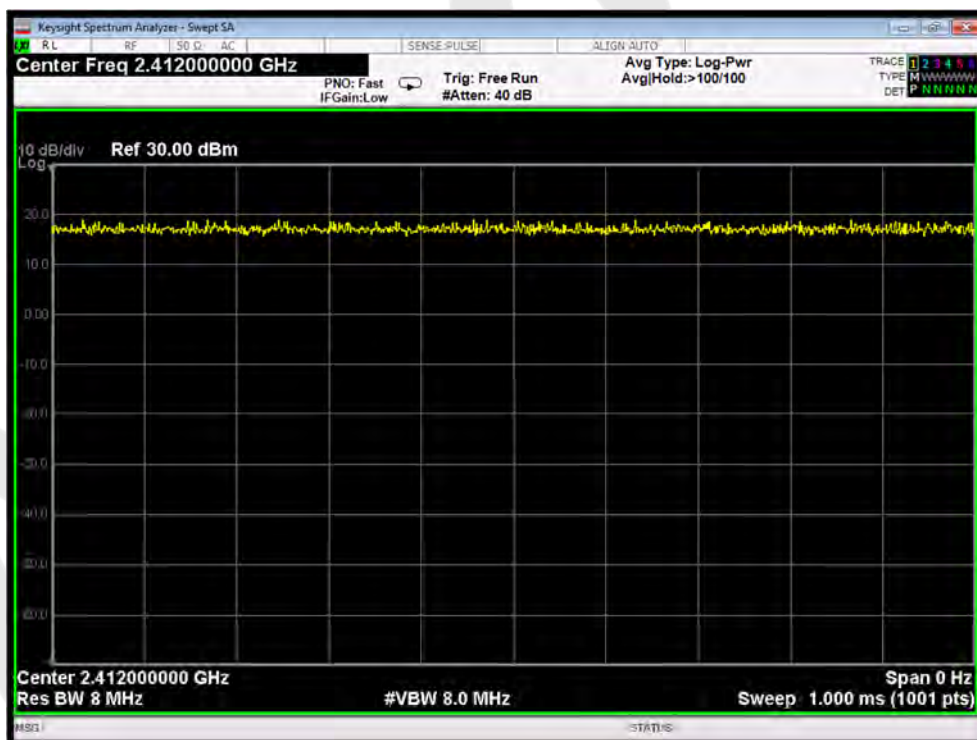

802.11g mode

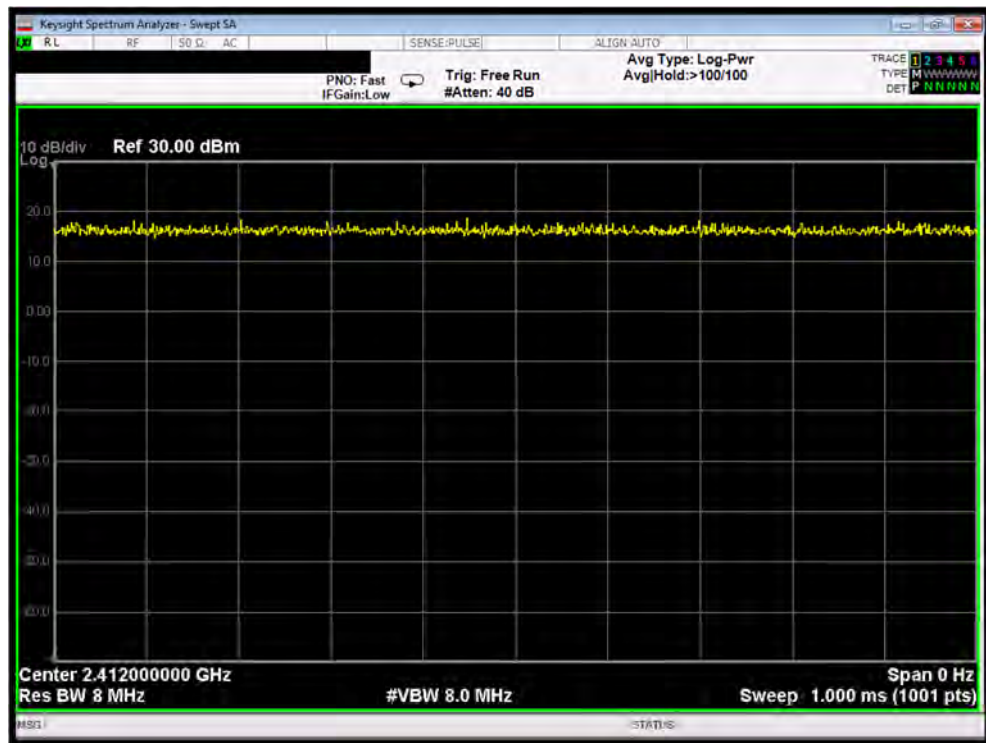

802.11n(HT20) mode

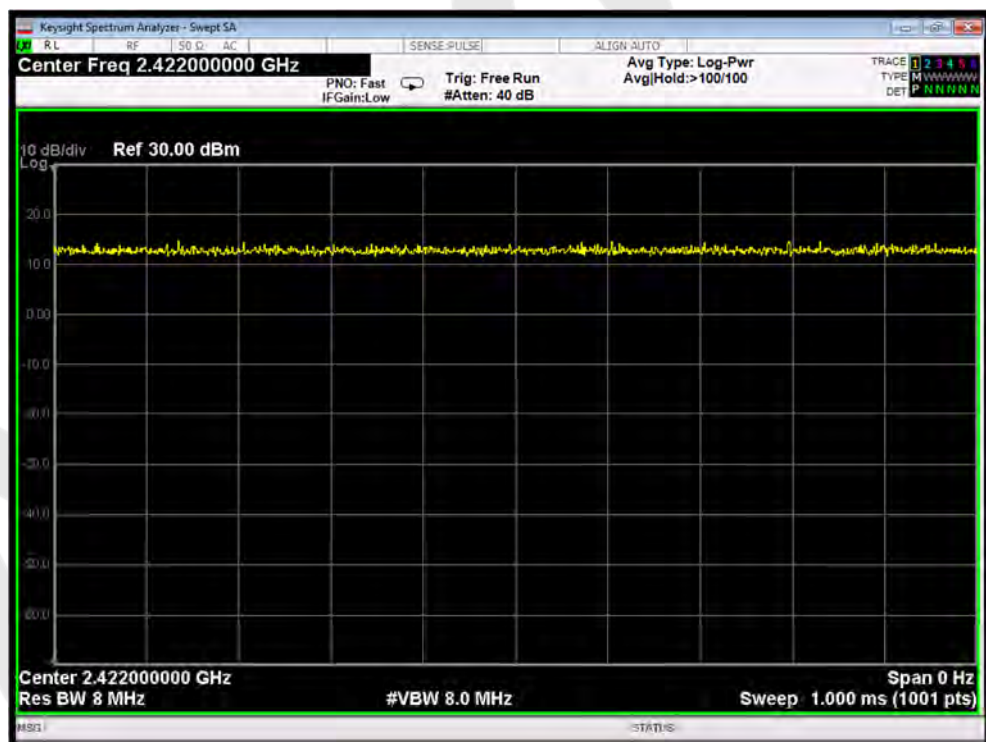

802.11n(HT40) mode




## 6. 6dB Occupy Bandwidth Test

### 6.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(2)
Test Limit	>500kHz

### 6.2. Test Setup

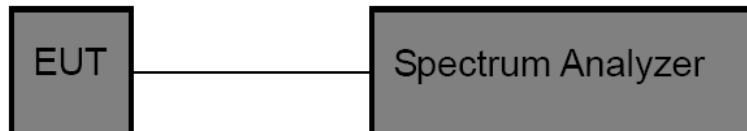

### 6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:  
RBW = 100kHz, VBW  $\geq 3 \times$  RBW = 300kHz,  
Detector= Peak  
Trace mode= Max hold.  
Sweep- auto couple.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

### 6.4. Test Data

Test Item	:	6dB Bandwidth
Test Voltage	:	AC 120V/60Hz for adapter
Test Result	:	PASS

Test Mode	:	CH Low ~ CH High
Temperature	:	24°C
Humidity	:	55%RH

ANT 1

Mode	Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Results
802.11b	Low	2412	9.163	>500	PASS
	Middle	2437	9.134		PASS
	High	2462	9.152		PASS
802.11g	Low	2412	15.15	>500	PASS
	Middle	2437	15.15		PASS
	High	2462	15.33		PASS
802.11n20	Low	2412	15.16	>500	PASS
	Middle	2437	15.09		PASS
	High	2462	15.15		PASS
802.11n40	Low	2422	35.16	>500	PASS
	Middle	2437	35.16		PASS
	High	2452	35.16		PASS

ANT 2


Mode	Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Results
802.11b	Low	2412	9.589	>500	PASS
	Middle	2437	9.568		PASS
	High	2462	9.587		PASS
802.11g	Low	2412	15.14	>500	PASS
	Middle	2437	15.37		PASS
	High	2462	15.48		PASS
802.11n20	Low	2412	15.47	>500	PASS
	Middle	2437	16.04		PASS
	High	2462	16.05		PASS
802.11n40	Low	2422	35.21	>500	PASS
	Middle	2437	35.20		PASS
	High	2452	35.76		PASS




ANT 1



802.11b mode : Lowest

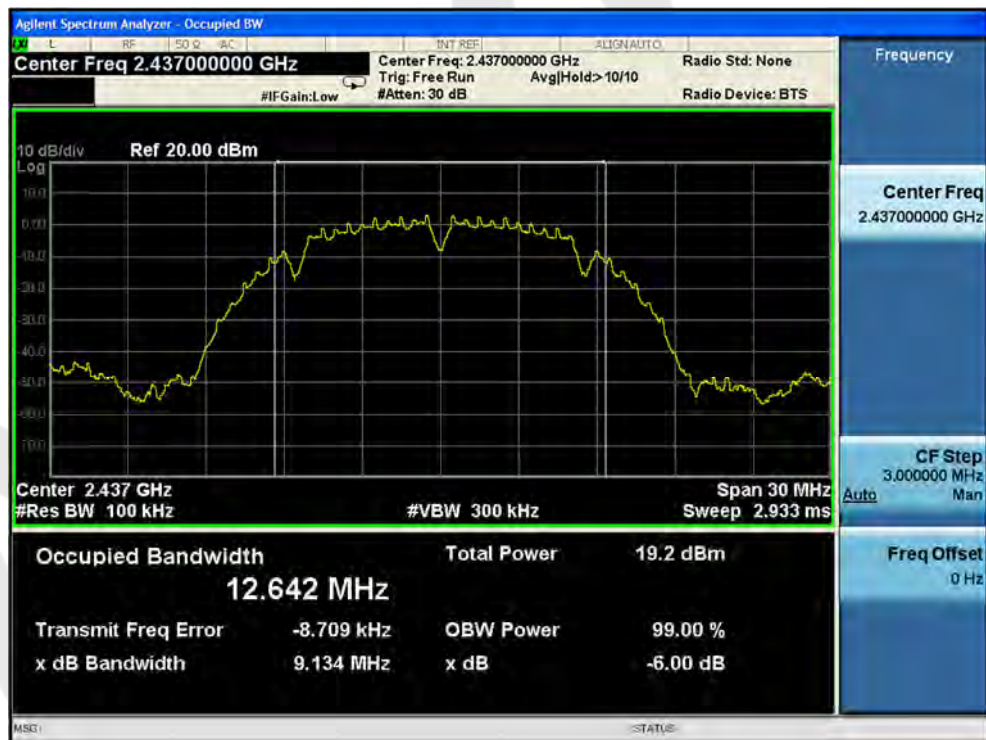


802.11b mode : Middle

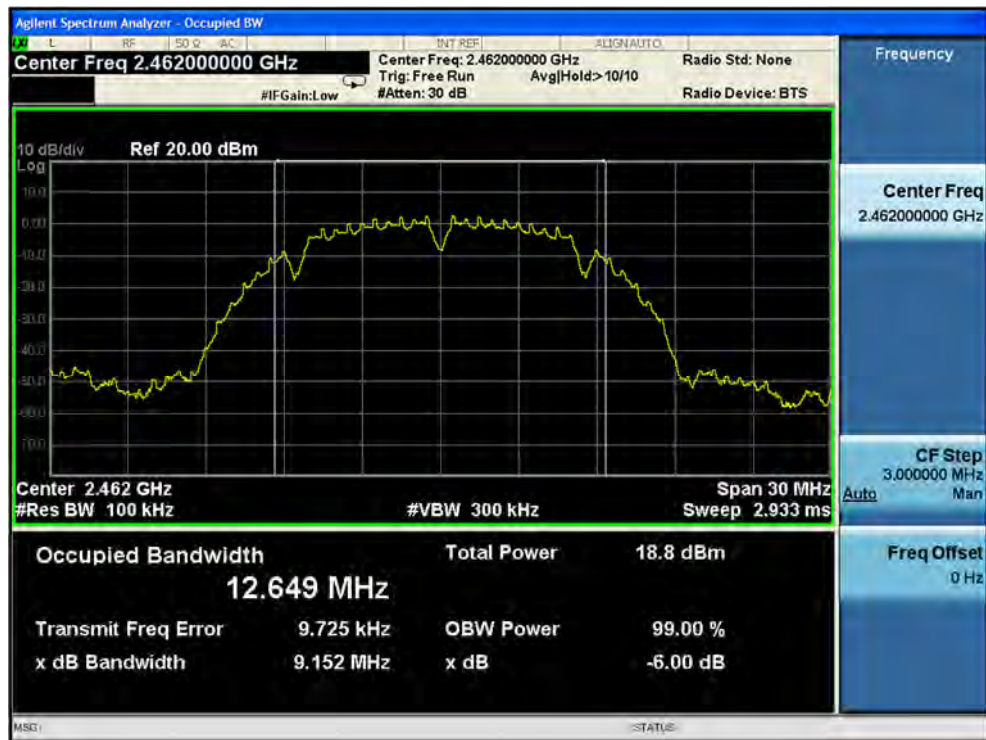

802.11b mode : Highest



802.11g mode : Lowest

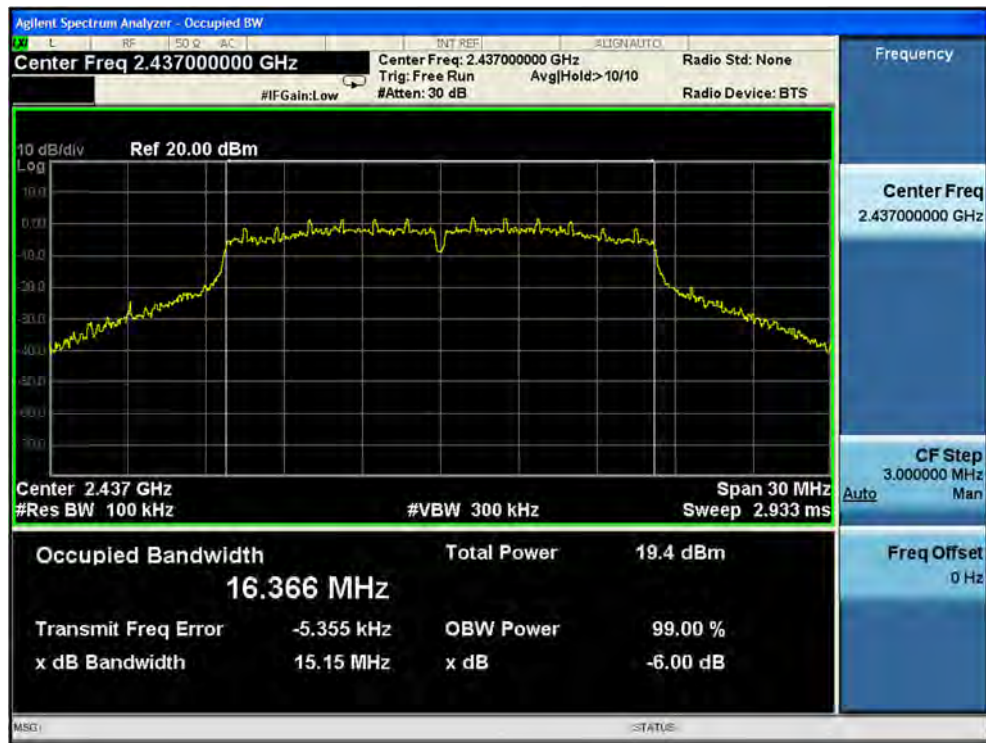


802.11g mode : Middle




802.11g mode : Highest



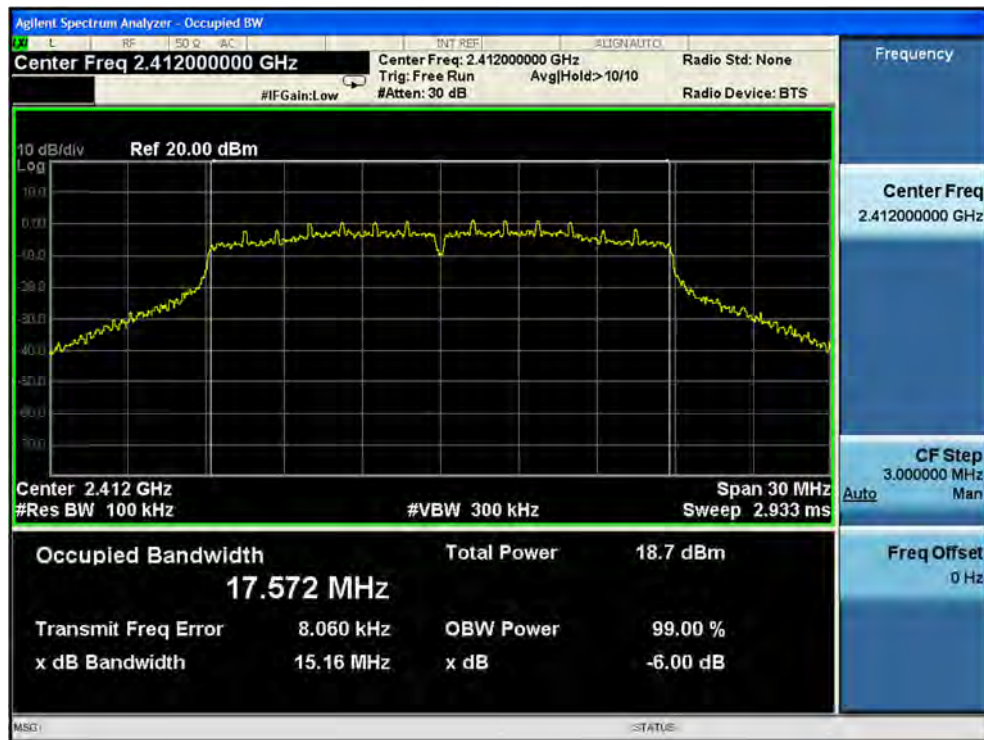

802.11n20 mode : Lowest

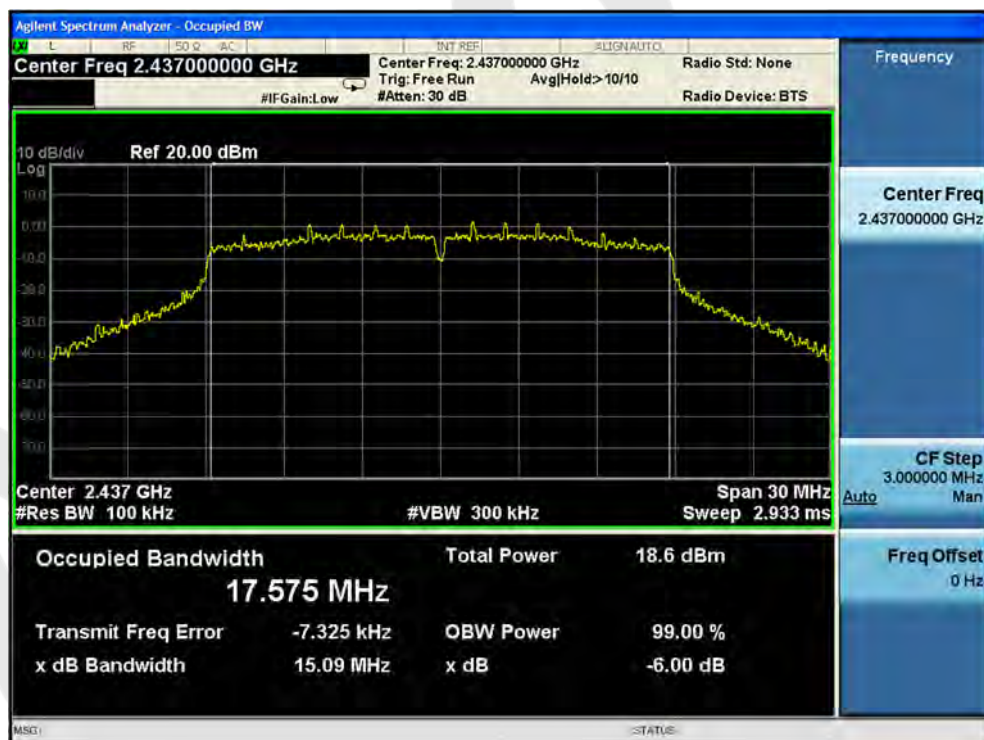


802.11n20 mode : Middle



802.11n20 mode : Highest



802.11n40 mode : Lowest

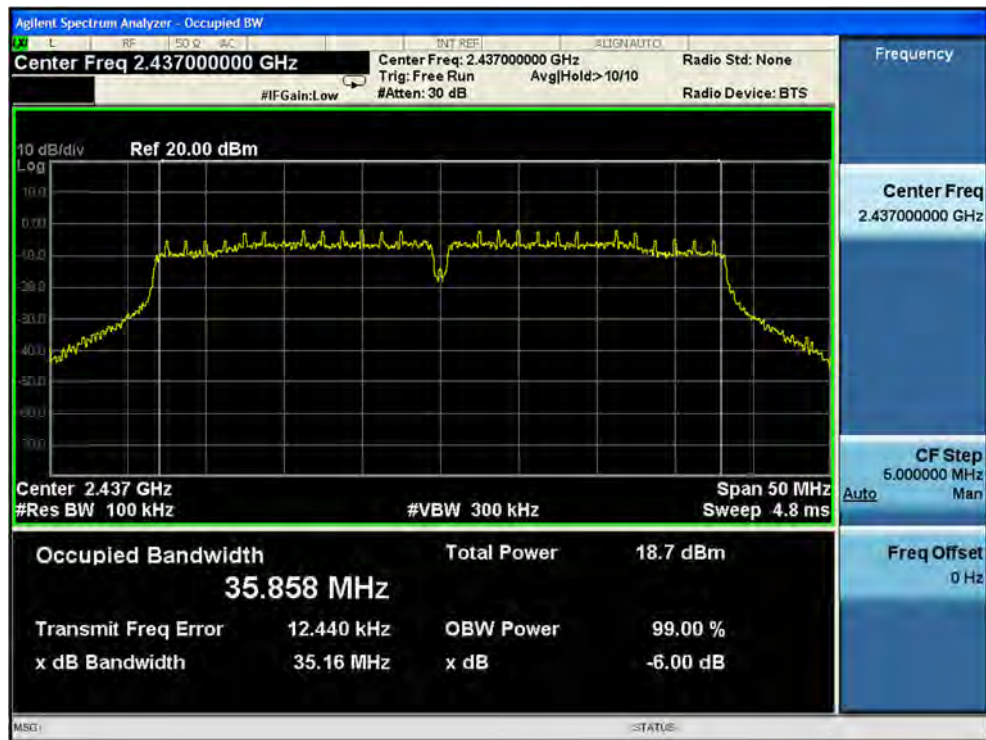


802.11n40 mode : Middle




802.11n40 mode : Highest



ANT 2

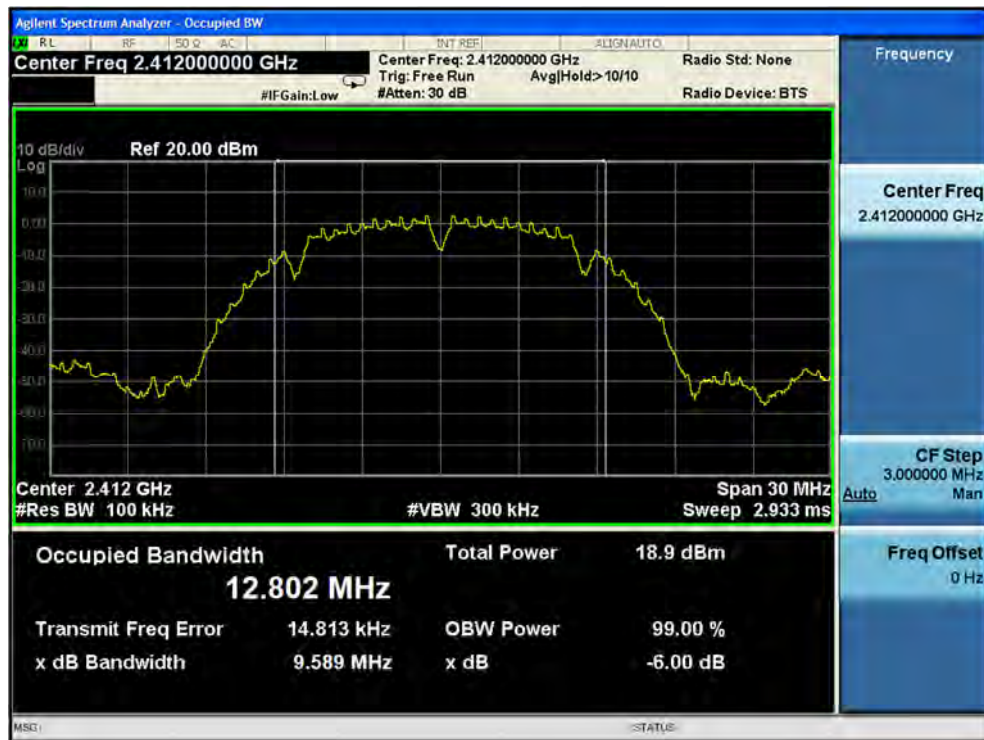

802.11b mode : Lowest

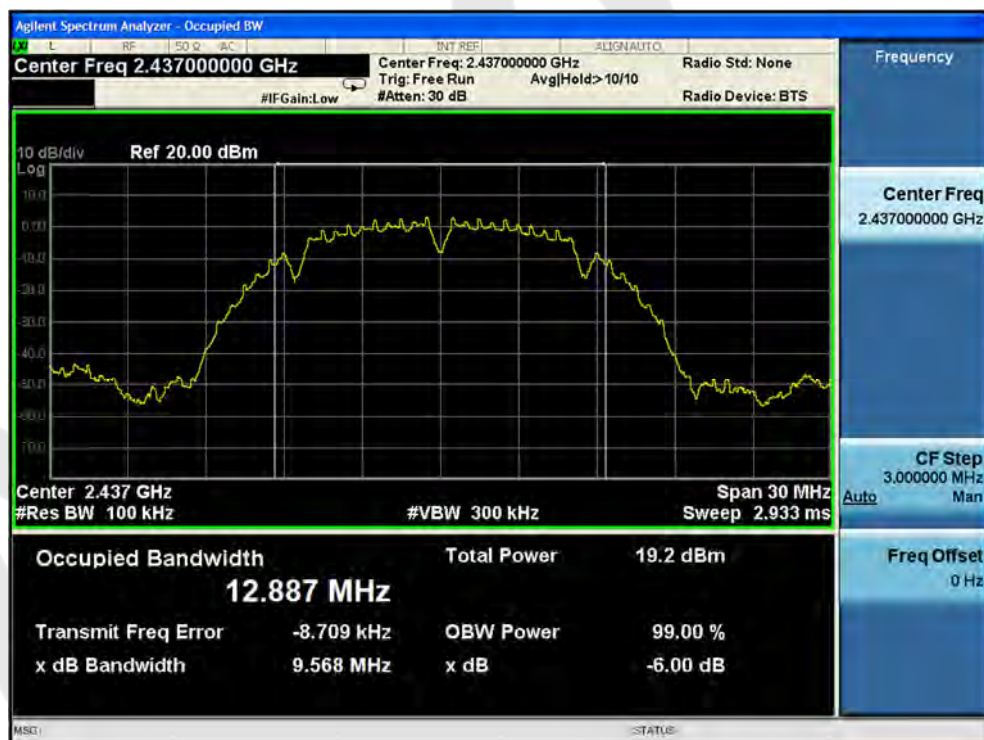


802.11b mode : Middle






802.11b mode : Highest

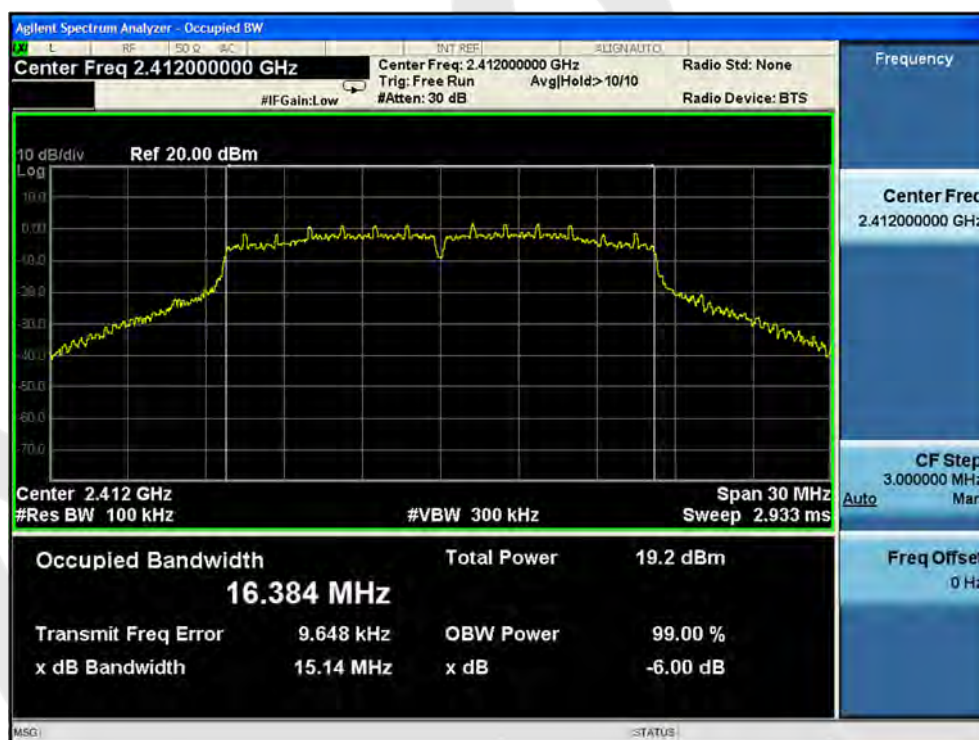

802.11g mode : Lowest

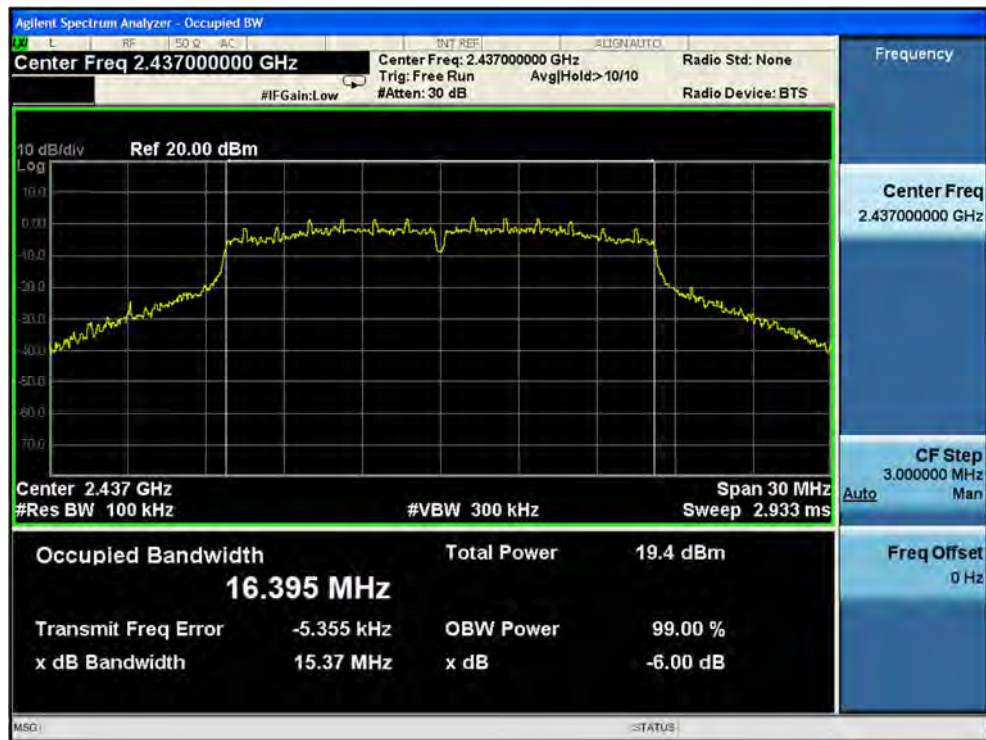


802.11g mode : Middle



802.11g mode : Highest




802.11n20 mode : Lowest

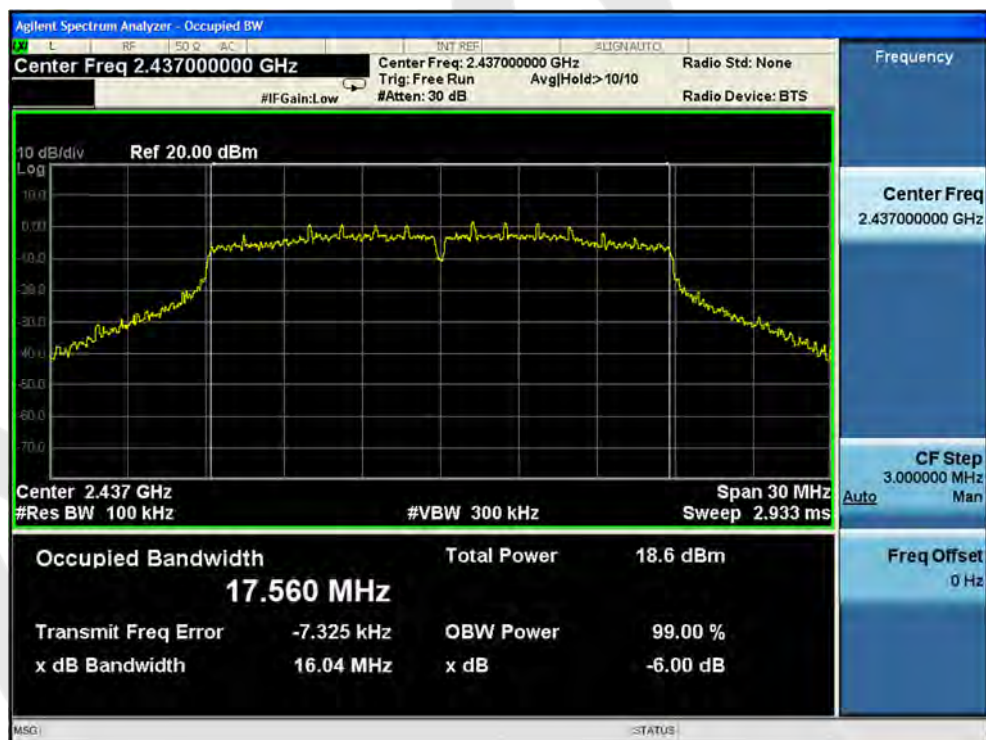


802.11n20 mode : Middle




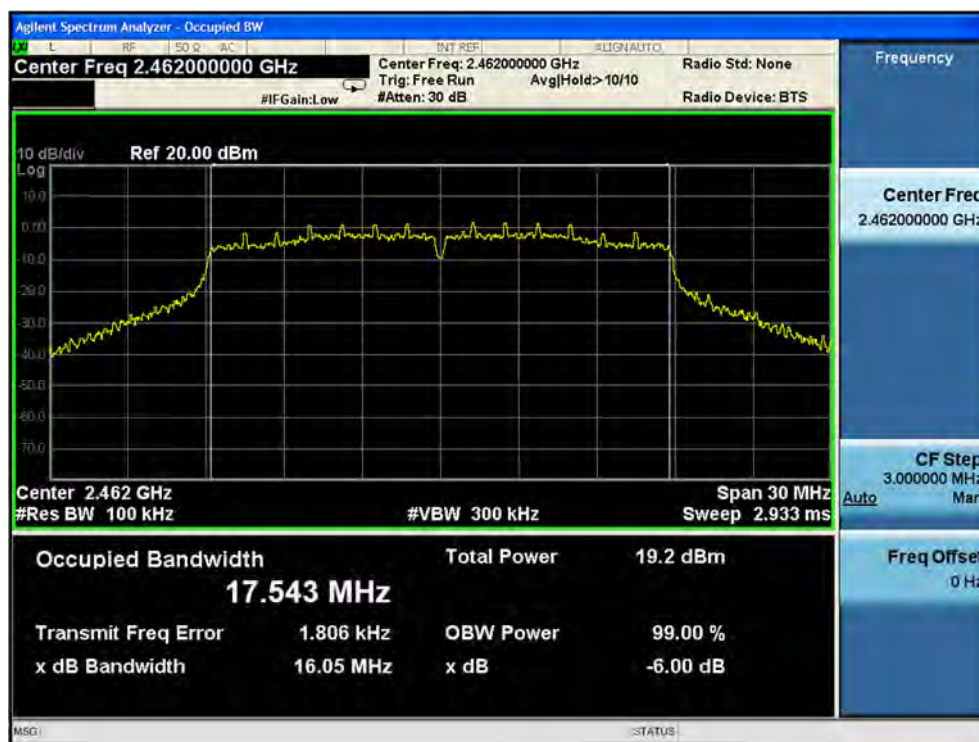


802.11n20 mode : Highest

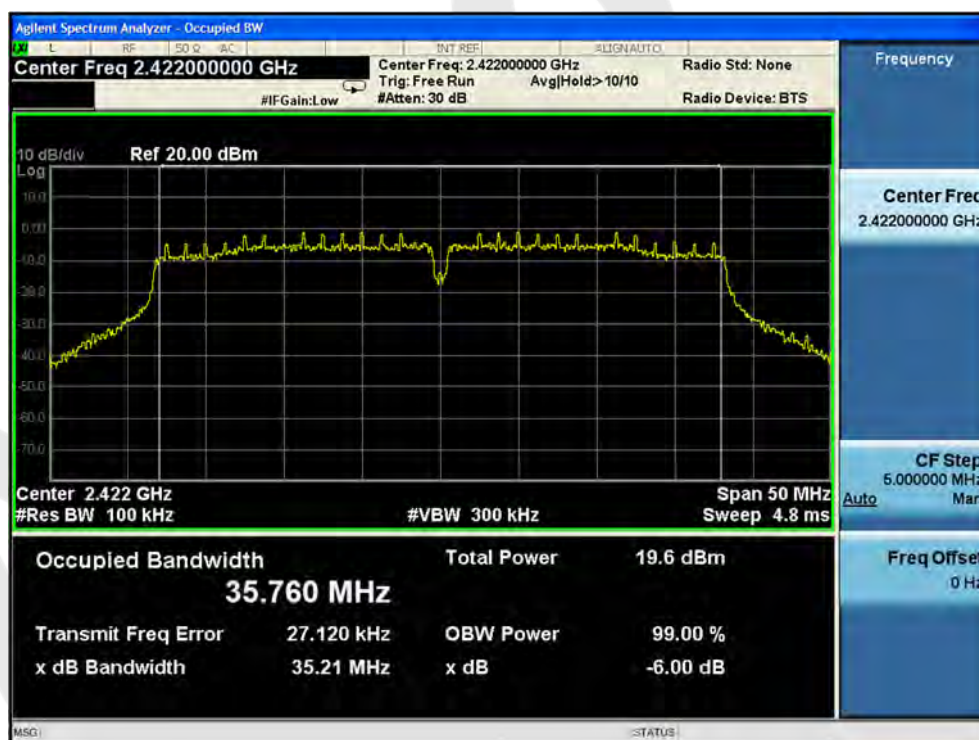

802.11n40 mode : Lowest

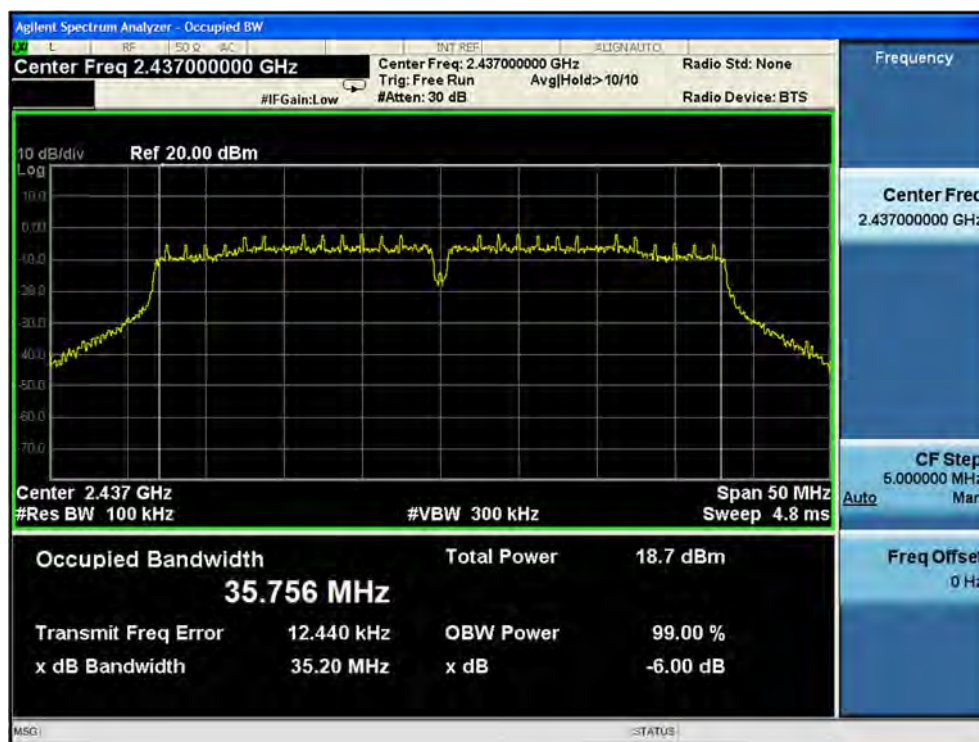

802.11n40 mode : Middle

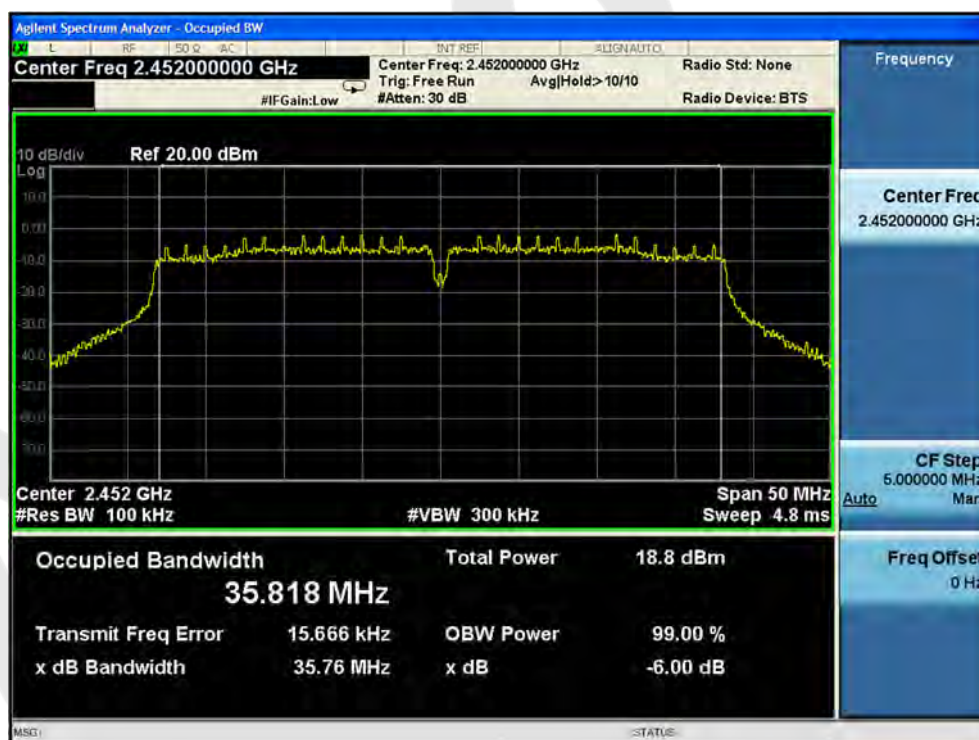


802.11n40 mode : Highest

## 7. Power Spectral Density Test

### 7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (e)
Test Limit	8dBm/3KHz

### 7.2. Test Setup

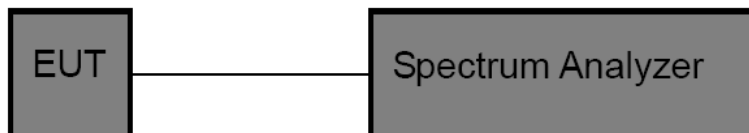

### 7.3. Test Procedure

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 1.5xDTS BW
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

### 7.4. Test Data

Test Item	: Power Spectral Density	Test Mode	: CH Low ~ CH High
Test Voltage	: AC 120V/60Hz for adapter	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH

Mode	Channel	Frequency (MHz)	PPSD (dBm/3KHz)			Correctional Limit (dBm/3KHz)	Results
			ANT1	ANT2	SUM		
802.11b	Low	2412	-13.172	-13.132		7.00	PASS
	Middle	2437	-12.967	-12.961		7.00	PASS
	High	2462	-11.268	-11.261		7.00	PASS
802.11g	Low	2412	-18.541	-18.581		7.00	PASS
	Middle	2437	-16.492	-16.494		7.00	PASS
	High	2462	-17.836	-17.834		7.00	PASS
802.11 n20	Low	2412	-19.512	-19.562	-16.53	3.90	PASS
	Middle	2437	-15.906	-15.960	-12.92	3.90	PASS
	High	2462	-18.943	-18.940	-15.93	3.90	PASS
802.11 n40	Low	2422	-23.328	-23.338	-20.32	3.90	PASS
	Middle	2437	-22.405	-22.402	-19.39	3.90	PASS
	High	2452	-23.257	-23.227	-20.23	3.90	PASS

**Note:**

For 802.11b/g/n20 mode,  
Power limit Reduction=7-6=1dBi  
Correctional limit=8-1=7dBm

For 802.11 n40 mode,  
Directional gain=GANT +10log(N)dBi =7+10log2=10.1dBi  
PSD limit Reduction=10.1-6=4.1dBi  
Correctional limit=8-4.1=3.9dBm




ANT 1




802.11b mode : Lowest



802.11b mode : Middle



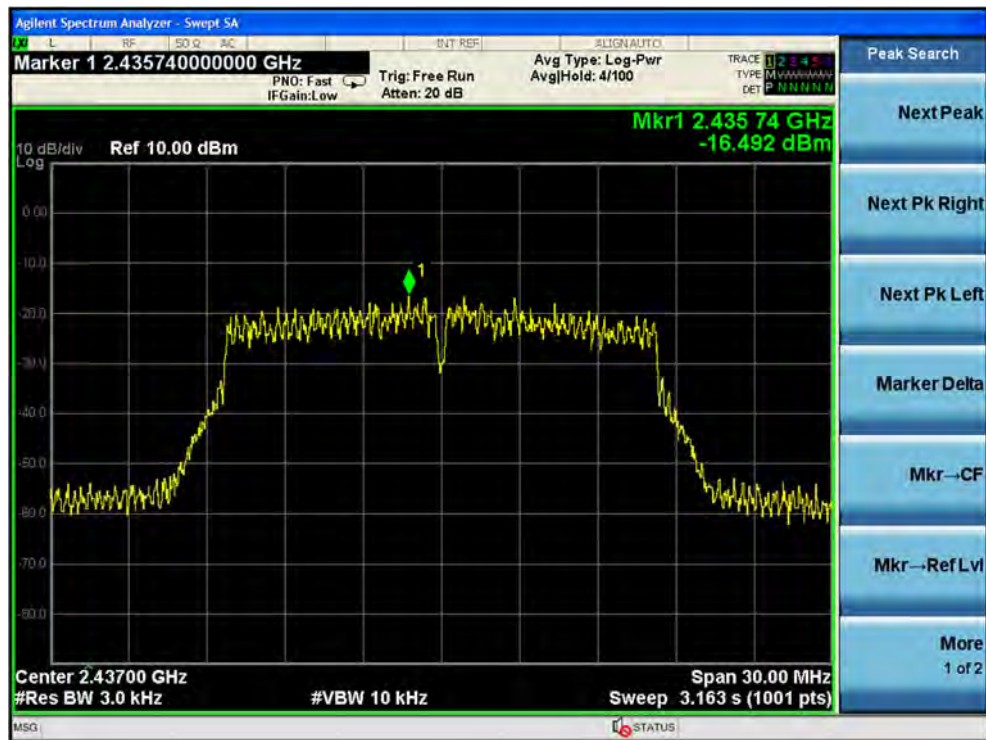


802.11g mode : Middle




802.11g mode : Highest




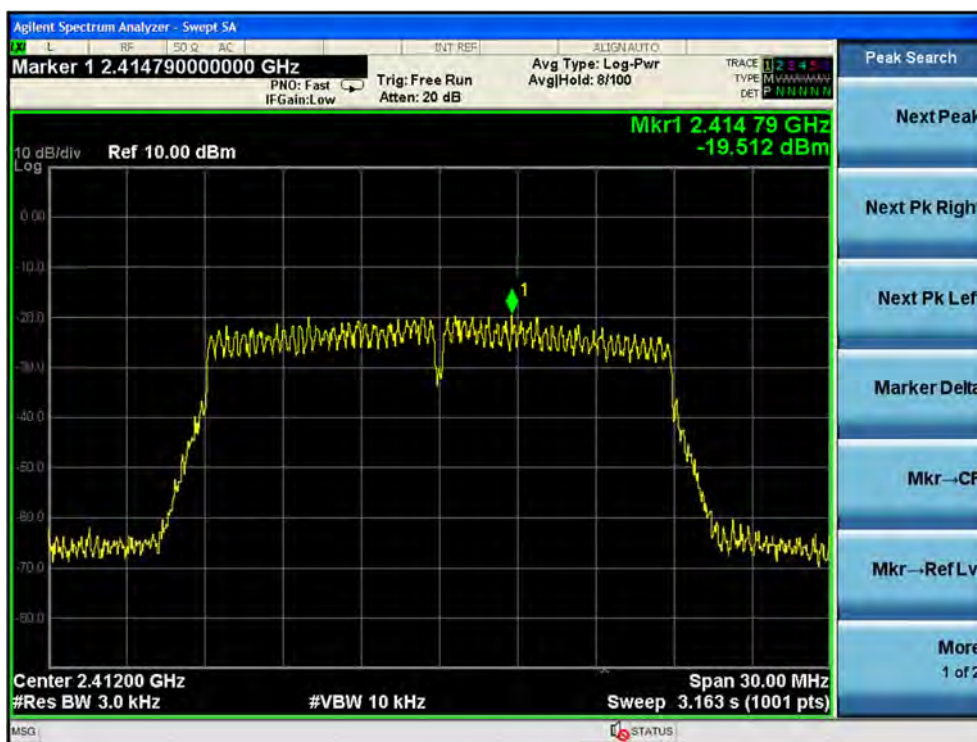


802.11n20 mode : Lowest

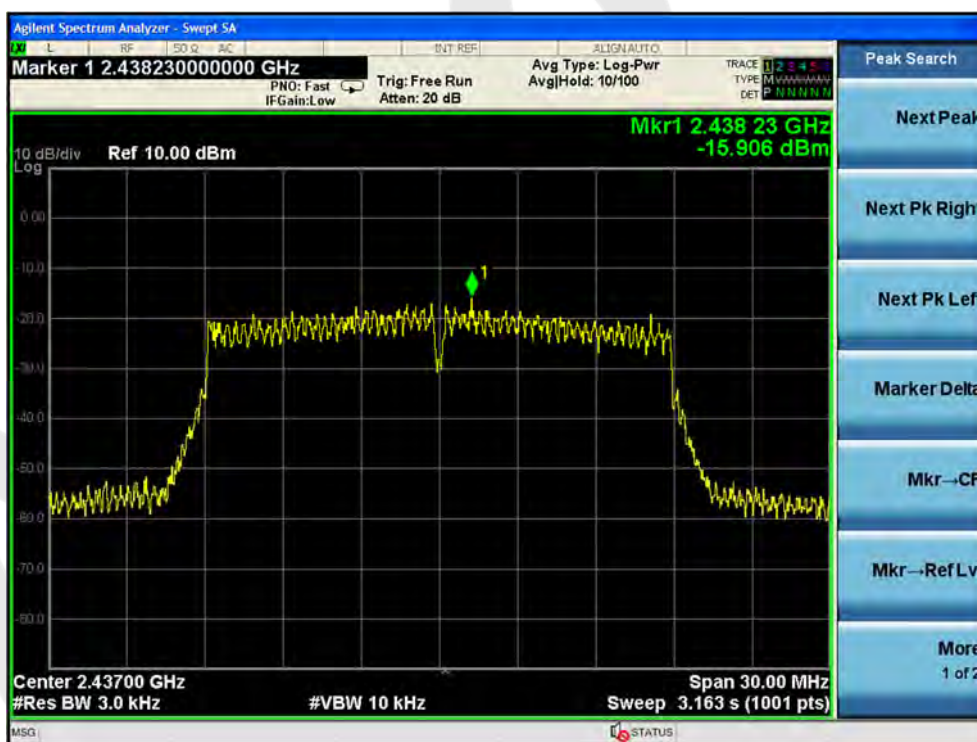


802.11n20 mode : Middle

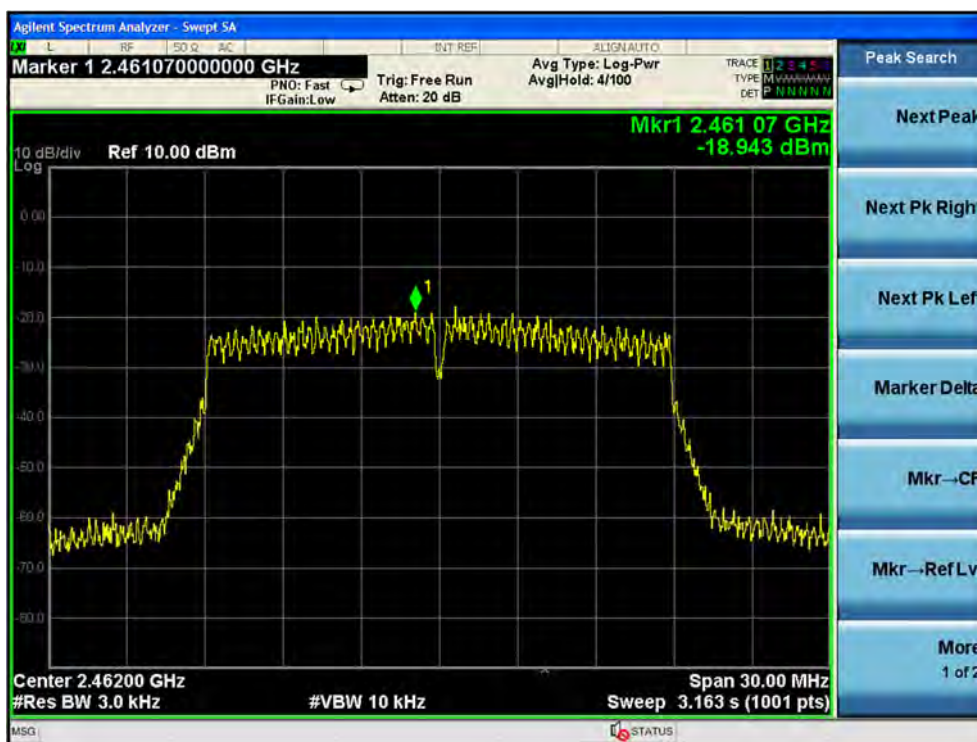

802.11n20 mode : Highest

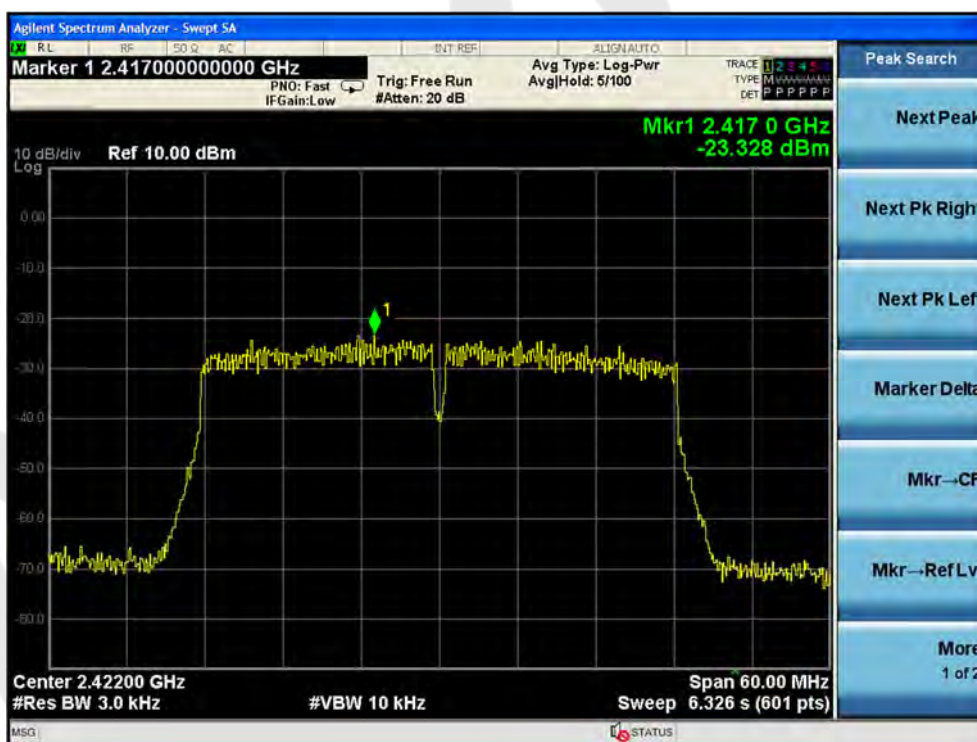

802.11n40 mode : Lowest





ANT 2





802.11b mode : Lowest




802.11b mode : Middle





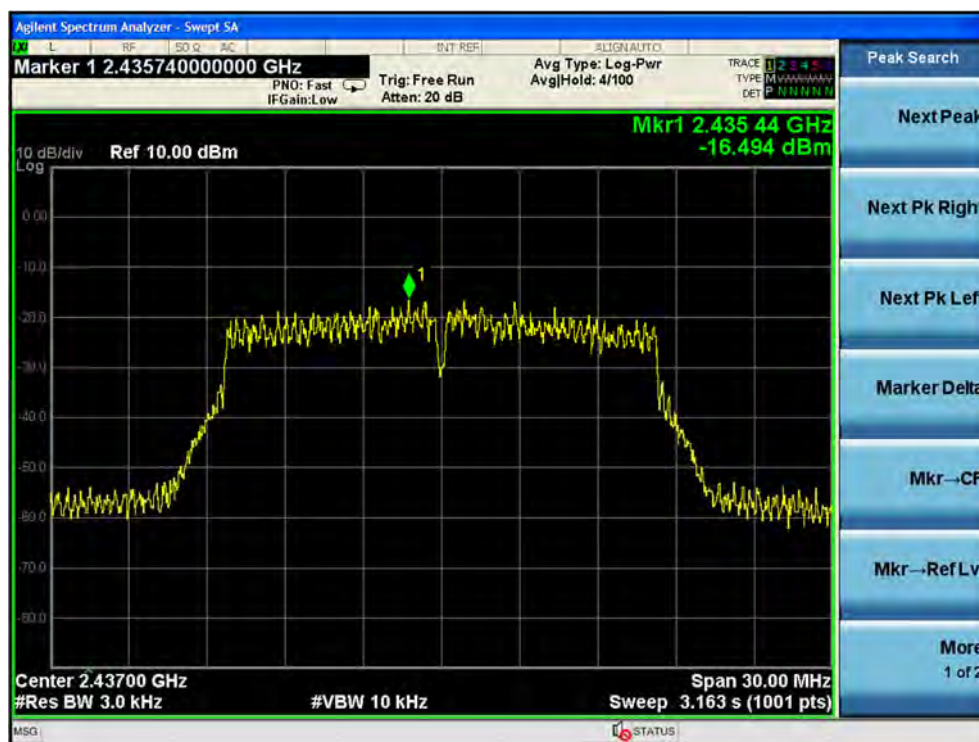


802.11g mode : Middle

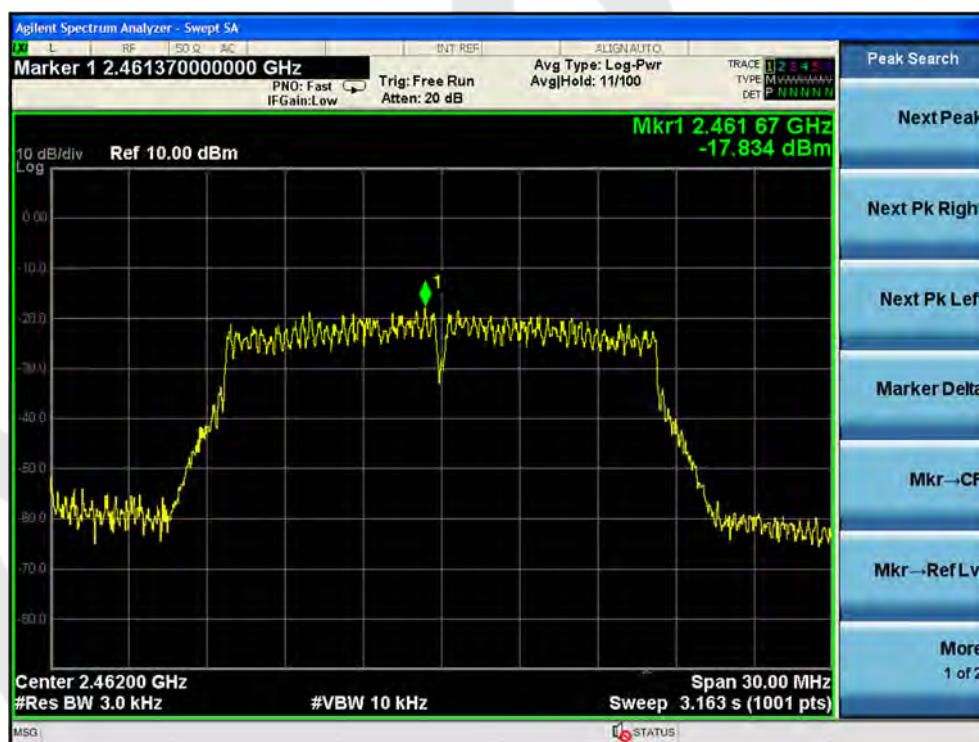

802.11g mode : Highest




802.11n20 mode : Lowest

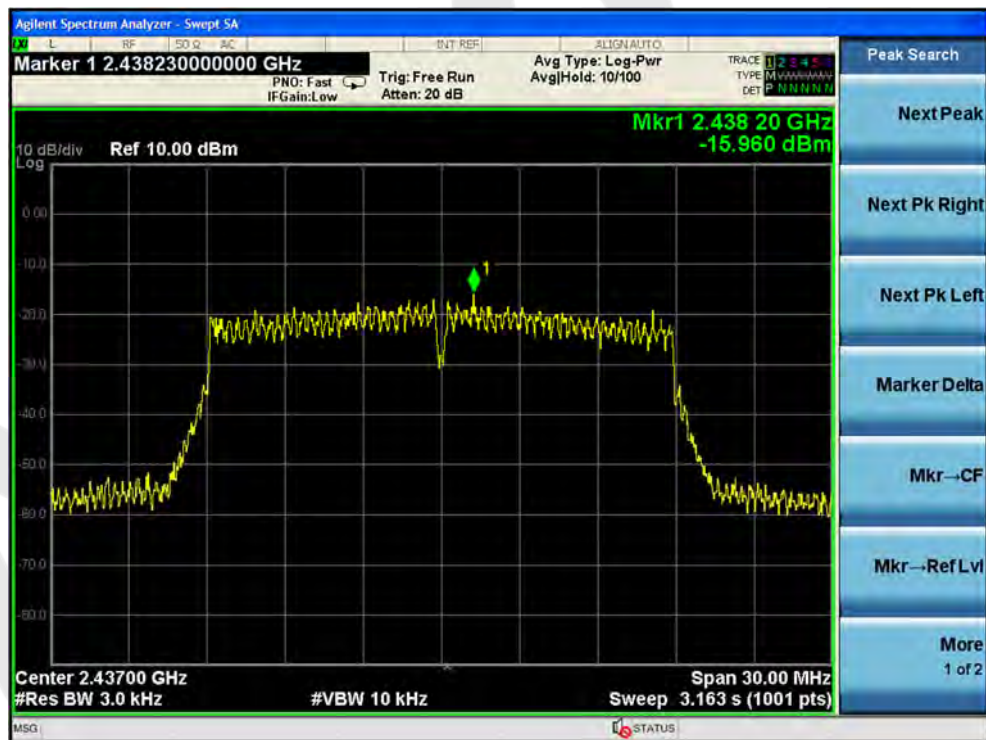

802.11n20 mode : Middle




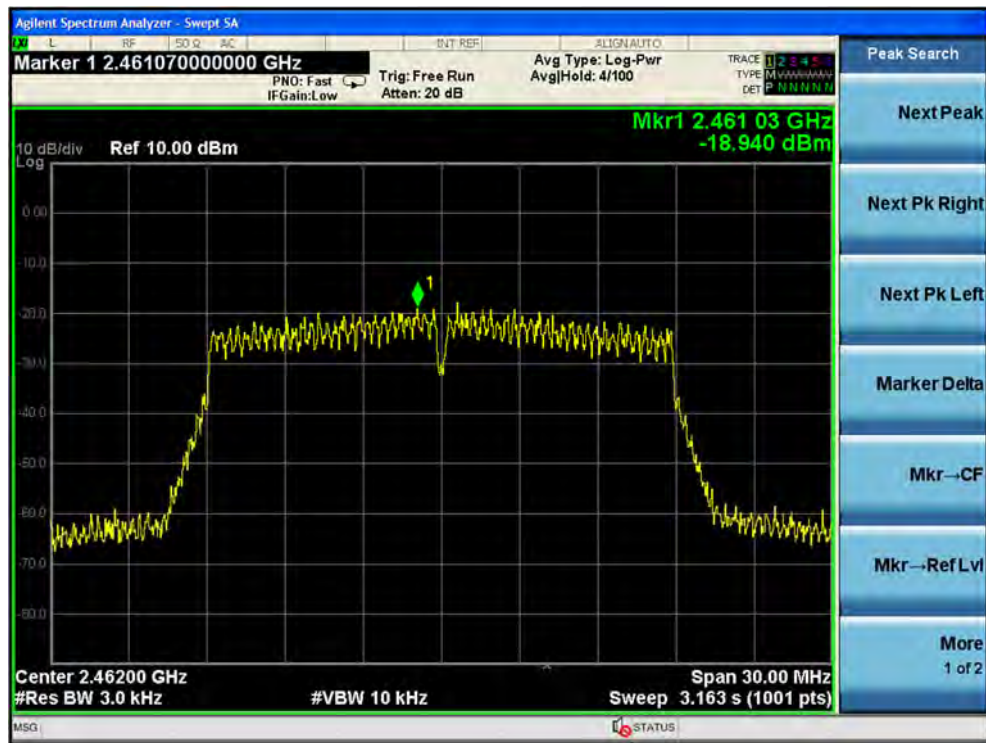


802.11n20 mode : Highest



802.11n40 mode : Lowest

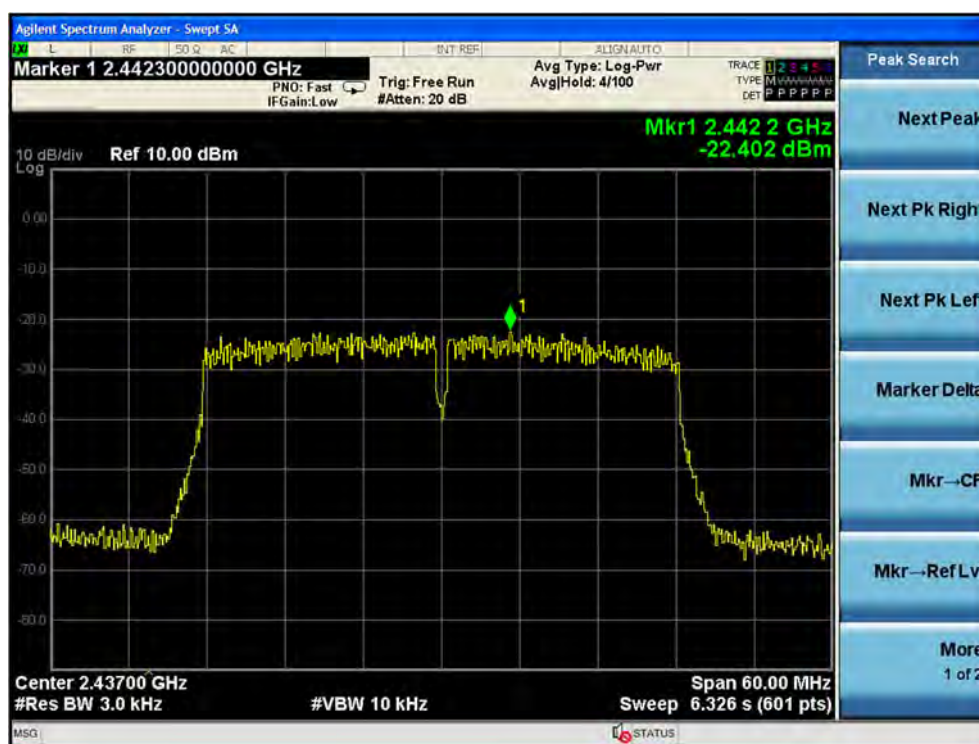

802.11n40 mode : Middle

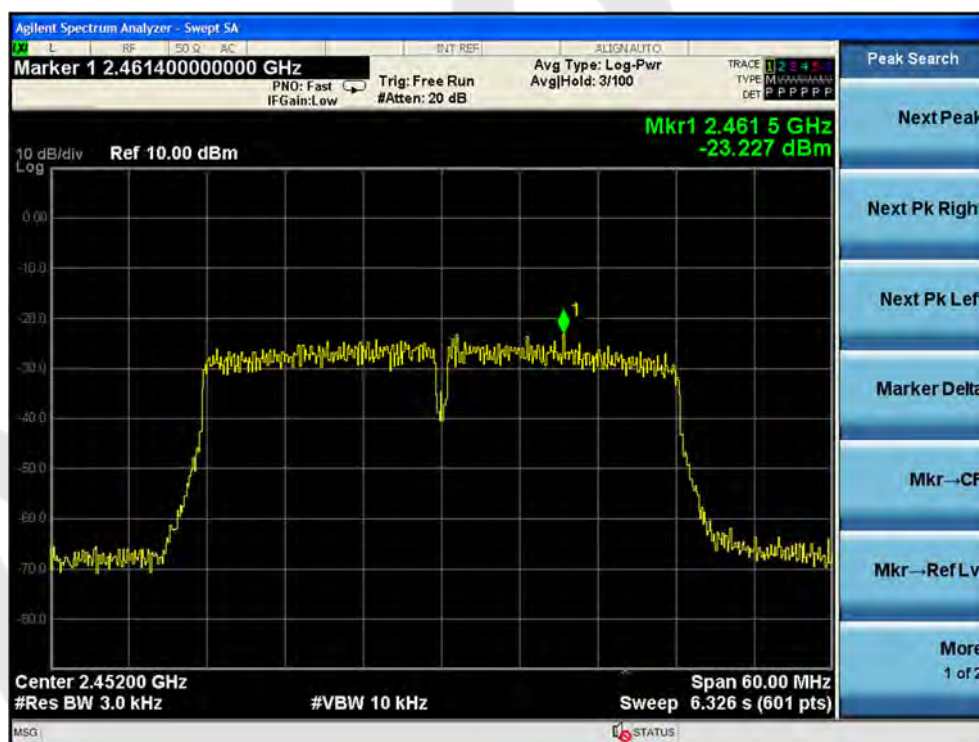


802.11n40 mode : Highest

## 8. 100kHz Bandwidth of Frequency Band Edge Requirement

### 8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

### 8.2. Test Setup

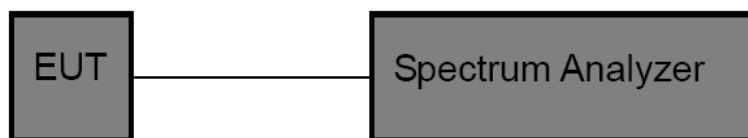

### 8.3. Test Procedure

Using the following spectrum analyzer setting:

1. Set the RBW = 100KHz.
2. Set the VBW = 300KHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

### 8.4. Test Data

Test Item : Band edge  
Test Voltage : AC 120V/60Hz for adapter  
Test Result : PASS

Test Mode : CH Low ~ CH High  
Temperature : 24°C  
Humidity : 55%RH



ANT 1

Mode	Frequency Band (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Results
802.11b	2412	52.653	>20	PASS
	2462	54.499	>20	PASS
802.11g	2412	28.702	>20	PASS
	2462	48.564	>20	PASS
802.11n20	2412	30.059	>20	PASS
	2462	42.805	>20	PASS
802.11n40	2422	32.370	>20	PASS
	2452	40.384	>20	PASS

ANT 2

Mode	Frequency Band (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Results
802.11b	2412	40.757	>20	PASS
	2462	57.399	>20	PASS
802.11g	2412	41.775	>20	PASS
	2462	50.359	>20	PASS
802.11n20	2412	42.187	>20	PASS
	2462	50.386	>20	PASS
802.11n40	2422	36.678	>20	PASS
	2452	43.909	>20	PASS

ANT 1



802.11b mode : Lowest



802.11b mode : Highest



802.11g mode : Lowest



802.11g mode : Highest






802.11n20 mode : Lowest



802.11n20 mode : Highest



802.11n40 mode : Lowest

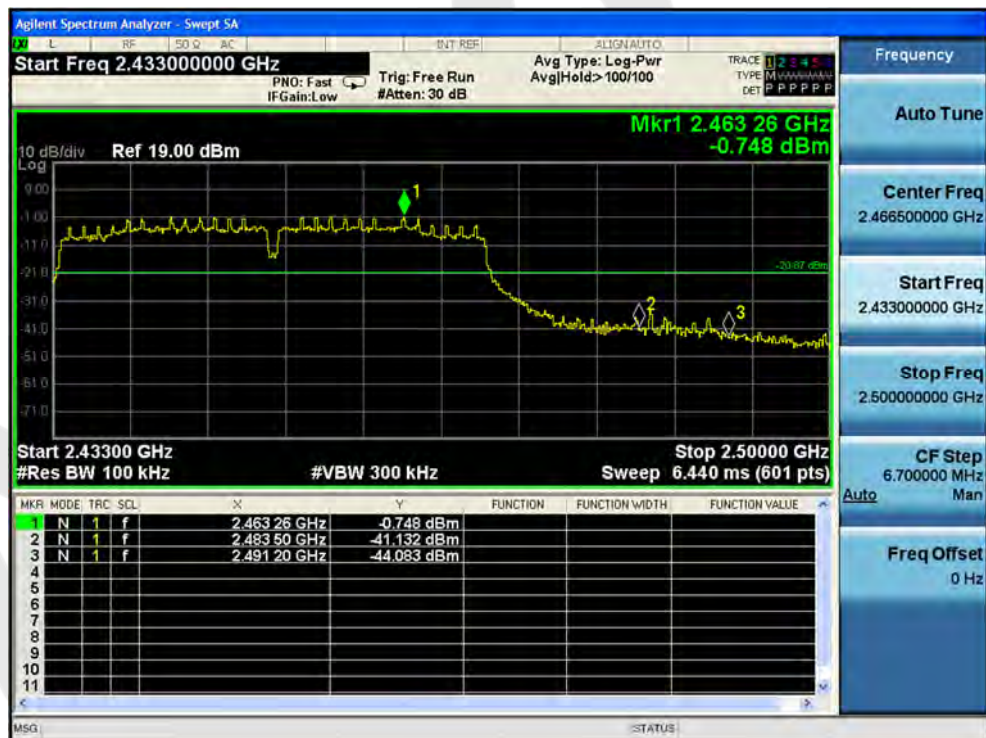

802.11n40 mode : Highest



ANT 2



802.11b mode : Lowest



802.11b mode : Highest






802.11g mode : Lowest



802.11g mode : Highest



802.11n20 mode : Lowest

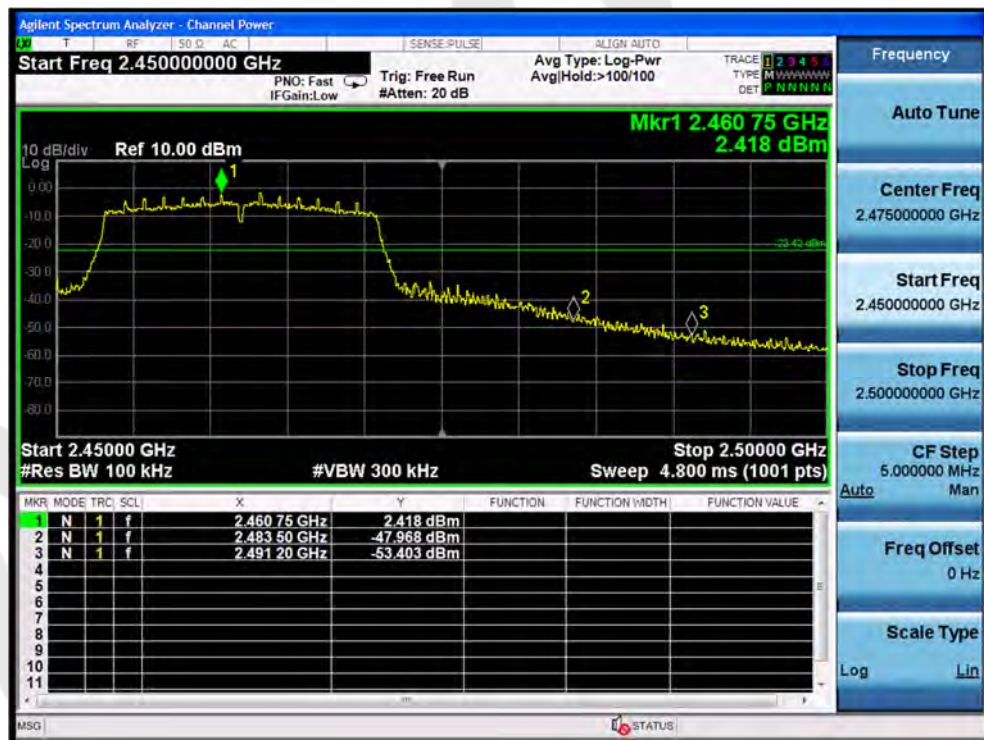


802.11n20 mode : Highest





802.11n40 mode : Lowest

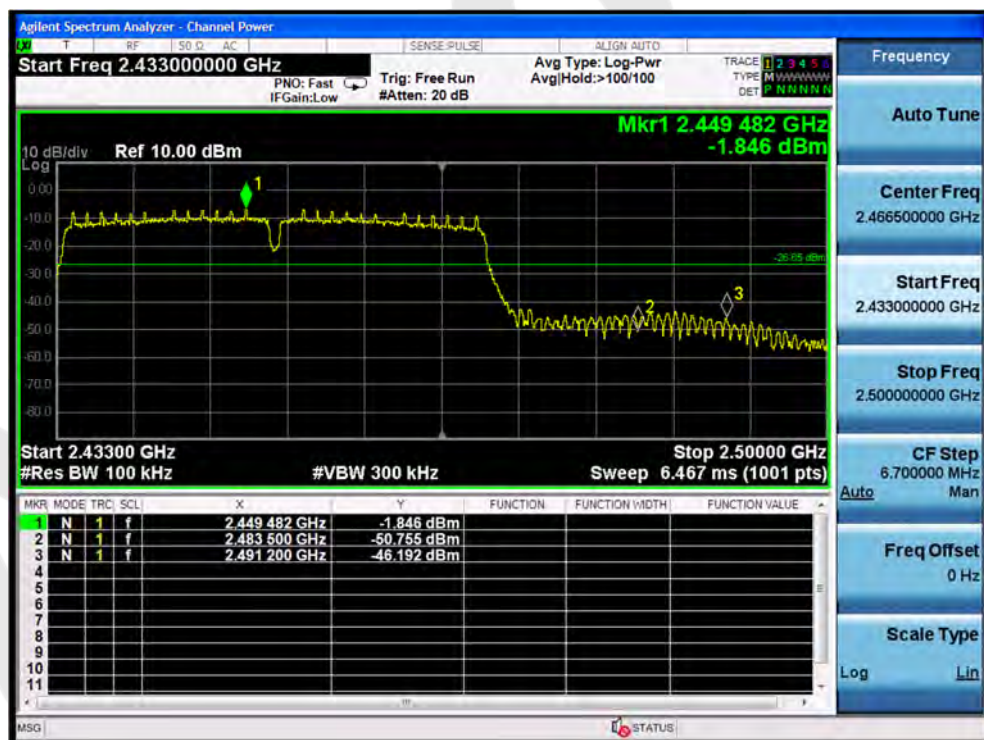

802.11n40 mode : Highest

Conducted Emission Method

ANT 1



802.11b mode : Lowest



802.11b mode : Middle



802.11b mode : Highest



802.11g mode : Lowest



802.11g mode : Middle



802.11g mode : Highest





802.11n20 mode : Lowest




802.11n20 mode : Middle



802.11n20 mode : Highest



802.11n40 mode : Lowest

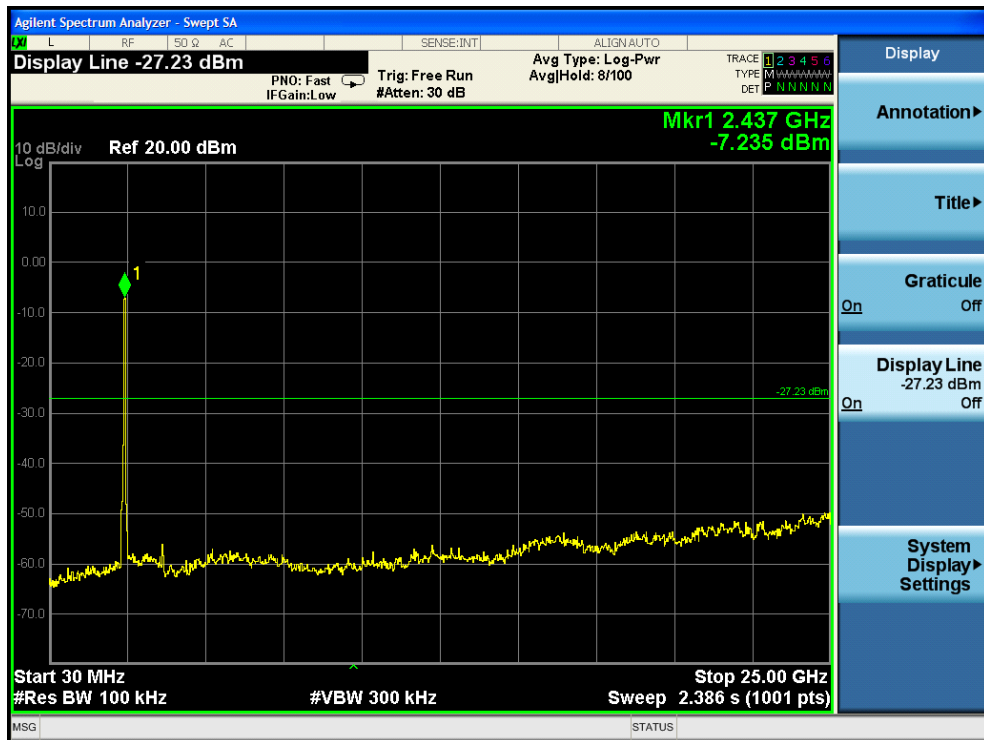

802.11n40 mode : Middle



802.11n40 mode : Highest

## ANT 2



802.11b mode : Lowest



802.11b mode : Middle



802.11b mode : Highest




802.11g mode : Lowest





802.11g mode : Middle

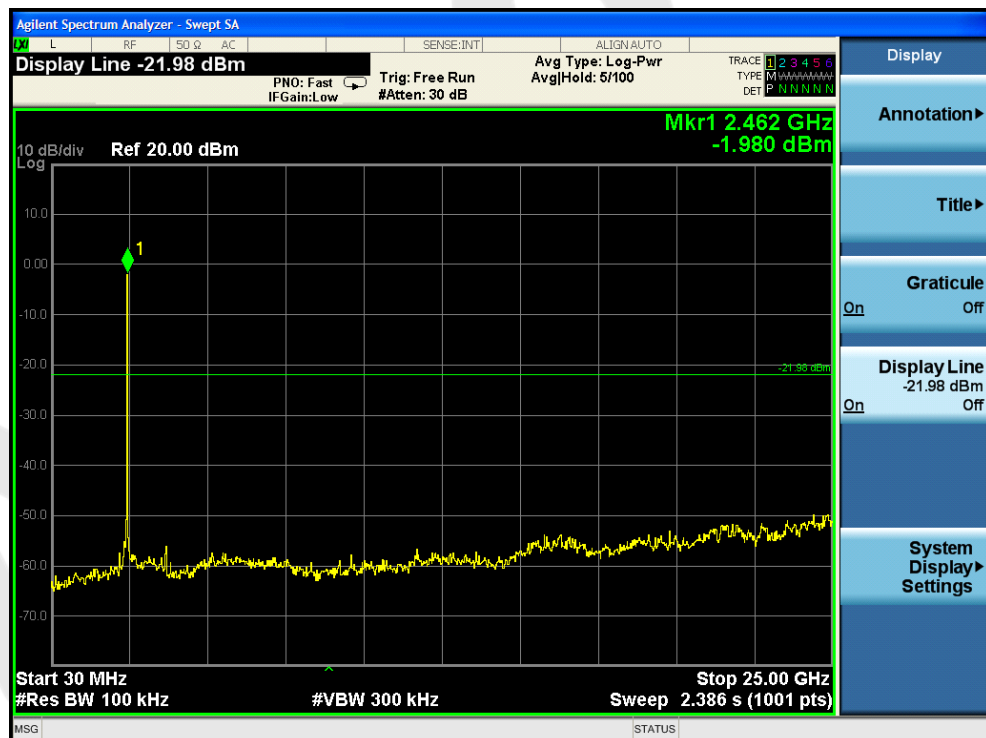

802.11g mode : Highest



802.11n20 mode : Lowest



802.11n20 mode : Middle



802.11n20 mode : Highest



802.11n40 mode : Lowest



802.11n40 mode : Middle



802.11n40 mode : Highest

## 9. Antenna Requirement


### 9.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	<p>1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.</p>

### 9.2. Antenna Connected Construction

The WIFI antenna is an Internal antenna (2X2 MIMO) which permanently attached, and the best case gain of the antenna is 7 dBi each antenna (It is reduced power treatment). It complies with the standard requirement.

**WIFI Antenna**

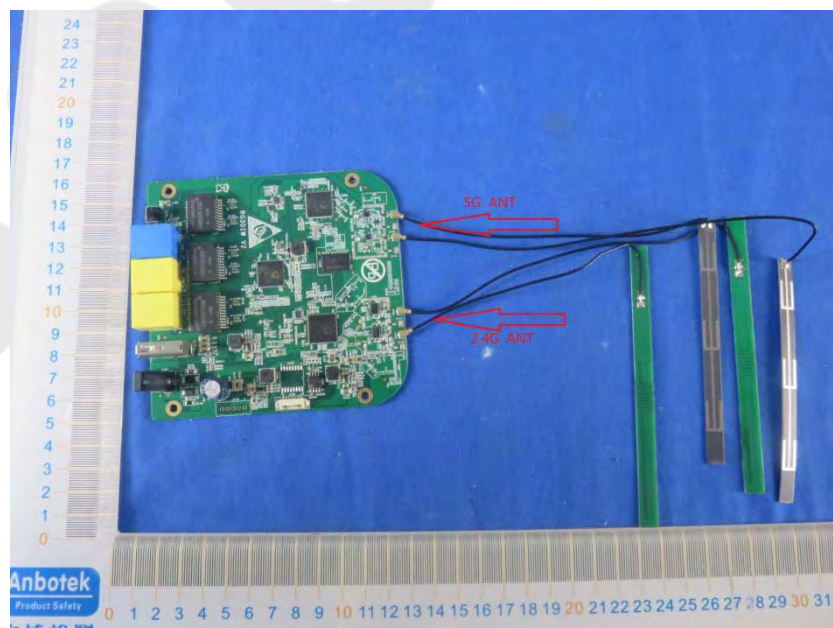




## APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement



Photo of Radiation Emission Test



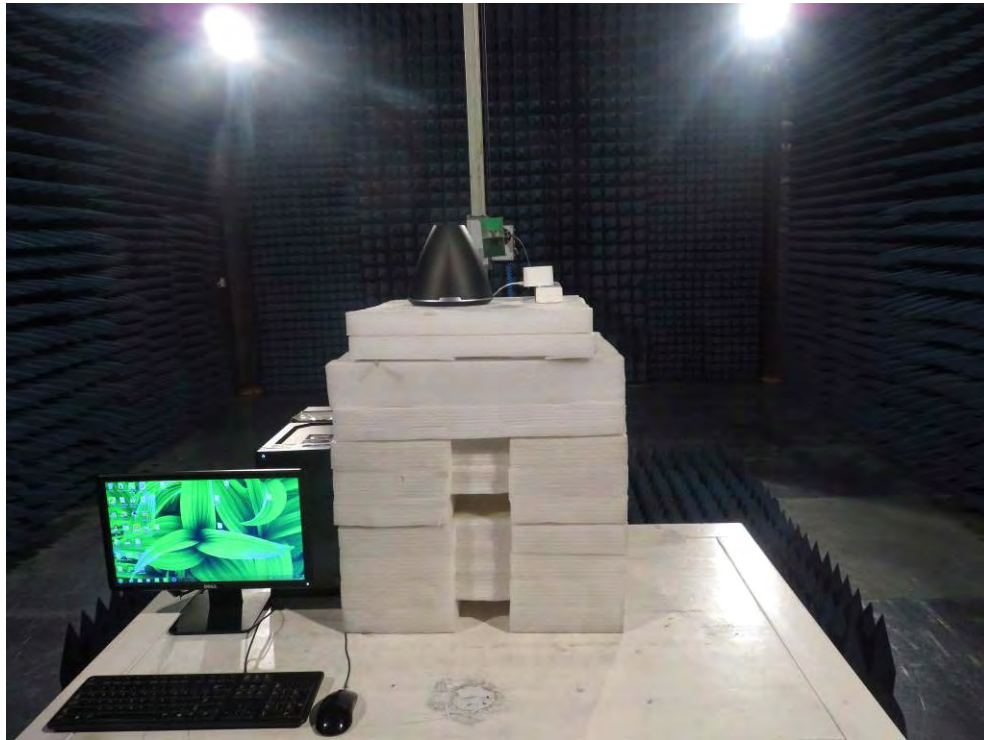

## APPENDIX II -- EXTERNAL PHOTOGRAPH

Please see the test report of R0217060259W2

Anbotek

## APPENDIX III -- INTERNAL PHOTOGRAPH

Please see the test report of R0217060259W2

Anbotek