

SAR TEST REPORT

Reference No. : WTS19S12089113W001
FCC ID : 2AIZN-X656
Applicant : INFINIX MOBILITY LIMITED
Address : ROOM 604 6/F SOUTH TOWER WORLD, FINANCE CTR HARBOUR CITY 17 CANTON ROAD TST KL, Hong Kong
Manufacturer : SHENZHEN TECNO TECHNOLOGY CO.,LTD.
Address : 101, Building 24, Waijing Industrial Park, Fumin Community, Fucheng Street, Longhua District, Shenzhen City, P.R. China
Product : Mobile Phone
Model(s) : X656
Brand Name : Infinix
Standards : FCC 47 CFR Part2(2.1093)
ANSI/IEEE C95.1-2006
IEEE 1528-2013 & Published RF Exposure KDB Procedures
Date of Receipt sample : 2019-12-24
Date of Test : 2019-12-26 to 2020-01-08
Date of Issue : 2020-01-14
Test Result : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,

Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

Ford Wang

Ford Wang / Project Engineer

Approved by:



Philip Zhong

Philip Zhong / Manager

2 Contents

| | Page |
|--|------------|
| 1 COVER PAGE | 1 |
| 2 CONTENTS | 2 |
| 3 REVISION HISTORY | 3 |
| 4 GENERAL INFORMATION | 4 |
| 4.1 GENERAL DESCRIPTION OF E.U.T | 4 |
| 4.2 DETAILS OF E.U.T | 4 |
| 5 EQUIPMENT USED DURING TEST | 7 |
| 5.1 EQUIPMENT LIST | 7 |
| 5.2 TEST EQUIPMENT CALIBRATION | 7 |
| 6 SAR INTRODUCTION..... | 8 |
| 6.1 INTRODUCTION | 8 |
| 6.2 SAR DEFINITION..... | 8 |
| 7 SAR MEASUREMENT SETUP..... | 9 |
| 8 EXPOSURE LIMIT | 18 |
| 9 SYSTEM AND LIQUID VALIDATION..... | 19 |
| 9.1 SYSTEM VALIDATION | 19 |
| 9.2 LIQUID VALIDATION | 21 |
| 10 TYPE A MEASUREMENT UNCERTAINTY | 35 |
| 11 OUTPUT POWER VERIFICATION..... | 38 |
| 12 EXPOSURE CONDITIONS CONSIDERATION | 65 |
| 13 SAR TEST RESULTS | 67 |
| 14 SAR MEASUREMENT REFERENCE..... | 88 |
| MAXIMUM SAR MEASUREMENT PLOTS..... | 89 |
| 15 CALIBRATION REPORTS-PROBE AND DIPOLE | 114 |
| 16 RE-CALIBRATION FOR DIPOLE | 178 |

3 Revision History

| Test report No. | Date of Receipt sample | Date of Test | Date of Issue | Purpose | Comment | Approved |
|------------------------|------------------------|-----------------------------|---------------|----------|---------|----------|
| WTS19S12089 113W001 | 2019-12-24 | 2019-12-26 to 2020-01-08 | 2020-01-14 | original | - | Valid |

4 General Information

4.1 General Description of E.U.T.

| | |
|----------------------|--|
| Product: | Mobile Phone |
| Model(s): | X656 |
| Model Description: | N/A |
| GSM Band(s): | GSM 850/900/1800/1900MHz |
| GPRS/EGPRS Class: | 12 |
| WCDMA Band(s): | FDD Band II/IV/V |
| LTE Band(s): | FDD Band 2/4/5/7 |
| Wi-Fi Specification: | 2.4G-802.11b/g/n HT20/n HT40 5G-802.11a/ n(HT20/40)/ac(HT20/40/80) |
| Bluetooth Version: | Bluetooth v4.0 with BLE |
| GPS: | Support |
| NFC: | N/A |
| Hardware Version: | V1.1 |
| Software Version: | X656-H6211DLN-Q-191205V73 |
| Note: | This EUT has two SIM card slots, and use same one RF module. We found that RF parameters are the same, when we insert the card 1 and card 2. So we usually performed the test under main card slot 1. |

4.2 Details of E.U.T.

| | |
|----------------------|--|
| Operation Frequency: | GSM/GPRS/EDGE 850: 824~849MHz PCS/GPRS/EDGE 1900: 1850~1910MHz WCDMA Band II: 1850~1910MHz WCDMA Band V: 824~849MHz WCDMA Band IV: 1710~1755MHz LTE Band 2: 1850~1910MHz LTE Band 4: 1710~1755MHz LTE Band 5: 842~849MHz LTE Band 7: 2500~2570MHz WiFi: 802.11b/g/n HT20: 2412~2462MHz 802.11n HT40: 2422~2452MHz 802.11a/ n(HT20/40)/ac(HT20/40/80): 5150MHz to 5250MHz 802.11a/ n(HT20/40)/ac(HT20/40/80): 5725MHz to 5850MHz Bluetooth: 2402~2480MHz BLE: 2402~2480MHz |
|----------------------|--|

| | |
|-----------------------|---|
| Max. RF output power: | GSM 850: 32.93dBm PCS1900: 29.74dBm WCDMA Band II: 22.82dBm WCDMA Band V: 22.83dBm WCDMA Band IV: 22.78dBm LTE Band 2: 21.99dBm LTE Band 4: 21.98dBm LTE Band 5: 22.92dBm LTE Band 7: 21.95dBm WiFi(2.4G): 14.43dBm U-NII-1: 16.92dBm U-NII-3: 14.23dBm Bluetooth: 6.94dBm BLE: -3.58dBm |
| Max.SAR: | 1.15 W/Kg 1g Head Tissue 0.68 W/Kg 1g Body Tissue 0.82 W/Kg 1g Hotspot |
| Max Simultaneous SAR | 1.57 W/Kg |
| Type of Modulation: | GSM,GPRS: GMSK EDGE: GMSK, 8PSK WCDMA: BPSK LTE: QPSK, 16QAM WiFi: CCK, OFDM Bluetooth: GFSK, Pi/4 DQPSK,8DPSK |
| Antenna installation | GSM/WCDMA/LTE: internal permanent antenna WiFi/Bluetooth: internal permanent antenna |
| Antenna Gain: | GSM 850: -3.39dBi PCS1900: -0.77dBi WCDMA Band II: -0.77dBi WCDMA Band V: -3.39dBi WCDMA Band IV: 0.33dBi LTE Band 2: -0.77dBi LTE Band 4: 0.33dBi LTE Band 5: -3.39dBi LTE Band 7: 0.47dBi WiFi(2.4G): 3.9dBi U-NII-1: 3.9dBi U-NII-3: 3.9dBi Bluetooth: 3.9dBi |
| Ratings: | Battery DC 3.85V, 4900mAh |

Adapter: DC 5V, 2.0A, charging from adapter
(Adapter Input: 100-240V~50/60Hz 0.35A)
Manufacturer: Dongguan Aohai Power Technology CO.,LTD
Model No.: A8A-050200U-US1

5 Equipment Used during Test

5.1 Equipment List

| Name of Equipment | Manufacturer | Type/Model | Serial Number | Calibration Date | Calibration Due |
|--------------------------------------|-------------------|------------------------|------------------------|------------------|-----------------|
| 6 AXIS ROBOT | KUKA | KR6 R900 SIXX | 502635 | N/A | N/A |
| SATIMO Test Software | MVG | OPENSAR | V_4_02_27 | N/A | N/A |
| PHANTOM TABLE | MVG | N/A | SAR_1215_01 | N/A | N/A |
| SAM PHANTOM | MVG | SAM118 | SN 11/15 SAM118 | N/A | N/A |
| MultiMeter | Keithley | MiltiMeter 2000 | 4073942 | 2019-02-27 | 2020-02-26 |
| Data Acquisition Electronics | MVG | DAE4 | 915 | 2019-02-27 | 2020-02-26 |
| S-Parameter Network Analyzer | Agilent | 8753E | JP38160684 | 2019-09-17 | 2020-09-16 |
| Universal Radio Communication Tester | ROHDE&SCHW ARZ | CMU200 | 114798 | 2019-09-17 | 2020-09-16 |
| Wideband Radio Communication Tester | ROHDE&SCHW ARZ | CMW500 | / | 2019-09-17 | 2020-09-16 |
| E-Field Probe | MVG | SSE5 | SN 07/15 EP247 | 2019-08-20 | 2020-08-19 |
| DIPOLE 835 | MVG | SID835 | SN 09/15 DIP 0G835-358 | 2018-02-28 | 2020-02-27 |
| DIPOLE 1800 | MVG | SID1800 | SN 09/15 DIP 1G800-360 | 2018-02-28 | 2020-02-27 |
| DIPOLE 1900 | MVG | SID1900 | SN 09/15 DIP 1G900-361 | 2018-02-28 | 2020-02-27 |
| DIPOLE 2450 | MVG | SID2450 | SN 09/15 DIP 2G450-363 | 2018-02-28 | 2020-02-27 |
| DIPOLE 2600 | MVG | SID2600 | SN 16/15 DIP 2G600-376 | 2018-02-28 | 2020-02-27 |
| Limesar Dielectric Probe | MVG | SCLMP | SN 11/15 OCPG 69 | 2019-02-28 | 2020-02-27 |
| Power Amplifier | BONN | BLWA 0830 -160/100/40D | 128740 | 2019-09-17 | 2020-09-16 |
| Signal Generator | R&S | SMB100A | 105942 | 2019-09-17 | 2020-09-16 |
| Power Meter | R&S | NRP2 | 102031 | 2019-09-17 | 2020-09-16 |
| Power Meter | R&S | NRVD | 102284 | 2019-09-17 | 2020-09-16 |
| USB Wideband Power Sensor | Malaysia Keysight | U2021XA | MY54340009 | 2019-04-19 | 2020-04-18 |
| USB Wideband Power Sensor | Malaysia Keysight | U2021XA | MY54340010 | 2019-04-19 | 2020-04-18 |

5.2 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 SAR Introduction

6.1 Introduction

This measurement report shows compliance of the EUT with ANSI/IEEE C95.1-2006 and FCC 47 CFR Part2 (2.1093).The test procedures, as described in IEEE 1528-2013 Standard for IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques(300MHz~6GHz) and Published RF Exposure KDB Procedures

6.2 SAR Definition

- SAR : Specific Absorption Rate
- The SAR characterize the absorption of energy by a quantity of tissue
- This is related to a increase of the temperature of these tissues during a time period.

$$\text{DAS} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

$$\text{DAS} = c_h \frac{dT}{dt} \Big|_{t=0}$$

$$\text{DAS} = \frac{\sigma E^2}{\rho}$$

SAR definition

$$\text{SAR} = \frac{\sigma E^2}{\rho}$$

- SAR : Specific Absorption Rate
 - σ : Liquid conductivity
 - $\epsilon_r = \epsilon' - j\epsilon''$ (complex permittivity of liquid)

$$\circ \sigma = \frac{\epsilon'' \omega}{\epsilon_0}$$

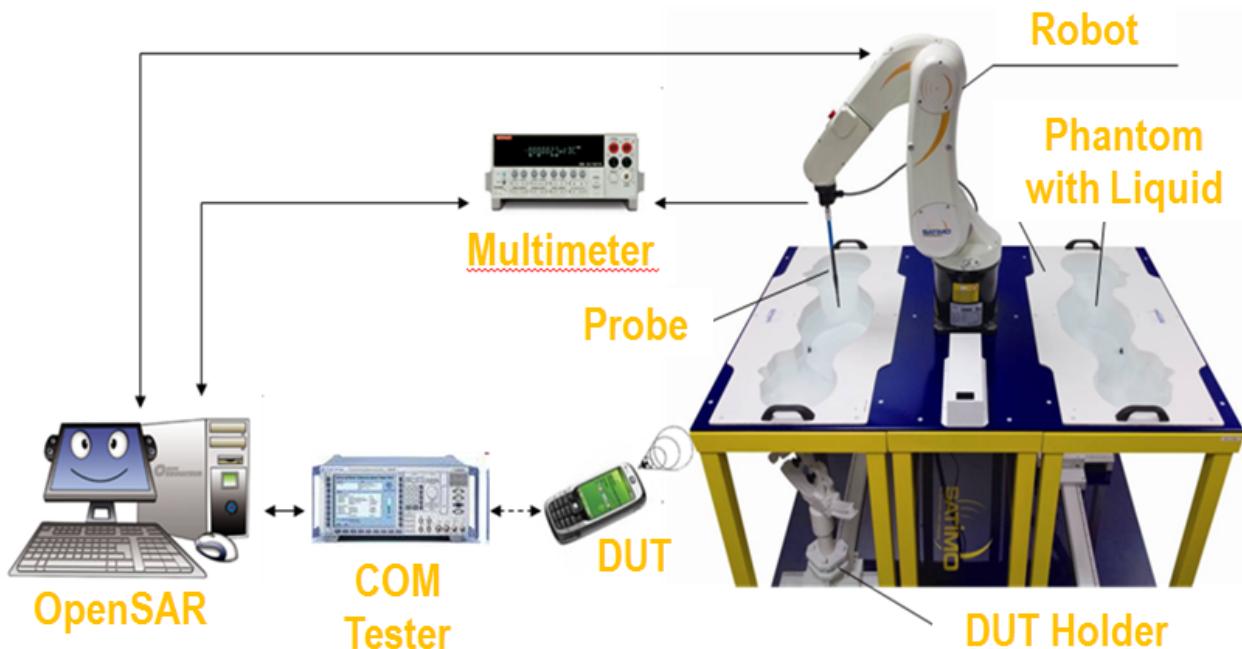
- ρ : Liquid density
 - $\rho = 1000 \text{ g/L} = 1000 \text{ Kg/m}^3$

where:

- σ = conductivity of the tissue (S/m)
- ρ = mass density of the tissue (kg/m³)
- E = rms electric field strength (V/m)

7 SAR Measurement Setup

SAR bench sub-systems



Scanning System (robot)

- It must be able to scan all the volume of the phantom to evaluate the tridimensional distribution of SAR.
- Must be able to set the probe orthogonal of the surface of the phantom ($\pm 30^\circ$).
- Detects stresses on the probe and stop itself if necessary to keep the integrity of the probe.



SAM Phantom (Specific Anthropomorphic Mannequin)

- The probe scanning of the E-Field is done in the 2 half of the normalized head.
- The normalized shape of the phantom corresponds to the dimensions of 90% of an adult head size.
- The materials for the phantom should not affect the radiation of the device under test (DUT)
 - Permittivity < 5
- The head is filled with tissue simulating liquid.
- The hand holding the DUT does not have to be modeled.

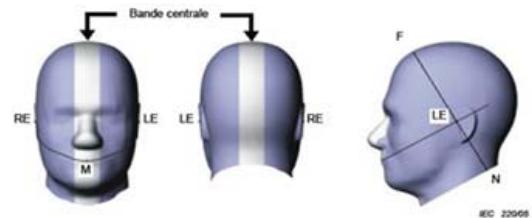
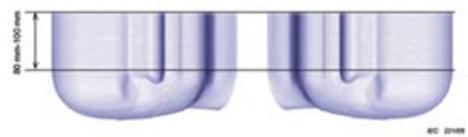
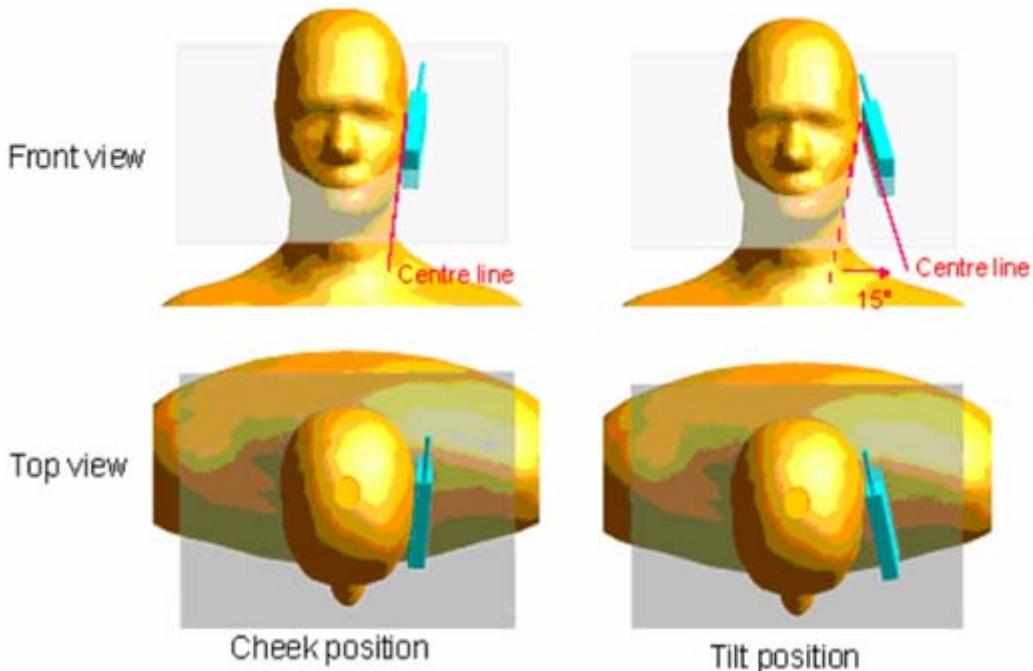


Illustration du fantôme donnant les points de référence des oreilles, RE et LE, le point de référence de la bouche, M, la ligne de référence H-F et la bande centrale



Bi-section sagittale du fantôme avec périmètre étendu (montré sur le côté comme lors des essais de DAS de l'appareil)



The OPENSAR system for performing compliance tests consist of the following items:

1. A standard high precision 6-axis robot (KUKA) with controller and software.
2. KUKA Control Panel (KCP).
3. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
4. The functions of the PC plug-in card are to perform the time critical task such as signal filtering, surveillance of the robot operation fast movement interrupts.
5. A computer operating Windows 7.
6. OPENSAR software.
7. Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.
8. The SAM phantom enabling testing left-hand right-hand and body usage.
9. The Position device for handheld EUT.
10. Tissue simulating liquid mixed according to the given recipes (see Application Note).
11. System validation dipoles to validate the proper functioning of the system.

Data Evaluation

The OPENSAR software automatically executes the following procedure to calculate the field units from the microvolt readings at the probe connector. The parameters used in the valuation are stored in the configuration modules of the software:

| | | |
|------------------|---|-------------------|
| Probe Parameters | - Sensitivity | Norm _i |
| | - Conversion factor | ConvFi |
| | - Diode compression point Dcp _i | |
| Device Parameter | - Frequency | f |
| | - Crest factor | cf |
| Media Parameters | - Conductivity | σ |
| | - Density | ρ |

These parameters must be set correctly in the software. They can either be found in the component documents or be imported into the software from the configuration files issued for the OPENSAR components.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Where V_i = Compensated signal of channel i ($i = x, y, z$)

U_i = Input signal of channel i ($i = x, y, z$)

cf = Crest factor of exciting field (DASY parameter)

dcp_i = Diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$E\text{-field probes: } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$H\text{-field probes: } H_i = \sqrt{V_i} \cdot \frac{a_{10} + a_{11}f + a_{12}f^2}{f}$$

Where V_i = Compensated signal of channel i ($i = x, y, z$)

$Norm_i$ = Sensor sensitivity of channel i ($i = x, y, z$)
 $\mu V/(V/m)^2$ for E-field Probes

$ConvF$ = Sensitivity enhancement in solution

a_{ij} = Sensor sensitivity factors for H-field probes

- f = Carrier frequency (GHz)
 E_i = Electric field strength of channel i in V/m
 H_i = Magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

- where SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [siemens/m]
 ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

$$P_{\text{pwe}} = \frac{E_{\text{tot}}^2}{3770} \quad \text{or} \quad P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

- where P_{pwe} = Equivalent power density of a plane wave in mW/cm²
 E_{tot} = total electric field strength in V/m
 H_{tot} = total magnetic field strength in A/m

SAR Evaluation – Peak Spatial - Average

The procedure for assessing the peak spatial-average SAR value consists of the following steps

- **Power Reference Measurement**

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

- **Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in OPENSAR software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom.

When the area scan's property sheet is brought-up, grid was at to 15 mm by 15 mm and can be edited by a user.

- **Zoom Scan**

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures 5 x 5 x 7 points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more than one maximum, the number of Zoom Scans has to be enlarged accordingly (The default number inserted is 1).

- **Power Drift measurement**

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have OPENSAR software stop the measurements if this limit is exceeded.

SAR Evaluation – Peak SAR

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1528 standard. It can be conducted for 1 g and 10 g. The OPENSAR system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maximum searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. They are used in the Cube Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the fourth order least square polynomial method for extrapolation. For a grid using 5x5x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1 g and 10 g cubes.

Definition of Reference Points

Ear Reference Point

Figure 6.2 shows the front, back and side views of the SAM Phantom. The point "M" is the reference point for the center of the mouth, "LE" is the left ear reference point (ERP), and "RE" is the right ERP. The ERPs are 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 6.1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 6.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].

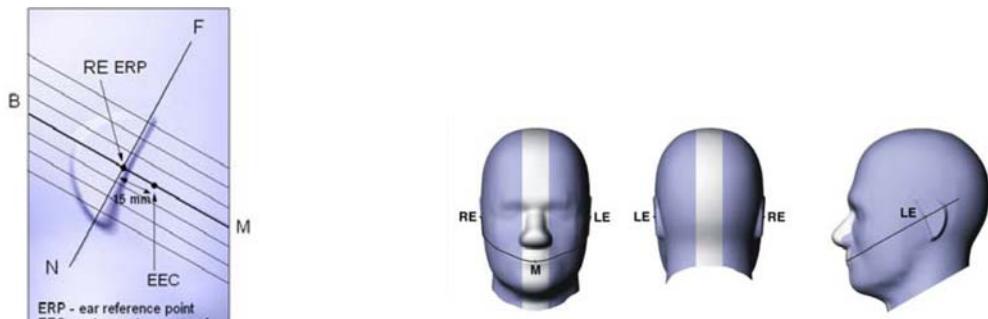


Figure 6.1 Close-up side view of ERP's

Figure 6.2 Front, back and side view of SAM

Device Reference Points

Two imaginary lines on the device need to be established: the vertical centerline and the horizontal line. The test device is placed in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point" (See Fig. 6.3). The "test device reference point" is then located at the same level as the center of the ear reference point. The test device is positioned so that the "vertical centerline" is bisecting the front surface of the device at its top and bottom edges, positioning the "ear reference point" on the outer surface of both the left and right head phantoms on the ear reference point [5].

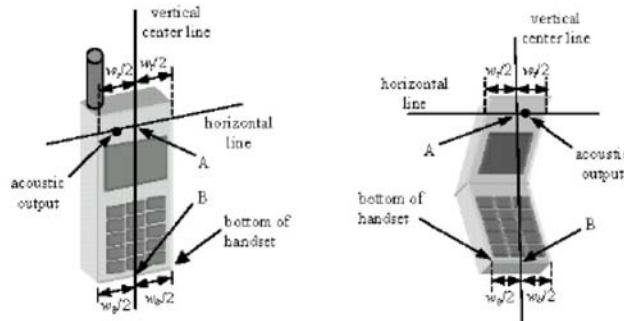


Figure 6.3 Handset Vertical Center & Horizontal Line Reference Points

Test Configuration – Positioning for Cheek / Touch

1. Position the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure below), such that the plane defined by the vertical center line and the horizontal line of the device is approximately parallel to the sagittal plane of the phantom

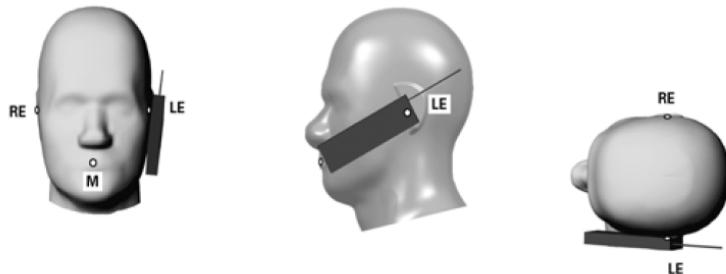


Figure 7.1 Front, Side and Top View of Cheek/Touch Position

2. Translate the device towards the phantom along the line passing through RE and LE until the device touches the ear.
3. While maintaining the device in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to MB-NF including the line MB (called the reference plane).
4. Rotate the device around the vertical centerline until the device (horizontal line) is symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE and maintaining the device contact with the ear, rotate the device about the line NF until any point on the device is in contact with a phantom point below the ear (cheek). See Figure below.




Figure 7.2 Side view w/ relevant markings

Test Configuration – Positioning for Ear / 15° Tilt

With the test device aligned in the Cheek/Touch Position":

1. While maintaining the orientation of the device, retracted the device parallel to the reference plane far enough to enable a rotation of the device by 15 degrees.
2. Rotate the device around the horizontal line by 15 degrees.
3. While maintaining the orientation of the device, move the device parallel to the reference plane until any part of the device touches the head. (In this position, point A is located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, the angle of the device shall be reduced. The tilted position is obtained when any part of the device is in contact with the ear as well as a second part of the device is in contact with the head (see Figure below).

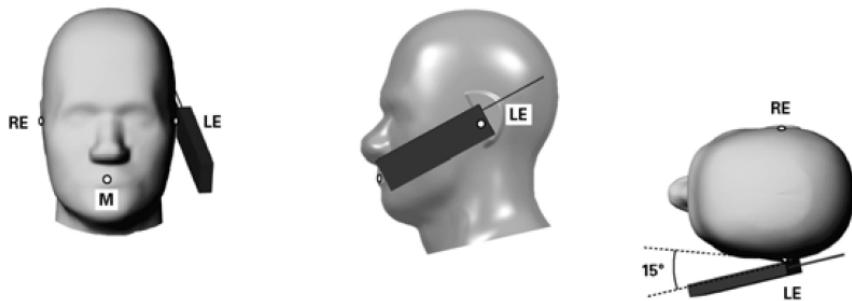
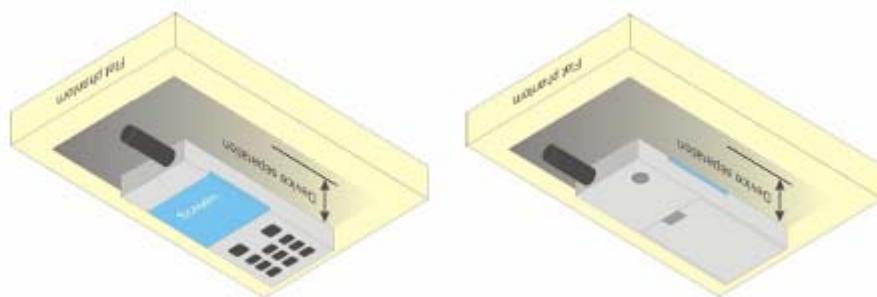


Figure 7.3 Front, Side and Top View of Ear/15° Tilt Position

Test Position – Body Configurations

Body Worn Position

- (a) To position the device parallel to the phantom surface with either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 1.0 cm or holster surface and the flat phantom to 0 cm.



8 Exposure limit

In order for users to be aware of the body-worn operating requirements for meeting RF exposure compliance, operating instructions and cautions statements are included in the user's manual.

Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 8.1 Human Exposure Limits

| | UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g) | CONTROLLED ENVIRONMENT Professional Population (W/kg) or (mW/g) |
|--|--|---|
| SPATIAL PEAK SAR ¹ Brain | 1.60 | 8.00 |
| SPATIAL AVERAGE SAR ² Whole Body | 0.08 | 0.40 |
| SPATIAL PEAK SAR ³ Hands, Feet, Ankles, Wrists | 4.00 | 20.00 |

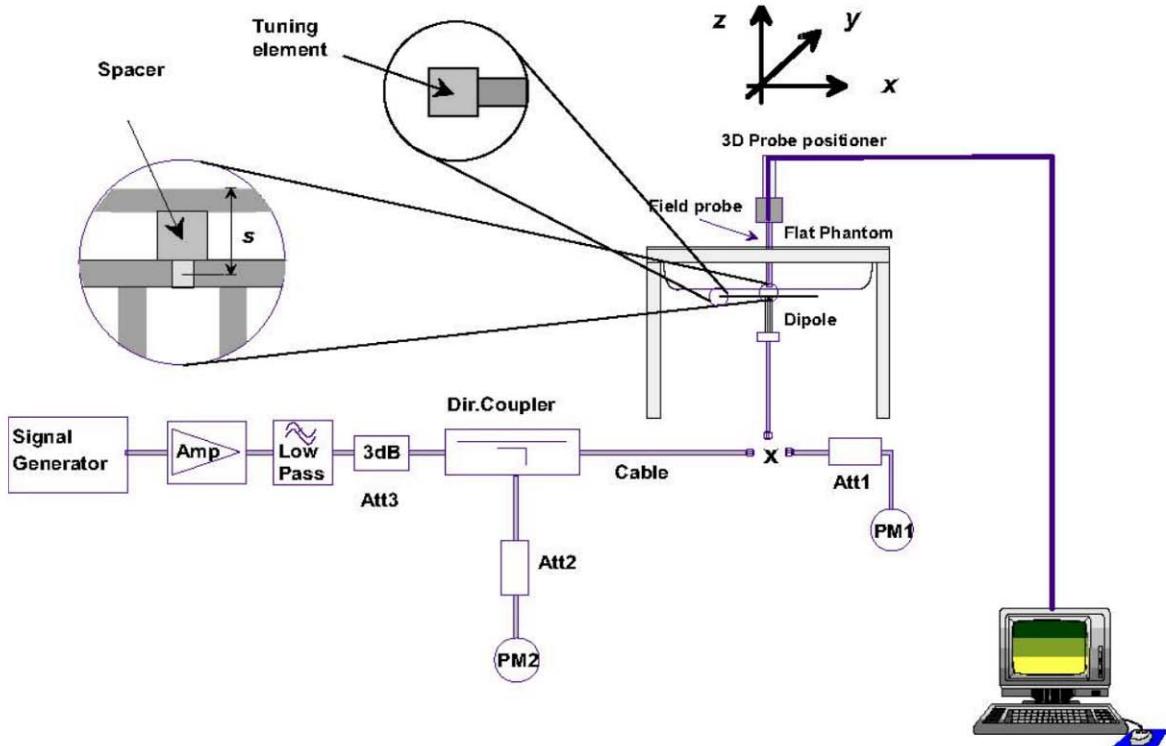
¹ The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

² The Spatial Average value of the SAR averaged over the whole body.

³ The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

9 System and liquid validation

9.1 System validation



The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole

The output power on dipole port must be calibrated to 30 dBm (1000 mW) before dipole is connected.

Numerical reference SAR values (W/kg) for reference dipole and flat phantom

| Frequency (MHz) | 1g SAR | 10g SAR | Local SAR at surface(above feed-point) | Local SAR at surface(y = 2 cm offset from feedpoint) |
|--------------------|--------|---------|--|--|
| 300 | 3.02 | 2.04 | 4.40 | 2.10 |
| 450 | 4.92 | 3.28 | 7.20 | 3.20 |
| 750 | 8.49 | 5.55 | 12.6 | 4.59 |
| 835 | 9.56 | 6.22 | 14.1 | 4.90 |
| 900 | 10.9 | 6.99 | 16.4 | 5.40 |
| 1450 | 29.0 | 16.0 | 50.2 | 6.50 |
| 1800 | 38.4 | 20.1 | 69.5 | 6.80 |
| 1900 | 39.7 | 20.5 | 72.1 | 6.60 |
| 2000 | 41.1 | 21.1 | 74.6 | 6.50 |
| 2450 | 52.4 | 24.0 | 104 | 7.70 |
| 2600 | 55.3 | 24.6 | 113 | 8.29 |
| 3000 | 63.8 | 25.7 | 140 | 9.50 |

Table 1: system validation (1g)

| Measurement Date | Frequency (MHz) | Liquid Type (head/body) | 1W Target SAR1g (W/kg) | Measured SAR1g (W/kg) | 1W Normalized SAR1g (W/kg) | Deviation ($\pm 10\%$) |
|------------------|-----------------|-------------------------|------------------------|-----------------------|----------------------------|--------------------------|
| 2019-12-26 | 835 | head | 9.58 | 0.953 | 9.53 | -0.5 |
| 2019-12-26 | 835 | body | 9.78 | 1.029 | 10.29 | 5.2 |
| 2020-01-07 | 1800 | head | 38.76 | 4.112 | 41.12 | 6.1 |
| 2020-01-07 | 1800 | body | 38.90 | 3.711 | 37.11 | -4.6 |
| 2020-01-08 | 1900 | head | 39.61 | 3.985 | 39.85 | 0.6 |
| 2020-01-08 | 1900 | body | 40.01 | 3.894 | 38.94 | -2.7 |
| 2020-01-06 | 2450 | head | 54.31 | 5.547 | 55.47 | 2.1 |
| 2020-01-06 | 2450 | body | 53.67 | 5.265 | 52.65 | -1.9 |
| 2020-01-08 | 2600 | head | 56.32 | 5.201 | 52.01 | -7.7 |
| 2020-01-08 | 2600 | body | 55.20 | 5.340 | 53.40 | -3.3 |

Note: system check input power: 100mW

9.2 liquid validation

The dielectric parameters were checked prior to assessment using the HP85070C dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.

KDB 865664 recommended Tissue Dielectric Parameters

The head and body tissue parameters given in this below table should be used to measure the SAR of transmitters operating in 100 MHz to 6 GHz frequency range. The tissue dielectric parameters of the tissue medium at the test frequency should be within the tolerance required in this document. The dielectric parameters should be linearly interpolated between the closest pair of target frequencies to determine the applicable dielectric parameters corresponding to the device test frequency.

The head tissue dielectric parameters recommended by IEEE Std 1528-2013 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in 1528 are derived from tissue dielectric parameters computed from the 4-Cole-Cole equations described above and extrapolated according to the head parameters specified in 1528.

| Target Frequency | Head Tissue | | Body Tissue | |
|------------------|-------------|--------------|------------------------|--------------|
| | MHz | ϵ_r | $\sigma' (\text{S/m})$ | ϵ_r |
| 150 | 52.3 | 0.76 | 61.9 | 0.80 |
| 300 | 45.3 | 0.87 | 58.2 | 0.92 |
| 450 | 43.5 | 0.87 | 56.7 | 0.94 |
| 835 | 41.5 | 0.90 | 55.2 | 0.97 |
| 900 | 41.5 | 0.97 | 55.0 | 1.05 |
| 915 | 41.5 | 0.98 | 55.0 | 1.06 |
| 1450 | 40.5 | 1.20 | 54.0 | 1.30 |
| 1610 | 40.3 | 1.29 | 53.8 | 1.40 |
| 1800-2000 | 40.0 | 1.40 | 53.3 | 1.52 |
| 2450 | 39.2 | 1.80 | 52.7 | 1.95 |
| 2600 | 39.0 | 1.96 | 52.5 | 2.16 |
| 3000 | 38.5 | 2.40 | 52.0 | 2.73 |
| 5800 | 35.3 | 5.27 | 48.2 | 6.00 |

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness Power drifts in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Table 2: Recommended Dielectric Performance of Tissue

| Ingredients (% by weight) | Recommended Dielectric Performance of Tissue | | | | | | | | | | | |
|----------------------------------|--|-------|-------|------|------|------|-------|------|------|------|------|------|
| | Frequency (MHz) | | | | | | | | | | | |
| | 750 | | 835 | | 1800 | | 1900 | | 2450 | | 2600 | |
| Tissue | Head | Body | Head | Body | Head | Body | Head | Body | Head | Body | Head | Body |
| Water | 40.52 | 51.83 | 41.45 | 52.4 | 55.2 | 70.2 | 54.9 | 40.4 | 62.7 | 73.2 | 54.8 | 68.1 |
| Salt (NaCl) | 1.61 | 1.52 | 1.45 | 1.4 | 0.3 | 0.4 | 0.18 | 0.5 | 0.5 | 0.04 | 0.1 | 0.01 |
| Sugar | 57.67 | 46.45 | 56.0 | 45.0 | 0.0 | 0.0 | 0.0 | 58.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| HEC | 0.1 | 0.1 | 1.0 | 1.0 | 0.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Bactericide | 0.1 | 0.1 | 0.1 | 0.1 | 0.0 | 0.0 | 0.0 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 |
| Triton x-100 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 36.8 | 0.0 | 0.0 | 0.0 |
| DGBE | 0.0 | 0.0 | 0.0 | 0.0 | 44.5 | 29.4 | 44.92 | 0.0 | 0.0 | 26.7 | 45.1 | 31.8 |
| Dielectric | 40.93 | 54.32 | 42.54 | 56.1 | 40.0 | 53.3 | 39.9 | 54.0 | 39.8 | 52.5 | 39.0 | 52.5 |
| Conductivity | 0.87 | 0.95 | 0.91 | 0.95 | 1.40 | 1.52 | 1.42 | 1.45 | 1.88 | 1.78 | 1.96 | 2.15 |

Table 3: Dielectric Performance of Head Tissue Simulating Liquid

| Temperature: 21°C , Relative humidity: 57% | | | | |
|---|----------------------|----------------------------|------------------------------|-----------------------|
| Frequency(MHz) | Measured Date | Description | Dielectric Parameters | |
| | | | εr | σ(s/m) |
| 835 | 2019-12-26 | Target Value ±5% window | 41.50 39.43 — 43.58 | 0.90 0.855 — 0.945 |
| | | Measurement Value | 42.03 | 0.89 |
| 1700 | 2020-01-07 | Target Value ±5% window | 40.00 38.00 — 42.00 | 1.40 1.33 — 1.47 |
| | | Measurement Value | 41.99 | 1.37 |
| 1800 | 2020-01-07 | Target Value ±5% window | 40.00 38.00 — 42.00 | 1.40 1.33 — 1.47 |
| | | Measurement Value | 41.14 | 1.42 |
| 1900 | 2020-01-08 | Target Value ±5% window | 40.00 38.00 — 42.00 | 1.40 1.33 — 1.47 |
| | | Measurement Value | 41.25 | 1.45 |
| 2450 | 2020-01-06 | Target Value ±5% window | 39.2 37.24—41.16 | 1.80 1.71 — 1.89 |
| | | Measurement Value | 39.59 | 1.88 |
| 2500 | 2020-01-08 | Target Value ±5% window | 39.0 37.05 — 40.95 | 1.96 1.87 — 2.05 |
| | | Measurement Value | 39.61 | 1.97 |
| 2600 | 2020-01-08 | Target Value ±5% window | 39.0 37.05 — 40.95 | 1.96 1.87 — 2.05 |
| | | Measurement Value | 39.49 | 2.02 |

Table 4: Dielectric Performance of Body Tissue Simulating Liquid

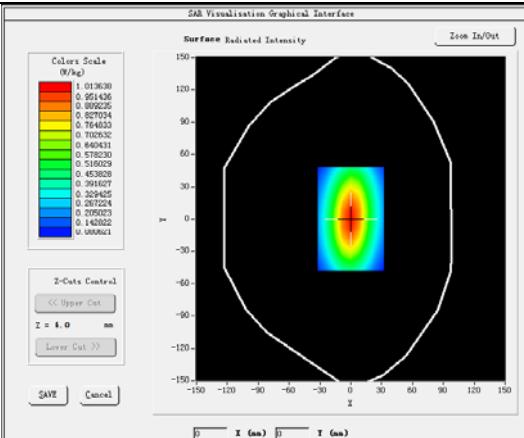
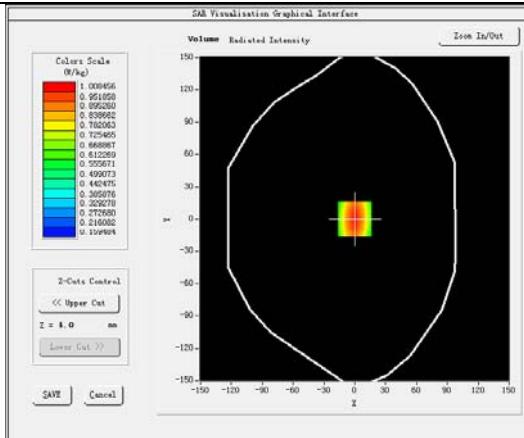
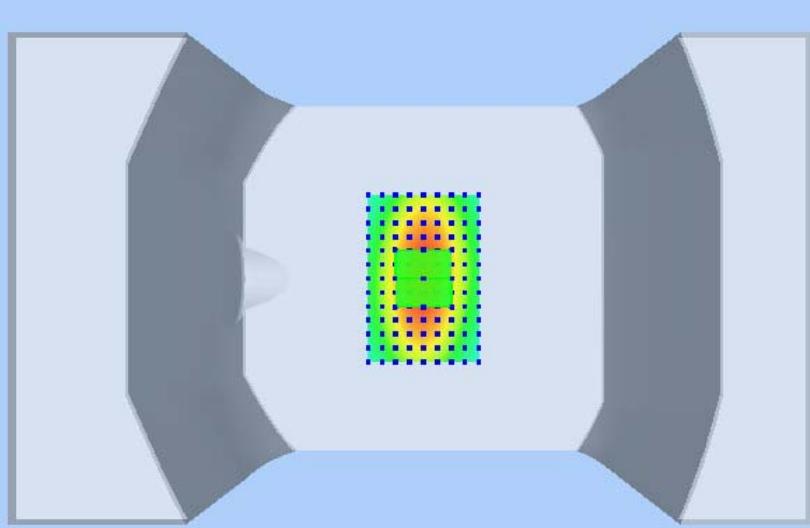
| Temperature: 21°C , Relative humidity: 57% , Measured Date: 2019-12-26 | | | | |
|---|----------------------|----------------------------|--------------------------------|---------------------------------|
| Frequency(MHz) | Measured Date | Description | Dielectric Parameters | |
| | | | ϵ_r | $\sigma(s/m)$ |
| 835 | 2019-12-26 | Target Value ±5% window | 55.2 52.63 — 57.75 | 0.97 0.922 — 1.018 |
| | | Measurement Value | 55.15 | 1.00 |
| 1700 | 2020-01-07 | Target Value ±5% window | 53.30 50.64 — 55.97 | 1.52 1.44 — 1.60 |
| | | Measurement Value | 53.79 | 1.51 |
| 1800 | 2020-01-07 | Target Value ±5% window | 53.30 50.64 — 55.97 | 1.52 1.44 — 1.60 |
| | | Measurement Value | 53.77 | 1.59 |
| 1900 | 2020-01-08 | Target Value ±5% window | 53.30 50.64 — 55.97 | 1.52 1.44 — 1.60 |
| | | Measurement Value | 53.06 | 1.55 |
| 2450 | 2020-01-06 | Target Value ±5% window | 52.59 50.07 — 55.34 | 1.95 1.86 — 2.05 |
| | | Measurement Value | 53.99 | 1.93 |
| 2500 | 2020-01-08 | Target Value ±5% window | 52.50 49.88 — 55.12 | 2.16 2.06 — 2.26 |
| | | Measurement Value | 52.05 | 2.15 |
| 2600 | 2020-01-08 | Target Value ±5% window | 52.50 49.88 — 55.12 | 2.16 2.06 — 2.26 |
| | | Measurement Value | 52.59 | 2.20 |

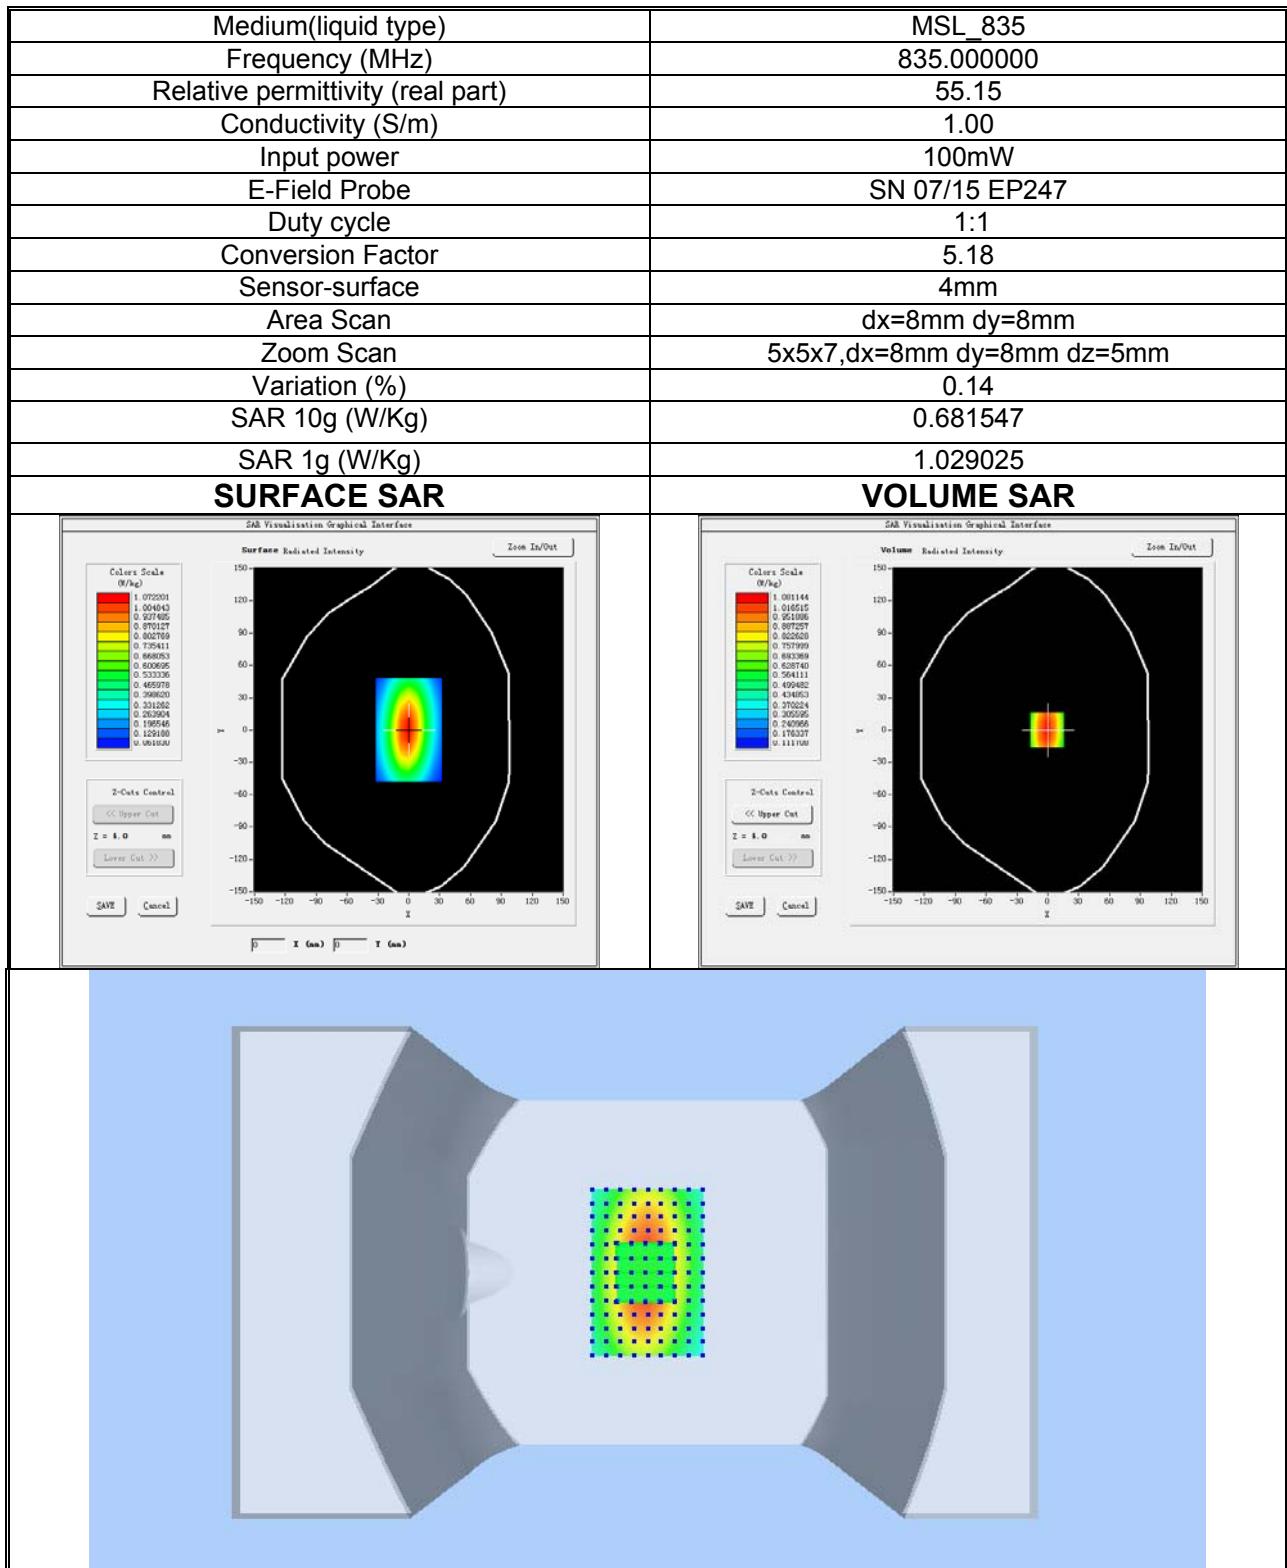
System Verification Plots

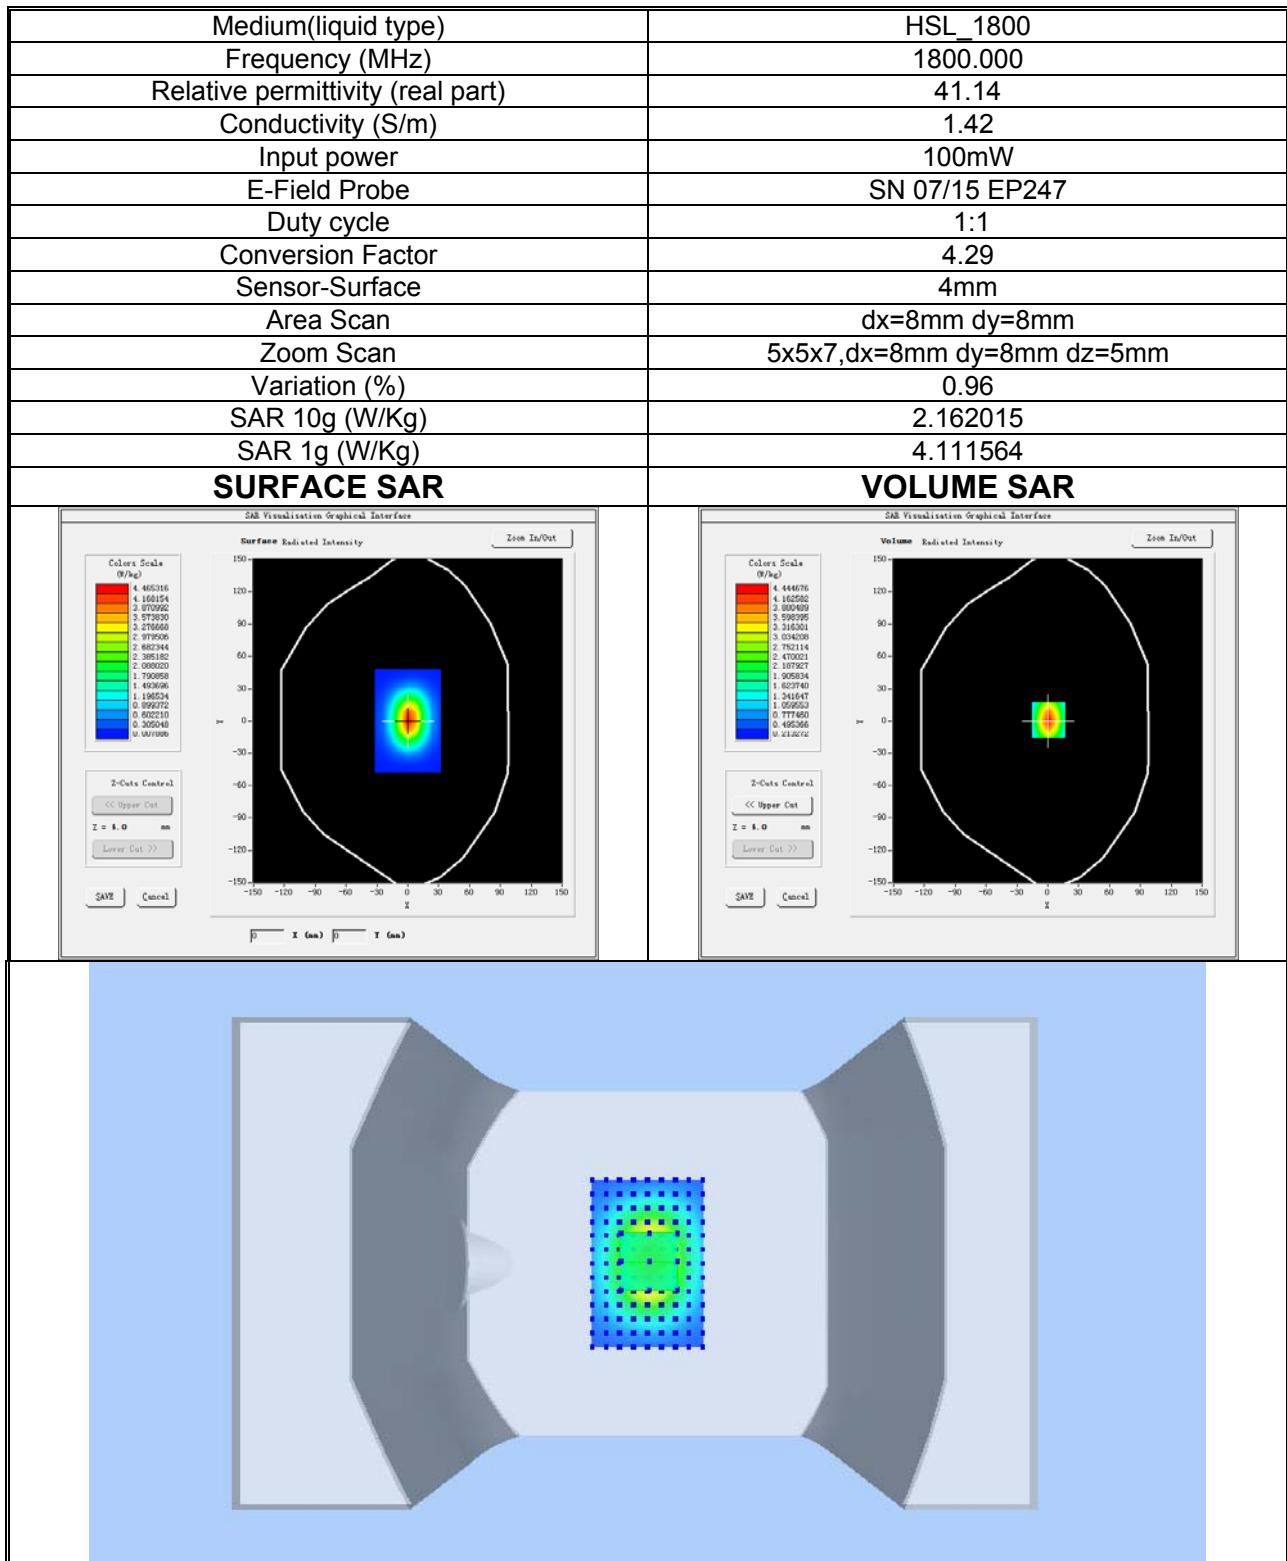
Product Description: Dipole

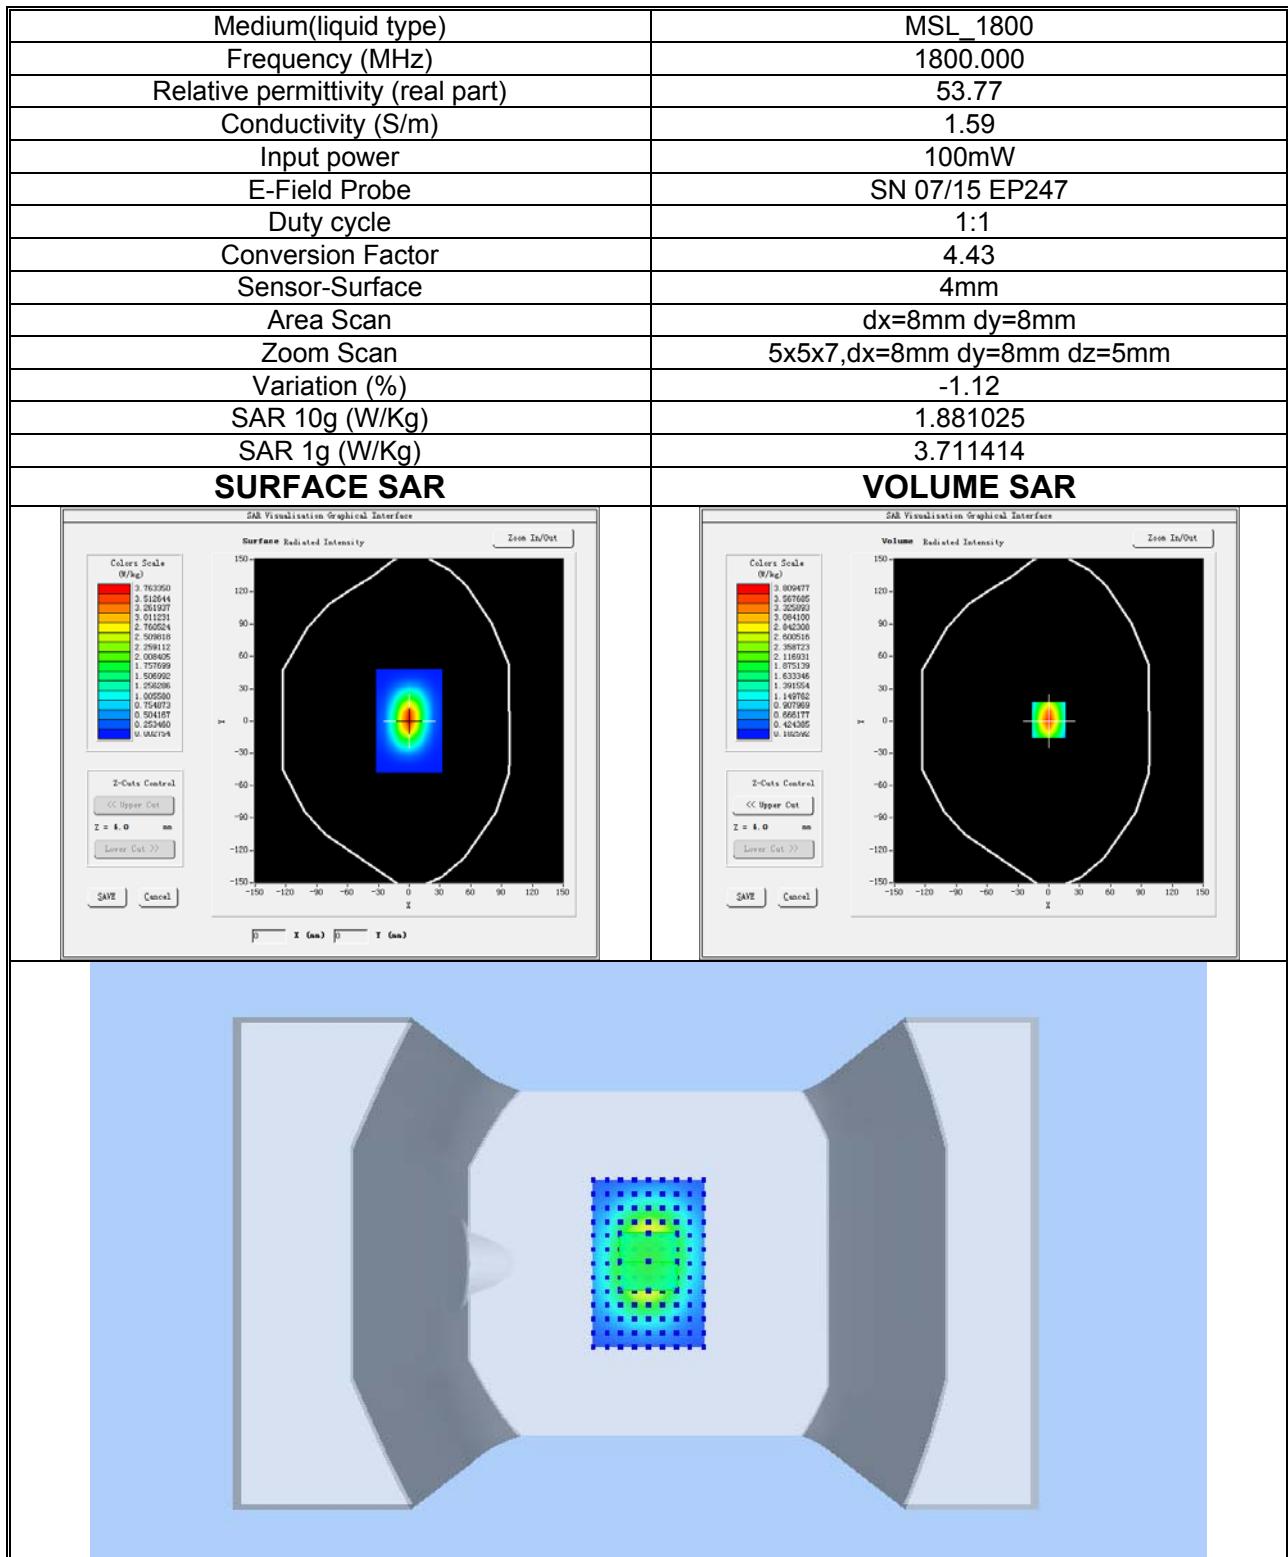
Model: SID835

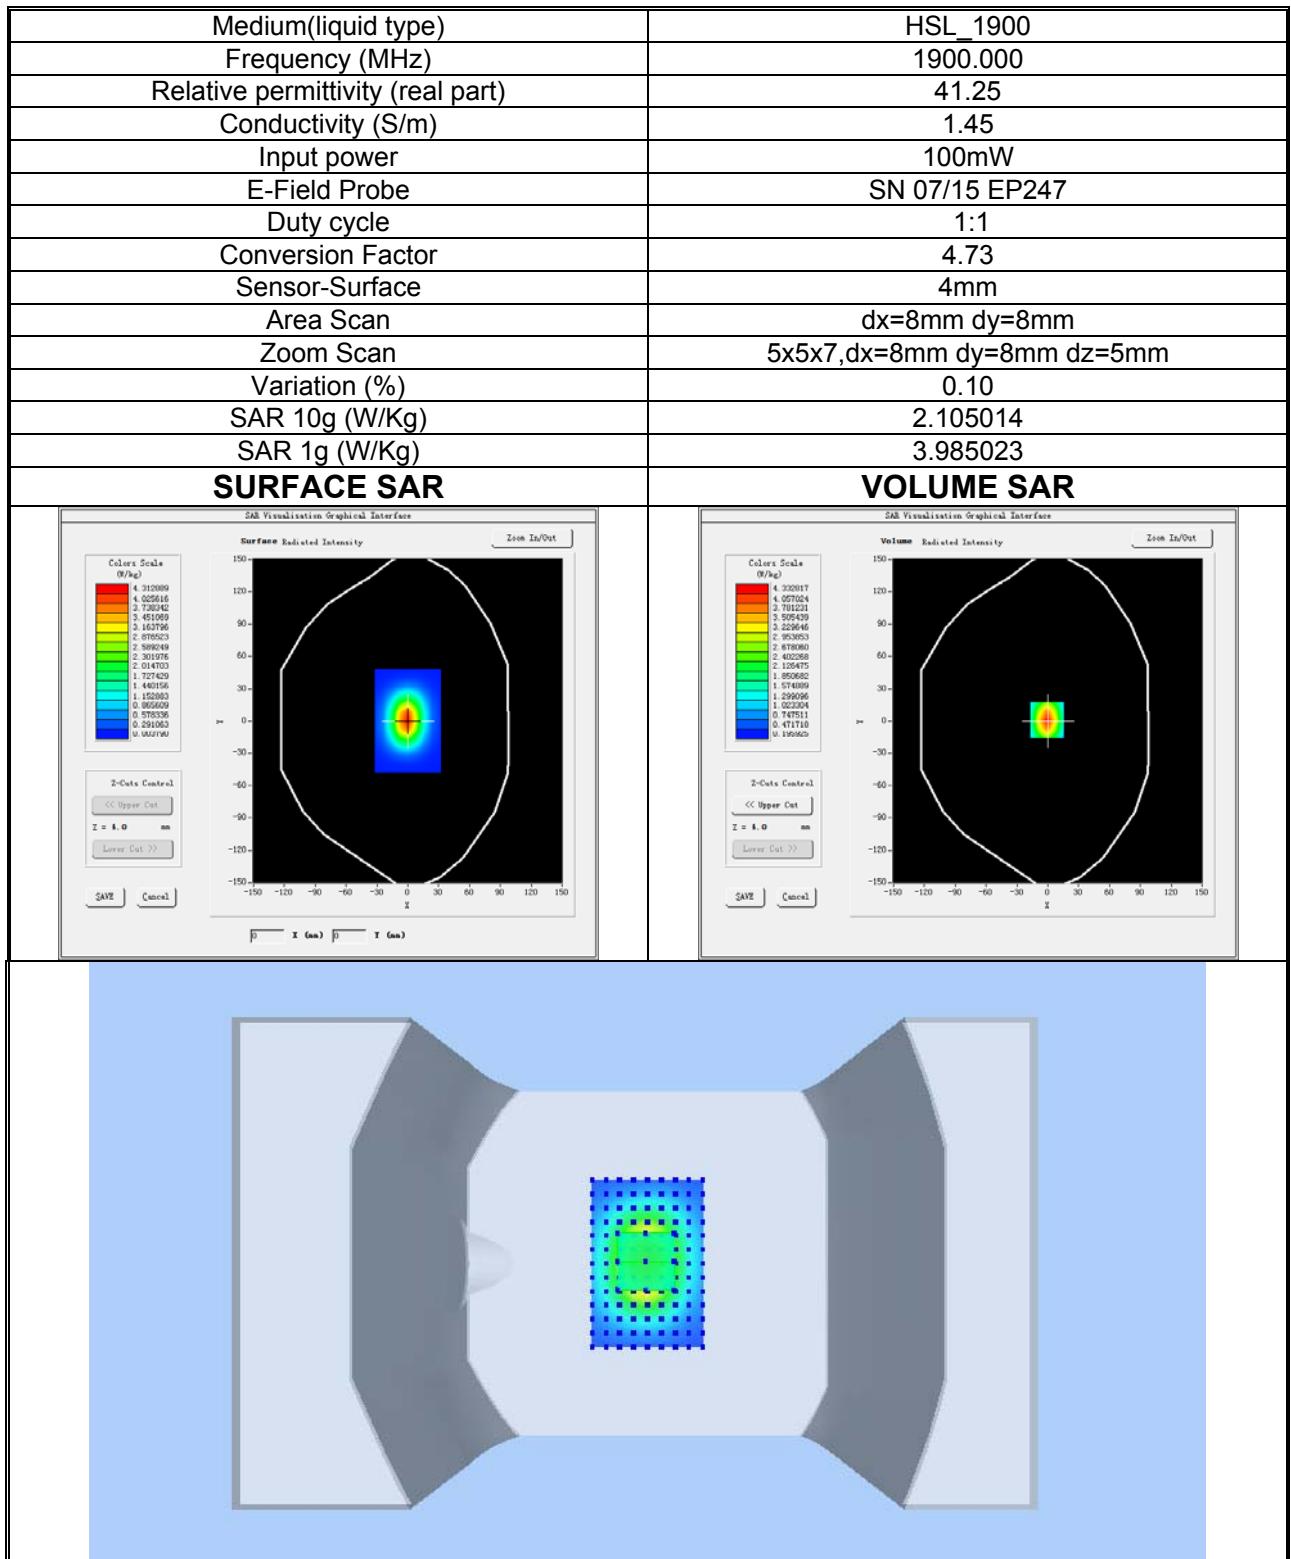
Test Date: 2019-12-26

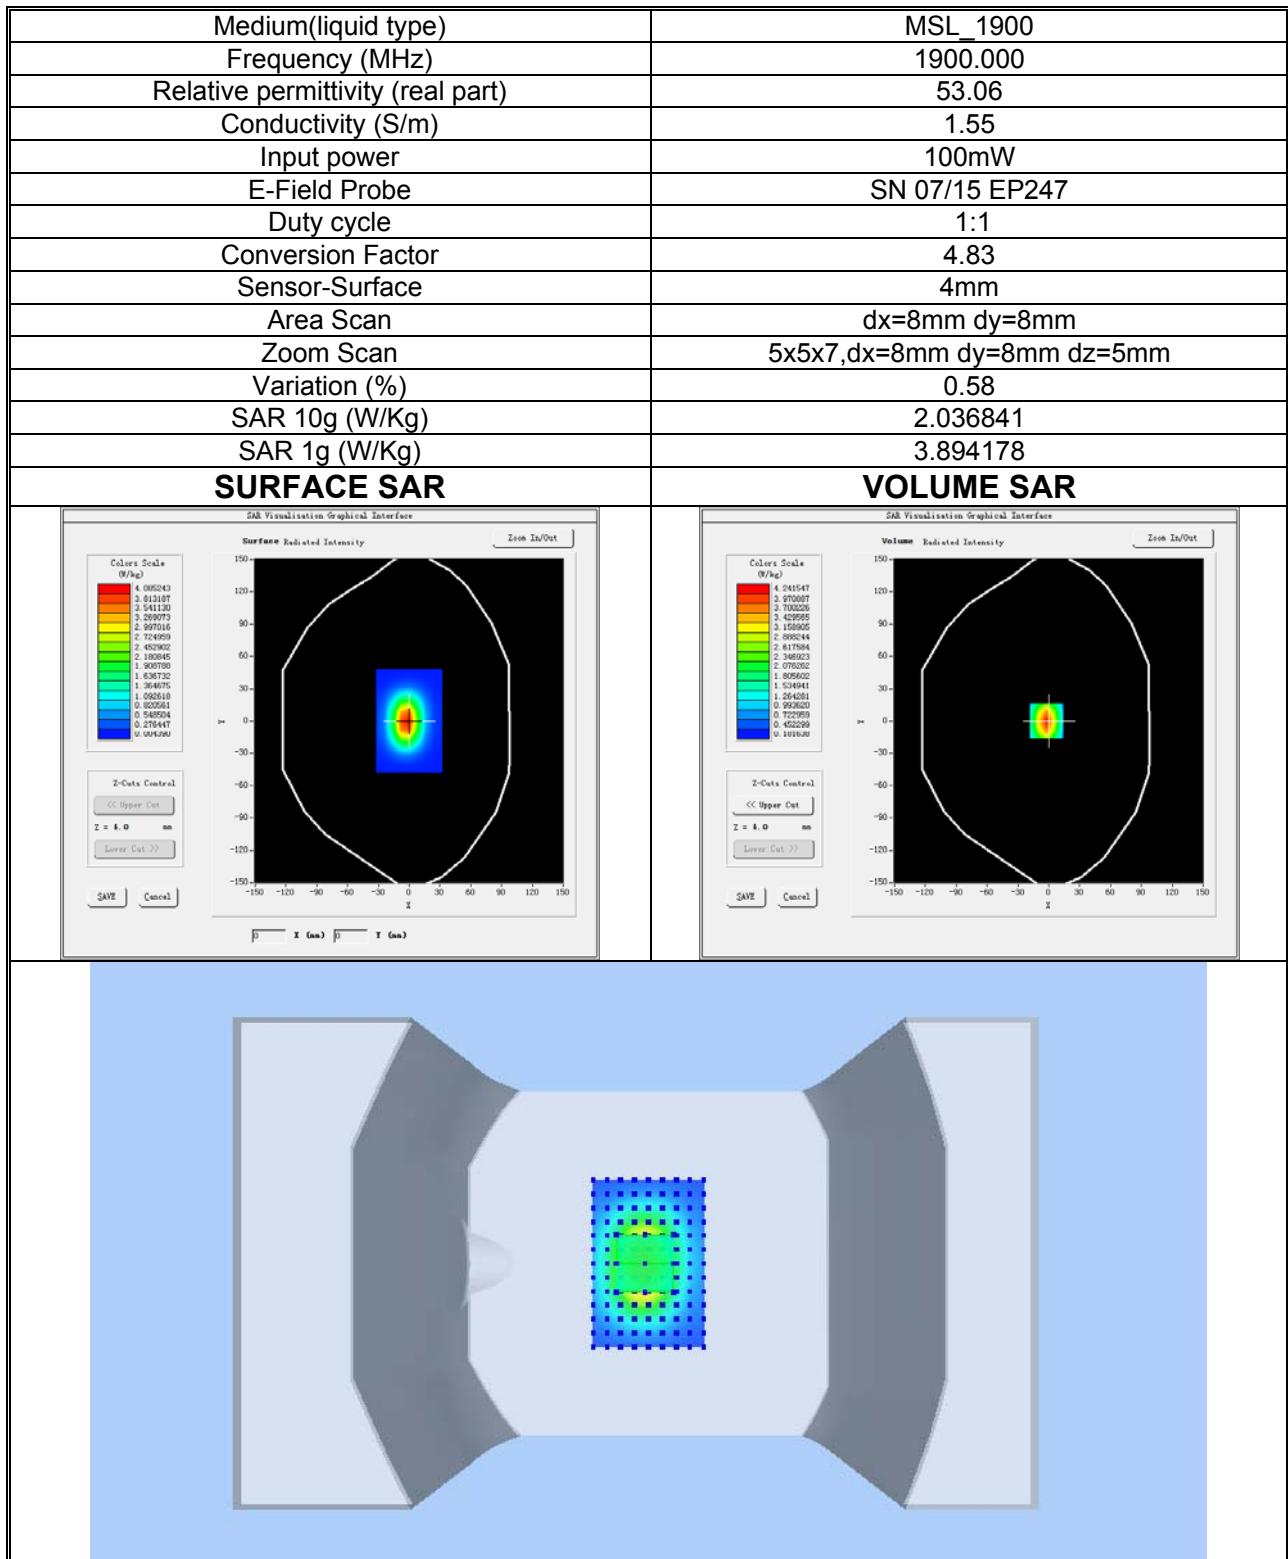
| | |
|--|---|
| Medium(liquid type) | HSL_835 |
| Frequency (MHz) | 835.000000 |
| Relative permittivity (real part) | 42.03 |
| Conductivity (S/m) | 0.89 |
| Input power | 100mW |
| E-Field Probe | SN 07/15 EP247 |
| Duty cycle | 1:1 |
| Conversion Factor | 4.99 |
| Sensor-surface | 4mm |
| Area Scan | dx=8mm dy=8mm |
| Zoom Scan | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%) | 0.26 |
| SAR 10g (W/Kg) | 0.615021 |
| SAR 1g (W/Kg) | 0.952561 |
| SURFACE SAR | VOLUME SAR |
|  |  |
|  | |

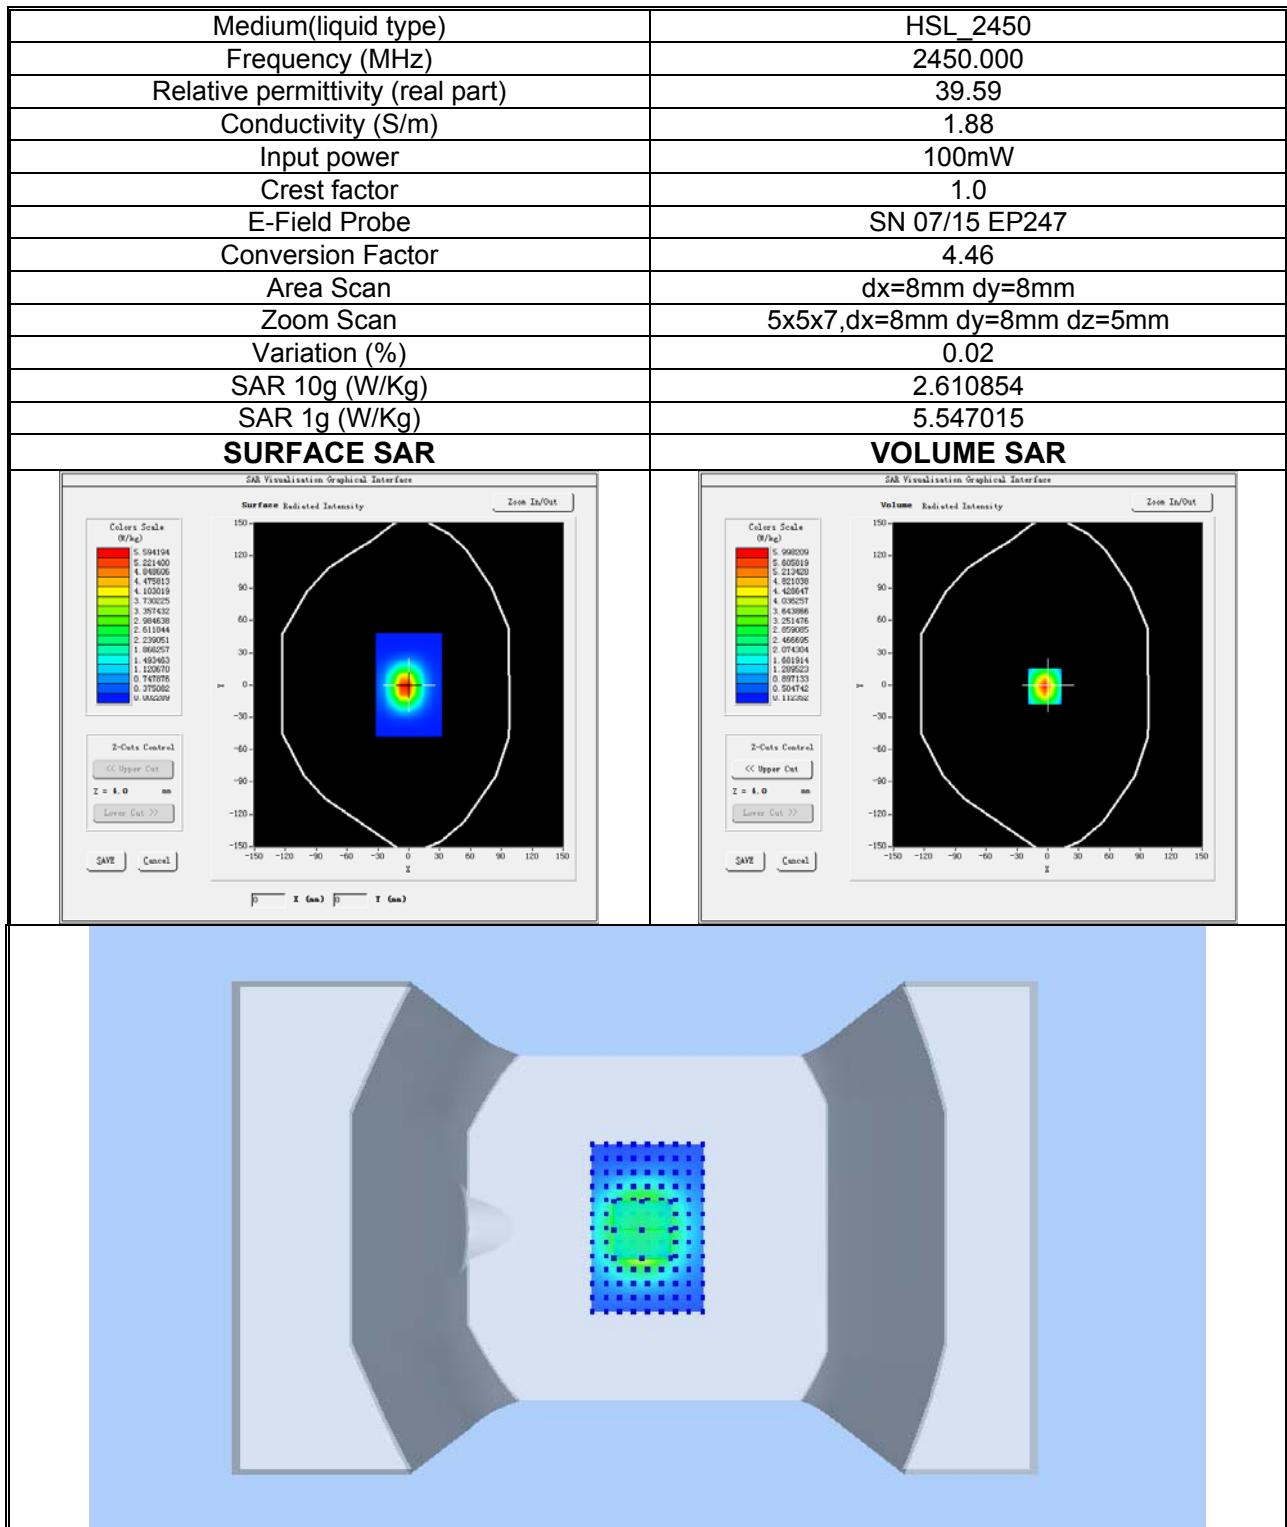
Product Description: Dipole**Model: SID835****Test Date: 2019-12-26**

Product Description: Dipole**Model: SID1800****Test Date: 2020-01-07**

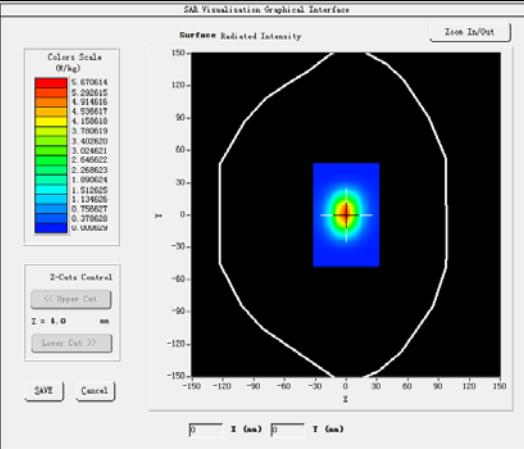
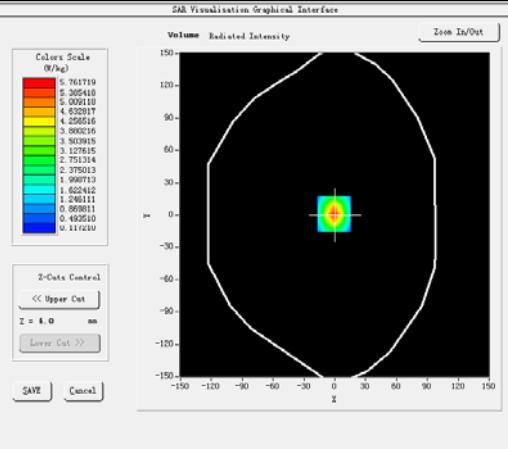
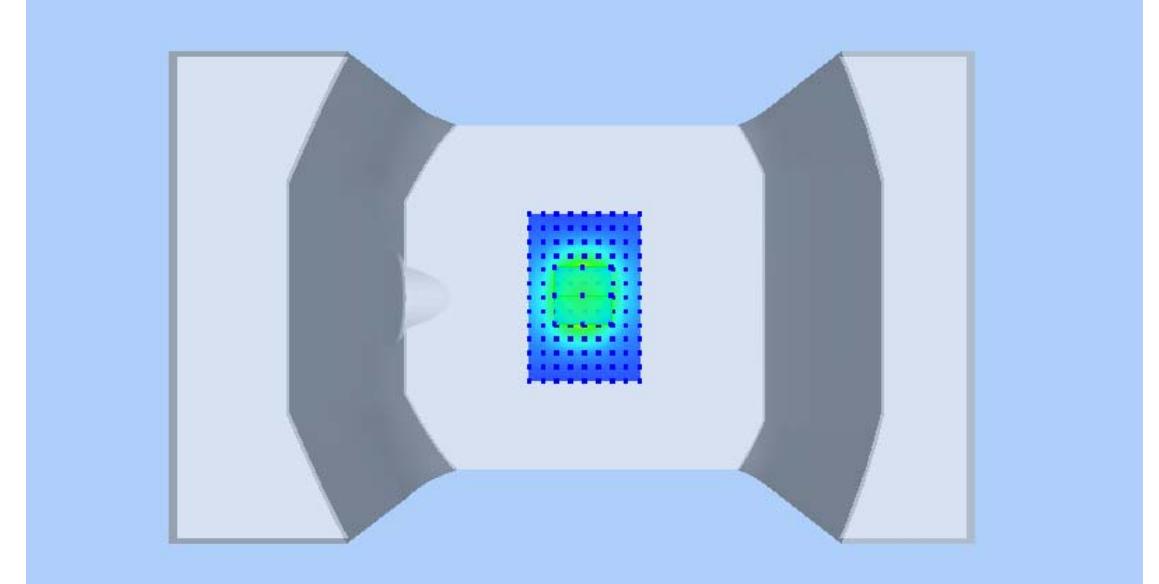
Product Description: Dipole**Model: SID1800****Test Date: 2020-01-07**

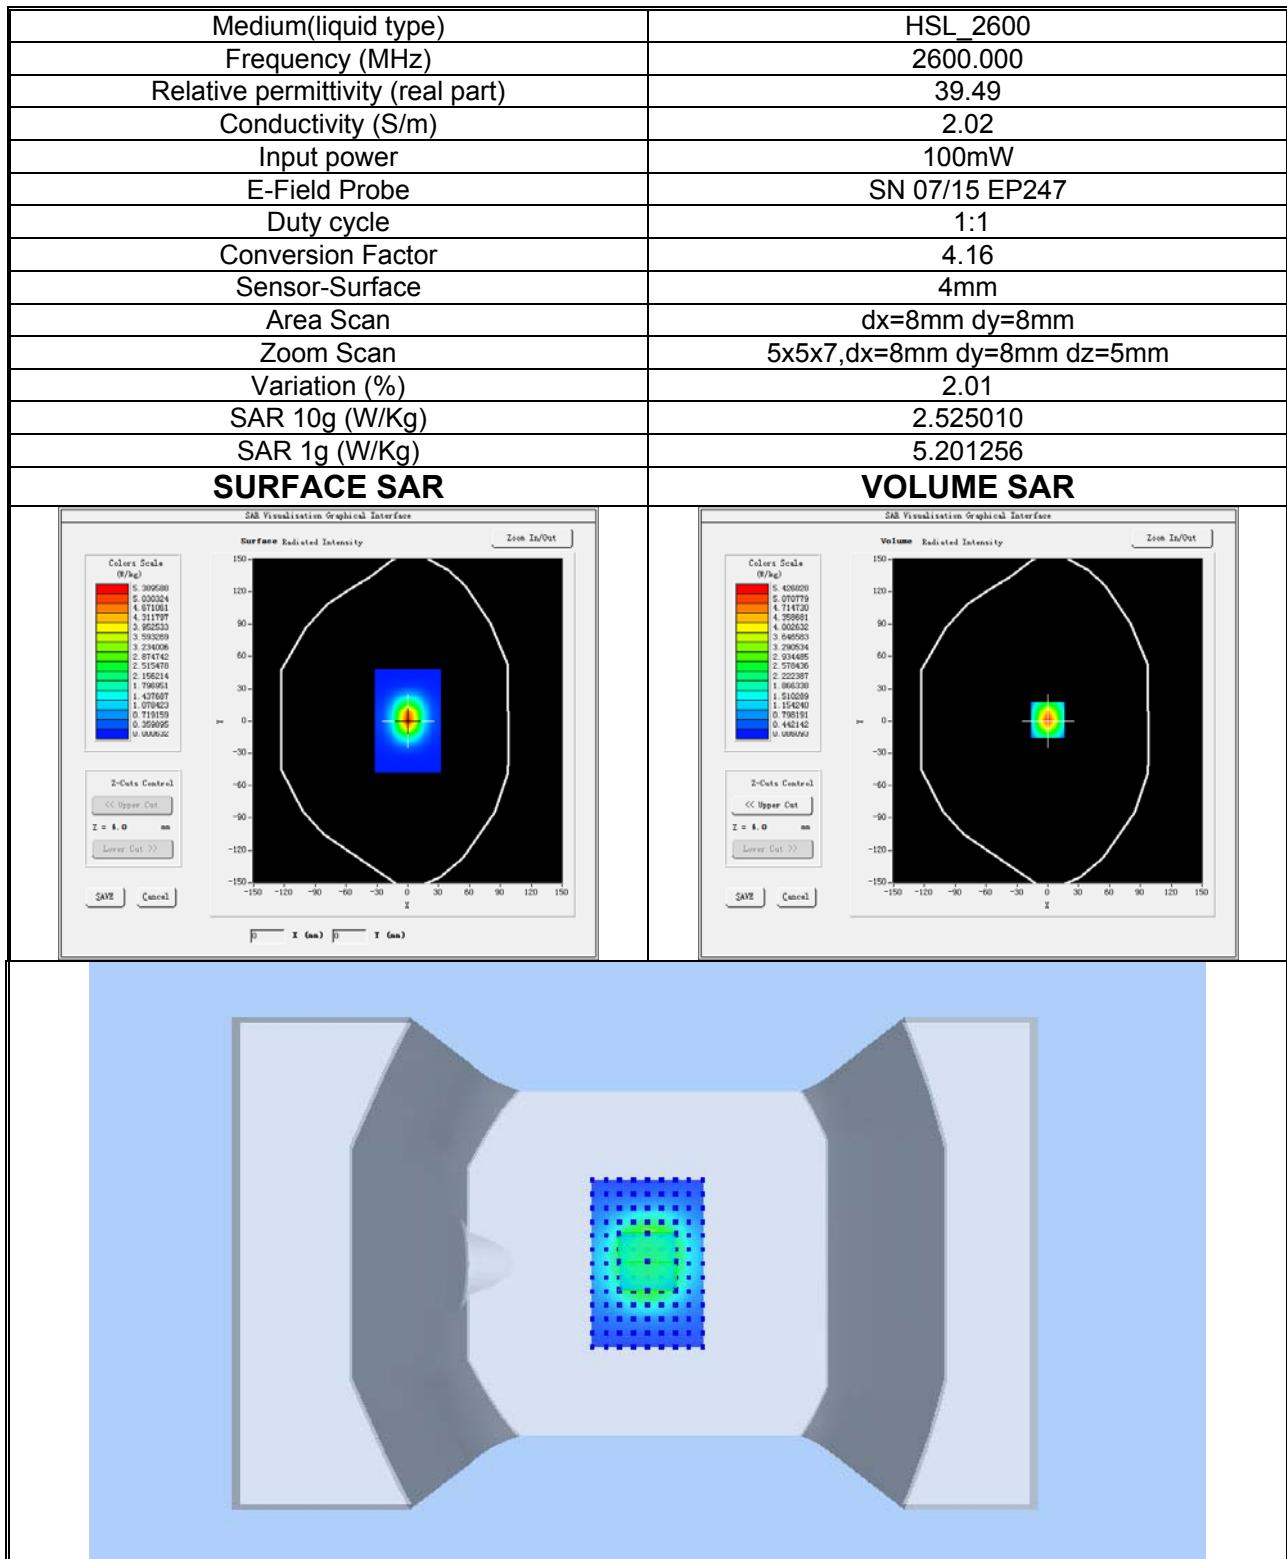
Product Description: Dipole**Model: SID1900****Test Date: 2020-01-08**

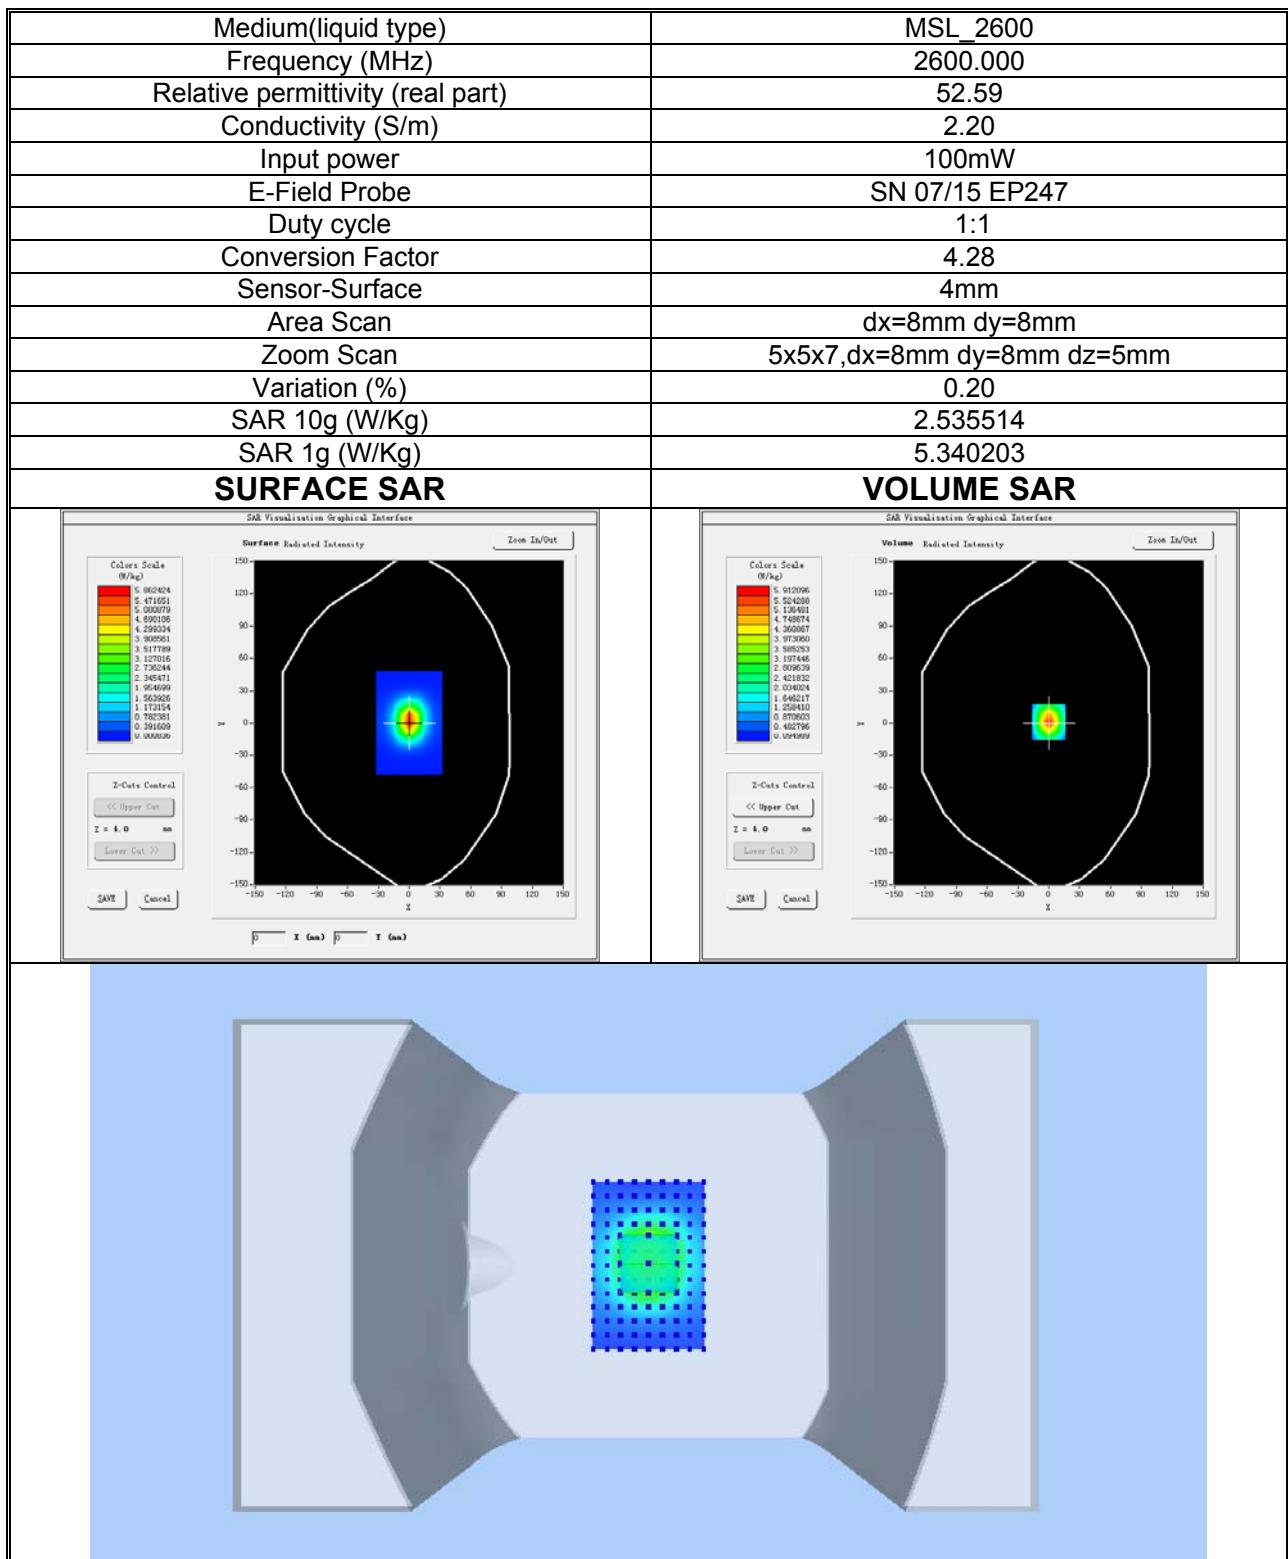
Product Description: Dipole**Model: SID1900****Test Date: 2020-01-08**

Product Description: Dipole**Model: SID2450****Test Date: 2020-01-06**

Product Description: Dipole**Model: SID2450****Test Date: 2020-01-06**

| | |
|---|---|
| Medium(liquid type) | MSL_2450 |
| Frequency (MHz) | 2450.000 |
| Relative permittivity (real part) | 53.99 |
| Conductivity (S/m) | 1.93 |
| Input power | 100mW |
| E-Field Probe | SN 07/15 EP247 |
| Duty cycle | 1:1 |
| Conversion Factor | 4.61 |
| Sensor-surface | 4mm |
| Area Scan | dx=8mm dy=8mm |
| Zoom Scan | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%) | 0.05 |
| SAR 10g (W/Kg) | 2.541948 |
| SAR 1g (W/Kg) | 5.264859 |
| SURFACE SAR | VOLUME SAR |
|  SAB Visualisation Graphical Interface Surface Radiated Intensity Zoom In/Out Color Scale (W/kg) Z-Cuts Control << Upper Cut I = 4.0 mm Lower Cut >> SAVE Cancel X (mm) Y (mm) Z (mm) |  SAB Visualisation Graphical Interface Volume Radiated Intensity Zoom In/Out Color Scale (W/kg) Z-Cuts Control << Upper Cut I = 4.0 mm Lower Cut >> SAVE Cancel X (mm) Y (mm) Z (mm) |
|  | |

Product Description: Dipole**Model: SID2600****Test Date: 2020-01-08**

Product Description: Dipole**Model: SID2600****Test Date: 2020-01-08**

10 Type a Measurement Uncertainty

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table below :

| Uncertainty Distribution | Normal | Rectangle | Triangular | U Shape |
|--------------------------|----------|----------------|----------------|----------------|
| Multi-plying Factor(a) | $1/k(b)$ | $1 / \sqrt{3}$ | $1 / \sqrt{6}$ | $1 / \sqrt{2}$ |

- (a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity
- (b) k is the coverage factor

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type -sum-by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %.

The COMOSAR Uncertainty Budget is show in below table:

| UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK | | | | | | | | |
|---|------------|-------------|------------|-------------------|-------------------|-------------|--------------|----------|
| a | c | d | e= f(d,k) | f | g | h= c*f/e | i= c*g/e | k |
| Uncertainty Component | Tol (+- %) | Prob. Dist. | Div. | Ci (1g) | Ci (10g) | 1g Ui (+-%) | 10g Ui (+-%) | Vi |
| Measurement System | | | | | | | | |
| Probe calibration | 5.8 | N | 1 | 1 | 1 | 5.80 | 5.80 | ∞ |
| Axial Isotropy | 3.5 | R | $\sqrt{3}$ | $(1_{-Cp})^{1/2}$ | $(1_{-Cp})^{1/2}$ | 1.43 | 1.43 | ∞ |
| Hemispherical Isotropy | 5.9 | R | $\sqrt{3}$ | $(Cp)^{1/2}$ | $(Cp)^{1/2}$ | 2.41 | 2.41 | ∞ |
| Boundary effect | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.58 | 0.58 | ∞ |
| Linearity | 4.7 | R | $\sqrt{3}$ | 1 | 1 | 2.71 | 2.71 | ∞ |
| System detection limits | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.58 | 0.58 | ∞ |
| Modulation response | 0.00 | N | 1 | 1 | 1 | 0.00 | 0.00 | ∞ |
| Readout Electronics | 0.50 | N | 1 | 1 | 1 | 0.50 | 0.50 | ∞ |
| Reponse Time | 0.0 | R | $\sqrt{3}$ | 1 | 1 | 0.00 | 0.00 | ∞ |
| Integration Time | 1.4 | R | $\sqrt{3}$ | 1 | 1 | 0.81 | 0.81 | ∞ |
| RF ambient Conditions - Noise | 3.0 | R | $\sqrt{3}$ | 1 | 1 | 1.73 | 1.73 | ∞ |
| RF ambient Conditions - Reflections | 3.0 | R | $\sqrt{3}$ | 1 | 1 | 1.73 | 1.73 | ∞ |
| Probe positioner Mechanical Tolerance | 1.4 | R | $\sqrt{3}$ | 1 | 1 | 0.81 | 0.81 | ∞ |
| Probe positioning with respect to Phantom Shell | 1.40 | R | $\sqrt{3}$ | 1 | 1 | 0.81 | 0.81 | ∞ |
| Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation | 2.3 | R | $\sqrt{3}$ | 1 | 1 | 1.33 | 1.33 | ∞ |
| Dipole | | | | | | | | |
| Deviation of experimental source from numerical source | 4.00 | N | 1 | 1 | 1 | 4.00 | 4.00 | ∞ |
| Input power and SAR drift measurement | 5.00 | R | $\sqrt{3}$ | 1 | 1 | 2.89 | 2.89 | ∞ |
| Dipole axis to liquid Distance | 2.00 | R | $\sqrt{3}$ | 1 | 1 | 1.15 | 1.15 | ∞ |
| Phantom and Tissue Parameters | | | | | | | | |
| Phantom Uncertainty (Shape and thickness tolerances) | 4.00 | R | $\sqrt{3}$ | 1 | 1 | 2.31 | 2.31 | ∞ |
| Uncertainty in SAR correction for deviation (in permittivity and conductivity) | 2.00 | N | 1 | 1 | 1 | 2.00 | 1.68 | ∞ |
| Liquid conductivity (temperature uncertainty) | 2.50 | N | 1 | 0.78 | 0.71 | 1.95 | 1.77 | ∞ |
| Liquid conductivity - measurement uncertainty | 4.00 | N | 1 | 0.23 | 0.26 | 0.92 | 1.04 | M |
| Liquid permittivity (temperature uncertainty) | 2.50 | N | 1 | 0.78 | 0.71 | 1.95 | 1.77 | ∞ |
| Liquid permittivity - measurement uncertainty | 5.00 | N | 1 | 0.23 | 0.26 | 1.15 | 1.30 | M |
| Combined Standard Uncertainty | | RSS | | | | 10.21 | 10.12 | |
| Expanded Uncertainty (95% Confidence interval) | | k | | | | 19.91 | 19.73 | |

| UNCERTAINTY EVALUATION FOR HANDSET SAR TEST | | | | | | | | | |
|---|------------|-------------|------------|----------------------------------|----------------------------------|-------------|-------------|----------|----|
| a | c | d | e= f(d,k) | f | g | h= c*f/e | i= c*g/e | k | |
| Uncertainty Component | Tol (+- %) | Prob. Dist. | Div. | Ci (1g) | Ci (10g) | 1g Ui (+-%) | 10gUi (+-%) | | Vi |
| Measurement System | | | | | | | | | |
| Probe calibration | 5.8 | N | 1 | 1 | 1 | 5.80 | 5.80 | ∞ | |
| Axial Isotropy | 3.5 | R | $\sqrt{3}$ | $(1_{-Cp})^{\wedge} \frac{1}{2}$ | $(1_{-Cp})^{\wedge} \frac{1}{2}$ | 1.43 | 1.43 | ∞ | |
| Hemispherical Isotropy | 5.9 | R | $\sqrt{3}$ | $(Cp)^{\wedge} \frac{1}{2}$ | $(Cp)^{\wedge} \frac{1}{2}$ | 2.41 | 2.41 | ∞ | |
| Boundary effect | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.58 | 0.58 | ∞ | |
| Linearity | 4.7 | R | $\sqrt{3}$ | 1 | 1 | 2.71 | 2.71 | ∞ | |
| System detection limits | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.58 | 0.58 | ∞ | |
| Modulation response | 3.00 | N | 1 | 1 | 1 | 3.00 | 3.00 | ∞ | |
| Readout Electronics | 0.50 | N | 1 | 1 | 1 | 0.50 | 0.50 | ∞ | |
| Reponse Time | 0.0 | R | $\sqrt{3}$ | 1 | 1 | 0.00 | 0.00 | ∞ | |
| Integration Time | 1.4 | R | $\sqrt{3}$ | 1 | 1 | 0.81 | 0.81 | ∞ | |
| RF ambient Conditions - Noise | 3.0 | R | $\sqrt{3}$ | 1 | 1 | 1.73 | 1.73 | ∞ | |
| RF ambient Conditions - Reflections | 3.0 | R | $\sqrt{3}$ | 1 | 1 | 1.73 | 1.73 | ∞ | |
| Probe positioner Mechanical Tolerance | 1.4 | R | $\sqrt{3}$ | 1 | 1 | 0.81 | 0.81 | ∞ | |
| Probe positioning with respect to Phantom Shell | 1.40 | R | $\sqrt{3}$ | 1 | 1 | 0.81 | 0.81 | ∞ | |
| Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation | 2.3 | R | $\sqrt{3}$ | 1 | 1 | 1.33 | 1.33 | ∞ | |
| Test sample Related | | | | | | | | | |
| Test sample positioning | 2.60 | N | 1 | 1 | 1 | 2.60 | 2.60 | N-1 | |
| Device Holder Uncertainty | 3.00 | N | 1 | 1 | 1 | 3.00 | 3.00 | N-1 | |
| Output power Variation - SAR drift measurement | 5.00 | R | $\sqrt{3}$ | 1 | 1 | 2.89 | 2.89 | ∞ | |
| SAR scaling | 2.00 | R | $\sqrt{3}$ | 1 | 1 | 1.15 | 1.15 | ∞ | |
| Phantom and Tissue Parameters | | | | | | | | | |
| Phantom Uncertainty (Shape and thickness tolerances) | 4.00 | R | $\sqrt{3}$ | 1 | 1 | 2.31 | 2.31 | ∞ | |
| Uncertainty in SAR correction for deviation (in permittivity and conductivity) | 2.00 | N | 1 | 1 | 1 | 2.00 | 1.68 | ∞ | |
| Liquid conductivity (temperature uncertainty) | 2.50 | N | 1 | 0.78 | 0.71 | 1.95 | 1.77 | ∞ | |
| Liquid conductivity - measurement uncertainty | 4.00 | N | 1 | 0.23 | 0.26 | 0.92 | 1.04 | M | |
| Liquid permittivity (temperature uncertainty) | 2.50 | N | 1 | 0.78 | 0.71 | 1.95 | 1.77 | ∞ | |
| Liquid permittivity - measurement uncertainty | 5.00 | N | 1 | 0.23 | 0.26 | 1.15 | 1.30 | M | |
| Combined Standard Uncertainty | | RSS | | | | 10.63 | 10.54 | | |
| Expanded Uncertainty (95% Confidence interval) | | k | | | | 20.73 | 20.56 | | |

11 Output Power Verification

Test Condition:

1. Conducted Measurement
EUT was set for low, mid, high channel with modulated mode and highest RF output power.
The base station simulator was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is $\pm 1.5\text{dB}$.
3. Environmental Conditions

| | |
|----------------------|----------|
| Temperature | 23°C |
| Relative Humidity | 53% |
| Atmospheric Pressure | 1019mbar |
4. Test Date : 2019-12-26
Tested By : Andy Feng

Test Procedures:

Mobile Phone radio output power measurement

1. The transmitter output port was connected to base station emulator.
2. Establish communication link between emulator and EUT and set EUT to operate at maximum output power all the time.
3. Select lowest, middle, and highest channels for each band and different possible test mode.
4. Measure the conducted peak burst power and conducted average burst power from EUT antenna port.

Other radio output power measurement:

The output power was measured using power meter at low, mid, and hi channels.

Source-based Time Averaged Burst Power Calculation:

For TDMA, the following duty cycle factor was used to calculate the source-based time average power

| Number of Time slot | 1 | 2 | 3 | 4 |
|---------------------|----------|----------|----------|----------|
| Duty Cycle | 1:8 | 1:4 | 1:2.66 | 1:2 |
| Duty cycle factor | -9.03 dB | -6.02 dB | -4.26 dB | -3.01 dB |
| Crest Factor | 8 | 4 | 2.66 | 2 |

Remark: *Time slot duty cycle factor = 10 * log (Time Slot Duty Cycle)*

Source based time averaged power = Maximum burst averaged power (1 Uplink) – 9.03 dB

Source based time averaged power = Maximum burst averaged power (2 Uplink) – 6.02 dB

Source based time averaged power = Maximum burst averaged power (3 Uplink) – 4.26 dB

Source based time averaged power = Maximum burst averaged power (4 Uplink) – 3.01 dB

Test Result:

| Burst Average Power (dBm); | | | | | | | | |
|---|--------|-------|-------|------------------------------|---------|-------|--------|---------------------------------|
| Band | GSM850 | | | | PCS1900 | | | |
| Channel | 128 | 190 | 251 | Tune up Power tolerant | 512 | 661 | 810 | Tune up Power tolerant |
| Frequency (MHz) | 824.2 | 836.6 | 848.8 | / | 1850.2 | 1880 | 1909.8 | / |
| GSM Voice | 32.93 | 32.90 | 32.91 | 32±1 | 29.65 | 29.62 | 29.73 | 29±1 |
| GPRS 1 slots | 32.89 | 32.89 | 32.88 | 32±1 | 29.69 | 29.62 | 29.74 | 29±1 |
| GPRS 2 slots | 31.97 | 31.99 | 31.97 | 31±1 | 28.88 | 28.78 | 28.91 | 28±1 |
| GPRS 3 slots | 31.18 | 31.21 | 31.19 | 31±1 | 27.98 | 27.95 | 28.12 | 28±1 |
| GPRS 4 slots | 30.35 | 30.38 | 30.33 | 30±1 | 27.18 | 27.14 | 27.33 | 27±1 |
| EGPRS 1 slots | 26.58 | 26.62 | 26.48 | 26±1 | 26.11 | 25.91 | 25.66 | 26±1 |
| EGPRS 2 slots | 25.78 | 25.78 | 25.67 | 25±1 | 25.33 | 25.11 | 24.72 | 25±1 |
| EGPRS 3 slots | 24.91 | 24.93 | 24.85 | 24±1 | 24.51 | 24.28 | 23.89 | 24±1 |
| EGPRS 4 slots | 24.05 | 24.06 | 23.98 | 24±1 | 23.71 | 23.35 | 23.05 | 23±1 |
| Remark : GPRS, CS1 coding scheme. EGPRS, MCS5 coding scheme. Multi 1 Slot , Support Max 4 downlink, 1 uplink , 5 working link Multi 2 Slots , Support Max 4 downlink, 2 uplink , 5 working link Multi 3 Slots , Support Max 4 downlink, 3 uplink , 5 working link Multi 4 Slots , Support Max 4 downlink, 4 uplink , 5 working link | | | | | | | | |

| Source Based time Average Power (dBm) | | | | | | | | |
|--|--------|-------|-------|---------------------|---------|-------|--------|---------------------|
| Band | GSM850 | | | | PCS1900 | | | |
| Channel | 128 | 190 | 251 | Time Average factor | 512 | 661 | 810 | Time Average factor |
| Frequency (MHz) | 824.2 | 836.6 | 848.8 | / | 1850.2 | 1880 | 1909.8 | / |
| GSM Voice | 23.90 | 23.87 | 23.88 | -9.03 | 20.62 | 20.59 | 20.70 | -9.03 |
| GPRS 1 slots | 23.86 | 23.86 | 23.85 | -9.03 | 20.66 | 20.59 | 20.71 | -9.03 |
| GPRS 2 slots | 25.95 | 25.97 | 25.95 | -6.02 | 22.86 | 22.76 | 22.89 | -6.02 |
| GPRS 3 slots | 26.92 | 26.95 | 26.93 | -4.26 | 23.72 | 23.69 | 23.86 | -4.26 |
| GPRS 4 slots | 27.34 | 27.37 | 27.32 | -3.01 | 24.17 | 24.13 | 24.32 | -3.01 |
| EGPRS 1 slots | 17.55 | 17.59 | 17.45 | -9.03 | 17.08 | 16.88 | 16.63 | -9.03 |
| EGPRS 2 slots | 19.76 | 19.76 | 19.65 | -6.02 | 19.31 | 19.09 | 18.70 | -6.02 |
| EGPRS 3 slots | 20.65 | 20.67 | 20.59 | -4.26 | 20.25 | 20.02 | 19.63 | -4.26 |
| EGPRS 4 slots | 21.04 | 21.05 | 20.97 | -3.01 | 20.70 | 20.34 | 20.04 | -3.01 |
| Remark : Time average factor = 1 uplink , $10 \log(1/8) = -9.03 \text{ dB}$, 2 uplink , $10 \log(2/8) = -6.02 \text{ dB}$, 3 uplink , $10 \log(3/8) = -4.26 \text{ dB}$, 4 uplink , $10 \log(4/8) = -3.01 \text{ dB}$ Source based time average power = Burst Average power + Time Average factor | | | | | | | | |

Note: DUT was set in GPRS(4Tx slots) due to the Maximum source-base time average output power for body SAR.

| WCDMA - Average Power (dBm) | | | | | | | | |
|-----------------------------|---------------|-------|--------|------------------------|--------------|-------|-------|------------------------|
| Band | WCDMA Band II | | | | WCDMA Band V | | | |
| Channel | 9262 | 9400 | 9538 | Tune up Power tolerant | 4132 | 4183 | 4233 | Tune up Power tolerant |
| Frequency (MHz) | 1852.4 | 1880 | 1907.6 | / | 826.4 | 836.6 | 846.6 | / |
| RMC 12.2k | 22.75 | 22.79 | 22.82 | 22±1 | 22.69 | 22.83 | 22.82 | 22±1 |
| HSDPA Subtest-1 | 21.67 | 21.68 | 21.74 | 21±1 | 21.82 | 21.89 | 21.96 | 21±1 |
| HSDPA Subtest-2 | 21.64 | 21.65 | 21.71 | 21±1 | 21.78 | 21.85 | 21.91 | 21±1 |
| HSDPA Subtest-3 | 21.60 | 21.61 | 21.68 | 21±1 | 21.74 | 21.81 | 21.89 | 21±1 |
| HSDPA Subtest-4 | 21.57 | 21.58 | 21.65 | 21±1 | 21.71 | 21.78 | 21.85 | 21±1 |
| HSUPA Subtest-1 | 21.26 | 21.31 | 21.27 | 21±1 | 21.38 | 21.47 | 21.56 | 21±1 |
| HSUPA Subtest-2 | 21.24 | 21.28 | 21.24 | 21±1 | 21.35 | 21.43 | 21.51 | 21±1 |
| HSUPA Subtest-3 | 21.20 | 21.25 | 21.21 | 21±1 | 21.33 | 21.41 | 21.45 | 21±1 |
| HSUPA Subtest-4 | 21.15 | 21.20 | 21.18 | 21±1 | 21.30 | 21.38 | 21.41 | 21±1 |
| HSUPA Subtest-5 | 21.13 | 21.18 | 21.15 | 21±1 | 21.28 | 21.34 | 21.38 | 21±1 |

| WCDMA - Average Power (dBm) | | | | |
|------------------------------------|---------------------|---------------|---------------|-------------------------------|
| Band | WCDMA BandIV | | | |
| Channel | 1312 | 1413 | 1513 | Tune up Power tolerant |
| Frequency (MHz) | 1712.4 | 1732.6 | 1752.6 | / |
| RMC 12.2k | 22.70 | 22.74 | 22.78 | 22±1 |
| HSDPA Subtest-1 | 21.64 | 21.62 | 21.70 | 21±1 |
| HSDPA Subtest-2 | 21.61 | 21.58 | 21.67 | 21±1 |
| HSDPA Subtest-3 | 21.58 | 21.54 | 21.62 | 21±1 |
| HSDPA Subtest-4 | 21.53 | 21.51 | 21.60 | 21±1 |
| HSUPA Subtest-1 | 21.19 | 21.15 | 21.29 | 21±1 |
| HSUPA Subtest-2 | 21.15 | 21.11 | 21.25 | 21±1 |
| HSUPA Subtest-3 | 21.11 | 21.08 | 21.21 | 21±1 |
| HSUPA Subtest-4 | 21.08 | 21.05 | 21.18 | 21±1 |
| HSUPA Subtest-5 | 21.05 | 21.04 | 21.14 | 21±1 |

LTE Power Reduction

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

| Modulation | Channel bandwidth / Transmission bandwidth (RB) | | | | | | MPR (dB) |
|------------|---|---------|-------|--------|--------|--------|----------|
| | 1.4 MHz | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz | |
| QPSK | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 1 |
| 16 QAM | ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 1 |
| 16 QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 2 |

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of “NS_01”.

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

| Network Signalling value | Requirements (sub-clause) | E-UTRA Band | Channel bandwidth (MHz) | Resources Blocks (N_{RB}) | A-MPR (dB) |
|--------------------------|---------------------------|--------------------------|-------------------------|-------------------------------|---------------|
| NS_01 | 6.6.2.1.1 | Table 5.5-1 | 1.4, 3, 5, 10, 15, 20 | Table 5.6-1 | NA |
| NS_03 | 6.6.2.2.1 | 2, 4, 10, 23, 25, 35, 36 | 3 | >5 | ≤ 1 |
| | | | 5 | >6 | ≤ 1 |
| | | | 10 | >6 | ≤ 1 |
| | | | 15 | >8 | ≤ 1 |
| | | | 20 | >10 | ≤ 1 |
| NS_04 | 6.6.2.2.2 | 41 | 5 | >6 | ≤ 1 |
| | | | 10, 15, 20 | See Table 6.2.4-4 | |
| NS_05 | 6.6.3.3.1 | 1 | 10, 15, 20 | ≥ 50 | ≤ 1 |
| NS_06 | 6.6.2.2.3 | 12, 13, 14, 17 | 1.4, 3, 5, 10 | Table 5.6-1 | n/a |
| NS_07 | 6.6.2.2.3 6.6.3.3.2 | 13 | 10 | Table 6.2.4-2 | Table 6.2.4-2 |
| | | | | | |
| NS_08 | 6.6.3.3.3 | 19 | 10, 15 | > 44 | ≤ 3 |
| NS_09 | 6.6.3.3.4 | 21 | 10, 15 | > 40 | ≤ 1 |
| | | | | > 55 | ≤ 2 |
| NS_10 | | 20 | 15, 20 | Table 6.2.4-3 | Table 6.2.4-3 |
| NS_11 | 6.6.2.2.1 | 23 ¹ | 1.4, 3, 5, 10 | Table 6.2.4-5 | Table 6.2.4-5 |
| .. | | | | | |
| NS_32 | - | - | - | - | - |

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE Band 2:

| BW(MHz) | Ch | Freq(MHz) | Mode | UL RB Allocation | UL RB Offset | Average Power (dbm) | Tune up limited(dBm) | MPR (dB) |
|---------|-------|-----------|-------|------------------|--------------|---------------------|----------------------|----------|
| 1.4MHz | 18607 | 1850.7 | QPSK | 1 | 0 | 21.83 | 21.0±1 | / |
| | | | | 1 | 2 | 21.9 | 21.0±1 | / |
| | | | | 1 | 5 | 21.78 | 21.0±1 | / |
| | | | | 3 | 0 | 21.9 | 21.0±1 | / |
| | | | | 3 | 1 | 21.93 | 21.0±1 | / |
| | | | | 3 | 2 | 21.92 | 21.0±1 | / |
| | | | | 6 | 0 | 20.92 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.82 | 20.0±1 | 1.0 |
| | | | | 1 | 2 | 20.98 | 20.0±1 | 1.0 |
| | | | | 1 | 5 | 20.85 | 20.0±1 | 1.0 |
| | | | | 3 | 0 | 20.92 | 20.0±1 | 1.0 |
| | | | | 3 | 1 | 20.97 | 20.0±1 | 1.0 |
| | | | | 3 | 2 | 20.98 | 20.0±1 | 1.0 |
| | | | | 6 | 0 | 20.04 | 20.0±1 | 1.0 |
| 1.4MHz | 18900 | 1880 | QPSK | 1 | 0 | 21.87 | 21.0±1 | / |
| | | | | 1 | 2 | 21.99 | 21.0±1 | / |
| | | | | 1 | 5 | 21.83 | 21.0±1 | / |
| | | | | 3 | 0 | 21.86 | 21.0±1 | / |
| | | | | 3 | 1 | 21.92 | 21.0±1 | / |
| | | | | 3 | 2 | 21.82 | 21.0±1 | / |
| | | | | 6 | 0 | 20.91 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.9 | 20.0±1 | 1.0 |
| | | | | 1 | 2 | 20.91 | 20.0±1 | 1.0 |
| | | | | 1 | 5 | 20.9 | 20.0±1 | 1.0 |
| | | | | 3 | 0 | 20.88 | 20.0±1 | 1.0 |
| | | | | 3 | 1 | 20.9 | 20.0±1 | 1.0 |
| | | | | 3 | 2 | 20.9 | 20.0±1 | 1.0 |
| | | | | 6 | 0 | 20 | 20.0±1 | 1.0 |
| 1.4MHz | 19193 | 1909.3 | QPSK | 1 | 0 | 21.76 | 21.0±1 | / |
| | | | | 1 | 2 | 21.86 | 21.0±1 | / |
| | | | | 1 | 5 | 21.75 | 21.0±1 | / |
| | | | | 3 | 0 | 21.8 | 21.0±1 | / |
| | | | | 3 | 1 | 21.82 | 21.0±1 | / |
| | | | | 3 | 2 | 21.78 | 21.0±1 | / |
| | | | | 6 | 0 | 20.86 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.92 | 20.0±1 | 1.0 |
| | | | | 1 | 2 | 20.82 | 20.0±1 | 1.0 |
| | | | | 1 | 5 | 20.85 | 20.0±1 | 1.0 |
| | | | | 3 | 0 | 20.95 | 20.0±1 | 1.0 |
| | | | | 3 | 1 | 20.95 | 20.0±1 | 1.0 |
| | | | | 3 | 2 | 20.96 | 20.0±1 | 1.0 |
| | | | | 6 | 0 | 19.72 | 20.0±1 | 1.0 |

| BW(MHz) | Ch | Freq(MHz) | Mode | UL RB Allocation | UL RB Offset | Average Power (dbm) | Tune up limited(dBm) | MPR (dB) |
|---------|-------|-----------|-------|------------------|--------------|---------------------|----------------------|----------|
| 3MHz | 18615 | 1851.5 | QPSK | 1 | 0 | 21.8 | 21.0±1 | / |
| | | | | 1 | 8 | 21.7 | 21.0±1 | / |
| | | | | 1 | 14 | 21.78 | 21.0±1 | / |
| | | | | 6 | 0 | 20.83 | 20.0±1 | 1.0 |
| | | | | 6 | 4 | 20.85 | 20.0±1 | 1.0 |
| | | | | 6 | 9 | 20.79 | 20.0±1 | 1.0 |
| | | | | 15 | 0 | 20.79 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.75 | 20.0±1 | 1.0 |
| | | | | 1 | 8 | 20.63 | 20.0±1 | 1.0 |
| | | | | 1 | 14 | 20.73 | 20.0±1 | 1.0 |
| | | | | 6 | 0 | 19.92 | 20.0±1 | 1.0 |
| | | | | 6 | 4 | 19.93 | 20.0±1 | 1.0 |
| | | | | 6 | 9 | 19.89 | 20.0±1 | 1.0 |
| | | | | 15 | 0 | 19.84 | 20.0±1 | 1.0 |
| 3MHz | 18900 | 1880 | QPSK | 1 | 0 | 21.92 | 21.0±1 | / |
| | | | | 1 | 8 | 21.85 | 21.0±1 | / |
| | | | | 1 | 14 | 21.89 | 21.0±1 | / |
| | | | | 6 | 0 | 20.91 | 20.0±1 | 1.0 |
| | | | | 6 | 4 | 20.94 | 20.0±1 | 1.0 |
| | | | | 6 | 9 | 20.94 | 20.0±1 | 1.0 |
| | | | | 15 | 0 | 20.89 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.22 | 20.0±1 | 1.0 |
| | | | | 1 | 8 | 20.92 | 20.0±1 | 1.0 |
| | | | | 1 | 14 | 20.25 | 20.0±1 | 1.0 |
| | | | | 6 | 0 | 20 | 20.0±1 | 1.0 |
| | | | | 6 | 4 | 20.01 | 20.0±1 | 1.0 |
| | | | | 6 | 9 | 19.95 | 20.0±1 | 1.0 |
| | | | | 15 | 0 | 19.9 | 20.0±1 | 1.0 |
| 3MHz | 19185 | 1908.5 | QPSK | 1 | 0 | 21.83 | 21.0±1 | / |
| | | | | 1 | 8 | 21.79 | 21.0±1 | / |
| | | | | 1 | 14 | 21.8 | 21.0±1 | / |
| | | | | 6 | 0 | 20.78 | 20.0±1 | 1.0 |
| | | | | 6 | 4 | 20.84 | 20.0±1 | 1.0 |
| | | | | 6 | 9 | 20.8 | 20.0±1 | 1.0 |
| | | | | 15 | 0 | 20.81 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.79 | 20.0±1 | 1.0 |
| | | | | 1 | 8 | 20.76 | 20.0±1 | 1.0 |
| | | | | 1 | 14 | 20.73 | 20.0±1 | 1.0 |
| | | | | 6 | 0 | 19.81 | 20.0±1 | 1.0 |
| | | | | 6 | 4 | 19.89 | 20.0±1 | 1.0 |
| | | | | 6 | 9 | 19.8 | 20.0±1 | 1.0 |
| | | | | 15 | 0 | 19.72 | 20.0±1 | 1.0 |

| BW(MHz) | Ch | Freq(MHz) | Mode | UL RB Allocation | UL RB Offset | Average Power (dbm) | Tune up limited(dBm) | MPR (dB) |
|---------|-------|-----------|-------|------------------|--------------|---------------------|----------------------|----------|
| 5MHz | 18625 | 1852.5 | QPSK | 1 | 0 | 21.78 | 21.0±1 | / |
| | | | | 1 | 12 | 21.82 | 21.0±1 | / |
| | | | | 1 | 24 | 21.79 | 21.0±1 | / |
| | | | | 12 | 0 | 20.79 | 20.0±1 | 1.0 |
| | | | | 12 | 6 | 20.85 | 20.0±1 | 1.0 |
| | | | | 12 | 11 | 20.8 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 20.78 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.96 | 20.0±1 | 1.0 |
| | | | | 1 | 12 | 20.99 | 20.0±1 | 1.0 |
| | | | | 1 | 24 | 21 | 20.0±1 | 1.0 |
| | | | | 12 | 0 | 19.84 | 20.0±1 | 1.0 |
| | | | | 12 | 6 | 19.87 | 20.0±1 | 1.0 |
| | | | | 12 | 11 | 19.84 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 19.78 | 20.0±1 | 1.0 |
| 5MHz | 18900 | 1880 | QPSK | 1 | 0 | 21.86 | 21.0±1 | / |
| | | | | 1 | 12 | 21.87 | 21.0±1 | / |
| | | | | 1 | 24 | 21.83 | 21.0±1 | / |
| | | | | 12 | 0 | 20.84 | 20.0±1 | 1.0 |
| | | | | 12 | 6 | 20.9 | 20.0±1 | 1.0 |
| | | | | 12 | 11 | 20.82 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 20.81 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.95 | 20.0±1 | 1.0 |
| | | | | 1 | 12 | 20.94 | 20.0±1 | 1.0 |
| | | | | 1 | 24 | 20.93 | 20.0±1 | 1.0 |
| | | | | 12 | 0 | 19.97 | 20.0±1 | 1.0 |
| | | | | 12 | 6 | 20 | 20.0±1 | 1.0 |
| | | | | 12 | 11 | 19.95 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 19.85 | 20.0±1 | 1.0 |
| 5MHz | 19175 | 1907.5 | QPSK | 1 | 0 | 21.72 | 21.0±1 | / |
| | | | | 1 | 12 | 21.74 | 21.0±1 | / |
| | | | | 1 | 24 | 21.75 | 21.0±1 | / |
| | | | | 12 | 0 | 20.82 | 20.0±1 | 1.0 |
| | | | | 12 | 6 | 20.83 | 20.0±1 | 1.0 |
| | | | | 12 | 11 | 20.8 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 20.8 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.81 | 20.0±1 | 1.0 |
| | | | | 1 | 12 | 20.82 | 20.0±1 | 1.0 |
| | | | | 1 | 24 | 20.86 | 20.0±1 | 1.0 |
| | | | | 12 | 0 | 19.83 | 20.0±1 | 1.0 |
| | | | | 12 | 6 | 19.87 | 20.0±1 | 1.0 |
| | | | | 12 | 11 | 19.82 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 19.71 | 20.0±1 | 1.0 |

| BW(MHz) | Ch | Freq(MHz) | Mode | UL RB Allocation | UL RB Offset | Average Power (dbm) | Tune up limited(dBm) | MPR (dB) |
|---------|-------|-----------|-------|------------------|--------------|---------------------|----------------------|----------|
| 10MHz | 18650 | 1855 | QPSK | 1 | 0 | 21.78 | 21.0±1 | / |
| | | | | 1 | 24 | 21.84 | 21.0±1 | / |
| | | | | 1 | 49 | 21.73 | 21.0±1 | / |
| | | | | 25 | 0 | 20.81 | 20.0±1 | 1.0 |
| | | | | 25 | 12 | 20.81 | 20.0±1 | 1.0 |
| | | | | 25 | 24 | 20.81 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 20.8 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.71 | 20.0±1 | 1.0 |
| | | | | 1 | 24 | 20.8 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.68 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 19.82 | 20.0±1 | 1.0 |
| | | | | 25 | 12 | 19.82 | 20.0±1 | 1.0 |
| | | | | 25 | 24 | 19.81 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 19.78 | 20.0±1 | 1.0 |
| 10MHz | 18900 | 1880 | QPSK | 1 | 0 | 21.84 | 21.0±1 | / |
| | | | | 1 | 24 | 21.89 | 21.0±1 | / |
| | | | | 1 | 49 | 21.78 | 21.0±1 | / |
| | | | | 25 | 0 | 20.85 | 20.0±1 | 1.0 |
| | | | | 25 | 12 | 20.85 | 20.0±1 | 1.0 |
| | | | | 25 | 24 | 20.8 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 20.8 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.91 | 20.0±1 | 1.0 |
| | | | | 1 | 24 | 20.95 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.94 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 19.88 | 20.0±1 | 1.0 |
| | | | | 25 | 12 | 19.85 | 20.0±1 | 1.0 |
| | | | | 25 | 24 | 19.84 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 19.84 | 20.0±1 | 1.0 |
| 10MHz | 19150 | 1905 | QPSK | 1 | 0 | 21.79 | 21.0±1 | / |
| | | | | 1 | 24 | 21.86 | 21.0±1 | / |
| | | | | 1 | 49 | 21.79 | 21.0±1 | / |
| | | | | 25 | 0 | 20.8 | 20.0±1 | 1.0 |
| | | | | 25 | 12 | 20.74 | 20.0±1 | 1.0 |
| | | | | 25 | 24 | 20.74 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 20.77 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.73 | 20.0±1 | 1.0 |
| | | | | 1 | 24 | 20.8 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.74 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 19.86 | 20.0±1 | 1.0 |
| | | | | 25 | 12 | 19.79 | 20.0±1 | 1.0 |
| | | | | 25 | 24 | 19.81 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 19.71 | 20.0±1 | 1.0 |

| BW(MHz) | Ch | Freq(MHz) | Mode | UL RB Allocation | UL RB Offset | Average Power (dbm) | Tune up limited(dBm) | MPR (dB) |
|---------|-------|-----------|-------|------------------|--------------|---------------------|----------------------|----------|
| 15MHz | 18675 | 1857.5 | QPSK | 1 | 0 | 21.76 | 21.0±1 | / |
| | | | | 1 | 37 | 21.73 | 21.0±1 | / |
| | | | | 1 | 74 | 21.7 | 21.0±1 | / |
| | | | | 36 | 0 | 20.88 | 20.0±1 | 1.0 |
| | | | | 36 | 16 | 20.88 | 20.0±1 | 1.0 |
| | | | | 36 | 35 | 20.84 | 20.0±1 | 1.0 |
| | | | | 75 | 0 | 20.87 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.7 | 20.0±1 | 1.0 |
| | | | | 1 | 37 | 20.69 | 20.0±1 | 1.0 |
| | | | | 1 | 74 | 20.7 | 20.0±1 | 1.0 |
| | | | | 36 | 0 | 19.83 | 20.0±1 | 1.0 |
| | | | | 36 | 16 | 19.84 | 20.0±1 | 1.0 |
| | | | | 36 | 35 | 19.81 | 20.0±1 | 1.0 |
| | | | | 75 | 0 | 19.86 | 20.0±1 | 1.0 |
| 15MHz | 18900 | 1880 | QPSK | 1 | 0 | 21.81 | 21.0±1 | / |
| | | | | 1 | 37 | 21.81 | 21.0±1 | / |
| | | | | 1 | 74 | 21.73 | 21.0±1 | / |
| | | | | 36 | 0 | 20.99 | 20.0±1 | 1.0 |
| | | | | 36 | 16 | 20.97 | 20.0±1 | 1.0 |
| | | | | 36 | 35 | 20.91 | 20.0±1 | 1.0 |
| | | | | 75 | 0 | 20.94 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.99 | 20.0±1 | 1.0 |
| | | | | 1 | 37 | 20.99 | 20.0±1 | 1.0 |
| | | | | 1 | 74 | 20.82 | 20.0±1 | 1.0 |
| | | | | 36 | 0 | 19.98 | 20.0±1 | 1.0 |
| | | | | 36 | 16 | 19.94 | 20.0±1 | 1.0 |
| | | | | 36 | 35 | 19.9 | 20.0±1 | 1.0 |
| | | | | 75 | 0 | 19.91 | 20.0±1 | 1.0 |
| 15MHz | 19125 | 1902.5 | QPSK | 1 | 0 | 21.8 | 21.0±1 | / |
| | | | | 1 | 37 | 21.77 | 21.0±1 | / |
| | | | | 1 | 74 | 21.76 | 21.0±1 | / |
| | | | | 36 | 0 | 20.92 | 20.0±1 | 1.0 |
| | | | | 36 | 16 | 20.82 | 20.0±1 | 1.0 |
| | | | | 36 | 35 | 20.79 | 20.0±1 | 1.0 |
| | | | | 75 | 0 | 20.84 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.89 | 20.0±1 | 1.0 |
| | | | | 1 | 37 | 20.87 | 20.0±1 | 1.0 |
| | | | | 1 | 74 | 20.92 | 20.0±1 | 1.0 |
| | | | | 36 | 0 | 19.8 | 20.0±1 | 1.0 |
| | | | | 36 | 16 | 19.73 | 20.0±1 | 1.0 |
| | | | | 36 | 35 | 19.77 | 20.0±1 | 1.0 |
| | | | | 75 | 0 | 19.78 | 20.0±1 | 1.0 |

| BW(MHz) | Ch | Freq(MHz) | Mode | UL RB Allocation | UL RB Offset | Average Power (dbm) | Tune up limited(dBm) | MPR (dB) |
|---------|-------|-----------|-------|------------------|--------------|---------------------|----------------------|----------|
| 20MHz | 18700 | 1860 | QPSK | 1 | 0 | 21.62 | 21.0±1 | / |
| | | | | 1 | 49 | 21.92 | 21.0±1 | / |
| | | | | 1 | 99 | 21.58 | 21.0±1 | / |
| | | | | 50 | 0 | 20.84 | 20.0±1 | 1.0 |
| | | | | 50 | 24 | 20.8 | 20.0±1 | 1.0 |
| | | | | 50 | 49 | 20.8 | 20.0±1 | 1.0 |
| | | | | 100 | 0 | 20.8 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.58 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.84 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.95 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 19.87 | 20.0±1 | 1.0 |
| | | | | 50 | 24 | 19.85 | 20.0±1 | 1.0 |
| | | | | 50 | 49 | 19.83 | 20.0±1 | 1.0 |
| | | | | 100 | 0 | 19.87 | 20.0±1 | 1.0 |
| 20MHz | 18900 | 1880 | QPSK | 1 | 0 | 21.7 | 21.0±1 | / |
| | | | | 1 | 49 | 21.99 | 21.0±1 | / |
| | | | | 1 | 99 | 21.63 | 21.0±1 | / |
| | | | | 50 | 0 | 20.89 | 20.0±1 | 1.0 |
| | | | | 50 | 24 | 20.95 | 20.0±1 | 1.0 |
| | | | | 50 | 49 | 20.81 | 20.0±1 | 1.0 |
| | | | | 100 | 0 | 20.87 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.1 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.34 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.02 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 19.89 | 20.0±1 | 1.0 |
| | | | | 50 | 24 | 19.85 | 20.0±1 | 1.0 |
| | | | | 50 | 49 | 19.83 | 20.0±1 | 1.0 |
| | | | | 100 | 0 | 19.85 | 20.0±1 | 1.0 |
| 20MHz | 19100 | 1900 | QPSK | 1 | 0 | 21.54 | 21.0±1 | / |
| | | | | 1 | 49 | 21.91 | 21.0±1 | / |
| | | | | 1 | 99 | 21.53 | 21.0±1 | / |
| | | | | 50 | 0 | 20.87 | 20.0±1 | 1.0 |
| | | | | 50 | 24 | 20.78 | 20.0±1 | 1.0 |
| | | | | 50 | 49 | 20.64 | 20.0±1 | 1.0 |
| | | | | 100 | 0 | 20.8 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.95 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.92 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.94 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 19.83 | 20.0±1 | 1.0 |
| | | | | 50 | 24 | 19.74 | 20.0±1 | 1.0 |
| | | | | 50 | 49 | 19.65 | 20.0±1 | 1.0 |
| | | | | 100 | 0 | 19.76 | 20.0±1 | 1.0 |

LTE Band 4:

| BW(MHz) | Ch | Freq(MHz) | Mode | UL RB Allocation | UL RB Offset | Average Power (dbm) | Tune up limited(dBm) | MPR (dB) |
|---------|-------|-----------|-------|------------------|--------------|---------------------|----------------------|----------|
| 1.4MHz | 19957 | 1710.7 | QPSK | 1 | 0 | 21.66 | 21.0±1 | / |
| | | | | 1 | 2 | 21.79 | 21.0±1 | / |
| | | | | 1 | 5 | 21.67 | 21.0±1 | / |
| | | | | 3 | 0 | 21.65 | 21.0±1 | / |
| | | | | 3 | 1 | 21.71 | 21.0±1 | / |
| | | | | 3 | 2 | 21.63 | 21.0±1 | / |
| | | | | 6 | 0 | 20.7 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.61 | 20.0±1 | 1.0 |
| | | | | 1 | 2 | 20.74 | 20.0±1 | 1.0 |
| | | | | 1 | 5 | 20.6 | 20.0±1 | 1.0 |
| | | | | 3 | 0 | 20.64 | 20.0±1 | 1.0 |
| | | | | 3 | 1 | 20.64 | 20.0±1 | 1.0 |
| | | | | 3 | 2 | 20.65 | 20.0±1 | 1.0 |
| | | | | 6 | 0 | 19.82 | 20.0±1 | 1.0 |
| 1.4MHz | 20175 | 1732.5 | QPSK | 1 | 0 | 21.64 | 21.0±1 | / |
| | | | | 1 | 2 | 21.76 | 21.0±1 | / |
| | | | | 1 | 5 | 21.63 | 21.0±1 | / |
| | | | | 3 | 0 | 21.69 | 21.0±1 | / |
| | | | | 3 | 1 | 21.77 | 21.0±1 | / |
| | | | | 3 | 2 | 21.69 | 21.0±1 | / |
| | | | | 6 | 0 | 20.68 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.96 | 20.0±1 | 1.0 |
| | | | | 1 | 2 | 20.88 | 20.0±1 | 1.0 |
| | | | | 1 | 5 | 20.95 | 20.0±1 | 1.0 |
| | | | | 3 | 0 | 20.84 | 20.0±1 | 1.0 |
| | | | | 3 | 1 | 20.88 | 20.0±1 | 1.0 |
| | | | | 3 | 2 | 20.86 | 20.0±1 | 1.0 |
| | | | | 6 | 0 | 19.58 | 20.0±1 | 1.0 |
| 1.4MHz | 20393 | 1754.3 | QPSK | 1 | 0 | 21.69 | 21.0±1 | / |
| | | | | 1 | 2 | 21.84 | 21.0±1 | / |
| | | | | 1 | 5 | 21.7 | 21.0±1 | / |
| | | | | 3 | 0 | 21.75 | 21.0±1 | / |
| | | | | 3 | 1 | 21.78 | 21.0±1 | / |
| | | | | 3 | 2 | 21.73 | 21.0±1 | / |
| | | | | 6 | 0 | 20.71 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.63 | 20.0±1 | 1.0 |
| | | | | 1 | 2 | 20.77 | 20.0±1 | 1.0 |
| | | | | 1 | 5 | 20.63 | 20.0±1 | 1.0 |
| | | | | 3 | 0 | 20.84 | 20.0±1 | 1.0 |
| | | | | 3 | 1 | 20.84 | 20.0±1 | 1.0 |
| | | | | 3 | 2 | 20.85 | 20.0±1 | 1.0 |
| | | | | 6 | 0 | 19.86 | 20.0±1 | 1.0 |

| BW(MHz) | Ch | Freq(MHz) | Mode | UL RB Allocation | UL RB Offset | Average Power (dbm) | Tune up limited(dBm) | MPR (dB) |
|---------|-------|-----------|-------|------------------|--------------|---------------------|----------------------|----------|
| 3MHz | 19965 | 1711.5 | QPSK | 1 | 0 | 21.75 | 21.0±1 | / |
| | | | | 1 | 8 | 21.68 | 21.0±1 | / |
| | | | | 1 | 14 | 21.71 | 21.0±1 | / |
| | | | | 6 | 0 | 20.66 | 20.0±1 | 1.0 |
| | | | | 6 | 4 | 20.69 | 20.0±1 | 1.0 |
| | | | | 6 | 9 | 20.65 | 20.0±1 | 1.0 |
| | | | | 15 | 0 | 20.61 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.52 | 20.0±1 | 1.0 |
| | | | | 1 | 8 | 20.45 | 20.0±1 | 1.0 |
| | | | | 1 | 14 | 20.5 | 20.0±1 | 1.0 |
| | | | | 8 | 0 | 19.73 | 20.0±1 | 1.0 |
| | | | | 8 | 4 | 19.74 | 20.0±1 | 1.0 |
| | | | | 8 | 9 | 19.72 | 20.0±1 | 1.0 |
| | | | | 15 | 0 | 19.6 | 20.0±1 | 1.0 |
| 3MHz | 20175 | 1732.5 | QPSK | 1 | 0 | 21.7 | 21.0±1 | / |
| | | | | 1 | 8 | 21.63 | 21.0±1 | / |
| | | | | 1 | 14 | 21.71 | 21.0±1 | / |
| | | | | 6 | 0 | 20.66 | 20.0±1 | 1.0 |
| | | | | 6 | 4 | 20.72 | 20.0±1 | 1.0 |
| | | | | 6 | 9 | 20.68 | 20.0±1 | 1.0 |
| | | | | 15 | 0 | 20.66 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.99 | 20.0±1 | 1.0 |
| | | | | 1 | 8 | 20.94 | 20.0±1 | 1.0 |
| | | | | 1 | 14 | 20.93 | 20.0±1 | 1.0 |
| | | | | 6 | 0 | 19.71 | 20.0±1 | 1.0 |
| | | | | 6 | 4 | 19.74 | 20.0±1 | 1.0 |
| | | | | 6 | 9 | 19.7 | 20.0±1 | 1.0 |
| | | | | 15 | 0 | 19.64 | 20.0±1 | 1.0 |
| 3MHz | 20385 | 1753.5 | QPSK | 1 | 0 | 21.74 | 21.0±1 | / |
| | | | | 1 | 8 | 21.74 | 21.0±1 | / |
| | | | | 1 | 14 | 21.77 | 21.0±1 | / |
| | | | | 6 | 0 | 20.73 | 20.0±1 | 1.0 |
| | | | | 6 | 4 | 20.77 | 20.0±1 | 1.0 |
| | | | | 6 | 9 | 20.68 | 20.0±1 | 1.0 |
| | | | | 15 | 0 | 20.69 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.68 | 20.0±1 | 1.0 |
| | | | | 1 | 8 | 20.62 | 20.0±1 | 1.0 |
| | | | | 1 | 14 | 20.63 | 20.0±1 | 1.0 |
| | | | | 8 | 0 | 19.71 | 20.0±1 | 1.0 |
| | | | | 8 | 4 | 19.73 | 20.0±1 | 1.0 |
| | | | | 8 | 9 | 19.71 | 20.0±1 | 1.0 |
| | | | | 15 | 0 | 19.65 | 20.0±1 | 1.0 |

| BW(MHz) | Ch | Freq(MHz) | Mode | UL RB Allocation | UL RB Offset | Average Power (dbm) | Tune up limited(dBm) | MPR (dB) |
|---------|-------|-----------|-------|------------------|--------------|---------------------|----------------------|----------|
| 5MHz | 19975 | 1712.5 | QPSK | 1 | 0 | 21.65 | 21.0±1 | / |
| | | | | 1 | 49 | 21.67 | 21.0±1 | / |
| | | | | 1 | 99 | 21.65 | 21.0±1 | / |
| | | | | 12 | 0 | 20.6 | 20.0±1 | 1.0 |
| | | | | 12 | 24 | 20.65 | 20.0±1 | 1.0 |
| | | | | 12 | 49 | 20.66 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 20.58 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.72 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.75 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.75 | 20.0±1 | 1.0 |
| | | | | 12 | 0 | 19.65 | 20.0±1 | 1.0 |
| | | | | 12 | 24 | 19.67 | 20.0±1 | 1.0 |
| | | | | 12 | 49 | 19.69 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 19.61 | 20.0±1 | 1.0 |
| 5MHz | 20175 | 1732.5 | QPSK | 1 | 0 | 21.68 | 21.0±1 | / |
| | | | | 1 | 49 | 21.65 | 21.0±1 | / |
| | | | | 1 | 99 | 21.65 | 21.0±1 | / |
| | | | | 12 | 0 | 20.62 | 20.0±1 | 1.0 |
| | | | | 12 | 24 | 20.66 | 20.0±1 | 1.0 |
| | | | | 12 | 49 | 20.59 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 20.62 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.91 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.81 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.88 | 20.0±1 | 1.0 |
| | | | | 12 | 0 | 19.76 | 20.0±1 | 1.0 |
| | | | | 12 | 24 | 19.8 | 20.0±1 | 1.0 |
| | | | | 12 | 49 | 19.76 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 19.69 | 20.0±1 | 1.0 |
| 5MHz | 20375 | 1752.5 | QPSK | 1 | 0 | 21.66 | 21.0±1 | / |
| | | | | 1 | 49 | 21.67 | 21.0±1 | / |
| | | | | 1 | 99 | 21.71 | 21.0±1 | / |
| | | | | 12 | 0 | 20.66 | 20.0±1 | 1.0 |
| | | | | 12 | 24 | 20.7 | 20.0±1 | 1.0 |
| | | | | 12 | 49 | 20.62 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 20.68 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.71 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.7 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.73 | 20.0±1 | 1.0 |
| | | | | 12 | 0 | 19.68 | 20.0±1 | 1.0 |
| | | | | 12 | 24 | 19.72 | 20.0±1 | 1.0 |
| | | | | 12 | 49 | 19.7 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 19.64 | 20.0±1 | 1.0 |

| BW(MHz) | Ch | Freq(MHz) | Mode | UL RB Allocation | UL RB Offset | Average Power (dbm) | Tune up limited(dBm) | MPR (dB) |
|---------|-------|-----------|-------|------------------|--------------|---------------------|----------------------|----------|
| 10MHz | 20000 | 1715 | QPSK | 1 | 0 | 21.67 | 21.0±1 | / |
| | | | | 1 | 49 | 21.81 | 21.0±1 | / |
| | | | | 1 | 99 | 21.62 | 21.0±1 | / |
| | | | | 25 | 0 | 20.58 | 20.0±1 | 1.0 |
| | | | | 25 | 24 | 20.65 | 20.0±1 | 1.0 |
| | | | | 25 | 49 | 20.62 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 20.59 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.46 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.59 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.47 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 19.57 | 20.0±1 | 1.0 |
| | | | | 25 | 24 | 19.62 | 20.0±1 | 1.0 |
| | | | | 25 | 49 | 19.59 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 19.55 | 20.0±1 | 1.0 |
| 10MHz | 20175 | 1732.5 | QPSK | 1 | 0 | 21.64 | 21.0±1 | / |
| | | | | 1 | 49 | 21.79 | 21.0±1 | / |
| | | | | 1 | 99 | 21.65 | 21.0±1 | / |
| | | | | 25 | 0 | 20.69 | 20.0±1 | 1.0 |
| | | | | 25 | 24 | 20.65 | 20.0±1 | 1.0 |
| | | | | 25 | 49 | 20.63 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 20.63 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.95 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.97 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.94 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 19.7 | 20.0±1 | 1.0 |
| | | | | 25 | 24 | 19.65 | 20.0±1 | 1.0 |
| | | | | 25 | 49 | 19.63 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 19.61 | 20.0±1 | 1.0 |
| 10MHz | 20350 | 1750 | QPSK | 1 | 0 | 21.65 | 21.0±1 | / |
| | | | | 1 | 49 | 21.83 | 21.0±1 | / |
| | | | | 1 | 99 | 21.7 | 21.0±1 | / |
| | | | | 25 | 0 | 20.67 | 20.0±1 | 1.0 |
| | | | | 25 | 24 | 20.64 | 20.0±1 | 1.0 |
| | | | | 25 | 49 | 20.59 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 20.6 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.53 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.74 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.62 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 19.75 | 20.0±1 | 1.0 |
| | | | | 25 | 24 | 19.73 | 20.0±1 | 1.0 |
| | | | | 25 | 49 | 19.7 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 19.62 | 20.0±1 | 1.0 |

| BW(MHz) | Ch | Freq(MHz) | Mode | UL RB Allocation | UL RB Offset | Average Power (dbm) | Tune up limited(dBm) | MPR (dB) |
|---------|-------|-----------|-------|------------------|--------------|---------------------|----------------------|----------|
| 15MHz | 20025 | 1717.5 | QPSK | 1 | 0 | 21.6 | 21.0±1 | / |
| | | | | 1 | 49 | 21.63 | 21.0±1 | / |
| | | | | 1 | 99 | 21.55 | 21.0±1 | / |
| | | | | 36 | 0 | 20.7 | 20.0±1 | 1.0 |
| | | | | 36 | 24 | 20.71 | 20.0±1 | 1.0 |
| | | | | 36 | 49 | 20.68 | 20.0±1 | 1.0 |
| | | | | 75 | 0 | 20.69 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.42 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.5 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.45 | 20.0±1 | 1.0 |
| | | | | 36 | 0 | 19.61 | 20.0±1 | 1.0 |
| | | | | 36 | 24 | 19.64 | 20.0±1 | 1.0 |
| | | | | 36 | 49 | 19.6 | 20.0±1 | 1.0 |
| | | | | 75 | 0 | 19.62 | 20.0±1 | 1.0 |
| 15MHz | 20175 | 1732.5 | QPSK | 1 | 0 | 21.63 | 21.0±1 | / |
| | | | | 1 | 49 | 21.65 | 21.0±1 | / |
| | | | | 1 | 99 | 21.64 | 21.0±1 | / |
| | | | | 36 | 0 | 20.7 | 20.0±1 | 1.0 |
| | | | | 36 | 24 | 20.75 | 20.0±1 | 1.0 |
| | | | | 36 | 49 | 20.75 | 20.0±1 | 1.0 |
| | | | | 75 | 0 | 20.75 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.93 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.98 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.9 | 20.0±1 | 1.0 |
| | | | | 36 | 0 | 19.69 | 20.0±1 | 1.0 |
| | | | | 36 | 24 | 19.75 | 20.0±1 | 1.0 |
| | | | | 36 | 49 | 19.71 | 20.0±1 | 1.0 |
| | | | | 75 | 0 | 19.74 | 20.0±1 | 1.0 |
| 15MHz | 20325 | 1747.5 | QPSK | 1 | 0 | 21.63 | 21.0±1 | / |
| | | | | 1 | 49 | 21.7 | 21.0±1 | / |
| | | | | 1 | 99 | 21.73 | 21.0±1 | / |
| | | | | 36 | 0 | 20.72 | 20.0±1 | 1.0 |
| | | | | 36 | 24 | 20.74 | 20.0±1 | 1.0 |
| | | | | 36 | 49 | 20.69 | 20.0±1 | 1.0 |
| | | | | 75 | 0 | 20.74 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.89 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.95 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.96 | 20.0±1 | 1.0 |
| | | | | 36 | 0 | 19.63 | 20.0±1 | 1.0 |
| | | | | 36 | 24 | 19.67 | 20.0±1 | 1.0 |
| | | | | 36 | 49 | 19.62 | 20.0±1 | 1.0 |
| | | | | 75 | 0 | 19.66 | 20.0±1 | 1.0 |

| BW(MHz) | Ch | Freq(MHz) | Mode | UL RB Allocation | UL RB Offset | Average Power (dbm) | Tune up limited(dBm) | MPR (dB) |
|---------|-------|-----------|-------|------------------|--------------|---------------------|----------------------|----------|
| 20MHz | 20050 | 1720 | QPSK | 1 | 0 | 21.52 | 21.0±1 | / |
| | | | | 1 | 49 | 21.96 | 21.0±1 | / |
| | | | | 1 | 99 | 21.53 | 21.0±1 | / |
| | | | | 50 | 0 | 20.63 | 20.0±1 | 1.0 |
| | | | | 50 | 24 | 20.63 | 20.0±1 | 1.0 |
| | | | | 50 | 49 | 20.61 | 20.0±1 | 1.0 |
| | | | | 100 | 0 | 20.64 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.87 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.82 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.99 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 19.65 | 20.0±1 | 1.0 |
| | | | | 50 | 24 | 19.66 | 20.0±1 | 1.0 |
| | | | | 50 | 49 | 19.63 | 20.0±1 | 1.0 |
| | | | | 100 | 0 | 19.68 | 20.0±1 | 1.0 |
| 20MHz | 20175 | 1732.5 | QPSK | 1 | 0 | 21.46 | 21.0±1 | / |
| | | | | 1 | 49 | 21.98 | 21.0±1 | / |
| | | | | 1 | 99 | 21.54 | 21.0±1 | / |
| | | | | 50 | 0 | 20.68 | 20.0±1 | 1.0 |
| | | | | 50 | 24 | 20.69 | 20.0±1 | 1.0 |
| | | | | 50 | 49 | 20.64 | 20.0±1 | 1.0 |
| | | | | 100 | 0 | 20.72 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.87 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.85 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.84 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 19.72 | 20.0±1 | 1.0 |
| | | | | 50 | 24 | 19.65 | 20.0±1 | 1.0 |
| | | | | 50 | 49 | 19.68 | 20.0±1 | 1.0 |
| | | | | 100 | 0 | 19.71 | 20.0±1 | 1.0 |
| 20MHz | 20300 | 1745 | QPSK | 1 | 0 | 21.42 | 21.0±1 | / |
| | | | | 1 | 49 | 21.97 | 21.0±1 | / |
| | | | | 1 | 99 | 21.52 | 21.0±1 | / |
| | | | | 50 | 0 | 20.66 | 20.0±1 | 1.0 |
| | | | | 50 | 24 | 20.63 | 20.0±1 | 1.0 |
| | | | | 50 | 49 | 20.59 | 20.0±1 | 1.0 |
| | | | | 100 | 0 | 20.65 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.78 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.97 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.88 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 19.61 | 20.0±1 | 1.0 |
| | | | | 50 | 24 | 19.58 | 20.0±1 | 1.0 |
| | | | | 50 | 49 | 19.55 | 20.0±1 | 1.0 |
| | | | | 100 | 0 | 19.65 | 20.0±1 | 1.0 |

LTE Band 5:

| BW(MHz) | Ch | Freq(MHz) | Mode | UL RB Allocation | UL RB Offset | Average Power (dbm) | Tune up limited(dBm) | MPR (dB) |
|---------|-------|-----------|------|------------------|--------------|---------------------|----------------------|----------|
| 20407 | 824.7 | QPSK | 1 | 0 | 22.41 | 22.0±1 | / | |
| | | | 1 | 2 | 22.57 | 22.0±1 | / | |
| | | | 1 | 5 | 22.33 | 22.0±1 | / | |
| | | | 3 | 0 | 22.3 | 22.0±1 | / | |
| | | | 3 | 1 | 22.34 | 22.0±1 | / | |
| | | | 3 | 2 | 22.32 | 22.0±1 | / | |
| | | | 6 | 0 | 21.37 | 21.0±1 | 1.0 | |
| | | 16QAM | 1 | 0 | 21.15 | 21.0±1 | 1.0 | |
| | | | 1 | 2 | 21.32 | 21.0±1 | 1.0 | |
| | | | 1 | 5 | 21.19 | 21.0±1 | 1.0 | |
| | | | 3 | 0 | 21.35 | 21.0±1 | 1.0 | |
| | | | 3 | 1 | 21.41 | 21.0±1 | 1.0 | |
| | | | 3 | 2 | 21.39 | 21.0±1 | 1.0 | |
| | | | 6 | 0 | 20.43 | 21.0±1 | 1.0 | |
| 1.4MHz | 20525 | QPSK | 1 | 0 | 22.2 | 22.0±1 | / | |
| | | | 1 | 2 | 22.39 | 22.0±1 | / | |
| | | | 1 | 5 | 22.2 | 22.0±1 | / | |
| | | | 3 | 0 | 22.22 | 22.0±1 | / | |
| | | | 3 | 1 | 22.26 | 22.0±1 | / | |
| | | | 3 | 2 | 22.22 | 22.0±1 | / | |
| | | | 6 | 0 | 21.32 | 21.0±1 | 1.0 | |
| | | 16QAM | 1 | 0 | 21.25 | 21.0±1 | 1.0 | |
| | | | 1 | 2 | 21.41 | 21.0±1 | 1.0 | |
| | | | 1 | 5 | 21.25 | 21.0±1 | 1.0 | |
| | | | 3 | 0 | 21.27 | 21.0±1 | 1.0 | |
| | | | 3 | 1 | 21.29 | 21.0±1 | 1.0 | |
| | | | 3 | 2 | 21.27 | 21.0±1 | 1.0 | |
| | | | 6 | 0 | 20.43 | 21.0±1 | 1.0 | |
| 20634 | 848.3 | QPSK | 1 | 0 | 22.29 | 22.0±1 | / | |
| | | | 1 | 2 | 22.3 | 22.0±1 | / | |
| | | | 1 | 5 | 22.3 | 22.0±1 | / | |
| | | | 3 | 0 | 22.26 | 22.0±1 | / | |
| | | | 3 | 1 | 22.33 | 22.0±1 | / | |
| | | | 3 | 2 | 22.28 | 22.0±1 | / | |
| | | | 6 | 0 | 21.39 | 21.0±1 | 1.0 | |
| | | 16QAM | 1 | 0 | 21.56 | 21.0±1 | 1.0 | |
| | | | 1 | 2 | 21.64 | 21.0±1 | 1.0 | |
| | | | 1 | 5 | 21.53 | 21.0±1 | 1.0 | |
| | | | 3 | 0 | 21.41 | 21.0±1 | 1.0 | |
| | | | 3 | 1 | 21.44 | 21.0±1 | 1.0 | |
| | | | 3 | 2 | 21.42 | 21.0±1 | 1.0 | |
| | | | 6 | 0 | 20.22 | 21.0±1 | 1.0 | |

| BW(MHz) | Ch | Freq(MHz) | Mode | UL RB Allocation | UL RB Offset | Average Power (dbm) | Tune up limited(dBm) | MPR (dB) |
|---------|-------|-----------|-------|------------------|--------------|---------------------|----------------------|----------|
| 3MHz | 20415 | 825.5 | QPSK | 1 | 0 | 22.51 | 22.0±1 | / |
| | | | | 1 | 8 | 22.36 | 22.0±1 | / |
| | | | | 1 | 14 | 22.38 | 22.0±1 | / |
| | | | | 6 | 0 | 21.37 | 21.0±1 | 1.0 |
| | | | | 6 | 4 | 21.38 | 21.0±1 | 1.0 |
| | | | | 6 | 9 | 21.34 | 21.0±1 | 1.0 |
| | | | | 15 | 0 | 21.31 | 21.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 21.16 | 21.0±1 | 1.0 |
| | | | | 1 | 8 | 21.08 | 21.0±1 | 1.0 |
| | | | | 1 | 14 | 21.13 | 21.0±1 | 1.0 |
| | | | | 8 | 0 | 20.38 | 21.0±1 | 1.0 |
| | | | | 8 | 4 | 20.42 | 21.0±1 | 1.0 |
| | | | | 8 | 9 | 20.39 | 21.0±1 | 1.0 |
| | | | | 15 | 0 | 20.32 | 21.0±1 | 1.0 |
| 3MHz | 20525 | 836.5 | QPSK | 1 | 0 | 22.33 | 22.0±1 | / |
| | | | | 1 | 8 | 22.24 | 22.0±1 | / |
| | | | | 1 | 14 | 22.3 | 22.0±1 | / |
| | | | | 6 | 0 | 21.32 | 21.0±1 | 1.0 |
| | | | | 6 | 4 | 21.38 | 21.0±1 | 1.0 |
| | | | | 6 | 9 | 21.34 | 21.0±1 | 1.0 |
| | | | | 15 | 0 | 21.3 | 21.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 21.56 | 21.0±1 | 1.0 |
| | | | | 1 | 8 | 21.55 | 21.0±1 | 1.0 |
| | | | | 1 | 14 | 21.61 | 21.0±1 | 1.0 |
| | | | | 6 | 0 | 20.37 | 21.0±1 | 1.0 |
| | | | | 6 | 4 | 20.4 | 21.0±1 | 1.0 |
| | | | | 6 | 9 | 20.35 | 21.0±1 | 1.0 |
| | | | | 15 | 0 | 20.31 | 21.0±1 | 1.0 |
| 3MHz | 20635 | 847.5 | QPSK | 1 | 0 | 22.42 | 22.0±1 | / |
| | | | | 1 | 8 | 22.34 | 22.0±1 | / |
| | | | | 1 | 14 | 22.42 | 22.0±1 | / |
| | | | | 6 | 0 | 21.34 | 21.0±1 | 1.0 |
| | | | | 6 | 4 | 21.39 | 21.0±1 | 1.0 |
| | | | | 6 | 9 | 21.34 | 21.0±1 | 1.0 |
| | | | | 15 | 0 | 21.33 | 21.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 21.28 | 21.0±1 | 1.0 |
| | | | | 1 | 8 | 21.19 | 21.0±1 | 1.0 |
| | | | | 1 | 14 | 21.21 | 21.0±1 | 1.0 |
| | | | | 8 | 0 | 20.34 | 21.0±1 | 1.0 |
| | | | | 8 | 4 | 20.4 | 21.0±1 | 1.0 |
| | | | | 8 | 9 | 20.32 | 21.0±1 | 1.0 |
| | | | | 15 | 0 | 20.27 | 21.0±1 | 1.0 |

| BW(MHz) | Ch | Freq(MHz) | Mode | UL RB Allocation | UL RB Offset | Average Power (dbm) | Tune up limited(dBm) | MPR (dB) |
|---------|-------|-----------|-------|------------------|--------------|---------------------|----------------------|----------|
| 5MHz | 20425 | 826.5 | QPSK | 1 | 0 | 22.38 | 22.0±1 | / |
| | | | | 1 | 49 | 22.35 | 22.0±1 | / |
| | | | | 1 | 99 | 22.33 | 22.0±1 | / |
| | | | | 12 | 0 | 21.33 | 21.0±1 | 1.0 |
| | | | | 12 | 24 | 21.34 | 21.0±1 | 1.0 |
| | | | | 12 | 49 | 21.31 | 21.0±1 | 1.0 |
| | | | | 25 | 0 | 21.3 | 21.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 21.4 | 21.0±1 | 1.0 |
| | | | | 1 | 49 | 21.37 | 21.0±1 | 1.0 |
| | | | | 1 | 99 | 21.41 | 21.0±1 | 1.0 |
| | | | | 12 | 0 | 20.32 | 21.0±1 | 1.0 |
| | | | | 12 | 24 | 20.39 | 21.0±1 | 1.0 |
| | | | | 12 | 49 | 20.35 | 21.0±1 | 1.0 |
| | | | | 25 | 0 | 20.32 | 21.0±1 | 1.0 |
| 5MHz | 20525 | 836.5 | QPSK | 1 | 0 | 22.34 | 22.0±1 | / |
| | | | | 1 | 49 | 22.3 | 22.0±1 | / |
| | | | | 1 | 99 | 22.28 | 22.0±1 | / |
| | | | | 12 | 0 | 21.3 | 21.0±1 | 1.0 |
| | | | | 12 | 24 | 21.36 | 21.0±1 | 1.0 |
| | | | | 12 | 49 | 21.32 | 21.0±1 | 1.0 |
| | | | | 25 | 0 | 21.33 | 21.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 21.72 | 21.0±1 | 1.0 |
| | | | | 1 | 49 | 21.75 | 21.0±1 | 1.0 |
| | | | | 1 | 99 | 21.73 | 21.0±1 | 1.0 |
| | | | | 12 | 0 | 20.43 | 21.0±1 | 1.0 |
| | | | | 12 | 24 | 20.49 | 21.0±1 | 1.0 |
| | | | | 12 | 49 | 20.4 | 21.0±1 | 1.0 |
| | | | | 25 | 0 | 20.38 | 21.0±1 | 1.0 |
| 5MHz | 20625 | 846.5 | QPSK | 1 | 0 | 22.26 | 22.0±1 | / |
| | | | | 1 | 49 | 22.32 | 22.0±1 | / |
| | | | | 1 | 99 | 22.32 | 22.0±1 | / |
| | | | | 12 | 0 | 21.3 | 21.0±1 | 1.0 |
| | | | | 12 | 24 | 21.38 | 21.0±1 | 1.0 |
| | | | | 12 | 49 | 21.31 | 21.0±1 | 1.0 |
| | | | | 25 | 0 | 21.29 | 21.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 21.38 | 21.0±1 | 1.0 |
| | | | | 1 | 49 | 21.35 | 21.0±1 | 1.0 |
| | | | | 1 | 99 | 21.37 | 21.0±1 | 1.0 |
| | | | | 12 | 0 | 20.32 | 21.0±1 | 1.0 |
| | | | | 12 | 24 | 20.38 | 21.0±1 | 1.0 |
| | | | | 12 | 49 | 20.35 | 21.0±1 | 1.0 |
| | | | | 25 | 0 | 20.23 | 21.0±1 | 1.0 |

| BW(MHz) | Ch | Freq(MHz) | Mode | UL RB Allocation | UL RB Offset | Average Power (dbm) | Tune up limited(dBm) | MPR (dB) |
|---------|-------|-----------|-------|------------------|--------------|---------------------|----------------------|----------|
| 10MHz | 20450 | 829 | QPSK | 1 | 0 | 22.48 | 22.0±1 | / |
| | | | | 1 | 49 | 22.89 | 22.0±1 | / |
| | | | | 1 | 99 | 22.33 | 22.0±1 | / |
| | | | | 25 | 0 | 21.36 | 21.0±1 | 1.0 |
| | | | | 25 | 24 | 21.35 | 21.0±1 | 1.0 |
| | | | | 25 | 49 | 21.39 | 21.0±1 | 1.0 |
| | | | | 50 | 0 | 21.36 | 21.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 21.18 | 21.0±1 | 1.0 |
| | | | | 1 | 49 | 21.27 | 21.0±1 | 1.0 |
| | | | | 1 | 99 | 21.17 | 21.0±1 | 1.0 |
| | | | | 25 | 0 | 20.36 | 21.0±1 | 1.0 |
| | | | | 25 | 24 | 20.33 | 21.0±1 | 1.0 |
| | | | | 25 | 49 | 20.38 | 21.0±1 | 1.0 |
| | | | | 50 | 0 | 20.32 | 21.0±1 | 1.0 |
| 10MHz | 20525 | 836.5 | QPSK | 1 | 0 | 22.38 | 22.0±1 | / |
| | | | | 1 | 49 | 22.92 | 22.0±1 | / |
| | | | | 1 | 99 | 22.32 | 22.0±1 | / |
| | | | | 25 | 0 | 21.44 | 21.0±1 | 1.0 |
| | | | | 25 | 24 | 21.37 | 21.0±1 | 1.0 |
| | | | | 25 | 49 | 21.31 | 21.0±1 | 1.0 |
| | | | | 50 | 0 | 21.38 | 21.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 21.61 | 21.0±1 | 1.0 |
| | | | | 1 | 49 | 21.71 | 21.0±1 | 1.0 |
| | | | | 1 | 99 | 21.64 | 21.0±1 | 1.0 |
| | | | | 25 | 0 | 20.46 | 21.0±1 | 1.0 |
| | | | | 25 | 24 | 20.4 | 21.0±1 | 1.0 |
| | | | | 25 | 49 | 20.37 | 21.0±1 | 1.0 |
| | | | | 50 | 0 | 20.4 | 21.0±1 | 1.0 |
| 10MHz | 20600 | 844 | QPSK | 1 | 0 | 22.28 | 22.0±1 | / |
| | | | | 1 | 49 | 22.87 | 22.0±1 | / |
| | | | | 1 | 99 | 22.45 | 22.0±1 | / |
| | | | | 25 | 0 | 21.33 | 21.0±1 | 1.0 |
| | | | | 25 | 24 | 21.34 | 21.0±1 | 1.0 |
| | | | | 25 | 49 | 21.36 | 21.0±1 | 1.0 |
| | | | | 50 | 0 | 21.37 | 21.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 21.23 | 21.0±1 | 1.0 |
| | | | | 1 | 49 | 21.37 | 21.0±1 | 1.0 |
| | | | | 1 | 99 | 21.24 | 21.0±1 | 1.0 |
| | | | | 25 | 0 | 20.44 | 21.0±1 | 1.0 |
| | | | | 25 | 24 | 20.46 | 21.0±1 | 1.0 |
| | | | | 25 | 49 | 20.45 | 21.0±1 | 1.0 |
| | | | | 50 | 0 | 20.37 | 21.0±1 | 1.0 |

LTE Band 7:

| BW(MHz) | Ch | Freq(MHz) | Mode | UL RB Allocation | UL RB Offset | Average Power (dbm) | Tune up limited(dBm) | MPR (dB) |
|---------|-------|-----------|-------|------------------|--------------|---------------------|----------------------|----------|
| 5MHz | 20775 | 2502.5 | QPSK | 1 | 0 | 21.59 | 21.0±1 | / |
| | | | | 1 | 49 | 21.55 | 21.0±1 | / |
| | | | | 1 | 99 | 21.57 | 21.0±1 | / |
| | | | | 12 | 0 | 20.54 | 20.0±1 | 1.0 |
| | | | | 12 | 24 | 20.52 | 20.0±1 | 1.0 |
| | | | | 12 | 49 | 20.58 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 20.6 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.98 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.93 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.93 | 20.0±1 | 1.0 |
| | | | | 12 | 0 | 19.71 | 20.0±1 | 1.0 |
| | | | | 12 | 24 | 19.7 | 20.0±1 | 1.0 |
| | | | | 12 | 49 | 19.68 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 19.67 | 20.0±1 | 1.0 |
| 5MHz | 21100 | 2535 | QPSK | 1 | 0 | 21.34 | 21.0±1 | / |
| | | | | 1 | 49 | 21.33 | 21.0±1 | / |
| | | | | 1 | 99 | 21.36 | 21.0±1 | / |
| | | | | 12 | 0 | 20.34 | 20.0±1 | 1.0 |
| | | | | 12 | 24 | 20.35 | 20.0±1 | 1.0 |
| | | | | 12 | 49 | 20.32 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 20.38 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.41 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.39 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.42 | 20.0±1 | 1.0 |
| | | | | 12 | 0 | 19.43 | 20.0±1 | 1.0 |
| | | | | 12 | 24 | 19.45 | 20.0±1 | 1.0 |
| | | | | 12 | 49 | 19.41 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 19.35 | 20.0±1 | 1.0 |
| 5MHz | 21425 | 2567.5 | QPSK | 1 | 0 | 21.28 | 21.0±1 | / |
| | | | | 1 | 49 | 21.27 | 21.0±1 | / |
| | | | | 1 | 99 | 21.31 | 21.0±1 | / |
| | | | | 12 | 0 | 20.28 | 20.0±1 | 1.0 |
| | | | | 12 | 24 | 20.33 | 20.0±1 | 1.0 |
| | | | | 12 | 49 | 20.24 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 20.25 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.38 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.36 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.35 | 20.0±1 | 1.0 |
| | | | | 12 | 0 | 19.4 | 20.0±1 | 1.0 |
| | | | | 12 | 24 | 19.4 | 20.0±1 | 1.0 |
| | | | | 12 | 49 | 19.41 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 19.35 | 20.0±1 | 1.0 |

| BW(MHz) | Ch | Freq(MHz) | Mode | UL RB Allocation | UL RB Offset | Average Power (dbm) | Tune up limited(dBm) | MPR (dB) |
|---------|-------|-----------|-------|------------------|--------------|---------------------|----------------------|----------|
| 10MHz | 20800 | 2505 | QPSK | 1 | 0 | 21.66 | 21.0±1 | / |
| | | | | 1 | 49 | 21.7 | 21.0±1 | / |
| | | | | 1 | 99 | 21.56 | 21.0±1 | / |
| | | | | 25 | 0 | 20.57 | 20.0±1 | 1.0 |
| | | | | 25 | 24 | 20.56 | 20.0±1 | 1.0 |
| | | | | 25 | 49 | 20.62 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 20.6 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.44 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.52 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.33 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 19.66 | 20.0±1 | 1.0 |
| | | | | 25 | 24 | 19.7 | 20.0±1 | 1.0 |
| | | | | 25 | 49 | 19.54 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 19.65 | 20.0±1 | 1.0 |
| | 21100 | 2535 | QPSK | 1 | 0 | 21.42 | 21.0±1 | / |
| | | | | 1 | 49 | 21.51 | 21.0±1 | / |
| | | | | 1 | 99 | 21.38 | 21.0±1 | / |
| | | | | 25 | 0 | 20.39 | 20.0±1 | 1.0 |
| | | | | 25 | 24 | 20.38 | 20.0±1 | 1.0 |
| | | | | 25 | 49 | 20.37 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 20.4 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.66 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.78 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.64 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 19.45 | 20.0±1 | 1.0 |
| | | | | 25 | 24 | 19.43 | 20.0±1 | 1.0 |
| | | | | 25 | 49 | 19.42 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 19.42 | 20.0±1 | 1.0 |
| | 21400 | 2565 | QPSK | 1 | 0 | 21.4 | 21.0±1 | / |
| | | | | 1 | 49 | 21.5 | 21.0±1 | / |
| | | | | 1 | 99 | 21.34 | 21.0±1 | / |
| | | | | 25 | 0 | 20.38 | 20.0±1 | 1.0 |
| | | | | 25 | 24 | 20.23 | 20.0±1 | 1.0 |
| | | | | 25 | 49 | 20.29 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 20.34 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.23 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.35 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.22 | 20.0±1 | 1.0 |
| | | | | 25 | 0 | 19.44 | 20.0±1 | 1.0 |
| | | | | 25 | 24 | 19.39 | 20.0±1 | 1.0 |
| | | | | 25 | 49 | 19.39 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 19.37 | 20.0±1 | 1.0 |

| BW(MHz) | Ch | Freq(MHz) | Mode | UL RB Allocation | UL RB Offset | Average Power (dbm) | Tune up limited(dBm) | MPR (dB) |
|---------|-------|-----------|-------|------------------|--------------|---------------------|----------------------|----------|
| 15MHz | 20825 | 2507.5 | QPSK | 1 | 0 | 21.65 | 21.0±1 | / |
| | | | | 1 | 49 | 21.55 | 21.0±1 | / |
| | | | | 1 | 99 | 21.59 | 21.0±1 | / |
| | | | | 36 | 0 | 20.67 | 20.0±1 | 1.0 |
| | | | | 36 | 24 | 20.65 | 20.0±1 | 1.0 |
| | | | | 36 | 49 | 20.6 | 20.0±1 | 1.0 |
| | | | | 75 | 0 | 20.69 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.43 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.34 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.32 | 20.0±1 | 1.0 |
| | | | | 36 | 0 | 19.67 | 20.0±1 | 1.0 |
| | | | | 36 | 24 | 19.62 | 20.0±1 | 1.0 |
| | | | | 36 | 49 | 19.62 | 20.0±1 | 1.0 |
| | | | | 75 | 0 | 19.72 | 20.0±1 | 1.0 |
| 15MHz | 21100 | 2535 | QPSK | 1 | 0 | 21.43 | 21.0±1 | / |
| | | | | 1 | 49 | 21.39 | 21.0±1 | / |
| | | | | 1 | 99 | 21.36 | 21.0±1 | / |
| | | | | 36 | 0 | 20.46 | 20.0±1 | 1.0 |
| | | | | 36 | 24 | 20.46 | 20.0±1 | 1.0 |
| | | | | 36 | 49 | 20.43 | 20.0±1 | 1.0 |
| | | | | 75 | 0 | 20.46 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.63 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.65 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.62 | 20.0±1 | 1.0 |
| | | | | 36 | 0 | 19.47 | 20.0±1 | 1.0 |
| | | | | 36 | 24 | 19.47 | 20.0±1 | 1.0 |
| | | | | 36 | 49 | 19.45 | 20.0±1 | 1.0 |
| | | | | 75 | 0 | 19.45 | 20.0±1 | 1.0 |
| 15MHz | 21375 | 2562.5 | QPSK | 1 | 0 | 21.33 | 21.0±1 | / |
| | | | | 1 | 49 | 21.33 | 21.0±1 | / |
| | | | | 1 | 99 | 21.31 | 21.0±1 | / |
| | | | | 36 | 0 | 20.43 | 20.0±1 | 1.0 |
| | | | | 36 | 24 | 20.42 | 20.0±1 | 1.0 |
| | | | | 36 | 49 | 20.39 | 20.0±1 | 1.0 |
| | | | | 75 | 0 | 20.45 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.52 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.51 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.54 | 20.0±1 | 1.0 |
| | | | | 36 | 0 | 19.38 | 20.0±1 | 1.0 |
| | | | | 36 | 24 | 19.34 | 20.0±1 | 1.0 |
| | | | | 36 | 49 | 19.33 | 20.0±1 | 1.0 |
| | | | | 75 | 0 | 19.39 | 20.0±1 | 1.0 |

| BW(MHz) | Ch | Freq(MHz) | Mode | UL RB Allocation | UL RB Offset | Average Power (dbm) | Tune up limited(dBm) | MPR (dB) |
|---------|-------|-----------|-------|------------------|--------------|---------------------|----------------------|----------|
| 20MHz | 20850 | 2510 | QPSK | 1 | 0 | 21.53 | 21.0±1 | / |
| | | | | 1 | 49 | 21.86 | 21.0±1 | / |
| | | | | 1 | 99 | 21.47 | 21.0±1 | / |
| | | | | 50 | 0 | 20.58 | 20.0±1 | 1.0 |
| | | | | 50 | 24 | 20.61 | 20.0±1 | 1.0 |
| | | | | 50 | 49 | 20.66 | 20.0±1 | 1.0 |
| | | | | 100 | 0 | 20.64 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.92 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.81 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.79 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 19.66 | 20.0±1 | 1.0 |
| | | | | 50 | 24 | 19.64 | 20.0±1 | 1.0 |
| | | | | 50 | 49 | 19.67 | 20.0±1 | 1.0 |
| | | | | 100 | 0 | 19.73 | 20.0±1 | 1.0 |
| 20MHz | 21100 | 2535 | QPSK | 1 | 0 | 21.3 | 21.0±1 | / |
| | | | | 1 | 49 | 21.95 | 21.0±1 | / |
| | | | | 1 | 99 | 21.29 | 21.0±1 | / |
| | | | | 50 | 0 | 20.42 | 20.0±1 | 1.0 |
| | | | | 50 | 24 | 20.45 | 20.0±1 | 1.0 |
| | | | | 50 | 49 | 20.51 | 20.0±1 | 1.0 |
| | | | | 100 | 0 | 20.43 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.58 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.8 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.56 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 19.49 | 20.0±1 | 1.0 |
| | | | | 50 | 24 | 19.51 | 20.0±1 | 1.0 |
| | | | | 50 | 49 | 19.47 | 20.0±1 | 1.0 |
| | | | | 100 | 0 | 19.43 | 20.0±1 | 1.0 |
| 20MHz | 21350 | 2560 | QPSK | 1 | 0 | 21.21 | 21.0±1 | / |
| | | | | 1 | 49 | 21.95 | 21.0±1 | / |
| | | | | 1 | 99 | 21.2 | 21.0±1 | / |
| | | | | 50 | 0 | 20.32 | 20.0±1 | 1.0 |
| | | | | 50 | 24 | 20.3 | 20.0±1 | 1.0 |
| | | | | 50 | 49 | 20.31 | 20.0±1 | 1.0 |
| | | | | 100 | 0 | 20.32 | 20.0±1 | 1.0 |
| | | | 16QAM | 1 | 0 | 20.44 | 20.0±1 | 1.0 |
| | | | | 1 | 49 | 20.69 | 20.0±1 | 1.0 |
| | | | | 1 | 99 | 20.43 | 20.0±1 | 1.0 |
| | | | | 50 | 0 | 19.33 | 20.0±1 | 1.0 |
| | | | | 50 | 24 | 19.33 | 20.0±1 | 1.0 |
| | | | | 50 | 49 | 19.33 | 20.0±1 | 1.0 |
| | | | | 100 | 0 | 19.36 | 20.0±1 | 1.0 |

WIFI Mode (2.4G)

| Mode | Channel number | Frequency (MHz) | Data rate(Mbps) | Average Output Power(dBm) | Average Tune up limited(dBm) |
|---------------|----------------|-----------------|-----------------|---------------------------|------------------------------|
| 802.11b | 1 | 2412 | 1 | 13.14 | 13.0±1 |
| | 6 | 2437 | 1 | 13.57 | 13.0±1 |
| | 11 | 2462 | 1 | 13.87 | 13.0±1 |
| 802.11g | 1 | 2412 | 6 | 13.54 | 13.0±1 |
| | 6 | 2437 | 6 | 13.75 | 13.0±1 |
| | 11 | 2462 | 6 | 14.43 | 14.0±1 |
| 802.11n(HT20) | 1 | 2412 | MCS0 | 13.84 | 13.0±1 |
| | 6 | 2437 | MCS0 | 13.94 | 13.0±1 |
| | 11 | 2462 | MCS0 | 14.17 | 14.0±1 |
| 802.11n(HT40) | 3 | 2422 | MCS0 | 12.25 | 13.0±1 |
| | 6 | 2437 | MCS0 | 12.43 | 13.0±1 |
| | 9 | 2452 | MCS0 | 12.91 | 13.0±1 |

Remark:11n(HT40) channel:3/4/5/6/7/8/9

Bluetooth Measurement Result

| Mode | Frequency (MHz) | Average Output Power(dBm) | Tune up limited(dBm) |
|---------------|-----------------|---------------------------|----------------------|
| GFSK | 2402 | 6.04 | 6.0±1 |
| | 2441 | 6.86 | 6.0±1 |
| | 2480 | 6.94 | 6.0±1 |
| $\pi/4$ DQPSK | 2402 | 5.88 | 6.0±1 |
| | 2441 | 5.80 | 6.0±1 |
| | 2480 | 6.20 | 6.0±1 |
| 8DPSK | 2402 | 6.09 | 6.0±1 |
| | 2441 | 6.29 | 6.0±1 |
| | 2480 | 6.34 | 6.0±1 |

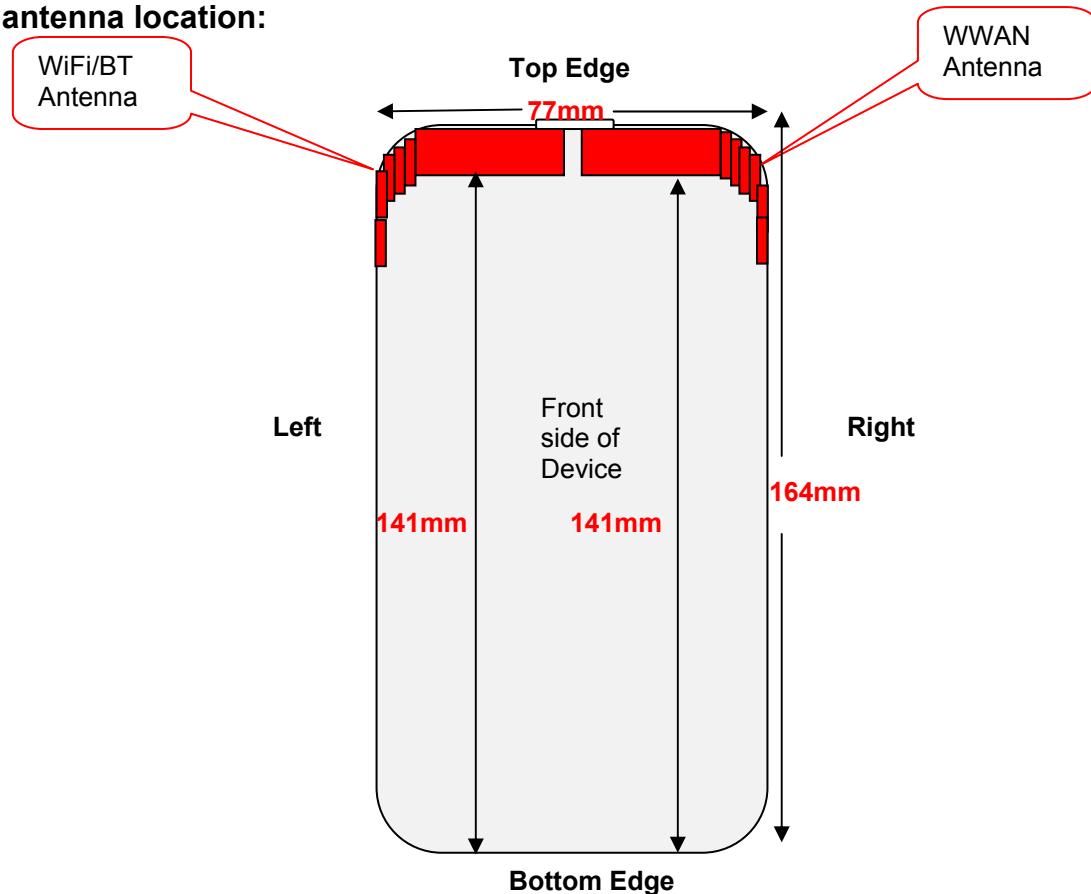
BLE Measurement Result

| Channel number | Frequency (MHz) | Average Output Power(dBm) | Tune up limited(dBm) |
|----------------|-----------------|---------------------------|----------------------|
| 0 | 2402 | -4.38 | -4.0±1 |
| 19 | 2440 | -3.58 | -4.0±1 |
| 39 | 2480 | -4.03 | -4.0±1 |

Note:5G WIFI Power tested results please refer to "INFINIX_WTS19X12089190W_X656_FCC SAR" test report.

12 Exposure Conditions Consideration

EUT antenna location:



Test position consideration:

| Distance of EUT antenna-to-edge/surface(mm), Test distance:10mm | | | | | | |
|--|-----------|------------|-----------|------------|----------|-------------|
| Antennas | Back side | Front side | Left Edge | Right Edge | Top Edge | Bottom Edge |
| WWAN | 2 | 7 | 37 | 1 | 1 | 141 |
| WLAN | 2 | 7 | 1 | 42.5 | 1 | 141 |
| Bluetooth | 2 | 7 | 1 | 42.5 | 1 | 141 |

| Test distance:10mm | | | | | | |
|--------------------|-----------|------------|-----------|------------|----------|-------------|
| Antennas | Back side | Front side | Left Edge | Right Edge | Top Edge | Bottom Edge |
| WWAN | YES | YES | NO | YES | YES | NO |
| WLAN | YES | YES | YES | NO | YES | NO |
| Bluetooth | NO | NO | NO | NO | NO | NO |

Note:

1. Head/Body SAR/Hotspot mode assessments are required.
2. Referring to KDB 941225 D06v02r01, when the overall device length and width are $\geq 9\text{cm} * 5\text{cm}$, the test distance is 10mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
3. Per KDB 447498 D01v06, for handsets the test separation distance is determined by the smallest distance between the outer surface of the device and the user, which is 0 mm for head SAR, 10 mm for body SAR.

RF Exposure

Mobile Phone -X656, FCC ID: 2AIZN-X656

Standard Requirement:

According to §15.247 (i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR},^{16} \text{ where}$$

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation¹⁷
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum *test separation distance* is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum *test separation distance* is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Routine SAR evaluation refers to that specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evaluation is not required, portable transmitters with output power greater than the applicable low threshold require SAR evaluation to qualify for TCB approval.

Exclusion Thresholds = $P\sqrt{F}/D$

P= Maximum turn-up power in mW

F= Channel frequency in GHz

D= Minimum test separation distance in mm

Test Distance (5mm)

| Mode | MAX Power (dBm) | Tune Up Power (dBm) | Max Tune Up Power (dBm) | Max Tune Up Power (mW) | Exclusion Thresholds | Limit |
|-----------|-----------------|---------------------|-------------------------|------------------------|----------------------|-------|
| 2.4G WIFI | 14.43 | 14.0±1 | 15 | 31.62 | 9.923 | 3 |
| Bluetooth | 6.94 | 6.0±1 | 7 | 5.01 | 1.578 | 3 |
| BLE | -3.58 | -4.0±1 | -3 | 0.50 | 0.156 | 3 |

Test Distance (10mm)

| Mode | MAX Power (dBm) | Tune Up Power (dBm) | Max Tune Up Power (dBm) | Max Tune Up Power (mW) | Exclusion Thresholds | Limit |
|-----------|-----------------|---------------------|-------------------------|------------------------|----------------------|-------|
| 2.4G WIFI | 14.43 | 14.0±1 | 15 | 31.62 | 4.961 | 3 |
| Bluetooth | 6.94 | 6.0±1 | 7 | 5.01 | 0.789 | 3 |
| BLE | -3.58 | -4.0±1 | -3 | 0.50 | 0.078 | 3 |

Result:2.4G WIFI SAR measurement is required.

Note:5G WIFI RF exposure assessment please refer to "INFINIX_WTS19X12089190W_X656_FCC SAR" test report.

13 SAR Test Results

Test Condition:

1. SAR Measurement

The distance between the EUT and the antenna of the emulator is more than 50 cm and the output power radiated from the emulator antenna is at least 30 dB less than the output power of EUT.

2 Environmental Conditions

| | |
|----------------------|----------|
| Temperature | 23°C |
| Relative Humidity | 57% |
| Atmospheric Pressure | 1019mbar |

3 Test Date : 2019-12-26~2020-01-08

Tested By : Andy Feng

Generally Test Procedures:

- Establish communication link between EUT and base station emulation by air link.
- Place the EUT in the selected test position. (Cheek, tilt or flat)
- Perform SAR testing at middle or highest output power channel under the selected test mode. If the measured 1-g SAR is $\leq 0.8 \text{ W/kg}$, then testing for the other channel will not be performed.
- When SAR is $<0.8\text{W/kg}$, no repeated SAR measurement is required

For WCDMA test:

- KDB941225 D01-Body SAR is not required for HSDPA when the average output of each RF channel with HSDPA active is less than 0.25dB higher than measured without HSDPA using 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is <75% of the SAR limit.
- KDB941225 D01-Body SAR is not required for handset with HSPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than 0.25dB higher than that measured without HSUPA/HSDPA using 12.2kbps RMC AND THE maximum SAR for 12.2kbps RMC is <75% of the SAR limit

For LTE test:

- According to FCC KDB 941225 D05v02r05:
 - Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - The required channel and offset combination with the highest maximum output power is required for SAR.
 - When the reported SAR is $\leq 0.8 \text{ W/kg}$, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - When the reported SAR for a required test channel is $> 1.45 \text{ W/kg}$, SAR is required for all RB offset configurations for that channel.
 - Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
 - Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is $< 0.8 \text{ W/kg}$.
 - Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $1/2 \text{ dB}$ higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is $< 1.45 \text{ W/kg}$.
 - A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

SAR Summary Test Result:**Table 5: SAR Values of GSM 850MHz Band**

| Test Positions | | Channel | | Test Mode | Power(dBm) | | SAR 1g(W/Kg), Limit(1.6W/kg) | | Plot No. |
|-----------------------------|------------|---------|-------|--------------|----------------------------|----------------------------|------------------------------|---------------------|----------|
| | | CH. | MHz | | Maximum Turn-up Power(dBm) | Measured output power(dBm) | Measured SAR 1g(W/kg) | Scaled SAR 1g(W/kg) | |
| Right Head | Cheek | 190 | 836.6 | Voice call | 33 | 32.90 | 0.099 | 0.10 | -- |
| | Tilt | 190 | 836.6 | Voice call | 33 | 32.90 | 0.074 | 0.08 | -- |
| Left Head | Cheek | 190 | 836.6 | Voice call | 33 | 32.90 | 0.126 | 0.13 | -- |
| | Tilt | 190 | 836.6 | Voice call | 33 | 32.90 | 0.110 | 0.12 | -- |
| Right Head | Cheek | 190 | 836.6 | GPRS 4 slots | 31 | 30.38 | 0.086 | 0.10 | -- |
| | Tilt | 190 | 836.6 | GPRS 4 slots | 31 | 30.38 | 0.074 | 0.09 | -- |
| Left Head | Cheek | 190 | 836.6 | GPRS 4 slots | 31 | 30.38 | 0.205 | 0.24 | 1 |
| | Tilt | 190 | 836.6 | GPRS 4 slots | 31 | 30.38 | 0.159 | 0.18 | -- |
| Body-worn (10mm Separation) | Front Side | 190 | 836.6 | GPRS 4 slots | 31 | 30.38 | 0.059 | 0.07 | -- |
| | Back Side | 190 | 836.6 | GPRS 4 slots | 31 | 30.38 | 0.214 | 0.25 | 2 |
| Hotspot (10mm Separation) | Front Side | 190 | 836.6 | GPRS 4 slots | 31 | 30.38 | 0.059 | 0.07 | -- |
| | Back Side | 190 | 836.6 | GPRS 4 slots | 31 | 30.38 | 0.214 | 0.25 | 2 |
| | Left Edge | 190 | 836.6 | GPRS 4 slots | 31 | 30.38 | 0.114 | 0.13 | -- |
| | Top Edge | 190 | 836.6 | GPRS 4 slots | 31 | 30.38 | 0.205 | 0.24 | -- |

Table 6: SAR Values of GSM 1900MHz Band

| Test Positions | | Channel | | Test Mode | Power(dBm) | | SAR 1g(W/Kg), Limit(1.6W/kg) | | Plot No. |
|-----------------------------|------------|---------|------|--------------|----------------------------|----------------------------|------------------------------|---------------------|----------|
| | | CH. | MHz | | Maximum Turn-up Power(dBm) | Measured output power(dBm) | Measured SAR 1g(W/kg) | Scaled SAR 1g(W/kg) | |
| Right Head | Cheek | 661 | 1880 | Voice call | 30 | 29.62 | 0.192 | 0.21 | -- |
| | Tilt | 661 | 1880 | Voice call | 30 | 29.62 | 0.145 | 0.16 | -- |
| Left Head | Cheek | 661 | 1880 | Voice call | 30 | 29.62 | 0.392 | 0.43 | -- |
| | Tilt | 661 | 1880 | Voice call | 30 | 29.62 | 0.288 | 0.31 | -- |
| Right Head | Cheek | 661 | 1880 | GPRS 4 slots | 28 | 27.14 | 0.394 | 0.48 | -- |
| | Tilt | 661 | 1880 | GPRS 4 slots | 28 | 27.14 | 0.301 | 0.37 | -- |
| Left Head | Cheek | 661 | 1880 | GPRS 4 slots | 28 | 27.14 | 0.785 | 0.96 | 3 |
| | Tilt | 661 | 1880 | GPRS 4 slots | 28 | 27.14 | 0.414 | 0.50 | -- |
| Body-worn (10mm Separation) | Front Side | 661 | 1880 | GPRS 4 slots | 28 | 27.14 | 0.144 | 0.18 | -- |
| | Back Side | 661 | 1880 | GPRS 4 slots | 28 | 27.14 | 0.241 | 0.29 | 4 |
| Hotspot (10mm Separation) | Front Side | 661 | 1880 | GPRS 4 slots | 28 | 27.14 | 0.144 | 0.18 | -- |
| | Back Side | 661 | 1880 | GPRS 4 slots | 28 | 27.14 | 0.241 | 0.29 | -- |
| | Left Edge | 661 | 1880 | GPRS 4 slots | 28 | 27.14 | 0.159 | 0.19 | -- |
| | Top Edge | 661 | 1880 | GPRS 4 slots | 28 | 27.14 | 0.298 | 0.36 | 5 |

Table 7: SAR Values of WCDMA BAND V

| Test Positions | | Channel | | Test Mode | Power(dBm) | | SAR 1g(W/Kg), Limit(1.6W/kg) | | Plot No. |
|-----------------------------|------------|---------|-------|--------------|----------------------------|----------------------------|------------------------------|---------------------|----------|
| | | CH. | MHz | | Maximum Turn-up Power(dBm) | Measured output power(dBm) | Measured SAR 1g(W/kg) | Scaled SAR 1g(W/kg) | |
| Right Head | Cheek | 4183 | 836.6 | RMC 12.2kbps | 23 | 22.83 | 0.141 | 0.15 | -- |
| | Tilt | 4183 | 836.6 | RMC 12.2kbps | 23 | 22.83 | 0.125 | 0.13 | -- |
| Left Head | Cheek | 4183 | 836.6 | RMC 12.2kbps | 23 | 22.83 | 0.219 | 0.23 | 6 |
| | Tilt | 4183 | 836.6 | RMC 12.2kbps | 23 | 22.83 | 0.201 | 0.21 | -- |
| Body-worn (10mm Separation) | Front Side | 4183 | 836.6 | RMC 12.2kbps | 23 | 22.83 | 0.047 | 0.05 | -- |
| | Back Side | 4183 | 836.6 | RMC 12.2kbps | 23 | 22.83 | 0.107 | 0.11 | 7 |
| Hotspot (10mm Separation) | Front Side | 4183 | 836.6 | RMC 12.2kbps | 23 | 22.83 | 0.047 | 0.05 | -- |
| | Back Side | 4183 | 836.6 | RMC 12.2kbps | 23 | 22.83 | 0.107 | 0.11 | 7 |
| | Left Edge | 4183 | 836.6 | RMC 12.2kbps | 23 | 22.83 | 0.024 | 0.02 | -- |
| | Top Edge | 4183 | 836.6 | RMC 12.2kbps | 23 | 22.83 | 0.059 | 0.06 | -- |

Table 8: SAR Values of WCDMA BAND II

| Test Positions | | Channel | | Test Mode | Power(dBm) | | SAR 1g(W/Kg), Limit(1.6W/kg) | | Plot No. |
|-----------------------------|------------|---------|------|--------------|----------------------------|----------------------------|------------------------------|---------------------|-----------|
| | | CH. | MHz | | Maximum Turn-up Power(dBm) | Measured output power(dBm) | Measured SAR 1g(W/kg) | Scaled SAR 1g(W/kg) | |
| Right Head | Cheek | 9400 | 1880 | RMC 12.2kbps | 23 | 22.79 | 0.496 | 0.52 | -- |
| | Tilt | 9400 | 1880 | RMC 12.2kbps | 23 | 22.79 | 0.601 | 0.63 | -- |
| Left Head | Cheek | 9400 | 1880 | RMC 12.2kbps | 23 | 22.79 | 0.736 | 0.77 | 8 |
| | Tilt | 9400 | 1880 | RMC 12.2kbps | 23 | 22.79 | 0.714 | 0.75 | -- |
| Body-worn (10mm Separation) | Front Side | 9400 | 1880 | RMC 12.2kbps | 23 | 22.79 | 0.280 | 0.29 | -- |
| | Back Side | 9400 | 1880 | RMC 12.2kbps | 23 | 22.79 | 0.508 | 0.53 | 9 |
| Hotspot (10mm Separation) | Front Side | 9400 | 1880 | RMC 12.2kbps | 23 | 22.79 | 0.280 | 0.29 | -- |
| | Back Side | 9400 | 1880 | RMC 12.2kbps | 23 | 22.79 | 0.508 | 0.53 | -- |
| | Left Edge | 9400 | 1880 | RMC 12.2kbps | 23 | 22.79 | 0.411 | 0.43 | -- |
| | Top Edge | 9400 | 1880 | RMC 12.2kbps | 23 | 22.79 | 0.570 | 0.60 | 10 |

Table 9: SAR Values of WCDMA BAND IV

| Test Positions | | Channel | | Test Mode | Power(dBm) | | SAR 1g(W/Kg), Limit(1.6W/kg) | | Plot No. |
|-----------------------------|------------|---------|--------|--------------|----------------------------|----------------------------|------------------------------|---------------------|-----------|
| | | CH. | MHz | | Maximum Turn-up Power(dBm) | Measured output power(dBm) | Measured SAR 1g(W/kg) | Scaled SAR 1g(W/kg) | |
| Right Head | Cheek | 1413 | 1732.6 | RMC 12.2kbps | 23 | 22.74 | 0.516 | 0.55 | -- |
| | Tilt | 1413 | 1732.6 | RMC 12.2kbps | 23 | 22.74 | 0.733 | 0.78 | -- |
| Left Head | Cheek | 1312 | 1712.4 | RMC 12.2kbps | 23 | 22.70 | 1.002 | 1.07 | -- |
| | Cheek | 1413 | 1732.6 | RMC 12.2kbps | 23 | 22.74 | 1.080 | 1.15 | 11 |
| | Cheek | 1413 | 1732.6 | RMC 12.2kbps | 23 | 22.74 | 1.056 | 1.12 | -- |
| | Cheek | 1513 | 1752.6 | RMC 12.2kbps | 23 | 22.78 | 0.956 | 1.01 | -- |
| | Tilt | 1312 | 1712.4 | RMC 12.2kbps | 23 | 22.70 | 1.008 | 1.08 | -- |
| | Tilt | 1413 | 1732.6 | RMC 12.2kbps | 23 | 22.74 | 1.076 | 1.14 | -- |
| | Tilt | 1413 | 1732.6 | RMC 12.2kbps | 23 | 22.74 | 1.072 | 1.14 | -- |
| | Tilt | 1513 | 1752.6 | RMC 12.2kbps | 23 | 22.78 | 0.962 | 1.01 | -- |
| Body-worn (10mm Separation) | Front Side | 1413 | 1732.6 | RMC 12.2kbps | 23 | 22.74 | 0.415 | 0.44 | -- |
| | Back Side | 1413 | 1732.6 | RMC 12.2kbps | 23 | 22.74 | 0.644 | 0.68 | 12 |
| Hotspot (10mm Separation) | Front Side | 1413 | 1732.6 | RMC 12.2kbps | 23 | 22.74 | 0.415 | 0.44 | -- |
| | Back Side | 1413 | 1732.6 | RMC 12.2kbps | 23 | 22.74 | 0.644 | 0.68 | -- |
| | Left Edge | 1413 | 1732.6 | RMC 12.2kbps | 23 | 22.74 | 0.526 | 0.56 | -- |
| | Top Edge | 1413 | 1732.6 | RMC 12.2kbps | 23 | 22.74 | 0.770 | 0.82 | 13 |

Table 10: SAR Values of LTE BAND 2 , 20MHz ,QPSK

| Test Mode | Test Positions | | Channel | | Power(dBm) | | MPR (dB) | SAR 1g(W/Kg), Limit(1.6W/kg) | | Plot No. |
|-----------|-----------------------------|------------|---------|------|----------------------------|----------------------------|----------|------------------------------|---------------------|-----------|
| | | | CH. | MHz | Maximum Turn-up Power(dBm) | Measured output power(dBm) | | Measured SAR 1g(W/kg) | Scaled SAR 1g(W/kg) | |
| 1RB #49 | Right Head | Cheek | 18900 | 1880 | 22 | 21.99 | 0 | 0.462 | 0.46 | -- |
| | | Tilt | 18900 | 1880 | 22 | 21.99 | 0 | 0.568 | 0.57 | -- |
| | Left Head | Cheek | 18700 | 1860 | 22 | 21.92 | 0 | 0.784 | 0.80 | -- |
| | | Cheek | 18900 | 1880 | 22 | 21.99 | 0 | 0.826 | 0.83 | -- |
| | | Cheek | 18900 | 1880 | 22 | 21.99 | 0 | 0.814 | 0.82 | -- |
| | | Cheek | 19100 | 1900 | 22 | 21.91 | 0 | 0.810 | 0.83 | -- |
| | | Tilt | 18700 | 1860 | 22 | 21.92 | 0 | 0.885 | 0.90 | -- |
| | | Tilt | 18900 | 1880 | 22 | 21.99 | 0 | 0.910 | 0.91 | -- |
| | | Tilt | 18900 | 1880 | 22 | 21.99 | 0 | 0.907 | 0.91 | -- |
| | | Tilt | 19100 | 1900 | 22 | 21.91 | 0 | 0.901 | 0.92 | 14 |
| | Body-worn (10mm Separation) | Front Side | 18900 | 1880 | 22 | 21.99 | 0 | 0.278 | 0.28 | -- |
| | | Back Side | 18900 | 1880 | 22 | 21.99 | 0 | 0.431 | 0.43 | 15 |
| | Hotspot (10mm Separation) | Front Side | 18900 | 1880 | 22 | 21.99 | 0 | 0.278 | 0.28 | -- |
| | | Back Side | 18900 | 1880 | 22 | 21.99 | 0 | 0.431 | 0.43 | -- |
| | | Left Edge | 18900 | 1880 | 22 | 21.99 | 0 | 0.256 | 0.26 | -- |
| | | Top Edge | 18900 | 1880 | 22 | 21.99 | 0 | 0.564 | 0.57 | 16 |
| 50%RB #24 | Right Head | Cheek | 18900 | 1880 | 21 | 20.95 | 1 | 0.401 | 0.41 | -- |
| | | Tilt | 18900 | 1880 | 21 | 20.95 | 1 | 0.504 | 0.51 | -- |
| | Left Head | Cheek | 18900 | 1880 | 21 | 20.95 | 1 | 0.701 | 0.71 | -- |
| | | Tilt | 18900 | 1880 | 21 | 20.95 | 1 | 0.765 | 0.77 | -- |
| | Body-worn (10mm Separation) | Front Side | 18900 | 1880 | 21 | 20.95 | 1 | 0.215 | 0.22 | -- |
| | | Back Side | 18900 | 1880 | 21 | 20.95 | 1 | 0.369 | 0.37 | -- |
| | Hotspot (10mm Separation) | Front Side | 18900 | 1880 | 21 | 20.95 | 1 | 0.215 | 0.22 | -- |
| | | Back Side | 18900 | 1880 | 21 | 20.95 | 1 | 0.369 | 0.37 | -- |
| | | Left Edge | 18900 | 1880 | 21 | 20.95 | 1 | 0.203 | 0.21 | -- |
| | | Top Edge | 18900 | 1880 | 21 | 20.95 | 1 | 0.497 | 0.50 | -- |

Table 11: SAR Values of LTE BAND 4, 20MHz ,QPSK

| Test Mode | Test Positions | | Channel | | Power(dBm) | | MPR (dB) | SAR 1g(W/Kg), Limit(1.6W/kg) | | Plot No. |
|-----------|-----------------------------|------------|---------|--------|----------------------------|----------------------------|----------|------------------------------|---------------------|-----------|
| | | | CH. | MHz | Maximum Turn-up Power(dBm) | Measured output power(dBm) | | Measured SAR 1g(W/kg) | Scaled SAR 1g(W/kg) | |
| 1RB #49 | Right Head | Cheek | 20175 | 1732.5 | 22 | 21.98 | 0 | 0.554 | 0.56 | -- |
| | | Tilt | 20175 | 1732.5 | 22 | 21.98 | 0 | 0.647 | 0.65 | -- |
| | Left Head | Cheek | 20050 | 1720.0 | 22 | 21.96 | 0 | 0.802 | 0.81 | -- |
| | | Cheek | 20175 | 1732.5 | 22 | 21.98 | 0 | 0.872 | 0.88 | -- |
| | | Cheek | 20175 | 1732.5 | 22 | 21.98 | 0 | 0.870 | 0.87 | -- |
| | | Cheek | 20300 | 1745.0 | 22 | 21.97 | 0 | 0.811 | 0.82 | -- |
| | | Tilt | 20050 | 1720.0 | 22 | 21.96 | 0 | 0.921 | 0.93 | -- |
| | | Tilt | 20175 | 1732.5 | 22 | 21.98 | 0 | 1.096 | 1.10 | 17 |
| | | Tilt | 20175 | 1732.5 | 22 | 21.98 | 0 | 1.094 | 1.10 | -- |
| | | Tilt | 20300 | 1745.0 | 22 | 21.97 | 0 | 1.004 | 1.01 | -- |
| | Body-worn (10mm Separation) | Front Side | 20175 | 1732.5 | 22 | 21.98 | 0 | 0.459 | 0.46 | -- |
| | | Back Side | 20175 | 1732.5 | 22 | 21.98 | 0 | 0.681 | 0.68 | 18 |
| | Hotspot (10mm Separation) | Front Side | 20175 | 1732.5 | 22 | 21.98 | 0 | 0.459 | 0.46 | -- |
| | | Back Side | 20175 | 1732.5 | 22 | 21.98 | 0 | 0.681 | 0.68 | -- |
| | | Left Edge | 20175 | 1732.5 | 22 | 21.98 | 0 | 0.521 | 0.52 | -- |
| | | Top Edge | 20175 | 1732.5 | 22 | 21.98 | 0 | 0.791 | 0.79 | 19 |
| 50%RB #24 | Right Head | Cheek | 20175 | 1732.5 | 21 | 20.69 | 1 | 0.502 | 0.54 | -- |
| | | Tilt | 20175 | 1732.5 | 21 | 20.69 | 1 | 0.608 | 0.65 | -- |
| | Left Head | Cheek | 20175 | 1732.5 | 21 | 20.69 | 1 | 0.741 | 0.80 | -- |
| | | Tilt | 20050 | 1720.0 | 21 | 20.63 | 1 | 0.897 | 0.98 | -- |
| | | Tilt | 20175 | 1732.5 | 21 | 20.69 | 1 | 0.916 | 0.98 | -- |
| | | Tilt | 20175 | 1732.5 | 21 | 20.69 | 1 | 0.919 | 0.99 | -- |
| | | Tilt | 20300 | 1745.0 | 21 | 20.63 | 1 | 0.900 | 0.98 | -- |
| | | Front Side | 20175 | 1732.5 | 21 | 20.69 | 1 | 0.412 | 0.44 | -- |
| | Body-worn (10mm Separation) | Back Side | 20175 | 1732.5 | 21 | 20.69 | 1 | 0.556 | 0.60 | -- |
| | | Front Side | 20175 | 1732.5 | 21 | 20.69 | 1 | 0.412 | 0.44 | -- |
| | Hotspot (10mm Separation) | Back Side | 20175 | 1732.5 | 21 | 20.69 | 1 | 0.556 | 0.60 | -- |
| | | Left Edge | 20175 | 1732.5 | 21 | 20.69 | 1 | 0.489 | 0.53 | -- |
| | | Top Edge | 20175 | 1732.5 | 21 | 20.69 | 1 | 0.701 | 0.75 | -- |

Table 12: SAR Values of LTE BAND 5 , 20MHz ,QPSK

| Test Mode | Test Positions | | Channel | | Power(dBm) | | MPR (dB) | SAR 1g(W/Kg), Limit(1.6W/kg) | | Plot No. |
|-----------|-----------------------------|------------|---------|-------|----------------------------|----------------------------|----------|------------------------------|---------------------|-----------|
| | | | CH. | MHz | Maximum Turn-up Power(dBm) | Measured output power(dBm) | | Measured SAR 1g(W/kg) | Scaled SAR 1g(W/kg) | |
| 1RB #49 | Right Head | Cheek | 20525 | 836.5 | 23 | 22.92 | 0 | 0.089 | 0.09 | -- |
| | | Tilt | 20525 | 836.5 | 23 | 22.92 | 0 | 0.074 | 0.08 | -- |
| | Left Head | Cheek | 20525 | 836.5 | 23 | 22.92 | 0 | 0.130 | 0.13 | 20 |
| | | Tilt | 20525 | 836.5 | 23 | 22.92 | 0 | 0.112 | 0.11 | -- |
| | Body-worn (10mm Separation) | Front Side | 20525 | 836.5 | 23 | 22.92 | 0 | 0.048 | 0.05 | -- |
| | | Back Side | 20525 | 836.5 | 23 | 22.92 | 0 | 0.085 | 0.09 | 21 |
| | Hotspot (10mm Separation) | Front Side | 20525 | 836.5 | 23 | 22.92 | 0 | 0.048 | 0.05 | -- |
| | | Back Side | 20525 | 836.5 | 23 | 22.92 | 0 | 0.085 | 0.09 | 21 |
| | | Left Edge | 20525 | 836.5 | 23 | 22.92 | 0 | 0.056 | 0.06 | -- |
| | | Top Edge | 20525 | 836.5 | 23 | 22.92 | 0 | 0.054 | 0.06 | -- |
| 50%RB #24 | Right Head | Cheek | 20525 | 836.5 | 22 | 21.37 | 1 | 0.070 | 0.08 | -- |
| | | Tilt | 20525 | 836.5 | 22 | 21.37 | 1 | 0.056 | 0.06 | -- |
| | Left Head | Cheek | 20525 | 836.5 | 22 | 21.37 | 1 | 0.101 | 0.12 | -- |
| | | Tilt | 20525 | 836.5 | 22 | 21.37 | 1 | 0.099 | 0.11 | -- |
| | Body-worn (10mm Separation) | Front Side | 20525 | 836.5 | 22 | 21.37 | 1 | 0.036 | 0.04 | -- |
| | | Back Side | 20525 | 836.5 | 22 | 21.37 | 1 | 0.070 | 0.08 | -- |
| | Hotspot (10mm Separation) | Front Side | 20525 | 836.5 | 22 | 21.37 | 1 | 0.036 | 0.04 | -- |
| | | Back Side | 20525 | 836.5 | 22 | 21.37 | 1 | 0.070 | 0.08 | -- |
| | | Left Edge | 20525 | 836.5 | 22 | 21.37 | 1 | 0.041 | 0.05 | -- |
| | | Top Edge | 20525 | 836.5 | 22 | 21.37 | 1 | 0.040 | 0.05 | -- |

Table 13: SAR Values of LTE BAND 7 , 20MHz ,QPSK

| Test Mode | Test Positions | | Channel | | Power(dBm) | | MPR (dB) | SAR 1g(W/Kg), Limit(1.6W/kg) | | Plot No. |
|-----------|-----------------------------|------------|---------|------|----------------------------|----------------------------|----------|------------------------------|---------------------|----------|
| | | | CH. | MHz | Maximum Turn-up Power(dBm) | Measured output power(dBm) | | Measured SAR 1g(W/kg) | Scaled SAR 1g(W/kg) | |
| 1RB #49 | Right Head | Cheek | 21100 | 2535 | 22 | 21.95 | 0 | 0.166 | 0.17 | -- |
| | | Tilt | 21100 | 2535 | 22 | 21.95 | 0 | 0.132 | 0.13 | -- |
| | Left Head | Cheek | 21100 | 2535 | 22 | 21.95 | 0 | 0.339 | 0.34 | 22 |
| | | Tilt | 21100 | 2535 | 22 | 21.95 | 0 | 0.287 | 0.29 | -- |
| | Body-worn (10mm Separation) | Front Side | 21100 | 2535 | 22 | 21.95 | 0 | 0.067 | 0.07 | -- |
| | | Back Side | 21100 | 2535 | 22 | 21.95 | 0 | 0.159 | 0.16 | 23 |
| | Hotspot (10mm Separation) | Front Side | 21100 | 2535 | 22 | 21.95 | 0 | 0.067 | 0.07 | -- |
| | | Back Side | 21100 | 2535 | 22 | 21.95 | 0 | 0.159 | 0.16 | 23 |
| | | Left Edge | 21100 | 2535 | 22 | 21.95 | 0 | 0.114 | 0.12 | -- |
| | | Top Edge | 21100 | 2535 | 22 | 21.95 | 0 | 0.106 | 0.11 | -- |
| 50%RB #24 | Right Head | Cheek | 21100 | 2535 | 21 | 20.45 | 1 | 0.145 | 0.16 | -- |
| | | Tilt | 21100 | 2535 | 21 | 20.45 | 1 | 0.121 | 0.14 | -- |
| | Left Head | Cheek | 21100 | 2535 | 21 | 20.45 | 1 | 0.301 | 0.34 | -- |
| | | Tilt | 21100 | 2535 | 21 | 20.45 | 1 | 0.256 | 0.29 | -- |
| | Body-worn (10mm Separation) | Front Side | 21100 | 2535 | 21 | 20.45 | 1 | 0.052 | 0.06 | -- |
| | | Back Side | 21100 | 2535 | 21 | 20.45 | 1 | 0.141 | 0.16 | -- |
| | Hotspot (10mm Separation) | Front Side | 21100 | 2535 | 21 | 20.45 | 1 | 0.052 | 0.06 | -- |
| | | Back Side | 21100 | 2535 | 21 | 20.45 | 1 | 0.141 | 0.16 | -- |
| | | Left Edge | 21100 | 2535 | 21 | 20.45 | 1 | 0.102 | 0.12 | -- |
| | | Top Edge | 21100 | 2535 | 21 | 20.45 | 1 | 0.087 | 0.10 | -- |

Table 14: SAR Values of 2.4G WIFI

| Test Positions | | Channel | | Test Mode | Power(dBm) | | SAR 1g(W/Kg), Limit(1.6W/kg) | | Plot No. |
|-----------------------------|------------|---------|------|-----------|----------------------------|----------------------------|------------------------------|---------------------|-----------|
| | | CH. | MHz | | Maximum Turn-up Power(dBm) | Measured output power(dBm) | Measured SAR 1g(W/kg) | Scaled SAR 1g(W/kg) | |
| Right Head | Cheek | High | 2462 | DSSS | 14 | 13.87 | 0.374 | 0.39 | -- |
| | Tilt | High | 2462 | DSSS | 14 | 13.87 | 0.591 | 0.61 | 24 |
| Left Head | Cheek | High | 2462 | DSSS | 14 | 13.87 | 0.211 | 0.22 | -- |
| | Tilt | High | 2462 | DSSS | 14 | 13.87 | 0.301 | 0.31 | -- |
| Body-worn (10mm Separation) | Front Side | High | 2462 | DSSS | 14 | 13.87 | 0.192 | 0.20 | -- |
| | Back Side | High | 2462 | DSSS | 14 | 13.87 | 0.616 | 0.63 | 25 |
| Hotspot (10mm Separation) | Front Side | High | 2462 | DSSS | 14 | 13.87 | 0.192 | 0.20 | -- |
| | Back Side | High | 2462 | DSSS | 14 | 13.87 | 0.616 | 0.63 | 25 |
| | Right Edge | High | 2462 | DSSS | 14 | 13.87 | 0.410 | 0.42 | -- |
| | Top Edge | High | 2462 | DSSS | 14 | 13.87 | 0.511 | 0.53 | -- |

Note: 1.According to KDB 648474-D04 Handset SAR v01r03 section 1.5,the diagonal dimension of this device is > 16.0 cm,but the hotspot mode 1-g reported SAR is **0.63** W <1.2 W ,so the 10-g extremity SAR is not required.

2.5G WIFI SAR tested results please refer to "INFINIX_WTS19X12089190W_X656_FCC SAR" test report.

Measurement variability consideration

Refer to FCC KDB 248227 section 5.2.1~5.2.2:

802.11b DSSS SAR Test Requirements:

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure.

SAR test reduction is determined according to the following:

1) When the reported SAR of the highest measured maximum output power channel (section 3.1) for the exposure configuration is $\leq 0.8 \text{ W/kg}$,

no further SAR testing is required for 802.11b DSSS in that exposure configuration.

2) When the reported SAR is $> 0.8 \text{ W/kg}$, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is $> 1.2 \text{ W/kg}$,

SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3).

SAR is not required for the following 2.4 GHz OFDM conditions.

1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.

2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2 \text{ W/kg}$.

Note: 802.11b DSSS SAR test is required. The highest reported SAR for DSSS* the ratio of OFDM to DSSS (Max output power) is $0.63 \times 1.138 = 0.72 \text{ W/Kg} < 1.2 \text{ W/Kg}$. so the OFDM SAR test is not required.

According to KDB 865664 D01v01r04 section 2.8.1, repeated measurements are required following the procedures as below:

Repeated measurement is not required when the original highest measured SAR is $< 0.80 \text{ W/kg}$; steps 2) through 4) do not apply.

When the original highest measured SAR is $\geq 0.80 \text{ W/kg}$, repeat that measurement once.

Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is $\geq 1.45 \text{ W/kg}$ ($\sim 10\%$ from the 1-g SAR limit).

Perform a third repeated measurement only if the original, first or second repeated measurement is $\geq 1.5 \text{ W/kg}$ and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Repeated SAR:

| Band | Position | Channel | Mode | measured SAR(W/kg) | | | | |
|------------|------------|---------|-------|---------------------|--------------|-------|--------------|-------|
| | | | | Original | 1st Repeated | | 2nd Repeated | |
| | | | | | Value | Ratio | Value | Ratio |
| WCDMA1700 | Left Cheek | 1413 | RMC | 1.080 | 1.056 | 1.023 | NA | NA |
| WCDMA1700 | Left Tilt | 1413 | RMC | 1.076 | 1.072 | 1.004 | NA | NA |
| LTE Band 2 | Left Cheek | 18900 | 1RB | 0.826 | 0.814 | 1.015 | NA | NA |
| LTE Band 2 | Left Tilt | 18900 | 1RB | 0.910 | 0.907 | 1.003 | NA | NA |
| LTE Band 4 | Left Cheek | 20175 | 1RB | 0.872 | 0.870 | 1.002 | NA | NA |
| LTE Band 4 | Left Tilt | 20175 | 1RB | 1.096 | 1.094 | 1.002 | NA | NA |
| LTE Band 4 | Left Tilt | 20175 | 50%RB | 0.919 | 0.916 | 1.003 | NA | NA |

Simultaneous Transmission SAR Analysis.

List of Mode for Simultaneous Multi-band Transmission:

| No. | Configurations | Head SAR | Body-worn SAR | Hotspot SAR |
|-----|-----------------------------------|----------|---------------|-------------|
| 1 | GSM(Voice) + WLAN 2.4GHz(Data) | Yes | - | - |
| 2 | GRPS (Data) + WLAN 2.4GHz(Data) | Yes | Yes | Yes |
| 3 | GSM(Voice) + Bluetooth(Data) | Yes | - | - |
| 4 | GRPS (Data) + Bluetooth(Data) | Yes | Yes | Yes |
| 5 | WCDMA (Voice) + WLAN 2.4GHz(Data) | Yes | - | - |
| 6 | WCDMA (Data) + WLAN 2.4GHz(Data) | - | Yes | Yes |
| 7 | WCDMA (Voice) + Bluetooth(Data) | Yes | - | - |
| 8 | WCDMA (Data) + Bluetooth(Data) | - | Yes | Yes |
| 9 | LTE (Date) + WLAN 2.4GHz(Data) | Yes | Yes | Yes |
| 10 | LTE (Date) + Bluetooth(Data) | Yes | Yes | Yes |

Remark:

1. GSM/ WCDMA/LTE share the same antenna, and cannot transmit simultaneously.
 2. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
 3. According to the KDB 447498 D01 v06, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x]$$
 W/kg for test separation distances ≤ 50 mm;
 where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01 v06 as below:

Bluetooth:

| Tune-Up Power (dBm) | Max. Power (mW) | Distance (mm) | Frequency (GHz) | X | SAR(1g) 5mm | SAR(1g) 10mm |
|---------------------|-----------------|---------------|-----------------|-----|-------------|--------------|
| 7.0 | 5.01 | 5/10 | 2.480 | 7.5 | 0.21 | 0.11 |

5. The maximum SAR summation is calculated based on the same configuration and test position

**Head SAR Simultaneous
WWAN and 2.4G WIFI**

| Position | WWAN (maximum) | | 2.4G WIFI(0mm) | Summed SAR (W/kg) |
|-------------|-----------------|----------------------|----------------------|----------------------|
| | Band | Scaled SAR (W/kg) | Scaled SAR (W/kg) | |
| Right Cheek | GSM850 | 0.10 | 0.39 | 0.49 |
| Right Tilt | GPRS850 | 0.09 | 0.61 | 0.70 |
| Left Cheek | GSM850 | 0.24 | 0.22 | 0.46 |
| Left Tilt | GSM850 | 0.18 | 0.31 | 0.49 |
| Right Cheek | GPRS1900 | 0.48 | 0.39 | 0.87 |
| Right Tilt | GPRS1900 | 0.37 | 0.61 | 0.98 |
| Left Cheek | GPRS1900 | 0.96 | 0.22 | 1.18 |
| Left Tilt | GPRS1900 | 0.50 | 0.31 | 0.81 |
| Right Cheek | WCDMA Band V | 0.15 | 0.39 | 0.54 |
| Right Tilt | WCDMA Band V | 0.13 | 0.61 | 0.74 |
| Left Cheek | WCDMA Band V | 0.23 | 0.22 | 0.45 |
| Left Tilt | WCDMA Band V | 0.21 | 0.31 | 0.52 |
| Right Cheek | WCDMA Band II | 0.52 | 0.39 | 0.91 |
| Right Tilt | WCDMA Band II | 0.63 | 0.61 | 1.24 |
| Left Cheek | WCDMA Band II | 0.77 | 0.22 | 0.99 |
| Left Tilt | WCDMA Band II | 0.75 | 0.31 | 1.06 |
| Right Cheek | WCDMA Band IV | 0.55 | 0.39 | 0.94 |
| Right Tilt | WCDMA Band IV | 0.78 | 0.61 | 1.39 |
| Left Cheek | WCDMA Band IV | 1.15 | 0.22 | 1.37 |
| Left Tilt | WCDMA Band IV | 1.14 | 0.31 | 1.45 |
| Right Cheek | LTE BAND 2(1RB) | 0.46 | 0.39 | 0.85 |
| Right Tilt | LTE BAND 2(1RB) | 0.57 | 0.61 | 1.18 |
| Left Cheek | LTE BAND 2(1RB) | 0.83 | 0.22 | 1.05 |
| Left Tilt | LTE BAND 2(1RB) | 0.92 | 0.31 | 1.23 |
| Right Cheek | LTE BAND 4(1RB) | 0.56 | 0.39 | 0.95 |
| Right Tilt | LTE BAND 4(1RB) | 0.65 | 0.61 | 1.26 |
| Left Cheek | LTE BAND 4(1RB) | 0.88 | 0.22 | 1.10 |
| Left Tilt | LTE BAND 4(1RB) | 1.10 | 0.31 | 1.41 |
| Right Cheek | LTE BAND 5(1RB) | 0.09 | 0.39 | 0.48 |
| Right Tilt | LTE BAND 5(1RB) | 0.08 | 0.61 | 0.69 |
| Left Cheek | LTE BAND 5(1RB) | 0.13 | 0.22 | 0.35 |
| Left Tilt | LTE BAND 5(1RB) | 0.11 | 0.31 | 0.42 |
| Right Cheek | LTE BAND 7(1RB) | 0.17 | 0.39 | 0.56 |
| Right Tilt | LTE BAND 7(1RB) | 0.13 | 0.61 | 0.74 |
| Left Cheek | LTE BAND 7(1RB) | 0.34 | 0.22 | 0.56 |
| Left Tilt | LTE BAND 7(1RB) | 0.29 | 0.31 | 0.60 |

WWAN and 5G WIFI

| Position | WWAN (maximum) | | 5G WIFI(0mm) | Summed SAR (W/kg) |
|-------------|-----------------|----------------------|----------------------|----------------------|
| | Band | Scaled SAR (W/kg) | Scaled SAR (W/kg) | |
| Right Cheek | GSM850 | 0.10 | 0.81 | 0.91 |
| Right Tilt | GPRS850 | 0.09 | 0.49 | 0.58 |
| Left Cheek | GSM850 | 0.24 | 0.42 | 0.66 |
| Left Tilt | GSM850 | 0.18 | 0.25 | 0.43 |
| Right Cheek | GPRS1900 | 0.48 | 0.81 | 1.29 |
| Right Tilt | GPRS1900 | 0.37 | 0.49 | 0.86 |
| Left Cheek | GPRS1900 | 0.96 | 0.42 | 1.38 |
| Left Tilt | GPRS1900 | 0.50 | 0.25 | 0.75 |
| Right Cheek | WCDMA Band V | 0.15 | 0.81 | 0.96 |
| Right Tilt | WCDMA Band V | 0.13 | 0.49 | 0.62 |
| Left Cheek | WCDMA Band V | 0.23 | 0.42 | 0.65 |
| Left Tilt | WCDMA Band V | 0.21 | 0.25 | 0.46 |
| Right Cheek | WCDMA Band II | 0.52 | 0.81 | 1.33 |
| Right Tilt | WCDMA Band II | 0.63 | 0.49 | 1.12 |
| Left Cheek | WCDMA Band II | 0.77 | 0.42 | 1.19 |
| Left Tilt | WCDMA Band II | 0.75 | 0.25 | 1.00 |
| Right Cheek | WCDMA Band IV | 0.55 | 0.81 | 1.36 |
| Right Tilt | WCDMA Band IV | 0.78 | 0.49 | 1.27 |
| Left Cheek | WCDMA Band IV | 1.15 | 0.42 | 1.57 |
| Left Tilt | WCDMA Band IV | 1.14 | 0.25 | 1.39 |
| Right Cheek | LTE BAND 2(1RB) | 0.46 | 0.81 | 1.27 |
| Right Tilt | LTE BAND 2(1RB) | 0.57 | 0.49 | 1.06 |
| Left Cheek | LTE BAND 2(1RB) | 0.83 | 0.42 | 1.25 |
| Left Tilt | LTE BAND 2(1RB) | 0.92 | 0.25 | 1.17 |
| Right Cheek | LTE BAND 4(1RB) | 0.56 | 0.81 | 1.37 |
| Right Tilt | LTE BAND 4(1RB) | 0.65 | 0.49 | 1.14 |
| Left Cheek | LTE BAND 4(1RB) | 0.88 | 0.42 | 1.30 |
| Left Tilt | LTE BAND 4(1RB) | 1.10 | 0.25 | 1.35 |
| Right Cheek | LTE BAND 5(1RB) | 0.09 | 0.81 | 0.90 |
| Right Tilt | LTE BAND 5(1RB) | 0.08 | 0.49 | 0.57 |
| Left Cheek | LTE BAND 5(1RB) | 0.13 | 0.42 | 0.55 |
| Left Tilt | LTE BAND 5(1RB) | 0.11 | 0.25 | 0.36 |
| Right Cheek | LTE BAND 7(1RB) | 0.17 | 0.81 | 0.98 |
| Right Tilt | LTE BAND 7(1RB) | 0.13 | 0.49 | 0.62 |
| Left Cheek | LTE BAND 7(1RB) | 0.34 | 0.42 | 0.76 |
| Left Tilt | LTE BAND 7(1RB) | 0.29 | 0.25 | 0.54 |

WWAN and BT

| Position | WWAN (maximum) | | BT(0mm) | Summed SAR (W/kg) |
|------------|-----------------|----------------------|----------------------|----------------------|
| | Band | Scaled SAR (W/kg) | Scaled SAR (W/kg) | |
| Left Cheek | GSM850 | 0.24 | 0.21 | 0.45 |
| Left Cheek | GSM1900 | 0.96 | 0.21 | 1.17 |
| Left Cheek | WCDMA Band V | 0.23 | 0.21 | 0.44 |
| Left Cheek | WCDMA Band II | 0.77 | 0.21 | 0.98 |
| Left Cheek | WCDMA Band IV | 1.15 | 0.21 | 1.36 |
| Left Tilt | LTE BAND 2(1RB) | 0.92 | 0.21 | 1.13 |
| Left Tilt | LTE BAND 4(1RB) | 1.10 | 0.21 | 1.31 |
| Left Cheek | LTE BAND 5(1RB) | 0.13 | 0.21 | 0.34 |
| Left Cheek | LTE BAND 7(1RB) | 0.34 | 0.21 | 0.55 |

Remark: BT the 1g SAR value is not being captured by the measurement system, the 1g-SAR value is conservatively used for simultaneous transmission analysis.

**Body-worn SAR Simultaneous
WWAN and 2.4G WIFI**

| Position | WWAN (maximum) | | 2.4G WIFI(10mm) | Summed SAR (W/kg) |
|----------|-----------------|-------------------|-------------------|-------------------|
| | Band | Scaled SAR (W/kg) | Scaled SAR (W/kg) | |
| Front | GPRS850 | 0.07 | 0.20 | 0.27 |
| Back | | 0.25 | 0.63 | 0.88 |
| Front | GPRS1900 | 0.18 | 0.20 | 0.38 |
| Back | | 0.29 | 0.63 | 0.92 |
| Front | WCDMA Band V | 0.05 | 0.20 | 0.25 |
| Back | | 0.11 | 0.63 | 0.74 |
| Front | WCDMA Band II | 0.29 | 0.20 | 0.49 |
| Back | | 0.53 | 0.63 | 1.16 |
| Front | WCDMA Band IV | 0.44 | 0.20 | 0.64 |
| Back | | 0.68 | 0.63 | 1.31 |
| Front | LTE BAND 2(1RB) | 0.28 | 0.20 | 0.48 |
| Back | | 0.43 | 0.63 | 1.06 |
| Front | LTE BAND 4(1RB) | 0.46 | 0.20 | 0.66 |
| Back | | 0.68 | 0.63 | 1.31 |
| Front | LTE BAND 5(1RB) | 0.05 | 0.20 | 0.25 |
| Back | | 0.09 | 0.63 | 0.72 |
| Front | LTE BAND 7(1RB) | 0.07 | 0.20 | 0.27 |
| Back | | 0.16 | 0.63 | 0.79 |

WWAN and 5G WIFI

| Position | WWAN (maximum) | | 5G WIFI(10mm) | Summed SAR (W/kg) |
|----------|-----------------|-------------------|-------------------|-------------------|
| | Band | Scaled SAR (W/kg) | Scaled SAR (W/kg) | |
| Front | GPRS850 | 0.07 | 0.04 | 0.11 |
| Back | | 0.25 | 0.04 | 0.29 |
| Front | GPRS1900 | 0.18 | 0.04 | 0.22 |
| Back | | 0.29 | 0.04 | 0.33 |
| Front | WCDMA Band V | 0.05 | 0.04 | 0.09 |
| Back | | 0.11 | 0.04 | 0.15 |
| Front | WCDMA Band II | 0.29 | 0.04 | 0.33 |
| Back | | 0.53 | 0.04 | 0.57 |
| Front | WCDMA Band IV | 0.44 | 0.04 | 0.48 |
| Back | | 0.68 | 0.04 | 0.72 |
| Front | LTE BAND 2(1RB) | 0.28 | 0.04 | 0.32 |
| Back | | 0.43 | 0.04 | 0.47 |
| Front | LTE BAND 4(1RB) | 0.46 | 0.04 | 0.50 |
| Back | | 0.68 | 0.04 | 0.72 |
| Front | LTE BAND 5(1RB) | 0.05 | 0.04 | 0.09 |
| Back | | 0.09 | 0.04 | 0.13 |

| | | | | |
|-------|-----------------|------|------|------|
| Front | LTE BAND 7(1RB) | 0.07 | 0.04 | 0.11 |
| Back | | 0.16 | 0.04 | 0.20 |

WWAN and BT

| Position | WWAN (maximum) | | BT(10mm) Scaled SAR (W/kg) | Summed SAR (W/kg) |
|----------|-----------------|----------------------|----------------------------------|----------------------|
| | Band | Scaled SAR (W/kg) | | |
| Back | GPRS850 | 0.25 | 0.11 | 0.36 |
| Back | GPRS1900 | 0.29 | 0.11 | 0.40 |
| Back | WCDMA Band V | 0.11 | 0.11 | 0.22 |
| Back | WCDMA Band II | 0.53 | 0.11 | 0.64 |
| Back | WCDMA Band IV | 0.68 | 0.11 | 0.79 |
| Back | LTE BAND 2(1RB) | 0.43 | 0.11 | 0.54 |
| Back | LTE BAND 4(1RB) | 0.68 | 0.11 | 0.79 |
| Back | LTE BAND 5(1RB) | 0.09 | 0.11 | 0.20 |
| Back | LTE BAND 7(1RB) | 0.16 | 0.11 | 0.27 |

Remark: BT the 1g SAR value is not being captured by the measurement system, the 1g-SAR value is conservatively used for simultaneous transmission analysis.

**Hotspot SAR Simultaneous
WWAN and 2.4G WIFI**

| Position | WWAN (maximum) | | 2.4G WIFI(10mm) | Summed SAR (W/kg) |
|----------|-----------------|----------------------|----------------------|----------------------|
| | Band | Scaled SAR (W/kg) | Scaled SAR (W/kg) | |
| Front | GPRS850 | 0.07 | 0.20 | 0.27 |
| Back | | 0.25 | 0.63 | 0.88 |
| Right | | - | 0.42 | 0.42 |
| Left | | 0.13 | - | 0.13 |
| Top | | 0.24 | 0.53 | 0.77 |
| Bottom | | - | - | - |
| Front | GPRS1900 | 0.18 | 0.20 | 0.38 |
| Back | | 0.29 | 0.63 | 0.92 |
| Right | | - | 0.42 | 0.42 |
| Left | | 0.19 | - | 0.19 |
| Top | | 0.36 | 0.53 | 0.89 |
| Bottom | | - | - | - |
| Front | WCDMA Band V | 0.05 | 0.20 | 0.25 |
| Back | | 0.11 | 0.63 | 0.74 |
| Right | | - | 0.42 | 0.42 |
| Left | | 0.02 | - | 0.02 |
| Top | | 0.06 | 0.53 | 0.59 |
| Bottom | | - | - | - |
| Front | WCDMA Band II | 0.29 | 0.20 | 0.49 |
| Back | | 0.53 | 0.63 | 1.16 |
| Right | | - | 0.42 | 0.42 |
| Left | | 0.43 | - | 0.43 |
| Top | | 0.60 | 0.53 | 1.13 |
| Bottom | | - | - | - |
| Front | WCDMA Band IV | 0.44 | 0.20 | 0.64 |
| Back | | 0.68 | 0.63 | 1.31 |
| Right | | - | 0.42 | 0.42 |
| Left | | 0.56 | - | 0.56 |
| Top | | 0.82 | 0.53 | 1.35 |
| Bottom | | - | - | - |
| Front | LTE BAND 2(1RB) | 0.28 | 0.20 | 0.48 |
| Back | | 0.43 | 0.63 | 1.06 |
| Right | | - | 0.42 | 0.42 |
| Left | | 0.26 | - | 0.26 |
| Top | | 0.57 | 0.53 | 1.10 |
| Bottom | | - | - | - |
| Front | LTE BAND 4(1RB) | 0.46 | 0.20 | 0.66 |
| Back | | 0.68 | 0.63 | 1.31 |
| Right | | - | 0.42 | 0.42 |
| Left | | 0.52 | - | 0.52 |
| Top | | 0.79 | 0.53 | 1.32 |
| Bottom | | - | - | - |

| | | | | |
|--------|-----------------|------|------|------|
| Front | LTE BAND 5(1RB) | 0.05 | 0.20 | 0.25 |
| Back | | 0.09 | 0.63 | 0.72 |
| Right | | - | 0.42 | 0.42 |
| Left | | 0.06 | - | 0.06 |
| Top | | 0.06 | 0.53 | 0.59 |
| Bottom | | - | - | - |
| Front | LTE BAND 7(1RB) | 0.07 | 0.20 | 0.27 |
| Back | | 0.16 | 0.63 | 0.79 |
| Right | | - | 0.42 | 0.42 |
| Left | | 0.12 | - | 0.12 |
| Top | | 0.11 | 0.53 | 0.64 |
| Bottom | | - | - | - |

WWAN and 5G WIFI

| Position | WWAN (maximum) | | 5G WIFI(10mm) | Summed SAR (W/kg) |
|----------|-----------------|----------------------|----------------------|----------------------|
| | Band | Scaled SAR (W/kg) | Scaled SAR (W/kg) | |
| Front | GPRS850 | 0.07 | 0.04 | 0.11 |
| Back | | 0.25 | 0.04 | 0.29 |
| Right | | - | - | - |
| Left | | 0.13 | 0.10 | 0.23 |
| Top | | 0.24 | 0.03 | 0.27 |
| Bottom | | - | - | - |
| Front | GPRS1900 | 0.18 | 0.04 | 0.22 |
| Back | | 0.29 | 0.04 | 0.33 |
| Right | | - | - | - |
| Left | | 0.19 | 0.10 | 0.29 |
| Top | | 0.36 | 0.03 | 0.39 |
| Bottom | | - | - | - |
| Front | WCDMA Band V | 0.05 | 0.04 | 0.09 |
| Back | | 0.11 | 0.04 | 0.15 |
| Right | | - | - | - |
| Left | | 0.02 | 0.10 | 0.12 |
| Top | | 0.06 | 0.03 | 0.09 |
| Bottom | | - | - | - |
| Front | WCDMA Band II | 0.29 | 0.04 | 0.33 |
| Back | | 0.53 | 0.04 | 0.57 |
| Right | | - | - | - |
| Left | | 0.43 | 0.10 | 0.53 |
| Top | | 0.60 | 0.03 | 0.63 |
| Bottom | | - | - | - |
| Front | WCDMA Band IV | 0.44 | 0.04 | 0.48 |
| Back | | 0.68 | 0.04 | 0.72 |
| Right | | - | - | - |
| Left | | 0.56 | 0.10 | 0.66 |
| Top | | 0.82 | 0.03 | 0.85 |
| Bottom | | - | - | - |
| Front | LTE BAND 2(1RB) | 0.28 | 0.04 | 0.32 |
| Back | | 0.43 | 0.04 | 0.47 |

| | | | | |
|--------|-----------------|------|------|------|
| Right | | - | - | - |
| Left | | 0.26 | 0.10 | 0.36 |
| Top | | 0.57 | 0.03 | 0.60 |
| Bottom | | - | - | - |
| Front | LTE BAND 4(1RB) | 0.46 | 0.04 | 0.50 |
| Back | | 0.68 | 0.04 | 0.72 |
| Right | | - | - | - |
| Left | | 0.52 | 0.10 | 0.62 |
| Top | | 0.79 | 0.03 | 0.82 |
| Bottom | | - | - | - |
| Front | | 0.05 | 0.04 | 0.09 |
| Back | LTE BAND 5(1RB) | 0.09 | 0.04 | 0.13 |
| Right | | - | - | - |
| Left | | 0.06 | 0.10 | 0.16 |
| Top | | 0.06 | 0.03 | 0.09 |
| Bottom | | - | - | - |
| Front | | 0.07 | 0.04 | 0.11 |
| Back | LTE BAND 7(1RB) | 0.16 | 0.04 | 0.20 |
| Right | | - | - | - |
| Left | | 0.12 | 0.10 | 0.22 |
| Top | | 0.11 | 0.03 | 0.14 |
| Bottom | | - | - | - |

WWAN and BT

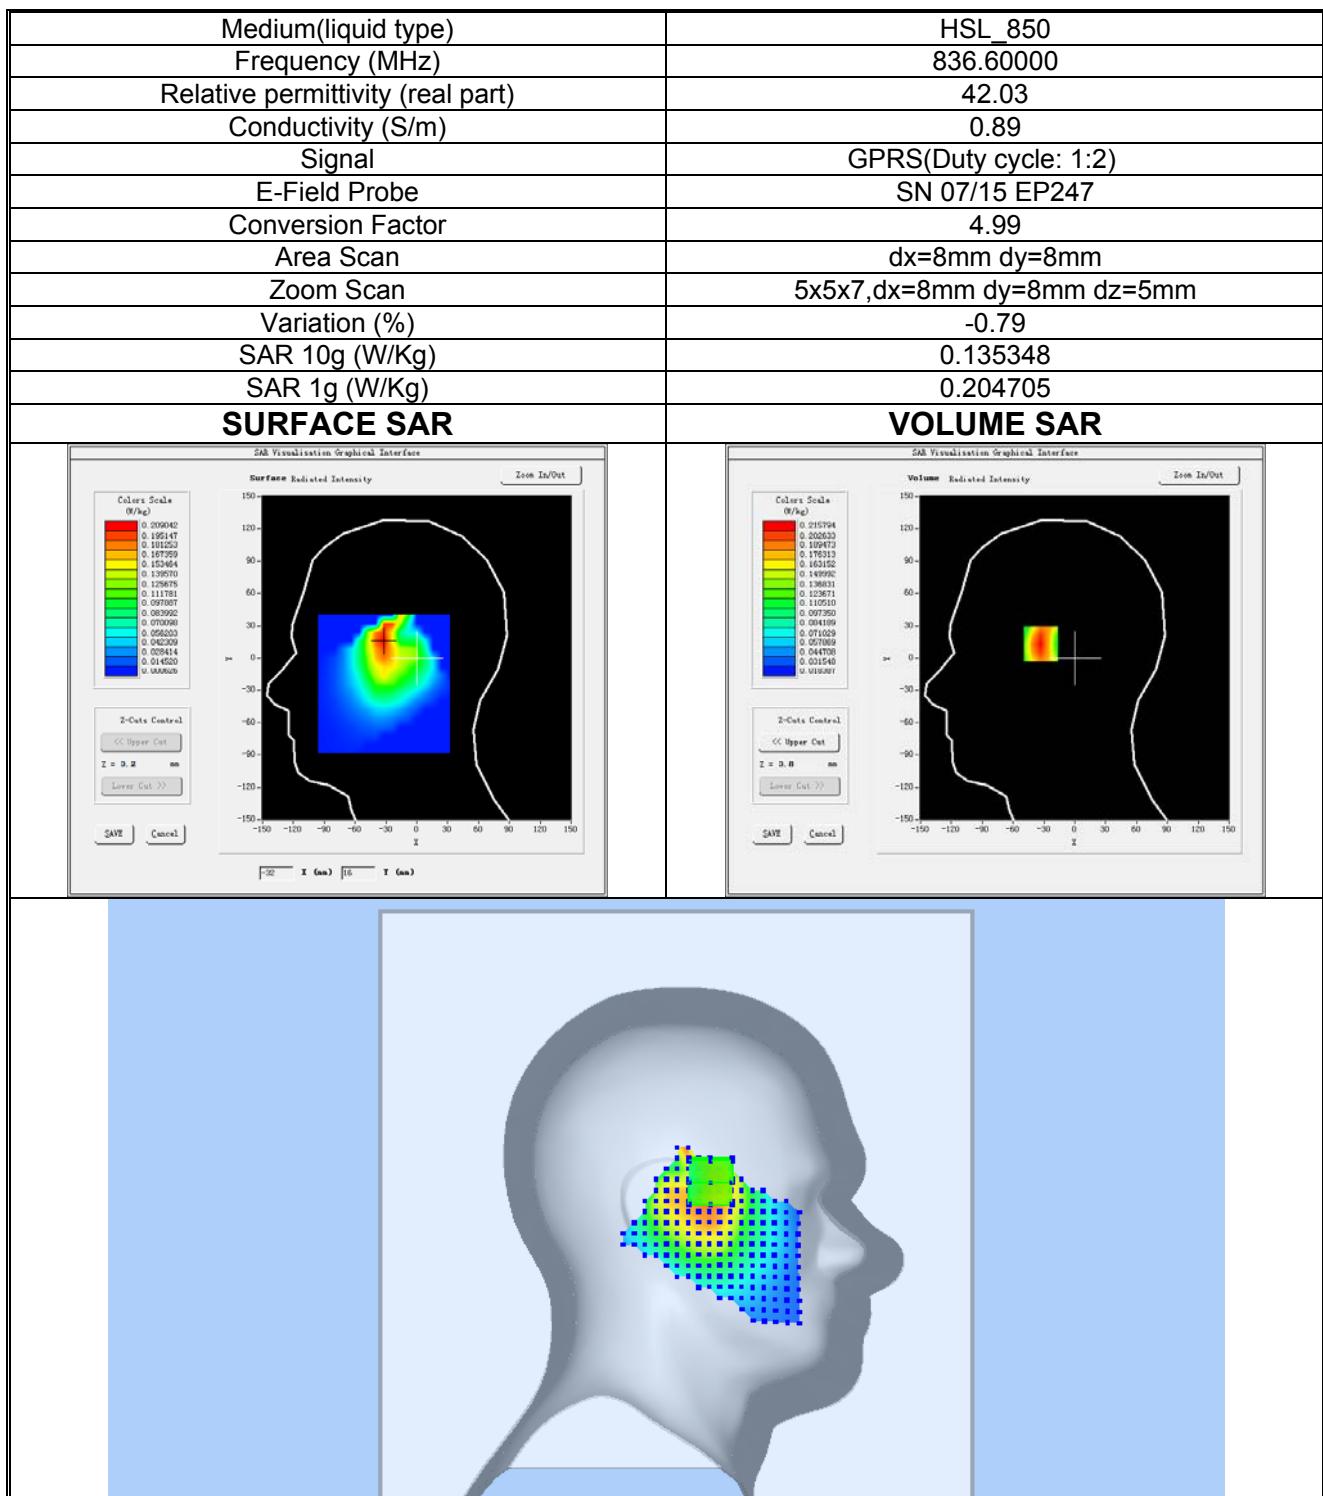
| Position | WWAN (maximum) | | BT(10mm) | Summed SAR (W/kg) |
|----------|-----------------|----------------------|----------------------|----------------------|
| | Band | Scaled SAR (W/kg) | Scaled SAR (W/kg) | |
| Back | GPRS850 | 0.25 | 0.11 | 0.36 |
| Top | GPRS1900 | 0.36 | 0.11 | 0.47 |
| Back | WCDMA Band V | 0.11 | 0.11 | 0.22 |
| Top | WCDMA Band II | 0.60 | 0.11 | 0.71 |
| Top | WCDMA Band IV | 0.82 | 0.11 | 0.93 |
| Top | LTE BAND 2(1RB) | 0.57 | 0.11 | 0.68 |
| Top | LTE BAND 4(1RB) | 0.79 | 0.11 | 0.90 |
| Back | LTE BAND 5(1RB) | 0.09 | 0.11 | 0.20 |
| Back | LTE BAND 7(1RB) | 0.16 | 0.11 | 0.27 |

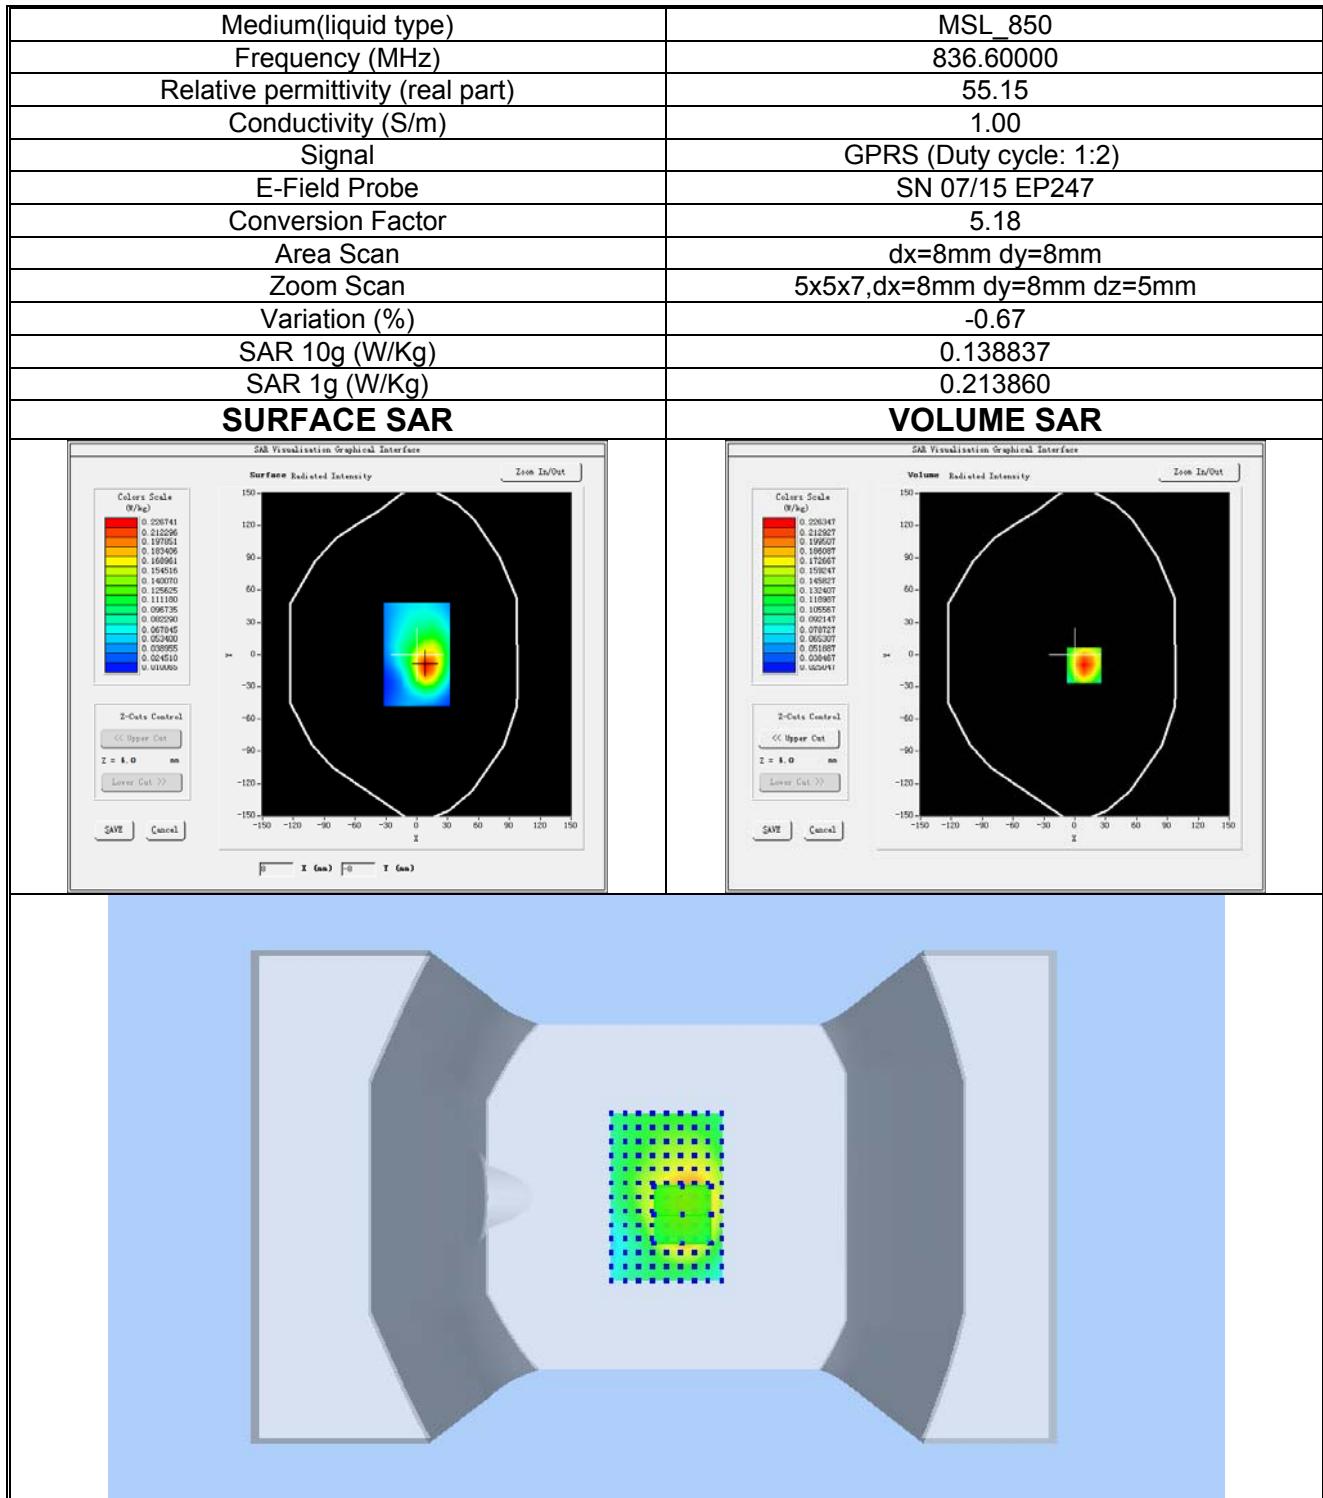
Remark: BT the 1g SAR value is not being captured by the measurement system, the 1g-SAR value is conservatively used for simultaneous transmission analysis.

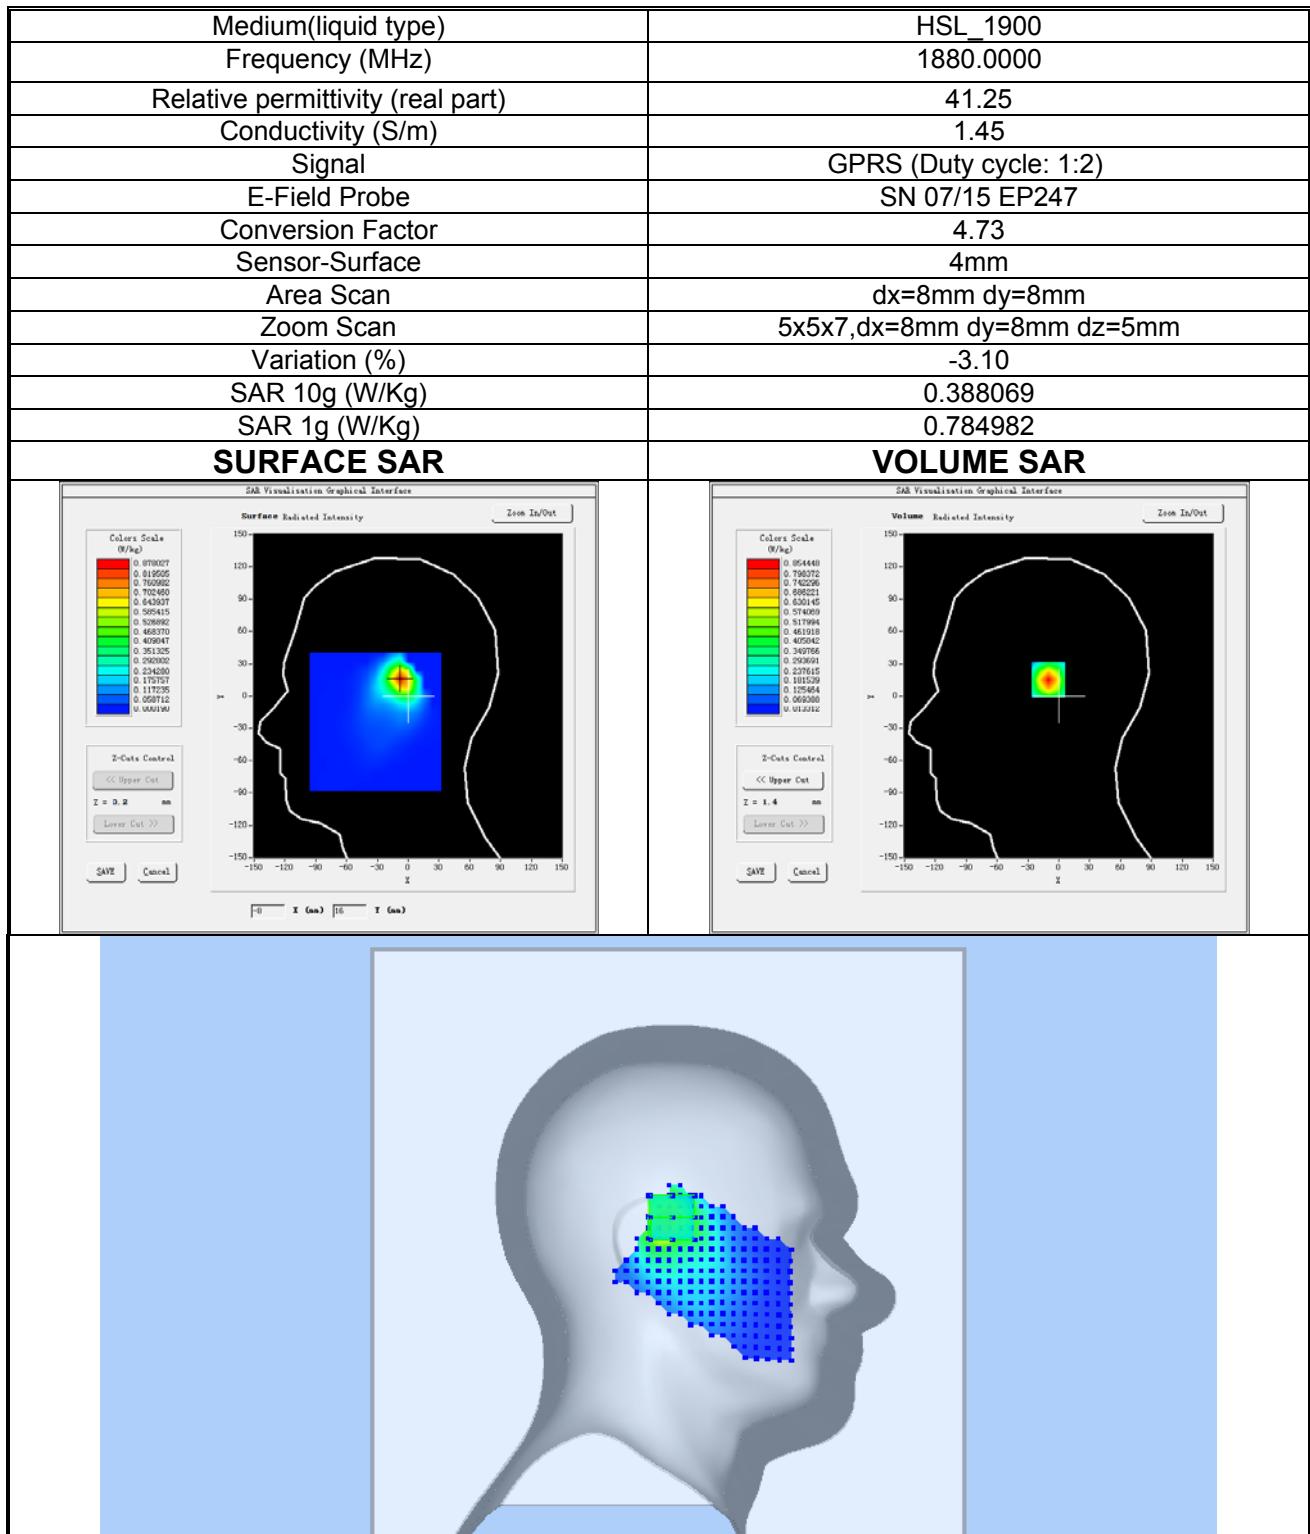
14 SAR Measurement Reference

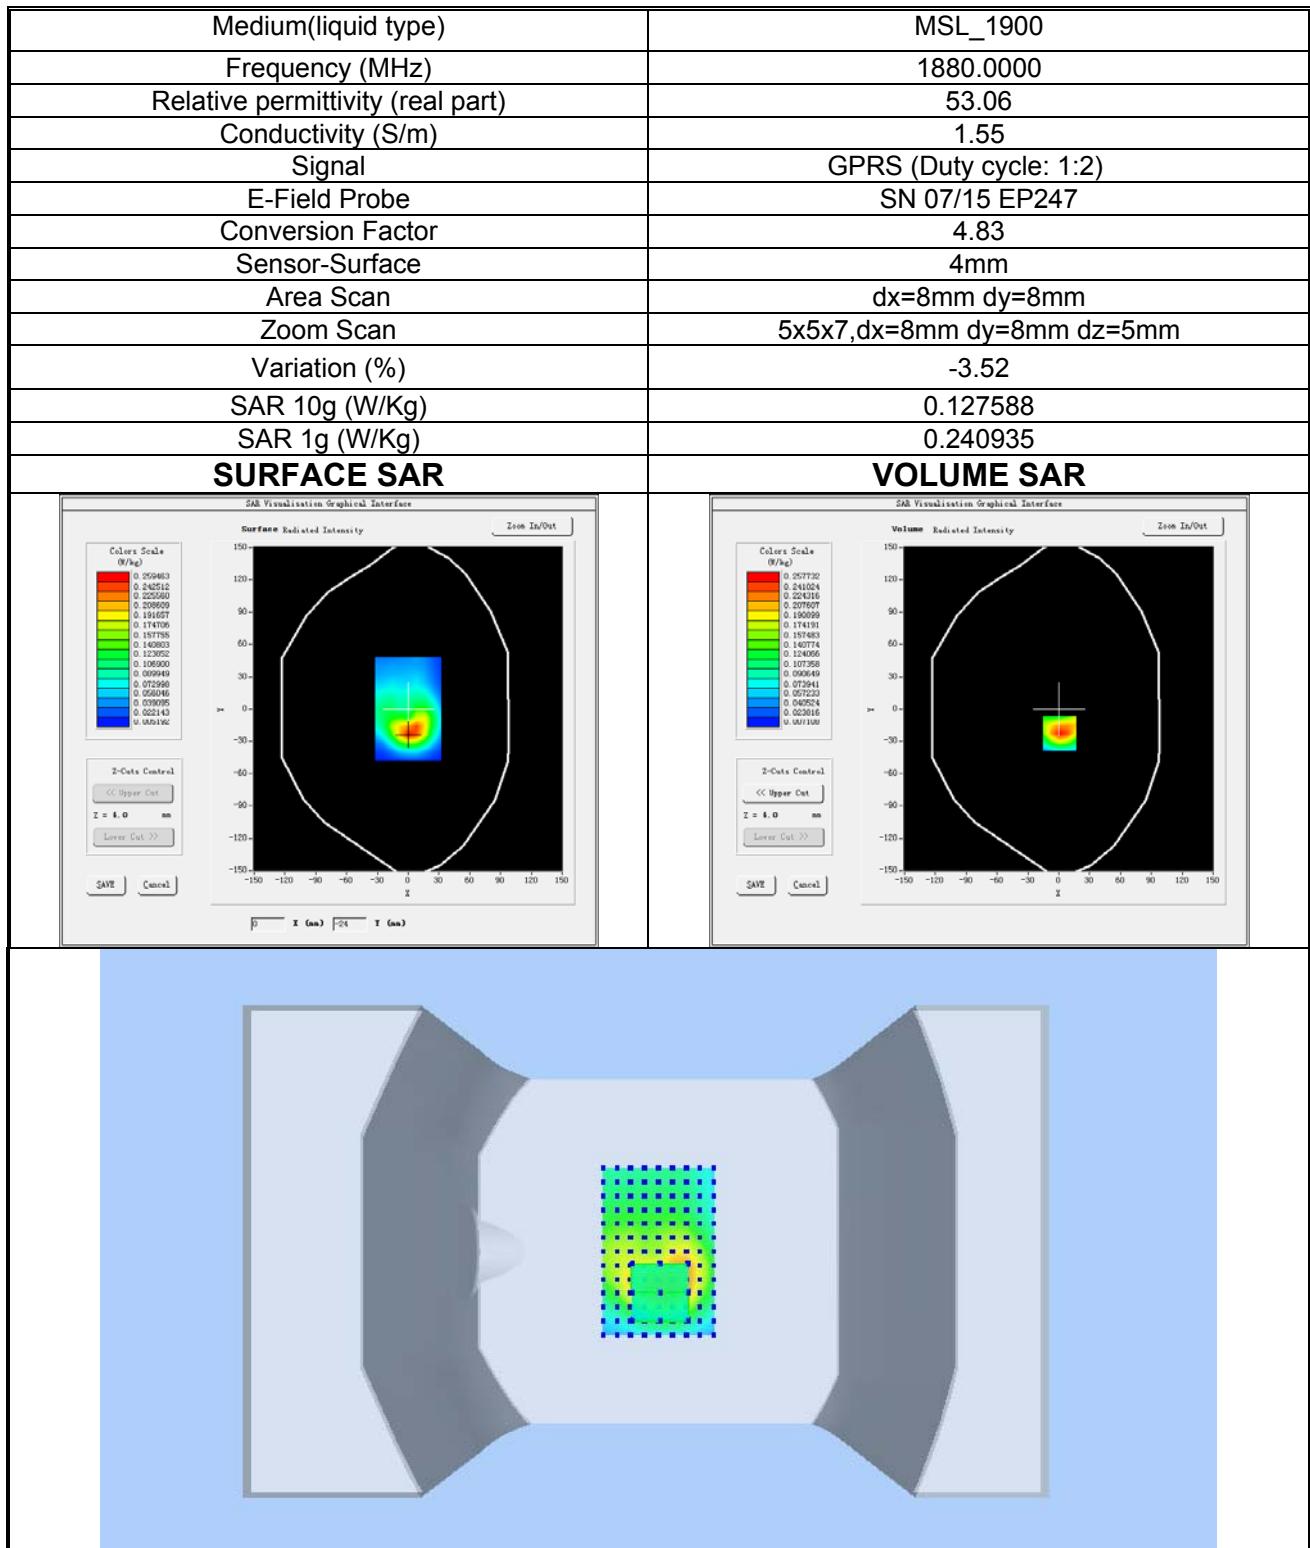
References

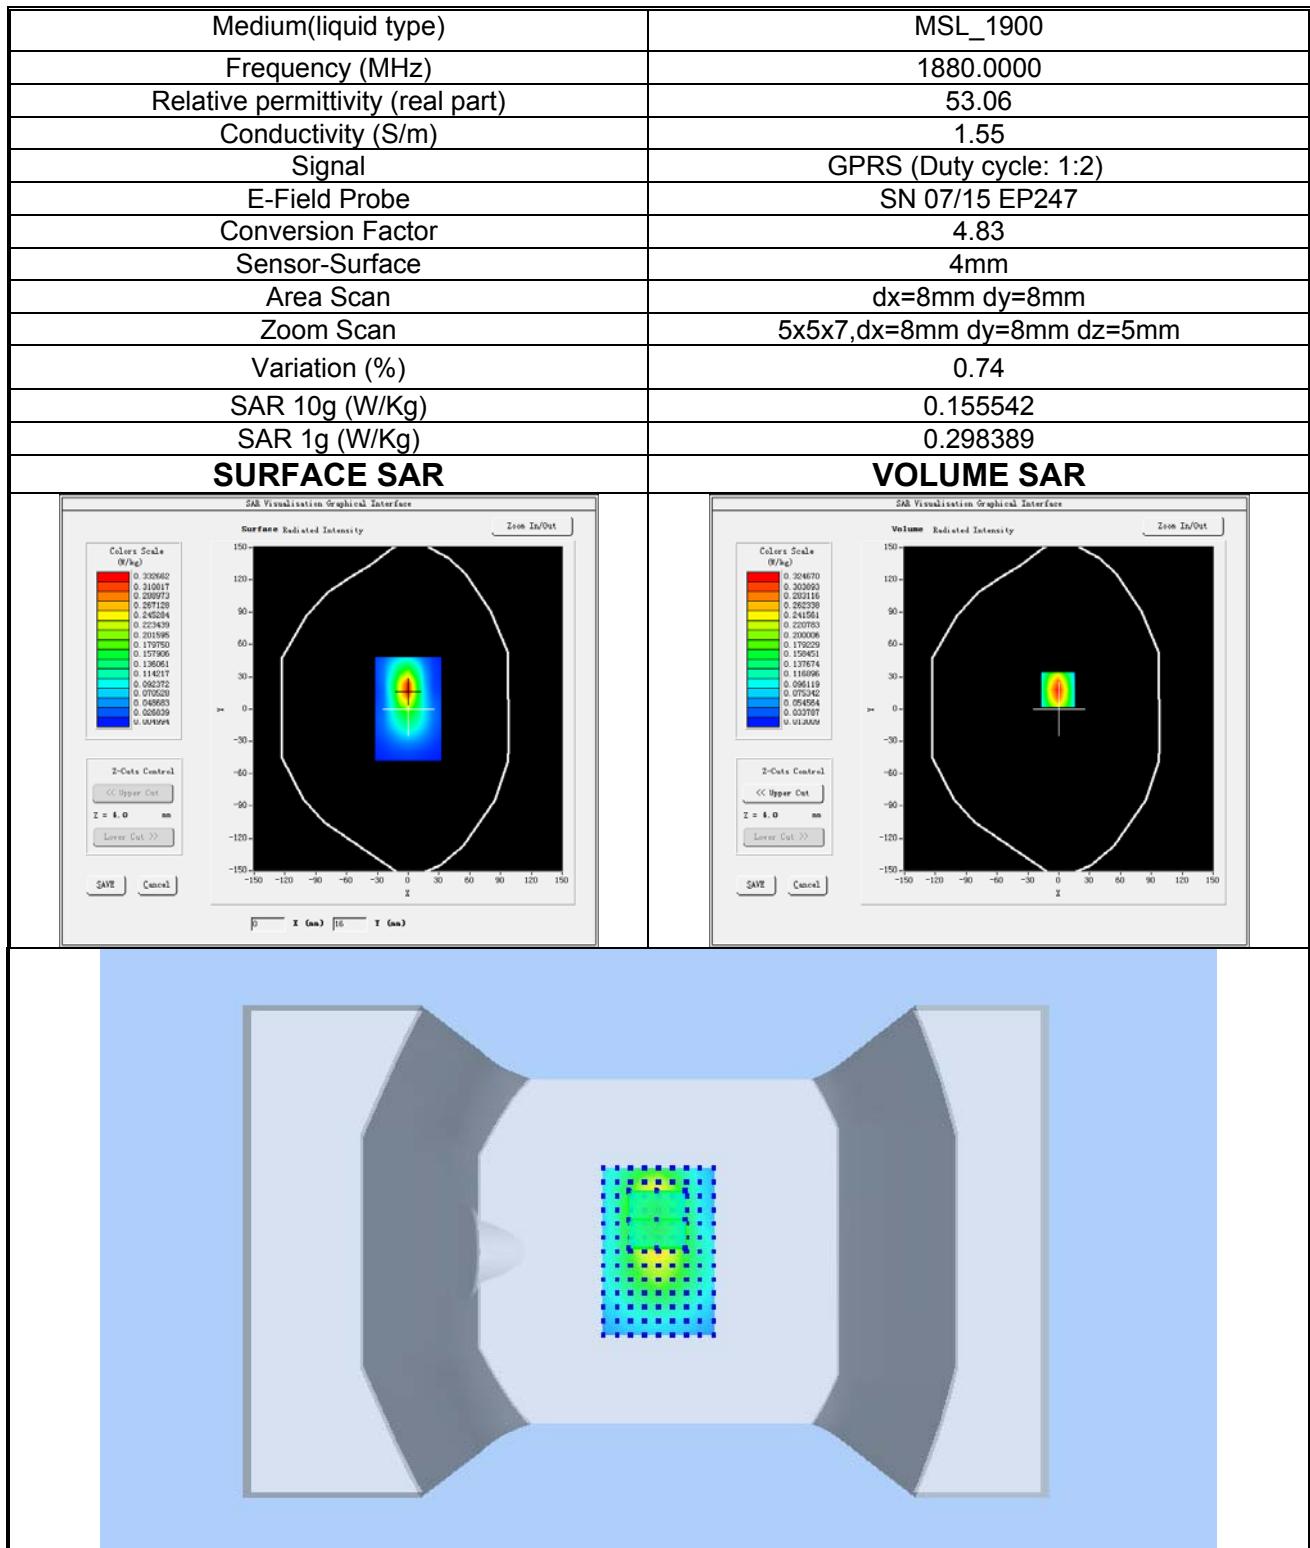
1. FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
2. IEEE Std. C95.1-2005, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300GHz”, 2005
3. IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices:Measurement Techniques”, June 2013
4. IEC 62209-2, “Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices—Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate(SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30MHz to 6GHz)”, April 2010
5. FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 23th, 2015
6. FCC KDB 941225 D01 v03r01, “3G SAR Measurement Procedures”, Oct 23th, 2015
7. FCC KDB 941225 D05 v02r05, “SAR Evaluation Considerations for LTE Devices”, Dec 16th, 2015
8. FCC KDB 941225 D06 v02r01, “SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities”, Oct 23th, 2015
9. FCC KDB865664 D01 v01r04, “SAR Measurement Requirements 100MHz to 6GHz”, Aug 7th, 2015
10. FCC KDB865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations ”, Oct 23th, 2015
11. FCC KDB648474 D04 v01r03, “SAR Evaluation Considerations for Wireless Handsets”, Oct 23th, 2015
12. FCC KDB 248227 D01 v02r02, SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters, Oct 23th, 2015.

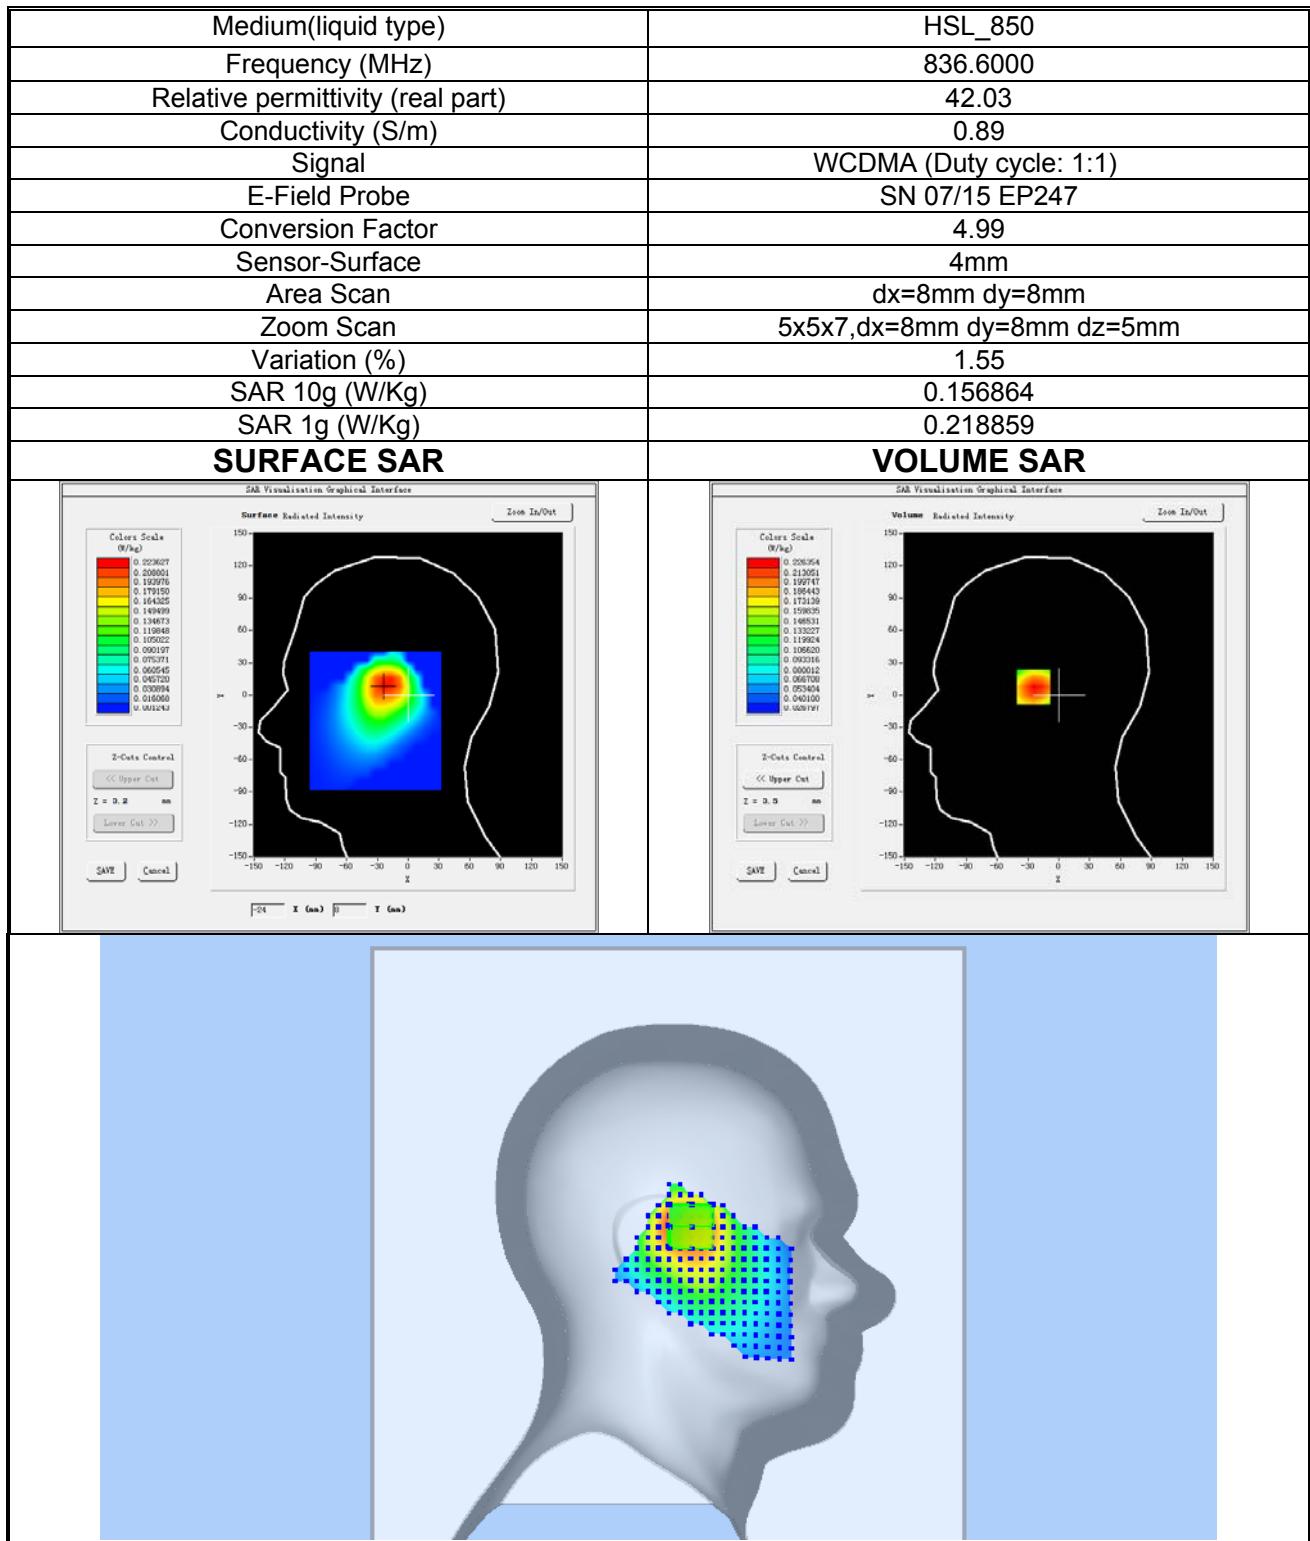
Maximum SAR measurement Plots**Plot 1: GPRS850MHz, Middle channel (Left Head , Cheek)****Product Description:Mobile Phone****Test Date:2019-12-26**

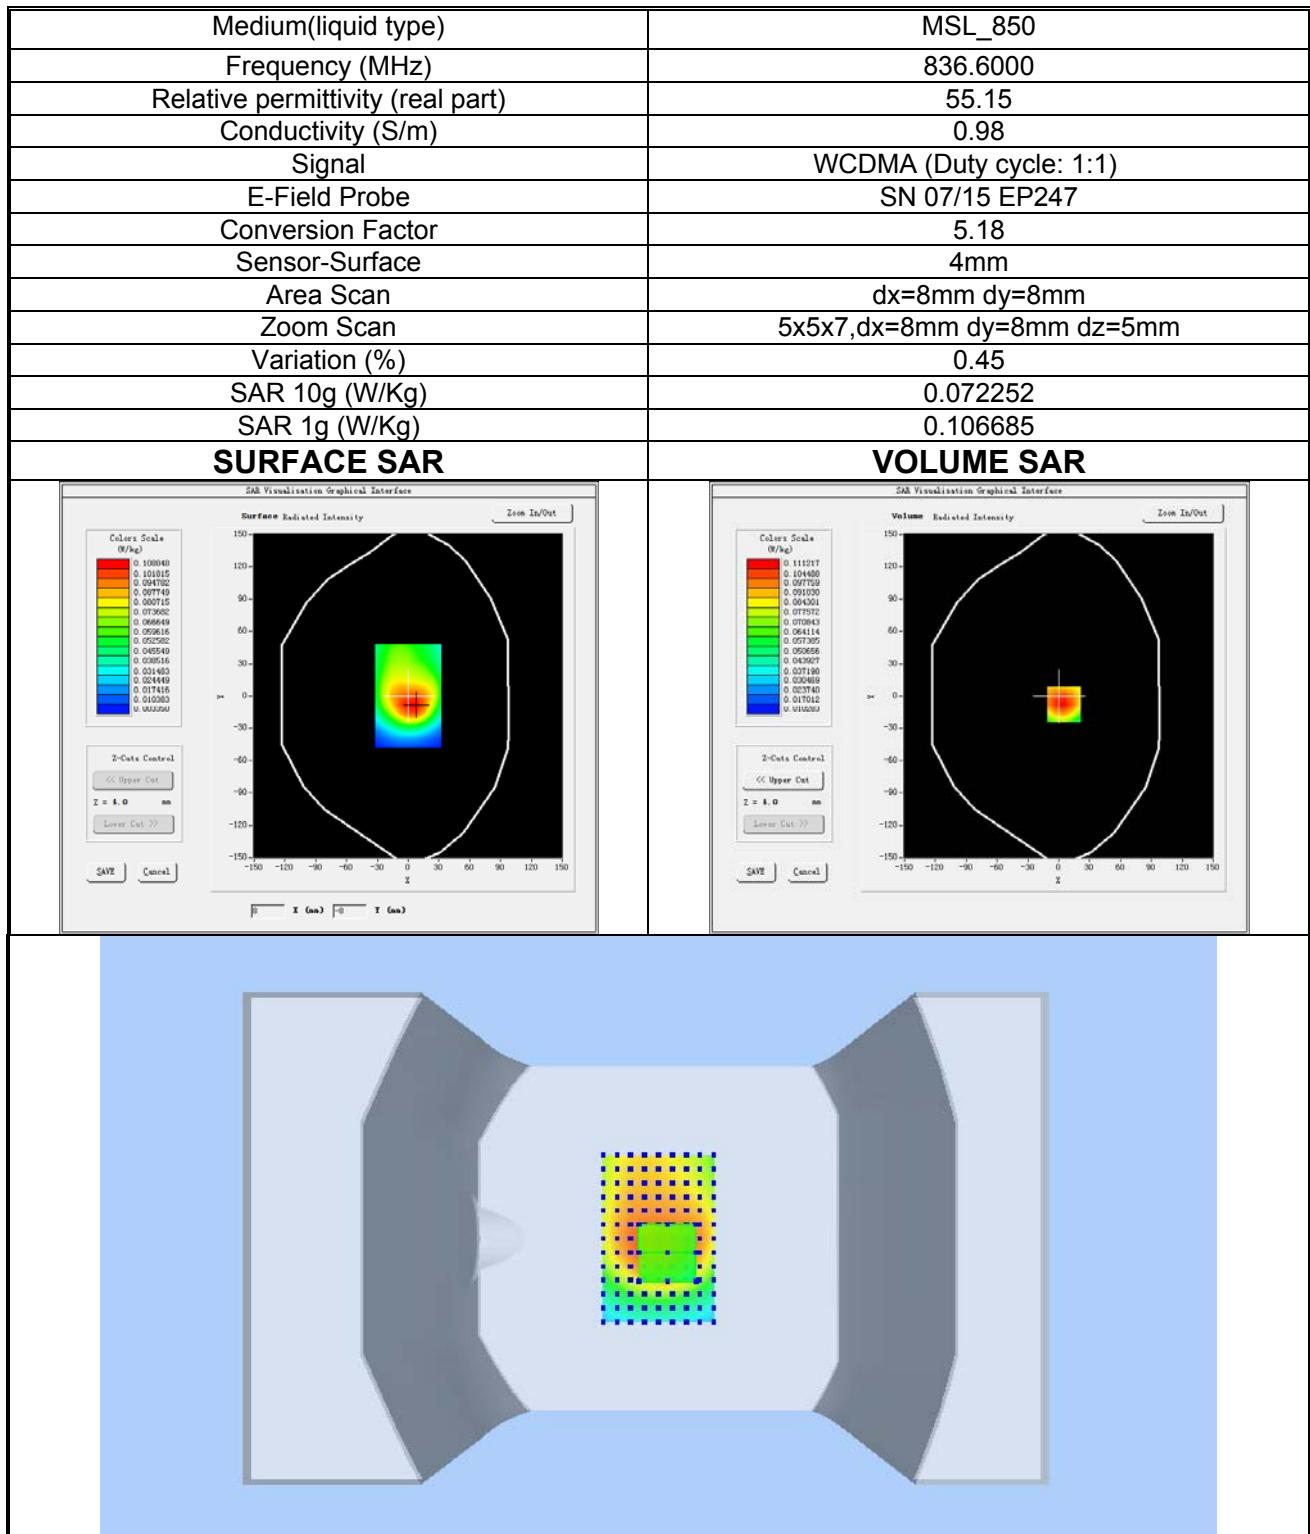
Plot 2: GPRS850MHz, Middle channel (Body-worn/Hotspot, Back Surface)**Product Description:Mobile Phone****Test Date: 2019-12-26**

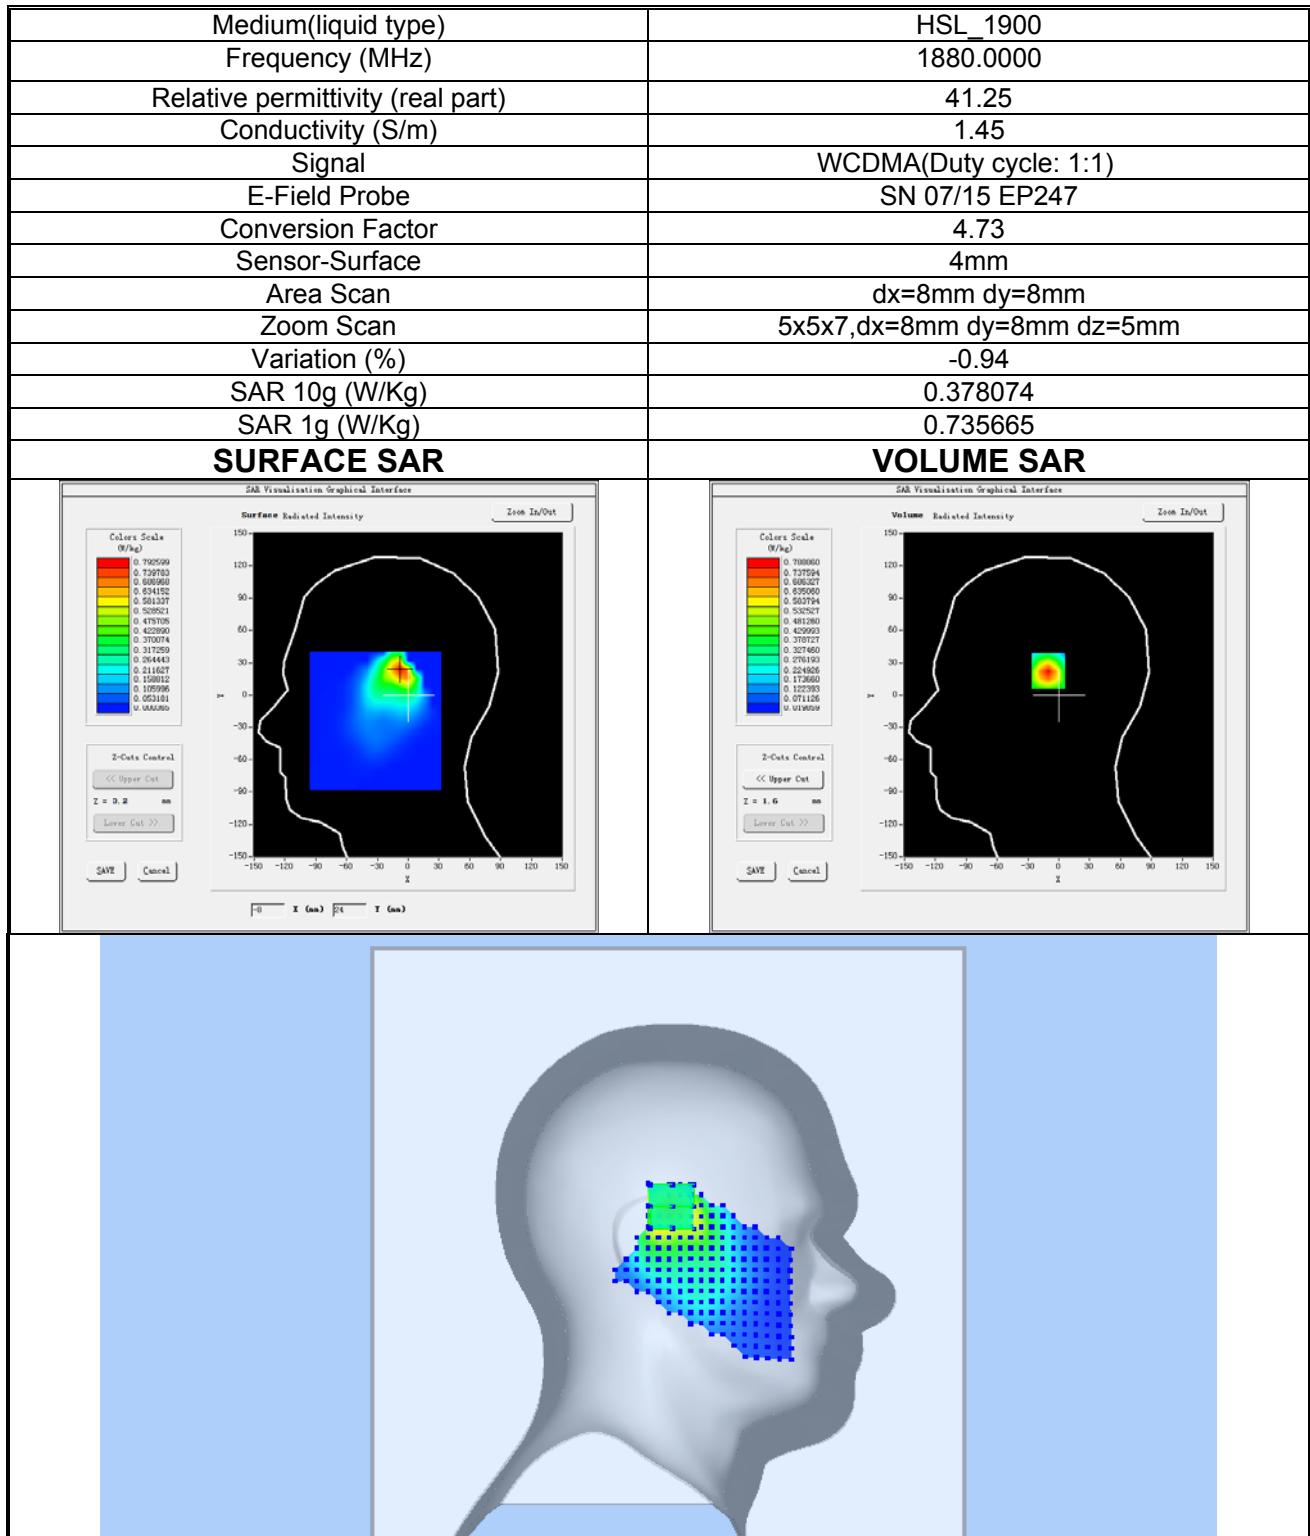
Plot 3: GPRS1900, Middle channel (Left Head , Cheek)**Product Description: Mobile Phone****Test Date: 2020-01-08**

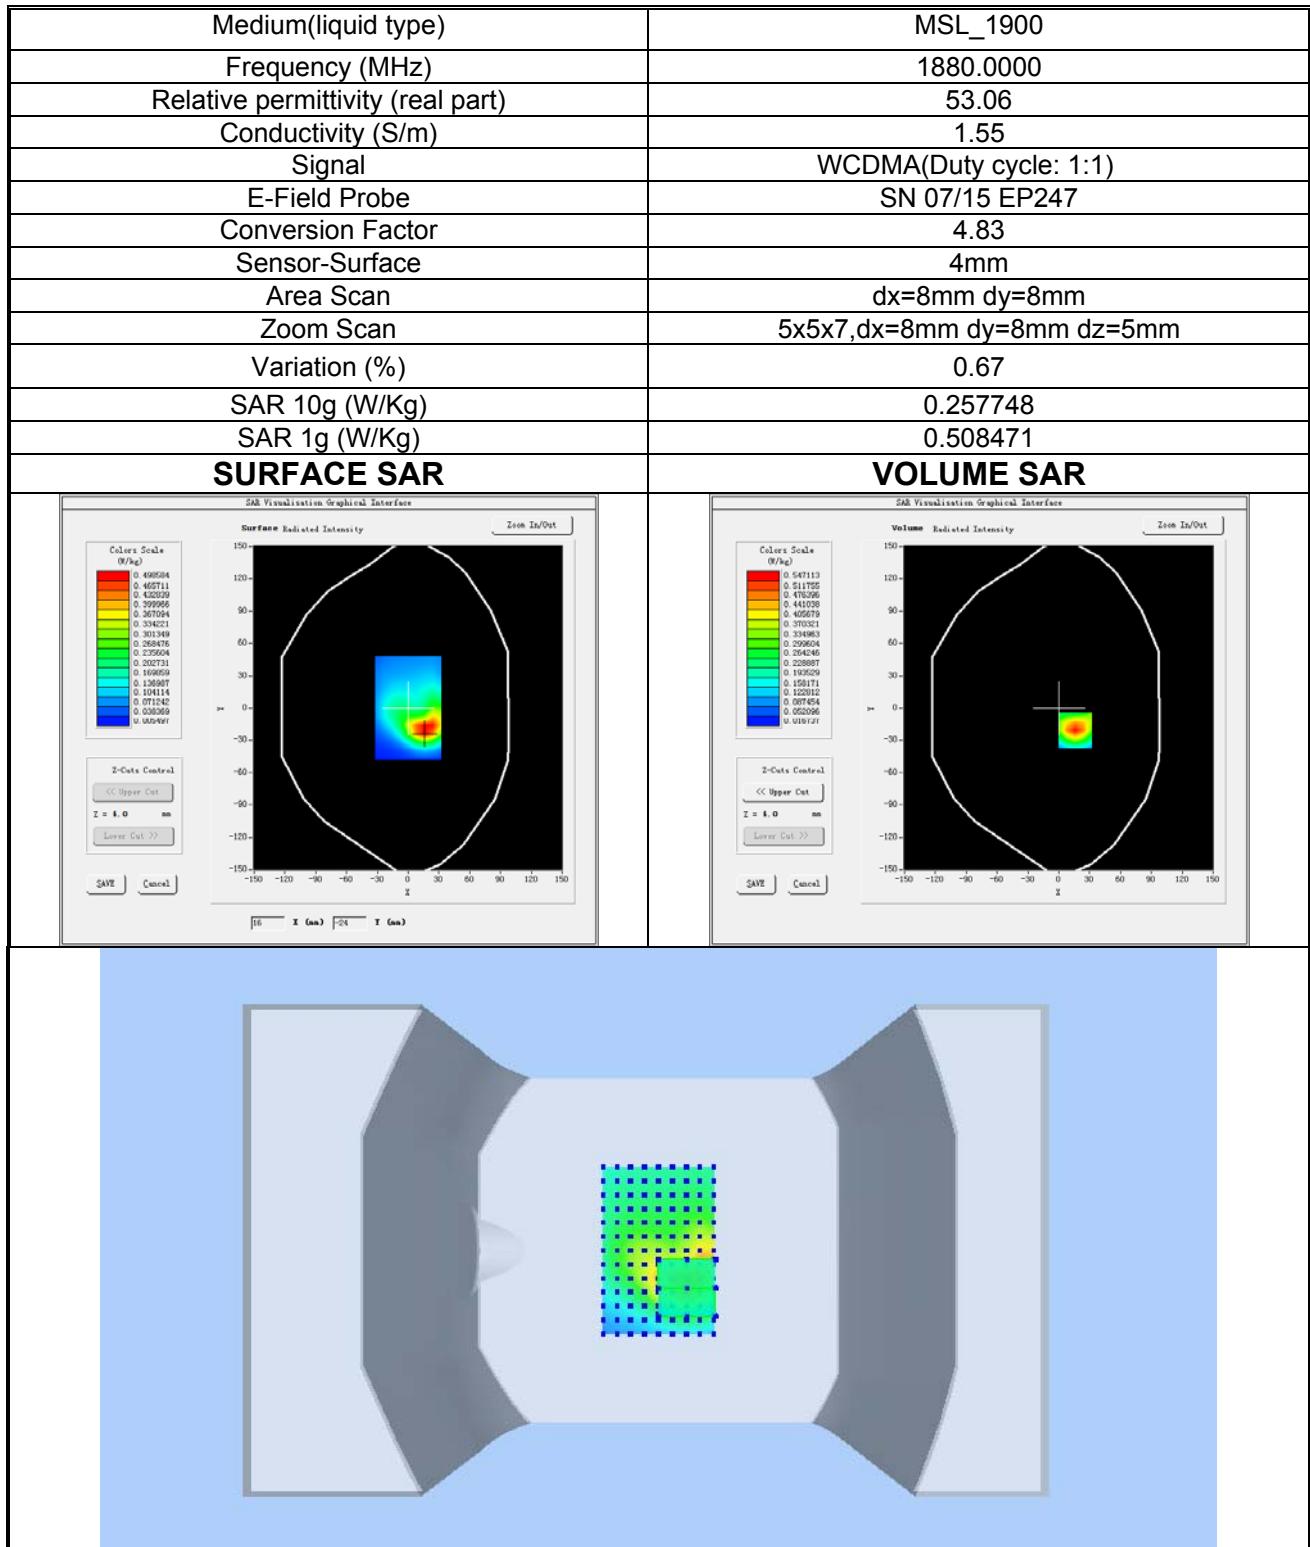
Plot 4: GPRS1900, Middle channel (Body-worn, Back Surface)**Product Description: Mobile Phone****Test Date: 2020-01-08**

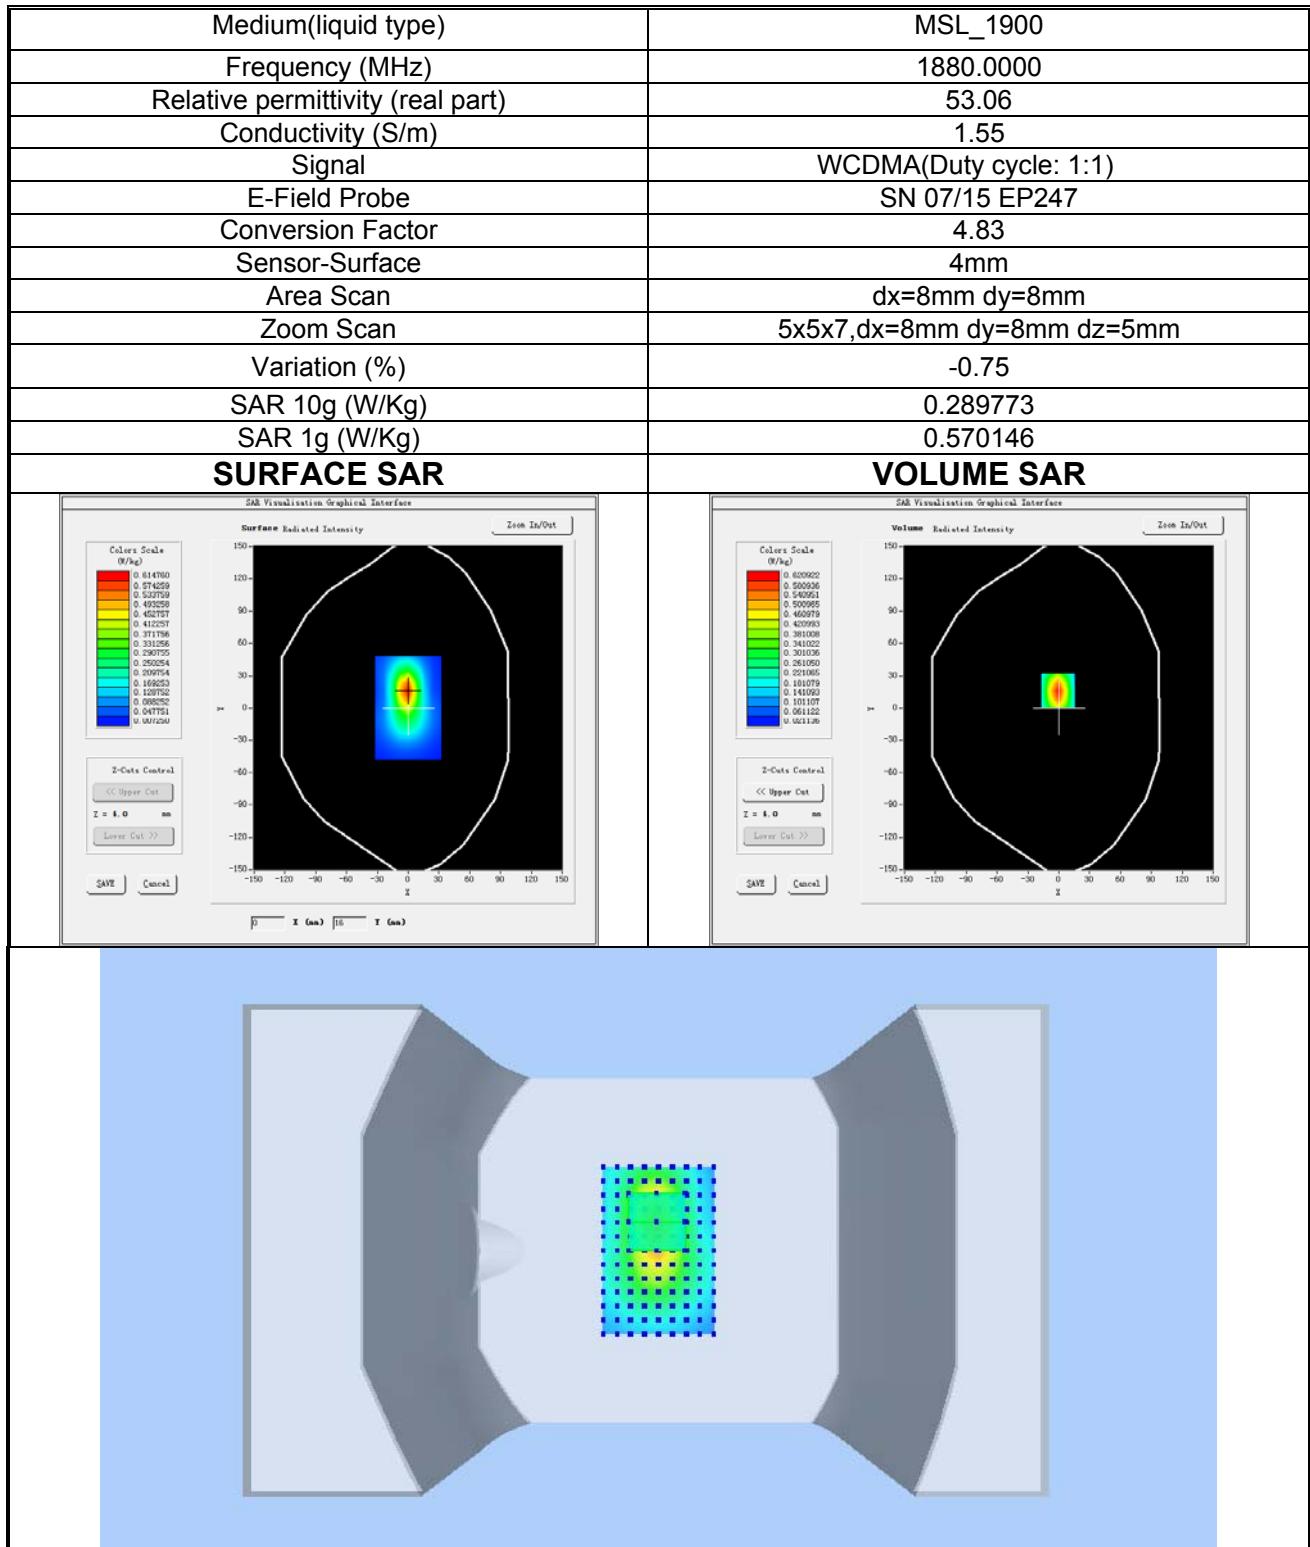
Plot 5: GPRS1900, Middle channel (Hotspot, Top Edge)**Product Description: Mobile Phone****Test Date: 2020-01-08**

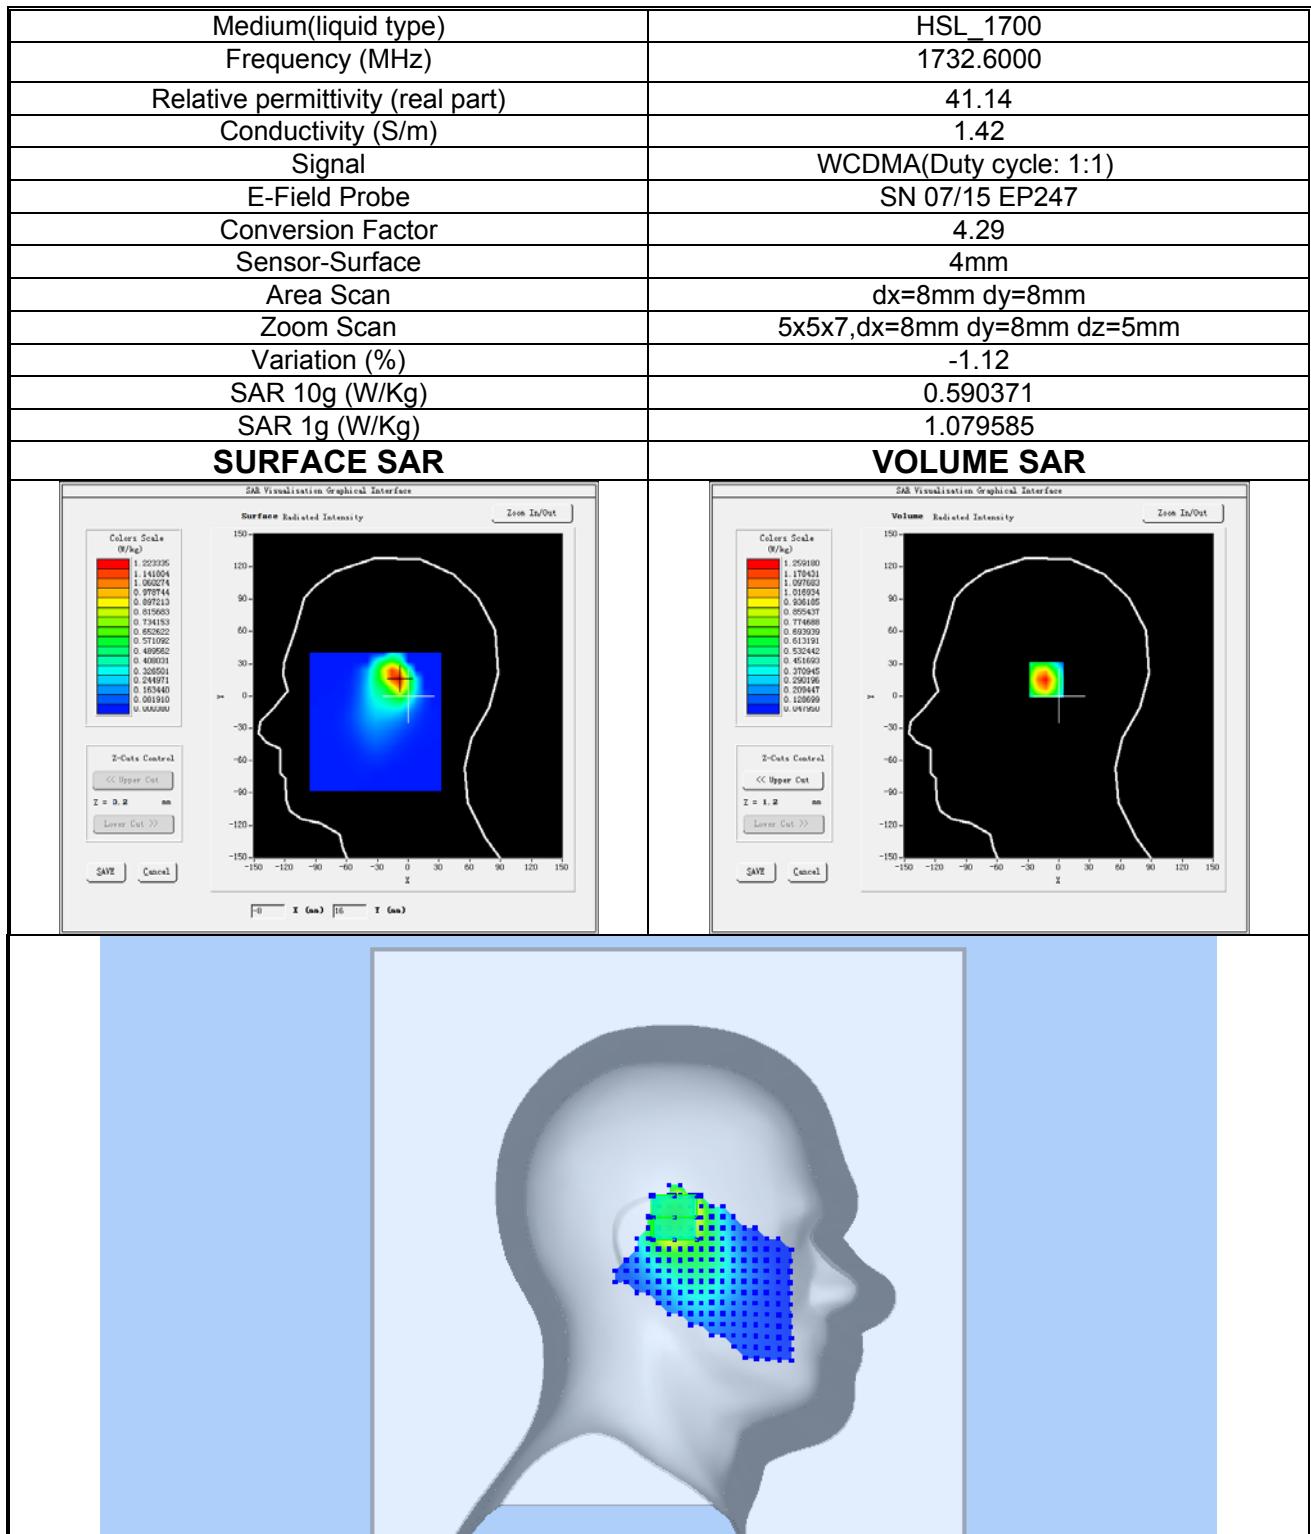
Plot 6: WCDMA BAND V, Middle channel (Left Head Cheek)**Product Description: Mobile Phone****Test Date: 2019-12-26**

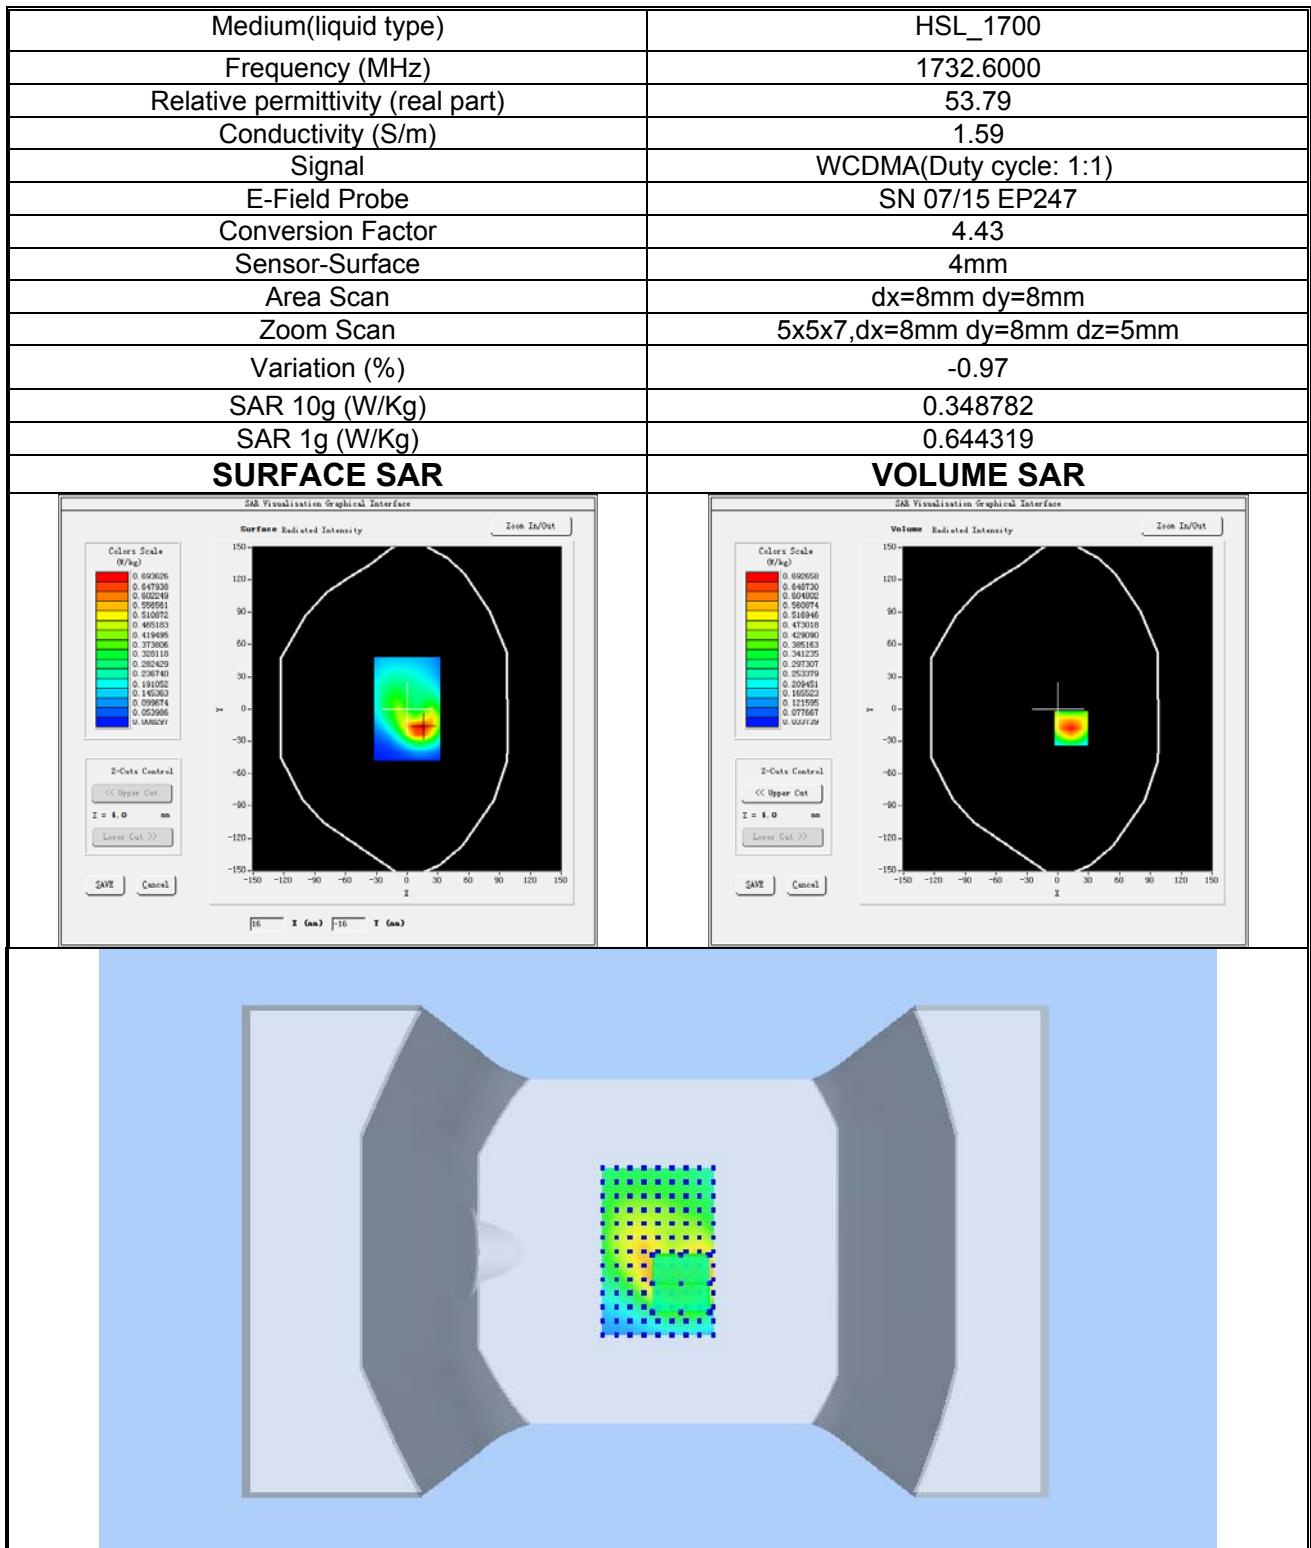
Plot 7: WCDMA BAND V, Middle channel (Body-worn/Hotspot, Back Surface)**Product Description: Mobile Phone****Test Date: 2019-12-26**

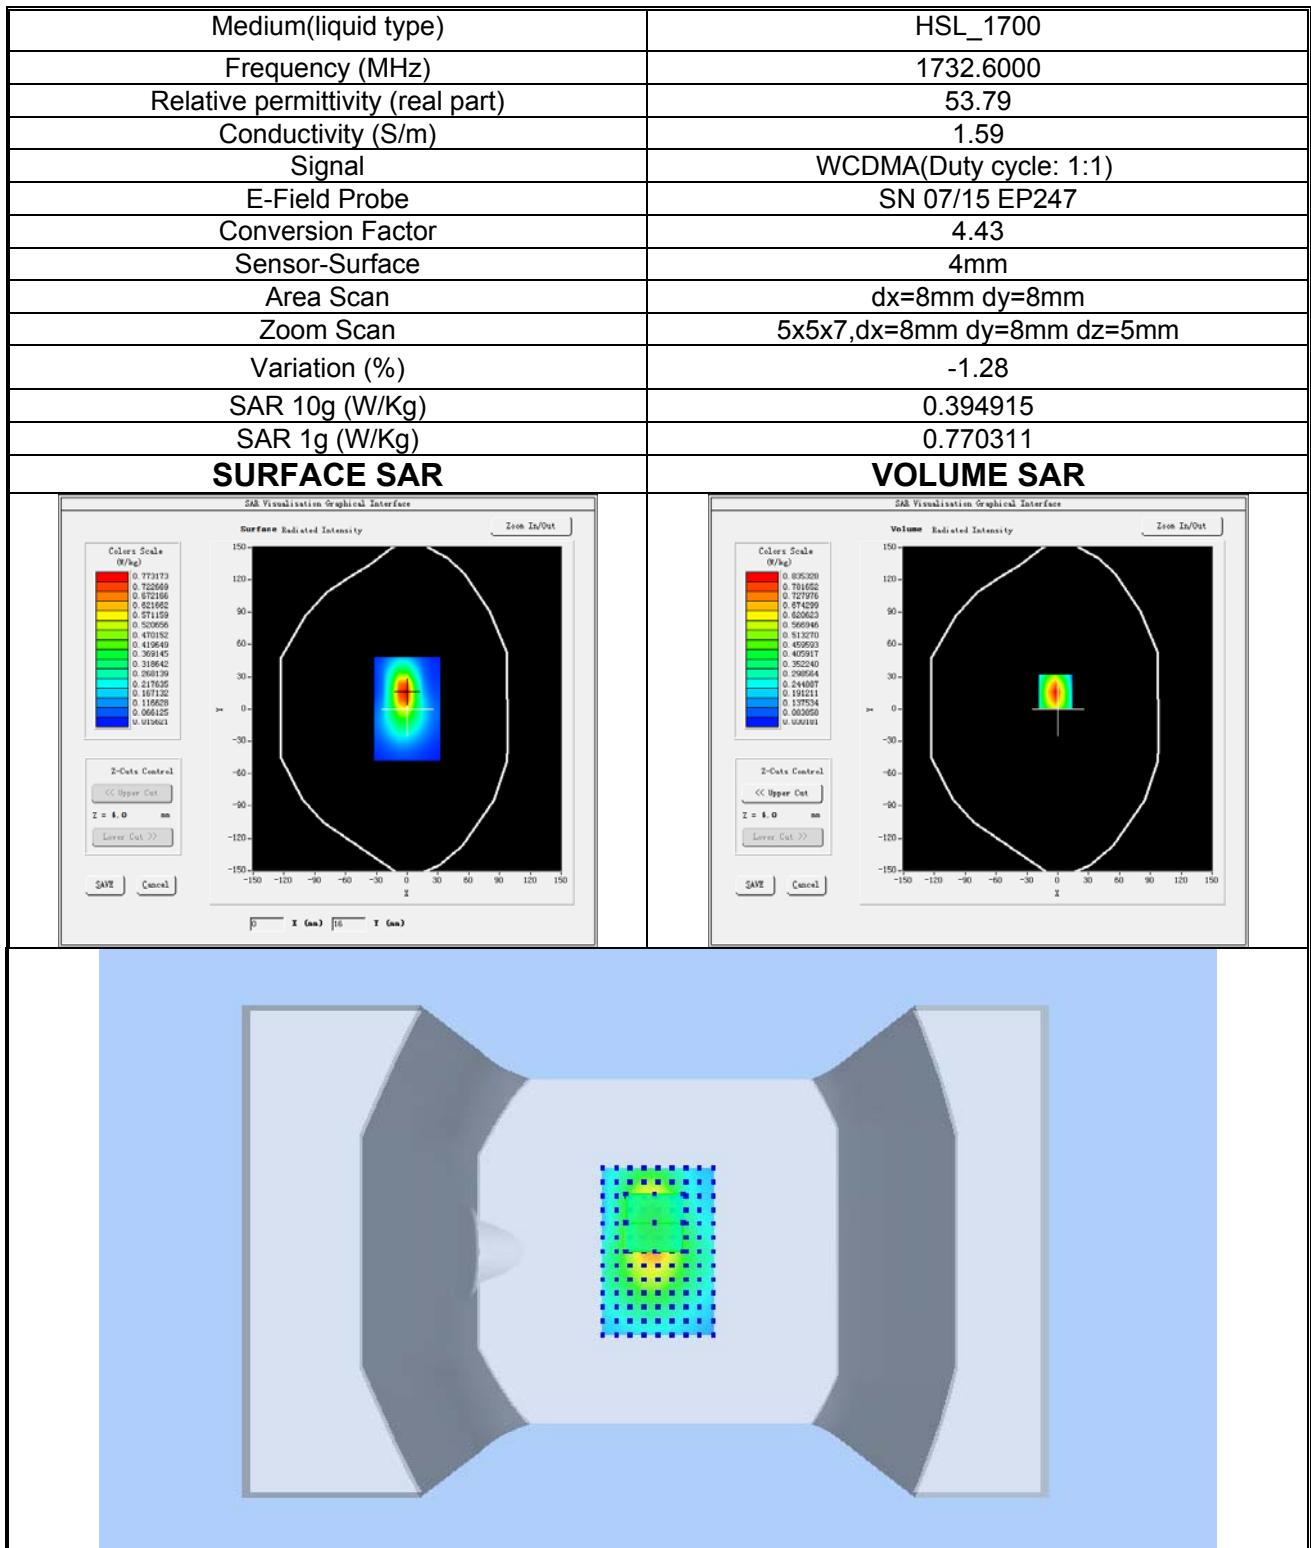
Plot 8: WCDMA BAND II, Middle channel (Left Head Cheek)**Product Description: Mobile Phone****Test Date: 2020-01-08**

Plot 9: WCDMA BAND II, Middle channel (Body-worn, Back Surface)**Product Description: Mobile Phone****Test Date: 2020-01-08**

Plot 10: WCDMA BAND II , Middle channel (Hotspot, Top Edge)**Product Description: Mobile Phone****Test Date: 2020-01-08**

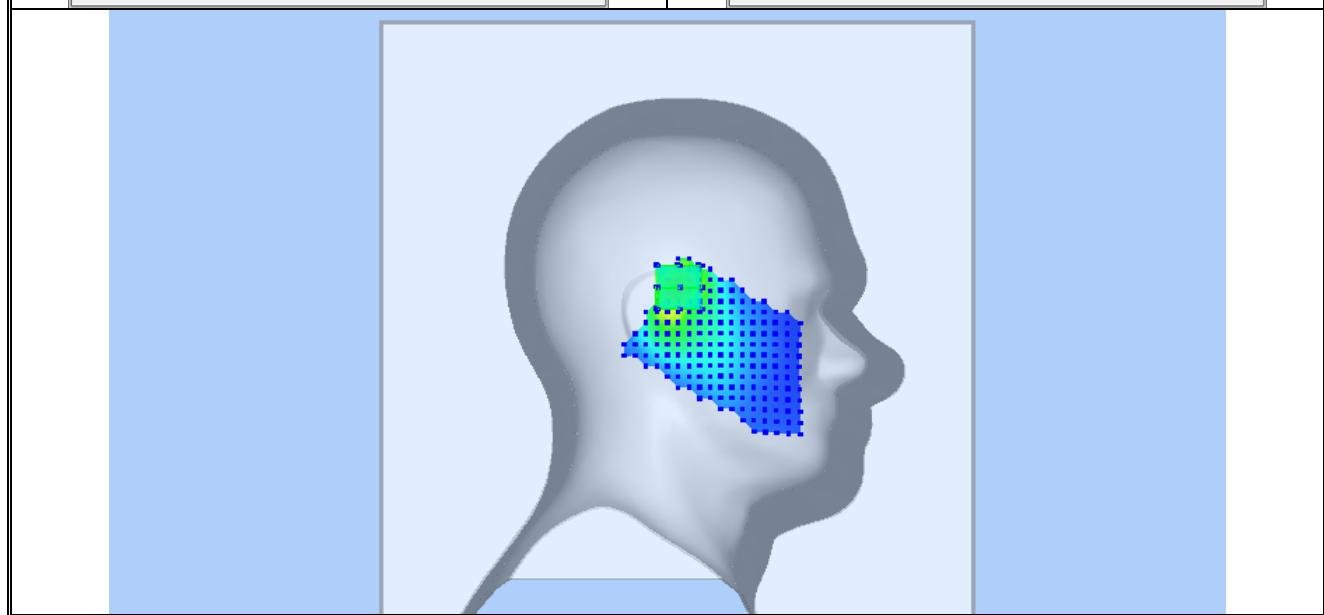
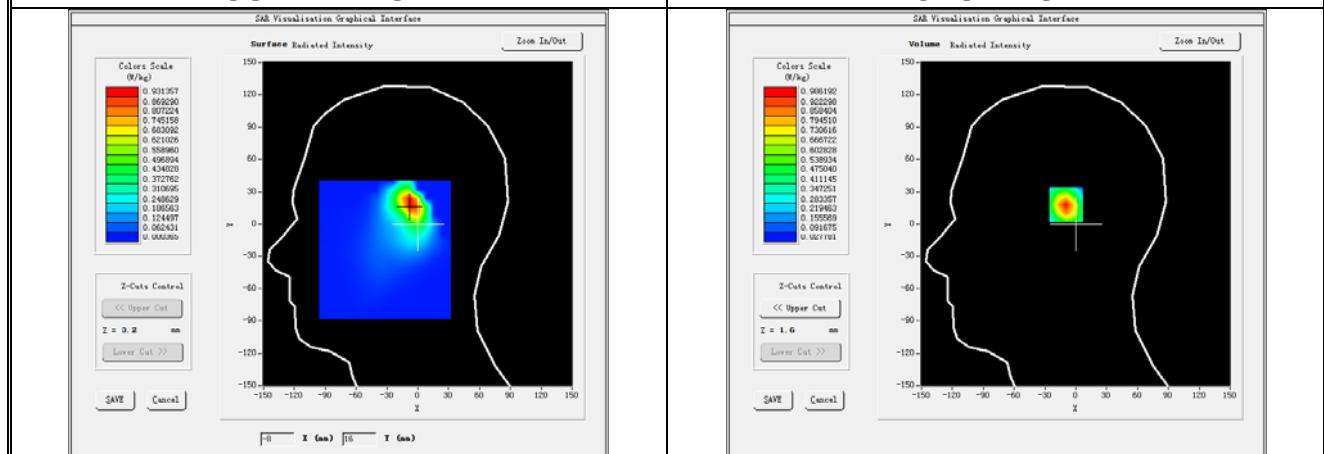
Plot 11: WCDMA BAND IV, Mid channel (Left Head Cheek)**Product Description: Mobile Phone****Test Date: 2020-01-07**

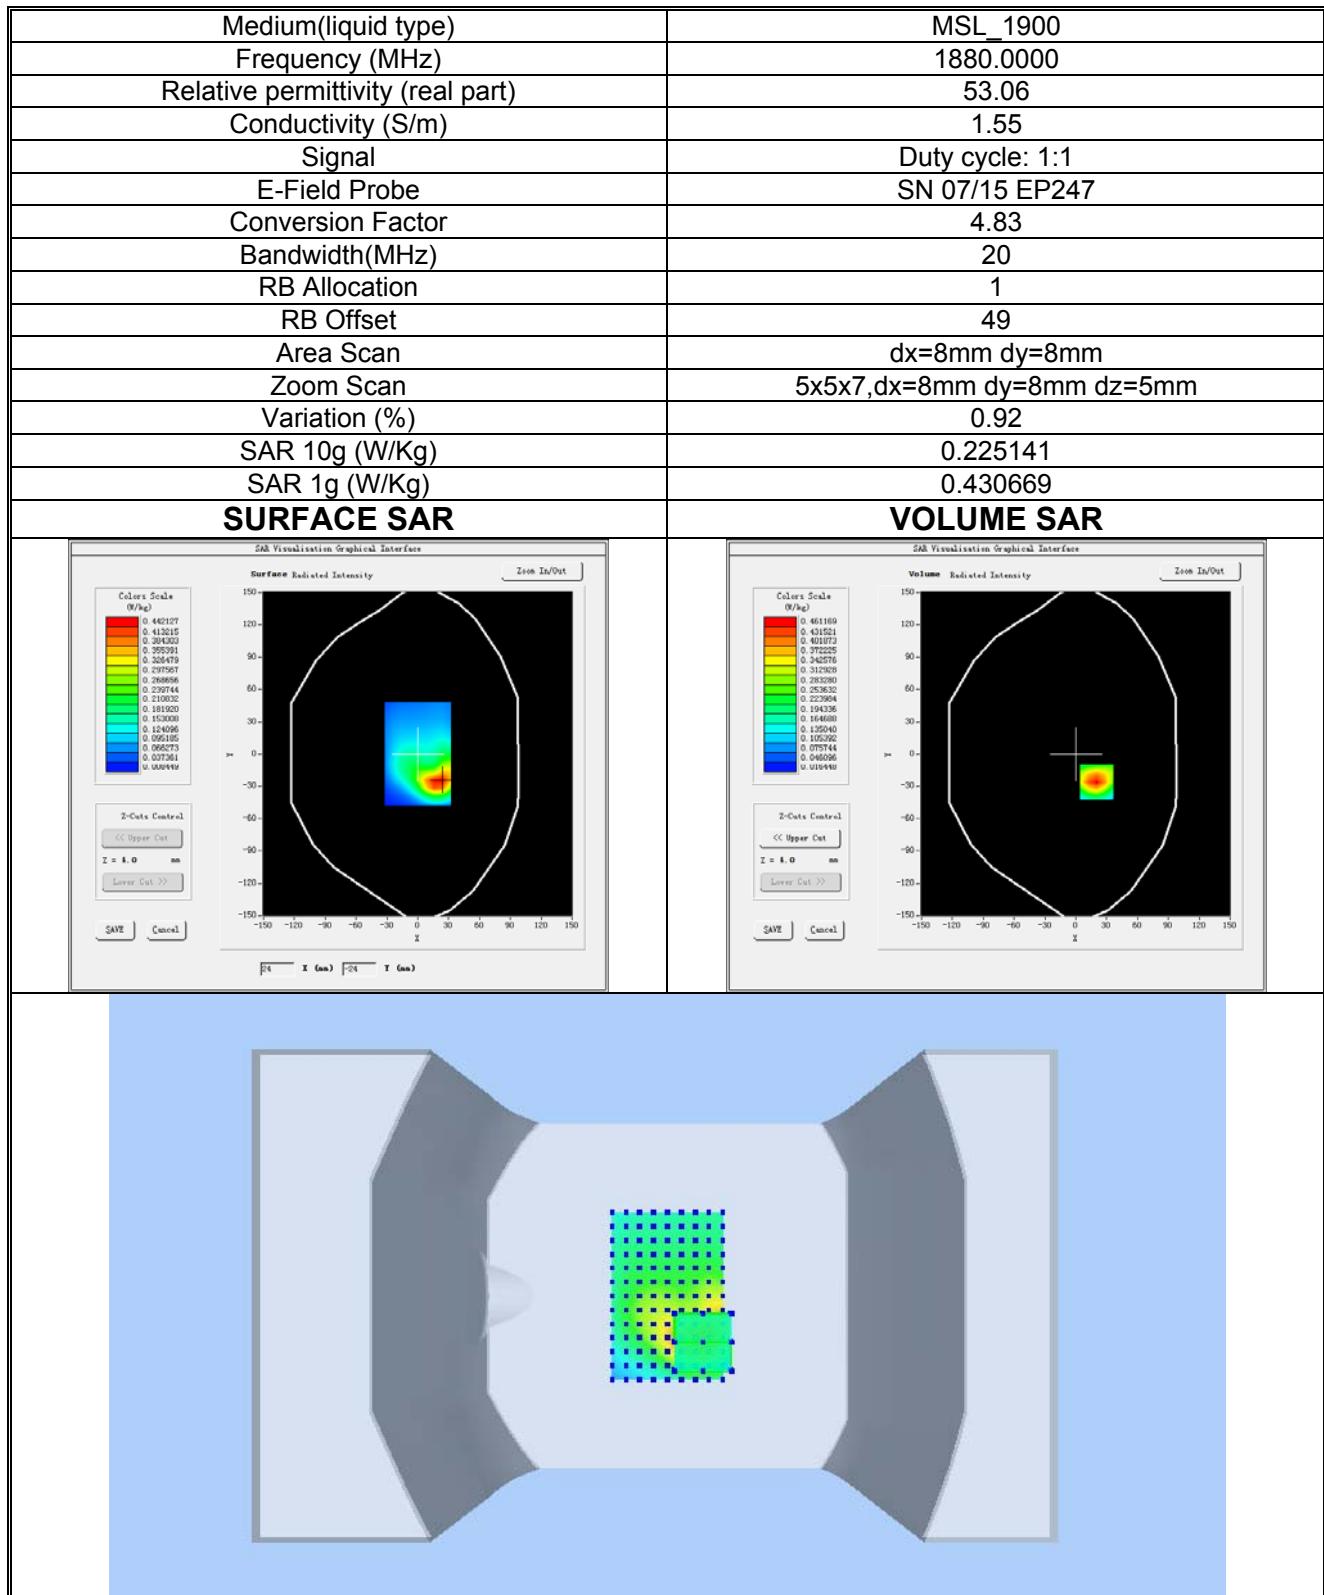
Plot 12: WCDMA BAND IV, Middle channel (Body-worn, Back Surface)**Product Description: Mobile Phone****Test Date: 2020-01-07**

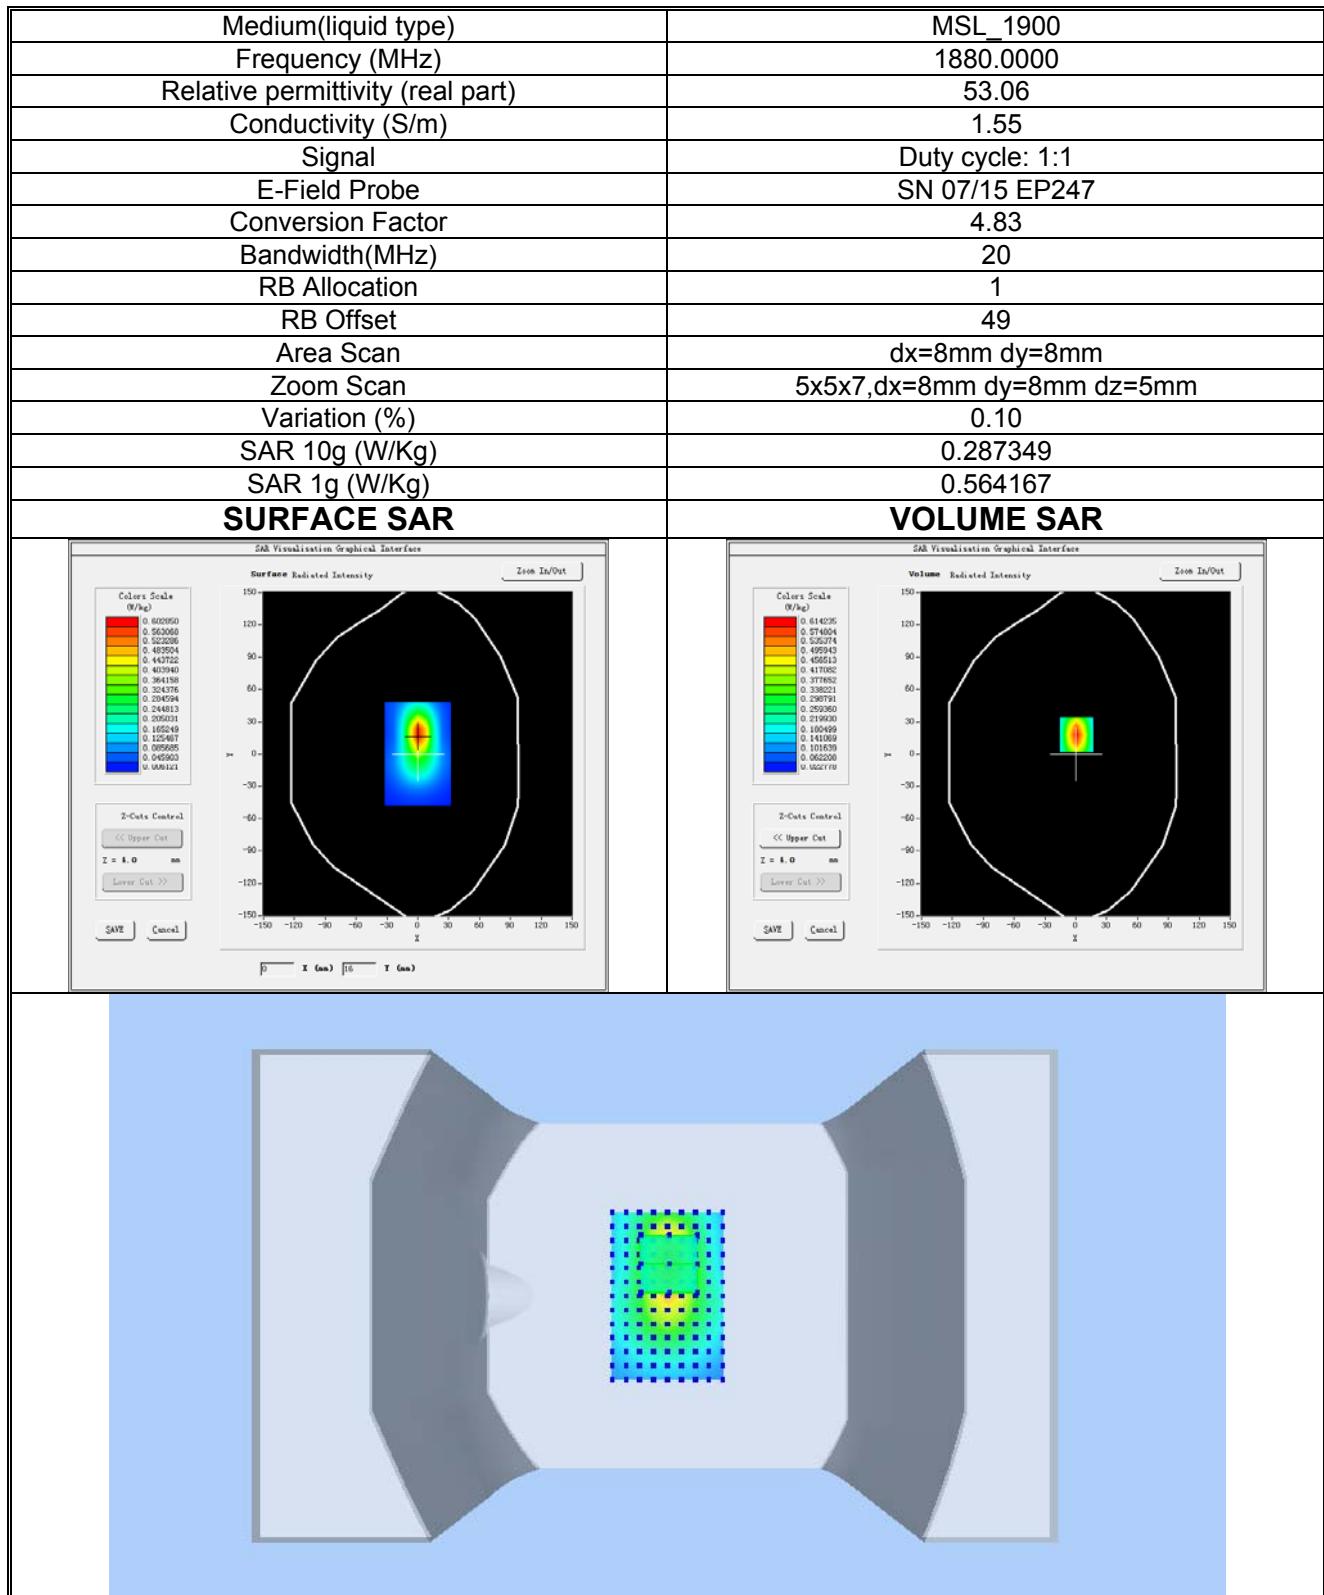
Plot 13: WCDMA BAND IV, Middle channel (Hotspot, Top Edge)**Product Description: Mobile Phone****Test Date: 2020-01-07**

Plot 14:LTE BAND 2, High channel (Left Head Tilt)**Product Description:Mobile Phone****Test Date: 2020-01-08**

| | |
|-----------------------------------|----------------------------|
| Medium(liquid type) | HSL_1900 |
| Frequency (MHz) | 1900.0000 |
| Relative permittivity (real part) | 41.25 |
| Conductivity (S/m) | 1.45 |
| Signal | Duty cycle: 1:1 |
| E-Field Probe | SN 07/15 EP247 |
| Conversion Factor | 4.73 |
| Bandwidth(MHz) | 20 |
| RB Allocation | 1 |
| RB Offset | 49 |
| Area Scan | dx=8mm dy=8mm |
| Zoom Scan | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%) | 0.02 |
| SAR 10g (W/Kg) | 0.450864 |
| SAR 1g (W/Kg) | 0.901401 |

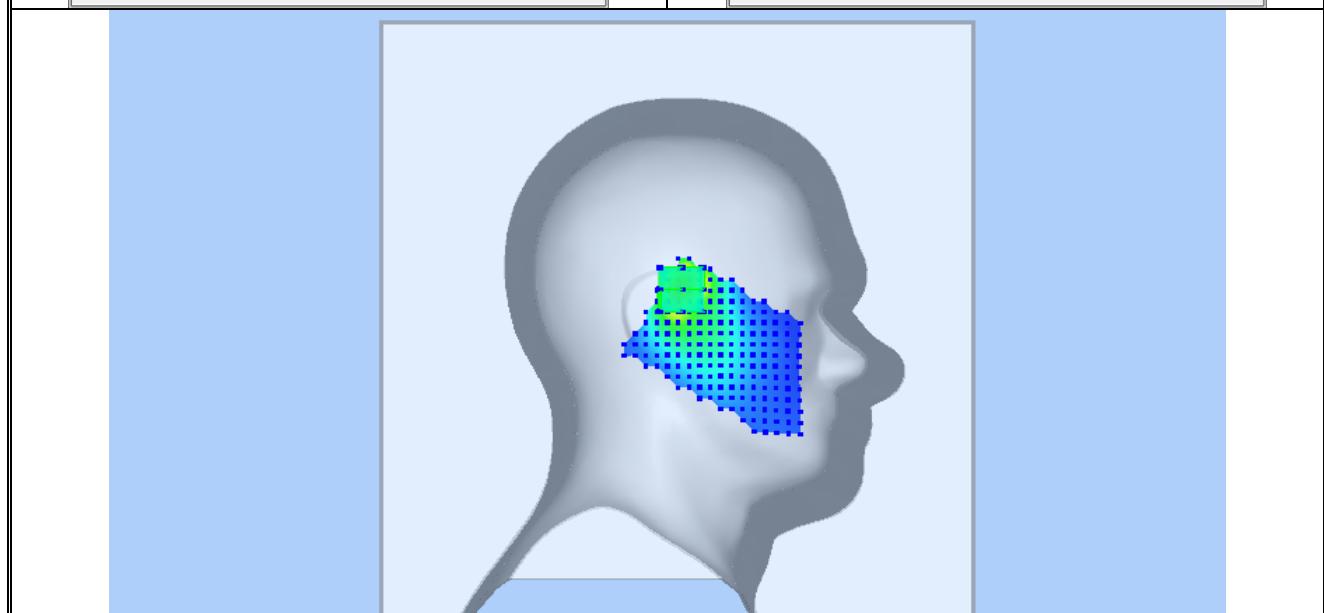
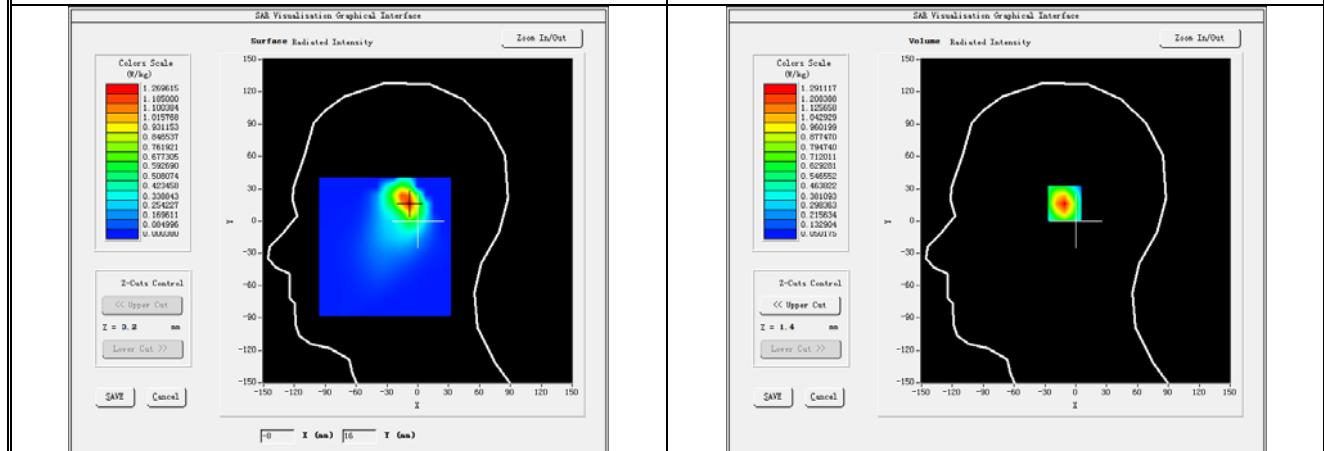
SURFACE SAR**VOLUME SAR**

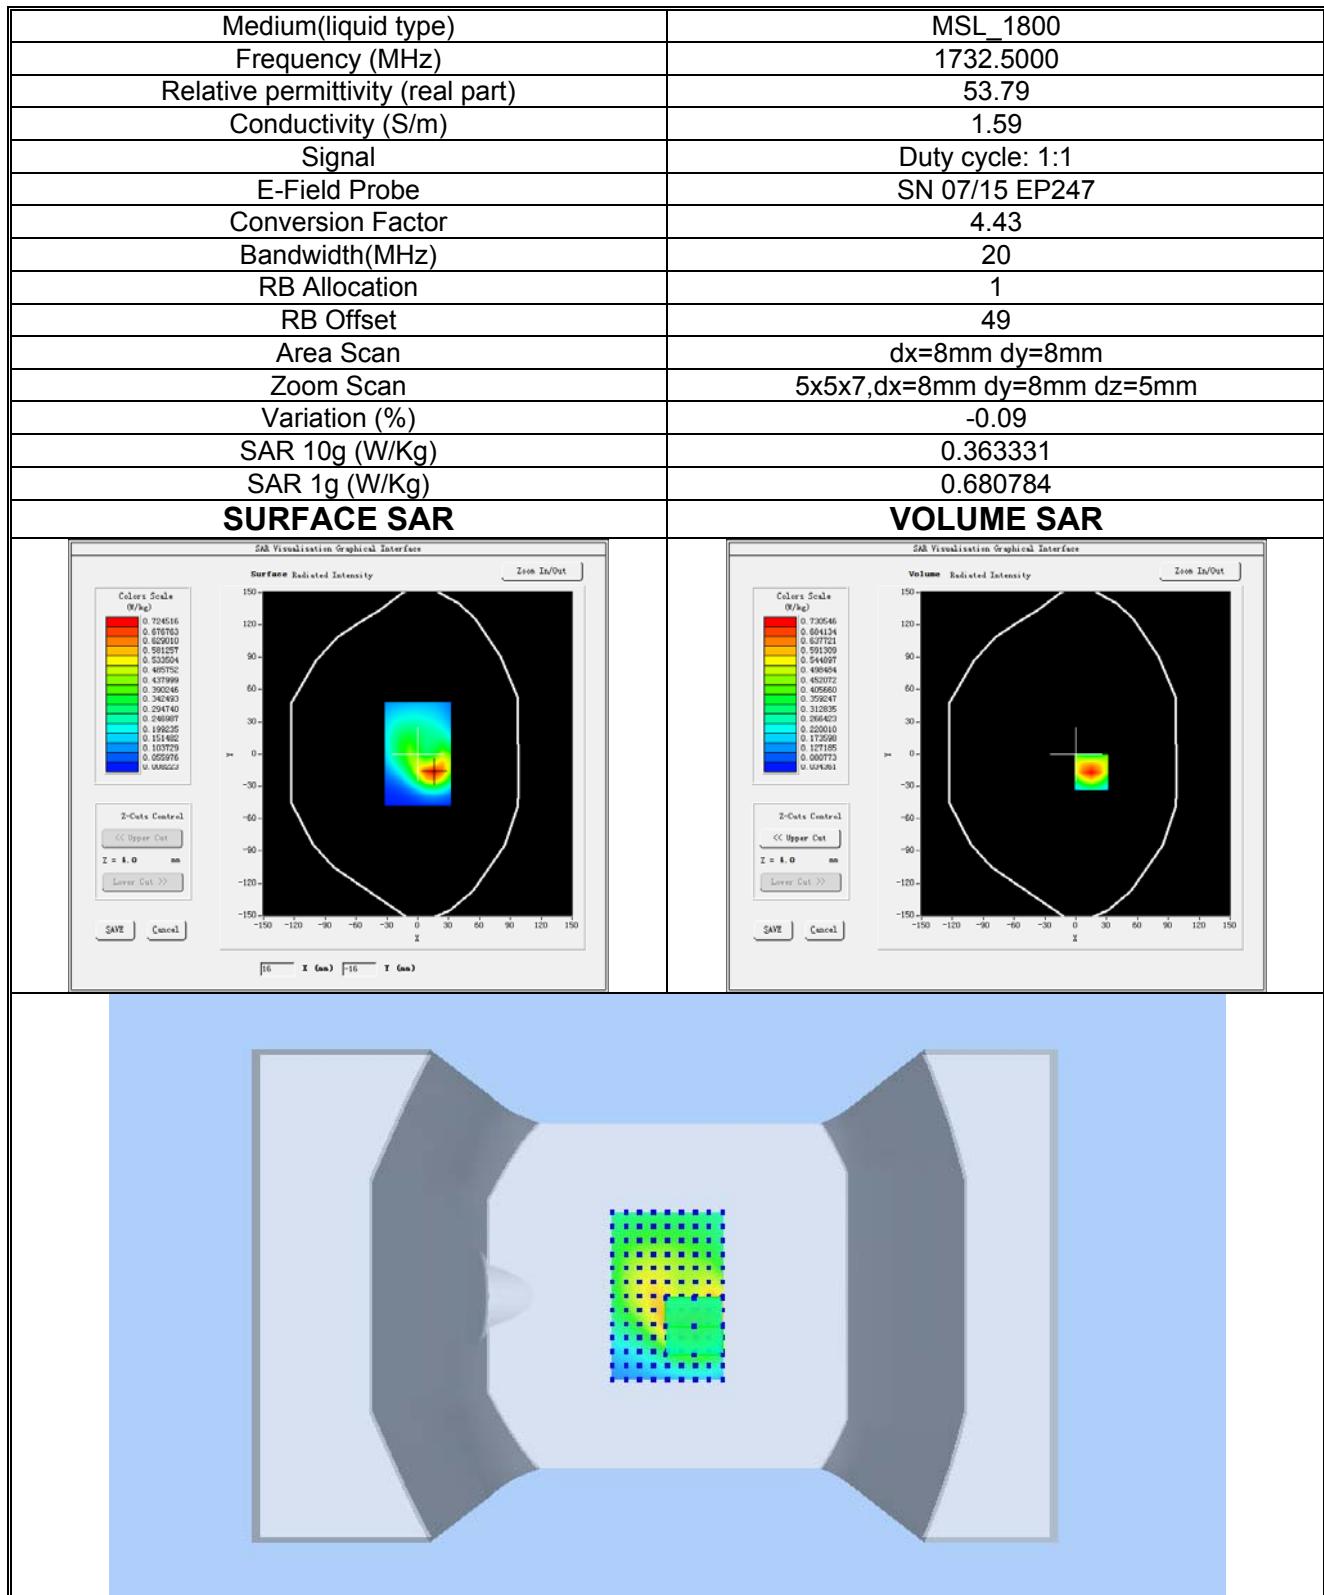
Plot 15:LTE BAND 2, Middle channel (Body-worn, Back Surface)**Product Description:Mobile Phone****Test Date: 2020-01-08**

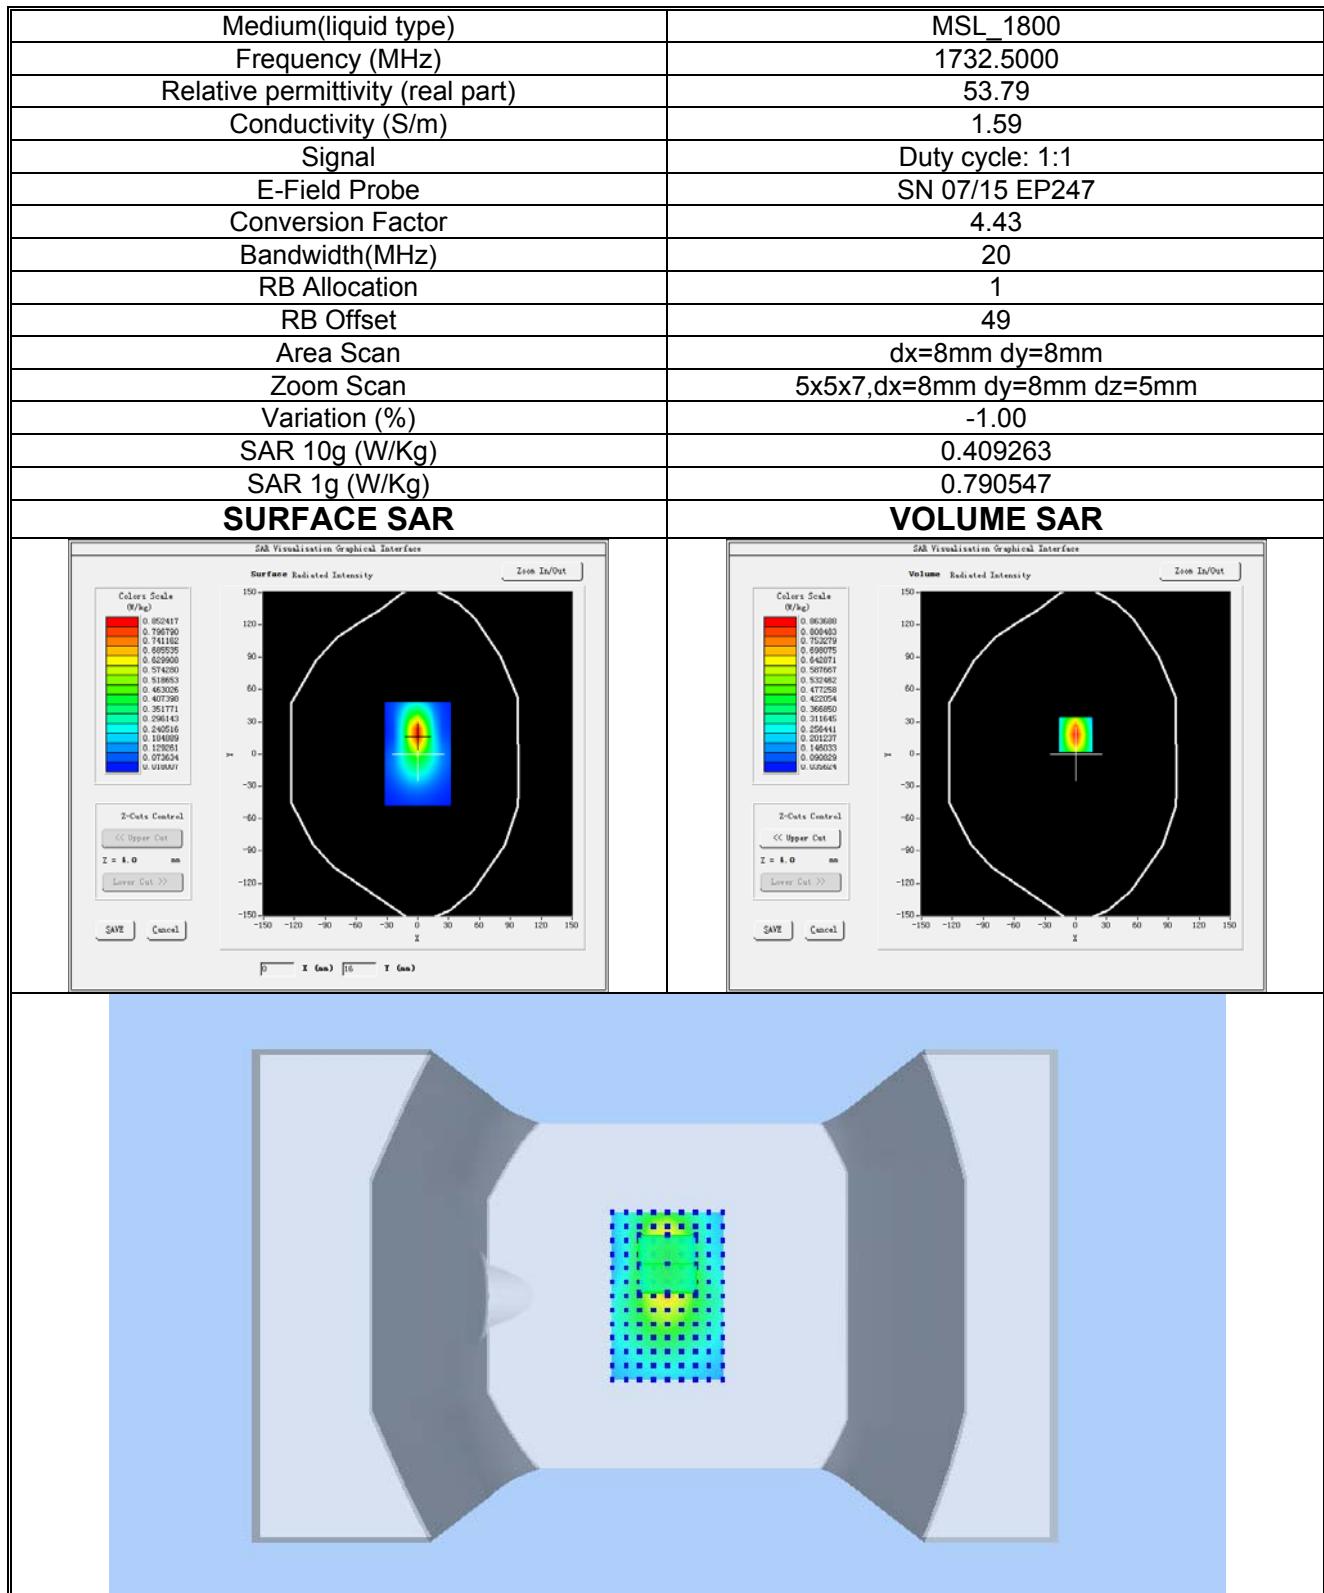
Plot 16:LTE BAND 2, Middle channel (Hotspot, Top Edge)**Product Description:Mobile Phone****Test Date: 2020-01-08**

Plot 17:LTE BAND 4, Middle channel (Left Head Tilt)**Product Description:Mobile Phone****Test Date: 2020-01-07**

| | |
|-----------------------------------|----------------------------|
| Medium(liquid type) | HSL_1800 |
| Frequency (MHz) | 1732.5000 |
| Relative permittivity (real part) | 41.14 |
| Conductivity (S/m) | 1.42 |
| Signal | Duty cycle: 1:1 |
| E-Field Probe | SN 07/15 EP247 |
| Conversion Factor | 4.29 |
| Bandwidth(MHz) | 20 |
| RB Allocation | 1 |
| RB Offset | 49 |
| Area Scan | dx=8mm dy=8mm |
| Zoom Scan | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%) | 0.07 |
| SAR 10g (W/Kg) | 0.599437 |
| SAR 1g (W/Kg) | 1.096192 |

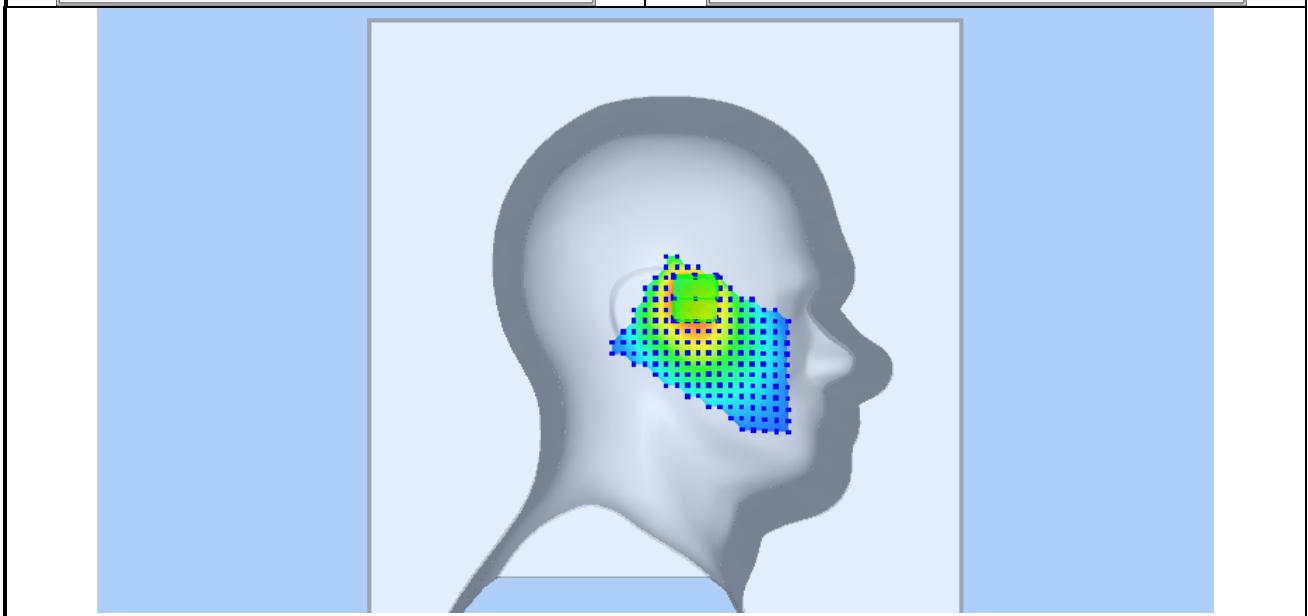
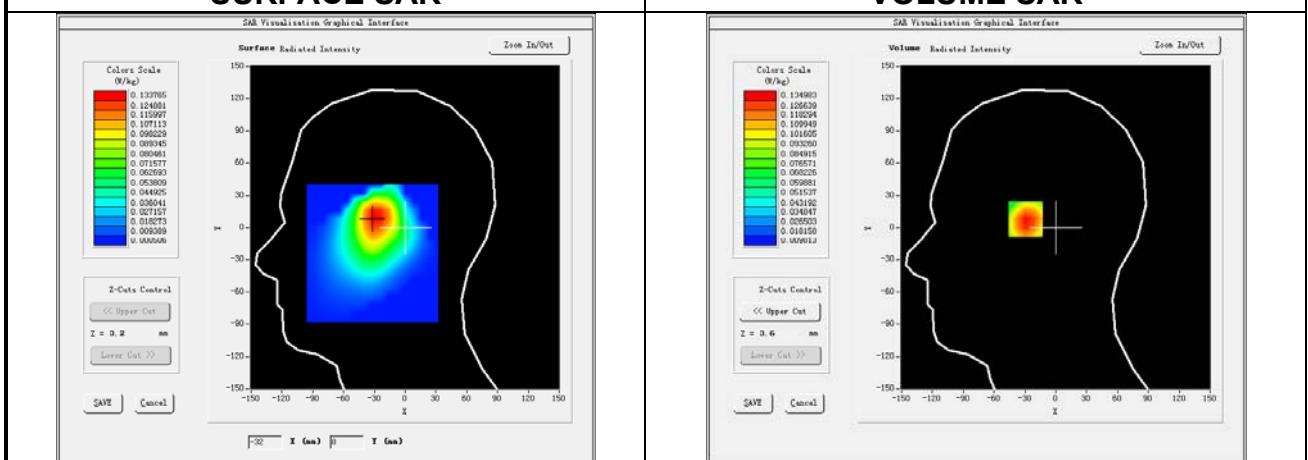
SURFACE SAR**VOLUME SAR**

Plot 18:LTE BAND 4, Middle channel (Body-worn, Back Surface)**Product Description:Mobile Phone****Test Date: 2020-01-07**

Plot 19:LTE BAND 4, Middle channel (Hotspot, Top Edge)**Product Description:Mobile Phone****Test Date: 2020-01-07**

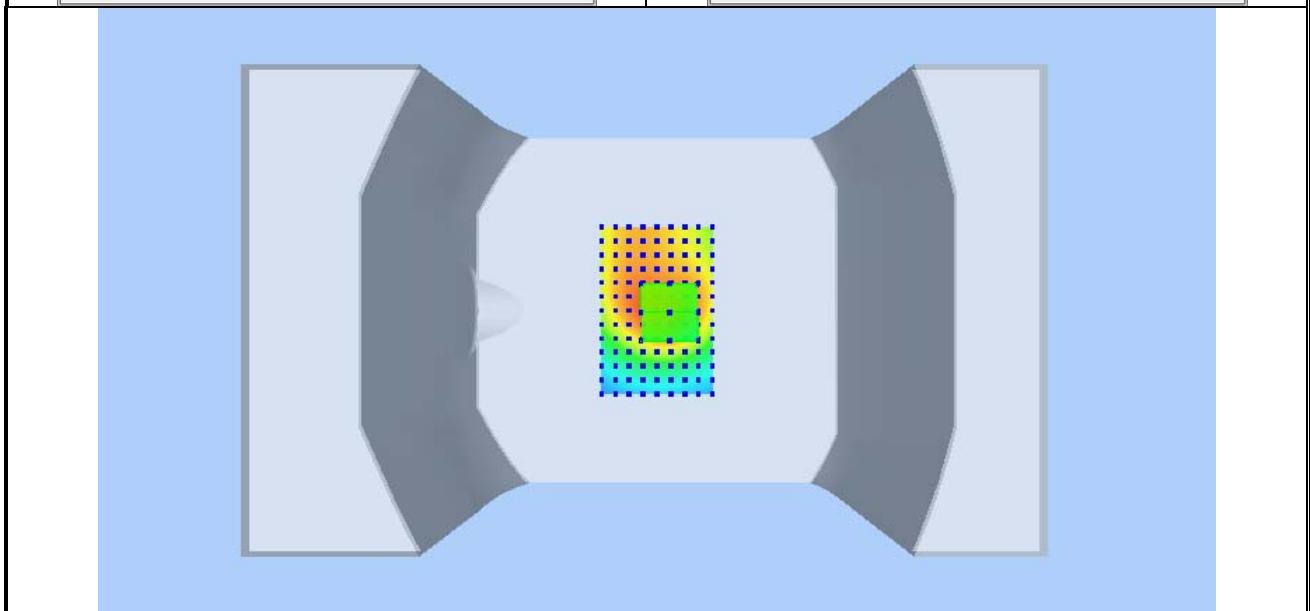
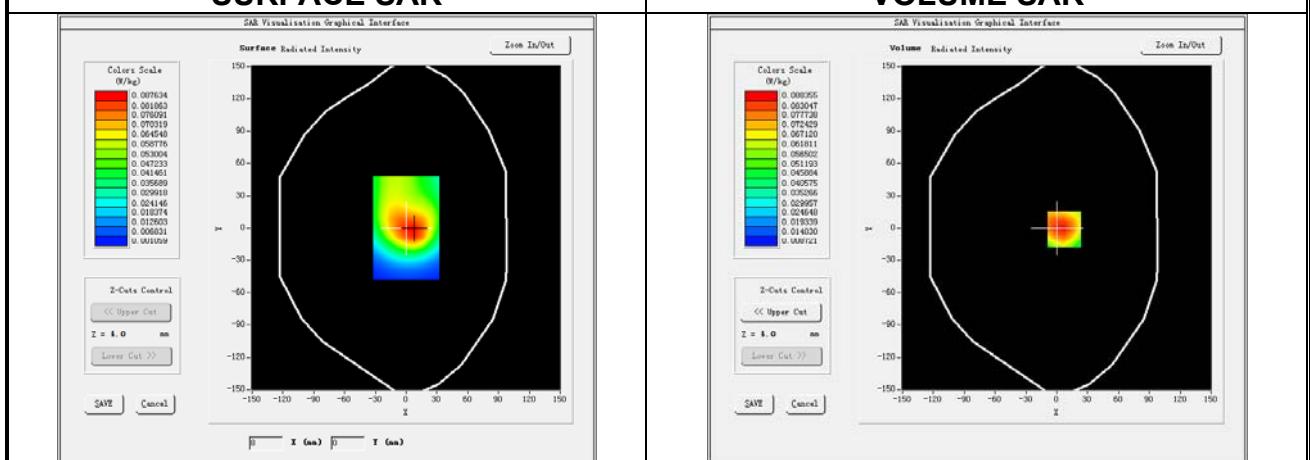
Plot 20: LTE BAND 5, Middle channel (Left Head Cheek)**Product Description: Mobile Phone****Test Date: 2019-12-18**

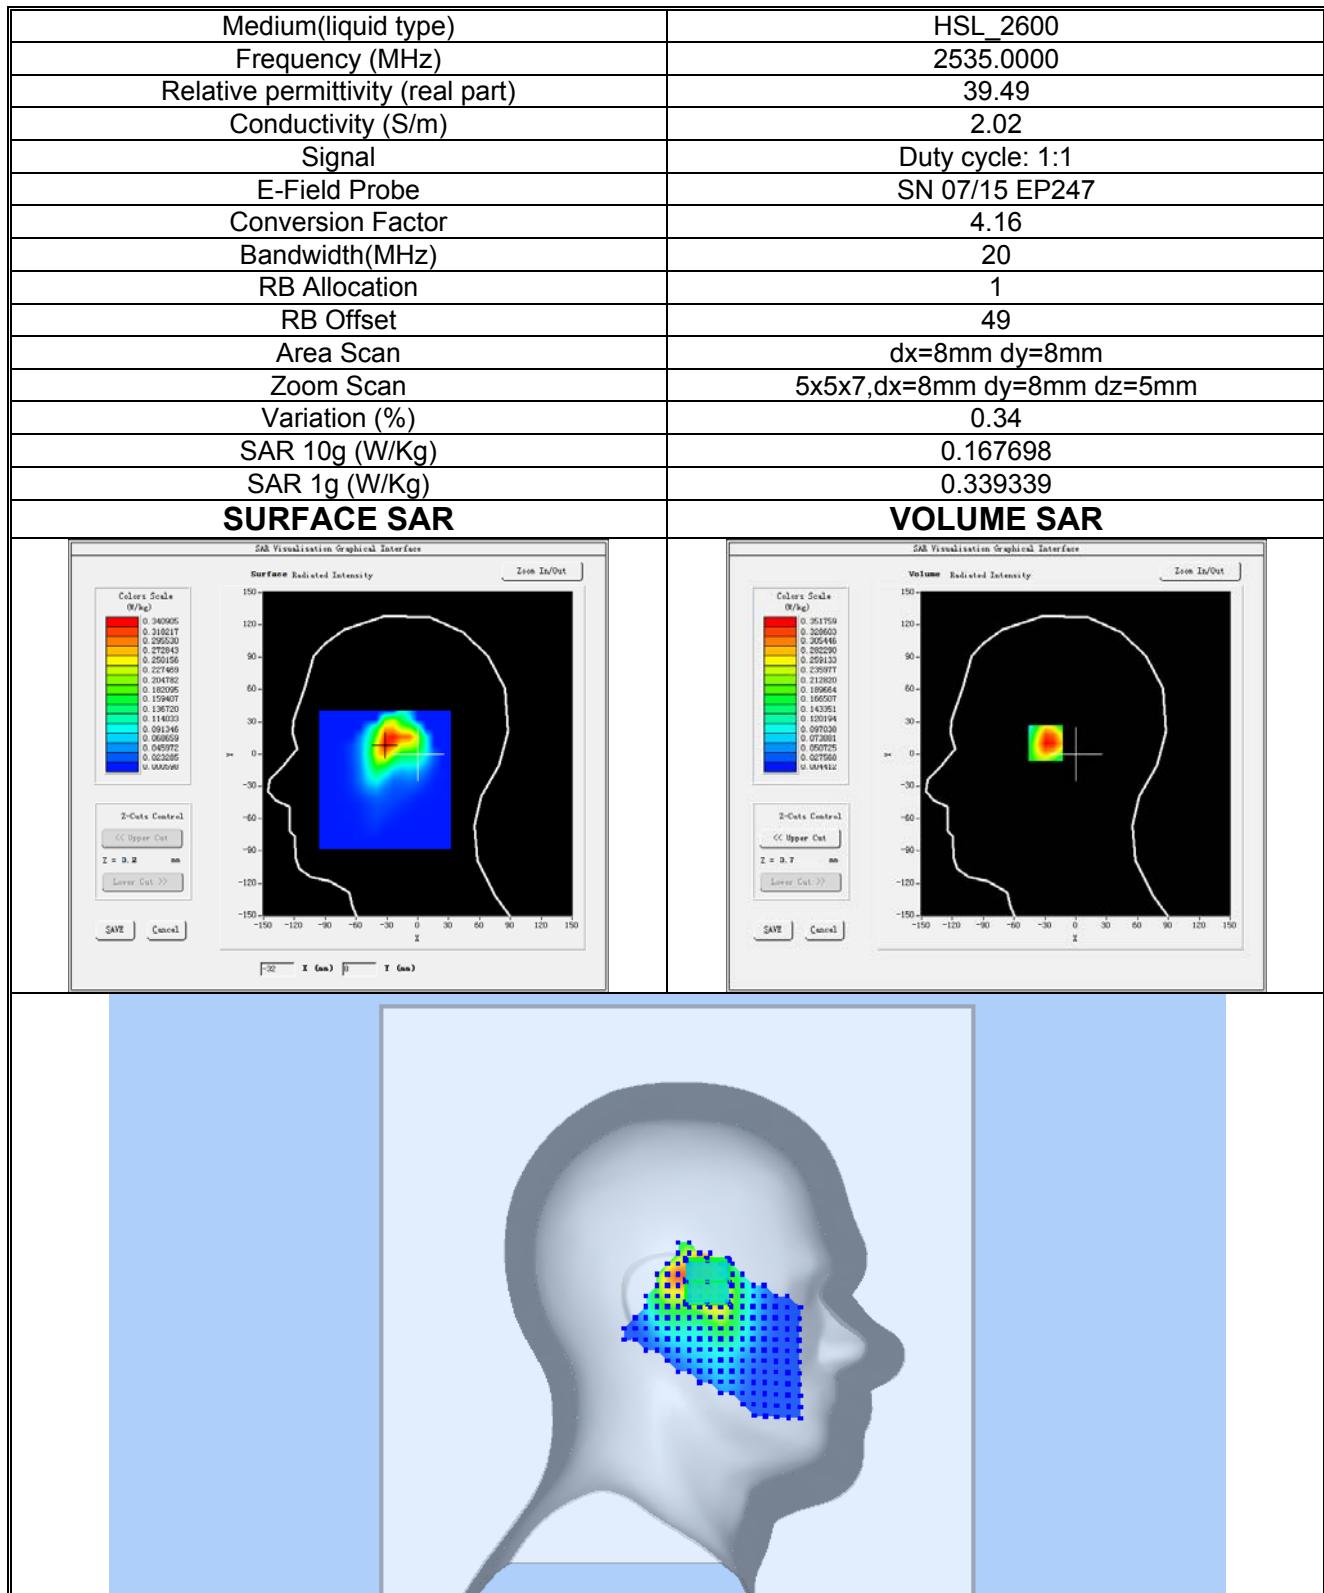
| | |
|-----------------------------------|----------------------------|
| Medium(liquid type) | HSL_850 |
| Frequency (MHz) | 836.5000 |
| Relative permittivity (real part) | 42.03 |
| Conductivity (S/m) | 0.89 |
| Signal | Duty cycle: 1:1 |
| E-Field Probe | SN 07/15 EP247 |
| Conversion Factor | 4.99 |
| Bandwidth(MHz) | 10 |
| RB Allocation | 1 |
| RB Offset | 49 |
| Sensor-Surface | 4mm |
| Area Scan | dx=8mm dy=8mm |
| Zoom Scan | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%) | -1.06 |
| SAR 10g (W/Kg) | 0.091207 |
| SAR 1g (W/Kg) | 0.130048 |

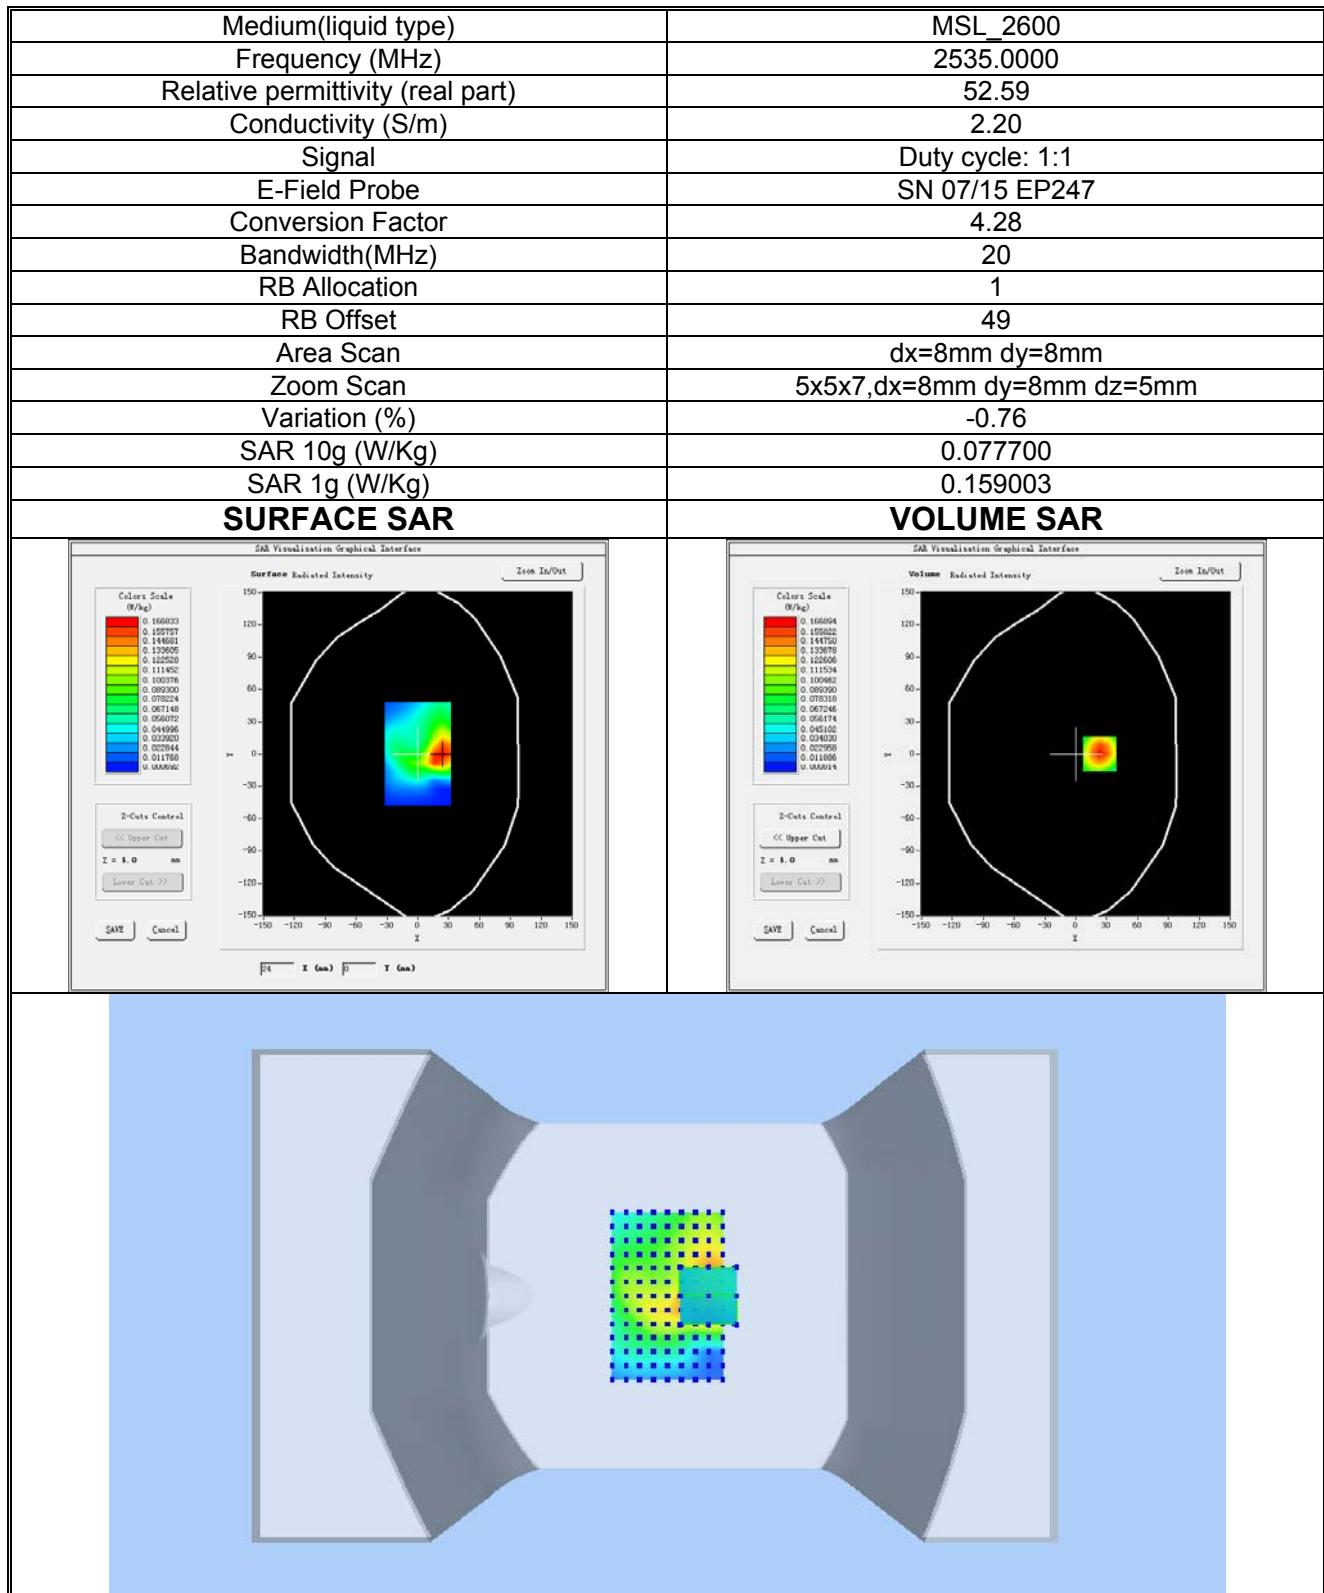
SURFACE SAR**VOLUME SAR**

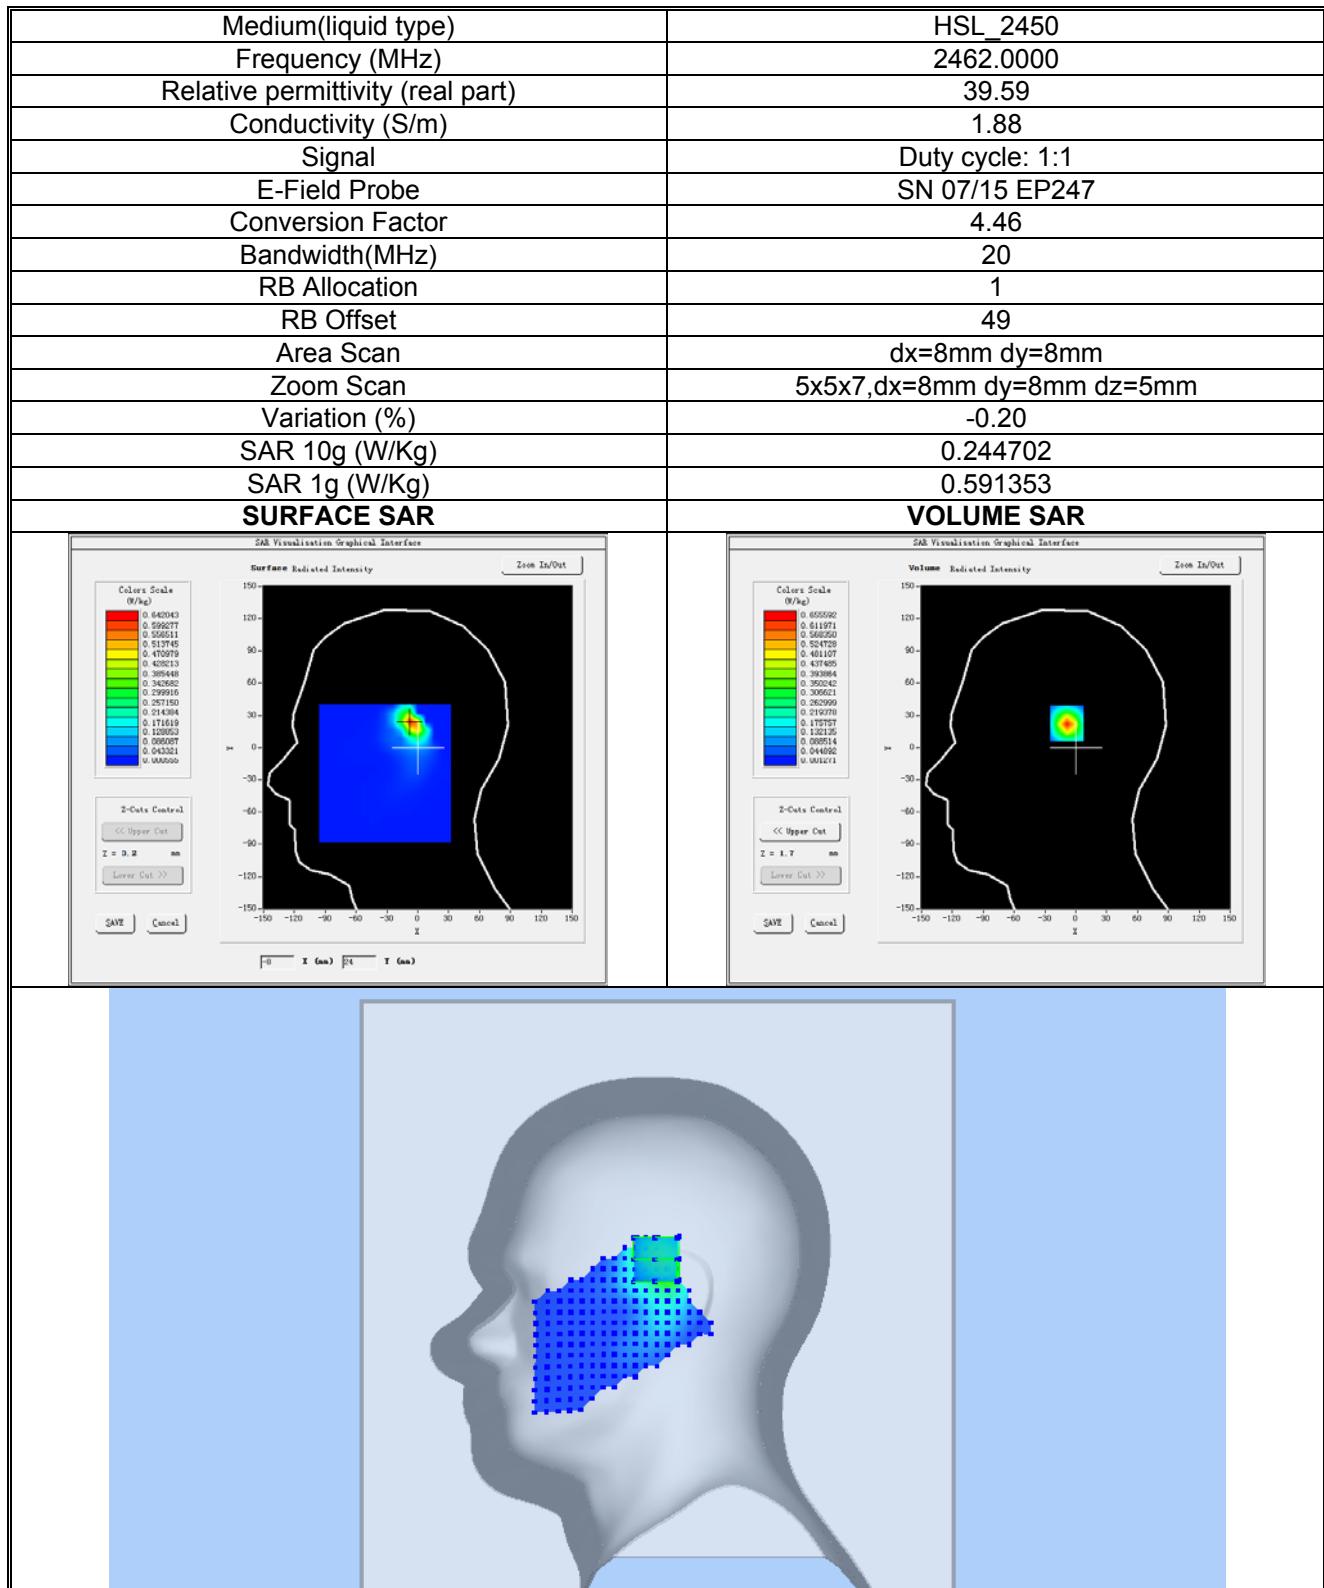
Plot 21: LTE BAND 5, Middle channel (Body-worn/Hotspot, Back Surface)**Product Description: Mobile Phone****Test Date: 2019-12-18**

| | |
|-----------------------------------|----------------------------|
| Medium(liquid type) | MSL_850 |
| Frequency (MHz) | 836.50000 |
| Relative permittivity (real part) | 55.15 |
| Conductivity (S/m) | 1.00 |
| Signal | Duty cycle: 1:1 |
| E-Field Probe | SN 07/15 EP247 |
| Conversion Factor | 5.18 |
| Bandwidth(MHz) | 10 |
| RB Allocation | 1 |
| RB Offset | 49 |
| Sensor-Surface | 4mm |
| Area Scan | dx=8mm dy=8mm |
| Zoom Scan | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%) | -0.40 |
| SAR 10g (W/Kg) | 0.057560 |
| SAR 1g (W/Kg) | 0.084785 |

SURFACE SAR**VOLUME SAR**

Plot 22:LTE BAND 7, Middle channel (Left Head Cheek)**Product Description: Mobile Phone****Test Date: 2020-01-08**

Plot 23:LTE BAND 7, Middle channel (Body-worn/ Hotspot, Back Surface)**Product Description: Mobile Phone****Test Date: 2020-01-08**

Plot 24:802.11b, High channel (Right Head Tilt)**Product Description: Mobile Phone****Test Date: 2020-01-06**

Plot 24:802.11b, High channel (Body-worn/Hotspot, Back Surface)**Product Description: Mobile Phone****Test Date: 2020-01-06**