


FCC SAR Test Report

APPLICANT : LC Future Center Limited Taiwan Branch
EQUIPMENT : Notebook
BRAND NAME : Lenovo
MODEL NAME : TP00086B
FCC ID : 2AJN7-TP00086B
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

Equipment: Fibocom L850-GL and Intel 8265NGW tested inside of Lenovo Notebook

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Applied.....	5
4. Equipment Under Test (EUT) Information.....	6
4.1 General Information	6
4.2 General LTE SAR Test and Reporting Considerations.....	8
5. Proximity Sensor Triggering Test.....	11
6. RF Exposure Limits.....	13
6.1 Uncontrolled Environment.....	13
6.2 Controlled Environment.....	13
7. Specific Absorption Rate (SAR).....	14
7.1 Introduction	14
7.2 SAR Definition.....	14
8. System Description and Setup	15
8.1 E-Field Probe	16
8.2 Data Acquisition Electronics (DAE)	16
8.3 Phantom.....	17
8.4 Device Holder.....	18
9. Measurement Procedures	19
9.1 Spatial Peak SAR Evaluation.....	19
9.2 Power Reference Measurement.....	20
9.3 Area Scan	20
9.4 Zoom Scan.....	21
9.5 Volume Scan Procedures.....	21
9.6 Power Drift Monitoring.....	21
10. Test Equipment List.....	22
11. System Verification	23
11.1 Tissue Simulating Liquids	23
11.2 Tissue Verification	24
11.3 System Performance Check Results	25
12. Conducted RF Output Power (Unit: dBm).....	26
13. Antenna Location	86
14. SAR Test Results	87
14.1 Body SAR	89
14.2 Repeated SAR Measurement	93
15. Simultaneous Transmission Analysis.....	94
15.1 Body Exposure Conditions	95
15.2 SPLSR Evaluation and Analysis.....	96
16. Uncertainty Assessment	120
17. References.....	120
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA7O2534-06	Rev. 01	Initial issue of report	Feb. 01, 2018

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for LC Future Center Limited Taiwan Branch, Notebook, TP00086B, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary	Highest Simultaneous Transmission 1g SAR (W/kg)
		Body	
		1g SAR (W/kg)	
Licensed	WCDMA II	1.19	1.58
	WCDMA IV	1.17	
	WCDMA V	1.16	
	LTE Band 2	1.06	
	LTE Band 5	1.14	
	LTE Band 7	1.12	
	LTE Band 12 / 17	1.10	
	LTE Band 13	1.17	
	LTE Band 26	1.13	
	LTE Band 30	1.16	
	LTE Band 41	1.07	
	LTE Band 4 / 66	1.06	
DTS	2.4GHz WLAN	0.91	1.58
NII	5GHz WLAN	1.16	1.58
DSS	Bluetooth	0.13	1.58
Date of Testing:		2017/11/6 ~ 2017/12/29	
Remark : This device supports LTE B4/B12/B17/B66.Since the supported frequency span for LTE B4/B17 falls completely within the supports frequency span for LTE B66/B12, these LTE bands have the same target power, and these LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B66/B12.			

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

2. Administration Data

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	LC Future Center Limited Taiwan Branch
Address	7F., No.780, Bei'an Rd., Zhongshan Dist., Taipei City 104, Taiwan (R.O.C.)

Manufacturer	
Company Name	LC Future Center Limited Taiwan Branch
Address	7F., No.780, Bei'an Rd., Zhongshan Dist., Taipei City 104, Taiwan (R.O.C.)

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Notebook
Brand Name	Lenovo
Model Name	TP00086B
FCC ID	2AJN7-TP00086B
S/N	PF-0UA0AZ
Integrated WWAN module	Brand Name: Fibocom Model Name: L850-GL
Integrated WLAN module	Brand Name: Intel Model Name: 8265NGW
Wireless Technology and Frequency Range	WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 30: 2307.5 MHz ~ 2312.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2472 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	RMC 12.2Kbps HSDPA HSUPA DC-HSDPA LTE: QPSK, 16QAM WLAN 2.4GHz : 802.11b/g/n HT20/HT40 WLAN 5GHz : 802.11a/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE/HS
EUT Stage	Production Unit
Remark: 1. For WWAN RF exposure evaluation is selected antenna vendor of "Amphenol" as the main tested and spot check antenna vendor of "Speedwire" to ensure both antenna vendors are compliant with the FCC limit. 2. For WLAN RF exposure evaluation is selected antenna vendor of "Amphenol" as the main tested and spot check antenna vendor of "Speedwire" to ensure both antenna vendors are compliant with the FCC limit.	

WWAN Antenna Information				
Antenna 1	Manufacturer	Amphenol	Peak gain(dBi)	2.99
	Part number	LX-8905-16-000-C	Type	PIFA
Antenna 2	Manufacturer	Speedwire	Peak gain(dBi)	2.72
	Part number	F.0G.ZV-0006-006-00	Type	PIFA

WLAN Antenna Information			
Antenna 1	Manufacturer	Amphenol	
	Antenna Type	Main:PIFA Antenna	Aux:PIFA Antenna
	Part number	LX7847-16-000-C	LX7848-16-000-C
	Peak gain(dBi)	Main Antenna :	Aux Antenna :
		WLAN(2.4G):1.63	WLAN(2.4G):1.97 BT :1.97
		WLAN(5G B1-3):2.93 WLAN(5G B4):2.99	WLAN(5G B1-3):2.97 WLAN(5G B4):1.47
Antenna 2	Manufacturer	Speedwire	
	Antenna Type	Main:PIFA Antenna	Aux:PIFA Antenna
	Part number	F.0G.ZV-0006-003-00	F.0G.ZV-0006-004-00
	Peak gain(dBi)	Main Antenna :	Aux Antenna :
		WLAN(2.4G):1.44	WLAN(2.4G):1.86 BT :1.86
		WLAN(5G B1-3):2.44 WLAN(5G B4):2.37	WLAN(5G B1-3):1.61 WLAN(5G B4):2.35

4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05									
FCC ID		2AJN7-TP00086B							
Equipment Name		Notebook							
Operating Frequency Range of each LTE transmission band		LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 30: 2307.5 MHz ~ 2312.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHzLTE Band 66: 1710.7 MHz ~ 1779.3 MHz							
Channel Bandwidth		LTE Band 02:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 04:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 05:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 07: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 30: 5MHz, 10MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz							
uplink modulations used		QPSK / 16QAM							
LTE Voice / Data requirements		Data only							
Release / Category		Rel 11 / cat.9							
LTE MPR permanently built-in by design		Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3							
		Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})					MPR (dB)	
			1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz		20 MHz
		QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
		16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
		16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
		64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
		64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
		256 QAM	≥ 1					≤ 5	
LTE A-MPR		In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)							
Spectrum plots for RB configuration		A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.							
Power reduction applied to satisfy SAR compliance		Yes, Proximity Sensor.							
LTE Carrier Aggregation Combinations		Inter-Band and Intra-Band possible combinations as below page and the detail power verification please referred to section 12.							
LTE Carrier Aggregation Additional Information		This device does not support full CA features on 3GPP Release 11. It supports a maximum of 3 carriers in the downlink only. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. Due to carrier capability, only the combinations listed above are supported. The following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.							



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450		829			
M	20525	836.5	20525	836.5	20525	836.5	20525		836.5			
H	20643	848.3	20635	847.5	20625	846.5	20600		844			
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850		2510			
M	21100	2535	21100	2535	21100	2535	21100		2535			
H	21425	2567.5	21400	2565	21375	2562.5	21350		2560			
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060		704			
M	23095	707.5	23095	707.5	23095	707.5	23095		707.5			
H	23173	715.3	23165	714.5	23155	713.5	23130		711			
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #				Freq.(MHz)			
L	23205		779.5		23230				782			
M	23230		782									
H	23255		784.5									


LTE Band 17												
	Bandwidth 5 MHz					Bandwidth 10 MHz						
	Channel #		Freq.(MHz)			Channel #			Freq. (MHz)			
L	23755		706.5			23780			709			
M	23790		710			23790			710			
H	23825		713.5			23800			711			
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 30												
	Bandwidth 5 MHz					Bandwidth 10 MHz						
	Channel #		Freq.(MHz)			Channel #			Freq.(MHz)			
L	27685		2307.5			27710			2310			
M	27710		2310									
H	27735		2312.5									
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
L M	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
H M	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770

5. Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance (KDB 616217 D04 section 6.2)>:

Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed. The details are illustrated in the exhibit “P-Sensor operational description”, and the shortest triggering distances were reported and used for SAR assessment.

In the preliminary triggering distance testing, the tissue-equivalent medium for different frequency bands were used for verification; no other frequency bands tissue-equivalent medium was found to result in shortest triggering distance than that for 1900MHz, and the tissue-equivalent medium for 1900MHz was used for formal proximity sensor triggering testing.

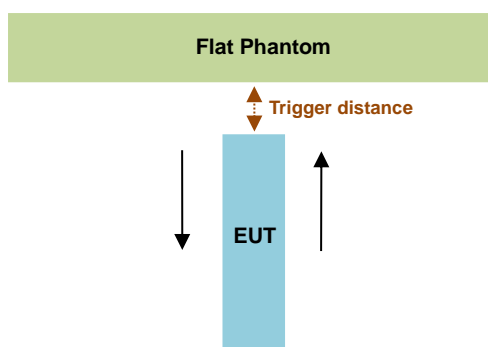

Proximity Sensor Trigger Distance (mm)	
Position	Bottom of Laptop
Minimum	11

<Proximity Sensor Triggering Coverage (KDB 616217 D04 section 6.3)>:

If a sensor is spatially offset from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. For p-sensor coverage testing, the device is moved and “along the direction of maximum antenna and sensor offset”.

Illustrated in the internal photo exhibit, although the sensor is spatially offset, there is no trigger condition where the antenna is next to the user but the sensor is laterally further away, therefore proximity sensor coverage testing is not required.


This procedure is not required because antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

Proximity sensor power reduction

Exposure Position / wireless mode	Bottom of Laptop ⁽¹⁾
WCDMA Band II	7.5 dB
WCDMA Band IV	7.5 dB
WCDMA Band V	4.5 dB
LTE Band 2	7.0 dB
LTE Band 4	7.0 dB
LTE Band 5	5.0 dB
LTE Band 7	5.0 dB
LTE Band 12	3.0 dB
LTE Band 13	4.0 dB
LTE Band 17	3.0 dB
LTE Band 26	4.0 dB
LTE Band 30	3.0 dB
LTE Band 41	3.0 dB
LTE Band 66	7.0 dB

Remark:

- ⁽¹⁾: Reduced maximum limit applied by activation of proximity sensor and G-Sensor.
- Power reduction is not applicable for WLAN and Bluetooth.
- Tests were performed in accordance with KDB 616217 D04 section 6.1, 6.2, 6.3, 6.4 and 6.5 and compliant results are shown and described in exhibit "P-Sensor operational description"
- For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed:
 - Bottom of Laptop: [10 mm](#)
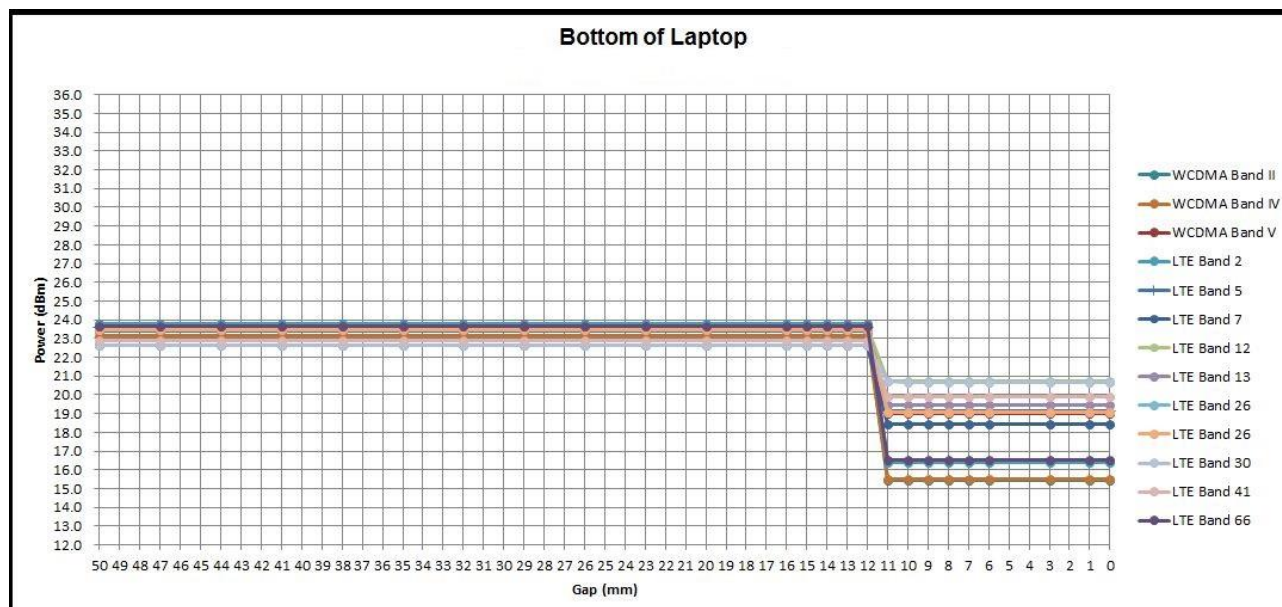
<Sensor triggers distance V.S Measure power>


6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

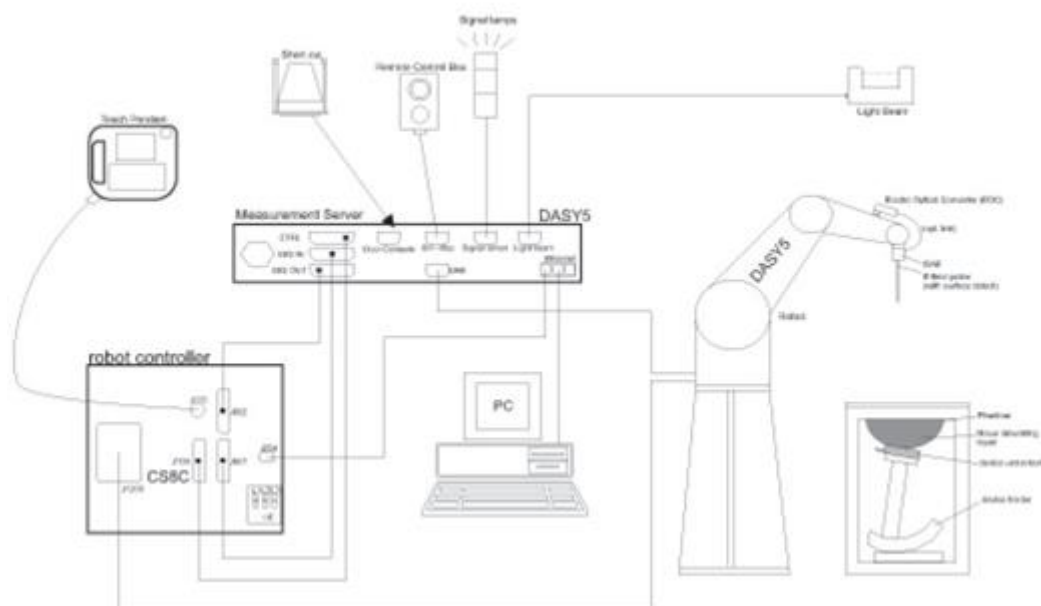


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.


8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE


8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

**10. Test Equipment List**

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1012	May. 22, 2017	May. 21, 2018
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 21, 2017	Mar. 20, 2018
SPEAG	1750MHz System Validation Kit	D1750V2	1023	Jun. 27, 2017	Jun. 26, 2018
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Sep. 28, 2017	Sep. 27, 2018
SPEAG	2300MHz System Validation Kit	D2300V2	1006	Jan. 25, 2017	Jan. 24, 2018
SPEAG	2450MHz System Validation Kit	D2450V2	736	Sep. 18, 2017	Sep. 17, 2018
SPEAG	2600MHz System Validation Kit	D2600V2	1008	Sep. 18, 2017	Sep. 17, 2018
SPEAG	5GHz System Validation Kit	D5GHzV2	1171	Jul. 18, 2017	Jul. 17, 2018
SPEAG	Data Acquisition Electronics	DAE4	1424	Feb. 16, 2017	Feb. 15, 2018
SPEAG	Data Acquisition Electronics	DAE3	495	May. 22, 2017	May. 21, 2018
SPEAG	Data Acquisition Electronics	DAE3	393	Aug. 10, 2017	Aug. 09, 2018
SPEAG	Data Acquisition Electronics	DAE4	854	May. 02, 2017	May. 01, 2018
SPEAG	Dosimetric E-Field Probe	EX3DV4	3976	Feb. 21, 2017	Feb. 20, 2018
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	May. 24, 2017	May. 23, 2018
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Sep. 29, 2017	Sep. 28, 2018
SPEAG	Dosimetric E-Field Probe	ES3DV3	3169	May. 11, 2017	May. 10, 2018
WonDer	Thermometer	WD-5016	TM281-1	Mar. 17, 2017	Mar. 16, 2018
WonDer	Thermometer	WD-5016	TM281-2	Mar. 17, 2017	Mar. 16, 2018
TECPEL	Thermometer	UL-A03	TM225-1	Mar. 21, 2017	Mar. 20, 2018
TECPEL	Thermometer	UL-A03	TM225-2	Mar. 21, 2017	Mar. 20, 2018
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Apr. 20, 2017	Apr. 19, 2018
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 30, 2017	May. 29, 2018
R&S	BT Base Station	CBT32	100522	Mar. 14, 2017	Mar. 13, 2018
SPEAG	Device Holder	N/A	N/A	N/A	N/A
R&S	Signal Generator	SMA100A	101091	Jul. 06, 2017	Jul. 05, 2018
Agilent	ENA Network Analyzer	E5071C	MY46104758	Aug. 24, 2017	Aug. 23, 2018
SPEAG	Dielectric Probe Kit	DAK-3.5	1146	Jul. 18, 2017	Jul. 17, 2018
LINE SEIKI	Digital Thermometer	LKMelectronic	DTM3000SPEZIAL	Sep. 06, 2017	Sep. 05, 2018
Anritsu	Power Meter	ML2495A	1419002	May. 15, 2017	May. 14, 2018
Anritsu	Power Sensor	MA2411B	1339124	May. 15, 2017	May. 14, 2018
Anritsu	Power Meter	ML2495A	1218006	Oct. 06, 2017	Oct. 05, 2018
Anritsu	Power Sensor	MA2411B	1207363	Oct. 06, 2017	Oct. 05, 2018
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 23, 2017	Aug. 22, 2018
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 26, 2017	Jun. 25, 2018
Mini-Circuits	Power Amplifier	ZVE-8G+	D120604	Mar. 09, 2017	Mar. 08, 2018
Mini-Circuits	Power Amplifier	ZHL-42W+	QA1344002	Mar. 09, 2017	Mar. 08, 2018
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

- Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

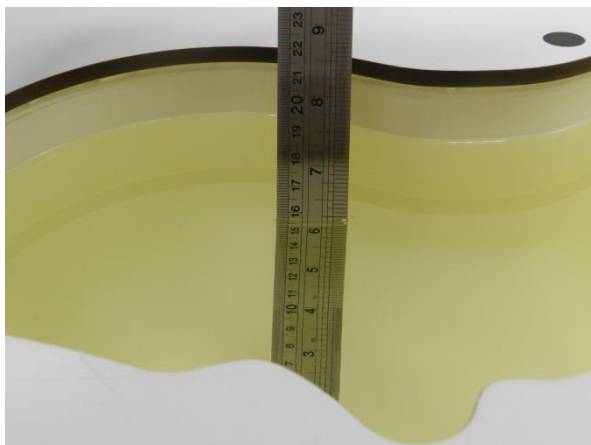


Fig 10.1 Photo of Liquid Height for Head SAR



Fig 10.2 Photo of Liquid Height for Body SAR

11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	MSL	22.4	0.969	55.292	0.96	55.50	0.94	-0.37	±5	2017/12/28
835	MSL	22.6	0.975	57.194	0.97	55.20	0.52	3.61	±5	2017/12/28
1750	MSL	22.6	1.452	53.550	1.49	53.40	-2.55	0.28	±5	2017/12/26
1900	MSL	22.2	1.552	55.169	1.52	53.30	2.11	3.51	±5	2017/12/27
2300	MSL	22.6	1.812	54.391	1.81	52.90	0.11	2.82	±5	2017/12/27
2450	MSL	22.6	1.957	51.524	1.95	52.70	0.36	-2.23	±5	2017/11/8
2450	MSL	22.6	1.957	51.524	1.95	52.70	0.36	-2.23	±5	2017/11/8
2600	MSL	22.7	2.232	52.761	2.16	52.50	3.33	0.50	±5	2017/12/29
2600	MSL	22.7	2.232	52.761	2.16	52.50	3.33	0.50	±5	2017/12/29
5250	MSL	22.5	5.258	47.126	5.36	48.95	-1.90	-3.73	±5	2017/11/6
5250	MSL	22.6	5.533	49.357	5.36	48.95	3.23	0.83	±5	2017/11/9
5600	MSL	22.6	5.987	48.739	5.77	48.50	3.76	0.49	±5	2017/11/9
5750	MSL	22.6	6.200	48.490	5.94	48.28	4.38	0.43	±5	2017/11/9

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2017/12/28	750	MSL	250	D750V3-1012	EX3DV4 - SN3976	DAE4 Sn1424	2.20	8.71	8.80	1.03
2017/12/28	835	MSL	250	D835V2-499	EX3DV4 - SN3976	DAE4 Sn1424	2.51	9.67	10.04	3.83
2017/12/26	1750	MSL	250	D1750V2-1023	EX3DV4 - SN3976	DAE4 Sn1424	9.64	36.90	38.56	4.50
2017/12/27	1900	MSL	250	D1900V2-5d041	EX3DV4 - SN3976	DAE4 Sn1424	9.86	40.70	39.44	-3.10
2017/12/27	2300	MSL	250	D2300V2-1006	EX3DV4 - SN3931	DAE3 Sn393	12.20	47.90	48.80	1.88
2017/11/8	2450	MSL	250	D2450V2-736	EX3DV4 - SN3925	DAE4 Sn854	13.20	50.80	52.80	3.94
2017/11/8	2450	MSL	250	D2450V2-736	ES3DV3 - SN3169	DAE3 Sn495	12.20	50.80	48.80	-3.94
2017/12/29	2600	MSL	250	D2600V2-1008	EX3DV4 - SN3976	DAE4 Sn1424	13.90	55.00	55.60	1.09
2017/12/29	2600	MSL	250	D2600V2-1008	EX3DV4 - SN3931	DAE3 Sn393	14.30	55.00	57.20	4.00
2017/11/6	5250	MSL	100	D5GHzV2-1171	EX3DV4 - SN3976	DAE4 Sn1424	8.07	78.10	80.70	3.33
2017/11/9	5250	MSL	100	D5GHzV2-1171	EX3DV4 - SN3931	DAE3 Sn393	8.29	78.10	82.90	6.15
2017/11/9	5600	MSL	100	D5GHzV2-1171	EX3DV4 - SN3931	DAE3 Sn393	8.31	81.00	83.10	2.59
2017/11/9	5750	MSL	100	D5GHzV2-1171	EX3DV4 - SN3931	DAE3 Sn393	7.57	78.70	75.70	-3.81

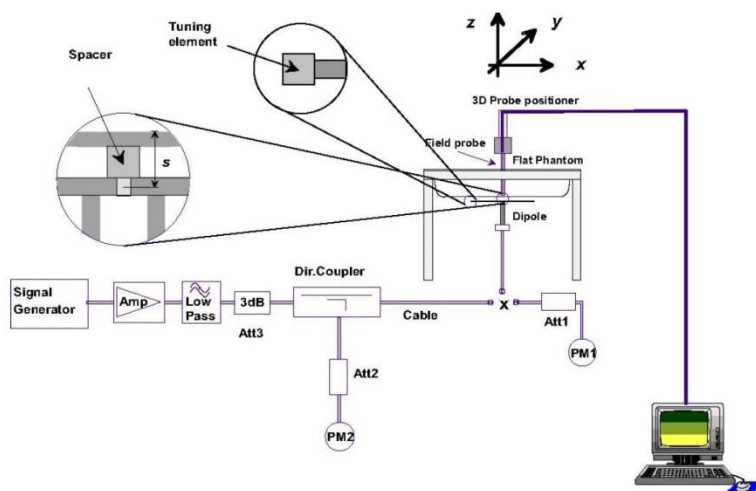


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

12. Conducted RF Output Power (Unit: dBm)

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_d/\beta_c = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Cycle to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

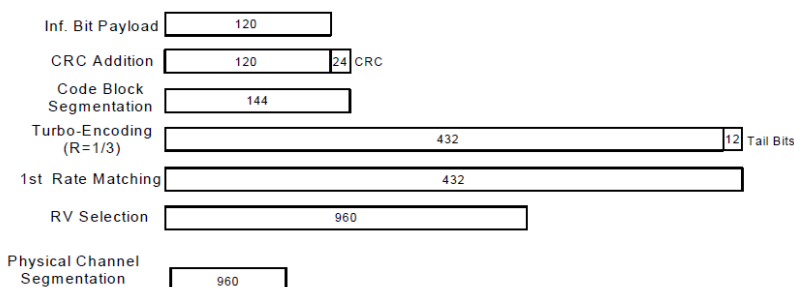


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

<Default Power Mode>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	RMC 12.2Kbps	23.38	23.43	23.18	24.50	23.10	23.13	23.07	24.50	23.57	23.55	23.76	24.50
3GPP Rel 6	HSDPA Subtest-1	23.23	23.31	23.06	24.50	22.84	23.02	23.05	24.50	23.04	23.06	23.20	24.50
3GPP Rel 6	HSDPA Subtest-2	22.37	22.37	22.07	23.50	21.89	22.04	22.19	23.50	22.08	22.52	22.15	23.50
3GPP Rel 6	HSDPA Subtest-3	21.88	21.89	21.58	23.00	21.41	21.53	21.68	23.00	21.57	22.07	21.67	23.00
3GPP Rel 6	HSDPA Subtest-4	21.57	21.65	21.32	23.00	21.14	21.29	21.42	23.00	21.35	21.83	21.46	23.00
3GPP Rel 8	DC-HSDPA Subtest-1	23.20	23.29	23.02	23.50	22.81	23.00	23.01	23.50	23.03	22.97	23.16	23.50
3GPP Rel 8	DC-HSDPA Subtest-2	22.35	22.28	22.02	23.50	21.85	22.01	22.16	23.50	22.00	22.48	22.11	23.50
3GPP Rel 8	DC-HSDPA Subtest-3	21.86	21.85	21.54	23.00	21.39	21.50	21.65	23.00	21.54	22.02	21.59	23.00
3GPP Rel 8	DC-HSDPA Subtest-4	21.54	21.63	21.28	23.00	21.11	21.26	21.39	23.00	21.25	21.75	21.39	23.00
3GPP Rel 6	HSUPA Subtest-1	22.31	22.36	22.12	23.50	21.99	22.09	22.15	23.50	22.08	22.54	22.05	23.50
3GPP Rel 6	HSUPA Subtest-2	20.07	20.15	19.87	21.50	19.73	19.86	19.96	21.50	19.87	20.30	19.82	21.50
3GPP Rel 6	HSUPA Subtest-3	20.85	20.84	20.56	22.50	20.53	20.62	20.67	22.50	20.63	21.03	20.56	22.50
3GPP Rel 6	HSUPA Subtest-4	20.40	20.39	20.11	21.50	19.97	20.06	20.19	21.50	20.08	20.58	20.17	21.50
3GPP Rel 6	HSUPA Subtest-5	22.40	22.40	22.20	23.50	22.00	22.10	22.20	23.50	22.10	22.60	22.20	23.50

<Reduced Power Mode>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	RMC 12.2Kbps	15.45	15.47	15.20	17.00	15.31	15.48	15.46	17.00	18.95	18.91	18.98	20.00
3GPP Rel 6	HSDPA Subtest-1	15.41	15.45	15.22	17.00	15.26	15.38	15.45	17.00	18.94	18.92	18.94	20.00
3GPP Rel 6	HSDPA Subtest-2	15.44	15.40	15.20	17.00	15.24	15.30	15.43	17.00	18.92	18.88	18.93	20.00
3GPP Rel 6	HSDPA Subtest-3	15.43	15.41	15.19	16.50	15.18	15.20	15.33	16.50	18.90	18.87	18.82	19.50
3GPP Rel 6	HSDPA Subtest-4	15.42	15.42	15.18	16.50	15.18	15.19	15.34	16.50	18.85	18.86	18.84	19.50
3GPP Rel 8	DC-HSDPA Subtest-1	15.44	15.36	15.17	17.00	15.27	15.31	15.37	17.00	18.90	18.88	18.85	20.00
3GPP Rel 8	DC-HSDPA Subtest-2	15.42	15.40	15.16	17.00	15.34	15.40	15.33	17.00	18.82	18.81	18.90	20.00
3GPP Rel 8	DC-HSDPA Subtest-3	15.33	15.45	15.13	16.50	15.14	15.12	15.32	16.50	18.82	18.80	18.80	19.50
3GPP Rel 8	DC-HSDPA Subtest-4	15.40	15.40	15.25	16.50	15.17	15.20	15.28	16.50	18.79	18.93	18.86	19.50
3GPP Rel 6	HSUPA Subtest-1	15.36	15.36	15.19	17.00	15.33	15.41	15.46	17.00	18.97	18.85	18.85	20.00
3GPP Rel 6	HSUPA Subtest-2	13.25	13.22	13.21	15.00	13.28	13.12	13.26	15.00	16.95	16.88	16.92	18.00
3GPP Rel 6	HSUPA Subtest-3	14.41	14.42	14.37	16.00	14.37	14.36	14.41	16.00	17.95	17.98	17.92	19.00
3GPP Rel 6	HSUPA Subtest-4	13.26	13.25	13.28	15.00	13.31	13.28	13.32	15.00	16.92	16.93	16.94	18.00
3GPP Rel 6	HSUPA Subtest-5	15.38	15.27	15.09	17.00	15.30	15.38	15.31	17.00	18.96	18.85	18.85	20.00

**<LTE Conducted Power>****General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 / B17 / B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 4/17 SAR test was covered by Band 66/12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

<Default Power Mode>
<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.72	23.75	23.77	24	0
20	QPSK	1	49	23.51	23.65	23.37		
20	QPSK	1	99	23.52	23.71	23.57		
20	QPSK	50	0	22.70	22.48	22.81	23	1
20	QPSK	50	24	22.51	22.40	22.77		
20	QPSK	50	50	22.47	22.48	22.76		
20	QPSK	100	0	22.63	22.64	22.87	23	1
20	16QAM	1	0	22.96	22.99	22.86		
20	16QAM	1	49	22.85	22.89	22.65		
20	16QAM	1	99	22.84	22.85	22.88	22	2
20	16QAM	50	0	21.74	21.75	21.56		
20	16QAM	50	24	21.56	21.82	21.43		
20	16QAM	50	50	21.52	21.87	21.49	22	2
20	16QAM	100	0	21.64	21.91	21.66		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	23.76	23.69	23.51	24	0
15	QPSK	1	37	23.66	23.76	23.43		
15	QPSK	1	74	23.40	23.76	23.55		
15	QPSK	36	0	22.70	22.73	22.38	23	1
15	QPSK	36	20	22.65	22.76	22.40		
15	QPSK	36	39	22.46	22.83	22.44		
15	QPSK	75	0	22.65	22.77	22.56	23	1
15	16QAM	1	0	22.93	22.98	22.71		
15	16QAM	1	37	22.93	22.95	22.61		
15	16QAM	1	74	22.64	22.99	22.76	22	2
15	16QAM	36	0	21.76	21.76	21.44		
15	16QAM	36	20	21.71	21.84	21.46		
15	16QAM	36	39	21.52	21.91	21.47	22	2
15	16QAM	75	0	21.67	21.82	21.61		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	23.74	23.72	23.50	24	0
10	QPSK	1	25	23.69	23.74	23.47		
10	QPSK	1	49	23.53	23.76	23.61		
10	QPSK	25	0	22.76	22.81	22.48	23	1
10	QPSK	25	12	22.68	22.84	22.50		
10	QPSK	25	25	22.65	22.90	22.64		
10	QPSK	50	0	22.64	22.79	22.52	23	1
10	16QAM	1	0	22.95	22.99	22.71		
10	16QAM	1	25	22.98	22.91	22.73		
10	16QAM	1	49	22.81	22.97	22.90	22	2
10	16QAM	25	0	21.85	21.87	21.52		
10	16QAM	25	12	21.80	21.83	21.53		
10	16QAM	25	25	21.77	21.95	21.67	22	2
10	16QAM	50	0	21.73	21.88	21.57		



FCC SAR Test Report

Report No. : FA702534-06

Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.76	23.76	23.47	24	0
5	QPSK	1	12	23.76	23.76	23.54		
5	QPSK	1	24	23.67	23.74	23.51		
5	QPSK	12	0	22.53	22.54	22.55	23	1
5	QPSK	12	7	22.52	22.51	22.55		
5	QPSK	12	13	22.57	22.51	22.54		
5	QPSK	25	0	22.73	22.76	22.54		
5	16QAM	1	0	22.98	22.96	22.74	23	1
5	16QAM	1	12	22.93	22.92	22.82		
5	16QAM	1	24	22.97	22.95	22.76		
5	16QAM	12	0	21.53	21.71	21.52	22	2
5	16QAM	12	7	21.55	21.66	21.50		
5	16QAM	12	13	21.50	21.62	21.48		
5	16QAM	25	0	21.73	21.80	21.56		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	23.73	23.74	23.50	24	0
3	QPSK	1	8	23.69	23.76	23.53		
3	QPSK	1	14	23.67	23.75	23.46		
3	QPSK	8	0	22.68	22.71	22.57	23	1
3	QPSK	8	4	22.67	22.71	22.49		
3	QPSK	8	7	22.68	22.78	22.50		
3	QPSK	15	0	22.68	22.78	22.49		
3	16QAM	1	0	22.91	22.91	22.73	23	1
3	16QAM	1	8	22.99	22.96	22.77		
3	16QAM	1	14	22.98	22.97	22.71		
3	16QAM	8	0	21.76	21.79	21.55	22	2
3	16QAM	8	4	21.75	21.79	21.49		
3	16QAM	8	7	21.79	21.80	21.51		
3	16QAM	15	0	21.76	21.74	21.46		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	23.74	23.76	23.50	24	0
1.4	QPSK	1	3	23.67	23.75	23.48		
1.4	QPSK	1	5	23.70	23.76	23.46		
1.4	QPSK	3	0	23.74	23.75	23.51		
1.4	QPSK	3	1	23.67	23.75	23.49		
1.4	QPSK	3	3	23.69	23.76	23.45		
1.4	QPSK	6	0	22.65	22.74	22.51	23	1
1.4	16QAM	1	0	22.93	23.00	22.83	23	1
1.4	16QAM	1	3	22.92	23.00	22.81		
1.4	16QAM	1	5	22.97	22.94	22.77		
1.4	16QAM	3	0	22.80	22.79	22.56		
1.4	16QAM	3	1	22.71	22.79	22.55		
1.4	16QAM	3	3	22.73	22.80	22.50		
1.4	16QAM	6	0	21.74	21.80	21.56	22	2



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300	24	0
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.43	23.70	23.47		
20	QPSK	1	49	23.60	23.41	23.38	23	1
20	QPSK	1	99	23.52	23.32	23.61		
20	QPSK	50	0	22.56	22.62	22.34		
20	QPSK	50	24	22.60	22.36	22.40	23	1
20	QPSK	50	50	22.57	22.31	22.54		
20	QPSK	100	0	22.67	22.68	22.58		
20	16QAM	1	0	22.65	22.85	22.73	23	1
20	16QAM	1	49	22.82	22.61	22.69		
20	16QAM	1	99	22.73	22.48	22.98		
20	16QAM	50	0	21.59	21.57	21.37	22	2
20	16QAM	50	24	21.62	21.44	21.43		
20	16QAM	50	50	21.59	21.40	21.56		
20	16QAM	100	0	21.68	21.49	21.57	24	0
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.36	23.61	23.31	24	0
15	QPSK	1	37	23.56	23.36	23.51		
15	QPSK	1	74	23.54	23.25	23.64		
15	QPSK	36	0	22.49	22.50	22.34	23	1
15	QPSK	36	20	22.60	22.35	22.51		
15	QPSK	36	39	22.55	22.27	22.56		
15	QPSK	75	0	22.63	22.32	22.58	23	1
15	16QAM	1	0	22.68	22.79	22.54		
15	16QAM	1	37	22.86	22.57	22.76		
15	16QAM	1	74	22.84	22.46	22.90	22	2
15	16QAM	36	0	21.53	21.58	21.42		
15	16QAM	36	20	21.63	21.46	21.61		
15	16QAM	36	39	21.59	21.39	21.62	24	0
15	16QAM	75	0	21.64	21.41	21.64		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.34	23.60	23.55	24	0
10	QPSK	1	25	23.50	23.39	23.68		
10	QPSK	1	49	23.59	23.31	23.67		
10	QPSK	25	0	22.48	22.49	22.69	23	1
10	QPSK	25	12	22.51	22.42	22.72		
10	QPSK	25	25	22.58	22.35	22.80		
10	QPSK	50	0	22.49	22.38	22.70	23	1
10	16QAM	1	0	22.59	22.82	22.78		
10	16QAM	1	25	22.72	22.65	22.89		
10	16QAM	1	49	22.83	22.55	22.90	22	2
10	16QAM	25	0	21.52	21.53	21.73		
10	16QAM	25	12	21.55	21.47	21.73		
10	16QAM	25	25	21.64	21.38	21.80	22	2
10	16QAM	50	0	21.55	21.40	21.72		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	23.28	23.42	23.67	24	0
5	QPSK	1	12	23.37	23.34	23.63		
5	QPSK	1	24	23.42	23.30	23.64		
5	QPSK	12	0	22.28	22.31	22.23	23	1
5	QPSK	12	7	22.20	22.25	22.19		
5	QPSK	12	13	22.17	22.22	22.16		
5	QPSK	25	0	22.42	22.37	22.72	23	1
5	16QAM	1	0	22.56	22.65	22.88		
5	16QAM	1	12	22.58	22.57	22.96		
5	16QAM	1	24	22.64	22.52	22.97	22	2
5	16QAM	12	0	21.36	21.44	21.44		
5	16QAM	12	7	21.33	21.38	21.34		
5	16QAM	12	13	21.39	21.37	21.32	21.38	21.39
5	16QAM	25	0	21.38	21.39	21.76		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	23.25	23.37	23.67	24	0
3	QPSK	1	8	23.28	23.36	23.65		
3	QPSK	1	14	23.32	23.25	23.67		
3	QPSK	8	0	22.28	22.35	22.73	23	1
3	QPSK	8	4	22.26	22.31	22.74		
3	QPSK	8	7	22.33	22.31	22.78		
3	QPSK	15	0	22.28	22.33	22.76	23	1
3	16QAM	1	0	22.49	22.56	22.96		
3	16QAM	1	8	22.59	22.56	22.93		
3	16QAM	1	14	22.63	22.50	22.97	22	2
3	16QAM	8	0	21.39	21.42	21.78		
3	16QAM	8	4	21.36	21.38	21.78		
3	16QAM	8	7	21.42	21.42	21.82	21.32	21.38
3	16QAM	15	0	21.32	21.38	21.75		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	23.23	23.37	23.68	24	0
1.4	QPSK	1	3	23.24	23.28	23.67		
1.4	QPSK	1	5	23.26	23.28	23.62		
1.4	QPSK	3	0	23.21	23.31	23.69		
1.4	QPSK	3	1	23.19	23.30	23.69		
1.4	QPSK	3	3	23.25	23.30	23.62		
1.4	QPSK	6	0	22.28	22.32	22.82	23	1
1.4	16QAM	1	0	22.50	22.59	22.94	23	1
1.4	16QAM	1	3	22.52	22.53	22.93		
1.4	16QAM	1	5	22.51	22.57	22.96		
1.4	16QAM	3	0	22.29	22.40	22.86		
1.4	16QAM	3	1	22.32	22.38	22.84		
1.4	16QAM	3	3	22.41	22.37	22.86	22	2
1.4	16QAM	6	0	21.33	21.38	21.86		



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600	25	0
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.58	23.47	23.61		
10	QPSK	1	25	23.44	23.50	23.48	24	1
10	QPSK	1	49	23.49	23.54	23.60		
10	QPSK	25	0	22.55	22.50	22.57		
10	QPSK	25	12	22.52	22.53	22.49	24	1
10	QPSK	25	25	22.52	22.58	22.57		
10	QPSK	50	0	22.57	22.52	22.59		
10	16QAM	1	0	23.00	22.84	23.00	24	1
10	16QAM	1	25	22.78	22.90	22.78		
10	16QAM	1	49	22.92	22.94	22.95		
10	16QAM	25	0	21.59	21.62	21.66	23	2
10	16QAM	25	12	21.55	21.64	21.58		
10	16QAM	25	25	21.57	21.69	21.65		
10	16QAM	50	0	21.59	21.63	21.66	25	0
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.54	23.47	23.43	25	0
5	QPSK	1	12	23.41	23.46	23.43		
5	QPSK	1	24	23.40	23.53	23.54		
5	QPSK	12	0	22.41	22.44	22.44	24	1
5	QPSK	12	7	22.45	22.45	22.50		
5	QPSK	12	13	22.43	22.47	22.54		
5	QPSK	25	0	22.49	22.47	22.52	24	1
5	16QAM	1	0	22.94	22.78	22.75		
5	16QAM	1	12	22.78	22.78	22.73		
5	16QAM	1	24	22.76	22.81	22.85	23	2
5	16QAM	12	0	21.53	21.52	21.46		
5	16QAM	12	7	21.51	21.54	21.52		
5	16QAM	12	13	21.45	21.59	21.57	25	0
5	16QAM	25	0	21.54	21.52	21.57		
Channel				20415	20525	20635		
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.47	23.41	23.37	25	0
3	QPSK	1	8	23.35	23.47	23.50		
3	QPSK	1	14	23.34	23.46	23.49		
3	QPSK	8	0	22.51	22.46	22.47	24	1
3	QPSK	8	4	22.42	22.44	22.49		
3	QPSK	8	7	22.40	22.46	22.50		
3	QPSK	15	0	22.41	22.45	22.52	24	1
3	16QAM	1	0	22.80	22.76	22.63		
3	16QAM	1	8	22.70	22.81	22.77		
3	16QAM	1	14	22.66	22.80	22.79	23	2
3	16QAM	8	0	21.56	21.54	21.54		
3	16QAM	8	4	21.45	21.55	21.58		
3	16QAM	8	7	21.42	21.57	21.57	23	2
3	16QAM	15	0	21.46	21.50	21.52		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.49	23.44	23.49	25	0
1.4	QPSK	1	3	23.44	23.43	23.48		
1.4	QPSK	1	5	23.43	23.45	23.51		
1.4	QPSK	3	0	23.50	23.42	23.46		
1.4	QPSK	3	1	23.48	23.40	23.46		
1.4	QPSK	3	3	23.48	23.41	23.48	24	1
1.4	QPSK	6	0	22.48	22.42	22.47		
1.4	16QAM	1	0	22.86	22.81	22.87	24	1
1.4	16QAM	1	3	22.82	22.79	22.86		
1.4	16QAM	1	5	22.73	22.82	22.89		
1.4	16QAM	3	0	22.60	22.57	22.58		
1.4	16QAM	3	1	22.63	22.56	22.59		
1.4	16QAM	3	3	22.65	22.57	22.60	23	2
1.4	16QAM	6	0	21.62	21.57	21.56		



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350	24	0
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.66	22.67	22.62		
20	QPSK	1	49	22.59	22.56	22.66	23	1
20	QPSK	1	99	22.63	22.55	22.66		
20	QPSK	50	0	21.62	21.66	21.62		
20	QPSK	50	24	21.62	21.60	21.66	23	1
20	QPSK	50	50	21.65	21.70	21.69		
20	QPSK	100	0	21.67	21.69	21.65		
20	16QAM	1	0	21.92	21.76	21.79	23	1
20	16QAM	1	49	21.92	21.80	21.92		
20	16QAM	1	99	21.92	21.89	21.89		
20	16QAM	50	0	20.83	20.70	20.72	22	2
20	16QAM	50	24	20.82	20.65	20.84		
20	16QAM	50	50	20.78	20.72	20.92		
20	16QAM	100	0	20.91	20.72	21.04	24	0
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.57	22.55	22.59	24	0
15	QPSK	1	37	22.57	22.56	22.65		
15	QPSK	1	74	22.66	22.60	22.59		
15	QPSK	36	0	21.81	21.70	21.78	23	1
15	QPSK	36	20	21.82	21.65	21.85		
15	QPSK	36	39	21.82	21.71	21.84		
15	QPSK	75	0	21.84	21.68	21.90	23	1
15	16QAM	1	0	21.98	21.82	21.85		
15	16QAM	1	37	21.99	21.82	21.98		
15	16QAM	1	74	21.93	21.91	21.89	22	2
15	16QAM	36	0	20.89	20.74	20.84		
15	16QAM	36	20	20.90	20.70	20.90		
15	16QAM	36	39	20.88	20.76	20.92	24	0
15	16QAM	75	0	20.88	20.72	20.97		
Channel				20800	21100	21400		
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.58	22.57	22.64	24	0
10	QPSK	1	25	22.65	22.62	22.59		
10	QPSK	1	49	22.58	22.65	22.57		
10	QPSK	25	0	21.88	21.63	21.86	23	1
10	QPSK	25	12	21.87	21.64	21.83		
10	QPSK	25	25	21.87	21.65	21.87		
10	QPSK	50	0	21.82	21.60	21.83	23	1
10	16QAM	1	0	22.04	21.82	21.95		
10	16QAM	1	25	22.00	21.79	21.93		
10	16QAM	1	49	22.00	21.90	21.93	22	2
10	16QAM	25	0	20.89	20.67	20.89		
10	16QAM	25	12	20.88	20.74	20.86		
10	16QAM	25	25	20.93	20.74	20.91	24	0
10	16QAM	50	0	20.90	20.71	20.87		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.61	22.59	22.59	24	0
5	QPSK	1	12	22.61	22.58	22.64		
5	QPSK	1	24	22.60	22.62	22.60		
5	QPSK	12	0	21.87	21.64	21.76	23	1
5	QPSK	12	7	21.87	21.64	21.76		
5	QPSK	12	13	21.87	21.64	21.72		
5	QPSK	25	0	21.84	21.65	21.78		
5	16QAM	1	0	22.03	21.83	21.93	23	1
5	16QAM	1	12	22.03	21.83	21.92		
5	16QAM	1	24	22.05	21.87	21.85		
5	16QAM	12	0	20.90	20.63	20.76	22	2
5	16QAM	12	7	20.89	20.63	20.77		
5	16QAM	12	13	20.88	20.63	20.72		
5	16QAM	25	0	20.90	20.64	20.76		

<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130	24	0
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.53	23.62	23.50		
10	QPSK	1	25	23.58	23.57	23.60	23	1
10	QPSK	1	49	23.54	23.58	23.61		
10	QPSK	25	0	22.68	22.71	22.64		
10	QPSK	25	12	22.66	22.64	22.55	23	1
10	QPSK	25	25	22.66	22.69	22.63		
10	QPSK	50	0	22.75	22.76	22.73		
10	16QAM	1	0	22.88	22.95	22.84	23	1
10	16QAM	1	25	23.00	22.97	22.94		
10	16QAM	1	49	22.94	22.96	22.91		
10	16QAM	25	0	21.80	21.78	21.62	22	2
10	16QAM	25	12	21.85	21.71	21.67		
10	16QAM	25	25	21.74	21.77	21.68		
10	16QAM	50	0	21.87	21.73	21.82	24	0
Channel				23035	23095	23155		
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	23.48	23.61	23.58	24	0
5	QPSK	1	12	23.59	23.52	23.49		
5	QPSK	1	24	23.61	23.60	23.59		
5	QPSK	12	0	22.51	22.54	22.52	23	1
5	QPSK	12	7	22.60	22.56	22.48		
5	QPSK	12	13	22.69	22.55	22.58		
5	QPSK	25	0	22.64	22.58	22.54	23	1
5	16QAM	1	0	22.81	22.83	22.95		
5	16QAM	1	12	22.97	22.90	22.87		
5	16QAM	1	24	22.93	22.97	22.94	22	2
5	16QAM	12	0	21.67	21.61	21.64		
5	16QAM	12	7	21.72	21.64	21.57		
5	16QAM	12	13	21.79	21.66	21.67	24	0
5	16QAM	25	0	21.73	21.61	21.65		
Channel				23025	23095	23165		
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	23.47	23.51	23.44	24	0
3	QPSK	1	8	23.53	23.56	23.55		
3	QPSK	1	14	23.60	23.48	23.53		
3	QPSK	8	0	22.60	22.52	22.48	23	1
3	QPSK	8	4	22.56	22.52	22.55		
3	QPSK	8	7	22.63	22.54	22.56		
3	QPSK	15	0	22.56	22.52	22.56	23	1
3	16QAM	1	0	22.81	22.82	22.83		
3	16QAM	1	8	22.90	22.86	22.93		
3	16QAM	1	14	22.99	22.85	22.91	22	2
3	16QAM	8	0	21.70	21.63	21.54		
3	16QAM	8	4	21.68	21.64	21.59		
3	16QAM	8	7	21.76	21.65	21.61	24	0
3	16QAM	15	0	21.64	21.62	21.56		



Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	23.50	23.55	23.58	24	0
1.4	QPSK	1	3	23.53	23.52	23.55		
1.4	QPSK	1	5	23.55	23.55	23.57		
1.4	QPSK	3	0	23.47	23.54	23.55		
1.4	QPSK	3	1	23.44	23.53	23.54		
1.4	QPSK	3	3	23.52	23.54	23.53	23	1
1.4	QPSK	6	0	22.59	22.57	22.56		
1.4	16QAM	1	0	22.88	22.93	22.98		
1.4	16QAM	1	3	22.91	22.88	22.94		
1.4	16QAM	1	5	22.91	22.91	22.95		
1.4	16QAM	3	0	22.64	22.69	22.69	23	1
1.4	16QAM	3	1	22.63	22.68	22.69		
1.4	16QAM	3	3	22.70	22.69	22.70		
1.4	16QAM	6	0	21.76	21.66	21.71		
1.4	16QAM	6	0	21.76	21.66	21.71	22	2

<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0	23.49			24	0
10	QPSK	1	25	23.33				
10	QPSK	1	49	23.39				
10	QPSK	25	0	22.42			23	1
10	QPSK	25	12	22.30				
10	QPSK	25	25	22.41				
10	QPSK	50	0	22.36			23	1
10	16QAM	1	0	22.47				
10	16QAM	1	25	22.46				
10	16QAM	1	49	22.45			22	2
10	16QAM	25	0	21.35				
10	16QAM	25	12	21.22				
10	16QAM	25	25	21.41			22	2
10	16QAM	50	0	21.35				
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	23.30	23.44	23.41	24	0
5	QPSK	1	12	23.45	23.44	23.44		
5	QPSK	1	24	23.39	23.43	23.48		
5	QPSK	12	0	22.33	22.40	22.41	23	1
5	QPSK	12	7	22.36	22.36	22.40		
5	QPSK	12	13	22.33	22.46	22.46		
5	QPSK	25	0	22.37	22.36	22.44	23	1
5	16QAM	1	0	22.67	22.92	22.78		
5	16QAM	1	12	22.85	22.81	22.81		
5	16QAM	1	24	22.77	22.88	22.86	22	2
5	16QAM	12	0	21.37	21.47	21.44		
5	16QAM	12	7	21.42	21.37	21.41		
5	16QAM	12	13	21.44	21.45	21.49	22	2
5	16QAM	25	0	21.45	21.39	21.44		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800	24	0
Frequency (MHz)				709	710	711		
10	QPSK	1	0	23.62	23.65	23.51		
10	QPSK	1	25	23.64	23.60	23.62	23	1
10	QPSK	1	49	23.64	23.57	23.64		
10	QPSK	25	0	22.60	22.69	22.61		
10	QPSK	25	12	22.64	22.65	22.68	23	1
10	QPSK	25	25	22.59	22.58	22.67		
10	QPSK	50	0	22.69	22.70	22.65		
10	16QAM	1	0	22.97	22.97	22.94	23	1
10	16QAM	1	25	22.91	23.00	22.96		
10	16QAM	1	49	22.95	22.98	22.97		
10	16QAM	25	0	21.74	21.68	21.68	22	2
10	16QAM	25	12	21.76	21.70	21.73		
10	16QAM	25	25	21.90	21.74	21.73		
10	16QAM	50	0	21.83	21.82	21.87	24	0
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	23.59	23.53	23.61	24	0
5	QPSK	1	12	23.53	23.60	23.51		
5	QPSK	1	24	23.57	23.61	23.63		
5	QPSK	12	0	22.65	22.52	22.53	23	1
5	QPSK	12	7	22.58	22.60	22.49		
5	QPSK	12	13	22.60	22.64	22.59		
5	QPSK	25	0	22.58	22.64	22.55	23	1
5	16QAM	1	0	23.00	22.88	22.97		
5	16QAM	1	12	22.88	22.96	22.87		
5	16QAM	1	24	22.92	22.97	22.91	22	2
5	16QAM	12	0	21.73	21.66	21.64		
5	16QAM	12	7	21.65	21.75	21.54		
5	16QAM	12	13	21.70	21.79	21.60	22	2
5	16QAM	25	0	21.64	21.73	21.58		



<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	23.43	23.51	23.46		
15	QPSK	1	37	23.31	23.38	23.43	24	0
15	QPSK	1	74	23.43	23.44	23.39		
15	QPSK	36	0	22.52	22.53	22.50		
15	QPSK	36	20	22.48	22.43	22.52	23	1
15	QPSK	36	39	22.49	22.41	22.51		
15	QPSK	75	0	22.58	22.61	22.60		
15	16QAM	1	0	22.70	22.84	22.77	23	1
15	16QAM	1	37	22.89	22.72	22.81		
15	16QAM	1	74	22.73	22.83	22.83		
15	16QAM	36	0	21.60	21.50	21.60	22	2
15	16QAM	36	20	21.64	21.55	21.58		
15	16QAM	36	39	21.54	21.54	21.56		
15	16QAM	75	0	21.75	21.67	21.69		
Channel				26740	26865	26990	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	23.35	23.48	23.42		
10	QPSK	1	25	23.42	23.44	23.47	24	0
10	QPSK	1	49	23.46	23.50	23.49		
10	QPSK	25	0	22.56	22.49	22.58		
10	QPSK	25	12	22.59	22.49	22.49	23	1
10	QPSK	25	25	22.60	22.49	22.56		
10	QPSK	50	0	22.59	22.50	22.61		
10	16QAM	1	0	22.72	22.77	22.97	23	1
10	16QAM	1	25	22.80	22.77	22.79		
10	16QAM	1	49	22.93	22.85	22.92		
10	16QAM	25	0	21.57	21.53	21.65	22	2
10	16QAM	25	12	21.62	21.52	21.58		
10	16QAM	25	25	21.66	21.54	21.66		
10	16QAM	50	0	21.62	21.58	21.64		
Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	23.29	23.39	23.39		
5	QPSK	1	12	23.42	23.38	23.45	24	0
5	QPSK	1	24	23.50	23.43	23.41		
5	QPSK	12	0	22.37	22.36	22.41		
5	QPSK	12	7	22.44	22.41	22.47	23	1
5	QPSK	12	13	22.47	22.41	22.52		
5	QPSK	25	0	22.45	22.43	22.53		
5	16QAM	1	0	22.66	22.68	22.76	23	1
5	16QAM	1	12	22.80	22.69	22.77		
5	16QAM	1	24	22.86	22.72	22.88		
5	16QAM	12	0	21.41	21.40	21.49	22	2
5	16QAM	12	7	21.49	21.45	21.51		
5	16QAM	12	13	21.54	21.44	21.56		
5	16QAM	25	0	21.47	21.45	21.56		



Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	23.22	23.33	23.33	24	0
3	QPSK	1	8	23.32	23.40	23.47		
3	QPSK	1	14	23.38	23.37	23.46		
3	QPSK	8	0	22.29	22.36	22.43	23	1
3	QPSK	8	4	22.34	22.41	22.46		
3	QPSK	8	7	22.41	22.41	22.46		
3	QPSK	15	0	22.35	22.40	22.49		
3	16QAM	1	0	22.58	22.60	22.65	23	1
3	16QAM	1	8	22.70	22.68	22.80		
3	16QAM	1	14	22.72	22.66	22.82		
3	16QAM	8	0	21.35	21.40	21.51	22	2
3	16QAM	8	4	21.39	21.46	21.53		
3	16QAM	8	7	21.51	21.48	21.55		
3	16QAM	15	0	21.45	21.45	21.51		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	23.28	23.39	23.49	24	0
1.4	QPSK	1	3	23.30	23.37	23.45		
1.4	QPSK	1	5	23.33	23.40	23.48		
1.4	QPSK	3	0	23.32	23.35	23.44		
1.4	QPSK	3	1	23.31	23.34	23.44		
1.4	QPSK	3	3	23.31	23.35	23.45		
1.4	QPSK	6	0	22.30	22.35	22.45	23	1
1.4	16QAM	1	0	22.59	22.70	22.78	23	1
1.4	16QAM	1	3	22.59	22.67	22.79		
1.4	16QAM	1	5	22.64	22.71	22.82		
1.4	16QAM	3	0	22.43	22.46	22.55		
1.4	16QAM	3	1	22.42	22.45	22.56		
1.4	16QAM	3	3	22.43	22.45	22.55		
1.4	16QAM	6	0	21.41	21.46	21.53	22	2

<LTE Band 30>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				27710				
Frequency (MHz)				2310				
10	QPSK	1	0	22.67			24	0
10	QPSK	1	25	22.61				
10	QPSK	1	49	22.55				
10	QPSK	25	0	21.80			23	1
10	QPSK	25	12	21.75				
10	QPSK	25	25	21.70				
10	QPSK	50	0	21.93				
10	16QAM	1	0	21.98			23	1
10	16QAM	1	25	22.02				
10	16QAM	1	49	21.83				
10	16QAM	25	0	20.78			22	2
10	16QAM	25	12	20.82				
10	16QAM	25	25	20.80				
10	16QAM	50	0	20.95				
Channel				27685	27710	27735	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2307.5	2310	2312.5		
5	QPSK	1	0	22.59	22.62	22.62	24	0
5	QPSK	1	12	22.61	22.58	22.60		
5	QPSK	1	24	22.58	22.58	22.58		
5	QPSK	12	0	21.76	21.76	21.81	23	1
5	QPSK	12	7	21.73	21.80	21.73		
5	QPSK	12	13	21.78	21.84	21.76		
5	QPSK	25	0	21.77	21.83	21.73	23	1
5	16QAM	1	0	21.98	22.02	22.03		
5	16QAM	1	12	21.93	22.06	21.88		
5	16QAM	1	24	21.95	21.97	21.86	22	2
5	16QAM	12	0	20.80	20.79	20.81		
5	16QAM	12	7	20.76	20.81	20.70		
5	16QAM	12	13	20.78	20.81	20.76		
5	16QAM	25	0	20.75	20.84	20.76		



<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572	24	0
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	23.35	23.63	23.62		
20	QPSK	1	49	23.17	23.18	23.30	23	1
20	QPSK	1	99	23.28	23.21	23.53		
20	QPSK	50	0	22.42	22.52	22.47		
20	QPSK	50	24	22.39	22.27	22.35	23	1
20	QPSK	50	50	22.37	22.21	22.38		
20	QPSK	100	0	22.55	22.64	22.63		
20	16QAM	1	0	22.43	22.53	22.98	23	1
20	16QAM	1	49	22.55	22.50	22.59		
20	16QAM	1	99	22.56	22.88	22.95		
20	16QAM	50	0	21.28	21.19	21.52	22	2
20	16QAM	50	24	21.35	21.18	21.30		
20	16QAM	50	50	21.34	21.37	21.37		
20	16QAM	100	0	21.54	21.47	21.66	24	0
Channel				132047	132322	132597		
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	23.18	23.18	23.58	24	0
15	QPSK	1	37	23.38	23.28	23.29		
15	QPSK	1	74	23.36	23.49	23.59		
15	QPSK	36	0	22.28	22.18	22.45	23	1
15	QPSK	36	20	22.37	22.28	22.35		
15	QPSK	36	39	22.31	22.39	22.46		
15	QPSK	75	0	22.47	22.39	22.54	23	1
15	16QAM	1	0	22.41	22.42	22.91		
15	16QAM	1	37	22.58	22.55	22.58		
15	16QAM	1	74	22.57	22.74	22.96	22	2
15	16QAM	36	0	21.19	21.07	21.38		
15	16QAM	36	20	21.29	21.17	21.27		
15	16QAM	36	39	21.23	21.28	21.35	24	0
15	16QAM	75	0	21.43	21.38	21.48		
Channel				132022	132322	132622		
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	23.15	23.21	23.39	24	0
10	QPSK	1	25	23.26	23.25	23.34		
10	QPSK	1	49	23.38	23.41	23.58		
10	QPSK	25	0	22.21	22.13	22.29	23	1
10	QPSK	25	12	22.22	22.12	22.37		
10	QPSK	25	25	22.29	22.24	22.56		
10	QPSK	50	0	22.34	22.31	22.53	23	1
10	16QAM	1	0	22.46	22.58	22.75		
10	16QAM	1	25	22.55	22.61	22.71		
10	16QAM	1	49	22.68	22.74	23.00	22	2
10	16QAM	25	0	21.12	21.07	21.23		
10	16QAM	25	12	21.12	21.04	21.29		
10	16QAM	25	25	21.19	21.20	21.44	22	2
10	16QAM	50	0	21.29	21.30	21.46		



Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	23.08	23.18	23.36	24	0
5	QPSK	1	12	23.16	23.18	23.52		
5	QPSK	1	24	23.22	23.23	23.53		
5	QPSK	12	0	22.02	22.05	22.34	23	1
5	QPSK	12	7	22.06	22.06	22.42		
5	QPSK	12	13	22.07	22.05	22.53		
5	QPSK	25	0	22.18	22.20	22.59	23	1
5	16QAM	1	0	22.38	22.44	22.70		
5	16QAM	1	12	22.46	22.45	22.89		
5	16QAM	1	24	22.50	22.51	22.97	22	2
5	16QAM	12	0	20.86	20.92	21.20		
5	16QAM	12	7	20.90	20.97	21.23		
5	16QAM	12	13	20.96	20.94	21.34	22	2
5	16QAM	25	0	21.11	21.13	21.44		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	23.06	23.15	23.48	24	0
3	QPSK	1	8	23.11	23.21	23.59		
3	QPSK	1	14	23.15	23.17	23.57		
3	QPSK	8	0	22.03	22.04	22.45	23	1
3	QPSK	8	4	21.96	22.09	22.52		
3	QPSK	8	7	22.02	22.11	22.56		
3	QPSK	15	0	22.05	22.20	22.61	23	1
3	16QAM	1	0	22.34	22.50	22.83		
3	16QAM	1	8	22.40	22.55	22.94		
3	16QAM	1	14	22.43	22.50	22.90	22	2
3	16QAM	8	0	20.89	20.98	21.33		
3	16QAM	8	4	20.87	20.99	21.39		
3	16QAM	8	7	20.93	21.01	21.47	22	2
3	16QAM	15	0	20.91	21.04	21.45		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	23.08	23.10	23.56	24	0
1.4	QPSK	1	3	23.08	23.11	23.53		
1.4	QPSK	1	5	23.08	23.15	23.59		
1.4	QPSK	3	0	22.98	23.02	23.55	24	0
1.4	QPSK	3	1	22.93	23.01	23.57		
1.4	QPSK	3	3	22.99	23.07	23.50		
1.4	QPSK	6	0	21.95	22.05	22.47	23	1
1.4	16QAM	1	0	22.32	22.45	22.94	23	1
1.4	16QAM	1	3	22.35	22.51	22.93		
1.4	16QAM	1	5	22.37	22.52	22.92		
1.4	16QAM	3	0	21.92	22.04	22.54	23	1
1.4	16QAM	3	1	21.90	22.03	22.54		
1.4	16QAM	3	3	21.97	22.13	22.51		
1.4	16QAM	6	0	20.87	20.99	21.41	22	2

<Reduced Power Mode>
<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	16.26	16.28	16.40	17	0
20	QPSK	1	49	16.22	16.26	16.16		
20	QPSK	1	99	16.20	16.25	16.05		
20	QPSK	50	0	16.12	16.15	16.35	17	0
20	QPSK	50	24	16.10	16.10	16.05		
20	QPSK	50	50	16.07	16.02	16.08		
20	QPSK	100	0	16.11	16.12	16.13	17	0
20	16QAM	1	0	16.26	16.14	16.23		
20	16QAM	1	49	16.10	16.17	15.86		
20	16QAM	1	99	16.05	16.16	15.95	17	0
20	16QAM	50	0	16.08	16.06	15.92		
20	16QAM	50	24	15.95	16.02	15.79		
20	16QAM	50	50	15.93	16.08	15.82	17	0
20	16QAM	100	0	16.01	16.12	16.03		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	16.27	16.29	16.13	17	0
15	QPSK	1	37	16.25	16.25	15.99		
15	QPSK	1	74	16.03	16.28	16.03		
15	QPSK	36	0	16.31	16.34	16.12	17	0
15	QPSK	36	20	16.32	16.32	16.11		
15	QPSK	36	39	16.19	16.38	16.06		
15	QPSK	75	0	16.01	16.03	15.93	17	0
15	16QAM	1	0	16.19	16.17	16.08		
15	16QAM	1	37	16.19	16.15	15.90		
15	16QAM	1	74	15.95	16.17	15.96	17	0
15	16QAM	36	0	16.03	16.07	15.84		
15	16QAM	36	20	16.02	16.05	15.84		
15	16QAM	36	39	15.89	16.11	15.81	17	0
15	16QAM	75	0	16.03	16.06	15.96		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	16.33	16.30	16.10	17	0
10	QPSK	1	25	16.30	16.26	15.97		
10	QPSK	1	49	16.18	16.35	16.13		
10	QPSK	25	0	16.36	16.37	16.09	17	0
10	QPSK	25	12	16.29	16.31	16.05		
10	QPSK	25	25	16.30	16.37	16.14		
10	QPSK	50	0	16.27	16.30	16.11	17	0
10	16QAM	1	0	16.18	16.20	15.91		
10	16QAM	1	25	16.16	16.21	15.79		
10	16QAM	1	49	16.08	16.27	15.95	17	0
10	16QAM	25	0	16.10	16.15	15.81		
10	16QAM	25	12	16.03	16.12	15.77		
10	16QAM	25	25	16.03	16.17	15.87	17	0
10	16QAM	50	0	16.01	16.09	15.80		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	16.34	16.18	16.26	17	0
5	QPSK	1	12	16.15	16.18	15.94		
5	QPSK	1	24	16.10	16.25	16.01		
5	QPSK	12	0	16.26	16.26	16.12	17	0
5	QPSK	12	7	16.12	16.22	15.98		
5	QPSK	12	13	16.17	16.35	16.03		
5	QPSK	25	0	16.02	16.05	16.05		
5	16QAM	1	0	16.26	16.14	16.13	17	0
5	16QAM	1	12	16.01	16.17	15.85		
5	16QAM	1	24	15.97	16.16	15.89		
5	16QAM	12	0	15.98	16.04	15.82	17	0
5	16QAM	12	7	15.90	16.00	15.69		
5	16QAM	12	13	15.90	16.02	15.75		
5	16QAM	25	0	15.95	16.08	16.03		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	16.33	16.23	16.23	17	0
3	QPSK	1	8	16.14	16.16	15.89		
3	QPSK	1	14	16.20	16.25	16.02		
3	QPSK	8	0	16.32	16.27	16.10	17	0
3	QPSK	8	4	16.15	16.21	16.05		
3	QPSK	8	7	16.07	16.31	16.06		
3	QPSK	15	0	16.06	16.11	16.13		
3	16QAM	1	0	16.22	16.05	16.18	17	0
3	16QAM	1	8	16.09	16.14	15.82		
3	16QAM	1	14	15.95	16.14	15.87		
3	16QAM	8	0	15.99	16.05	15.89	17	0
3	16QAM	8	4	15.91	15.98	15.70		
3	16QAM	8	7	15.84	16.02	15.77		
3	16QAM	15	0	15.99	16.04	15.93		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	16.39	16.20	16.26	17	0
1.4	QPSK	1	3	16.16	16.21	15.95		
1.4	QPSK	1	5	16.10	16.18	15.95		
1.4	QPSK	3	0	16.32	16.32	16.16		
1.4	QPSK	3	1	16.10	16.23	15.95		
1.4	QPSK	3	3	16.07	16.35	16.06		
1.4	QPSK	6	0	16.09	16.11	16.06	17	0
1.4	16QAM	1	0	16.25	16.07	16.14	17	0
1.4	16QAM	1	3	16.02	16.17	15.80		
1.4	16QAM	1	5	15.95	16.12	15.85		
1.4	16QAM	3	0	16.03	16.04	15.86		
1.4	16QAM	3	1	15.85	15.99	15.70		
1.4	16QAM	3	3	15.84	16.03	15.73		
1.4	16QAM	6	0	15.99	16.07	16.02	17	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300	17	0
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	16.61	16.52	16.44		
20	QPSK	1	49	16.39	16.32	16.30	17	0
20	QPSK	1	99	16.39	16.22	16.46		
20	QPSK	50	0	16.40	16.44	16.32		
20	QPSK	50	24	16.41	16.32	16.32	17	0
20	QPSK	50	50	16.41	16.31	16.39		
20	QPSK	100	0	16.52	16.39	16.51		
20	16QAM	1	0	16.55	16.43	16.48	17	0
20	16QAM	1	49	16.53	16.53	16.52		
20	16QAM	1	99	16.49	16.42	16.49		
20	16QAM	50	0	16.45	16.48	16.36	17	0
20	16QAM	50	24	16.46	16.37	16.36		
20	16QAM	50	50	16.46	16.36	16.42		
20	16QAM	100	0	16.52	16.40	16.53	17	0
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	16.31	16.49	16.26	17	0
15	QPSK	1	37	16.40	16.35	16.36		
15	QPSK	1	74	16.36	16.26	16.44		
15	QPSK	36	0	16.38	16.46	16.35	17	0
15	QPSK	36	20	16.43	16.37	16.46		
15	QPSK	36	39	16.38	16.33	16.44		
15	QPSK	75	0	16.49	16.36	16.51	17	0
15	16QAM	1	0	16.48	16.35	16.53		
15	16QAM	1	37	16.53	16.52	16.52		
15	16QAM	1	74	16.53	16.50	16.59	17	0
15	16QAM	36	0	16.41	16.51	16.39		
15	16QAM	36	20	16.47	16.42	16.49		
15	16QAM	36	39	16.43	16.37	16.48	17	0
15	16QAM	75	0	16.50	16.39	16.54		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	16.28	16.47	16.46	17	0
10	QPSK	1	25	16.32	16.33	16.50		
10	QPSK	1	49	16.38	16.28	16.57		
10	QPSK	25	0	16.39	16.41	16.56	17	0
10	QPSK	25	12	16.37	16.37	16.55		
10	QPSK	25	25	16.41	16.32	16.59		
10	QPSK	50	0	16.38	16.32	16.54	17	0
10	16QAM	1	0	16.47	16.47	16.42		
10	16QAM	1	25	16.53	16.55	16.55		
10	16QAM	1	49	16.57	16.48	16.33	17	0
10	16QAM	25	0	16.42	16.45	16.41		
10	16QAM	25	12	16.41	16.41	16.59		
10	16QAM	25	25	16.45	16.36	16.42	17	0
10	16QAM	50	0	16.41	16.38	16.58		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	16.51	16.45	16.37	17	0
5	QPSK	1	12	16.34	16.22	16.23		
5	QPSK	1	24	16.32	16.17	16.43		
5	QPSK	12	0	16.36	16.34	16.25	17	0
5	QPSK	12	7	16.31	16.22	16.26		
5	QPSK	12	13	16.40	16.26	16.34		
5	QPSK	25	0	16.46	16.38	16.46	17	0
5	16QAM	1	0	16.53	16.36	16.45		
5	16QAM	1	12	16.47	16.51	16.46		
5	16QAM	1	24	16.45	16.39	16.44	17	0
5	16QAM	12	0	16.40	16.47	16.35		
5	16QAM	12	7	16.41	16.31	16.36		
5	16QAM	12	13	16.38	16.36	16.36	17	0
5	16QAM	25	0	16.51	16.30	16.50		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	16.60	16.42	16.42	17	0
3	QPSK	1	8	16.33	16.29	16.21		
3	QPSK	1	14	16.34	16.22	16.36		
3	QPSK	8	0	16.36	16.37	16.23	17	0
3	QPSK	8	4	16.38	16.24	16.31		
3	QPSK	8	7	16.37	16.22	16.31		
3	QPSK	15	0	16.42	16.30	16.44	17	0
3	16QAM	1	0	16.53	16.37	16.39		
3	16QAM	1	8	16.46	16.48	16.46		
3	16QAM	1	14	16.47	16.41	16.44	17	0
3	16QAM	8	0	16.42	16.48	16.30		
3	16QAM	8	4	16.38	16.36	16.27		
3	16QAM	8	7	16.40	16.29	16.37	17	0
3	16QAM	15	0	16.43	16.35	16.44		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	16.59	16.43	16.40	17	0
1.4	QPSK	1	3	16.32	16.23	16.30		
1.4	QPSK	1	5	16.29	16.16	16.39		
1.4	QPSK	3	0	16.40	16.35	16.28		
1.4	QPSK	3	1	16.37	16.22	16.22		
1.4	QPSK	3	3	16.38	16.30	16.38		
1.4	QPSK	6	0	16.42	16.30	16.46	17	0
1.4	16QAM	1	0	16.45	16.38	16.42	17	0
1.4	16QAM	1	3	16.47	16.52	16.44		
1.4	16QAM	1	5	16.42	16.37	16.45		
1.4	16QAM	3	0	16.39	16.46	16.33		
1.4	16QAM	3	1	16.38	16.29	16.36		
1.4	16QAM	3	3	16.46	16.27	16.38		
1.4	16QAM	6	0	16.42	16.34	16.44	17	0



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	19.09	18.93	19.11	20	0
10	QPSK	1	25	18.91	18.97	18.99		
10	QPSK	1	49	18.97	19.02	19.05		
10	QPSK	25	0	18.99	18.94	19.04	20	0
10	QPSK	25	12	18.94	18.96	18.98		
10	QPSK	25	25	18.93	19.02	19.02		
10	QPSK	50	0	18.99	18.97	18.98	20	0
10	16QAM	1	0	19.09	18.99	19.08		
10	16QAM	1	25	18.86	19.05	18.98		
10	16QAM	1	49	18.99	19.02	19.09	20	0
10	16QAM	25	0	18.70	18.70	18.77		
10	16QAM	25	12	18.68	18.72	18.68		
10	16QAM	25	25	18.71	18.76	18.75	20	0
10	16QAM	50	0	18.70	18.73	18.77		
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	19.02	18.87	19.02	20	0
5	QPSK	1	12	18.85	18.94	18.92		
5	QPSK	1	24	18.95	18.95	19.02		
5	QPSK	12	0	18.92	18.90	18.94	20	0
5	QPSK	12	7	18.86	18.96	18.96		
5	QPSK	12	13	18.92	18.93	18.97		
5	QPSK	25	0	18.97	18.97	18.91	20	0
5	16QAM	1	0	19.01	18.92	19.07		
5	16QAM	1	12	18.84	19.02	18.89		
5	16QAM	1	24	18.93	18.92	19.02	20	0
5	16QAM	12	0	18.64	18.64	18.68		
5	16QAM	12	7	18.61	18.64	18.64		
5	16QAM	12	13	18.62	18.76	18.70	20	0
5	16QAM	25	0	18.69	18.67	18.72		
Channel				20415	20525	20635		
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	19.10	18.91	19.01	20	0
3	QPSK	1	8	18.89	18.91	18.93		
3	QPSK	1	14	18.90	18.99	19.04		
3	QPSK	8	0	18.98	18.87	18.97	20	0
3	QPSK	8	4	18.91	18.89	18.89		
3	QPSK	8	7	18.86	18.95	19.00		
3	QPSK	15	0	18.91	18.96	18.94	20	0
3	16QAM	1	0	19.07	18.91	19.03		
3	16QAM	1	8	18.86	19.04	18.94		
3	16QAM	1	14	18.99	19.02	19.05	20	0
3	16QAM	8	0	18.64	18.70	18.71		
3	16QAM	8	4	18.63	18.62	18.68		
3	16QAM	8	7	18.68	18.68	18.65	20	0
3	16QAM	15	0	18.65	18.68	18.73		



FCC SAR Test Report

Report No. : FA7O2534-06

Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	19.05	18.92	19.06	20	0
1.4	QPSK	1	3	18.86	18.96	18.96		
1.4	QPSK	1	5	18.90	19.01	19.00		
1.4	QPSK	3	0	18.99	18.93	19.01		
1.4	QPSK	3	1	18.93	18.96	18.97		
1.4	QPSK	3	3	18.83	18.97	18.97	20	0
1.4	QPSK	6	0	18.91	18.87	18.98		
1.4	16QAM	1	0	19.03	18.98	19.04	20	0
1.4	16QAM	1	3	18.77	18.97	18.90		
1.4	16QAM	1	5	18.96	18.94	19.02		
1.4	16QAM	3	0	18.60	18.60	18.71		
1.4	16QAM	3	1	18.65	18.64	18.59		
1.4	16QAM	3	3	18.67	18.72	18.75	20	0
1.4	16QAM	6	0	18.64	18.73	18.67		



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350	19	0
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	18.33	18.43	18.42		
20	QPSK	1	49	18.24	18.10	18.25	19	0
20	QPSK	1	99	18.24	18.17	18.30		
20	QPSK	50	0	18.18	18.25	18.16		
20	QPSK	50	24	18.26	18.12	18.27	19	0
20	QPSK	50	50	18.21	18.19	18.31		
20	QPSK	100	0	18.27	18.33	18.31		
20	16QAM	1	0	18.33	18.24	18.35	19	0
20	16QAM	1	49	18.39	18.27	18.31		
20	16QAM	1	99	18.32	18.39	18.28		
20	16QAM	50	0	18.29	18.17	18.21	19	0
20	16QAM	50	24	18.27	18.13	18.33		
20	16QAM	50	50	18.22	18.20	18.36		
20	16QAM	100	0	18.38	18.17	18.33	19	0
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	18.31	18.03	18.09	19	0
15	QPSK	1	37	18.29	18.07	18.24		
15	QPSK	1	74	18.20	18.14	18.23		
15	QPSK	36	0	18.34	18.15	18.24	19	0
15	QPSK	36	20	18.35	18.14	18.31		
15	QPSK	36	39	18.33	18.18	18.30		
15	QPSK	75	0	18.37	18.15	18.35	19	0
15	16QAM	1	0	18.32	18.27	18.37		
15	16QAM	1	37	18.31	18.37	18.30		
15	16QAM	1	74	18.33	18.32	18.32	19	0
15	16QAM	36	0	18.36	18.17	18.28		
15	16QAM	36	20	18.36	18.17	18.34		
15	16QAM	36	39	18.33	18.20	18.34	19	0
15	16QAM	75	0	18.34	18.11	18.40		
Channel				20800	21100	21400		
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	18.35	18.10	18.28	19	0
10	QPSK	1	25	18.33	18.07	18.27		
10	QPSK	1	49	18.35	18.17	18.30		
10	QPSK	25	0	18.37	18.11	18.34	19	0
10	QPSK	25	12	18.33	18.11	18.29		
10	QPSK	25	25	18.33	18.13	18.34		
10	QPSK	50	0	18.31	18.11	18.25	19	0
10	16QAM	1	0	18.35	18.32	18.32		
10	16QAM	1	25	18.34	18.31	18.37		
10	16QAM	1	49	18.33	18.40	18.30	19	0
10	16QAM	25	0	18.30	18.15	18.34		
10	16QAM	25	12	18.29	18.15	18.30		
10	16QAM	25	25	18.29	18.17	18.35	19	0
10	16QAM	50	0	18.36	18.13	18.28		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	18.33	18.24	18.40	19	0
5	QPSK	1	12	18.18	18.02	18.20		
5	QPSK	1	24	18.14	18.11	18.30		
5	QPSK	12	0	18.19	18.14	18.14	19	0
5	QPSK	12	7	18.19	18.09	18.27		
5	QPSK	12	13	18.20	18.12	18.23		
5	QPSK	25	0	18.28	18.20	18.31		
5	16QAM	1	0	18.29	18.22	18.26	19	0
5	16QAM	1	12	18.30	18.17	18.27		
5	16QAM	1	24	18.29	18.34	18.18		
5	16QAM	12	0	18.20	18.14	18.17	19	0
5	16QAM	12	7	18.20	18.04	18.23		
5	16QAM	12	13	18.12	18.16	18.35		
5	16QAM	25	0	18.37	18.13	18.25		



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130	21	0
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	20.73	20.74	20.71		
10	QPSK	1	25	20.72	20.61	20.69	21	0
10	QPSK	1	49	20.69	20.73	20.70		
10	QPSK	25	0	20.70	20.72	20.56		
10	QPSK	25	12	20.67	20.59	20.64	21	0
10	QPSK	25	25	20.63	20.66	20.61		
10	QPSK	50	0	20.60	20.70	20.61		
10	16QAM	1	0	20.67	20.65	20.63	21	0
10	16QAM	1	25	20.65	20.61	20.69		
10	16QAM	1	49	20.60	20.64	20.68		
10	16QAM	25	0	20.71	20.73	20.62	21	0
10	16QAM	25	12	20.71	20.67	20.68		
10	16QAM	25	25	20.71	20.72	20.64		
10	16QAM	50	0	20.70	20.71	20.69	21	0
Channel				23035	23095	23155		
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	20.43	20.47	20.49	21	0
5	QPSK	1	12	20.68	20.53	20.62		
5	QPSK	1	24	20.68	20.63	20.66		
5	QPSK	12	0	20.69	20.65	20.51	21	0
5	QPSK	12	7	20.61	20.59	20.54		
5	QPSK	12	13	20.57	20.62	20.52		
5	QPSK	25	0	20.50	20.72	20.67	21	0
5	16QAM	1	0	20.67	20.59	20.61		
5	16QAM	1	12	20.60	20.57	20.60		
5	16QAM	1	24	20.52	20.54	20.62	21	0
5	16QAM	12	0	20.66	20.71	20.59		
5	16QAM	12	7	20.68	20.63	20.67		
5	16QAM	12	13	20.70	20.62	20.59	21	0
5	16QAM	25	0	20.60	20.62	20.64		
Channel				23025	23095	23165		
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	20.51	20.46	20.50	21	0
3	QPSK	1	8	20.65	20.54	20.61		
3	QPSK	1	14	20.66	20.70	20.66		
3	QPSK	8	0	20.64	20.63	20.53	21	0
3	QPSK	8	4	20.64	20.53	20.55		
3	QPSK	8	7	20.58	20.58	20.61		
3	QPSK	15	0	20.58	20.70	20.68	21	0
3	16QAM	1	0	20.61	20.59	20.56		
3	16QAM	1	8	20.56	20.57	20.59		
3	16QAM	1	14	20.54	20.61	20.59	21	0
3	16QAM	8	0	20.67	20.66	20.52		
3	16QAM	8	4	20.70	20.64	20.58		
3	16QAM	8	7	20.70	20.62	20.64	21	0
3	16QAM	15	0	20.62	20.67	20.65		



Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	20.45	20.52	20.55	21	0
1.4	QPSK	1	3	20.72	20.57	20.67		
1.4	QPSK	1	5	20.64	20.73	20.64		
1.4	QPSK	3	0	20.64	20.58	20.55		
1.4	QPSK	3	1	20.62	20.51	20.62		
1.4	QPSK	3	3	20.55	20.61	20.56		
1.4	QPSK	6	0	20.55	20.68	20.71	21	0
1.4	16QAM	1	0	20.65	20.56	20.60	21	0
1.4	16QAM	1	3	20.59	20.61	20.65		
1.4	16QAM	1	5	20.60	20.64	20.60		
1.4	16QAM	3	0	20.65	20.73	20.62		
1.4	16QAM	3	1	20.65	20.61	20.68		
1.4	16QAM	3	3	20.65	20.62	20.60		
1.4	16QAM	6	0	20.69	20.64	20.62	21	0

<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0	19.45			20	0
10	QPSK	1	25	19.29				
10	QPSK	1	49	19.32				
10	QPSK	25	0	19.44			20	0
10	QPSK	25	12	19.29				
10	QPSK	25	25	19.33				
10	QPSK	50	0	19.42				
10	16QAM	1	0	19.24			20	0
10	16QAM	1	25	19.20				
10	16QAM	1	49	19.28				
10	16QAM	25	0	19.29			20	0
10	16QAM	25	12	19.22				
10	16QAM	25	25	19.21				
10	16QAM	50	0	19.26				
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	19.32	19.34	19.25	20	0
5	QPSK	1	12	19.27	19.26	19.20		
5	QPSK	1	24	19.22	19.24	19.23		
5	QPSK	12	0	19.32	19.24	19.33	20	0
5	QPSK	12	7	19.19	19.20	19.19		
5	QPSK	12	13	19.31	19.33	19.33		
5	QPSK	25	0	19.31	19.34	19.31	20	0
5	16QAM	1	0	19.15	19.15	19.15		
5	16QAM	1	12	19.11	19.14	19.15		
5	16QAM	1	24	19.19	19.28	19.24	20	0
5	16QAM	12	0	19.27	19.23	19.29		
5	16QAM	12	7	19.17	19.20	19.15		
5	16QAM	12	13	19.21	19.13	19.20		
5	16QAM	25	0	19.24	19.20	19.24		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	20.66	20.67	20.61		
10	QPSK	1	25	20.65	20.52	20.66	21	0
10	QPSK	1	49	20.63	20.63	20.62		
10	QPSK	25	0	20.62	20.62	20.51		
10	QPSK	25	12	20.57	20.57	20.54	21	0
10	QPSK	25	25	20.57	20.61	20.59		
10	QPSK	50	0	20.59	20.62	20.60		
10	16QAM	1	0	20.57	20.55	20.60	21	0
10	16QAM	1	25	20.60	20.52	20.61		
10	16QAM	1	49	20.57	20.64	20.60		
10	16QAM	25	0	20.62	20.64	20.60	21	0
10	16QAM	25	12	20.64	20.65	20.65		
10	16QAM	25	25	20.61	20.65	20.59		
10	16QAM	50	0	20.61	20.62	20.62		
Channel				23755	23790	23825	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	20.36	20.37	20.49	21	0
5	QPSK	1	12	20.62	20.47	20.60		
5	QPSK	1	24	20.59	20.54	20.61		
5	QPSK	12	0	20.65	20.56	20.47	21	0
5	QPSK	12	7	20.60	20.59	20.50		
5	QPSK	12	13	20.55	20.61	20.50		
5	QPSK	25	0	20.45	20.67	20.66	21	0
5	16QAM	1	0	20.58	20.50	20.60		
5	16QAM	1	12	20.52	20.49	20.57		
5	16QAM	1	24	20.47	20.47	20.61	21	0
5	16QAM	12	0	20.62	20.63	20.52		
5	16QAM	12	7	20.65	20.53	20.66		
5	16QAM	12	13	20.64	20.53	20.51	21	0
5	16QAM	25	0	20.60	20.62	20.57		



<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965	20	0
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	18.82	19.08	18.83		
15	QPSK	1	37	18.87	18.89	18.94	20	0
15	QPSK	1	74	18.81	18.89	18.92		
15	QPSK	36	0	18.92	18.95	18.94		
15	QPSK	36	20	18.91	18.92	18.88	20	0
15	QPSK	36	39	18.92	18.90	18.86		
15	QPSK	75	0	18.86	18.94	18.87		
15	16QAM	1	0	18.89	18.93	18.89	20	0
15	16QAM	1	37	18.86	18.92	18.92		
15	16QAM	1	74	18.92	18.93	18.93		
15	16QAM	36	0	18.94	18.93	18.89	20	0
15	16QAM	36	20	18.89	18.83	18.84		
15	16QAM	36	39	18.87	18.89	18.88		
15	16QAM	75	0	18.89	18.85	18.92	20	0
Channel				26740	26865	26990		
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	18.75	18.83	18.78	20	0
10	QPSK	1	25	18.87	18.86	18.85		
10	QPSK	1	49	18.81	18.81	18.88		
10	QPSK	25	0	18.86	18.82	18.94	20	0
10	QPSK	25	12	18.91	18.92	18.85		
10	QPSK	25	25	18.85	18.80	18.77		
10	QPSK	50	0	18.84	18.80	18.84	20	0
10	16QAM	1	0	18.85	18.83	18.83		
10	16QAM	1	25	18.83	18.84	18.84		
10	16QAM	1	49	18.83	18.93	18.92	20	0
10	16QAM	25	0	18.87	18.88	18.84		
10	16QAM	25	12	18.86	18.81	18.83		
10	16QAM	25	25	18.77	18.85	18.87	20	0
10	16QAM	50	0	18.86	18.80	18.90		
Channel				26715	26865	27015		
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	18.82	18.88	18.76	20	0
5	QPSK	1	12	18.85	18.88	18.90		
5	QPSK	1	24	18.80	18.81	18.93		
5	QPSK	12	0	18.94	18.83	18.93	20	0
5	QPSK	12	7	18.88	18.85	18.87		
5	QPSK	12	13	18.86	18.85	18.83		
5	QPSK	25	0	18.83	18.73	18.81	20	0
5	16QAM	1	0	18.85	18.93	18.85		
5	16QAM	1	12	18.85	18.90	18.83		
5	16QAM	1	24	18.90	18.87	18.87	20	0
5	16QAM	12	0	18.87	18.86	18.84		
5	16QAM	12	7	18.89	18.77	18.82		
5	16QAM	12	13	18.83	18.85	18.84	20	0
5	16QAM	25	0	18.79	18.77	18.82		



Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	18.80	18.83	18.74	20	0
3	QPSK	1	8	18.83	18.84	18.92		
3	QPSK	1	14	18.74	18.85	18.95		
3	QPSK	8	0	18.94	18.83	18.92	20	0
3	QPSK	8	4	18.91	18.89	18.80		
3	QPSK	8	7	18.84	18.89	18.86		
3	QPSK	15	0	18.80	18.77	18.85		
3	16QAM	1	0	18.83	18.85	18.82	20	0
3	16QAM	1	8	18.86	18.83	18.90		
3	16QAM	1	14	18.87	18.91	18.87		
3	16QAM	8	0	18.85	18.93	18.89	20	0
3	16QAM	8	4	18.87	18.73	18.79		
3	16QAM	8	7	18.79	18.86	18.84		
3	16QAM	15	0	18.86	18.80	18.84		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	18.74	18.80	18.78	20	0
1.4	QPSK	1	3	18.78	18.88	18.92		
1.4	QPSK	1	5	18.72	18.88	18.87		
1.4	QPSK	3	0	18.91	18.83	18.92		
1.4	QPSK	3	1	18.87	18.84	18.80		
1.4	QPSK	3	3	18.91	18.80	18.82		
1.4	QPSK	6	0	18.86	18.82	18.83	20	0
1.4	16QAM	1	0	18.83	18.88	18.86	20	0
1.4	16QAM	1	3	18.80	18.90	18.83		
1.4	16QAM	1	5	18.85	18.88	18.92		
1.4	16QAM	3	0	18.84	18.90	18.88		
1.4	16QAM	3	1	18.79	18.75	18.81		
1.4	16QAM	3	3	18.86	18.79	18.86		
1.4	16QAM	6	0	18.79	18.80	18.83	20	0



<LTE Band 30>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				27710				
Frequency (MHz)				2310				
10	QPSK	1	0	20.68			21	0
10	QPSK	1	25	20.33				
10	QPSK	1	49	20.25				
10	QPSK	25	0	20.65			21	0
10	QPSK	25	12	20.62				
10	QPSK	25	25	20.59				
10	QPSK	50	0	20.55				
10	16QAM	1	0	20.55			21	0
10	16QAM	1	25	20.54				
10	16QAM	1	49	20.42				
10	16QAM	25	0	20.29			21	0
10	16QAM	25	12	20.33				
10	16QAM	25	25	20.32				
10	16QAM	50	0	20.41				
Channel				27685	27710	27735	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2307.5	2310	2312.5		
5	QPSK	1	0	20.28	20.31	20.32	21	0
5	QPSK	1	12	20.24	20.33	20.31		
5	QPSK	1	24	20.16	20.19	20.17		
5	QPSK	12	0	20.58	20.61	20.58	21	0
5	QPSK	12	7	20.59	20.57	20.58		
5	QPSK	12	13	20.50	20.51	20.59		
5	QPSK	25	0	20.29	20.29	20.27	21	0
5	16QAM	1	0	20.46	20.53	20.50		
5	16QAM	1	12	20.45	20.47	20.51		
5	16QAM	1	24	20.34	20.38	20.37	21	0
5	16QAM	12	0	20.22	20.24	20.19		
5	16QAM	12	7	20.33	20.29	20.29		
5	16QAM	12	13	20.30	20.32	20.28		
5	16QAM	25	0	20.40	20.33	20.33		



<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572	17	0
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	16.46	16.54	16.44		
20	QPSK	1	49	16.18	16.08	16.36	17	0
20	QPSK	1	99	16.19	16.35	16.47		
20	QPSK	50	0	16.28	16.34	16.31		
20	QPSK	50	24	16.25	16.27	16.25	17	0
20	QPSK	50	50	16.21	16.22	16.22		
20	QPSK	100	0	16.33	16.43	16.36		
20	16QAM	1	0	16.40	16.49	16.39	17	0
20	16QAM	1	49	16.48	16.34	16.32		
20	16QAM	1	99	16.40	16.42	16.34		
20	16QAM	50	0	16.17	16.18	16.51	17	0
20	16QAM	50	24	16.18	16.10	16.36		
20	16QAM	50	50	16.15	16.26	16.32		
20	16QAM	100	0	16.38	16.40	16.32	17	0
Channel				132047	132322	132597		
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	16.15	16.19	16.44	17	0
15	QPSK	1	37	16.14	16.08	16.36		
15	QPSK	1	74	16.10	16.27	16.46		
15	QPSK	36	0	16.14	16.17	16.39	17	0
15	QPSK	36	20	16.16	16.09	16.33		
15	QPSK	36	39	16.21	16.30	16.35		
15	QPSK	75	0	16.42	16.35	16.31	17	0
15	16QAM	1	0	16.36	16.46	16.37		
15	16QAM	1	37	16.40	16.32	16.26		
15	16QAM	1	74	16.35	16.40	16.33	17	0
15	16QAM	36	0	16.09	16.12	16.50		
15	16QAM	36	20	16.13	16.05	16.32		
15	16QAM	36	39	16.05	16.19	16.22	17	0
15	16QAM	75	0	16.33	16.33	16.30		
Channel				132022	132322	132622		
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	16.16	16.21	16.54	17	0
10	QPSK	1	25	16.14	16.08	16.34		
10	QPSK	1	49	16.17	16.33	16.40		
10	QPSK	25	0	16.17	16.19	16.40	17	0
10	QPSK	25	12	16.22	16.17	16.30		
10	QPSK	25	25	16.18	16.25	16.33		
10	QPSK	50	0	16.42	16.41	16.35	17	0
10	16QAM	1	0	16.39	16.40	16.36		
10	16QAM	1	25	16.42	16.34	16.29		
10	16QAM	1	49	16.39	16.35	16.25	17	0
10	16QAM	25	0	16.12	16.08	16.42		
10	16QAM	25	12	16.18	16.02	16.36		
10	16QAM	25	25	16.10	16.17	16.22	17	0
10	16QAM	50	0	16.29	16.32	16.24		



Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	16.12	16.19	16.45	17	0
5	QPSK	1	12	16.11	16.01	16.36		
5	QPSK	1	24	16.18	16.31	16.39		
5	QPSK	12	0	16.24	16.17	16.39	17	0
5	QPSK	12	7	16.24	16.17	16.36		
5	QPSK	12	13	16.17	16.27	16.36		
5	QPSK	25	0	16.40	16.36	16.33	17	0
5	16QAM	1	0	16.34	16.41	16.35		
5	16QAM	1	12	16.38	16.30	16.31		
5	16QAM	1	24	16.30	16.42	16.32	17	0
5	16QAM	12	0	16.17	16.10	16.42		
5	16QAM	12	7	16.12	16.08	16.32		
5	16QAM	12	13	16.15	16.24	16.27	17	0
5	16QAM	25	0	16.32	16.31	16.26		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	16.08	16.17	16.50	17	0
3	QPSK	1	8	16.10	16.04	16.26		
3	QPSK	1	14	16.13	16.26	16.45		
3	QPSK	8	0	16.14	16.22	16.38	17	0
3	QPSK	8	4	16.16	16.08	16.35		
3	QPSK	8	7	16.17	16.28	16.36		
3	QPSK	15	0	16.35	16.33	16.31	17	0
3	16QAM	1	0	16.35	16.48	16.35		
3	16QAM	1	8	16.46	16.24	16.32		
3	16QAM	1	14	16.38	16.33	16.27	17	0
3	16QAM	8	0	16.12	16.08	16.50		
3	16QAM	8	4	16.18	16.02	16.27		
3	16QAM	8	7	16.06	16.25	16.24	17	0
3	16QAM	15	0	16.33	16.37	16.27		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	16.12	16.17	16.45	17	0
1.4	QPSK	1	3	16.18	15.98	16.36		
1.4	QPSK	1	5	16.15	16.27	16.37		
1.4	QPSK	3	0	16.18	16.15	16.39	17	0
1.4	QPSK	3	1	16.21	16.07	16.36		
1.4	QPSK	3	3	16.15	16.22	16.30		
1.4	QPSK	6	0	16.37	16.43	16.27	17	0
1.4	16QAM	1	0	16.30	16.46	16.31	17	0
1.4	16QAM	1	3	16.39	16.33	16.31		
1.4	16QAM	1	5	16.40	16.41	16.30		
1.4	16QAM	3	0	16.07	16.11	16.44	17	0
1.4	16QAM	3	1	16.10	16.09	16.30		
1.4	16QAM	3	3	16.14	16.24	16.24		
1.4	16QAM	6	0	16.36	16.36	16.29	17	0

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

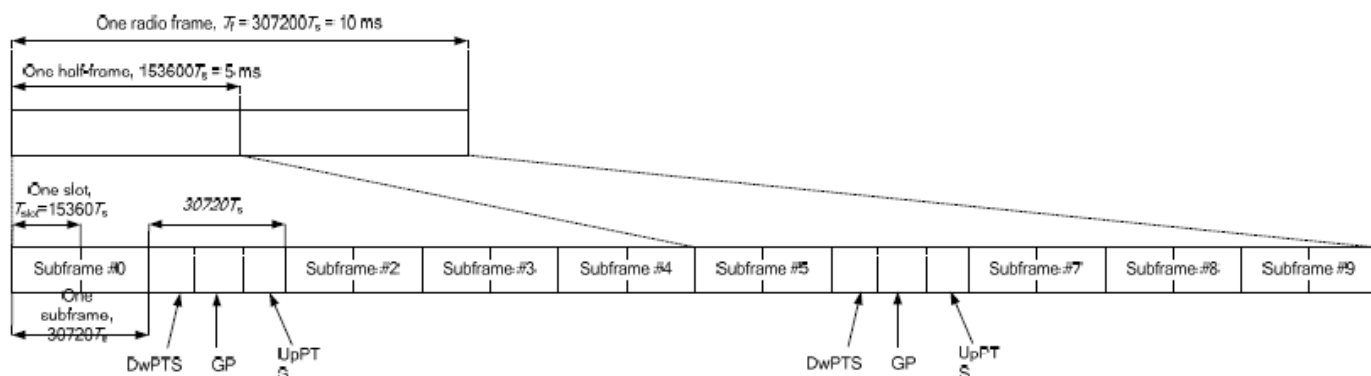


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720 \square T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720 \square T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.



<Default Power Mode>

<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	22.84	22.86	22.90	22.87	22.92	24	0
20	QPSK	1	49	22.83	22.83	22.89	22.83	22.91		
20	QPSK	1	99	22.83	22.76	22.89	22.85	22.85		
20	QPSK	50	0	21.85	21.79	21.87	21.89	21.91	23	1
20	QPSK	50	24	21.82	21.71	21.85	21.87	21.90		
20	QPSK	50	50	21.82	21.73	21.85	21.88	21.90		
20	QPSK	100	0	21.89	21.82	21.87	21.87	21.93	23	1
20	16QAM	1	0	21.85	21.82	21.93	21.87	22.04		
20	16QAM	1	49	21.88	21.85	21.94	21.92	22.02		
20	16QAM	1	99	21.89	21.91	21.95	21.97	21.99	22	2
20	16QAM	50	0	20.96	20.81	20.91	20.86	20.98		
20	16QAM	50	24	20.93	20.87	20.89	20.92	20.97		
20	16QAM	50	50	20.91	20.88	20.89	20.94	20.92	22	2
20	16QAM	100	0	21.00	20.89	20.87	20.91	20.92		
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	22.81	22.70	22.84	22.81	22.85	24	0
15	QPSK	1	37	22.81	22.68	22.85	22.83	22.81		
15	QPSK	1	74	22.77	22.74	22.81	22.84	22.76		
15	QPSK	36	0	21.86	21.72	21.84	21.80	21.88	23	1
15	QPSK	36	20	21.84	21.73	21.83	21.89	21.85		
15	QPSK	36	39	21.86	21.78	21.80	21.88	21.85		
15	QPSK	75	0	21.86	21.72	21.80	21.88	21.85	23	1
15	16QAM	1	0	21.82	21.73	21.91	21.86	21.96		
15	16QAM	1	37	21.85	21.76	21.96	21.95	21.92		
15	16QAM	1	74	21.84	21.81	21.94	21.96	21.85	22	2
15	16QAM	36	0	20.87	20.73	20.93	20.82	20.91		
15	16QAM	36	20	20.85	20.76	20.93	20.88	20.89		
15	16QAM	36	39	20.93	20.84	20.89	20.87	20.92	22	2
15	16QAM	75	0	20.99	20.83	20.94	20.94	20.98		
Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	22.85	22.77	22.88	22.88	22.90	24	0
10	QPSK	1	25	22.82	22.74	22.87	22.83	22.89		
10	QPSK	1	49	22.83	22.79	22.87	22.86	22.81		
10	QPSK	25	0	21.89	21.74	21.87	21.95	21.88	23	1
10	QPSK	25	12	21.90	21.73	21.89	21.94	21.92		
10	QPSK	25	25	21.86	21.80	21.92	21.95	21.93		
10	QPSK	50	0	21.87	21.70	21.85	21.90	21.88	23	1
10	16QAM	1	0	21.86	21.81	21.95	21.93	22.00		
10	16QAM	1	25	21.89	21.81	21.93	21.95	22.00		
10	16QAM	1	49	21.90	21.88	21.94	21.95	21.94	22	2
10	16QAM	25	0	21.00	20.90	20.96	21.00	21.02		
10	16QAM	25	12	21.02	20.89	20.98	21.02	21.02		
10	16QAM	25	25	21.02	20.96	21.01	21.06	21.02	22	2
10	16QAM	50	0	20.99	20.82	20.89	20.99	20.92		

Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	22.76	22.70	22.77	22.87	22.80	24	0
5	QPSK	1	12	22.76	22.68	22.77	22.83	22.77		
5	QPSK	1	24	22.79	22.71	22.81	22.85	22.73		
5	QPSK	12	0	21.84	21.73	21.80	21.87	21.86	23	1
5	QPSK	12	7	21.84	21.72	21.80	21.86	21.85		
5	QPSK	12	13	21.85	21.73	21.82	21.87	21.85		
5	QPSK	25	0	21.87	21.74	21.82	21.88	21.85	23	1
5	16QAM	1	0	21.83	21.75	21.83	21.89	21.88		
5	16QAM	1	12	21.85	21.74	21.84	21.90	21.88		
5	16QAM	1	24	21.90	21.77	21.89	21.93	21.86	22	2
5	16QAM	12	0	20.92	20.76	20.82	20.93	20.89		
5	16QAM	12	7	20.91	20.75	20.88	20.92	20.89		
5	16QAM	12	13	20.92	20.76	20.90	20.93	20.90		
5	16QAM	25	0	20.98	20.81	20.94	20.98	20.94		

<Reduced Power Mode>
<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	19.80	19.82	19.85	19.84	19.91	21	0
20	QPSK	1	49	19.79	19.75	19.79	19.83	19.83		
20	QPSK	1	99	19.78	19.78	19.81	19.89	19.85		
20	QPSK	50	0	19.82	19.72	19.80	19.82	19.86	21	0
20	QPSK	50	24	19.79	19.67	19.79	19.76	19.85		
20	QPSK	50	50	19.78	19.68	19.70	19.77	19.82		
20	QPSK	100	0	19.87	19.75	19.83	19.74	19.84	21	0
20	16QAM	1	0	19.74	19.70	19.78	19.76	19.88		
20	16QAM	1	49	19.74	19.74	19.83	19.83	19.87		
20	16QAM	1	99	19.74	19.77	19.84	19.86	19.87	21	0
20	16QAM	50	0	19.88	19.78	19.87	19.84	19.85		
20	16QAM	50	24	19.87	19.83	19.86	19.87	19.88		
20	16QAM	50	50	19.88	19.84	19.87	19.88	19.88	21	0
20	16QAM	50	50	19.88	19.84	19.87	19.88	19.88		
20	16QAM	100	0	19.85	19.79	19.81	19.85	19.89		
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	19.73	19.70	19.72	19.74	19.73	21	0
15	QPSK	1	37	19.78	19.71	19.70	19.84	19.75		
15	QPSK	1	74	19.69	19.68	19.78	19.84	19.85		
15	QPSK	36	0	19.75	19.67	19.75	19.80	19.84	21	0
15	QPSK	36	20	19.77	19.76	19.69	19.81	19.87		
15	QPSK	36	39	19.77	19.77	19.73	19.77	19.85		
15	QPSK	75	0	19.79	19.70	19.78	19.78	19.88	21	0
15	16QAM	1	0	19.69	19.62	19.73	19.72	19.80		
15	16QAM	1	37	19.73	19.72	19.74	19.82	19.80		
15	16QAM	1	74	19.73	19.73	19.74	19.85	19.79	21	0
15	16QAM	36	0	19.85	19.77	19.80	19.79	19.90		
15	16QAM	36	20	19.81	19.74	19.83	19.87	19.88		
15	16QAM	36	39	19.83	19.74	19.82	19.84	19.81	21	0
15	16QAM	75	0	19.86	19.75	19.81	19.77	19.82		
Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	19.76	19.63	19.74	19.82	19.79	21	0
10	QPSK	1	25	19.78	19.65	19.72	19.82	19.74		
10	QPSK	1	49	19.74	19.73	19.75	19.85	19.84		
10	QPSK	25	0	19.75	19.69	19.77	19.81	19.78	21	0
10	QPSK	25	12	19.70	19.69	19.72	19.86	19.79		
10	QPSK	25	25	19.76	19.69	19.76	19.84	19.85		
10	QPSK	50	0	19.78	19.68	19.79	19.80	19.85	21	0
10	16QAM	1	0	19.65	19.63	19.70	19.70	19.85		
10	16QAM	1	25	19.70	19.69	19.82	19.83	19.84		
10	16QAM	1	49	19.66	19.70	19.80	19.85	19.86	21	0
10	16QAM	25	0	19.81	19.78	19.80	19.77	19.84		
10	16QAM	25	12	19.84	19.81	19.80	19.83	19.83		
10	16QAM	25	25	19.78	19.79	19.84	19.87	19.82	21	0
10	16QAM	25	25	19.78	19.79	19.84	19.87	19.82		
10	16QAM	50	0	19.85	19.70	19.78	19.78	19.87		



Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	19.77	19.64	19.65	19.79	19.80	21	0
5	QPSK	1	12	19.75	19.73	19.74	19.82	19.74		
5	QPSK	1	24	19.68	19.76	19.80	19.87	19.77		
5	QPSK	12	0	19.75	19.62	19.80	19.80	19.81	21	0
5	QPSK	12	7	19.73	19.73	19.79	19.79	19.83		
5	QPSK	12	13	19.78	19.68	19.71	19.84	19.86		
5	QPSK	25	0	19.85	19.68	19.81	19.84	19.85	21	0
5	16QAM	1	0	19.66	19.69	19.77	19.76	19.78		
5	16QAM	1	12	19.71	19.72	19.78	19.77	19.82		
5	16QAM	1	24	19.68	19.68	19.79	19.76	19.81	21	0
5	16QAM	12	0	19.78	19.73	19.80	19.81	19.90		
5	16QAM	12	7	19.80	19.82	19.82	19.86	19.85		
5	16QAM	12	13	19.79	19.76	19.87	19.85	19.79	21	0
5	16QAM	25	0	19.86	19.71	19.76	19.85	19.81		

<LTE Carrier Aggregation>
General Note:

1. This device supports Carrier Aggregation on downlink only for inter and intra band, Uplink CA is not supported. For the device supports combination bands and configurations are provided as follow table was according to 3GPP.
2. In applying the existing power measurement procedure of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of the frequency band and CCs in each row need consideration, and that configurations require power measurement should be highlighted in the below table.
3. All permutations exist. No restrictions on Pcell & Scell combinations. Only LTE Band 29A is limited to Scell.

<Inter-Band combinations>

2 bands / 2 CC	2 bands / 3 CC	3 bands / 3 CC
CA_2A-4A		CA_2A-4A-5A
	CA_2A-2A-5A	
CA_4A_5A	CA_4A_4A_5A	
	CA_2C-5A	
	CA_2A_66B	
	CA_2A_66C	
CA_2A-17A		
CA_2A-13A		CA_2A-4A-13A
CA_4A_13A	CA_4A_4A_13A	
CA_2A-5A	CA_2A-2A-5A	CA_2A-5A-30A
CA_2A-30A		
CA_5A_30A		
CA_2A-66A		CA_2A-5A-66A
CA_5A_66A	CA_5A_66A_66A	
CA_2A-12A		CA_2A-12A-30A
CA_12A_30A		
CA_2A-13A	CA_2A-2A-13A	CA_2A_13A_66A
CA_13A_66A	CA_13A_66A_66A	
CA_2A-29A		CA_2A_29A_30A
CA_2A-30A		
CA_30A_29A		
		CA_4A_5A_30A
CA_4A_12A		CA_4A_12A_30A
CA_4A_17A		
CA_4A_29A		CA_4A_29A_30A
CA_4A_30A		
CA_5A_7A		
	CA_5A_66B	
	CA_5A_66C	
	CA_13A_66B	
	CA_13A_66C	

<Intra-Band combinations>

Intra-Band Contiguous	Intra-Band non-Contiguous
CA_2C	CA_2A_2A
Intra-Band Contiguous	Intra-Band non-Contiguous
	CA_4A_4A
Intra-Band Contiguous	Intra-Band non-Contiguous
CA_7B	CA_7A_7A
CA_7C	
Intra-Band Contiguous	Intra-Band non-Contiguous
CA_41C	CA_41A_41A
Intra-Band Contiguous	Intra-Band non-Contiguous
CA_66D	

<LTE Carrier Aggregation Power verification>

General Note:

- According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- The device supports downlink carrier aggregation only. Uplink carrier aggregation is not supported. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band.
- For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<Two Carrier power verification>

Configure		CA Configuration (BCS)	PCC						SCC				Power		
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band		CA_2A-17A	2	10	1880	18900	QPSK	1	49	17	10	740	5790	23.75	23.76
			17	10	710	23790	QPSK	1	0	2	10	1960	900	23.66	23.65
		CA_4A-17A	4	10	1750	20350	QPSK	1	25	17	10	740	5790	23.66	23.68
			17	10	710	23790	QPSK	1	0	4	10	2132.5	2175	23.66	23.65
		CA_5A-7A	5	10	844	20600	QPSK	1	0	7	20	2655	3100	23.61	23.61
			7	20	2535	21100	QPSK	1	0	5	10	881.5	2525	22.66	22.67
Intra-Band	Non-Contiguous	CA_2A-2A	2	20	1900	19100	QPSK	1	0	2	5	1932.5	625	23.75	23.77
		CA_4A-4A	4	20	1732.5	20175	QPSK	1	0	4	5	2152.5	2375	23.68	23.70
		CA_7A-7A	7	20	2535	21100	QPSK	1	0	7	5	2687.5	3425	22.66	22.67
		CA_41A-41A	41	20	2680	41490	QPSK	1	0	41	5	2545.8	40148	22.93	22.92
	Contiguous	CA_2C	2	20	1900	19100	QPSK	1	0	2	20	1960.2	902	23.76	23.77
		CA_7B	7	15	2535	21100	QPSK	1	0	7	5	2664.3	3193	22.54	22.55
		CA_7C	7	20	2535	21100	QPSK	1	0	7	20	2674.8	3298	22.66	22.67
		CA_41C	41	20	2680	41490	QPSK	1	0	41	20	2660.2	41292	22.91	22.92



<Three Carrier power verification>

Configure	CA Configuration (BCS)	PCC							SCC				SCC2				Power	
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band	CA_2C-5A	2	20	1900	19100	QPSK	1	0	2	20	1960	900	5	10	881.5	2525	23.75	23.77
		5	10	844	20600	QPSK	1	0	2	20	1960	900	2	20	1960	900	23.60	23.61
	CA_2A-66B	2	20	1900	19100	QPSK	1	0	66	15	2155	66886	66	5	2155	66886	23.66	23.68
		66	15	1772.5	132597	QPSK	1	74	66	5	2155	66886	2	20	1960	900	23.58	23.59
	CA_2A-66C	2	20	1900	19100	QPSK	1	0	66	20	2155	66886	66	20	2155	66886	23.67	23.68
		66	20	1745	132322	QPSK	1	0	66	20	2155	66886	2	20	1960	900	23.64	23.63
	CA_5A-66B	5	10	844	20600	QPSK	1	0	66	15	2155	66886	66	5	2155	66886	23.60	23.61
		66	15	1772.5	132597	QPSK	1	74	66	5	2155	66886	5	10	881.5	2525	23.58	23.59
	CA_5A-66C	5	10	844	20600	QPSK	1	0	66	20	2155	66886	66	20	2185.8	67194	23.60	23.61
		66	20	1745	132322	QPSK	1	0	66	20	2155	66886	2	20	1960	900	23.64	23.63
	CA_13A-66B	13	10	782	23230	QPSK	1	0	66	15	2155	66886	66	5	2155	66886	23.48	23.49
		66	15	1772.5	132597	QPSK	1	74	66	5	2155	66886	13	10	751	5230	23.58	23.59
	CA_13A-66C	13	10	782	23230	QPSK	1	0	66	20	2155	66886	66	20	2185.8	67194	23.48	23.49
		66	20	1745	132322	QPSK	1	0	66	20	2155	66886	13	10	751	5230	23.64	23.63

Configure	CA Configuration (BCS)	PCC							SCC1				SCC2				Power	
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	W/O CA Tx. Power (dBm)
Inter-Band	CA_2A-4A-5A	2	20	1900	19100	QPSK	1	0	4	20	2132.5	2175	5	10	881.5	2525	23.77	23.77
		4	20	1732.5	20175	QPSK	1	0	2	20	1960	900	5	10	881.5	2525	23.69	23.70
		5	10	844	20600	QPSK	1	0	2	20	1960	900	4	20	2132.5	2175	23.62	23.61
	CA_2A-4A-13A	2	20	1900	19100	QPSK	1	0	4	20	2132.5	2175	13	10	751	5230	23.77	23.77
		4	20	1732.5	20175	QPSK	1	0	2	20	1960	900	13	10	751	5230	23.70	23.70
		13	10	782	23230	QPSK	1	0	2	20	1960	900	4	20	2132.5	2175	23.50	23.49
	CA_2A-5A-30A	2	20	1900	19100	QPSK	1	0	5	10	881.5	2525	30	10	2355	9820	23.77	23.77
		5	10	844	20600	QPSK	1	0	2	20	1960	900	30	10	2355	9820	23.62	23.61
		30	10	2310	27710	QPSK	1	0	2	20	1960	900	5	10	881.5	2525	22.66	22.67
	CA_2A-5A-66A	2	20	1900	19100	QPSK	1	0	5	10	881.5	2525	66	20	2155	66886	23.77	23.77
		5	10	844	20600	QPSK	1	0	2	20	1960	900	66	20	2155	66886	23.62	23.61
		66	20	1745	132322	QPSK	1	0	2	20	1960	900	5	10	881.5	2525	23.62	23.63
	CA_2A-12A-30A	2	20	1900	19100	QPSK	1	0	12	10	737.5	5095	30	10	2355	9820	23.77	23.77
		12	10	707.5	23095	QPSK	1	0	2	20	1960	900	30	10	2355	9820	23.63	23.62
		30	10	2310	27710	QPSK	1	0	2	20	1960	900	12	10	737.5	5095	22.66	22.67
	CA_2A-13A-66A	2	20	1900	19100	QPSK	1	0	13	10	751	5230	66	20	2155	66886	23.77	23.77
		13	10	782	23230	QPSK	1	0	2	20	1960	900	66	20	2155	66886	23.50	23.49
		66	20	1745	132322	QPSK	1	0	2	20	1960	900	13	10	751	5230	23.62	23.63
	CA_2A-29A-30A	2	20	1900	19100	QPSK	1	0	29	10	722.5	9715	30	10	2355	9820	23.77	23.77
		30	10	2310	27710	QPSK	1	0	2	20	1960	900	29	10	722.5	9715	22.66	22.67
	CA_4A-5A-30A	4	20	1732.5	20175	QPSK	1	0	5	10	881.5	2525	30	10	2355	9820	23.66	23.67
		5	10	844	20600	QPSK	1	0	4	20	2132.5	2175	30	10	2355	9820	23.69	23.70
		30	10	2310	27710	QPSK	1	0	4	20	2132.5	2175	5	10	881.5	2525	22.66	22.67
	CA_4A-12A-30A	4	20	1732.5	20175	QPSK	1	0	12	10	737.5	5095	30	10	2355	9820	23.66	23.67
		12	10	707.5	23095	QPSK	1	0	4	20	2132.5	2175	30	10	2355	9820	23.63	23.62
		30	10	2310	27710	QPSK	1	0	4	20	2132.5	2175	12	10	737.5	5095	22.66	22.67
	CA_4A-29A-30A	4	20	1732.5	20175	QPSK	1	0	29	10	722.5	9715	30	10	2355	9820	23.66	23.67
		30	10	2310	27710	QPSK	1	0	4	20	2132.5	2175	29	10	722.5	9715	22.66	22.67
Intra-Band Contiguous	CA_66D	66	20	1745	132322	QPSK	1	0	66	15	2172.1	67057	66	10	2184.1	67177	23.63	23.63

<WLAN Conducted Power>**General Note:**

1. For each antenna, transmit power in SISO operation is larger than (or equal to) the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode.
2. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is $< 1.6\text{W/kg}$ and SAR peak to location ratio ≤ 0.04 , no additional SAR measurements for MIMO.
3. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
4. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
5. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
6. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is $\leq 0.4\text{ W/kg}$, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is $> 0.4\text{ W/kg}$, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is $\leq 0.8\text{ W/kg}$ or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is $> 0.8\text{ W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is $\leq 1.2\text{ W/kg}$ or all required channels are tested.

**<2.4GHz WLAN ANT 1>**

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
	802.11b 1Mbps	1	2412	16.83	17.00	17.00	99.03
		6	2437	16.78	17.00	16.75	
		11	2462	16.72	17.00	16.75	
		12	2467	13.99	14.50	14.00	
		13	2472	8.84	9.50	9.00	
	802.11g 6Mbps	1	2412	16.89	17.00	16.50	93.58
		6	2437	16.94	17.00	16.50	
		11	2462	16.87	17.00	16.50	
		12	2467	12.35	12.50	11.875	
		13	2472	-2.96	-2.50	-4.00	
	802.11n-HT20 MCS0	1	2412	16.92	17.00	16.75	95.00
		6	2437	16.96	17.00	16.50	
		11	2462	16.29	17.00	16.00	
		12	2467	12.15	12.50	12.00	
		13	2472	-3.98	-3.50	-4.50	
	802.11n-HT40 MCS0	3	2422	15.92	17.00	15.25	86.79
		6	2437	16.72	17.00	16.00	
		9	2452	13.89	14.00	13.50	
		10	2457	10.52	11.00	10.00	
		11	2462	-4.48	-4.00	-6.00	

<2.4GHz WLAN ANT 2>

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
	802.11b 1Mbps	1	2412	16.86	17.00	17.00	98.56
		6	2437	16.81	17.00	17.00	
		11	2462	16.76	17.00	17.00	
		12	2467	14.04	14.50	14.375	
		13	2472	9.09	9.50	9.25	
	802.11g 6Mbps	1	2412	16.90	17.00	16.75	94.44
		6	2437	16.95	17.00	16.75	
		11	2462	16.89	17.00	16.75	
		12	2467	12.40	12.50	12.25	
		13	2472	-2.94	-2.50	-4.375	
	802.11n-HT20 MCS0	1	2412	16.93	17.00	16.75	95.00
		6	2437	16.97	17.00	16.75	
		11	2462	16.55	17.00	16.50	
		12	2467	12.36	12.50	12.375	
		13	2472	-3.94	-3.50	-4.875	
	802.11n-HT40 MCS0	3	2422	15.96	17.00	15.75	86.54
		6	2437	16.91	17.00	16.75	
		9	2452	13.90	14.00	13.25	
		10	2457	10.65	11.00	10.25	
		11	2462	-4.45	-4.00	-6.25	

**<2.4GHz WLAN ANT 1+2>**

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
	802.11n-HT20 MCS0	1	2412	16.81	17.00	13.50	87.27
		6	2437	16.79	17.00	13.50	
		11	2462	16.70	17.00	13.375	
		12	2467	12.18	12.50	8.625	
		13	2472	-4.39	-3.50	-9.25	
	802.11n-HT40 MCS0	3	2422	15.62	17.00	12.50	88.57
		6	2437	16.76	17.00	13.75	
		9	2452	15.16	17.00	12.25	
		10	2457	16.55	17.00	13.50	
		11	2462	16.53	17.00	13.375	



<5GHz WLAN ANT1>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	14.78	15.00	14.00	94.47
		40	5200	14.75	15.00	14.00	
		44	5220	14.76	15.00	14.50	
		48	5240	14.87	15.00	14.50	
	802.11n-HT20 MCS0	36	5180	14.80	15.00	14.25	95.52
		40	5200	14.70	15.00	14.25	
		44	5220	14.81	15.00	14.50	
		48	5240	14.67	15.00	14.50	
	802.11n-HT40 MCS0	38	5190	14.84	15.00	14.25	88.68
		46	5230	14.86	15.00	14.75	
	802.11ac-VHT20 MCS0	36	5180	14.79	15.00	14.25	95.05
		40	5200	14.59	15.00	14.25	
		44	5220	14.63	15.00	14.50	
		48	5240	14.62	15.00	14.50	
	802.11ac-VHT40 MCS0	38	5190	14.82	15.00	14.25	88.68
		46	5230	14.73	15.00	14.75	
	802.11ac-VHT80 MCS0	42	5210	14.89	15.00	14.75	89.15

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	14.94	15.00	14.50	94.47
		56	5280	14.95	15.00	14.50	
		60	5300	14.96	15.00	14.50	
		64	5320	14.88	15.00	14.50	
	802.11n-HT20 MCS0	52	5260	14.79	15.00	14.50	95.52
		56	5280	14.86	15.00	14.50	
		60	5300	14.84	15.00	14.50	
		64	5320	14.73	15.00	14.50	
	802.11n-HT40 MCS0	54	5270	14.95	15.00	14.75	88.68
		62	5310	14.87	15.00	14.75	
	802.11ac-VHT20 MCS0	52	5260	14.72	15.00	14.50	95.05
		56	5280	14.66	15.00	14.50	
		60	5300	14.74	15.00	14.50	
		64	5320	14.61	15.00	14.50	
	802.11ac-VHT40 MCS0	54	5270	14.88	15.00	14.75	88.68
		62	5310	14.84	15.00	14.75	
	802.11ac-VHT80 MCS0	58	5290	14.28	15.00	14.75	89.15



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	13.85	14.50	13.25	94.47
		116	5580	13.79	14.50	13.25	
		124	5620	13.78	14.50	13.25	
		132	5660	13.76	14.50	13.25	
		144	5720	13.72	14.50	13.125	
	802.11n-HT20 MCS0	100	5500	13.70	14.50	13.25	95.52
		116	5580	13.65	14.50	13.25	
		124	5620	13.64	14.50	13.25	
		132	5660	13.63	14.50	13.25	
		144	5720	13.55	14.50	13.125	
	802.11n-HT40 MCS0	102	5510	13.82	14.50	13.00	88.68
		110	5550	13.67	14.50	12.50	
		126	5630	13.63	14.50	12.50	
		134	5670	13.57	14.50	12.625	
		142	5710	13.54	14.50	12.625	
	802.11ac-VHT20 MCS0	100	5500	13.60	14.50	13.125	95.05
		116	5580	13.57	14.50	13.125	
		124	5620	13.55	14.50	13.125	
		132	5660	13.54	14.50	13.125	
		144	5720	13.54	14.50	13.125	
	802.11ac-VHT40 MCS0	102	5510	13.79	14.50	13.00	88.68
		110	5550	13.66	14.50	12.50	
		126	5630	13.62	14.50	12.50	
		134	5670	13.56	14.50	12.625	
		142	5710	13.53	14.50	12.75	
	802.11ac-VHT80 MCS0	106	5530	13.80	14.50	12.75	89.15
		122	5610	13.65	14.50	13.125	
		138	5690	13.63	14.50	12.875	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	13.45	13.50	12.75	94.47
		157	5785	13.40	13.50	12.75	
		165	5825	13.30	13.50	12.875	
	802.11n-HT20 MCS0	149	5745	13.35	13.50	12.875	95.52
		157	5785	13.30	13.50	12.875	
		165	5825	13.23	13.50	13.00	
	802.11n-HT40 MCS0	151	5755	13.47	13.50	12.625	88.68
		159	5795	13.43	13.50	12.50	
	802.11ac-VHT20 MCS0	149	5745	13.32	13.50	12.875	95.05
		157	5785	13.29	13.50	12.75	
		165	5825	13.22	13.50	12.875	
	802.11ac-VHT40 MCS0	151	5755	13.46	13.50	12.625	88.68
		159	5795	13.40	13.50	12.50	
	802.11ac-VHT80 MCS0	155	5775	13.42	13.50	12.875	89.15

<5GHz WLAN ANT2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	14.99	15.00	15.00	94.47
		40	5200	14.79	15.00	15.00	
		44	5220	14.82	15.00	15.00	
		48	5240	14.96	15.00	15.00	
	802.11n-HT20 MCS0	36	5180	14.89	15.00	15.00	95.03
		40	5200	14.77	15.00	15.00	
		44	5220	14.82	15.00	15.00	
		48	5240	14.81	15.00	15.00	
	802.11n-HT40 MCS0	38	5190	14.85	15.00	15.25	88.68
		46	5230	14.87	15.00	15.25	
	802.11ac-VHT20 MCS0	36	5180	14.84	15.00	15.00	95.05
		40	5200	14.66	15.00	15.00	
		44	5220	14.64	15.00	15.00	
		48	5240	14.74	15.00	15.00	
	802.11ac-VHT40 MCS0	38	5190	14.83	15.00	15.25	89.62
		46	5230	14.78	15.00	15.25	
	802.11ac-VHT80 MCS0	42	5210	14.93	15.00	15.50	87.69

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	14.95	15.00	14.75	94.47
		56	5280	14.81	15.00	14.75	
		60	5300	14.98	15.00	14.75	
		64	5320	14.90	15.00	14.75	
	802.11n-HT20 MCS0	52	5260	14.91	15.00	14.75	95.03
		56	5280	14.78	15.00	14.75	
		60	5300	14.85	15.00	14.75	
		64	5320	14.77	15.00	14.75	
	802.11n-HT40 MCS0	54	5270	14.97	15.00	14.75	88.68
		62	5310	14.89	15.00	14.75	
	802.11ac-VHT20 MCS0	52	5260	14.83	15.00	14.75	95.05
		56	5280	14.69	15.00	14.75	
		60	5300	14.75	15.00	14.75	
		64	5320	14.62	15.00	14.75	
	802.11ac-VHT40 MCS0	54	5270	14.89	15.00	14.75	89.62
		62	5310	14.85	15.00	14.75	
	802.11ac-VHT80 MCS0	58	5290	14.55	15.00	13.875	87.69

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	13.97	14.50	13.125	94.47
		116	5580	13.85	14.50	13.50	
		124	5620	13.69	14.50	13.50	
		132	5660	13.68	14.50	13.00	
		144	5720	13.75	14.50	13.125	
	802.11n-HT20 MCS0	100	5500	13.71	14.50	13.00	95.03
		116	5580	13.67	14.50	13.50	
		124	5620	13.61	14.50	13.50	
		132	5660	13.60	14.50	13.00	
		144	5720	13.57	14.50	13.125	
	802.11n-HT40 MCS0	102	5510	13.87	14.50	12.75	88.68
		110	5550	13.70	14.50	13.00	
		126	5630	13.65	14.50	13.00	
		134	5670	13.62	14.50	13.00	
		142	5710	13.55	14.50	12.625	
	802.11ac-VHT20 MCS0	100	5500	13.64	14.50	13.00	95.05
		116	5580	13.60	14.50	13.50	
		124	5620	13.59	14.50	13.50	
		132	5660	13.57	14.50	13.00	
		144	5720	13.55	14.50	13.125	
	802.11ac-VHT40 MCS0	102	5510	13.83	14.50	12.75	89.62
		110	5550	13.69	14.50	13.00	
		126	5630	13.60	14.50	13.00	
		134	5670	13.58	14.50	13.00	
		142	5710	13.54	14.50	12.625	
	802.11ac-VHT80 MCS0	106	5530	13.82	14.50	12.875	87.69
		122	5610	13.67	14.50	13.25	
		138	5690	13.65	14.50	13.00	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	13.24	13.50	12.75	94.47
		157	5785	13.20	13.50	12.50	
		165	5825	13.17	13.50	12.375	
	802.11n-HT20 MCS0	149	5745	13.30	13.50	13.00	95.03
		157	5785	13.25	13.50	12.625	
		165	5825	13.22	13.50	12.625	
	802.11n-HT40 MCS0	151	5755	13.42	13.50	12.625	88.68
		159	5795	13.37	13.50	12.25	
	802.11ac-VHT20 MCS0	149	5745	13.27	13.50	13.00	95.05
		157	5785	13.22	13.50	12.625	
		165	5825	13.20	13.50	12.625	
	802.11ac-VHT40 MCS0	151	5755	13.33	13.50	12.625	89.62
		159	5795	13.25	13.50	12.25	
	802.11ac-VHT80 MCS0	155	5775	13.40	13.50	12.875	87.69

<5GHz WLAN ANT1+2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
5.2GHz WLAN	802.11n-HT20 MCS0	36	5180	14.71	15.00	11.50	88.18
		40	5200	14.77	15.00	11.50	
		44	5220	14.60	15.00	11.50	
		48	5240	14.75	15.00	11.50	
	802.11n-HT40 MCS0	38	5190	14.61	15.00	11.50	87.77
		46	5230	14.61	15.00	11.75	
	802.11ac-VHT20 MCS0	36	5180	14.59	15.00	11.50	89.19
		40	5200	14.68	15.00	11.50	
		44	5220	14.53	15.00	11.50	
		48	5240	14.70	15.00	11.50	
	802.11ac-VHT40 MCS0	38	5190	14.60	15.00	11.50	85.97
		46	5230	14.50	15.00	11.75	
	802.11ac-VHT80 MCS0	42	5210	14.69	15.00	12.00	86.49

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
5.3GHz WLAN	802.11n-HT20 MCS0	52	5260	14.91	15.00	11.50	88.18
		56	5280	14.89	15.00	11.50	
		60	5300	14.85	15.00	11.50	
		64	5320	14.84	15.00	11.50	
	802.11n-HT40 MCS0	54	5270	14.76	15.00	11.50	87.77
		62	5310	14.67	15.00	11.50	
	802.11ac-VHT20 MCS0	52	5260	14.88	15.00	11.50	89.19
		56	5280	14.78	15.00	11.50	
		60	5300	14.77	15.00	11.50	
		64	5320	14.82	15.00	11.50	
	802.11ac-VHT40 MCS0	54	5270	14.73	15.00	11.50	85.97
		62	5310	14.62	15.00	11.50	
	802.11ac-VHT80 MCS0	58	5290	14.83	15.00	11.75	86.49

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
5.5GHz WLAN	802.11n-HT20 MCS0	100	5500	13.90	14.50	9.50	88.18
		116	5580	13.77	14.50	9.625	
		124	5620	13.75	14.50	9.625	
		132	5660	13.74	14.50	9.375	
		144	5720	13.67	14.50	9.375	
	802.11n-HT40 MCS0	102	5510	13.83	14.50	9.875	87.77
		110	5550	13.79	14.50	9.875	
		126	5630	13.75	14.50	9.875	
		134	5670	13.66	14.50	9.875	
		142	5710	13.65	14.50	9.75	
	802.11ac-VHT20 MCS0	100	5500	13.86	14.50	9.50	89.19
		116	5580	13.71	14.50	9.50	
		124	5620	13.70	14.50	9.50	
		132	5660	13.68	14.50	9.375	
		144	5720	13.62	14.50	9.375	
	802.11ac-VHT40 MCS0	102	5510	13.81	14.50	9.875	85.97
		110	5550	13.73	14.50	9.625	
		126	5630	13.70	14.50	9.75	
		134	5670	13.64	14.50	9.75	
		142	5710	13.63	14.50	9.625	
	802.11ac-VHT80 MCS0	106	5530	13.75	14.50	10.00	86.49
		122	5610	13.63	14.50	10.375	
		138	5690	13.58	14.50	10.125	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
5.8GHz WLAN	802.11n-HT20 MCS0	149	5745	13.46	13.50	9.25	88.18
		157	5785	13.45	13.50	9.00	
		165	5825	13.26	13.50	9.00	
	802.11n-HT40 MCS0	151	5755	13.33	13.50	9.50	87.77
		159	5795	13.20	13.50	9.25	
	802.11ac-VHT20 MCS0	149	5745	13.43	13.50	9.25	89.19
		157	5785	13.41	13.50	9.00	
		165	5825	13.25	13.50	9.00	
	802.11ac-VHT40 MCS0	151	5755	13.32	13.50	9.50	85.97
		159	5795	13.16	13.50	9.125	
	802.11ac-VHT80 MCS0	155	5775	13.40	13.50	10.00	86.49


<2.4GHz Bluetooth>

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	9.88	6.33	5.17
	CH 39	2441	9.93	6.51	5.67
	CH 78	2480	9.69	6.27	5.58
Tune-up Limit			11.00	7.00	7.00


Mode	Channel	Frequency (MHz)	Average power (dBm)		
			GFSK		
LE	CH 00	2402	5.09		
	CH 19	2440	5.38		
	CH 39	2480	5.39		
Tune-up Limit			7.00		

General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.

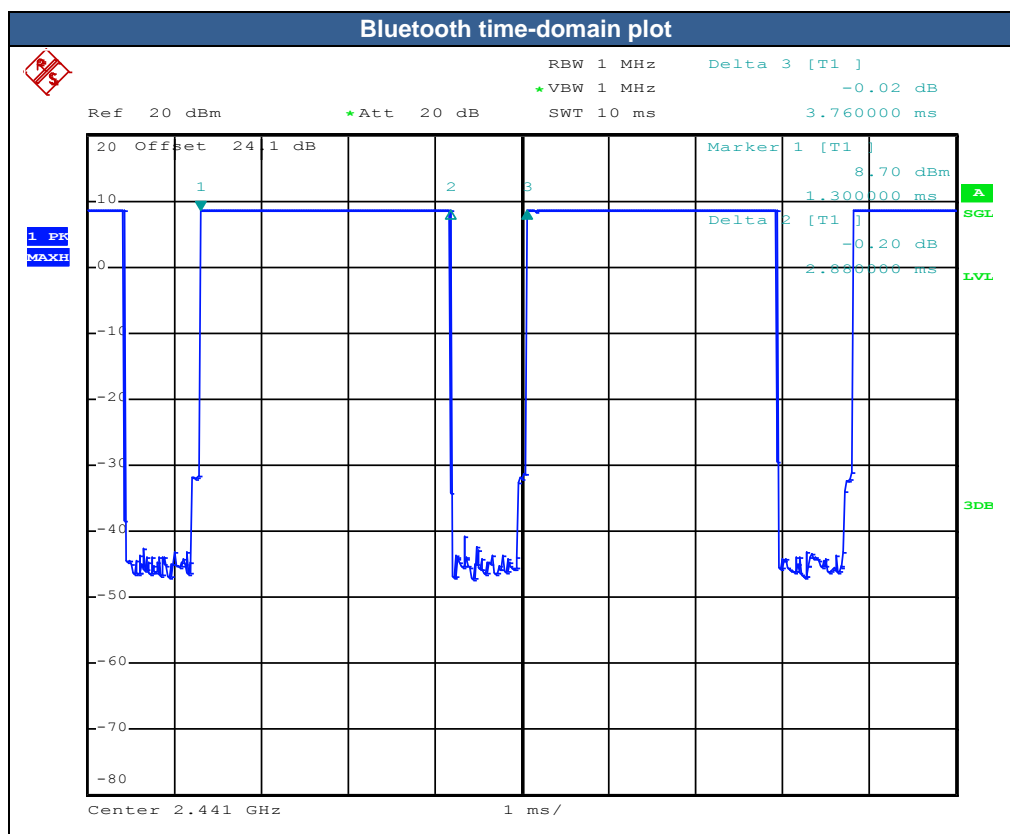

13. Antenna Location

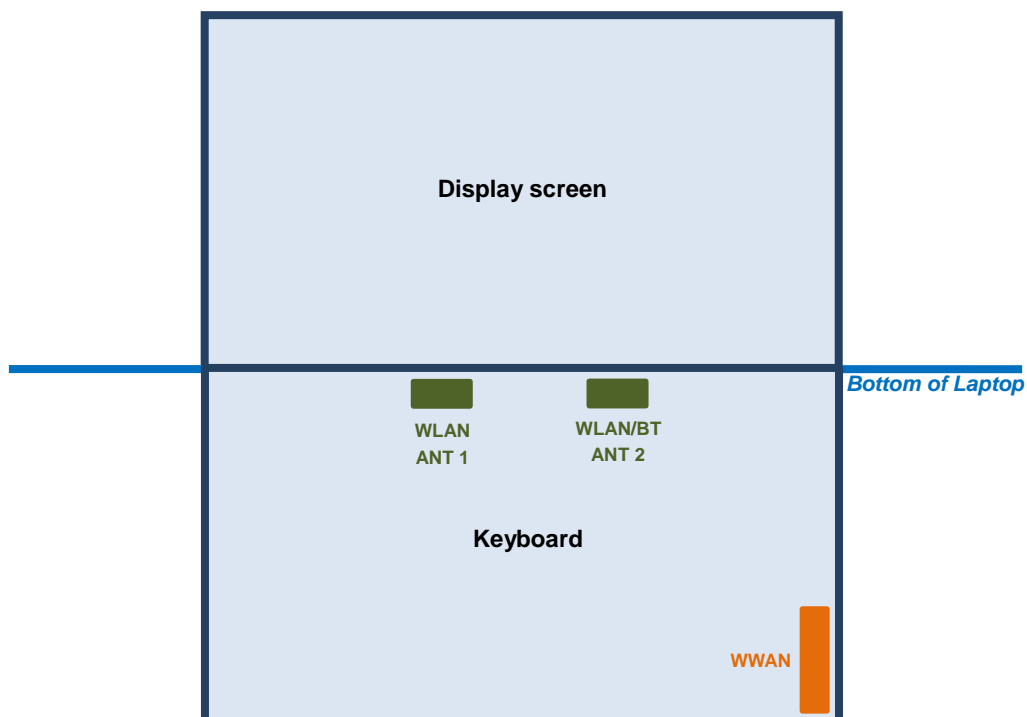

14. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result.
The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. For the body SAR measurement was used a low-loss foam block performed testing, the relative permittivity and loss tangent of the foam material is 1.0 and 10-5, respectively, therefore holder perturbation verification is not required even highest reported SAR is >1.2 W/kg.
5. For the exposure positions that proximity sensor power reduction is applied for SAR compliance, additional SAR testing with EUT transmitting full power in normal mode was performed; 10mm for bottom of Laptop.
6. The proximity sensor is used to detect the human proximity, and the G-sensor is used to detect EUT motion and determine whether the proximity sensor is triggered by human or fixed objects such as the table. During SAR test for EUT at the power reduction mode, the EUT positioning was stationary for stable measurement, and G-sensor was manually set not enabled to successfully set EUT in the power reduction mode

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq 1/4$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $1/4$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B12 / B17 / B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 4/17 SAR test was covered by Band 66/12; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. For WLAN SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
6. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg and SAR peak to location ratio ≤ 0.04 , no additional SAR measurements for MIMO.
7. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

**14.1 Body SAR****<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna Vendor	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	0mm	Amphenol	ON	9400	1880	15.47	17.00	1.422	0.06	0.671	0.954
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	0mm	Amphenol	ON	9262	1852.4	15.45	17.00	1.429	0.01	0.740	1.057
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	0mm	Amphenol	ON	9538	1907.6	15.20	17.00	1.514	0.01	0.614	0.929
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	10mm	Amphenol	OFF	9400	1880	23.43	24.50	1.279	0.04	0.914	1.169
01	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	10mm	Amphenol	OFF	9262	1852.4	23.38	24.50	1.294	-0.05	0.921	1.192
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	10mm	Amphenol	OFF	9538	1907.6	23.18	24.50	1.355	0.03	0.845	1.145
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	10mm	Speed	OFF	9400	1880	23.43	24.50	1.279	-0.18	0.905	1.158
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	10mm	Speed	OFF	9262	1852.4	23.38	24.50	1.294	-0.03	0.859	1.112
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	10mm	Speed	OFF	9538	1907.6	23.18	24.50	1.355	0	0.846	1.146
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	0mm	Amphenol	ON	1413	1732.6	15.48	17.00	1.419	-0.06	0.761	1.080
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	0mm	Amphenol	ON	1312	1712.4	15.31	17.00	1.476	-0.04	0.784	1.157
02	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	0mm	Amphenol	ON	1513	1752.6	15.46	17.00	1.426	0	0.818	1.166
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	0mm	Speed	ON	1413	1732.6	15.48	17.00	1.419	-0.13	0.729	1.034
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	0mm	Speed	ON	1312	1712.4	15.31	17.00	1.476	-0.08	0.725	1.070
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	0mm	Speed	ON	1513	1752.6	15.46	17.00	1.426	0.03	0.721	1.028
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	10mm	Amphenol	OFF	1413	1732.6	23.13	24.50	1.371	0.03	0.823	1.128
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	10mm	Amphenol	OFF	1312	1712.4	23.10	24.50	1.380	0	0.835	1.153
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	10mm	Amphenol	OFF	1513	1752.6	23.07	24.50	1.390	0.03	0.810	1.126
03	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	0mm	Amphenol	ON	4233	846.6	18.98	20.00	1.265	0.01	0.915	1.157
	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	0mm	Amphenol	ON	4132	826.4	18.95	20.00	1.274	0.03	0.889	1.132
	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	0mm	Amphenol	ON	4182	836.4	18.91	20.00	1.285	0.02	0.895	1.150
	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	0mm	Speed	ON	4182	836.4	18.91	20.00	1.285	0.05	0.865	1.112
	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	0mm	Speed	ON	4132	826.4	18.95	20.00	1.274	-0.01	0.847	1.079
	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	0mm	Speed	ON	4233	846.6	18.98	20.00	1.265	-0.04	0.878	1.110
	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	10mm	Amphenol	OFF	4233	846.6	23.76	24.50	1.186	0.1	0.714	0.847
	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	10mm	Amphenol	OFF	4132	826.4	23.57	24.50	1.239	0.07	0.728	0.902
	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	10mm	Amphenol	OFF	4182	836.4	23.55	24.50	1.245	0.02	0.702	0.874

**<FDD LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna Vendor	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
04	LTE Band 2	20M	QPSK	1	0	Bottom of Laptop	0mm	Amphenol	ON	19100	1900	16.40	17.00	1.148	0.03	0.769	0.883
	LTE Band 2	20M	QPSK	1	0	Bottom of Laptop	0mm	Amphenol	ON	18700	1860	16.26	17.00	1.186	0.01	0.896	1.062
	LTE Band 2	20M	QPSK	1	0	Bottom of Laptop	0mm	Amphenol	ON	18900	1880	16.28	17.00	1.180	0.01	0.811	0.957
	LTE Band 2	20M	QPSK	50	0	Bottom of Laptop	0mm	Amphenol	ON	19100	1900	16.35	17.00	1.161	0.01	0.753	0.875
	LTE Band 2	20M	QPSK	50	0	Bottom of Laptop	0mm	Amphenol	ON	18700	1860	16.12	17.00	1.225	0.02	0.850	1.041
	LTE Band 2	20M	QPSK	50	0	Bottom of Laptop	0mm	Amphenol	ON	18900	1880	16.15	17.00	1.216	0.01	0.777	0.945
	LTE Band 2	20M	QPSK	100	0	Bottom of Laptop	0mm	Amphenol	ON	19100	1900	16.13	17.00	1.222	-0.09	0.736	0.899
	LTE Band 2	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	19100	1900	16.40	17.00	1.148	0.04	0.875	1.005
	LTE Band 2	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	18700	1860	16.26	17.00	1.186	0.01	0.893	1.059
	LTE Band 2	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	18900	1880	16.28	17.00	1.180	-0.17	0.807	0.953
	LTE Band 2	20M	QPSK	1	0	Bottom of Laptop	10mm	Amphenol	OFF	19100	1900	23.77	24.00	1.054	-0.08	0.868	0.915
	LTE Band 2	20M	QPSK	1	0	Bottom of Laptop	10mm	Amphenol	OFF	18700	1860	23.72	24.00	1.067	0.01	0.913	0.974
05	LTE Band 2	20M	QPSK	1	0	Bottom of Laptop	10mm	Amphenol	OFF	18900	1880	23.75	24.00	1.059	-0.08	0.859	0.910
	LTE Band 2	20M	QPSK	50	0	Bottom of Laptop	10mm	Amphenol	OFF	19100	1900	22.81	23.00	1.045	0.04	0.655	0.684
	LTE Band 2	20M	QPSK	100	0	Bottom of Laptop	10mm	Amphenol	OFF	19100	1900	22.87	23.00	1.030	-0.09	0.642	0.662
	LTE Band 5	10M	QPSK	1	0	Bottom of Laptop	0mm	Amphenol	ON	20525	836.5	18.93	20.00	1.279	-0.02	0.867	1.109
	LTE Band 5	10M	QPSK	25	0	Bottom of Laptop	0mm	Amphenol	ON	20525	836.5	18.94	20.00	1.276	-0.03	0.896	1.144
	LTE Band 5	10M	QPSK	50	0	Bottom of Laptop	0mm	Amphenol	ON	20525	836.5	18.97	20.00	1.268	-0.01	0.885	1.122
	LTE Band 5	10M	QPSK	25	0	Bottom of Laptop	0mm	Speed	ON	20525	836.5	18.94	20.00	1.276	-0.02	0.868	1.108
	LTE Band 5	10M	QPSK	1	0	Bottom of Laptop	10mm	Amphenol	OFF	20525	836.5	23.47	25.00	1.422	0.03	0.744	1.058
	LTE Band 5	10M	QPSK	25	0	Bottom of Laptop	10mm	Amphenol	OFF	20525	836.5	22.50	24.00	1.413	0.03	0.589	0.832
	LTE Band 5	10M	QPSK	50	0	Bottom of Laptop	10mm	Amphenol	OFF	20525	836.5	22.52	24.00	1.406	0.04	0.578	0.813
	LTE Band 7	20M	QPSK	1	0	Bottom of Laptop	0mm	Amphenol	ON	21100	2535	18.43	19.00	1.140	0.06	0.710	0.810
	LTE Band 7	20M	QPSK	1	0	Bottom of Laptop	0mm	Amphenol	ON	20850	2510	18.33	19.00	1.167	0.11	0.961	1.121
06	LTE Band 7	20M	QPSK	1	0	Bottom of Laptop	0mm	Amphenol	ON	21350	2560	18.42	19.00	1.143	0.08	0.539	0.616
	LTE Band 7	20M	QPSK	50	0	Bottom of Laptop	0mm	Amphenol	ON	21100	2535	18.25	19.00	1.189	0.08	0.670	0.796
	LTE Band 7	20M	QPSK	50	0	Bottom of Laptop	0mm	Amphenol	ON	20850	2510	18.18	19.00	1.208	0.15	0.911	1.100
	LTE Band 7	20M	QPSK	50	0	Bottom of Laptop	0mm	Amphenol	ON	21350	2560	18.16	19.00	1.213	0.14	0.511	0.620
	LTE Band 7	20M	QPSK	100	0	Bottom of Laptop	0mm	Amphenol	ON	21100	2535	18.33	19.00	1.167	0.15	0.588	0.686
	LTE Band 7	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	20850	2510	18.33	19.00	1.167	0.14	0.511	0.596
	LTE Band 7	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	21100	2535	18.43	19.00	1.140	-0.05	0.692	0.789
	LTE Band 7	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	21350	2560	18.42	19.00	1.143	0	0.487	0.557
	LTE Band 7	20M	QPSK	1	0	Bottom of Laptop	10mm	Amphenol	OFF	21100	2535	22.67	24.00	1.358	0.08	0.398	0.541
	LTE Band 7	20M	QPSK	50	50	Bottom of Laptop	10mm	Amphenol	OFF	21100	2535	21.66	23.00	1.361	0.09	0.283	0.385
	LTE Band 12	10M	QPSK	1	0	Bottom of Laptop	0mm	Amphenol	ON	23095	707.5	20.74	21.00	1.062	0.02	0.996	1.057
	LTE Band 12	10M	QPSK	25	0	Bottom of Laptop	0mm	Amphenol	ON	23095	707.5	20.72	21.00	1.067	0.02	1.020	1.088
07	LTE Band 12	10M	QPSK	50	0	Bottom of Laptop	0mm	Amphenol	ON	23095	707.5	20.70	21.00	1.072	0.02	1.030	1.104
	LTE Band 12	10M	QPSK	50	0	Bottom of Laptop	0mm	Speed	ON	23095	707.5	20.70	21.00	1.072	0.01	0.956	1.024
	LTE Band 12	10M	QPSK	1	0	Bottom of Laptop	10mm	Amphenol	OFF	23095	707.5	23.62	24.00	1.091	0.04	0.652	0.712
	LTE Band 12	10M	QPSK	25	0	Bottom of Laptop	10mm	Amphenol	OFF	23095	707.5	22.71	23.00	1.069	-0.01	0.508	0.543
	LTE Band 13	10M	QPSK	1	0	Bottom of Laptop	0mm	Amphenol	ON	23230	782	19.45	20.00	1.135	-0.01	0.966	1.096
	LTE Band 13	10M	QPSK	25	0	Bottom of Laptop	0mm	Amphenol	ON	23230	782	19.44	20.00	1.138	-0.02	1.020	1.160
	LTE Band 13	10M	QPSK	50	0	Bottom of Laptop	0mm	Amphenol	ON	23230	782	19.42	20.00	1.143	-0.01	1.020	1.166
	LTE Band 13	10M	QPSK	50	0	Bottom of Laptop	0mm	Speed	ON	23230	782	19.42	20.00	1.143	-0.07	0.892	1.019
	LTE Band 13	10M	QPSK	1	0	Bottom of Laptop	10mm	Amphenol	OFF	23230	782	23.49	24.00	1.125	0.03	0.729	0.820
	LTE Band 13	10M	QPSK	25	0	Bottom of Laptop	10mm	Amphenol	OFF	23230	782	22.42	23.00	1.143	-0.01	0.610	0.697
	LTE Band 13	10M	QPSK	50	0	Bottom of Laptop	10mm	Amphenol	OFF	23230	782	22.36	23.00	1.159	0.03	0.605	0.701



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna Vendor	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
09	LTE Band 26	15M	QPSK	1	0	Bottom of Laptop	0mm	Amphenol	ON	26865	831.5	19.08	20.00	1.236	0	0.842	1.041
	LTE Band 26	15M	QPSK	36	0	Bottom of Laptop	0mm	Amphenol	ON	26865	831.5	18.95	20.00	1.274	-0.03	0.890	1.133
	LTE Band 26	15M	QPSK	75	0	Bottom of Laptop	0mm	Amphenol	ON	26865	831.5	18.94	20.00	1.276	-0.01	0.880	1.123
	LTE Band 26	15M	QPSK	36	0	Bottom of Laptop	0mm	Speed	ON	26865	831.5	18.95	20.00	1.274	-0.02	0.862	1.098
	LTE Band 26	15M	QPSK	1	0	Bottom of Laptop	10mm	Amphenol	OFF	26865	831.5	23.51	24.00	1.119	0.03	0.739	0.827
	LTE Band 26	15M	QPSK	36	0	Bottom of Laptop	10mm	Amphenol	OFF	26865	831.5	22.53	23.00	1.114	0.03	0.586	0.653
10	LTE Band 26	15M	QPSK	75	0	Bottom of Laptop	10mm	Amphenol	OFF	26865	831.5	22.61	23.00	1.094	0.04	0.575	0.629
	LTE Band 30	10M	QPSK	1	0	Bottom of Laptop	0mm	Amphenol	ON	27710	2310	20.68	21.00	1.076	0.17	1.060	1.141
	LTE Band 30	10M	QPSK	25	0	Bottom of Laptop	0mm	Amphenol	ON	27710	2310	20.65	21.00	1.084	0.15	1.070	1.160
	LTE Band 30	10M	QPSK	50	0	Bottom of Laptop	0mm	Amphenol	ON	27710	2310	20.55	21.00	1.109	0.17	1.040	1.154
	LTE Band 30	10M	QPSK	25	0	Bottom of Laptop	0mm	Speed	ON	27710	2310	20.65	21.00	1.084	0.11	0.866	0.939
	LTE Band 30	10M	QPSK	1	0	Bottom of Laptop	10mm	Amphenol	OFF	27710	2310	22.67	24.00	1.358	0.12	0.306	0.416
11	LTE Band 30	10M	QPSK	25	0	Bottom of Laptop	10mm	Amphenol	OFF	27710	2310	21.80	23.00	1.318	0	0.246	0.324
	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	0mm	Amphenol	ON	132322	1745	16.54	17.00	1.112	0	0.884	0.983
	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	0mm	Amphenol	ON	132072	1720	16.46	17.00	1.132	-0.01	0.854	0.967
	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	0mm	Amphenol	ON	132572	1770	16.44	17.00	1.138	0	0.896	1.019
	LTE Band 66	20M	QPSK	50	0	Bottom of Laptop	0mm	Amphenol	ON	132322	1745	16.34	17.00	1.164	0.06	0.894	1.041
	LTE Band 66	20M	QPSK	50	0	Bottom of Laptop	0mm	Amphenol	ON	132072	1720	16.28	17.00	1.180	-0.02	0.858	1.013
	LTE Band 66	20M	QPSK	50	0	Bottom of Laptop	0mm	Amphenol	ON	132572	1770	16.31	17.00	1.172	-0.01	0.902	1.057
	LTE Band 66	20M	QPSK	100	0	Bottom of Laptop	0mm	Amphenol	ON	132322	1745	16.43	17.00	1.140	-0.01	0.883	1.007
	LTE Band 66	20M	QPSK	50	0	Bottom of Laptop	0mm	Speed	ON	132572	1770	16.31	17.00	1.172	-0.1	0.774	0.907
	LTE Band 66	20M	QPSK	50	0	Bottom of Laptop	0mm	Speed	ON	132072	1720	16.28	17.00	1.180	-0.02	0.811	0.957
	LTE Band 66	20M	QPSK	50	0	Bottom of Laptop	0mm	Speed	ON	132322	1745	16.34	17.00	1.164	0.03	0.806	0.938
	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	10mm	Amphenol	OFF	132322	1745	23.63	24.00	1.089	-0.04	0.795	0.866
	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	10mm	Amphenol	OFF	132072	1720	23.35	24.00	1.161	-0.02	0.824	0.957
	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	10mm	Amphenol	OFF	132572	1770	23.62	24.00	1.091	0	0.759	0.828
	LTE Band 66	20M	QPSK	50	0	Bottom of Laptop	10mm	Amphenol	OFF	132322	1745	22.52	23.00	1.117	-0.07	0.618	0.690
	LTE Band 66	20M	QPSK	100	0	Bottom of Laptop	10mm	Amphenol	OFF	132322	1745	22.64	23.00	1.086	-0.03	0.612	0.665

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna Vendor	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
12	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	0mm	Amphenol	ON	41490	2680	19.91	21.00	1.285	62.9	1.006	0.02	0.370	0.478
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	0mm	Amphenol	ON	39750	2506	19.80	21.00	1.318	62.9	1.006	0.08	0.793	1.052
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	0mm	Amphenol	ON	40185	2549.5	19.82	21.00	1.312	62.9	1.006	-0.03	0.484	0.639
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	0mm	Amphenol	ON	40620	2593	19.85	21.00	1.303	62.9	1.006	0.09	0.305	0.400
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	0mm	Amphenol	ON	41055	2636.5	19.84	21.00	1.306	62.9	1.006	0.16	0.263	0.346
	LTE Band 41	20M	QPSK	50	0	Bottom of Laptop	0mm	Amphenol	ON	41490	2680	19.86	21.00	1.300	62.9	1.006	-0.01	0.269	0.352
	LTE Band 41	20M	QPSK	100	0	Bottom of Laptop	0mm	Amphenol	ON	41490	2680	19.84	21.00	1.306	62.9	1.006	0.03	0.270	0.355
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	39750	2506	19.80	21.00	1.318	62.9	1.006	0.09	0.810	1.074
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	40185	2549.5	19.82	21.00	1.312	62.9	1.006	-0.03	0.459	0.606
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	40620	2593	19.85	21.00	1.303	62.9	1.006	-0.11	0.277	0.363
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	41055	2636.5	19.84	21.00	1.306	62.9	1.006	0.02	0.232	0.305
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	0mm	Speed	ON	41490	2680	19.91	21.00	1.285	62.9	1.006	0.09	0.328	0.424
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	10mm	Amphenol	OFF	41490	2680	22.92	24.00	1.282	62.9	1.006	0.09	0.164	0.212
	LTE Band 41	20M	QPSK	50	0	Bottom of Laptop	10mm	Amphenol	OFF	41490	2680	21.91	23.00	1.285	62.9	1.006	0.1	0.093	0.120



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Antenna Vendor	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
13	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Ant 1	Amphenol	1	2412	16.83	17.00	1.040	99.03	1.010	-0.17	0.863	0.906
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Ant 1	Amphenol	6	2437	16.78	17.00	1.052	99.03	1.010	-0.01	0.750	0.797
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Ant 1	Speed	1	2412	16.83	17.00	1.040	99.03	1.010	-0.02	0.697	0.732
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Ant 2	Amphenol	1	2412	16.86	17.00	1.033	98.56	1.015	-0.06	0.694	0.727
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Ant 2	Speed	1	2412	16.86	17.00	1.033	98.56	1.015	-0.02	0.564	0.591
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Ant 1	Amphenol	58	5290	14.28	15.00	1.180	89.15	1.122	-0.06	0.861	1.140
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Ant 1	Amphenol	54	5270	14.95	15.00	1.011	88.68	1.128	-0.08	0.904	1.031
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Ant 1	Speed	54	5270	14.95	15.00	1.011	88.68	1.128	-0.06	0.561	0.640
14	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Ant 2	Amphenol	58	5290	14.55	15.00	1.109	87.69	1.140	-0.05	0.905	1.144
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Ant 2	Amphenol	54	5270	14.97	15.00	1.007	88.68	1.128	0.06	0.989	1.123
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Ant 2	Amphenol	62	5310	14.89	15.00	1.026	88.68	1.128	0.02	0.961	1.112
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Ant 2	Speed	54	5270	14.97	15.00	1.007	88.68	1.128	-0.06	0.530	0.602
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Ant 1	Amphenol	106	5530	13.80	14.50	1.175	89.15	1.122	-0.08	0.627	0.827
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Ant 1	Amphenol	122	5610	13.65	14.50	1.216	89.15	1.122	-0.08	0.701	0.957
15	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Ant 1	Amphenol	138	5690	13.63	14.50	1.222	89.15	1.122	-0.12	0.843	1.156
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Ant 1	Speed	106	5530	13.80	14.50	1.175	89.15	1.122	-0.09	0.356	0.469
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Ant 2	Amphenol	106	5530	13.82	14.50	1.169	87.69	1.140	0.18	0.435	0.580
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Ant 2	Speed	106	5530	13.82	14.50	1.169	87.69	1.140	0.15	0.337	0.449
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Ant 1	Amphenol	155	5775	13.42	13.50	1.019	89.15	1.122	-0.1	0.751	0.858
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Ant 1	Amphenol	151	5755	13.47	13.50	1.007	88.68	1.128	-0.1	0.655	0.744
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Ant 1	Speed	155	5775	13.42	13.50	1.019	89.15	1.122	0.18	0.337	0.385
16	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Ant 2	Amphenol	155	5775	13.40	13.50	1.023	87.69	1.140	-0.03	0.977	1.140
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Ant 2	Amphenol	151	5755	13.42	13.50	1.019	88.68	1.128	-0.11	0.748	0.859
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Ant 2	Speed	155	5775	13.40	13.50	1.023	87.69	1.140	0.04	0.227	0.265

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Antenna Vendor	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Bottom of Laptop	0mm	Ant 2	Amphenol	39	2441	9.93	11.00	1.281	-0.13	0.102	0.131
	Bluetooth	1Mbps	Bottom of Laptop	0mm	Ant 2	Amphenol	0	2402	9.88	11.00	1.295	-0.03	0.084	0.109
17	Bluetooth	1Mbps	Bottom of Laptop	0mm	Ant 2	Amphenol	78	2480	9.69	11.00	1.353	-0.01	0.098	0.133
	Bluetooth	1Mbps	Bottom of Laptop	0mm	Ant 2	Speed	78	2480	9.69	11.00	1.353	0.14	0.079	0.107

14.2 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Antenna Vendor	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	10mm	Amphenol	OFF	9262	1852.4	23.38	24.50	1.294	-0.05	0.921		1.192
2nd	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	10mm	Amphenol	OFF	9262	1852.4	23.38	24.50	1.294	0.13	0.905	1.02	1.171
1st	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	0mm	Amphenol	ON	4233	846.6	18.98	20.00	1.265	0.01	0.915		1.157
2nd	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	0mm	Amphenol	ON	4233	846.6	18.98	20.00	1.265	0.03	0.913	1.00	1.155
1st	LTE Band 7	20M_QPSK_1_0	Bottom of Laptop	0mm	Amphenol	ON	20850	2510	18.33	19.00	1.167	0.11	0.961		1.121
2nd	LTE Band 7	20M_QPSK_1_0	Bottom of Laptop	0mm	Amphenol	ON	20850	2510	18.33	19.00	1.167	0.04	0.960	1.00	1.120
1st	LTE Band 12	10M_QPSK_50_0	Bottom of Laptop	0mm	Amphenol	ON	23095	707.5	20.70	21.00	1.072	0.02	1.030		1.104
2nd	LTE Band 12	10M_QPSK_50_0	Bottom of Laptop	0mm	Amphenol	ON	23095	707.5	20.70	21.00	1.072	0.02	1.010	1.02	1.082
1st	LTE Band 30	10M_QPSK_25_0	Bottom of Laptop	0mm	Amphenol	ON	27710	2310	20.65	21.00	1.084	0.15	1.070		1.160
2nd	LTE Band 30	10M_QPSK_25_0	Bottom of Laptop	0mm	Amphenol	ON	27710	2310	20.65	21.00	1.084	0.14	1.030	1.04	1.116
1st	LTE Band 66	20M_QPSK_50_0	Bottom of Laptop	0mm	Amphenol	ON	132572	1770	16.31	17.00	1.172	-0.01	0.902		1.057
2nd	LTE Band 66	20M_QPSK_50_0	Bottom of Laptop	0mm	Amphenol	ON	132572	1770	16.31	17.00	1.172	0.1	0.882	1.02	1.034

No.	Band	Mode	Test Position	Gap (mm)	Antenna	Antenna Vendor	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Ant 1	Amphenol	1	2412	16.83	17.00	1.040	99.03	1.010	-0.17	0.863		0.906
2nd	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Ant 1	Amphenol	1	2412	16.83	17.00	1.040	99.03	1.010	-0.01	0.732	1.18	0.769
1st	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Ant 2	Amphenol	54	5270	14.97	15.00	1.007	88.68	1.128	0.06	0.989		1.123
2nd	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Ant 2	Amphenol	54	5270	14.97	15.00	1.007	88.68	1.128	-0.05	0.895	1.10	1.017
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Ant 1	Amphenol	138	5690	13.63	14.50	1.222	89.15	1.122	-0.12	0.843		1.156
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Ant 1	Amphenol	138	5690	13.63	14.50	1.222	89.15	1.122	-0.1	0.716	1.18	0.982
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Ant 2	Amphenol	155	5775	13.40	13.50	1.023	87.69	1.140	-0.03	0.977		1.140
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Ant 2	Amphenol	155	5775	13.40	13.50	1.023	87.69	1.140	0.18	0.871	1.12	1.016

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Notebook
		Body
1.	WWAN + WLAN ANT1 +WLAN ANT2	Yes
2.	WWAN + WLAN ANT1 + Bluetooth ANT2	Yes

General Note:

1. The worst case WLAN reported SAR for each configuration was used for SAR summation. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
2. For SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
3. For simultaneous transmission analysis for exposure position of bottom of laptop 10mm, WLAN SAR tested at 0mm separation is worse and the test data is used for conservative SAR summation.
4. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
5. The Scaled SAR summation is calculated based on the same configuration and test position.
6. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - v) The SPLSR calculated results please refer to section 15.2



15.1 Body Exposure Conditions


WWAN Band		Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+6 Summed 1g SAR (W/kg)	1+4+6 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2	Bluetooth Ant 2						
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)						
WCDMA	WCDMA II	Bottom of Laptop at 10mm	1.192	0.906	0.727	1.156	1.144	0.133	2.825	3.492	2.231	2.481	0.03	Case 1
		Bottom of Laptop at 0mm	1.057	0.906	0.727	1.156	1.144	0.133	2.690	3.357	2.096	2.346	0.03	Case 2
	WCDMA IV	Bottom of Laptop at 10mm	1.153	0.906	0.727	1.156	1.144	0.133	2.786	3.453	2.192	2.442	0.03	Case 3
		Bottom of Laptop at 0mm	1.166	0.906	0.727	1.156	1.144	0.133	2.799	3.466	2.205	2.455	0.03	Case 4
	WCDMA V	Bottom of Laptop at 10mm	0.902	0.906	0.727	1.156	1.144	0.133	2.535	3.202	1.941	2.191	0.03	Case 5
		Bottom of Laptop at 0mm	1.157	0.906	0.727	1.156	1.144	0.133	2.790	3.457	2.196	2.446	0.03	Case 6
LTE	LTE Band 2	Bottom of Laptop at 10mm	0.974	0.906	0.727	1.156	1.144	0.133	2.607	3.274	2.013	2.263	0.03	Case 7
		Bottom of Laptop at 0mm	1.062	0.906	0.727	1.156	1.144	0.133	2.695	3.362	2.101	2.351	0.03	Case 8
	LTE Band 5	Bottom of Laptop at 10mm	1.058	0.906	0.727	1.156	1.144	0.133	2.691	3.358	2.097	2.347	0.03	Case 23
		Bottom of Laptop at 0mm	1.144	0.906	0.727	1.156	1.144	0.133	2.777	3.444	2.183	2.433	0.03	Case 24
	LTE Band 7	Bottom of Laptop at 10mm	0.541	0.906	0.727	1.156	1.144	0.133	2.174	2.841	1.580	1.830	0.03	Case 9
		Bottom of Laptop at 0mm	1.121	0.906	0.727	1.156	1.144	0.133	2.754	3.421	2.160	2.410	0.03	Case 10
	LTE Band 12	Bottom of Laptop at 10mm	0.712	0.906	0.727	1.156	1.144	0.133	2.345	3.012	1.751	2.001	0.03	Case 11
		Bottom of Laptop at 0mm	1.104	0.906	0.727	1.156	1.144	0.133	2.737	3.404	2.143	2.393	0.03	Case 12
	LTE Band 13	Bottom of Laptop at 10mm	0.820	0.906	0.727	1.156	1.144	0.133	2.453	3.120	1.859	2.109	0.03	Case 13
		Bottom of Laptop at 0mm	1.166	0.906	0.727	1.156	1.144	0.133	2.799	3.466	2.205	2.455	0.03	Case 14
	LTE Band 26	Bottom of Laptop at 10mm	0.827	0.906	0.727	1.156	1.144	0.133	2.460	3.127	1.866	2.116	0.03	Case 15
		Bottom of Laptop at 0mm	1.133	0.906	0.727	1.156	1.144	0.133	2.766	3.433	2.172	2.422	0.03	Case 16
	LTE Band 30	Bottom of Laptop at 10mm	0.416	0.906	0.727	1.156	1.144	0.133	2.049	2.716	1.455	1.705	0.03	Case 17
		Bottom of Laptop at 0mm	1.160	0.906	0.727	1.156	1.144	0.133	2.793	3.460	2.199	2.449	0.03	Case 18
	LTE Band 41	Bottom of Laptop at 10mm	0.212	0.906	0.727	1.156	1.144	0.133	1.845	2.512	1.251	1.501	0.03	Case 19
		Bottom of Laptop at 0mm	1.074	0.906	0.727	1.156	1.144	0.133	2.707	3.374	2.113	2.363	0.03	Case 20
	LTE Band 66	Bottom of Laptop at 10mm	0.957	0.906	0.727	1.156	1.144	0.133	2.590	3.257	1.996	2.246	0.03	Case 21
		Bottom of Laptop at 0mm	1.057	0.906	0.727	1.156	1.144	0.133	2.690	3.357	2.096	2.346	0.03	Case 22

15.2 SPLSR Evaluation and Analysis


General Note:

1. $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary


	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 1	WCDMA II	Bottom of Laptop	1.192	10	-8.84	13.1	-17.83	249.9	2.10	0.01	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	WCDMA II	Bottom of Laptop	1.192	10	-8.84	13.1	-17.83	202.7	1.92	0.01	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	WCDMA II	Bottom of Laptop	1.192	10	-8.84	13.1	-17.83	255.8	2.35	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	WCDMA II	Bottom of Laptop	1.192	10	-8.84	13.1	-17.83	198.8	2.34	0.02	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-4.02	-18.06	94.5	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	WCDMA II	Bottom of Laptop	1.192	10	-8.84	13.1	-17.83	201.0	1.33	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

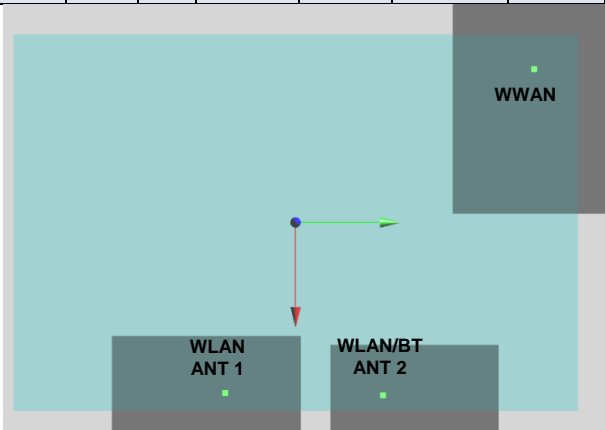


	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 2	WCDMA II	Bottom of Laptop	1.057	0	-8.69	13.59	-17.72	252.1	1.96	0.01	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	WCDMA II	Bottom of Laptop	1.057	0	-8.69	13.59	-17.72	203.3	1.78	0.01	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	WCDMA II	Bottom of Laptop	1.057	0	-8.69	13.59	-17.72	258.0	2.21	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	WCDMA II	Bottom of Laptop	1.057	0	-8.69	13.59	-17.72	199.1	2.20	0.02	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	89.3	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	WCDMA II	Bottom of Laptop	1.057	0	-8.69	13.59	-17.72	201.6	1.19	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

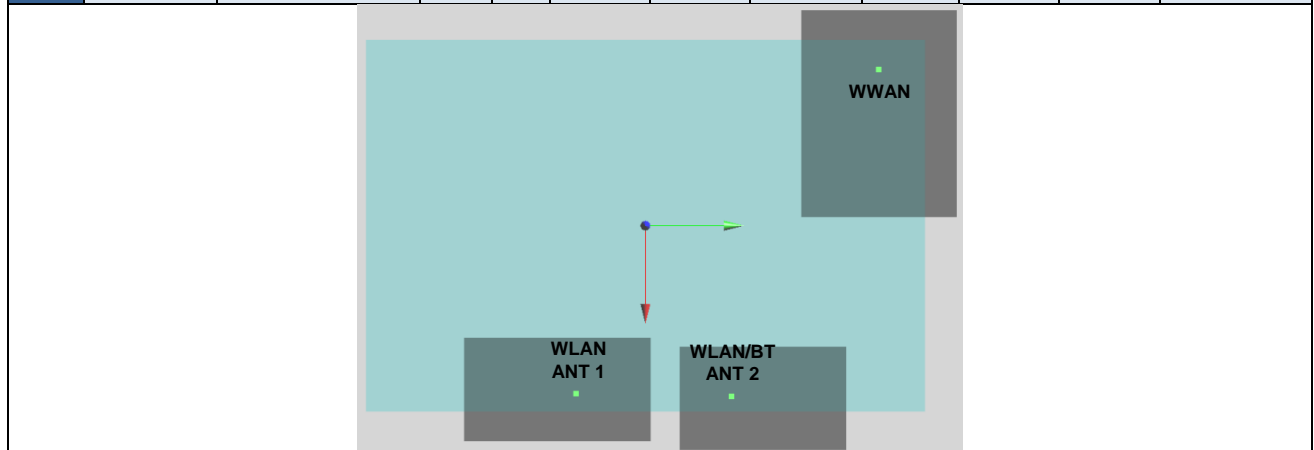


	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 3	WCDMA IV	Bottom of Laptop	1.153	10	-8.68	13.29	-17.83	250.0	2.06	0.01	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	WCDMA IV	Bottom of Laptop	1.153	10	-8.68	13.29	-17.83	202.0	1.88	0.01	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	WCDMA IV	Bottom of Laptop	1.153	10	-8.68	13.29	-17.83	255.9	2.31	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	WCDMA IV	Bottom of Laptop	1.153	10	-8.68	13.29	-17.83	197.9	2.30	0.02	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	89.3	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	WCDMA IV	Bottom of Laptop	1.153	10	-8.68	13.29	-17.83	200.3	1.29	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

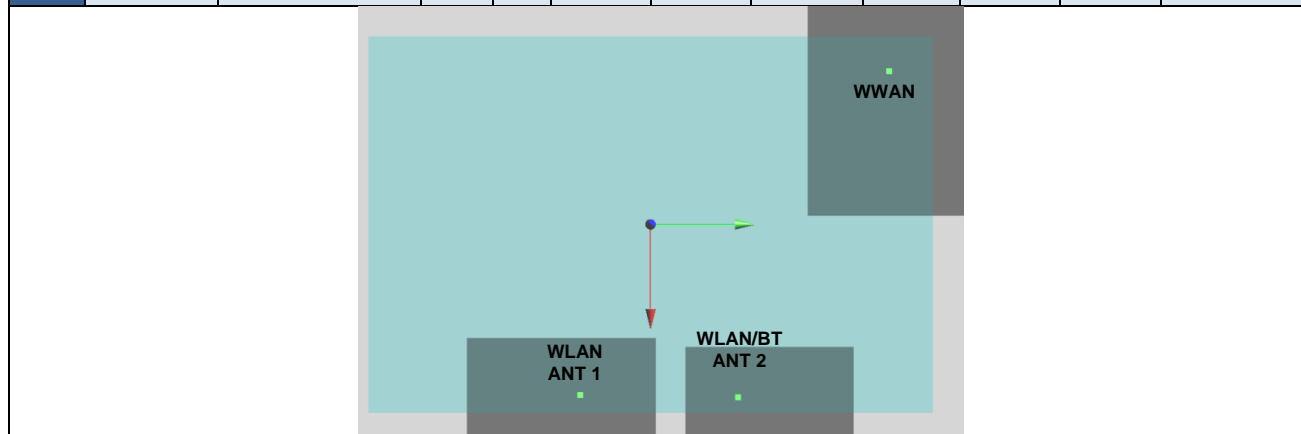


	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 4	WCDMA IV	Bottom of Laptop	1.166	0	-8.69	13.59	-17.72	252.1	2.07	0.01	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	WCDMA IV	Bottom of Laptop	1.166	0	-8.69	13.59	-17.72	203.3	1.89	0.01	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	WCDMA IV	Bottom of Laptop	1.166	0	-8.69	13.59	-17.72	258.0	2.32	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	WCDMA IV	Bottom of Laptop	1.166	0	-8.69	13.59	-17.72	199.1	2.31	0.02	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	89.3	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	WCDMA IV	Bottom of Laptop	1.166	0	-8.69	13.59	-17.72	201.6	1.30	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

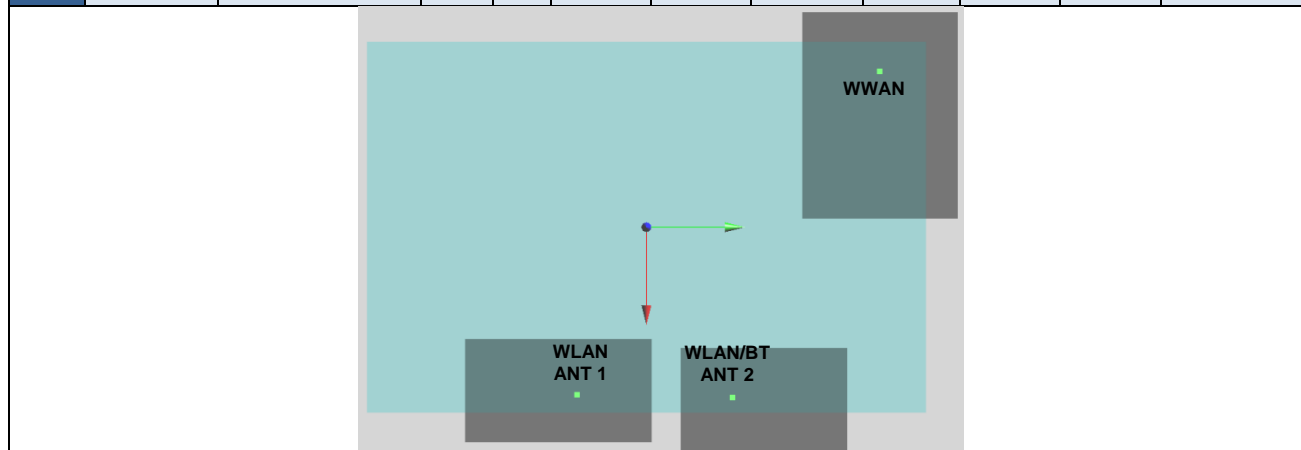


	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 5	WCDMA V	Bottom of Laptop	0.902	10	-8.83	13.6	-18.26	253.2	1.81	0.01	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	WCDMA V	Bottom of Laptop	0.902	10	-8.83	13.6	-18.26	204.6	1.63	0.01	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	WCDMA V	Bottom of Laptop	0.902	10	-8.83	13.6	-18.26	259.1	2.06	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	WCDMA V	Bottom of Laptop	0.902	10	-8.83	13.6	-18.26	200.5	2.05	0.01	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	89.3	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	WCDMA V	Bottom of Laptop	0.902	10	-8.83	13.6	-18.26	203.0	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

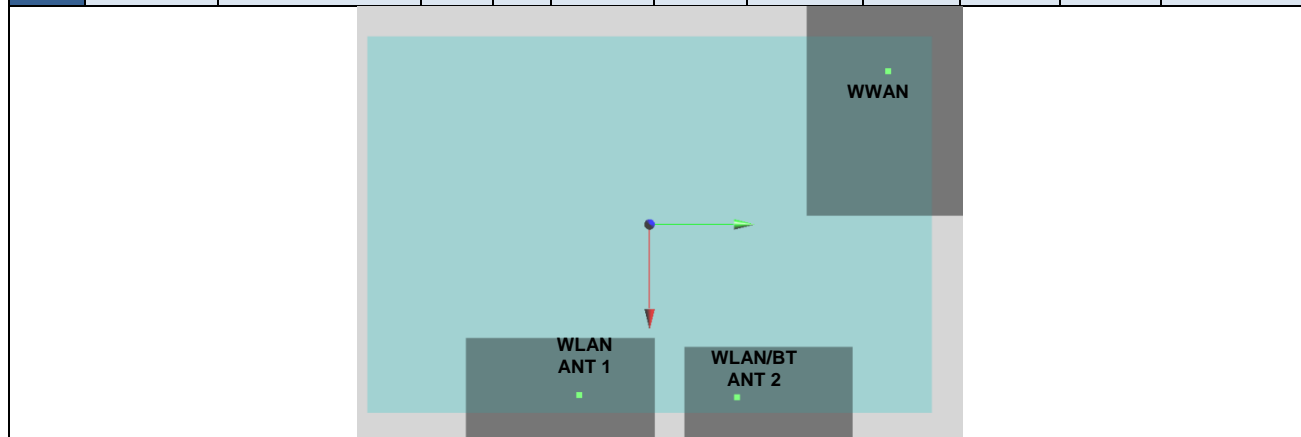


	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 6	WCDMA V	Bottom of Laptop	1.157	0	-8.84	14.05	-18.18	256.3	2.06	0.01	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	WCDMA V	Bottom of Laptop	1.157	0	-8.84	14.05	-18.18	206.6	1.88	0.01	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	WCDMA V	Bottom of Laptop	1.157	0	-8.84	14.05	-18.18	262.2	2.31	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	WCDMA V	Bottom of Laptop	1.157	0	-8.84	14.05	-18.18	202.3	2.30	0.02	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	89.3	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	WCDMA V	Bottom of Laptop	1.157	0	-8.84	14.05	-18.18	204.9	1.29	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

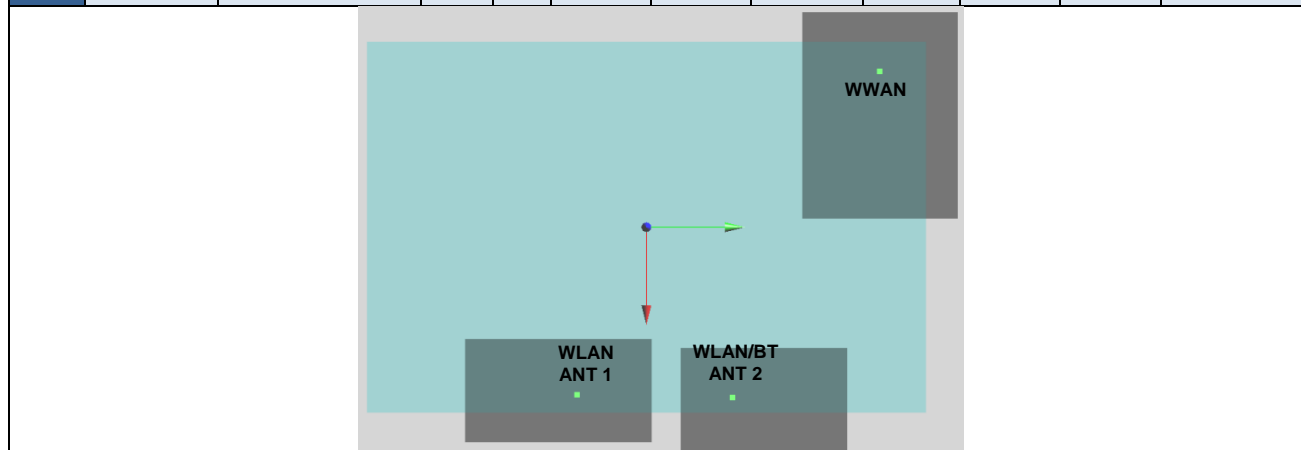


	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 7	LTE Band 2	Bottom of Laptop	0.974	10	-8.84	13.25	-17.83	250.9	1.88	0.01	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	LTE Band 2	Bottom of Laptop	0.974	10	-8.84	13.25	-17.83	250.9	1.70	0.01	Not required
	2.4GHz ANT 2		0.727	0	9.84	-3.5	-18.06				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-4.02	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.84	-3.5	-18.06				
	LTE Band 2	Bottom of Laptop	0.974	10	-8.84	13.25	-17.83	256.8	2.13	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	LTE Band 2	Bottom of Laptop	0.974	10	-8.84	13.25	-17.83	199.3	2.12	0.02	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	89.3	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	LTE Band 2	Bottom of Laptop	0.974	10	-8.84	13.25	-17.83	201.6	1.11	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

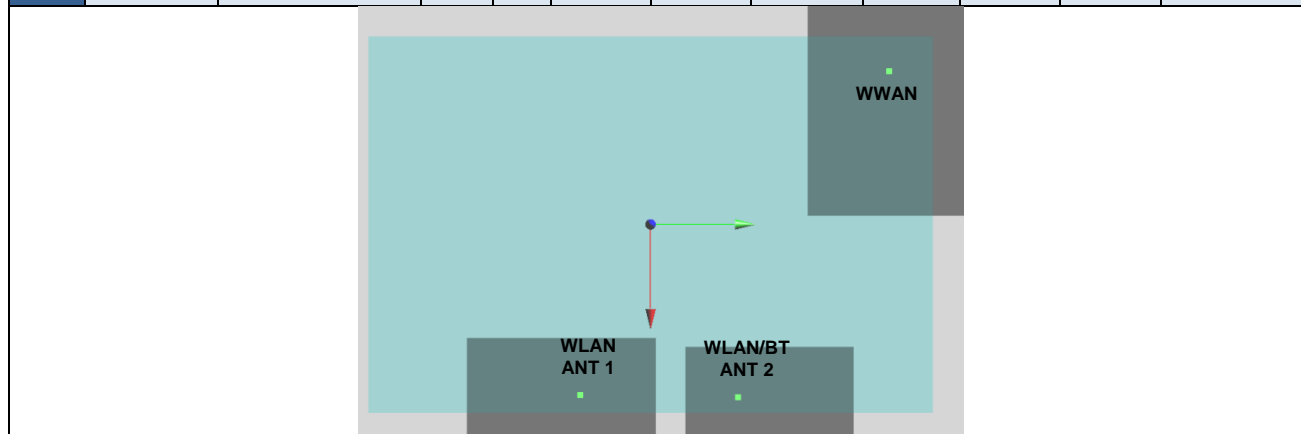


	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 8	LTE Band 2	Bottom of Laptop	1.062	0	-8.85	14.04	-17.71	256.3	1.97	0.01	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	LTE Band 2	Bottom of Laptop	1.062	0	-8.85	14.04	-17.71	206.7	1.79	0.01	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	LTE Band 2	Bottom of Laptop	1.062	0	-8.85	14.04	-17.71	262.3	2.22	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	LTE Band 2	Bottom of Laptop	1.062	0	-8.85	14.04	-17.71	202.3	2.21	0.02	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	89.3	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	LTE Band 2	Bottom of Laptop	1.062	0	-8.85	14.04	-17.71	204.9	1.20	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

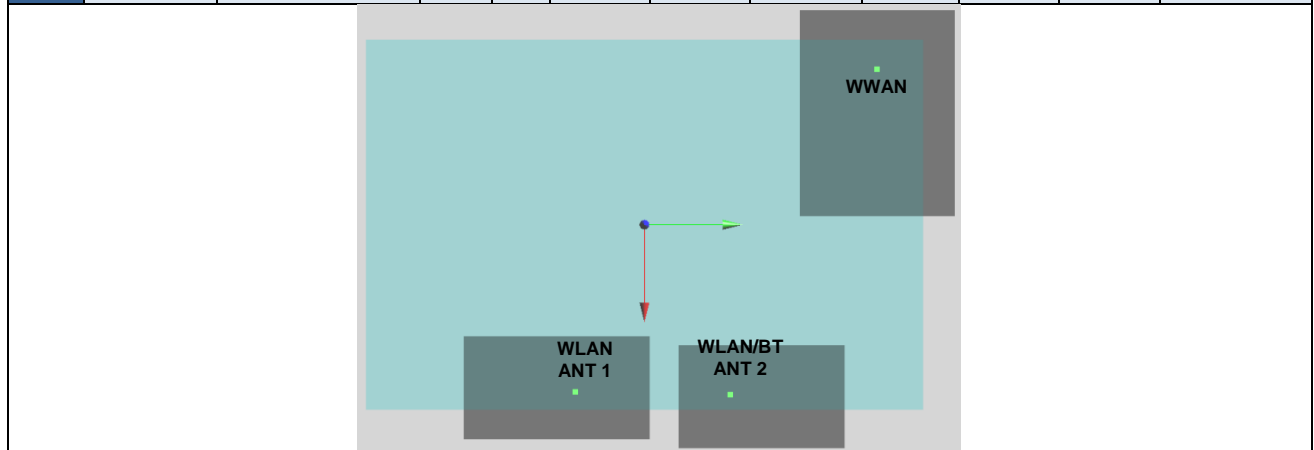


	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 9	LTE Band 7	Bottom of Laptop	0.541	10	-8.96	14.2	-17.82	258.2	1.45	0.01	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	LTE Band 7	Bottom of Laptop	0.541	10	-8.96	14.2	-17.82	208.3	1.27	0.01	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	LTE Band 7	Bottom of Laptop	0.541	10	-8.96	14.2	-17.82	264.1	1.70	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	LTE Band 7	Bottom of Laptop	0.541	10	-8.96	14.2	-17.82	204.0	1.69	0.01	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	89.3	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	LTE Band 7	Bottom of Laptop	0.541	10	-8.96	14.2	-17.82	206.6	0.67	0.00	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

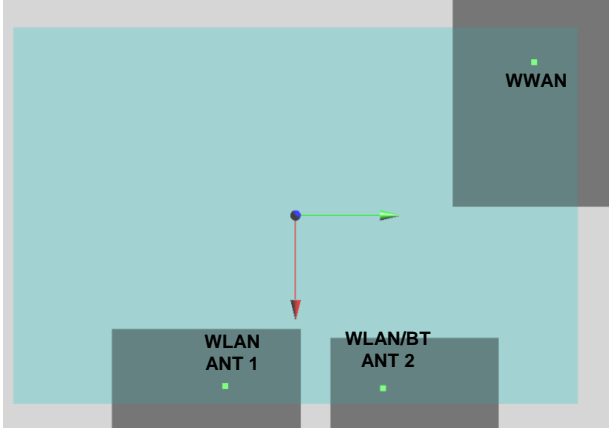


	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 10	LTE Band 7	Bottom of Laptop	1.121	0	-9.3	13.98	-17.68	259.2	2.03	0.01	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	LTE Band 7	Bottom of Laptop	1.121	0	-9.3	13.98	-17.68	210.5	1.85	0.01	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	LTE Band 7	Bottom of Laptop	1.121	0	-9.3	13.98	-17.68	265.1	2.28	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	LTE Band 7	Bottom of Laptop	1.121	0	-9.3	13.98	-17.68	206.3	2.27	0.02	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	89.3	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	LTE Band 7	Bottom of Laptop	1.121	0	-9.3	13.98	-17.68	208.8	1.25	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

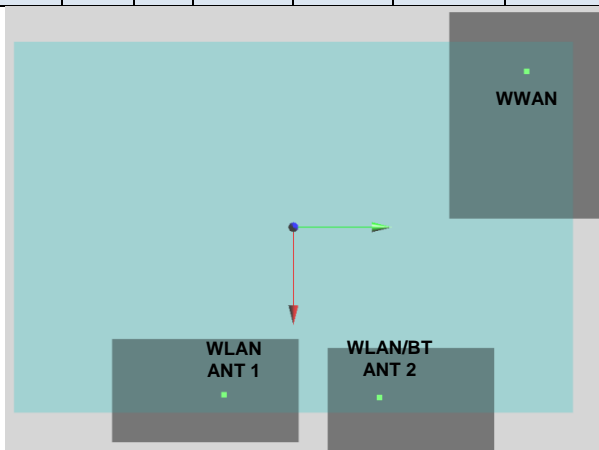


	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 11	LTE Band 12	Bottom of Laptop	0.712	10	-6.89	15.14	-18.29	250.5	1.62	0.01	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	LTE Band 12	Bottom of Laptop	0.712	10	-6.89	15.14	-18.29	194.6	1.44	0.01	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	LTE Band 12	Bottom of Laptop	0.712	10	-6.89	15.14	-18.29	256.4	1.87	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	LTE Band 12	Bottom of Laptop	0.712	10	-6.89	15.14	-18.29	189.4	1.86	0.01	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	89.3	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	LTE Band 12	Bottom of Laptop	0.712	10	-6.89	15.14	-18.29	192.7	0.85	0.00	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

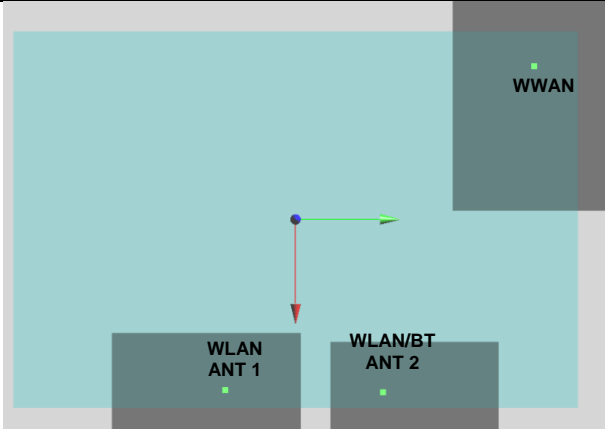


	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 12	LTE Band 12	Bottom of Laptop	1.104	0	-6.11	15.95	-18.19	251.5	2.01	0.01	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	LTE Band 12	Bottom of Laptop	1.104	0	-6.11	15.95	-18.19	192.4	1.83	0.01	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	LTE Band 12	Bottom of Laptop	1.104	0	-6.11	15.95	-18.19	257.5	2.26	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	LTE Band 12	Bottom of Laptop	1.104	0	-6.11	15.95	-18.19	186.6	2.25	0.02	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	89.3	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	LTE Band 12	Bottom of Laptop	1.104	0	-6.11	15.95	-18.19	190.3	1.24	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

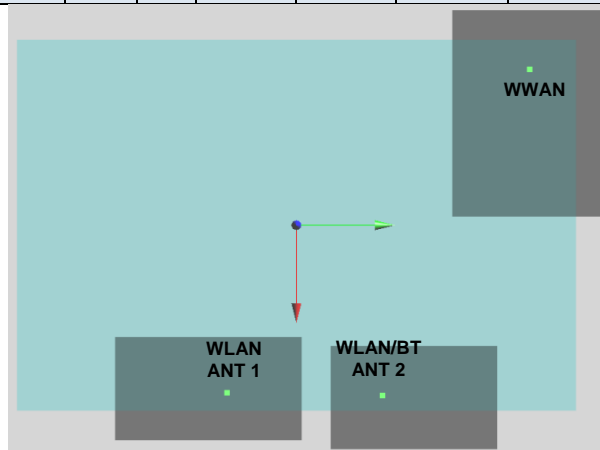


	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 13	LTE Band 13	Bottom of Laptop	0.82	10	-8.68	13.49	-18.27	251.3	1.73	0.01	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	LTE Band 13	Bottom of Laptop	0.82	10	-8.68	13.49	-18.27	202.8	1.55	0.01	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	LTE Band 13	Bottom of Laptop	0.82	10	-8.68	13.49	-18.27	257.2	1.98	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	LTE Band 13	Bottom of Laptop	0.82	10	-8.68	13.49	-18.27	198.7	1.96	0.01	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	89.3	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	LTE Band 13	Bottom of Laptop	0.82	10	-8.68	13.49	-18.27	201.2	0.95	0.00	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

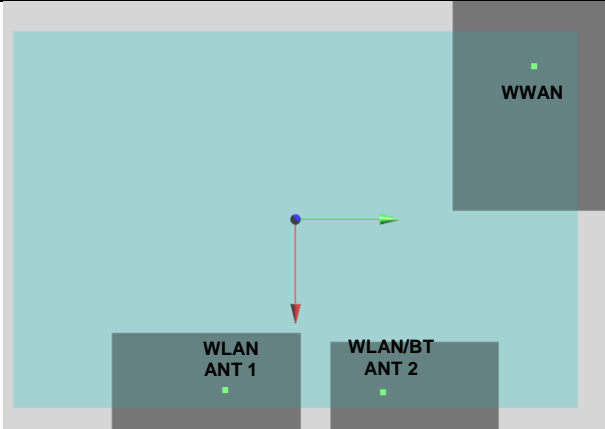


	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 14	LTE Band 13	Bottom of Laptop	1.166	0	-8.68	14.13	-18.18	255.7	2.07	0.01	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	LTE Band 13	Bottom of Laptop	1.166	0	-8.68	14.13	-18.18	205.5	1.89	0.01	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	LTE Band 13	Bottom of Laptop	1.166	0	-8.68	14.13	-18.18	261.6	2.32	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	LTE Band 13	Bottom of Laptop	1.166	0	-8.68	14.13	-18.18	201.1	2.31	0.02	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	89.3	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	LTE Band 13	Bottom of Laptop	1.166	0	-8.68	14.13	-18.18	203.8	1.30	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

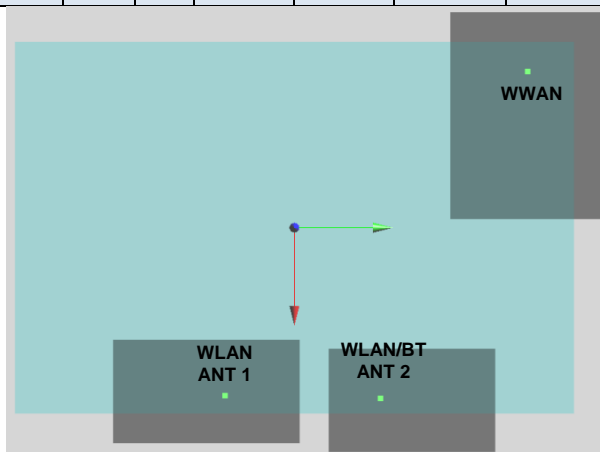


	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 15	LTE Band 26	Bottom of Laptop	0.827	10	-8.99	13.6	-18.26	254.4	1.73	0.01	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	LTE Band 26	Bottom of Laptop	0.827	10	-8.99	13.6	-18.26	206.1	1.55	0.01	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	LTE Band 26	Bottom of Laptop	0.827	10	-8.99	13.6	-18.26	260.3	1.98	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	LTE Band 26	Bottom of Laptop	0.827	10	-8.99	13.6	-18.26	202.0	1.97	0.01	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	89.3	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	LTE Band 26	Bottom of Laptop	0.827	10	-8.99	13.6	-18.26	204.4	0.96	0.00	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

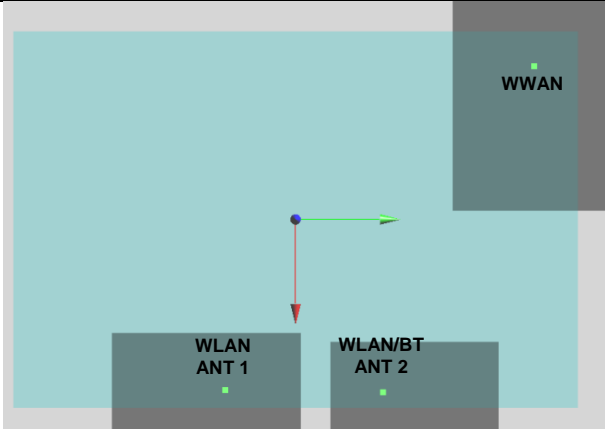


	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 16	LTE Band 26	Bottom of Laptop	1.133	0	-8.84	14.05	-18.18	256.3	2.04	0.01	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	LTE Band 26	Bottom of Laptop	1.133	0	-8.84	14.05	-18.18	206.6	1.86	0.01	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	LTE Band 26	Bottom of Laptop	1.133	0	-8.84	14.05	-18.18	262.2	2.29	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	LTE Band 26	Bottom of Laptop	1.133	0	-8.84	14.05	-18.18	202.3	2.28	0.02	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	89.3	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	LTE Band 26	Bottom of Laptop	1.133	0	-8.84	14.05	-18.18	204.9	1.27	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

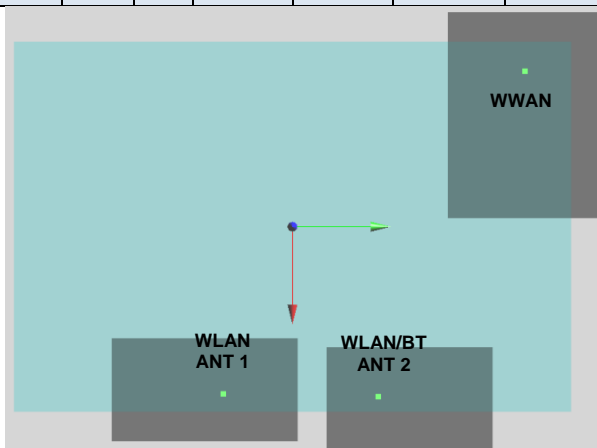


	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 17	LTE Band 30	Bottom of Laptop	0.416	10	-7.66	15.58	-17.84	258.9	1.32	0.01	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	LTE Band 30	Bottom of Laptop	0.416	10	-7.66	15.58	-17.84	203.5	1.14	0.01	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	LTE Band 30	Bottom of Laptop	0.416	10	-7.66	15.58	-17.84	264.9	1.57	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	LTE Band 30	Bottom of Laptop	0.416	10	-7.66	15.58	-17.84	198.2	1.56	0.01	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	89.3	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	LTE Band 30	Bottom of Laptop	0.416	10	-7.66	15.58	-17.84	201.5	0.55	0.00	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

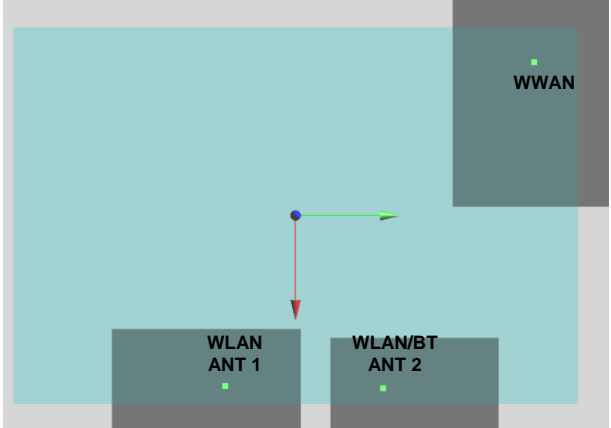


	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 18	LTE Band 30	Bottom of Laptop	1.16	0	-5.36	15.56	-17.78	243.8	2.07	0.01	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	LTE Band 30	Bottom of Laptop	1.16	0	-5.36	15.56	-17.78	184.0	1.89	0.01	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	LTE Band 30	Bottom of Laptop	1.16	0	-5.36	15.56	-17.78	249.8	2.32	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	LTE Band 30	Bottom of Laptop	1.16	0	-5.36	15.56	-17.78	178.2	2.30	0.02	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	89.3	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	LTE Band 30	Bottom of Laptop	1.16	0	-5.36	15.56	-17.78	181.9	1.29	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

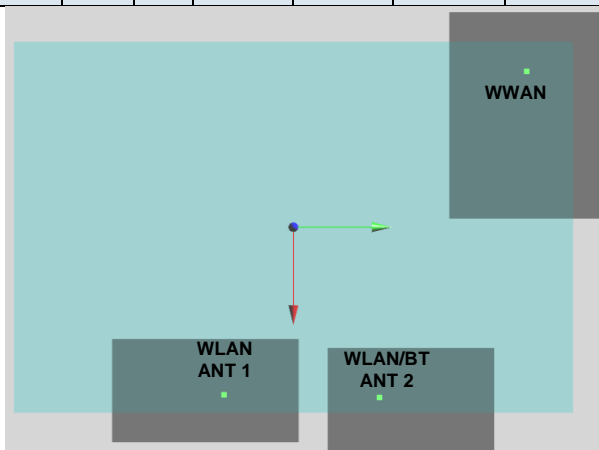


	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 19	LTE Band 41	Bottom of Laptop	0.212	10	-9.4	14.28	-17.83	262.0	1.12	0.00	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	LTE Band 41	Bottom of Laptop	0.212	10	-9.4	14.28	-17.83	212.6	0.94	0.00	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	LTE Band 41	Bottom of Laptop	0.212	10	-9.4	14.28	-17.83	267.9	1.37	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	LTE Band 41	Bottom of Laptop	0.212	10	-9.4	14.28	-17.83	208.3	1.36	0.01	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	89.3	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	LTE Band 41	Bottom of Laptop	0.212	10	-9.4	14.28	-17.83	210.9	0.35	0.00	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

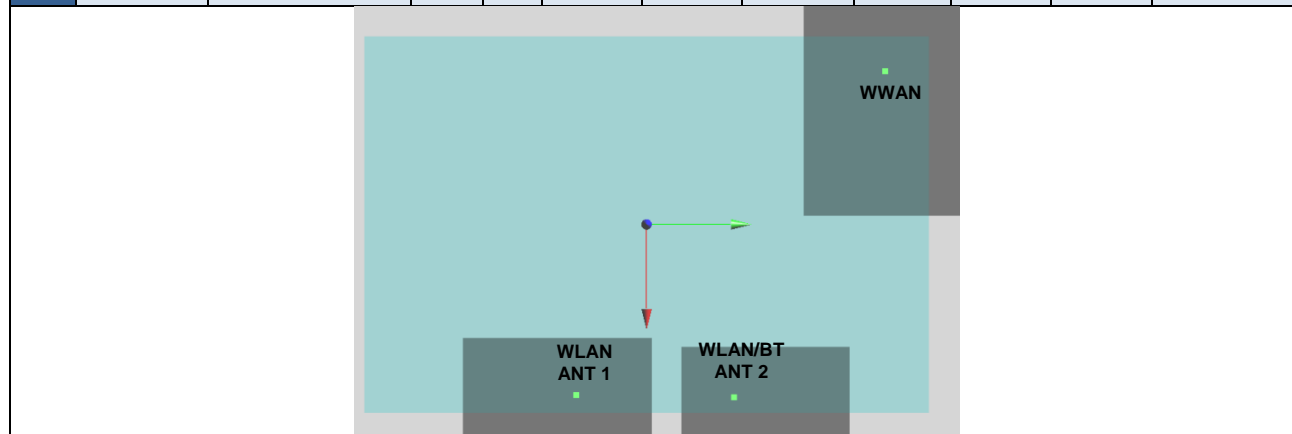


	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 20	LTE Band 41	Bottom of Laptop	1.074	0	-9.1	13.76	-17.75	256.3	1.98	0.01	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	LTE Band 41	Bottom of Laptop	1.074	0	-9.1	13.76	-17.75	207.7	1.80	0.01	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	LTE Band 41	Bottom of Laptop	1.074	0	-9.1	13.76	-17.75	262.2	2.23	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	LTE Band 41	Bottom of Laptop	1.074	0	-9.1	13.76	-17.75	203.6	2.22	0.02	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	89.3	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	LTE Band 41	Bottom of Laptop	1.074	0	-9.1	13.76	-17.75	206.0	1.21	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

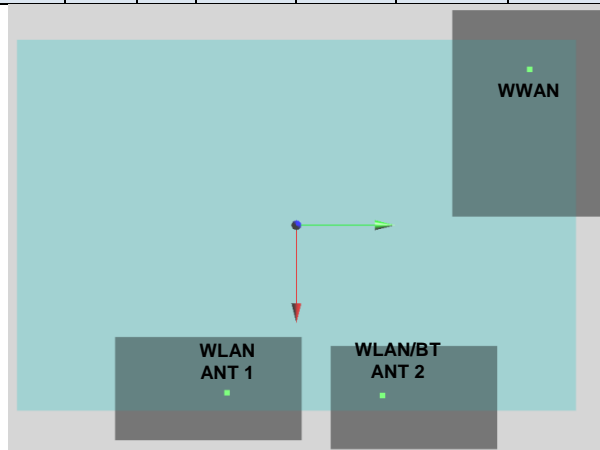


	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 21	LTE Band 66	Bottom of Laptop	0.957	10	-8.39	13.15	-17.84	246.9	1.86	0.01	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	LTE Band 66	Bottom of Laptop	0.957	10	-8.39	13.15	-17.84	198.7	1.68	0.01	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	LTE Band 66	Bottom of Laptop	0.957	10	-8.39	13.15	-17.84	252.8	2.11	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	LTE Band 66	Bottom of Laptop	0.957	10	-8.39	13.15	-17.84	194.7	2.10	0.02	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	89.3	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	LTE Band 66	Bottom of Laptop	0.957	10	-8.39	13.15	-17.84	197.1	1.09	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

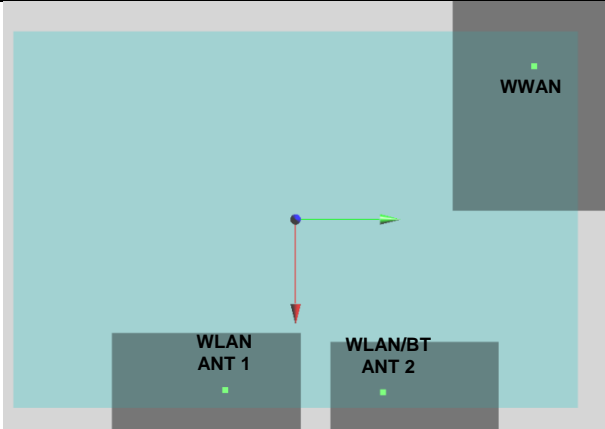


	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 22	LTE Band 66	Bottom of Laptop	1.057	0	-8.69	13.59	-17.72	252.1	1.96	0.01	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	LTE Band 66	Bottom of Laptop	1.057	0	-8.69	13.59	-17.72	203.3	1.78	0.01	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	LTE Band 66	Bottom of Laptop	1.057	0	-8.69	13.59	-17.72	258.0	2.21	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	LTE Band 66	Bottom of Laptop	1.057	0	-8.69	13.59	-17.72	199.1	2.20	0.02	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	89.3	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	LTE Band 66	Bottom of Laptop	1.057	0	-8.69	13.59	-17.72	201.6	1.19	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

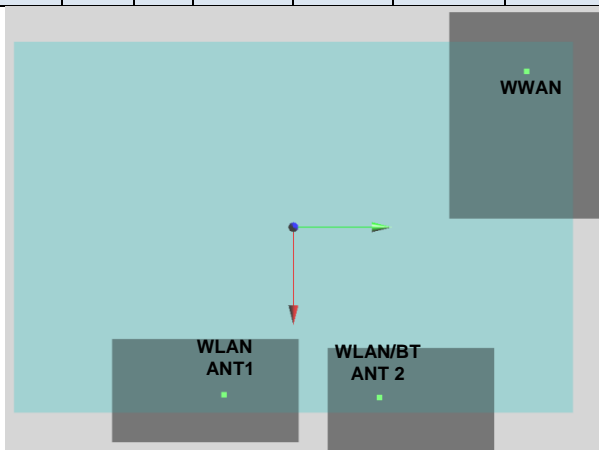

	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 23	LTE Band 5	Bottom of Laptop	1.058	10	-8.84	14.05	-17.5	256.4	1.96	0.01	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	LTE Band 5	Bottom of Laptop	1.058	10	-8.84	14.05	-17.5	206.7	1.79	0.01	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	LTE Band 5	Bottom of Laptop	1.058	10	-8.84	14.05	-17.5	262.3	2.21	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	LTE Band 5	Bottom of Laptop	1.058	10	-8.84	14.05	-17.5	202.3	2.20	0.02	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	89.3	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	LTE Band 5	Bottom of Laptop	1.058	10	-8.84	14.05	-17.5	204.9	1.19	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

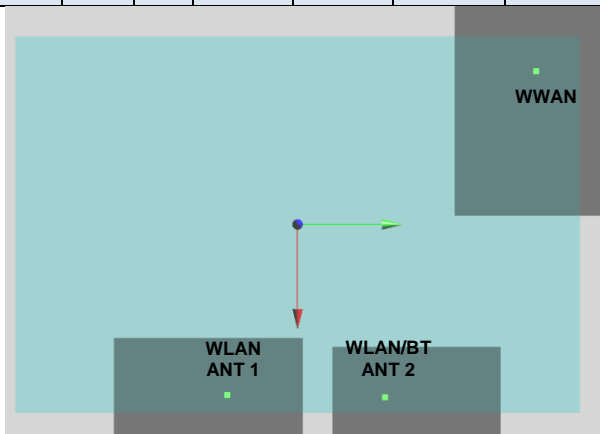

	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 24	LTE Band 5	Bottom of Laptop	1.144	0	-8.89	13.6	-26.3	266.7	2.05	0.01	Not required
	2.4GHz ANT 1		0.906	0	9.84	-3.5	-18.06				
	LTE Band 5	Bottom of Laptop	1.144	0	-8.89	13.6	-26.3	221.1	1.87	0.01	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	86.0	1.63	0.02	Not required
	2.4GHz ANT 2		0.727	0	9.78	5.1	-18.04				
	LTE Band 5	Bottom of Laptop	1.144	0	-8.89	13.6	-26.3	272.4	2.30	0.01	Not required
	5GHz ANT 1		1.156	0	10.22	-3.96	-18.02				
	LTE Band 5	Bottom of Laptop	1.144	0	-8.89	13.6	-26.3	217.5	2.29	0.02	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	101.7	2.30	0.03	Not required
	5GHz ANT 2		1.144	0	9.8	6.2	-17.99				
	2.4GHz ANT 1	Bottom of Laptop	0.906	0	9.84	-3.5	-18.06	89.3	1.04	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	LTE Band 5	Bottom of Laptop	1.144	0	-8.89	13.6	-26.3	220.7	1.28	0.01	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				
	5GHz ANT 1	Bottom of Laptop	1.156	0	10.22	-3.96	-18.02	94.0	1.29	0.02	Not required
	BT ANT 2		0.133	0	9.74	5.42	-17.76				

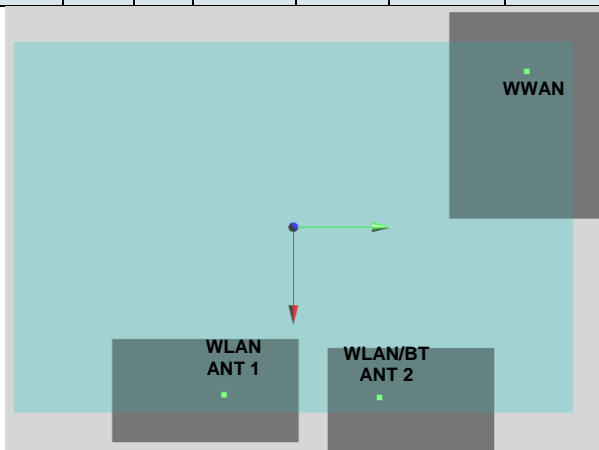

Test Engineer : Thomas Wang White Huang Poa Pan Nick Yu Mood Huang San Lin Bevis Chang
Tom Jiang and Galen Zhang

16. Uncertainty Assessment

Pre KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

17. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [8] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [9] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [10] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [11] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [12] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.