

TOSNET

Oscar Dustmann, Marius Grysla, Andrea Crotti

29 Luglio 2010

Task




Goal

Share internet connection through a **mote network**

Architecture

Idea

Simulate a wire over the wireless sensor network

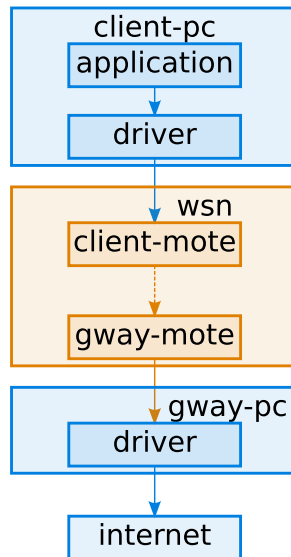


Architecture

Idea

Simulate a wire over the wireless sensor network

Setup


- tun device to tunnel the packets
- routing achieved with iptables (gateway) and iproute (client)
- simple mote program that broadcasts everything

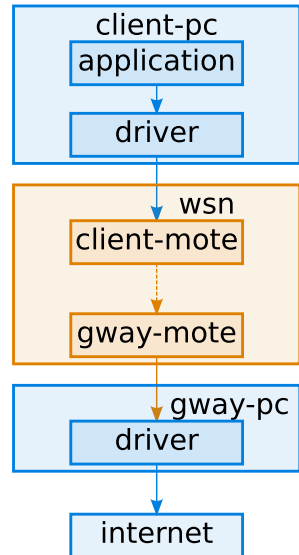

Driver implementation

heading

- chunk IP packets to fit in tinyos packets
 - queue to manage reconstruction
 - chunks can get lost

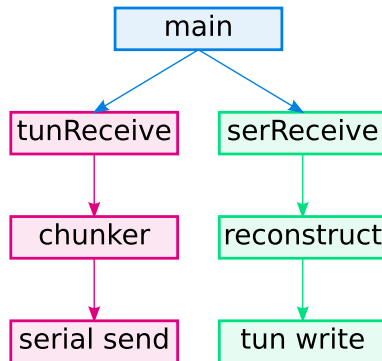


Driver implementation

heading

- chunk IP packets to fit in tinyos packets
 - queue to manage reconstruction
 - chunks can get lost


- compression with zlib
- handlers (function pointers) to decouple different modules
- select to listen on several file descriptors

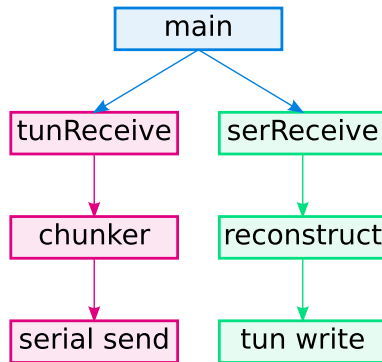

Statistics

- speed is too slow for real application
- compression can increase the bitrate
- more sophisticated with 6lowpan
 - ipv6 header

Transmission Speeds

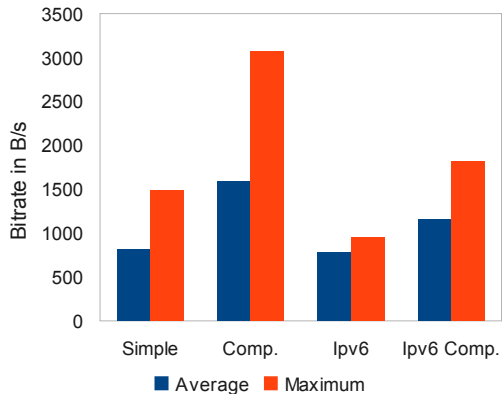

Conclusion

Possible improvements

- multi-client support
- real network routing protocol
- too much overhead to an already slow connection

Conclusions

- **ioctl** can drive you mad
- commented code is a good thing