TEST REPORT

Report Reference No....................:	**TRE1708017604** R/C…….: 29420
FCC ID...:	**2AM6Q-W1450**
Applicant's name...........................:	**GRUPO SOLONE SA DE CV**
Address...:	AV. LOMAS DE SOTELO NO. 1112 PB,COL. LOMA HERMOSA,DEL. MIGUEL HIDALGO,CIUDAD DE MEXICO.
Manufacturer...................................:	GUANGDONG ENOK COMMUNICATION CO,.LTD
Address..:	139&137Lixiang road ,Songmushan Dalang town, Dongguan,Guangdong China
Test item description ....:	**Smart Phone**
Trade Mark ....:	SOLONE
Model/Type reference.......................:	W1450
Listed Model(s) ....:	-
Standard ....:	**FCC CFR Title 47 Part 15 Subpart C Section 15.247**
Date of receipt of test sample…….....:	Aug.25, 2017
Date of testing………………………..:	Aug.26, 2017 - Sep.07, 2017
Date of issue………………………....:	Sep.08, 2017
Result................. …………………..:	**PASS**

Compiled by (Position+Printed name+Signature):	File administrators Candy Liu	*Candy Liu*
Supervised by (Position+Printed name+Signature):	Project Engineer Lion Cai	*Lion Cai*
Approved by (Position+Printed name+Signature):	RF Manager Hans Hu	*Hans Hu*
Testing Laboratory Name ....:	**Shenzhen Huatongwei International Inspection Co., Ltd.**	
Address...:	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	

Contents

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

ANSI C63.10-2013: American National Standard forTesting Unlicensed Wireless Devicese

1.2. Report version

Version No.	Date of issue	Description
00	Sep.08, 2017	Original

2. **TEST DESCRIPTION**

Test Item	Section in CFR 47	Result	Test Engineer
Antenna Requirement	15.203/15.247 (c)	Pass	William Wang
AC Power Line Conducted Emissions	15.207	Pass	William Wang
Conducted Peak Output Power	15.247 (b)(1)	Pass	William Wang
20 dB Bandwidth	15.247 (a)(1)	Pass	William Wang
Carrier Frequencies Separation	15.247 (a)(1)	Pass	William Wang
Hopping Channel Number	15.247 (a)(1)	Pass	William Wang
Dwell Time	15.247 (a)(1)	Pass	William Wang
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List (7 July 2002)	Pass	William Wang
Restricted band	15.247(d)/15.205	Pass	William Wang
Radiated Emissions	15.247(d)/15.209	Pass	William Wang

Note: The measurement uncertainty is not included in the test result.

3. <u>SUMMARY</u>

3.1. Client Information

Applicant:	GRUPO SOLONE SA DE CV
Address:	AV. LOMAS DE SOTELO NO. 1112 PB,COL. LOMA HERMOSA, DEL. MIGUEL HIDALGO,CIUDAD DE MEXICO.
Manufacturer:	GUANGDONG ENOK COMMUNICATION CO,.LTD
Address:	139&137Lixiang road ,Songmushan Dalang town,Dongguan, Guangdong China

3.2. Product Description

Name of EUT:	Smart Phone
Trade Mark:	SOLONE
Model No.:	W1450
Listed Model(s):	-
IMEI:	911524550220641
Power supply:	DC 3.8V From exchange battery
Adapter information:	Input: 100-240Va.c., 50/60Hz, 0.2A Output: 5Vd.c., 1A
Hardware version:	Ver.A
Software version:	M1701W1450V001
Bluetooth	
Version:	Supported BT4.0+EDR
Modulation:	GFSK, π/4DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PIFA Antenna
Antenna gain:	2.9 dBi

3.3. Operation state

➢ **Test frequency list**

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Channel	Frequency (MHz)
00	2402
01	2403
⋮	⋮
39	2441
⋮	⋮
77	2479
78	2480

➢ **TEST MODE**

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated suprious emissions test item:
The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data recorded in the report.

3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:
● - supplied by the manufacturer
○ - supplied by the lab

		Manufacturer:	/
	/	Model No.:	/
	/	Manufacturer:	/
		Model No.:	/

3.5. Modifications

No modifications were implemented to meet testing criteria.

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.
Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

4.2. Test Facility

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

IC-Registration No.:5377B-1

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377B-1.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.39 dB	(1)
Radiated Emissions 30~1000MHz	4.24 dB	(1)
Radiated Emissions 1~18GHz	5.16 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)
Occupied Bandwidth	---------	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.5. Equipments Used during the Test

Conducted Emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Artificial Mains	Rohde&Schwarz	ESH2-Z5	100028	2016/11/13
2	EMI Test Receiver	Rohde&Schwarz	ESCI3	100038	2016/11/13
3	Pulse Limiter	Rohde&Schwarz	ESHSZ2	100044	2016/11/13
4	EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	-	-

Radiated Emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI test receiver	Rohde&Schwarz	ESI 26	100009	2016/11/13
2	Loop Antenna	Rohde&Schwarz	HFH2-Z2	100020	2016/11/13
3	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2016/11/13
4	Horn antenna	ShwarzBeck	9120D	1011	2016/11/13
5	Horn Antenna	SCHWARZBECK	BBHA9170	25841	2016/11/13
6	Amplifier	Sonoma	310N	E009-13	2016/11/13
7	JS Amplifier	Rohde&Schwarz	JS4-00101800-28-5A	F201504	2016/11/13
8	Amplifier	Compliance Direction systems	PAP1-4060	120	2016/11/13
9	High pass filter	Compliance Direction systems	BSU-6	34202	2016/11/13
10	EMI test Software	Rohde&Schwarz	ESK1	-	-
11	EMI test Software	Audix	E3	-	-
12	TURNTABLE	MATURO	TT2.0	-	-
13	ANTENNA MAST	MATURO	TAM-4.0-P	-	-

RF Conducted methods					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Spectrum Analyzer	Rohde&Schwarz	FSP	1164.4391.40	2016/11/13
2	MXA Signal Analyzer	Agilent Technologies	N9020A	MY5050187	2016/11/13

The Cal.Interval was one year.

5. TEST CONDITIONS AND RESULTS

5.1. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Test Result:

☒ **Passed**   ☐ **Not Applicable**

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.
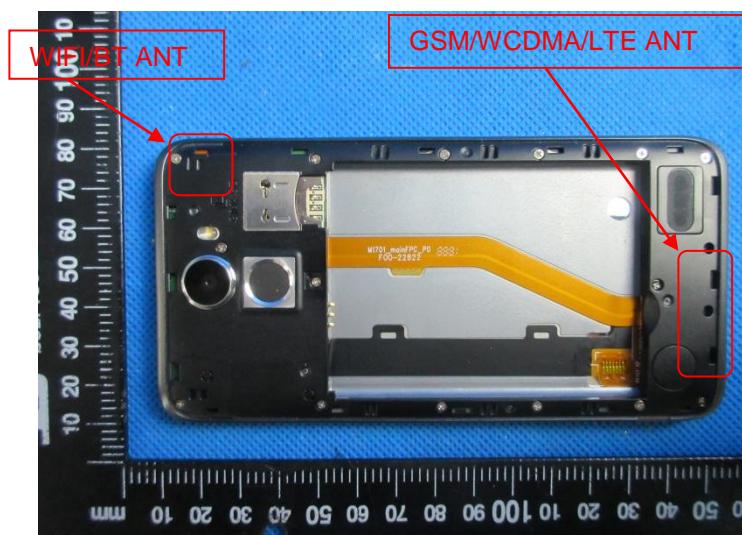
5.2. Conducted Emissions (AC Main)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION
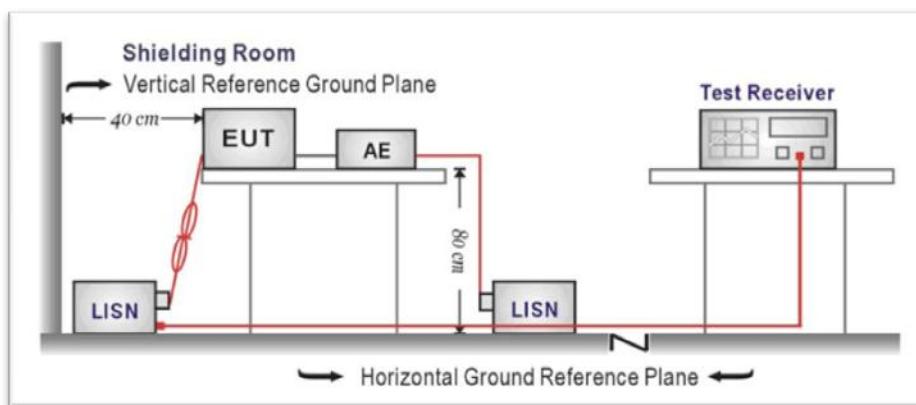
TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor,was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Note:
1) Transd= Cable lose + Pulse Limiter Factor + Artificial Mains Factor
2) Margin= Limit - Level

Test Line:	L

x x x MES GM1709045065_fin

_MEASUREMENT RESULT: "GM1709045065_fin"_

9/4/2017 7:22PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.159000	33.60	10.4	66	31.9	QP	L1	GND
0.285000	34.40	10.2	61	26.3	QP	L1	GND
0.474000	38.10	10.2	56	18.3	QP	L1	GND
0.613500	35.40	10.2	56	20.6	QP	L1	GND
0.996000	34.50	10.2	56	21.5	QP	L1	GND
1.702500	31.60	10.2	56	24.4	QP	L1	GND
3.538500	25.30	10.3	56	30.7	QP	L1	GND

_MEASUREMENT RESULT: "GM1709045065_fin2"_

9/4/2017 7:22PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.285000	27.70	10.2	51	23.0	AV	L1	GND
0.424500	29.90	10.2	47	17.5	AV	L1	GND
0.474000	29.40	10.2	46	17.0	AV	L1	GND
0.478500	29.90	10.2	46	16.5	AV	L1	GND
0.613500	23.50	10.2	46	22.5	AV	L1	GND
0.852000	21.10	10.1	46	24.9	AV	L1	GND
26.484000	26.70	10.7	50	23.3	AV	L1	GND

Test Line:	N

x x x MES   GM1709045064_fin

MEASUREMENT RESULT: "GM1709045064_fin"

9/4/2017   7:18PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.411000	28.60	10.2	58	29.0	QP	N	GND
0.478500	34.10	10.2	56	22.3	QP	N	GND
0.726000	30.10	10.2	56	25.9	QP	N	GND
0.888000	24.20	10.1	56	31.8	QP	N	GND
0.928500	30.80	10.2	56	25.2	QP	N	GND
2.332500	24.20	10.2	56	31.8	QP	N	GND
3.345000	25.70	10.3	56	30.3	QP	N	GND

MEASUREMENT RESULT: "GM1709045064_fin2"

9/4/2017   7:18PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.478500	26.60	10.2	46	19.8	AV	N	GND
0.483000	27.60	10.2	46	18.7	AV	N	GND
1.072500	18.80	10.2	46	27.2	AV	N	GND
26.484000	25.60	10.7	50	24.4	AV	N	GND
26.547000	23.80	10.7	50	26.2	AV	N	GND
26.605500	26.00	10.7	50	24.0	AV	N	GND
27.154500	25.30	10.7	50	24.7	AV	N	GND

5.3. Conducted Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

TEST CONFIGURATION
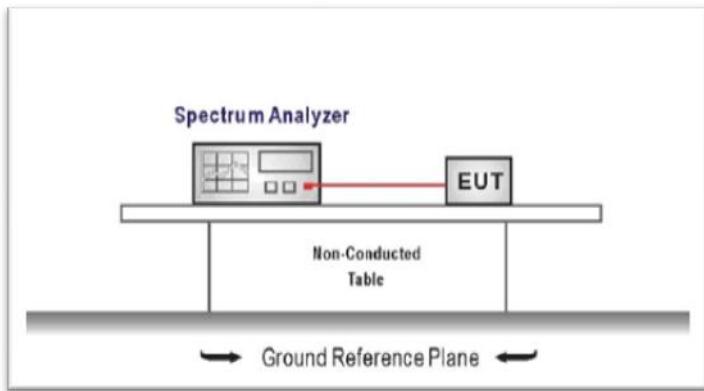
TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the pathloss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
    Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
    RBW≥ the 20 dB bandwidth of the emission being measured, VBW≥RBW
    Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.
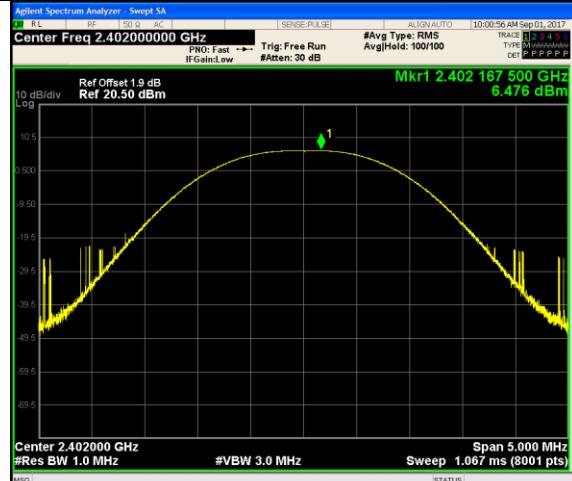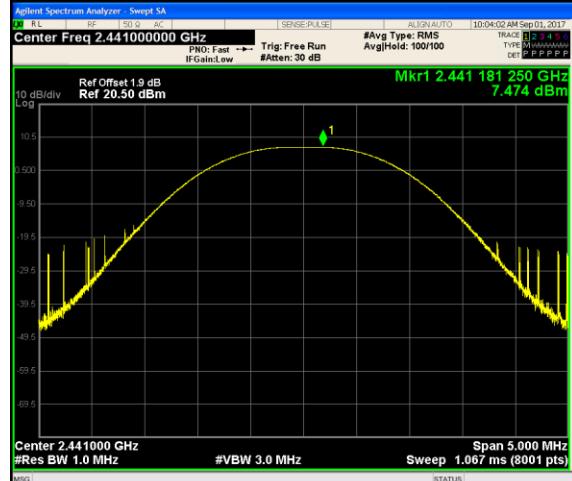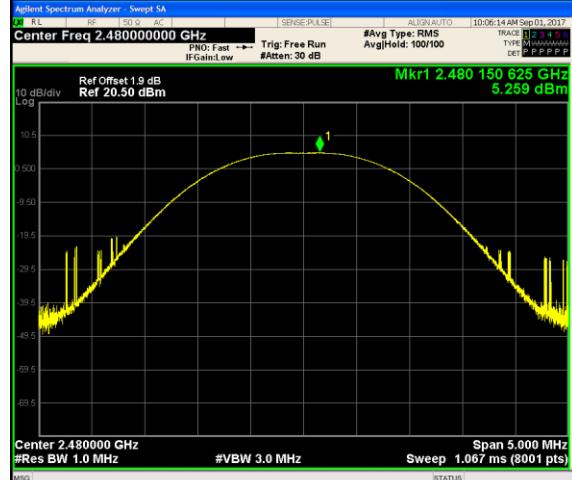
TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ **Passed**   ☐ **Not Applicable**

Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	6.476	≤ 30.00	Pass
	39	7.474		
	78	5.259		
π/4DQPSK	00	5.699	≤ 21.00	Pass
	39	6.869		
	78	4.622		
8DPSK	00	5.937	≤ 21.00	Pass
	39	6.955		
	78	4.819		

Modulation Type:	GFSK
CH00	
CH39	
CH78	

Modulation Type:	π/4DQPSK
CH00	
CH39	
CH78	

Modulation Type:	8DPSK
CH00	
CH39	
CH78	

5.4. 20 dB Bandwidth

LIMIT

N/A

TEST CONFIGURATION
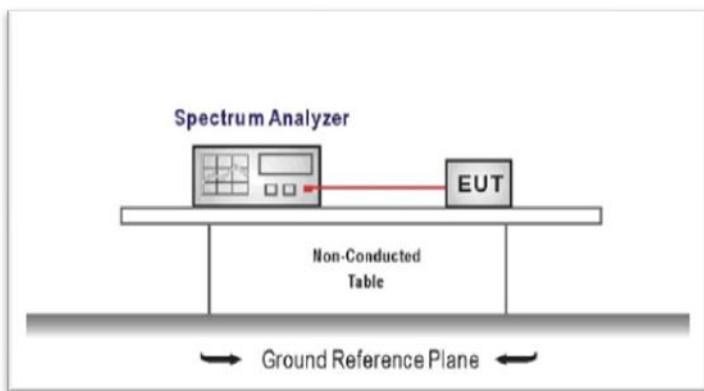
TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
   Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
   RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW
   Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3
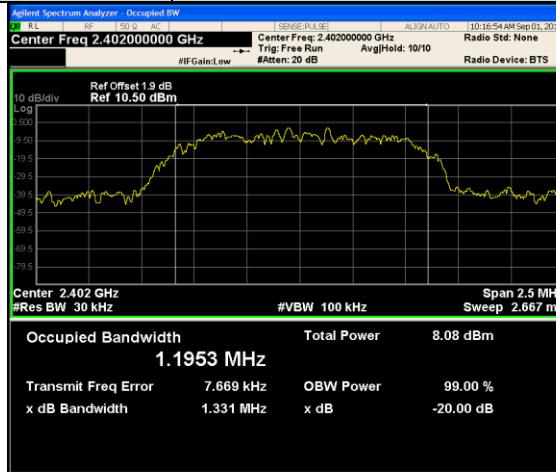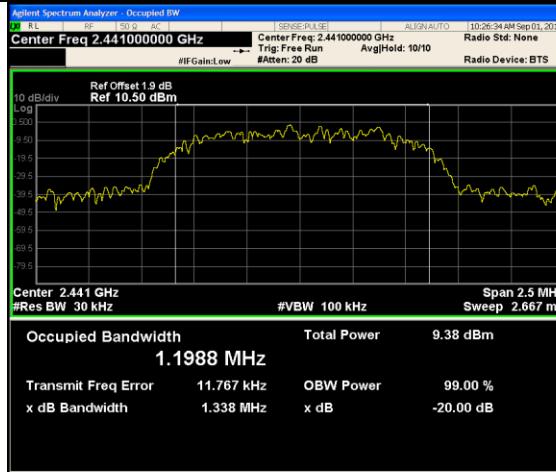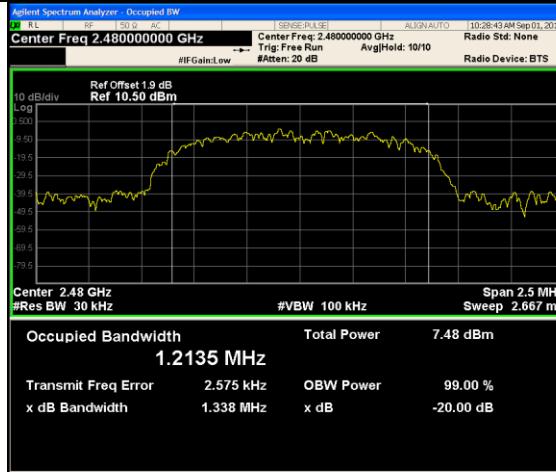
TEST RESULTS

☒ **Passed**   ☐ **Not Applicable**

Modulation type	Channel	20 dB Bandwidth (MHz)	Limit (MHz)	Result
GFSK	00	0.890	-	Pass
	39	0.885		
	78	0.929		
π/4DQPSK	00	1.350	-	Pass
	39	1.355		
	78	1.334		
8DPSK	00	1.331	-	Pass
	39	1.338		
	78	1.338		

Modulation Type:	GFSK
CH00	
CH39	
CH78	

Modulation Type:	π/4DQPSK
CH00	
CH39	
CH78	

Modulation Type:	8DPSK

CH00	
CH39	
CH78	

5.5. Carrier Frequencies Separation

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the 2/3*20 dB bandwidth of the hopping channel, whichever is greater.

TEST CONFIGURATION
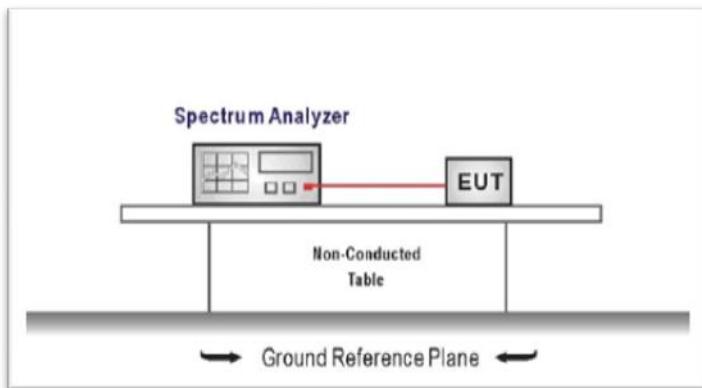
TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
   Span = wide enough to capture the peaks of two adjacent channels
   RBW ≥ 1% of the span, VBW ≥ RBW
   Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ **Passed**   ☐ **Not Applicable**

Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (MHz) *	Result
GFSK	39	1.049	≥0.929	Pass
π/4DQPSK	39	0.934	≥0.903	Pass
8DPSK	39	1.070	≥0.892	Pass

Note:
*: GFSK limit = The maximum 20 dB Bandwidth for GFSK modulation on the section 5.4.
  π/4DQPSK limit = 2/3 * The maximum 20 dB Bandwidth for π/4DQPSK modulation on the section 5.4.
  8DPSK limit = 2/3 * The maximum 20 dB Bandwidth for 8DPSK modulation on the section 5.4
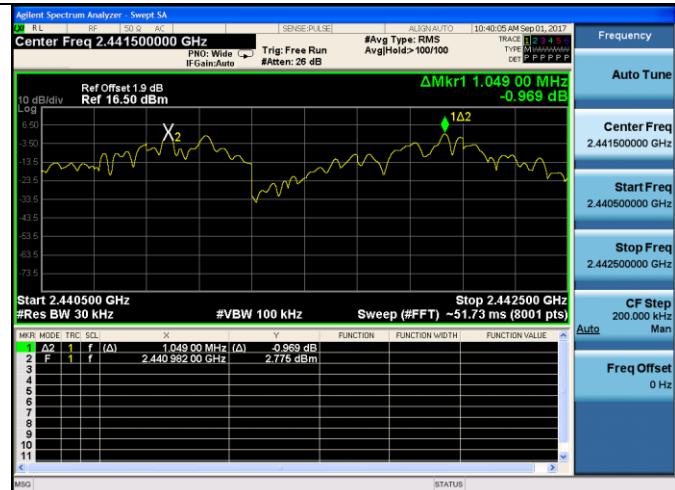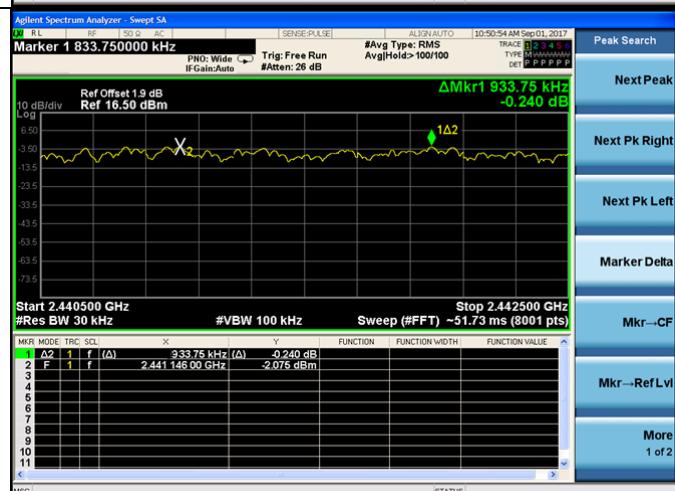
GFSK	
π/4DQPSK	
8DPSK	

5.6. Hopping Channel Number

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):Frequency hopping systems in the 2400–2483.5 MHz band shall use at least **15** channels.

TEST CONFIGURATION
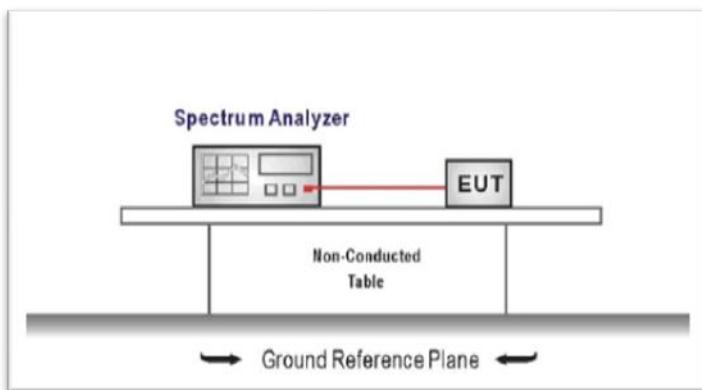
TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
    Span = the frequency band of operation
    RBW ≥ 1% of the span, VBW ≥ RBW
    Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ **Passed**   ☐ **Not Applicable**

Modulation type	Channel number	Limit	Result
GFSK	79		
π/4DQPSK	79	≥15.00	Pass
8DPSK	79		
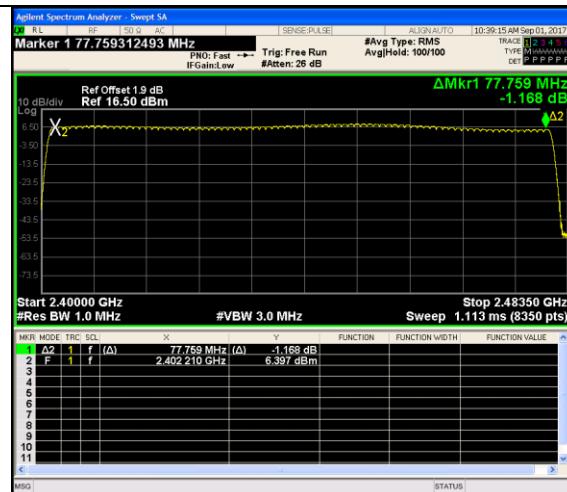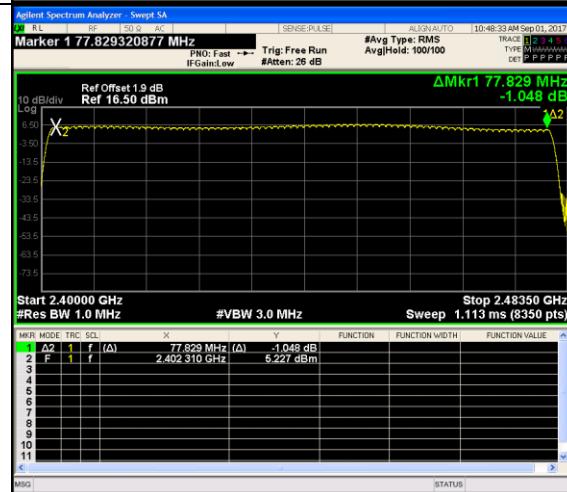
GFSK	
π/4DQPSK	
8DPSK	
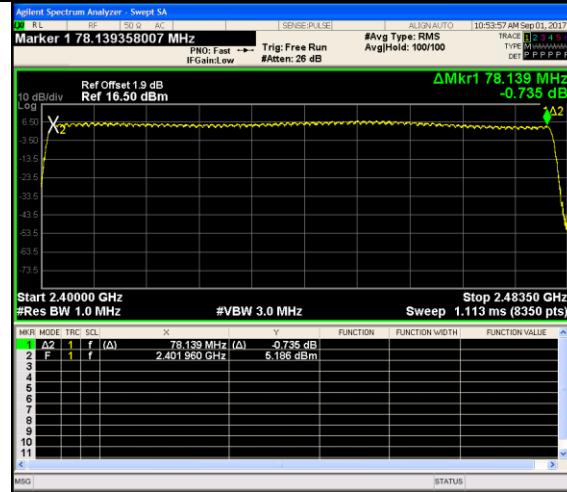
5.7. Dwell Time

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

TEST CONFIGURATION
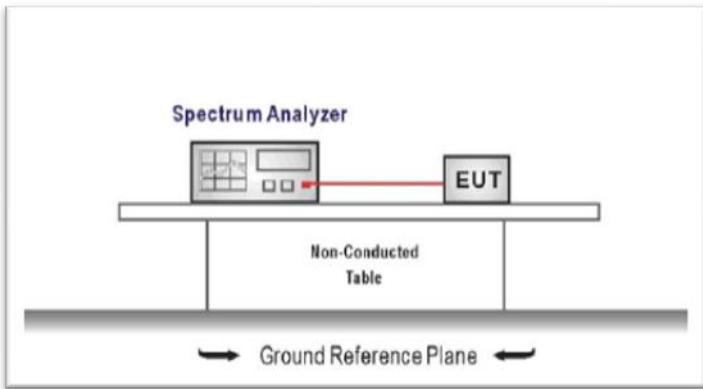
TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
    Span = zero span, centered on a hopping channel, RBW= 1 MHz, VBW ≥ RBW
    Sweep = as necessary to capture the entire dwell time per hopping channel,
    Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS
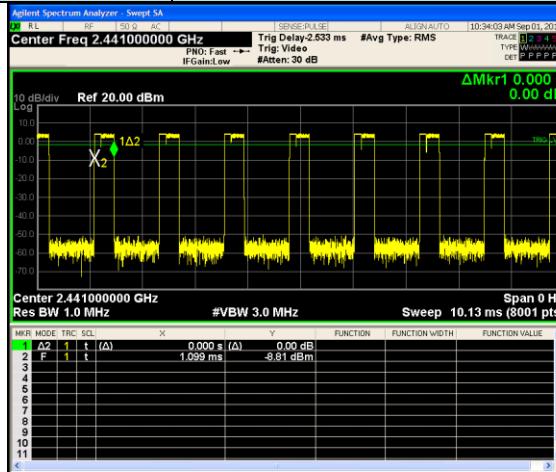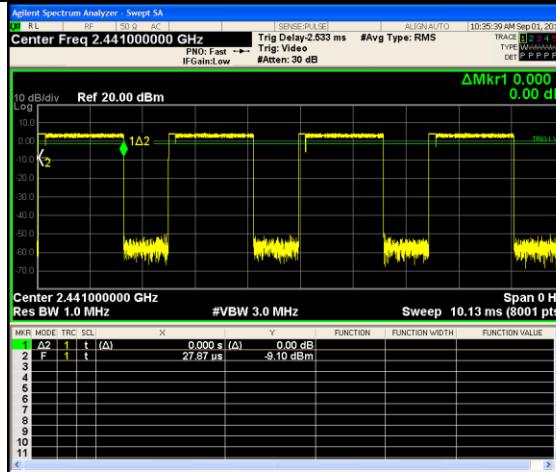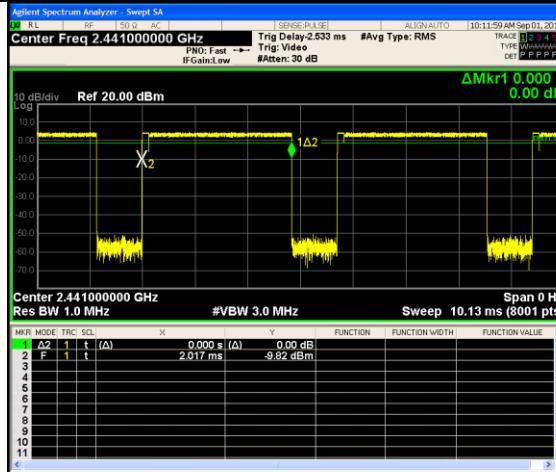
☒ **Passed**   ☐ **Not Applicable**
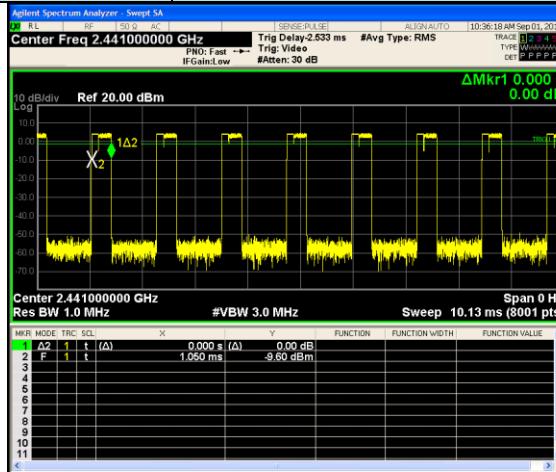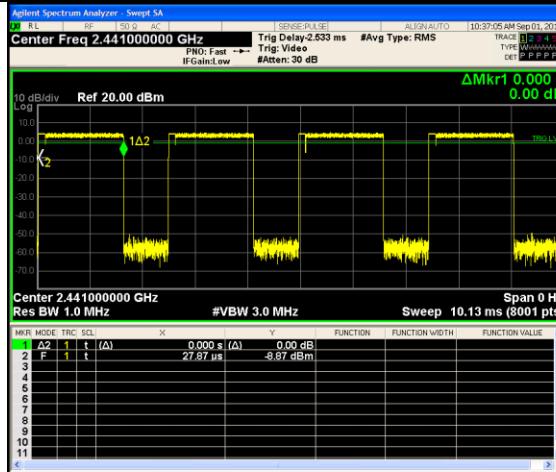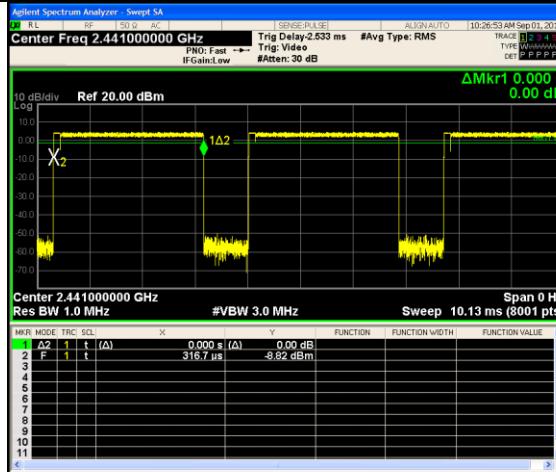
Modulation type	Channel	Dwell time (Second)	Limit (Second)	Result
GFSK	DH1	0.118	≤ 0.40	Pass
	DH3	0.261		
	DH5	0.307		
π/4DQPSK	2DH1	0.122	≤ 0.40	Pass
	2DH3	0.261		
	2DH5	0.307		
8DPSK	3DH1	0.122	≤ 0.40	Pass
	3DH3	0.261		
	3DH5	0.307		

Note:
1. We have tested all mode at high,middle and low channel,and recoreded worst case at middle channel.
2. Dwell time=Pulse time (ms) × (1600 ÷ 2 ÷ 79) ×31.6 Second for DH1, 2DH1, 3DH1
    Dwell time=Pulse time (ms) × (1600 ÷ 4 ÷ 79) ×31.6 Second for DH3, 2DH3, 3DH3
    Dwell time=Pulse time (ms) × (1600 ÷ 6 ÷ 79) ×31.6 Second for DH5, 2DH5, 3DH5

Modulation Type:	GFSK
DH1	
DH3	
DH5	

Modulation Type:	π/4DQPSK
2DH1	
2DH3	
2DH5	

Modulation Type:	8DPSK
3DH1	
3DH3	
3DH5	

5.8. Pseudorandom Frequency Hopping Sequence

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):Frequency hopping systems shall have hopping channel carrier fre-quencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Al-ternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier fre-quencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to chan-nel frequencies that are selected at the system hopping rate from a pseudo ran-domly ordered list of hopping fre-quencies. Each frequency must be used equally on the average by each trans-mitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their cor-responding transmitters and shall shift frequencies in synchronization with the transmitted signals.

TEST RESULTS

The pseudorandom frequency hopping sequence may be generated in a nice-stage shift register whose 5^{th} and 9^{th} stage outputs are added in a modulo-two addition stage.And the result is fed back to the input of the friststage.The sequence begins with the frist one of 9 consecutive ones,forexample:the shift register is initialized with nine ones.

● Number of shift register stages: 9
● Length of pseudo-random sequence:29-1=511 bits
● Longest sequence of zeros: 8 (non-inverted signal)
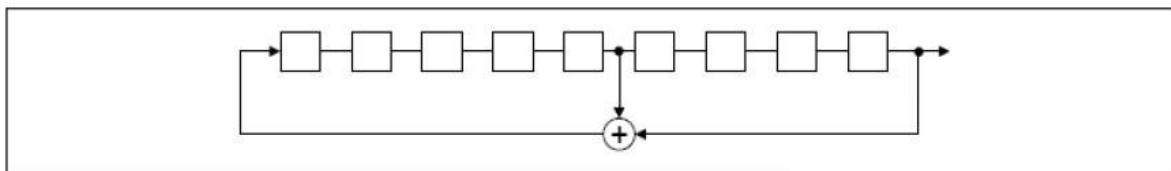
Linear Feedback Shift Register for Generation of the PRBS sequence

An explame of pseudorandom frequency hopping sequence as follows:

Each frequency used equally one the average by each transmitter.
The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

5.9. Restricted band (radiated)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION
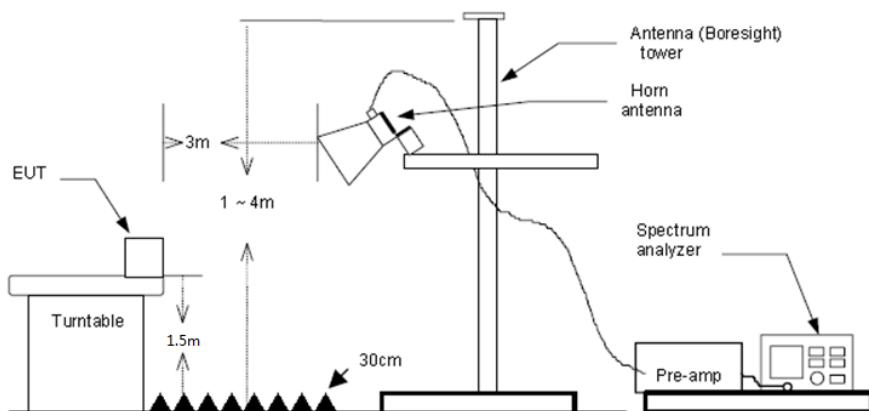
TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT waspositioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. Thisis repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
   RBW=1 MHz, VBW=3 MHz Peak detector for Peak value
   RBW=1 MHz, VBW=10 Hz Peak detector for Average value.

TEST MODE:
Please refer to the clause 3.3

TEST RESULTS

☒ **Passed**   ☐ **Not Applicable**

Note:
1) Final level= Read level + Antenna Factor+ Cable Loss- Preamp Factor
2) Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report.
3) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.

CH00									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	34.75	28.05	6.62	37.65	31.77	74.00	-42.23	Horizontal	Peak
2390.03	34.05	27.65	6.75	37.87	30.58	74.00	-43.42	Horizontal	Peak
2310.00	35.49	28.05	6.62	37.65	32.51	74.00	-41.49	Vertical	Peak
2390.03	36.24	27.65	6.75	37.87	32.77	74.00	-41.23	Vertical	Peak

Polarization:	Vertical


```
Mark   Frequency  Reading   Antenna  Cable  Preamp    Level     Limit     Over    Remark
        MHz       dBuV/m    dB       dB     dB        dBuV/m    dBuV/m    limit
 1      2310.00   35.49     28.05    6.62   37.65     32.51     74.00     -41.49  Peak
 2      2390.03   36.24     27.65    6.75   37.87     32.77     74.00     -41.23  Peak
```

Polarization:	Horizontal


```
Mark  Frequency  Reading  Antenna  Cable  Preamp    Level       Limit    Over   Remark
       MHz       dBuV/m    dB       dB     dB       dBuV/m      dBuV/m   limit
 1    2310.00    34.75    28.05    6.62   37.65     31.77       74.00   -42.23  Peak
 2    2390.03    34.05    27.65    6.75   37.87     30.58       74.00   -43.42  Peak
```

CH78									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.50	45.35	27.26	6.83	37.87	41.57	74.00	-32.43	Horizontal	Peak
2500.00	34.50	27.20	6.84	37.87	30.67	74.00	-43.33	Horizontal	Peak
2483.50	53.66	27.26	6.83	37.87	49.88	74.00	-24.12	Vertical	Peak
2500.00	35.38	27.20	6.84	37.87	31.55	74.00	-42.45	Vertical	Peak

Polarization:	Vertical

Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	53.66	27.26	6.83	37.87	49.88	74.00	-24.12	Peak
2	2500.00	35.38	27.20	6.84	37.87	31.55	74.00	-42.45	Peak

Polarization:	Horizontal

| Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	45.35	27.26	6.83	37.87	41.57	74.00	-32.43	Peak
2	2500.00	34.50	27.20	6.84	37.87	30.67	74.00	-43.33	Peak

5.10. Band edge and Spurious Emissions (conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### TEST CONFIGURATION
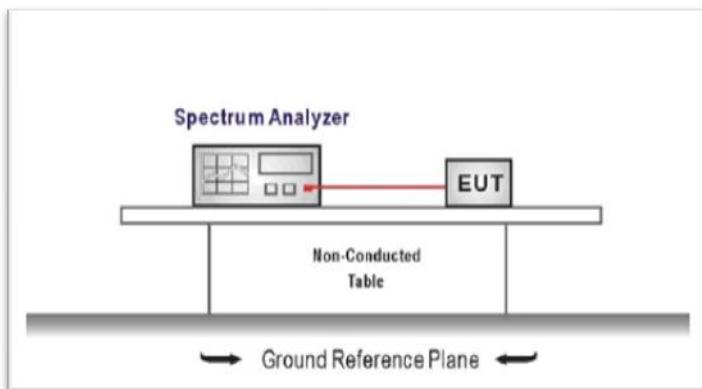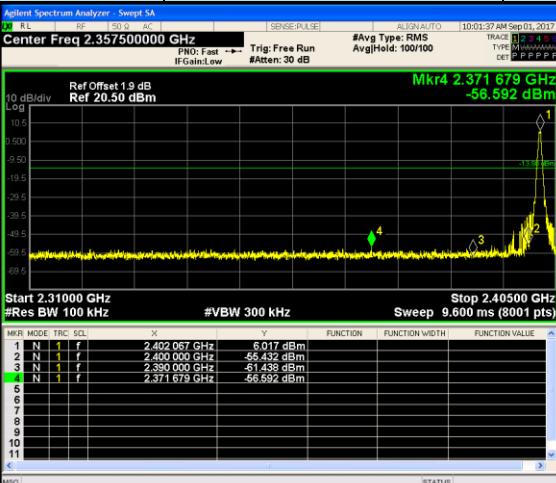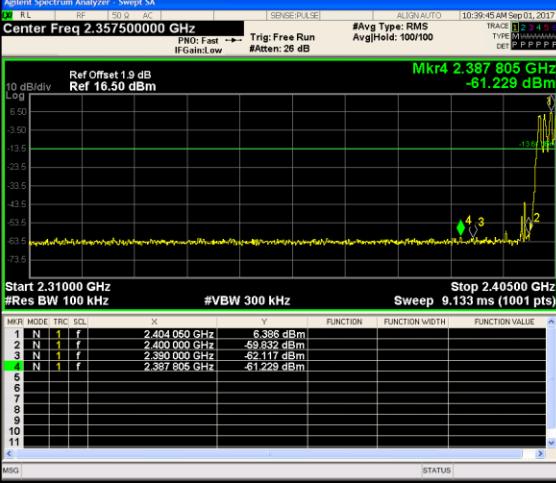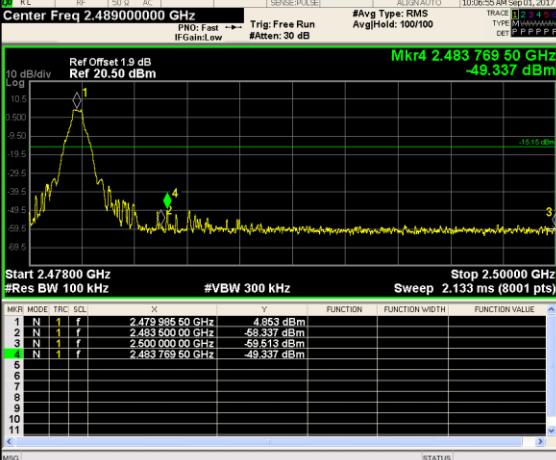
TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
   RBW = 100 kHz, VBW ≥ RBW
   Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:
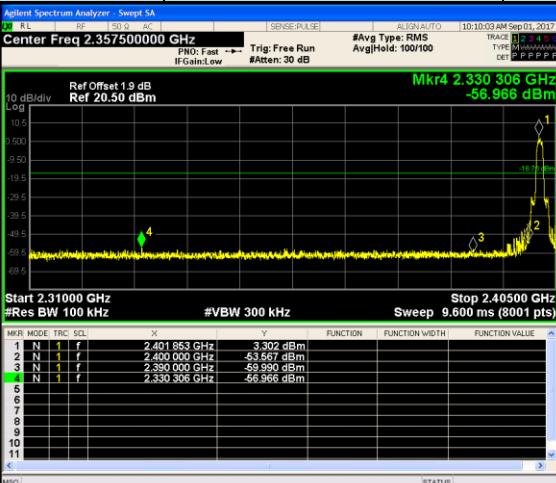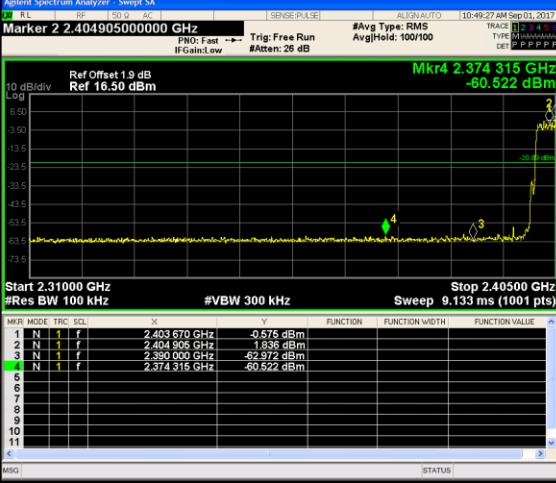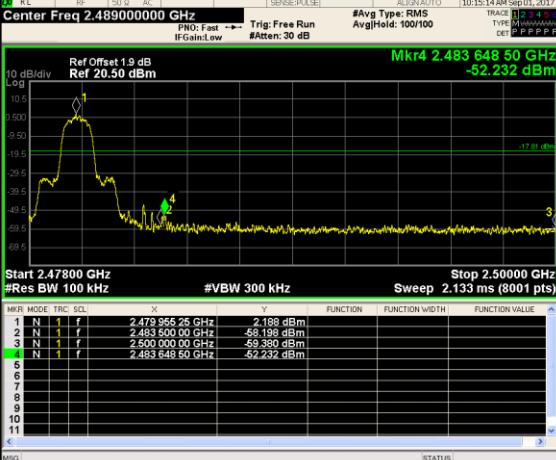
Please refer to the clause 3.3

TEST RESULTS

☒ **Passed**   ☐ **Not Applicable**

Test Item:		Band edge		Modulation type:		GFSK	
CH00 No hopping mode							
CH00 Hopping mode							
CH78 No hopping mode							

CH78 Hopping mode	

Test Item:	Band edge	Modulation type:	π/4DQPSK
CH00 No hopping mode			
CH00 Hopping mode			
CH78 No hopping mode			

CH78 Hopping mode	