

TEST REPORT

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR16-SRF0024

Page (1) of (67)

KCTL

1. Client

◦ Name : Starnex Co., Ltd.
◦ Address : #201, Kolon Digital Tower Aston, 212, Gasan Digital 1-ro,
Geumcheon-gu, Seoul, South Korea
◦ Date of Receipt : 2016-10-04

2. Use of Report : -

3. Name of Product and Model : Wearable digital communicator / DOMINO S1

4. Manufacturer and Country of Origin : Starnex Co., Ltd. / Korea

5. FCC ID : TN9DOMINOS1

6. Date of Test : 2016-10-04 to 2016-10-10

7. Test method used : FCC Part 15 Subpart C, 15.247
ANSI C63.10-2013

8. Test Results : Refer to the test result in the test report

| | | |
|-------------|---|---|
| Affirmation | Tested by | Technical Manager |
| |  Name : Euijung Kim (Signature) |  Name : Changmin Kim (Signature) |

2016-10-11

KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCL Inc.


REPORT REVISION HISTORY

| Date | Revision | Page No |
|------------|-------------------|---------|
| 2016-10-11 | Originally issued | - |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document.

[Contents]

| | |
|---|-----------|
| 1. Client information | 4 |
| 2. Laboratory information | 5 |
| 3. Description of E.U.T..... | 6 |
| 3.1 Basic description | 6 |
| 3.2 General description | 6 |
| 3.3 Test frequency | 7 |
| 3.4 Test Voltage | 7 |
| 4. Summary of test results..... | 9 |
| 4.1 Standards & results | 9 |
| 4.2 Uncertainty | 9 |
| 5. Test results | 10 |
| 5.1 Antenna Requirement | 10 |
| 5.2 Maximum Peak Output Power | 11 |
| 5.3 Carrier Frequency Separation..... | 14 |
| 5.4 20 dB Channel Bandwidth..... | 19 |
| 5.5 Number of Hopping Channels..... | 29 |
| 5.6 Time of Occupancy(Dwell Time) | 37 |
| 5.7 Spurious Emission, Band edge and Restricted bands | 43 |
| 5.8 Conducted Emission | 65 |
| 6. Test equipment used for test..... | 67 |

| | | |
|--|---|---|
| KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Republic of Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr | Report No.: KR16-SRF0024 Page (4) of (67) |  |
|--|---|---|

1. Client information

Applicant: Starnex Co., Ltd.
Address: #201, Kolon Digital Tower Aston, 212, Gasan Digital 1-ro,
 Geumcheon-gu, Seoul, South Korea
Telephone number: +82-2-837-9700
Facsimile number: +82-2-2082-8585
Contact person: Seok-Woo Choi / csw324@starnex.co.kr

Manufacturer: Starnex Co., Ltd.
Address: #201, Kolon Digital Tower Aston, 212, Gasan Digital 1-ro,
 Geumcheon-gu, Seoul, South Korea

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR16-SRF0024

Page (5) of (67)

KCTL

2. Laboratory information

Address

KCTL Inc.

65 Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Republic of Korea (16677)
Telephone Number: 82-70-5008-1016 Facsimile Number: 82-505-299-8311

Certificate

KOLAS No.: KT231


FCC Site Designation No.: KR0040

FCC Site Registration No.: 687132

VCCI Site Registration No.: R-3327, G-198, C-3706, T-1849

IC Site Registration No.:8035A-2

SITE MAP

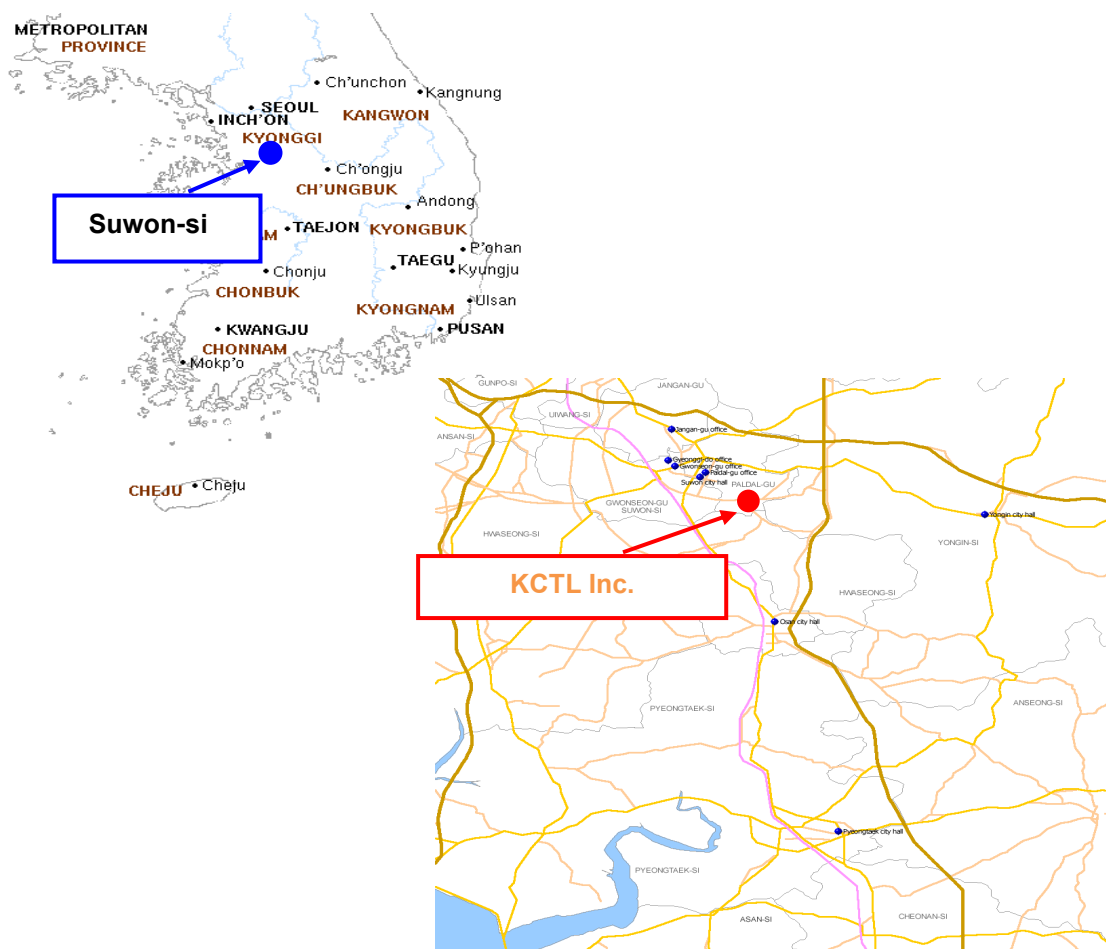

3. Description of E.U.T.

3.1 Basic description

| | |
|-------------------------|--|
| Applicant | Starnex Co., Ltd. |
| Address of Applicant | #201, Kolon Digital Tower Aston, 212, Gasan Digital 1-ro, Geumcheon-gu, Seoul, South Korea |
| Manufacturer | Starnex Co., Ltd. |
| Address of Manufacturer | #201, Kolon Digital Tower Aston, 212, Gasan Digital 1-ro, Geumcheon-gu, Seoul, South Korea |
| Type of equipment | Wearable digital communicator |
| Basic Model | DOMINO S1 |
| Serial number | N/A |

3.2 General description

| | |
|-----------------------------|--|
| Frequency Range | 902.6 MHz ~ 927.5 MHz (Half mode), 903.0 MHz ~ 927.5 MHz (Hi-fi mode) |
| Type of Modulation | FHSS |
| The number of channels | 250 ch (Half mode), 50 ch (Hi-fi mode) |
| Type of Antenna | FPCB Antenna |
| Antenna Gain | -1.26 dBi |
| Transmit Power | 27.19 dBm |
| Power supply | DC 3.7 V |
| Product SW/HW version | 01.02.25 / V05 |
| Radio SW/HW version | 01.02.25 / V05 |
| Test SW Version | 01.02.25 |
| RF power setting in TEST SW | 23 |

Note : The above EUT information was declared by the manufacturer.

3.3 Test frequency

| | Half mode | Hi-fi mode |
|-------------------|-----------|------------|
| Lowest frequency | 902.6 MHz | 903.0 MHz |
| Middle frequency | 915.0 MHz | 915.0 MHz |
| Highest frequency | 927.5 MHz | 927.5 MHz |

3.4 Test Voltage

| Mode | Voltage |
|-----------------|----------|
| Nominal voltage | DC 3.7 V |

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR16-SRF0024
Page (8) of (67)



Hopping group channel list

| HG(1) | | HG(2) | | HG(3) | | HG(4) | | HG(5) | |
|-----------|---------|-----------|---------|-----------|---------|-----------|---------|-----------|---------|
| Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel |
| 902.6 | 1 | 902.7 | 2 | 902.8 | 3 | 902.9 | 4 | 903 | 5 |
| 903.1 | 6 | 903.2 | 7 | 903.3 | 8 | 903.4 | 9 | 903.5 | 10 |
| 903.6 | 11 | 903.7 | 12 | 903.8 | 13 | 903.9 | 14 | 904 | 15 |
| 904.1 | 16 | 904.2 | 17 | 904.3 | 18 | 904.4 | 19 | 904.5 | 20 |
| 904.6 | 21 | 904.7 | 22 | 904.8 | 23 | 904.9 | 24 | 905 | 25 |
| 905.1 | 26 | 905.2 | 27 | 905.3 | 28 | 905.4 | 29 | 905.5 | 30 |
| 905.6 | 31 | 905.7 | 32 | 905.8 | 33 | 905.9 | 34 | 906 | 35 |
| 906.1 | 36 | 906.2 | 37 | 906.3 | 38 | 906.4 | 39 | 906.5 | 40 |
| 906.6 | 41 | 906.7 | 42 | 906.8 | 43 | 906.9 | 44 | 907 | 45 |
| 907.1 | 46 | 907.2 | 47 | 907.3 | 48 | 907.4 | 49 | 907.5 | 50 |
| 907.6 | 51 | 907.7 | 52 | 907.8 | 53 | 907.9 | 54 | 908 | 55 |
| 908.1 | 56 | 908.2 | 57 | 908.3 | 58 | 908.4 | 59 | 908.5 | 60 |
| 908.6 | 61 | 908.7 | 62 | 908.8 | 63 | 908.9 | 64 | 909 | 65 |
| 909.1 | 66 | 909.2 | 67 | 909.3 | 68 | 909.4 | 69 | 909.5 | 70 |
| 909.6 | 71 | 909.7 | 72 | 909.8 | 73 | 909.9 | 74 | 910 | 75 |
| 910.1 | 76 | 910.2 | 77 | 910.3 | 78 | 910.4 | 79 | 910.5 | 80 |
| 910.6 | 81 | 910.7 | 82 | 910.8 | 83 | 910.9 | 84 | 911 | 85 |
| 911.1 | 86 | 911.2 | 87 | 911.3 | 88 | 911.4 | 89 | 911.5 | 90 |
| 911.6 | 91 | 911.7 | 92 | 911.8 | 93 | 911.9 | 94 | 912 | 95 |
| 912.1 | 96 | 912.2 | 97 | 912.3 | 98 | 912.4 | 99 | 912.5 | 100 |
| 912.6 | 101 | 912.7 | 102 | 912.8 | 103 | 912.9 | 104 | 913 | 105 |
| 913.1 | 106 | 913.2 | 107 | 913.3 | 108 | 913.4 | 109 | 913.5 | 110 |
| 913.6 | 111 | 913.7 | 112 | 913.8 | 113 | 913.9 | 114 | 914 | 115 |
| 914.1 | 116 | 914.2 | 117 | 914.3 | 118 | 914.4 | 119 | 914.5 | 120 |
| 914.6 | 121 | 914.7 | 122 | 914.8 | 123 | 914.9 | 124 | 915 | 125 |
| 915.1 | 126 | 915.2 | 127 | 915.3 | 128 | 915.4 | 129 | 915.5 | 130 |
| 915.6 | 131 | 915.7 | 132 | 915.8 | 133 | 915.9 | 134 | 916 | 135 |
| 916.1 | 136 | 916.2 | 137 | 916.3 | 138 | 916.4 | 139 | 916.5 | 140 |
| 916.6 | 141 | 916.7 | 142 | 916.8 | 143 | 916.9 | 144 | 917 | 145 |
| 917.1 | 146 | 917.2 | 147 | 917.3 | 148 | 917.4 | 149 | 917.5 | 150 |
| 917.6 | 151 | 917.7 | 152 | 917.8 | 153 | 917.9 | 154 | 918 | 155 |
| 918.1 | 156 | 918.2 | 157 | 918.3 | 158 | 918.4 | 159 | 918.5 | 160 |
| 918.6 | 161 | 918.7 | 162 | 918.8 | 163 | 918.9 | 164 | 919 | 165 |
| 919.1 | 166 | 919.2 | 167 | 919.3 | 168 | 919.4 | 169 | 919.5 | 170 |
| 919.6 | 171 | 919.7 | 172 | 919.8 | 173 | 919.9 | 174 | 920 | 175 |
| 920.1 | 176 | 920.2 | 177 | 920.3 | 178 | 920.4 | 179 | 920.5 | 180 |
| 920.6 | 181 | 920.7 | 182 | 920.8 | 183 | 920.9 | 184 | 921 | 185 |
| 921.1 | 186 | 921.2 | 187 | 921.3 | 188 | 921.4 | 189 | 921.5 | 190 |
| 921.6 | 191 | 921.7 | 192 | 921.8 | 193 | 921.9 | 194 | 922 | 195 |
| 922.1 | 196 | 922.2 | 197 | 922.3 | 198 | 922.4 | 199 | 922.5 | 200 |
| 922.6 | 201 | 922.7 | 202 | 922.8 | 203 | 922.9 | 204 | 923 | 205 |
| 923.1 | 206 | 923.2 | 207 | 923.3 | 208 | 923.4 | 209 | 923.5 | 210 |
| 923.6 | 211 | 923.7 | 212 | 923.8 | 213 | 923.9 | 214 | 924 | 215 |
| 924.1 | 216 | 924.2 | 217 | 924.3 | 218 | 924.4 | 219 | 924.5 | 220 |
| 924.6 | 221 | 924.7 | 222 | 924.8 | 223 | 924.9 | 224 | 925 | 225 |
| 925.1 | 226 | 925.2 | 227 | 925.3 | 228 | 925.4 | 229 | 925.5 | 230 |
| 925.6 | 231 | 925.7 | 232 | 925.8 | 233 | 925.9 | 234 | 926 | 235 |
| 926.1 | 236 | 926.2 | 237 | 926.3 | 238 | 926.4 | 239 | 926.5 | 240 |
| 926.6 | 241 | 926.7 | 242 | 926.8 | 243 | 926.9 | 244 | 927 | 245 |
| 927.1 | 246 | 927.2 | 247 | 927.3 | 248 | 927.4 | 249 | 927.5 | 250 |

- Note: Half mode uses HG(1)~(5) and Hi-fi mode uses only HG(5)

4. Summary of test results

4.1 Standards & results

| FCC Rule | IC Rule | Parameter | Report Section | Test Result |
|--|----------------------------------|--|----------------|-------------|
| 15.203, 15.247(b)(4) | - | Antenna Requirement | 5.1 | C |
| 15.247(b)(1), (4) | RSS-247, 5.4 (2) | Maximum Peak Output Power | 5.2 | C |
| 15.247(a)(1) | RSS-247, 5.1 (2) | Carrier Frequency Separation | 5.3 | C |
| 15.247(a)(1) | RSS-247, 5.1 (1) | 20dB Channel Bandwidth | 5.4 | C |
| - | RSS-GEN, 6.6 | Occupied Bandwidth | 5.4 | C |
| 15.247(a)(iii) 15.247(b)(1) | RSS-247, 5.1 | Number of Hopping Channel | 5.5 | C |
| 15.247(a)(iii) | RSS-247, 5.1 (4) | Time of Occupancy(Dwell Time) | 5.6 | C |
| 15.247(d), 15.205(a), 15.209(a) | RSS-247, 5.5 RSS-GEN, 8.9, 10 | Spurious Emission, BandEdge, Restricted Band | 5.7 | C |
| 15.207(a) | RSS-GEN, 8.8 | Conducted Emissions | 5.8 | C |
| Note: C=Complies NC= Not complies NT=Not tested NA=Not Applicable | | | | |

- The method of measurement used to test this FHSS device is ANSI C63.10-2013.

4.2 Uncertainty

| Measurement Item | Expanded Uncertainty $U = kU_c (k = 2)$ | |
|------------------------------|--|----------------------|
| Conducted RF power | 1.44 dB | |
| Conducted Spurious Emissions | 1.52 dB | |
| Radiated Spurious Emissions | 30 MHz ~ 300 MHz: | + 4.94 dB, - 5.06 dB |
| | | + 4.93 dB, - 5.05 dB |
| | 300 MHz ~ 1 000 MHz: | + 4.97 dB, - 5.08 dB |
| | | + 4.84 dB, - 4.96 dB |
| | 1 GHz ~ 25 GHz: | + 6.03 dB, - 6.05 dB |
| Conducted Emissions | 9 kHz ~ 150 kHz: | 3.75 dB |
| | 150 kHz ~ 30 MHz: | 3.36 dB |

5. Test results

5.1 Antenna Requirement

5.1.1 Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.1.2 Result

-Complied

The transmitter has permanently attached antenna(FPCB antenna).

5.2 Maximum Peak Output Power

5.2.1 Regulation

According to §15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to §15.247(b)(2), for frequency hopping systems operating in the 902-928 MHz band:

1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.


According to §15.247(b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2.2 Measurement Procedure

The method of measurement used to test this FHSS device is ANSI C63.10-2013.

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation.

| | | |
|---|---|---|
| <p>KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Republic of Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr</p> | <p>Report No.: KR16-SRF0024 Page (12) of (67)</p> |  |
|---|---|---|

The hopping shall be disabled for this test:

- a) Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW \geq RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e) A plot of the test results and setup description shall be included in the test report.

NOTE:

A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.

5.2.3 Test Result

- Complied

- Half mode

| Channel | Frequency [MHz] | Result [dBm] | Limit [dBm] | Margin [dB] | Avarage Power [dBm] |
|---------|--------------------|-----------------|----------------|----------------|------------------------|
| Lowest | 902.6 | 26.69 | 30.00 | 3.31 | 25.79 |
| Middle | 915.0 | 26.99 | 30.00 | 3.01 | 26.11 |
| Highest | 927.5 | 27.09 | 30.00 | 2.91 | 26.13 |

- Hi-fi mode

| Channel | Frequency [MHz] | Result [dBm] | Limit [dBm] | Margin [dB] | Avarage Power [dBm] |
|---------|--------------------|-----------------|----------------|----------------|------------------------|
| Lowest | 903.0 | 26.69 | 30.00 | 3.31 | 25.42 |
| Middle | 915.0 | 26.99 | 30.00 | 3.01 | 25.77 |
| Highest | 927.5 | 27.19 | 30.00 | 2.81 | 25.91 |

NOTE:

1. We took the insertion loss of the cable loss into consideration within the measuring instrument.
2. It was measured by power sensor.

5.3 Carrier Frequency Separation

5.3.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2 400-2 483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.3.2 Measurement Procedure

The method of measurement used to test this FHSS device is ANSI C63.10-2013.

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW) \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

5.3.3 Test Result

- Complied

- Half mode

| Frequency [MHz] | Carrier frequency separation [MHz] | Limit |
|-----------------|------------------------------------|---------------------------|
| 902.6 | 0.100 | ≥25 kHz or 20 dBbandwidth |
| 915.0 | 0.100 | ≥25 kHz or 20 dBbandwidth |
| 927.5 | 0.100 | ≥25 kHz or 20 dBbandwidth |

- Hi-fi mode

| Frequency [MHz] | Carrier frequency separation [MHz] | Limit |
|-----------------|------------------------------------|---------------------------|
| 903.0 | 0.502 | ≥25 kHz or 20 dBbandwidth |
| 915.0 | 0.502 | ≥25 kHz or 20 dBbandwidth |
| 927.5 | 0.502 | ≥25 kHz or 20 dBbandwidth |


NOTE: We took the insertion loss of the cable loss into consideration within the measuring instrument.

5.3.4 Test Plot


Figure 2. Plot of the Carrier Frequency Separation (Conducted)

- Half mode

Lowest Channel (902.6 MHz)

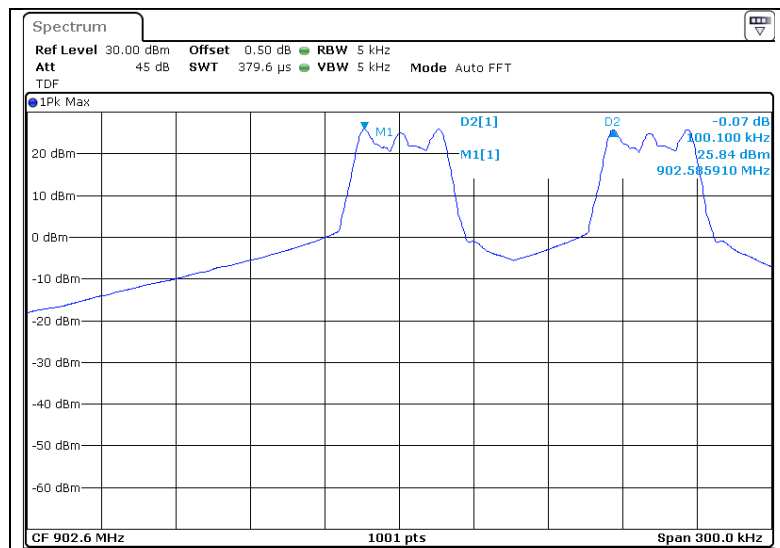

Middle Channel (915.0 MHz)

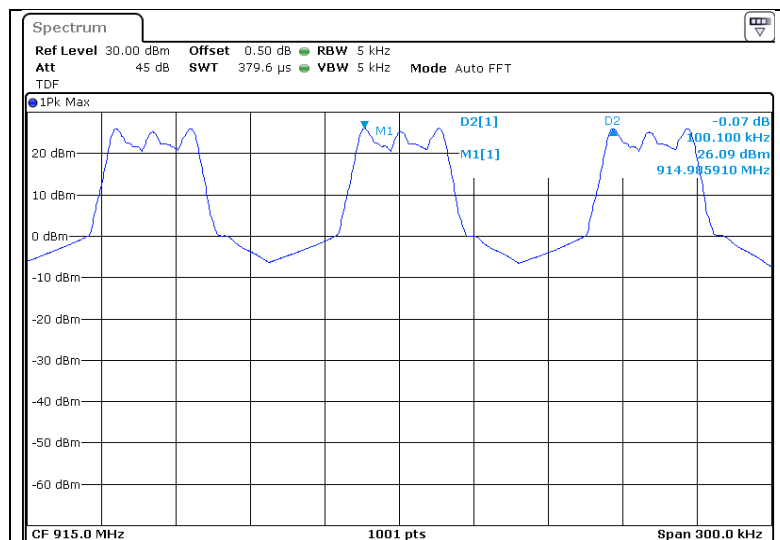

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR16-SRF0024

Page (17) of (67)


KCTL

Highest Channel (927.5 MHz)



- Hi-fi mode

Lowest Channel (903.0 MHz)

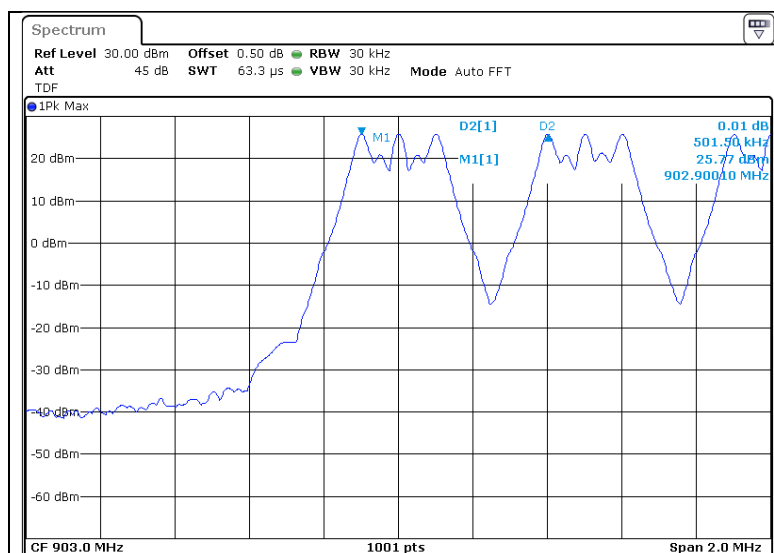

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR16-SRF0024


Page (18) of (67)

KCTL

Middle Channel (915.0 MHz)

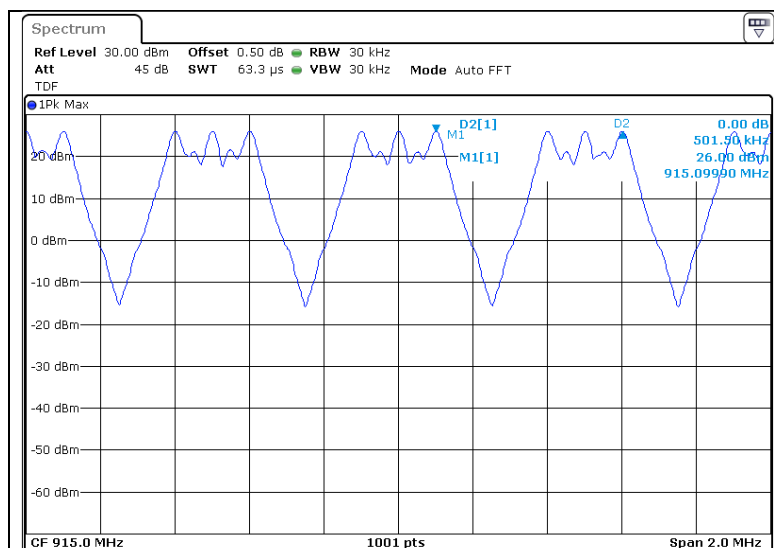

Highest Channel (927.5 MHz)

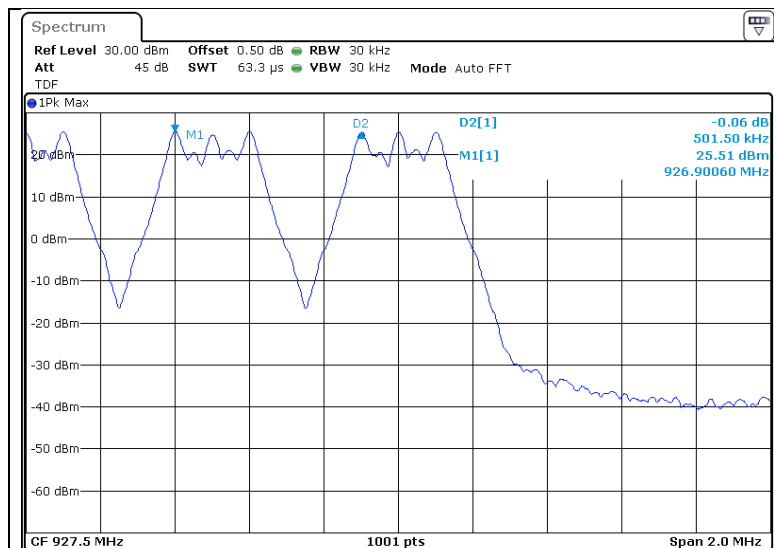

5.4 20 dB Channel Bandwidth

5.4.1 Regulation

According to §15.247(a)(1)(i), for frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

5.4.2 Measurement Procedure

The method of measurement used to test this FHSS device is ANSI C63.10-2013.

The occupied bandwidth is measured as the width of the spectral envelope of the modulated signal, at an amplitude level reduced from a reference value by a specified ratio (or in decibels, a specified number of dB down from the reference value). Typical ratios, expressed in dB, are -6 dB, -20 dB, and -26 dB, corresponding to 6 dB BW, 20 dB BW, and 26 dB BW, respectively. In this subclause, the ratio is designated by “-xx dB.” The reference value is either the level of the unmodulated carrier or the highest level of the spectral envelope of the modulated signal, as stated by the applicable requirement.

Some requirements might specify a specific maximum or minimum value for the “-xx dB” bandwidth; other requirements might specify that the “-xx dB” bandwidth be entirely contained within the authorized or designated frequency band.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.

- g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-xx dB down amplitude” using [(reference value) – xx]. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).
- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.
- k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

5.4.3 Test Result

- Complied

| Mode | Channel | 20 dB Channel Bandwidth [MHz] | Occupied Bandwidth (99 % BW) [MHz] |
|------------|---------|-------------------------------|------------------------------------|
| Half mode | Lowest | 0.039 | 0.037 |
| | Middle | 0.039 | 0.037 |
| | Highest | 0.039 | 0.037 |
| Hi-fi mode | Lowest | 0.312 | 0.294 |
| | Middle | 0.312 | 0.294 |
| | Highest | 0.311 | 0.294 |

NOTE: We took the insertion loss of the cable loss into consideration within the measuring instrument.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR16-SRF0024

Page (22) of (67)

KCTL

5.4.4 Test Plot


Figure 3. Plot of the 20 dB Channel Bandwidth / Occupied Bandwidth (Conducted)

- Half mode (20 dB Channel Bandwidth)

Lowest Channel (902.6 MHz)



Middle Channel (915.0 MHz)

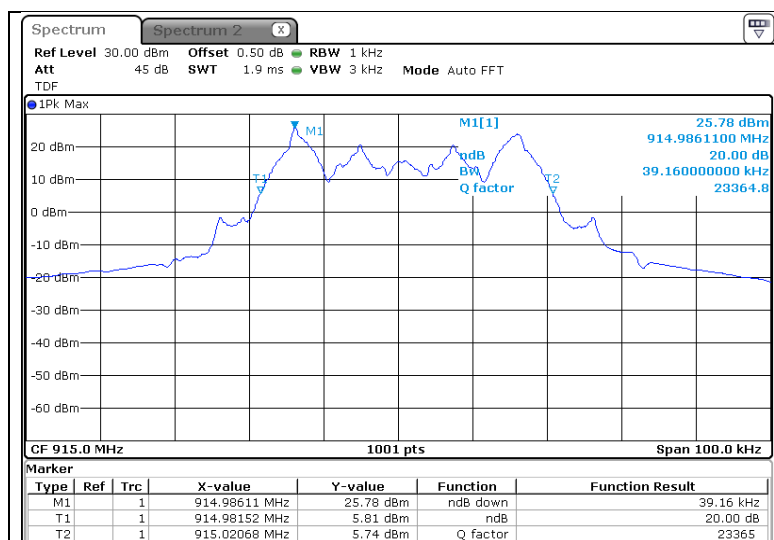

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR16-SRF0024

Page (23) of (67)


KCTL

Highest Channel (927.5 MHz)

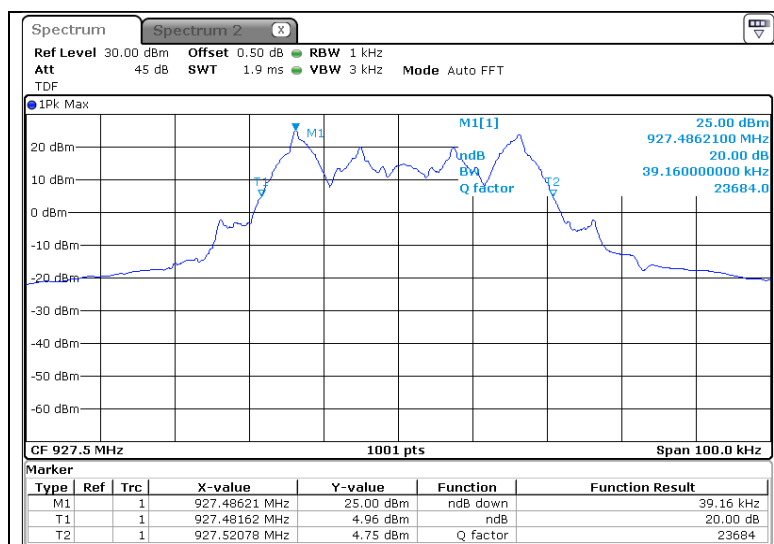

- Hi-fi mode (20 dB Channel Bandwidth)

Lowest Channel (903.0 MHz)

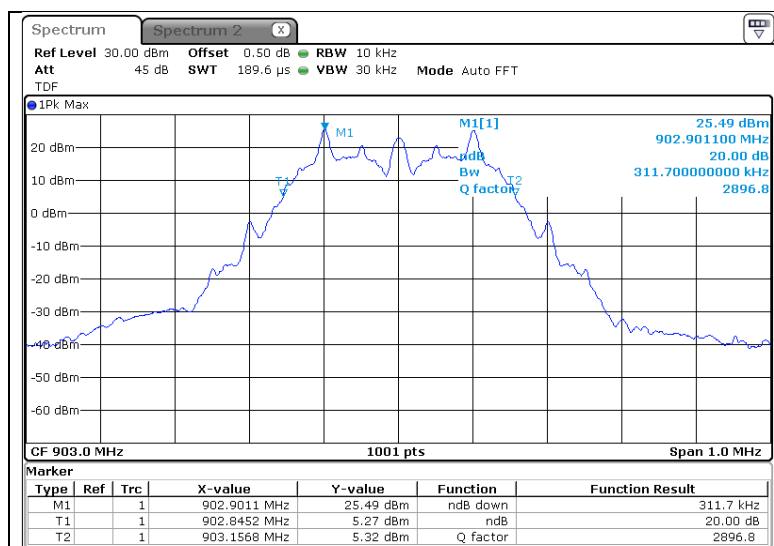

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR16-SRF0024


Page (24) of (67)

KCTL

Middle Channel (915.0 MHz)

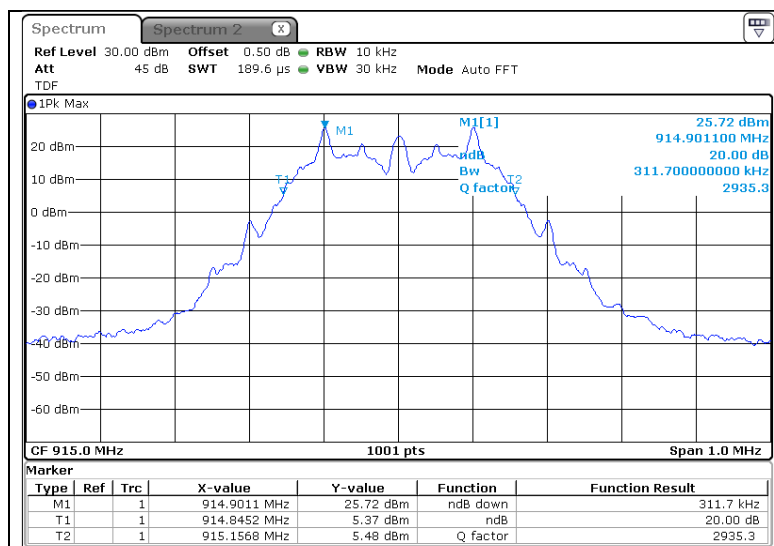

Highest Channel (927.5 MHz)

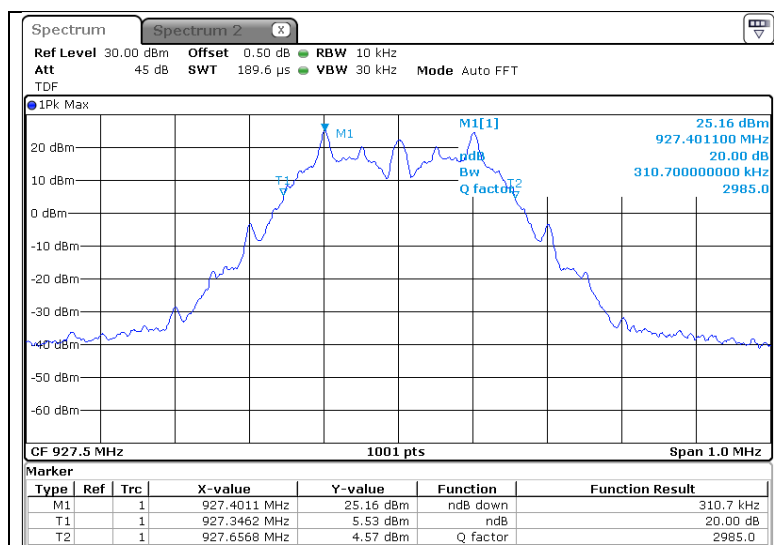

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR16-SRF0024

Page (25) of (67)


KCTL

- Half mode (Occupied Bandwidth)

Lowest Channel (902.6 MHz)

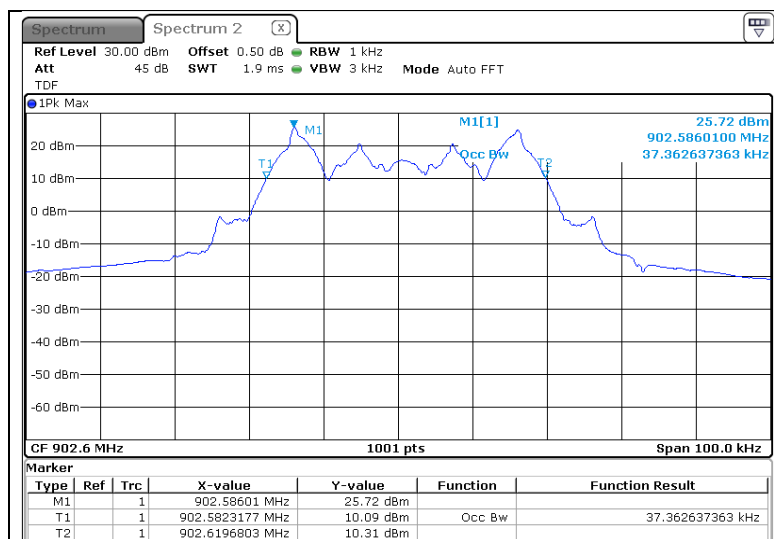

Middle Channel (915.0 MHz)

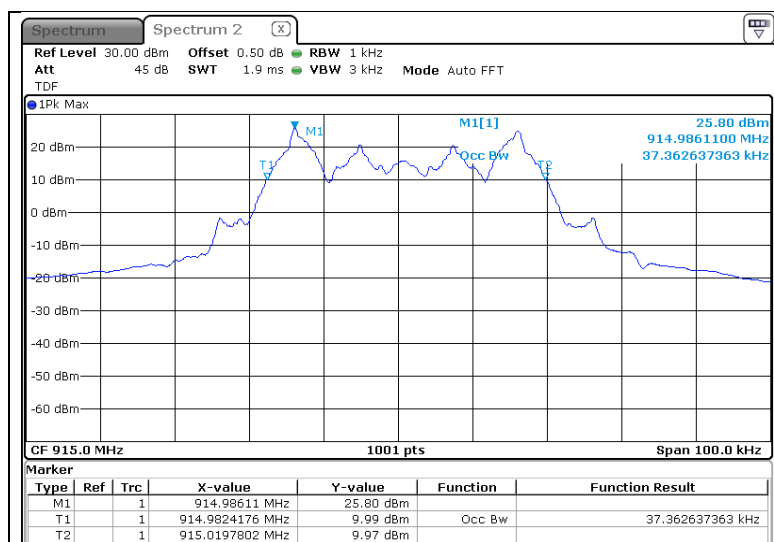


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR16-SRF0024
Page (26) of (67)



Highest Channel (927.5 MHz)

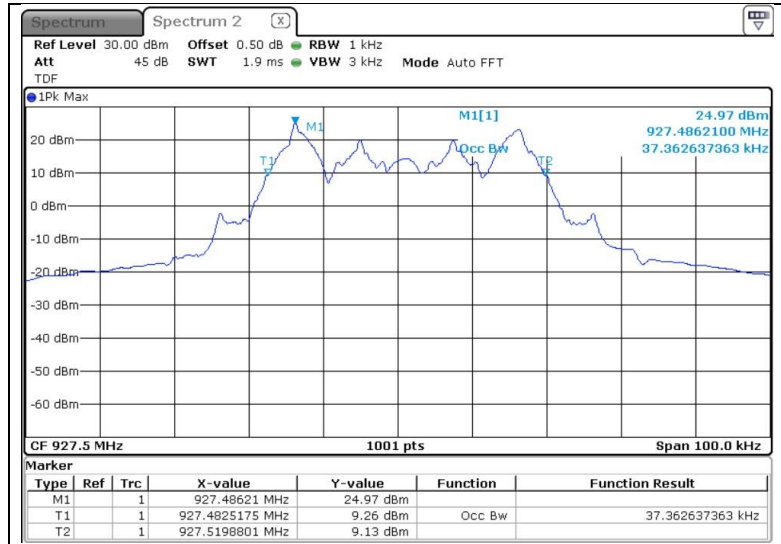

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR16-SRF0024

Page (27) of (67)


KCTL

- Hi-fi mode (Occupied Bandwidth)

Lowest Channel (903.0 MHz)

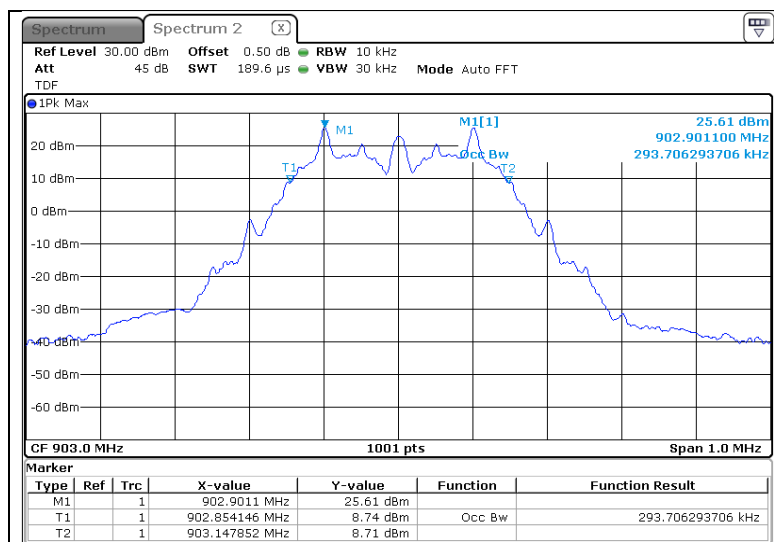

Middle Channel (915.0 MHz)

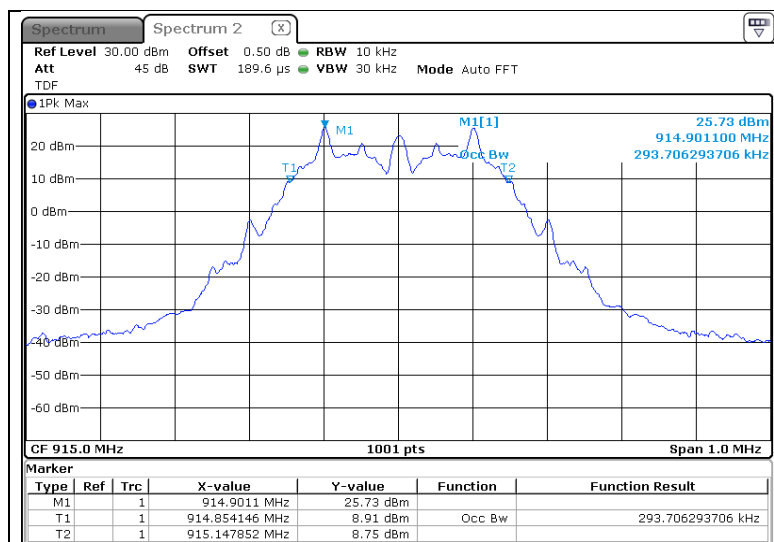


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR16-SRF0024
Page (28) of (67)



Highest Channel (927.5 MHz)

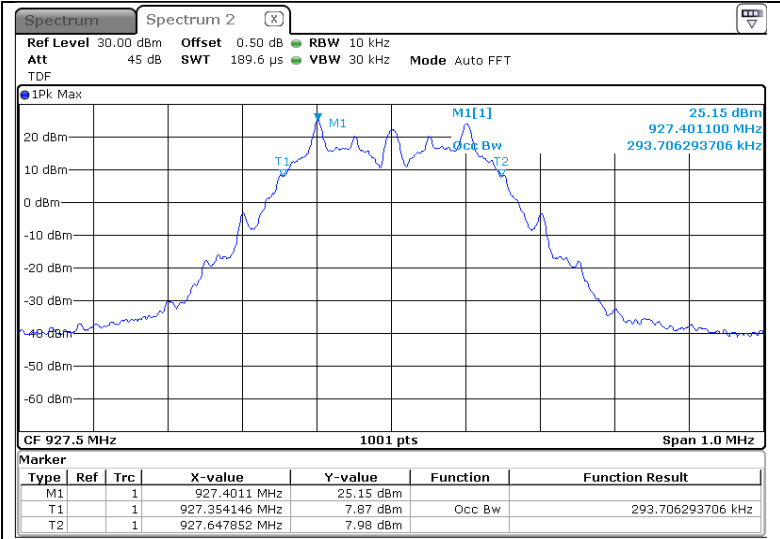

5.5 Number of Hopping Channels

5.5.1 Regulation

According to §15.247(a)(1)(i), For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz. According to §15.247(b)(2), For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

5.5.2 Measurement Procedure

The method of measurement used to test this FHSS device is ANSI C63.10-2013.

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies.

Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of Hopping channels. A plot of the data shall be included in the test report.

5.5.3 Test Result

- Complied

| Mode | Hopping Group | Frequency | Number of hopping channel | Limit |
|------------|---------------|-----------------------|---------------------------|-------|
| Half mode | (1) | 902.6 MHz – 927.5 MHz | 50 | ≥50 |
| | (2) | | 50 | ≥50 |
| | (3) | | 50 | ≥50 |
| | (4) | | 50 | ≥50 |
| | (5) | | 50 | ≥50 |
| Hi-fi mode | (5) | 903.0 MHz – 927.5 MHz | 50 | ≥25 |

NOTE:


1. We took the insertion loss of the cable loss into consideration within the measuring instrument.

5.5.4 Test Plot


Figure 4. Plot of the Number of Hopping Channels (Conducted)

- Half mode

Hopping Group (1)

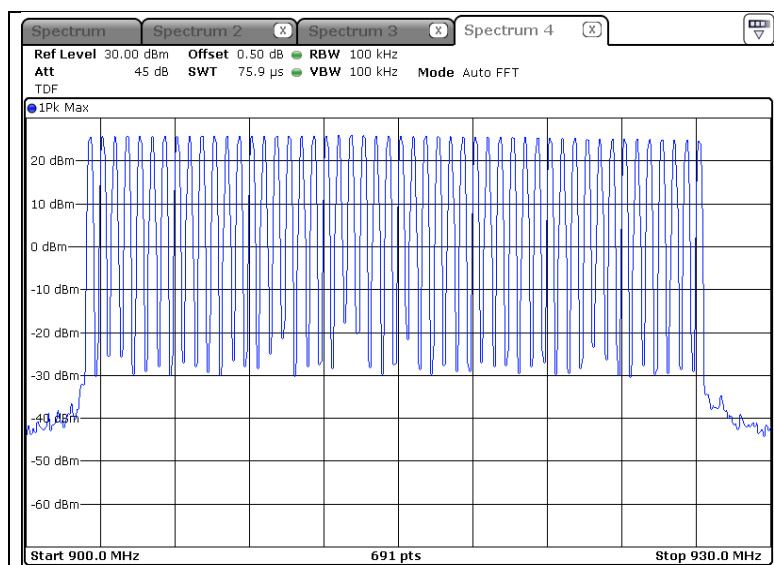

Hopping Group (2)

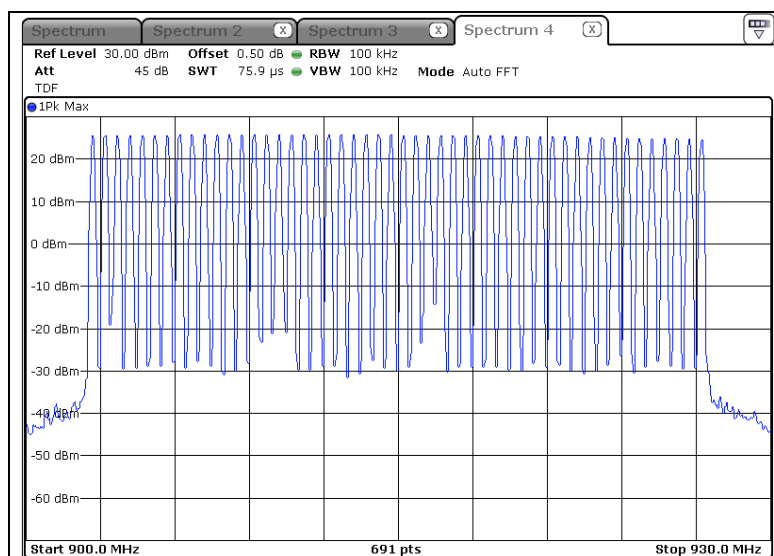


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR16-SRF0024
Page (32) of (67)



Hopping Group (3)

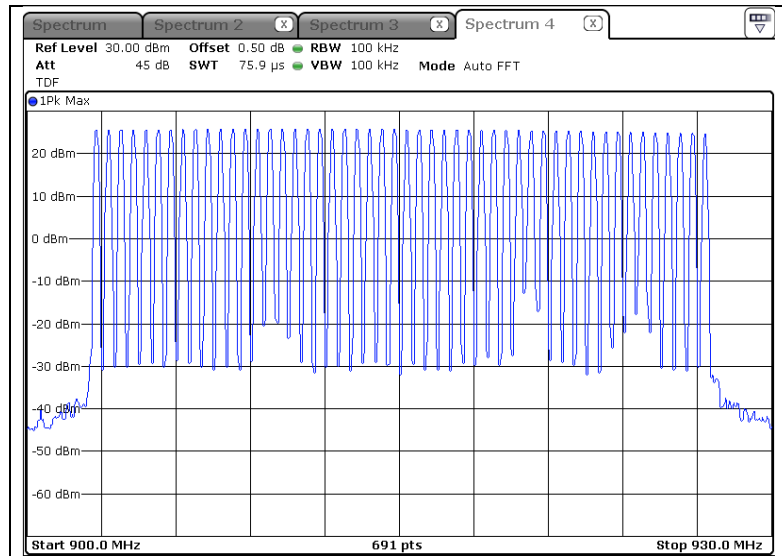

Hopping Group (4)

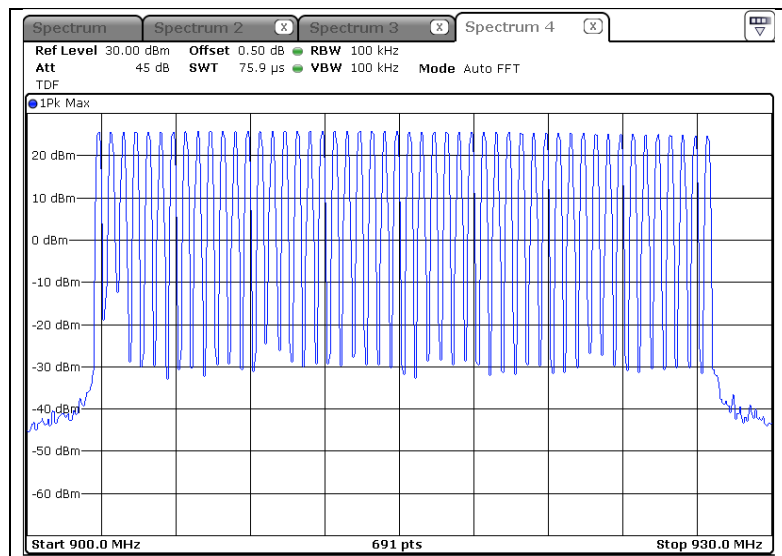


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR16-SRF0024
Page (33) of (67)


KCTL

Hopping Group (5)

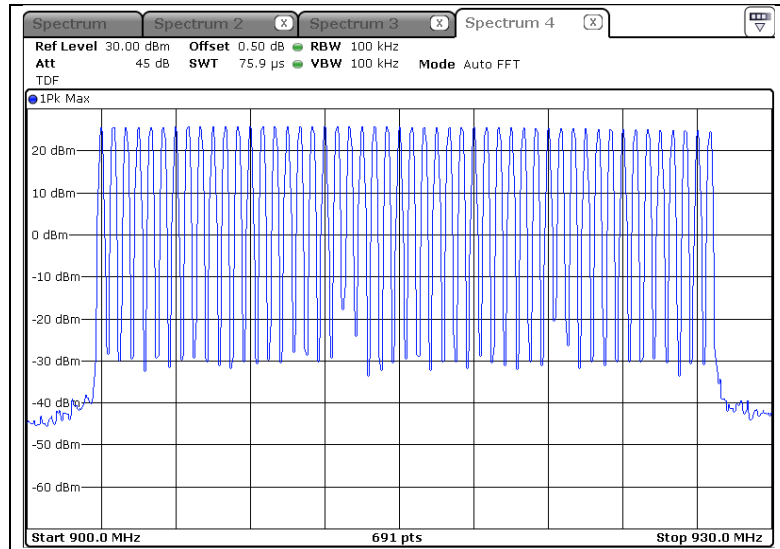

- Hi-fi mode

Hopping Group (5)

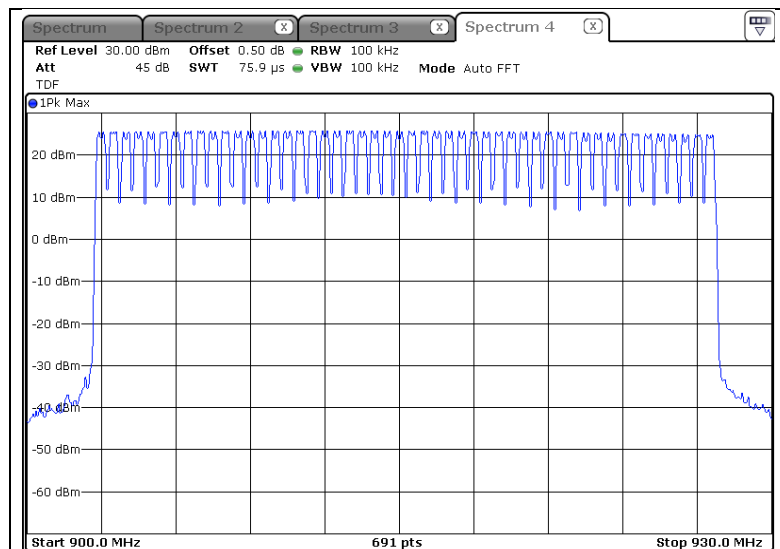

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR16-SRF0024
Page (34) of (67)

KCTL


Figure 5. Plot of each individual hopping frequency sequence. (Conducted)

- Half mode

Hopping Group (1)

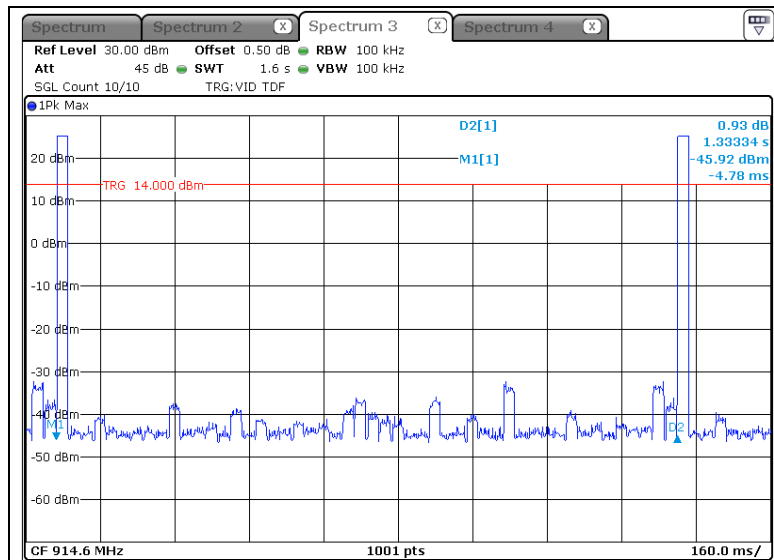

Hopping Group (2)

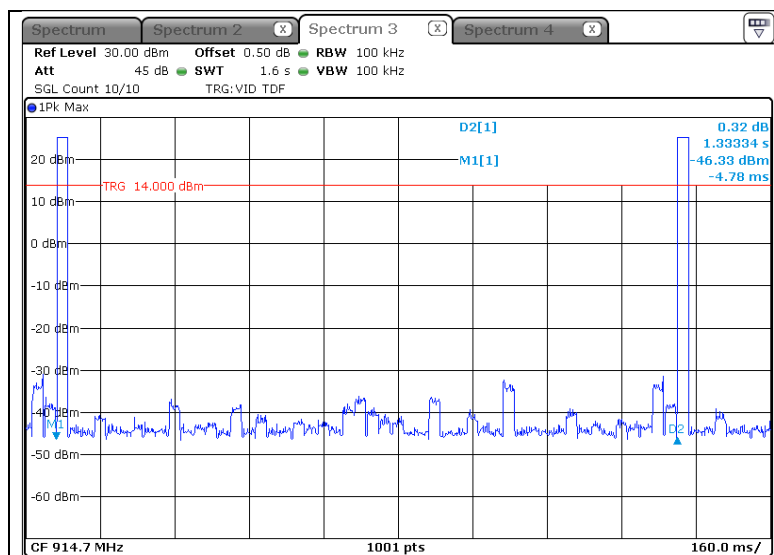


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR16-SRF0024
Page (35) of (67)

KCTL

Hopping Group (3)

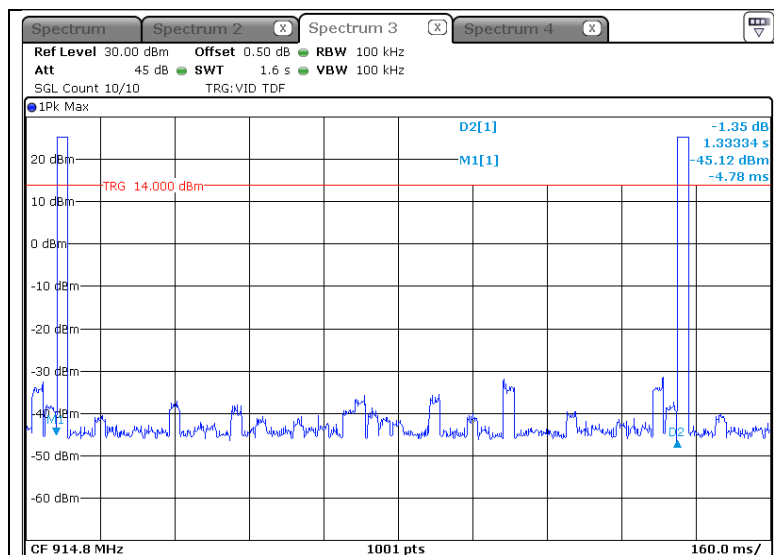

Hopping Group (4)

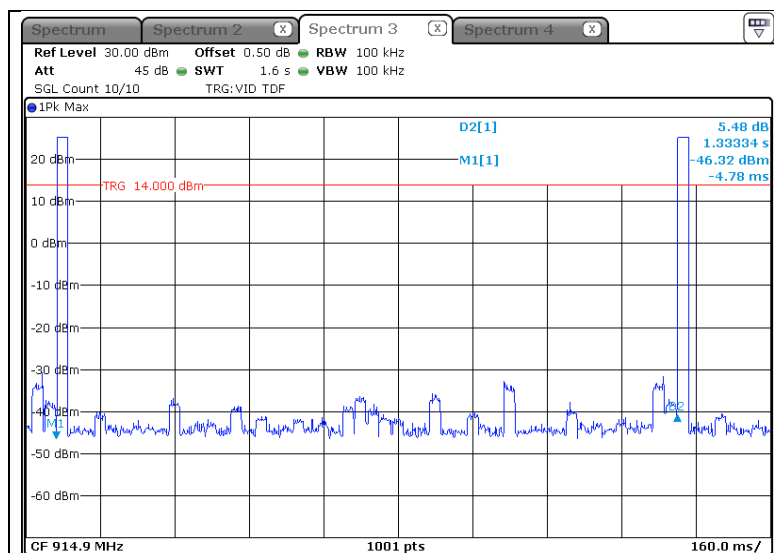

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR16-SRF0024

Page (36) of (67)


KCTL

Hopping Group (5)

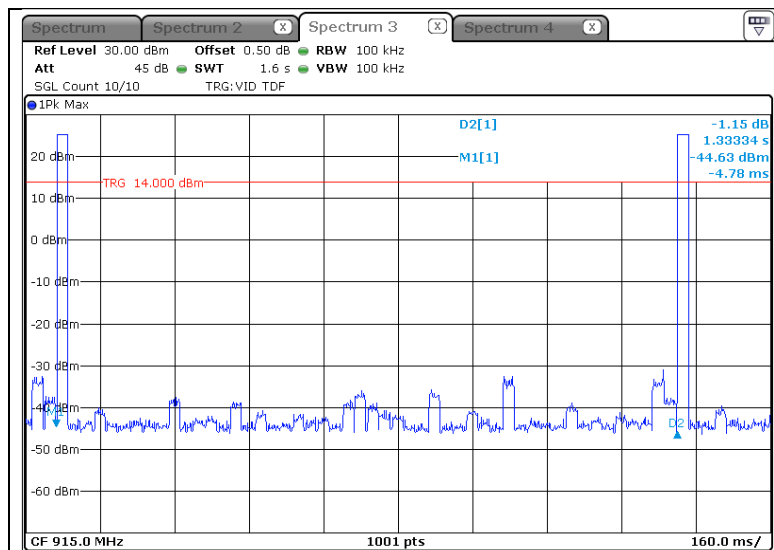

- Hi-fi mode

Hopping Group (5)

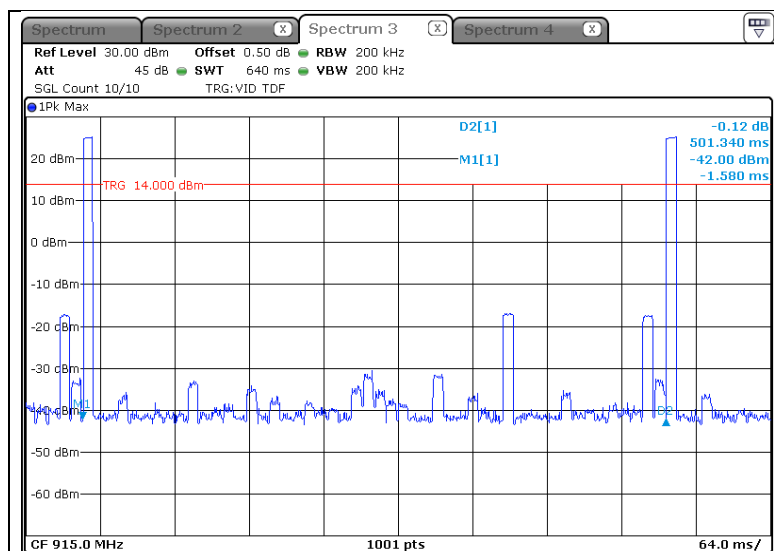

5.6 Time of Occupancy(Dwell Time)

5.6.1 Regulation

According to §15.247(a)(1)(i), for frequency hopping systems operating in the 902-928 MHz band:

If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

5.6.2 Measurement Procedure

The method of measurement used to test this FHSS device is ANSI C63.10-2013.

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Zero span, centered on a hopping channel.
- b) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
- c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d) Detector function: Peak.
- e) Trace: Max hold.

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

$$\begin{aligned}
 &(\text{Number of hops in the period specified in the requirements}) = \\
 &(\text{number of hops on spectrum analyzer}) \times (\text{period specified in the requirements} / \text{analyzer} \\
 &\text{sweep time})
 \end{aligned}$$

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

The measured transmit time and time between hops shall be consistent with the values described in the operational description for the EUT.

5.6.3 Test Result

- Complied

| Hopping mode | Hopping Group | Frequency [MHz] | Reading[ms] | Hopping rate [hop/s] | Number of Channels | Actual[s] | Limit[s] |
|--------------|---------------|-----------------|-------------|----------------------|--------------------|-----------|----------|
| Half mode | (1) | 914.6 | 22.145 | 37.500 | 50 | 0.332 | 0.40 |
| | (2) | 914.7 | 22.145 | 37.500 | 50 | 0.332 | 0.40 |
| | (3) | 914.8 | 22.145 | 37.500 | 50 | 0.332 | 0.40 |
| | (4) | 914.9 | 22.145 | 37.500 | 50 | 0.332 | 0.40 |
| | (5) | 915.0 | 22.145 | 37.500 | 50 | 0.332 | 0.40 |


| Hopping mode | Hopping Group | Frequency [MHz] | Reading[ms] | Hopping rate [hop/s] | Number of Channels | Actual[s] | Limit[s] |
|--------------|---------------|-----------------|-------------|----------------------|--------------------|-----------|----------|
| Hi-fi mode | (5) | 915.0 | 7.763 | 99.733 | 50 | 0.155 | 0.40 |

5.6.4 Test Plot


Figure 5. Plot of the Time of Occupancy (Conducted)

- Half mode

Hopping Group(1) (914.6 MHz)

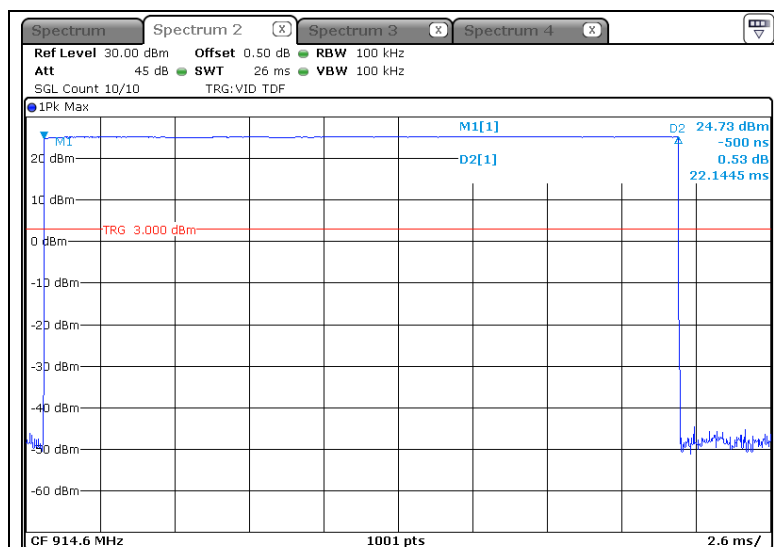

Hopping Group(2) (914.7 MHz)

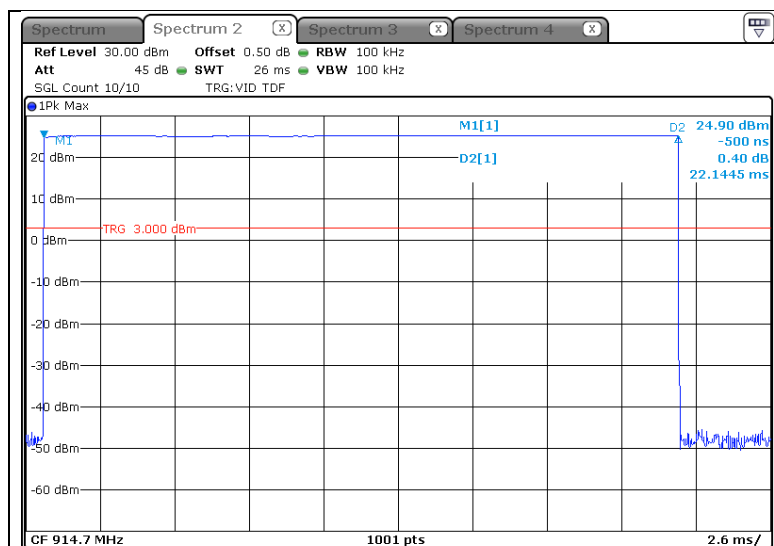

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR16-SRF0024


Page (41) of (67)

KCTL

Hopping Group(3) (914.8 MHz)

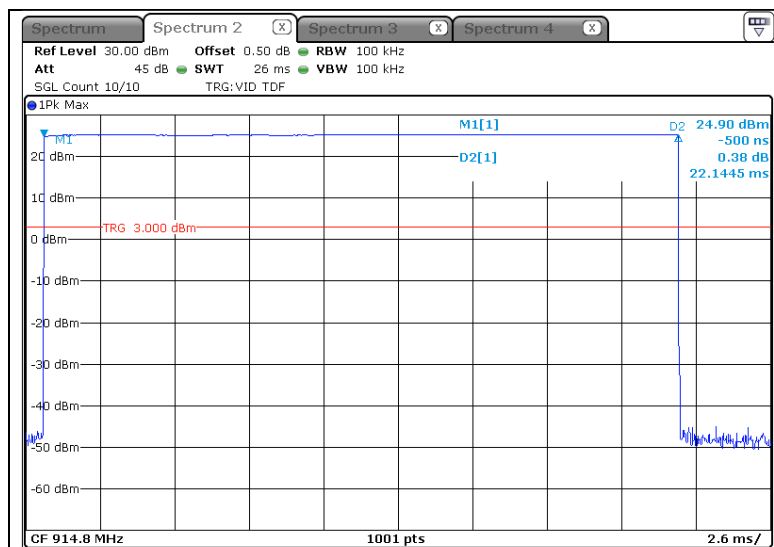

Hopping Group(4) (914.9 MHz)

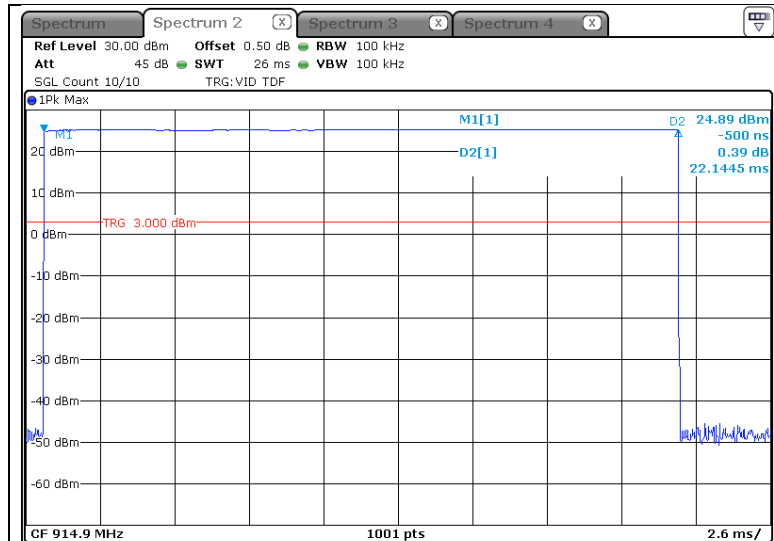

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR16-SRF0024

Page (42) of (67)


KCTL

Hopping Group(5) (915.0 MHz)

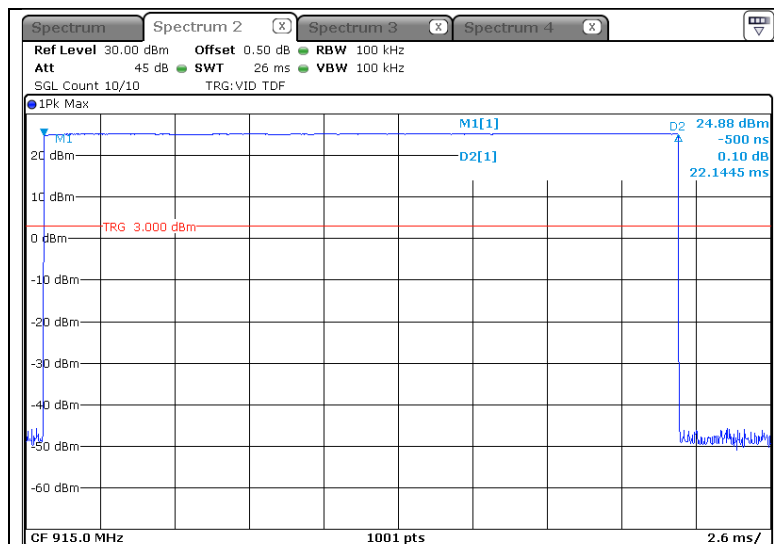

- Hi-fi mode

Hopping Group(5) (915.0 MHz)

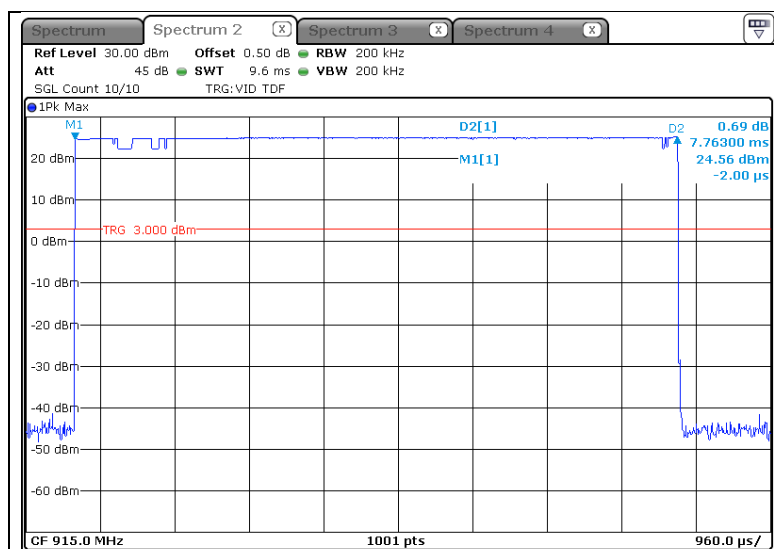

5.7 Spurious Emission, Band edge and Restricted bands

5.7.1 Regulation

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

According to §15.209(a), Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field strength ($\mu V/m$) | Measurement distance (m) |
|-----------------|------------------------------|--------------------------|
| 0.009 - 0.490 | 2 400/F(kHz) | 300 |
| 0.490 -1.705 | 24 000/F(kHz) | 30 |
| 1.705 – 30 | 30 | 30 |
| 30 - 88 | 100** | 3 |
| 88 - 216 | 150** | 3 |
| 216 - 960 | 200** | 3 |
| Above 960 | 500 | 3 |

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

According to § 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|---------------------|---------------------|-----------------|---------------|
| 0.009 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.52525 | 2690 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 156.7 - 156.9 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 162.0125 - 167.17 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 167.72 - 173.2 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 240 - 285 | 3600 - 4400 | Above 38.6 |
| 13.36 - 13.41 | 322 - 335.4 | | |

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

5.7.2 Measurement Procedure

The method of measurement used to test this FHSS device is ANSI C63.10-2013.

1) Band-edge Compliance of RF Conducted Emissions

These procedures are applicable for determining compliance at authorized-band band-edges where the requirements are expressed as a value relative to the in-band signal level. Procedures for determining compliance with field strength limits at or close to the band-edges are given in 6.10.6 (see also Table A.2).

Band-edge tests are typically performed as a conducted test but may be performed as radiated measurements on a test site meeting the specifications in 5.2, at the measurement distances specified in 5.3. The instrumentation shall meet the requirements in 4.1.1 using the bandwidths and detectors Specified in 4.1.4.2.

When performing radiated measurements, the measurement antenna(s) shall meet the specifications in 4.3. The EUT shall be connected to an antenna and operated at the highest power settings following procedures in 6.3.

For other than frequency-hopping devices, this test sequence shall be performed once. For devices that support frequency hopping, this test sequence shall be performed twice: once with the hopping function turned OFF and then repeated with the hopping function turned ON. The purpose of the test with the hopping function turned on is to confirm that the RF power remains OFF while the device is changing frequencies, and that the oscillator stabilizes at the new frequency before RF power is turned back ON.

Overshoot of any oscillator, including phase-lock-loop stabilized oscillators, can cause the device to be temporarily tuned to frequencies outside the authorized band, and it is important that no transmissions occur during such temporary periods. Particular attention to the hopping sequence requirements specified below is needed in the case of adaptive frequency-hopping devices:

- a) Connect the EMI receiver or spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described in step e) (be sure to enter all losses between the unlicensed wireless device output and the spectrum analyzer).
- b) Set the EUT to the lowest frequency channel (for the hopping on test, the hopping sequence shall include the lowest frequency channel).
- c) Set the EUT to operate at maximum output power and 100% duty cycle, or equivalent "normal mode of operation" as specified in 6.10.3.
- d) If using the radiated method, then use the applicable procedure(s) of 6.4, 6.5, or 6.6, and orient the EUT and measurement antenna positions to produce the highest emission level.
- e) Perform the test as follows:
 - 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.
 - 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
 - 3) Attenuation: Auto (at least 10 dB preferred).
 - 4) Sweep time: Coupled.
 - 5) Resolution bandwidth: 100 kHz.
 - 6) Video bandwidth: 300 kHz.
 - 7) Detector: Peak.
 - 8) Trace: Max hold.

- f) Allow the trace to stabilize. For the test with the hopping function turned ON, this can take several minutes to achieve a reasonable probability of intercepting any emissions due to oscillator overshoot.
- g) Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.
- h) Repeat step c) through step e) for every applicable modulation.
- i) Set the EUT to the highest frequency channel (for the hopping on test, the hopping sequence shall include the highest frequency channel) and repeat step c) through step d).
- j) The band-edge measurement shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

2) Spurious RF Conducted Emissions:

Conducted spurious emissions shall be measured for the transmit frequency, per 5.5 and 5.6, and at the maximum transmit powers.

Connect the primary antenna port through an attenuator to the spectrum analyzer input; in the results, account for all losses between the unlicensed wireless device output and the spectrum analyzer.

The instrument shall span 30 MHz to 10 times the operating frequency in GHz, with a resolution bandwidth of 100 kHz, video bandwidth of 300 kHz, and a coupled sweep time with a peak detector. The band 30 MHz to the highest frequency may be split into smaller spans, as long as the entire spectrum is covered.

3) Spurious Radiated Emissions:

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an semi-anechoic chamber at a distance of 3 meters.
2. The EUT was placed on the top of the 0.8-meter height, 1 × 1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.
3. The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 9 kHz to 30 MHz using the loop antenna, and from 30 to 1000 MHz using the Bi-Log antenna, and from 1000 MHz to 10000 MHz using the horn antenna.
4. To obtain the final measurement data, the EUT was arranged on a turntable situated on a 4 × 4 meter in an semi-anechoic chamber. The EUT was tested at a distance 3 meters.
5. Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.
6. The 0.8m height is for below 1 G testing, and 1.5m is for above 1G testing.

- Procedure for unwanted emissions measurements below 1000 MHz

The procedure for unwanted emissions measurements below 1000 MHz is as follows:

- a) Follow the requirements in 12.7.4.
- b) Compliance shall be determined using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

- Procedure for peak unwanted emissions measurements above 1000 MHz

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

- a) Follow the requirements in 12.7.4.
- b) Peak emission levels are measured by setting the instrument as follows:
 - 1) RBW = 1 MHz.
 - 2) VBW $\geq [3 \quad \text{RBW}]$.
 - 3) Detector = peak.
 - 4) Sweep time = auto.
 - 5) Trace mode = max hold.
 - 6) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, then the time required for the trace to stabilize will increase by a factor of approximately $1 / D$, where D is the duty cycle. For example, at 50% duty cycle, the measurement time will increase by a factor of two, relative to measurement time for continuous transmission.

- Procedures for average unwanted emissions measurements above 1000 MHz

Method VB-A is averaging using reduced video bandwidth. The procedure for this method is as follows:

- a) RBW = 1 MHz.
- b) Video bandwidth:
 - 1) If the EUT is configured to transmit with $D \geq 98\%$, then set $\text{VBW} \leq \text{RBW} / 100$ (i.e., 10 kHz), but not less than 10 Hz.
 - 2) If the EUT D is $< 98\%$, then set $\text{VBW} \geq 1 / T$, where T is defined in item a1) of 12.2.
- c) Video bandwidth mode or display mode:
 - 1) The instrument shall be set with video filtering applied in the power domain. Typically, this requires setting the detector mode to RMS (power averaging) and setting the average-VBW type to power (rms).
 - 2) As an alternative, the instrument may be set to linear detector mode. Video filtering shall be applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode to accomplish this. Others have a setting for average-VBW type, which can be set to "voltage" regardless of the display mode.
- d) Detector = peak.
- e) Sweep time = auto.
- f) Trace mode = max hold.
- g) Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where D is the duty cycle. For example, use at least 200 traces if the duty cycle is 25%. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 50 traces should be averaged.)

5.7.3 Test Result

- Complied

1. Band edge compliance of RF Conducted Emissions was shown in figure 6.
2. Measured value of the Field strength of spurious Emissions (Radiated)
3. It tested x,y and z – 3 axis each, mentioned only worst case data at this report.

- 9 kHz ~ 30 MHz data (Worst-case: Hi-fi mode)

Hi-fi mode_Highest Channel (927.5 MHz)

| Frequency [MHz] | Receiver Bandwidth [kHz] | Pol. [V/H] | Reading [dB(μV)] | Cable Loss [dB] | Amp Gain [dB] | Antenna Factor [dB] | Factor [dB] | Result [dB(μV/m)] | Limit [dB(μV/m)] | Margin [dB] |
|--|--------------------------------|---------------|---------------------|-----------------------|---------------------|---------------------------|----------------|----------------------|---------------------|----------------|
| Quasi-Peak DATA. Emissions below 30 MHz | | | | | | | | | | |
| 4.56 | 9 | H | 45.60 | 0.14 | -32.53 | 19.69 | -12.70 | 32.90 | 69.50 | 36.60 |
| 24.35 | 9 | V | 38.70 | 1.62 | -32.53 | 19.21 | -11.70 | 27.00 | 69.50 | 42.50 |
| Above 25.00 | Not Detected | - | - | - | - | - | - | - | - | - |

NOTE 1. Factor = Cable loss + Amp gain + Antenna factor

- 30 MHz ~ 1 GHz data

Half mode_Lowest Channel (902.6 MHz)

| Frequency [MHz] | Receiver Bandwidth [kHz] | Pol. [V/H] | Reading [dB(μV)] | Cable Loss [dB] | Amp Gain [dB] | Antenna Factor [dB] | Factor [dB] | Result [dB(μV/m)] | Limit [dB(μV/m)] | Margin [dB] |
|---|--------------------------------|---------------|---------------------|-----------------------|---------------------|---------------------------|----------------|----------------------|---------------------|----------------|
| Quasi-Peak DATA. Emissions below 1 GHz | | | | | | | | | | |
| 44.31 | 120 | V | 23.00 | 1.57 | -32.52 | 14.25 | -16.70 | 6.30 | 40.00 | 33.70 |
| 302.21 | 120 | V | 21.60 | 3.78 | -32.53 | 13.65 | -15.10 | 6.50 | 46.00 | 39.50 |
| 734.34 | 120 | H | 33.50 | 6.17 | -32.78 | 20.01 | -6.60 | 26.90 | 46.00 | 19.10 |
| 992.00 ¹⁾ | 120 | H | 20.10 | 7.46 | -31.23 | 22.57 | -1.20 | 18.90 | 54.00 | 35.10 |
| Above 993.00 | Not Detected | - | - | - | - | - | - | - | - | - |

NOTE 1. Factor = Cable loss + Amp gain + Antenna factor

¹⁾ Restricted band

Half mode_Middle Channel (915.0 MHz)

| Frequency [MHz] | Receiver Bandwidth [kHz] | Pol. [V/H] | Reading [dB(μV)] | Cable Loss [dB] | Amp Gain [dB] | Antenna Factor [dB] | Factor [dB] | Result [dB(μV/m)] | Limit [dB(μV/m)] | Margin [dB] |
|---|--------------------------------|---------------|---------------------|-----------------------|---------------------|---------------------------|----------------|----------------------|---------------------|----------------|
| Quasi-Peak DATA. Emissions below 1 GHz | | | | | | | | | | |
| 54.01 | 120 | V | 24.90 | 1.87 | -32.51 | 13.84 | -16.80 | 8.10 | 40.00 | 31.90 |
| 327.31 | 120 | H | 21.20 | 3.95 | -32.55 | 14.20 | -14.40 | 6.80 | 46.00 | 39.20 |
| 731.43 | 120 | H | 33.60 | 6.11 | -32.79 | 19.98 | -6.70 | 26.90 | 46.00 | 19.10 |
| 978.42 ¹⁾ | 120 | V | 19.90 | 7.44 | -31.35 | 22.51 | -1.40 | 18.50 | 54.00 | 35.50 |
| Above 980.00 | Not Detected | - | - | - | - | - | - | - | - | - |

NOTE 1. Factor = Cable loss + Amp gain + Antenna factor

¹⁾ Restricted band

Half mode_Highest Channel (927.5 MHz)

| Frequency [MHz] | Receiver Bandwidth [kHz] | Pol. [V/H] | Reading [dB(μV)] | Cable Loss [dB] | Amp Gain [dB] | Antenna Factor [dB] | Factor [dB] | Result [dB(μV/m)] | Limit [dB(μV/m)] | Margin [dB] |
|---|--------------------------------|---------------|---------------------|-----------------------|---------------------|---------------------------|----------------|----------------------|---------------------|----------------|
| Quasi-Peak DATA. Emissions below 1 GHz | | | | | | | | | | |
| 54.74 | 120 | V | 25.80 | 1.97 | -32.51 | 13.74 | -16.80 | 9.00 | 40.00 | 31.00 |
| 470.38 | 120 | H | 21.70 | 4.91 | -32.70 | 16.79 | -11.00 | 10.70 | 46.00 | 35.30 |
| 722.58 | 120 | H | 33.40 | 6.14 | -32.81 | 19.87 | -6.80 | 26.60 | 46.00 | 19.40 |
| 980.96 ¹⁾ | 120 | H | 20.00 | 7.41 | -31.33 | 22.52 | -1.40 | 18.60 | 54.00 | 35.40 |
| Above 990.00 | Not Detected | - | - | - | - | - | - | - | - | - |

NOTE 1. Factor = Cable loss + Amp gain + Antenna factor

¹⁾ Restricted band

Hi-fi mode_Lowest Channel (903.0 MHz)

| Frequency [MHz] | Receiver Bandwidth [kHz] | Pol. [V/H] | Reading [dB(μV)] | Cable Loss [dB] | Amp Gain [dB] | Antenna Factor [dB] | Factor [dB] | Result [dB(μV/m)] | Limit [dB(μV/m)] | Margin [dB] |
|---|--------------------------------|---------------|---------------------|-----------------------|---------------------|---------------------------|----------------|----------------------|---------------------|----------------|
| Quasi-Peak DATA. Emissions below 1 GHz | | | | | | | | | | |
| 54.86 | 120 | V | 23.30 | 1.89 | -32.51 | 13.72 | -16.90 | 6.40 | 40.00 | 33.60 |
| 354.71 | 120 | H | 21.70 | 4.28 | -32.58 | 14.80 | -13.50 | 8.20 | 46.00 | 37.80 |
| 717.25 | 120 | H | 33.50 | 6.11 | -32.82 | 19.81 | -6.90 | 26.60 | 46.00 | 19.40 |
| 987.39 ¹⁾ | 120 | V | 20.10 | 7.42 | -31.27 | 22.55 | -1.30 | 18.80 | 54.00 | 35.20 |
| Above 990.00 | Not Detected | - | - | - | - | - | - | - | - | - |

NOTE 1. Factor = Cable loss + Amp gain + Antenna factor

¹⁾ Restricted band

Hi-fi mode_Middle Channel (915.0 MHz)

| Frequency [MHz] | Receiver Bandwidth [kHz] | Pol. [V/H] | Reading [dB(μV)] | Cable Loss [dB] | Amp Gain [dB] | Antenna Factor [dB] | Factor [dB] | Result [dB(μV/m)] | Limit [dB(μV/m)] | Margin [dB] |
|---|--------------------------------|---------------|---------------------|-----------------------|---------------------|---------------------------|----------------|----------------------|---------------------|----------------|
| Quasi-Peak DATA. Emissions below 1 GHz | | | | | | | | | | |
| 57.52 | 120 | H | 22.70 | 1.86 | -32.51 | 13.35 | -17.30 | 5.40 | 40.00 | 34.60 |
| 336.04 | 120 | H | 22.40 | 4.07 | -32.56 | 14.39 | -14.10 | 8.30 | 46.00 | 37.70 |
| 725.01 | 120 | H | 33.40 | 6.10 | -32.80 | 19.90 | -6.80 | 26.60 | 46.00 | 19.40 |
| 979.87 ¹⁾ | 120 | H | 21.00 | 7.42 | -31.34 | 22.52 | -1.40 | 19.60 | 54.00 | 34.40 |
| Above 980.00 | Not Detected | - | - | - | - | - | - | - | - | - |

NOTE 1. Factor = Cable loss + Amp gain + Antenna factor

Hi-fi mode_Highest Channel (927.5 MHz)

| Frequency [MHz] | Receiver Bandwidth [kHz] | Pol. [V/H] | Reading [dB(μV)] | Cable Loss [dB] | Amp Gain [dB] | Antenna Factor [dB] | Factor [dB] | Result [dB(μV/m)] | Limit [dB(μV/m)] | Margin [dB] |
|---|--------------------------------|---------------|---------------------|-----------------------|---------------------|---------------------------|----------------|----------------------|---------------------|----------------|
| Quasi-Peak DATA. Emissions below 1 GHz | | | | | | | | | | |
| 53.64 | 120 | V | 29.10 | 1.92 | -32.51 | 13.89 | -16.70 | 12.40 | 40.00 | 27.60 |
| 201.81 | 120 | H | 22.10 | 3.33 | -32.49 | 11.26 | -17.90 | 4.20 | 43.50 | 39.30 |
| 507.12 | 120 | V | 21.50 | 5.20 | -32.75 | 17.35 | -10.20 | 11.30 | 46.00 | 34.70 |
| 981.93 ¹⁾ | 120 | H | 19.80 | 7.39 | -31.32 | 22.53 | -1.40 | 18.40 | 54.00 | 35.60 |
| Above 990.00 | Not Detected | - | - | - | - | - | - | - | - | - |

NOTE 1. Factor = Cable loss + Amp gain + Antenna factor

¹⁾ Restricted band

- 1 GHz ~ 10 GHz data

Half mode_Lowest channel (902.6 MHz)

| Frequency [MHz] | Receiver Bandwidth [kHz] | Pol. [V/H] | Reading [dB(μV)] | Cable Loss [dB] | Amp Gain [dB] | Antenna Factor [dB] | Factor [dB] | Result [dB(μV/m)] | Limit [dB(μV/m)] | Margin [dB] |
|--|--------------------------------|---------------|---------------------|-----------------------|---------------------|---------------------------|----------------|----------------------|---------------------|----------------|
| Peak DATA. Emissions above 1 GHz | | | | | | | | | | |
| 1 804.38 ¹⁾ | 1 000 | V | 70.90 | 4.36 | -63.60 | 30.44 | -28.80 | 42.10 | 74.00 | 31.90 |
| 3 417.63 | 1 000 | H | 64.00 | 5.12 | -61.49 | 32.57 | -23.80 | 40.20 | 74.00 | 33.80 |
| 4 961.13 | 1 000 | V | 62.70 | 6.26 | -62.24 | 35.18 | -20.80 | 41.90 | 74.00 | 32.10 |
| 6 317.88 ¹⁾ | 1 000 | H | 65.50 | 7.27 | -62.42 | 35.45 | -19.70 | 45.80 | 74.00 | 28.20 |
| 7 221.25 ¹⁾ | 1 000 | H | 66.40 | 7.68 | -62.19 | 35.81 | -18.70 | 47.70 | 74.00 | 26.30 |
| 8 706.25 | 1 000 | V | 61.60 | 7.92 | -61.39 | 35.87 | -17.60 | 44.00 | 74.00 | 30.00 |
| Above 9 000.00 | Not Detected | - | - | - | - | - | - | - | - | - |
| Average DATA. Emissions above 1 GHz | | | | | | | | | | |
| 1 804.38 ¹⁾ | 1 000 | V | 66.70 | 4.36 | -63.60 | 30.44 | -28.80 | 37.90 | 54.00 | 16.10 |
| 3 417.63 | 1 000 | H | 49.10 | 5.12 | -61.49 | 32.57 | -23.80 | 25.30 | 54.00 | 28.70 |
| 4 961.13 | 1 000 | V | 49.00 | 6.26 | -62.24 | 35.18 | -20.80 | 28.20 | 54.00 | 25.80 |
| 6 317.88 ¹⁾ | 1 000 | H | 57.80 | 7.27 | -62.42 | 35.45 | -19.70 | 38.10 | 54.00 | 15.90 |
| 7 221.25 ¹⁾ | 1 000 | H | 62.90 | 7.68 | -62.19 | 35.81 | -18.70 | 44.20 | 54.00 | 9.80 |
| 8 706.25 | 1 000 | V | 47.50 | 7.92 | -61.39 | 35.87 | -17.60 | 29.90 | 54.00 | 24.10 |
| Above 9 000.00 | Not Detected | - | - | - | - | - | - | - | - | - |

NOTE 1. Factor = Cable loss + Amp gain + Antenna factor

¹⁾ Harmonic components

Half mode_Middle channel (915.0 MHz)

| Frequency [MHz] | Receiver Bandwidth [kHz] | Pol. [V/H] | Reading [dB(μV)] | Cable Loss [dB] | Amp Gain [dB] | Antenna Factor [dB] | Factor [dB] | Result [dB(μV/m)] | Limit [dB(μV/m)] | Margin [dB] |
|--|--------------------------------|---------------|---------------------|-----------------------|---------------------|---------------------------|----------------|----------------------|---------------------|----------------|
| Peak DATA. Emissions above 1 GHz | | | | | | | | | | |
| 1 830.25 ¹⁾ | 1 000 | V | 70.20 | 4.36 | -63.46 | 30.50 | -28.60 | 41.60 | 74.00 | 32.40 |
| 3 247.75 | 1 000 | V | 64.00 | 5.08 | -61.93 | 32.55 | -24.30 | 39.70 | 74.00 | 34.30 |
| 4 169.13 | 1 000 | H | 63.50 | 5.43 | -62.31 | 33.08 | -23.80 | 39.70 | 74.00 | 34.30 |
| 6 405.63 ¹⁾ | 1 000 | H | 62.30 | 7.33 | -62.41 | 35.48 | -19.60 | 42.70 | 74.00 | 31.30 |
| 7 320.25 ¹⁾ | 1 000 | H | 67.00 | 7.66 | -62.22 | 35.86 | -18.70 | 48.30 | 74.00 | 25.70 |
| 9 401.50 | 1 000 | V | 60.70 | 8.39 | -62.25 | 36.26 | -17.60 | 43.10 | 74.00 | 30.90 |
| Above 9 500.00 | Not Detected | - | - | - | - | - | - | - | - | - |
| Average DATA. Emissions above 1 GHz | | | | | | | | | | |
| 1 830.25 ¹⁾ | 1 000 | V | 67.10 | 4.36 | -63.46 | 30.50 | -28.60 | 38.50 | 54.00 | 15.50 |
| 3 247.75 | 1 000 | V | 50.00 | 5.08 | -61.93 | 32.55 | -24.30 | 25.70 | 54.00 | 28.30 |
| 4 169.13 | 1 000 | H | 49.50 | 5.43 | -62.31 | 33.08 | -23.80 | 25.70 | 54.00 | 28.30 |
| 6 405.63 ¹⁾ | 1 000 | H | 56.10 | 7.33 | -62.41 | 35.48 | -19.60 | 36.50 | 54.00 | 17.50 |
| 7 320.25 ¹⁾ | 1 000 | H | 63.60 | 7.66 | -62.22 | 35.86 | -18.70 | 44.90 | 54.00 | 9.10 |
| 9 401.50 | 1 000 | V | 47.50 | 8.39 | -62.25 | 36.26 | -17.60 | 29.90 | 54.00 | 24.10 |
| Above 9 500.00 | Not Detected | - | - | - | - | - | - | - | - | - |

NOTE 1. Factor = Cable loss + Amp gain + Antenna factor

¹⁾ Harmonic components

Half mode_Highest channel (927.5 MHz)

| Frequency [MHz] | Receiver Bandwidth [kHz] | Pol. [V/H] | Reading [dB(μV)] | Cable Loss [dB] | Amp Gain [dB] | Antenna Factor [dB] | Factor [dB] | Result [dB(μV/m)] | Limit [dB(μV/m)] | Margin [dB] |
|--|--------------------------------|---------------|---------------------|-----------------------|---------------------|---------------------------|----------------|----------------------|---------------------|----------------|
| Peak DATA. Emissions above 1 GHz | | | | | | | | | | |
| 1 855.00 ¹⁾ | 1 000 | V | 70.20 | 4.36 | -63.32 | 30.56 | -28.40 | 41.80 | 74.00 | 32.20 |
| 3 362.50 | 1 000 | H | 63.60 | 5.11 | -61.57 | 32.56 | -23.90 | 39.70 | 74.00 | 34.30 |
| 4 886.88 | 1 000 | V | 62.50 | 6.18 | -62.06 | 34.98 | -20.90 | 41.60 | 74.00 | 32.40 |
| 6 493.38 ¹⁾ | 1 000 | H | 62.10 | 7.39 | -62.40 | 35.51 | -19.50 | 42.60 | 74.00 | 31.40 |
| 7 420.38 ¹⁾ | 1 000 | H | 67.40 | 7.63 | -62.24 | 35.91 | -18.70 | 48.70 | 74.00 | 25.30 |
| 9 390.25 | 1 000 | V | 60.70 | 8.38 | -62.23 | 36.25 | -17.60 | 43.10 | 74.00 | 30.90 |
| Above 9 400.00 | Not Detected | - | - | - | - | - | - | - | - | - |
| Average DATA. Emissions above 1 GHz | | | | | | | | | | |
| 1 855.00 ¹⁾ | 1 000 | V | 67.70 | 4.36 | -63.32 | 30.56 | -28.40 | 39.30 | 54.00 | 14.70 |
| 3 362.50 | 1 000 | H | 49.50 | 5.11 | -61.57 | 32.56 | -23.90 | 25.60 | 54.00 | 28.40 |
| 4 886.88 | 1 000 | V | 49.00 | 6.18 | -62.06 | 34.98 | -20.90 | 28.10 | 54.00 | 25.90 |
| 6 493.38 ¹⁾ | 1 000 | H | 56.80 | 7.39 | -62.40 | 35.51 | -19.50 | 37.30 | 54.00 | 16.70 |
| 7 420.38 ¹⁾ | 1 000 | H | 63.80 | 7.63 | -62.24 | 35.91 | -18.70 | 45.10 | 54.00 | 8.90 |
| 9 390.25 | 1 000 | V | 47.50 | 8.38 | -62.23 | 36.25 | -17.60 | 29.90 | 54.00 | 24.10 |
| Above 9 400.00 | Not Detected | - | - | - | - | - | - | - | - | - |

NOTE 1. Factor = Cable loss + Amp gain + Antenna factor

¹⁾ Harmonic components

Hi-fi mode_Lowest channel (903.0 MHz)

| Frequency [MHz] | Receiver Bandwidth [kHz] | Pol. [V/H] | Reading [dB(μV)] | Cable Loss [dB] | Amp Gain [dB] | Antenna Factor [dB] | Factor [dB] | Result [dB(μV/m)] | Limit [dB(μV/m)] | Margin [dB] |
|--|--------------------------------|---------------|---------------------|-----------------------|---------------------|---------------------------|----------------|----------------------|---------------------|----------------|
| Peak DATA. Emissions above 1 GHz | | | | | | | | | | |
| 1 805.50 ¹⁾ | 1 000 | V | 70.20 | 4.36 | -63.60 | 30.44 | -28.80 | 41.40 | 74.00 | 32.60 |
| 3 268.00 | 1 000 | V | 63.80 | 5.09 | -61.94 | 32.55 | -24.30 | 39.50 | 74.00 | 34.50 |
| 5 005.00 | 1 000 | H | 63.40 | 6.30 | -62.38 | 35.28 | -20.80 | 42.60 | 74.00 | 31.40 |
| 6 321.25 ¹⁾ | 1 000 | H | 63.10 | 7.27 | -62.42 | 35.45 | -19.70 | 43.40 | 74.00 | 30.60 |
| 7 224.63 ¹⁾ | 1 000 | H | 65.60 | 7.68 | -62.19 | 35.81 | -18.70 | 46.90 | 74.00 | 27.10 |
| 9 312.63 | 1 000 | V | 62.10 | 8.33 | -62.17 | 36.14 | -17.70 | 44.40 | 74.00 | 29.60 |
| Above 9 400.00 | Not Detected | - | - | - | - | - | - | - | - | - |
| Average DATA. Emissions above 1 GHz | | | | | | | | | | |
| 1 805.50 ¹⁾ | 1 000 | V | 64.50 | 4.36 | -63.60 | 30.44 | -28.80 | 35.70 | 54.00 | 18.30 |
| 3 268.00 | 1 000 | V | 49.00 | 5.09 | -61.94 | 32.55 | -24.30 | 24.70 | 54.00 | 29.30 |
| 5 005.00 | 1 000 | H | 49.20 | 6.30 | -62.38 | 35.28 | -20.80 | 28.40 | 54.00 | 25.60 |
| 6 321.25 ¹⁾ | 1 000 | H | 52.80 | 7.27 | -62.42 | 35.45 | -19.70 | 33.10 | 54.00 | 20.90 |
| 7 224.63 ¹⁾ | 1 000 | H | 56.00 | 7.68 | -62.19 | 35.81 | -18.70 | 37.30 | 54.00 | 16.70 |
| 9 312.63 | 1 000 | V | 47.20 | 8.33 | -62.17 | 36.14 | -17.70 | 29.50 | 54.00 | 24.50 |
| Above 9 400.00 | Not Detected | - | - | - | - | - | - | - | - | - |

NOTE 1. Factor = Cable loss + Amp gain + Antenna factor

¹⁾ Harmonic components

Hi-fi mode_Middle channel (915.0 MHz)

| Frequency [MHz] | Receiver Bandwidth [kHz] | Pol. [V/H] | Reading [dB(μV)] | Cable Loss [dB] | Amp Gain [dB] | Antenna Factor [dB] | Factor [dB] | Result [dB(μV/m)] | Limit [dB(μV/m)] | Margin [dB] |
|--|--------------------------------|---------------|---------------------|-----------------------|---------------------|---------------------------|----------------|----------------------|---------------------|----------------|
| Peak DATA. Emissions above 1 GHz | | | | | | | | | | |
| 1 829.13 ¹⁾ | 1 000 | V | 70.20 | 4.36 | -63.46 | 30.50 | -28.60 | 41.60 | 74.00 | 32.40 |
| 3 233.13 | 1 000 | V | 63.60 | 5.08 | -61.93 | 32.55 | -24.30 | 39.30 | 74.00 | 34.70 |
| 4 908.25 | 1 000 | H | 62.80 | 6.20 | -62.04 | 35.04 | -20.80 | 42.00 | 74.00 | 32.00 |
| 6 404.50 ¹⁾ | 1 000 | H | 62.50 | 7.33 | -62.41 | 35.48 | -19.60 | 42.90 | 74.00 | 31.10 |
| 7 321.38 ¹⁾ | 1 000 | H | 67.20 | 7.66 | -62.22 | 35.86 | -18.70 | 48.50 | 74.00 | 25.50 |
| 8 872.75 | 1 000 | V | 61.20 | 8.02 | -61.51 | 35.79 | -17.70 | 43.50 | 74.00 | 30.50 |
| Above 9 000.00 | Not Detected | - | - | - | - | - | - | - | - | - |
| Average DATA. Emissions above 1 GHz | | | | | | | | | | |
| 1 829.13 ¹⁾ | 1 000 | V | 64.90 | 4.36 | -63.46 | 30.50 | -28.60 | 36.30 | 54.00 | 17.70 |
| 3 233.13 | 1 000 | V | 50.10 | 5.08 | -61.93 | 32.55 | -24.30 | 25.80 | 54.00 | 28.20 |
| 4 908.25 | 1 000 | H | 48.90 | 6.20 | -62.04 | 35.04 | -20.80 | 28.10 | 54.00 | 25.90 |
| 6 404.50 ¹⁾ | 1 000 | H | 51.70 | 7.33 | -62.41 | 35.48 | -19.60 | 32.10 | 54.00 | 21.90 |
| 7 321.38 ¹⁾ | 1 000 | H | 57.10 | 7.66 | -62.22 | 35.86 | -18.70 | 38.40 | 54.00 | 15.60 |
| 8 872.75 | 1 000 | V | 47.20 | 8.02 | -61.51 | 35.79 | -17.70 | 29.50 | 54.00 | 24.50 |
| Above 9 000.00 | Not Detected | - | - | - | - | - | - | - | - | - |

NOTE 1. Factor = Cable loss + Amp gain + Antenna factor

¹⁾ Harmonic components

Hi-fi mode_Highest channel (927.5 MHz)

| Frequency [MHz] | Receiver Bandwidth [kHz] | Pol. [V/H] | Reading [dB(μV)] | Cable Loss [dB] | Amp Gain [dB] | Antenna Factor [dB] | Factor [dB] | Result [dB(μV/m)] | Limit [dB(μV/m)] | Margin [dB] |
|--|--------------------------------|---------------|---------------------|-----------------------|---------------------|---------------------------|----------------|----------------------|---------------------|----------------|
| Peak DATA. Emissions above 1 GHz | | | | | | | | | | |
| 1 855.00 ¹⁾ | 1 000 | V | 69.90 | 4.36 | -63.32 | 30.56 | -28.40 | 41.50 | 74.00 | 32.50 |
| 4 016.13 | 1 000 | V | 64.40 | 5.27 | -62.34 | 32.67 | -24.40 | 40.00 | 74.00 | 34.00 |
| 5 070.25 | 1 000 | H | 62.50 | 6.35 | -62.33 | 35.28 | -20.70 | 41.80 | 74.00 | 32.20 |
| 6 493.38 ¹⁾ | 1 000 | H | 62.80 | 7.39 | -62.40 | 35.51 | -19.50 | 43.30 | 74.00 | 30.70 |
| 7 419.25 ¹⁾ | 1 000 | H | 67.80 | 7.63 | -62.24 | 35.91 | -18.70 | 49.10 | 74.00 | 24.90 |
| 8 999.88 | 1 000 | V | 61.40 | 8.10 | -61.53 | 35.73 | -17.70 | 43.70 | 74.00 | 30.30 |
| Above 9 000.00 | Not Detected | - | - | - | - | - | - | - | - | - |
| Average DATA. Emissions above 1 GHz | | | | | | | | | | |
| 1 855.00 ¹⁾ | 1 000 | V | 65.20 | 4.36 | -63.32 | 30.56 | -28.40 | 36.80 | 54.00 | 17.20 |
| 4 016.13 | 1 000 | V | 49.80 | 5.27 | -62.34 | 32.67 | -24.40 | 25.40 | 54.00 | 28.60 |
| 5 070.25 | 1 000 | H | 48.60 | 6.35 | -62.33 | 35.28 | -20.70 | 27.90 | 54.00 | 26.10 |
| 6 493.38 ¹⁾ | 1 000 | H | 52.10 | 7.39 | -62.40 | 35.51 | -19.50 | 32.60 | 54.00 | 21.40 |
| 7 419.25 ¹⁾ | 1 000 | H | 57.20 | 7.63 | -62.24 | 35.91 | -18.70 | 38.50 | 54.00 | 15.50 |
| 8 999.88 | 1 000 | V | 47.40 | 8.10 | -61.53 | 35.73 | -17.70 | 29.70 | 54.00 | 24.30 |
| Above 9 000.00 | Not Detected | - | - | - | - | - | - | - | - | - |

NOTE 1. Factor = Cable loss + Amp gain + Antenna factor


¹⁾ Harmonic components

5.7.5 Test Plot

Figure 6. Plot of the Band Edge (Conducted)


- Half mode (Without hopping)

Lowest Channel (902.6 MHz)

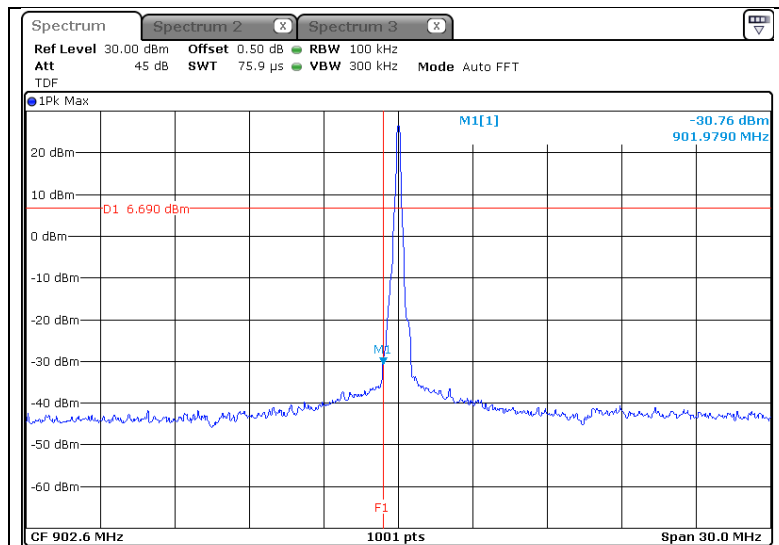

- Result of 902 MHz

Highest Channel (927.5 MHz)

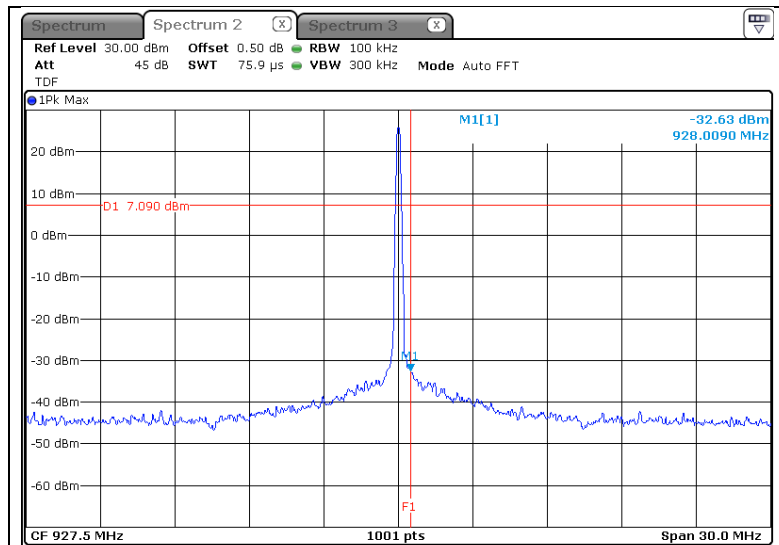

- Result of 928 MHz

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR16-SRF0024

Page (59) of (67)

KCTL


- Half mode (With hopping)

Lowest Channel (902.6 MHz)

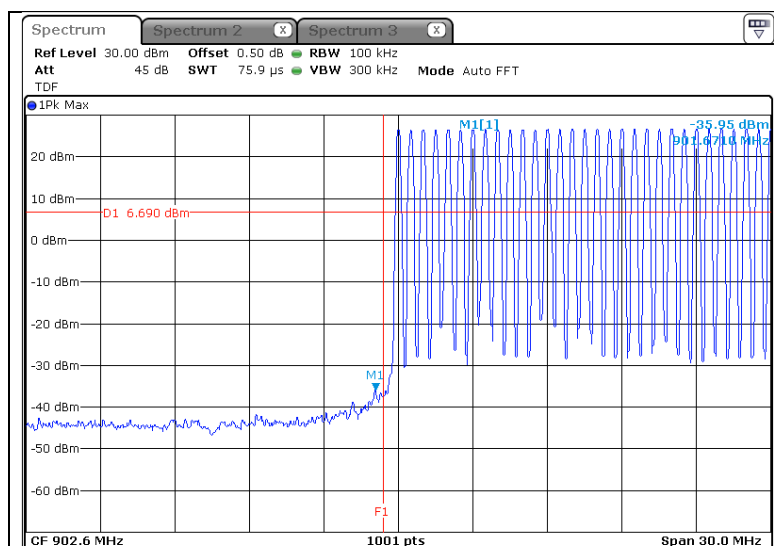

- Result of 902 MHz

Highest Channel (927.5 MHz)

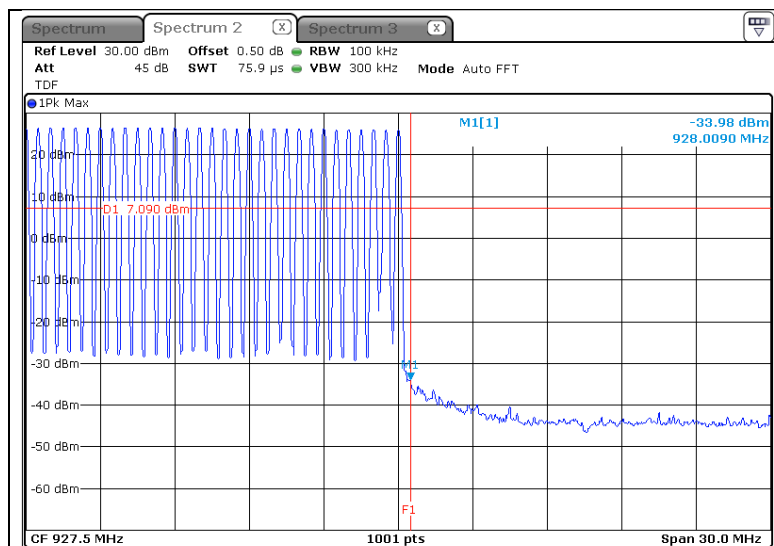

- Result of 928 MHz

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR16-SRF0024
Page (60) of (67)

KCTL


- Hi-fi mode (Without hopping)

Lowest Channel (903.0 MHz)

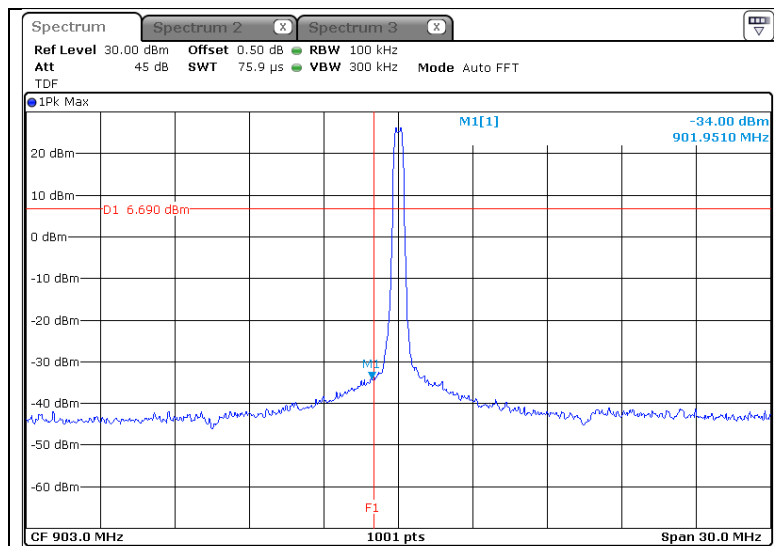

- Result of 902 MHz

Highest Channel (927.5 MHz)

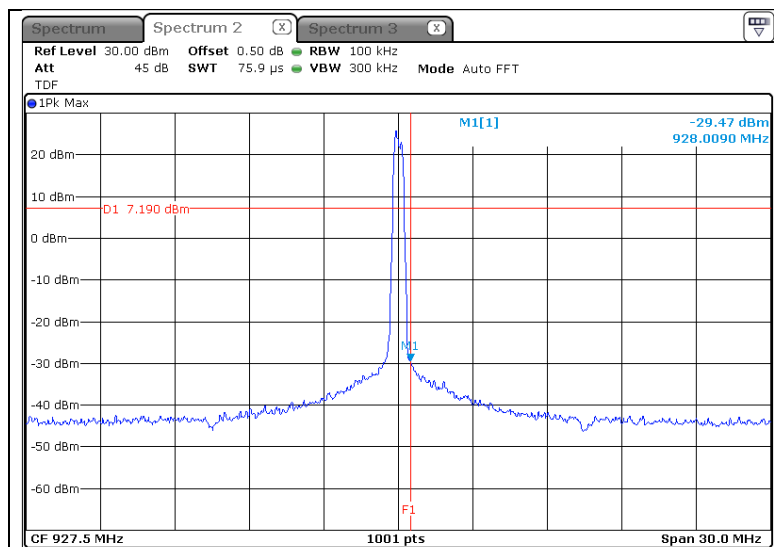

- Result of 928 MHz

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR16-SRF0024

Page (61) of (67)

KCTL


- Hi-fi mode (With hopping)

Lowest Channel (903.0 MHz)

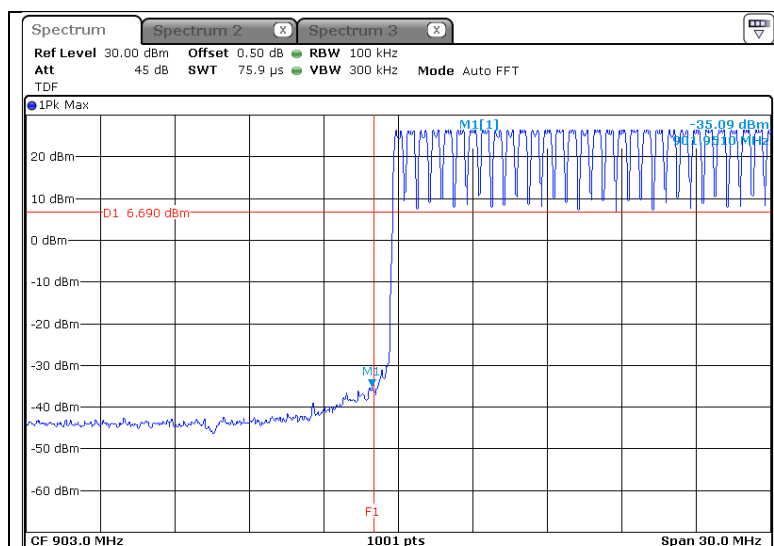

- Result of 902 MHz

Highest Channel (927.5 MHz)

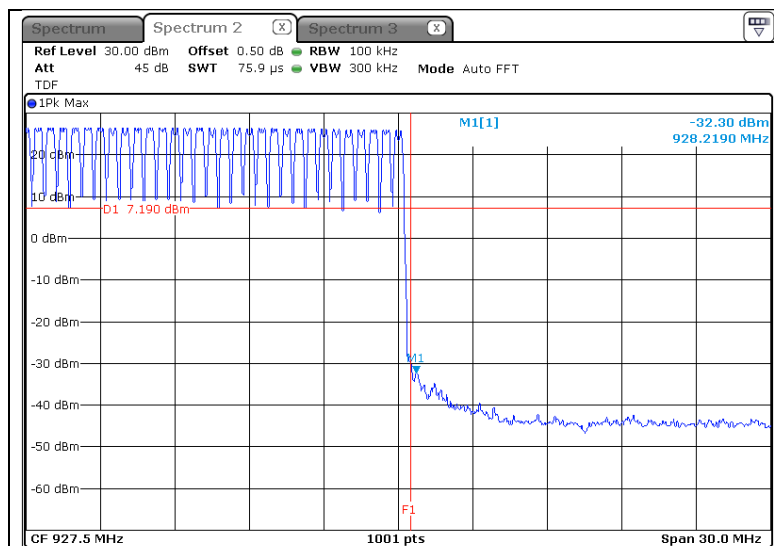

- Result of 928 MHz

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR16-SRF0024


Page (62) of (67)

KCTL


Figure 7 . Plot of the Spurious RF conducted emissions

- Half mode

Lowest Channel (902.6 MHz)

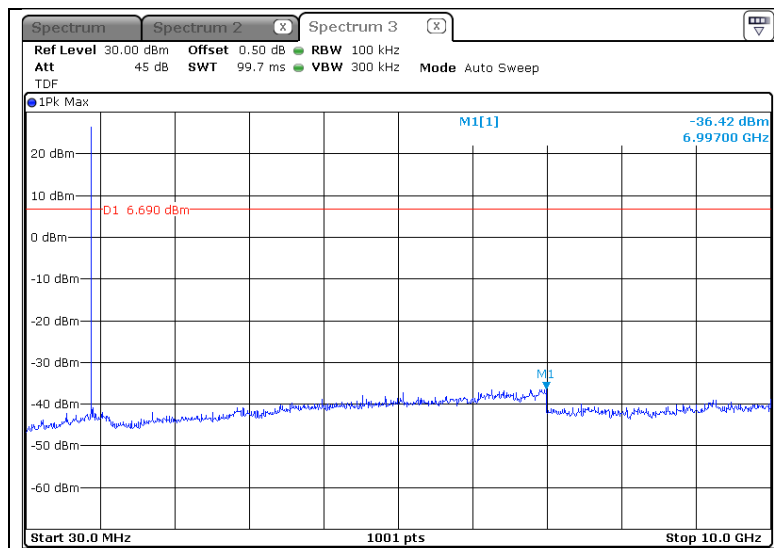

Middle Channel (915.0 MHz)

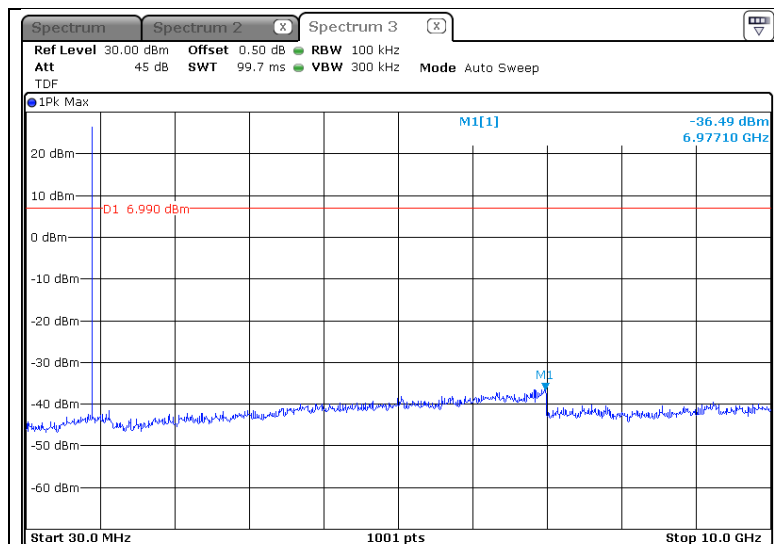


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR16-SRF0024
Page (63) of (67)




Highest Channel (927.5 MHz)

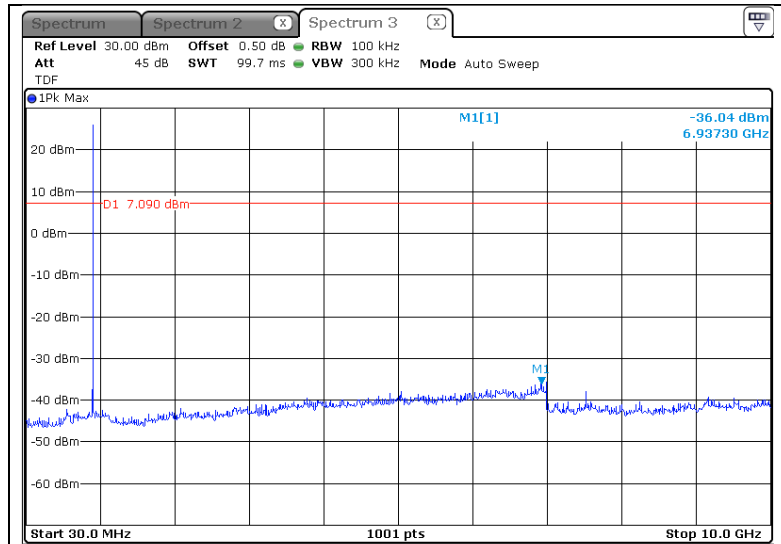

- Hi-fi mode

Lowest Channel (903.0 MHz)

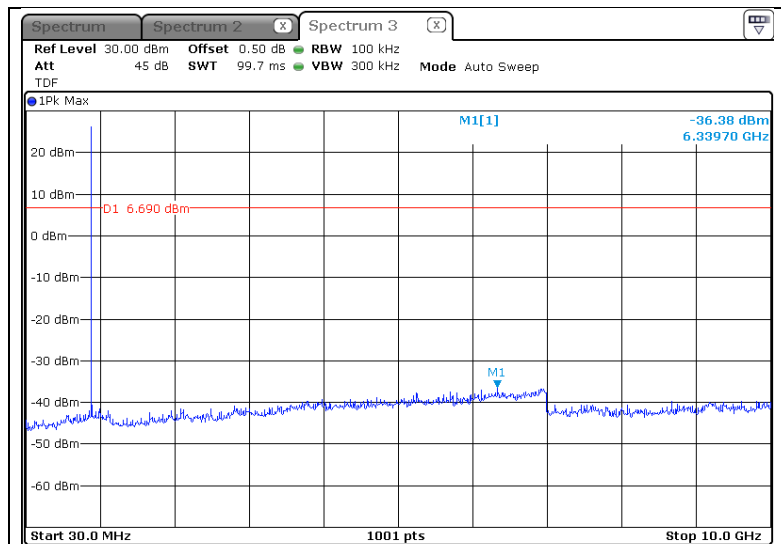

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR16-SRF0024


Page (64) of (67)

KCTL

Middle Channel (915.0 MHz)

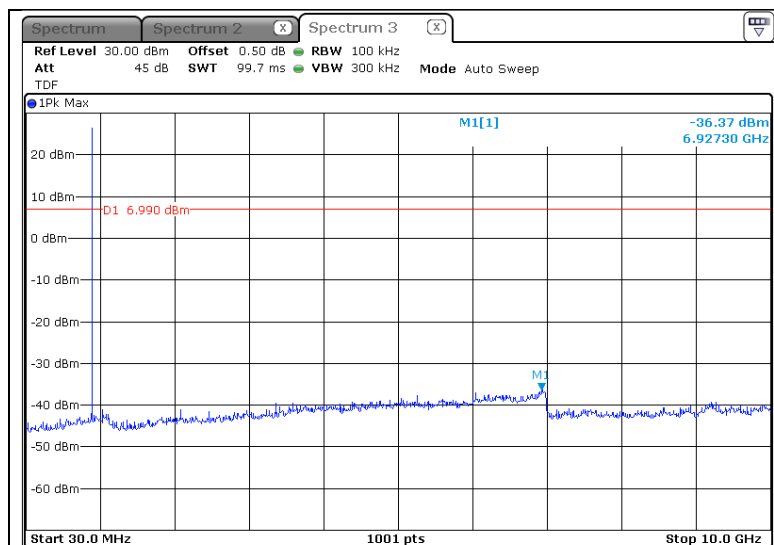

Highest Channel (927.5 MHz)

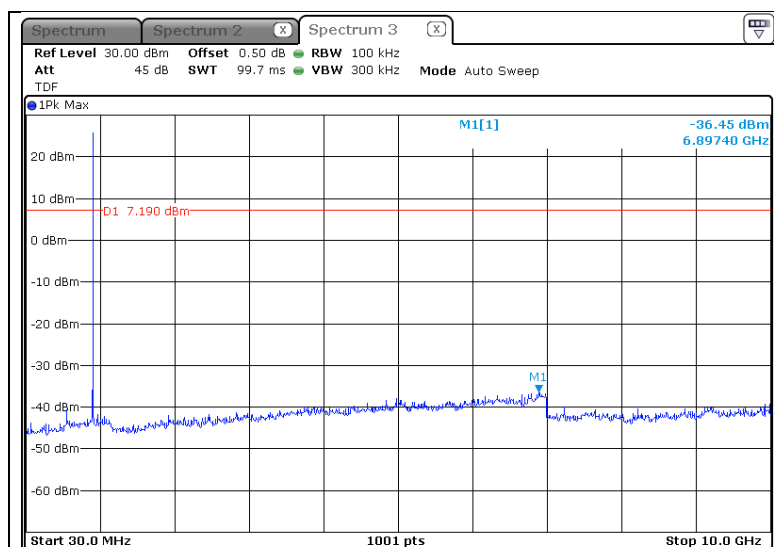

5.8 Conducted Emission

5.8.1 Regulation

According to §15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 µH/50 Ω line impedance stabilization network (LISN).

Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency of emission (MHz) | Conducted limit (dBµV) | |
|-----------------------------|------------------------|------------|
| | Quasi-peak | Average |
| 0.15 – 0.5 | 66 to 56 * | 56 to 46 * |
| 0.5 – 5 | 56 | 46 |
| 5 – 30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

According to §15.107(a), for unintentional device, except for Class A digital devices, line conducted emission limits are the same as the above table.

5.8.2 Measurement Procedure

- 1) The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
- 2) Each current-carrying conductor of the EUT power cord was individually connected through a 50Ω/50µH LISN, which is an input transducer to a Spectrum Analyzer or an EMI/Field Intensity Meter, to the input power source.
- 3) Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
- 4) The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
- 5) The measurements were made with the detector set to PEAK amplitude within a bandwidth of 10 kHz or to QUASI-PEAK and AVERAGE within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Republic of Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR16-SRF0024

Page (66) of (67)


KCTL

5.8.3 Test Result

- Complied

Figure 8. plot of Conducted Emission

- Conducted worst-case data : Hi-fi mode_Highest Channel (927.5 MHz)

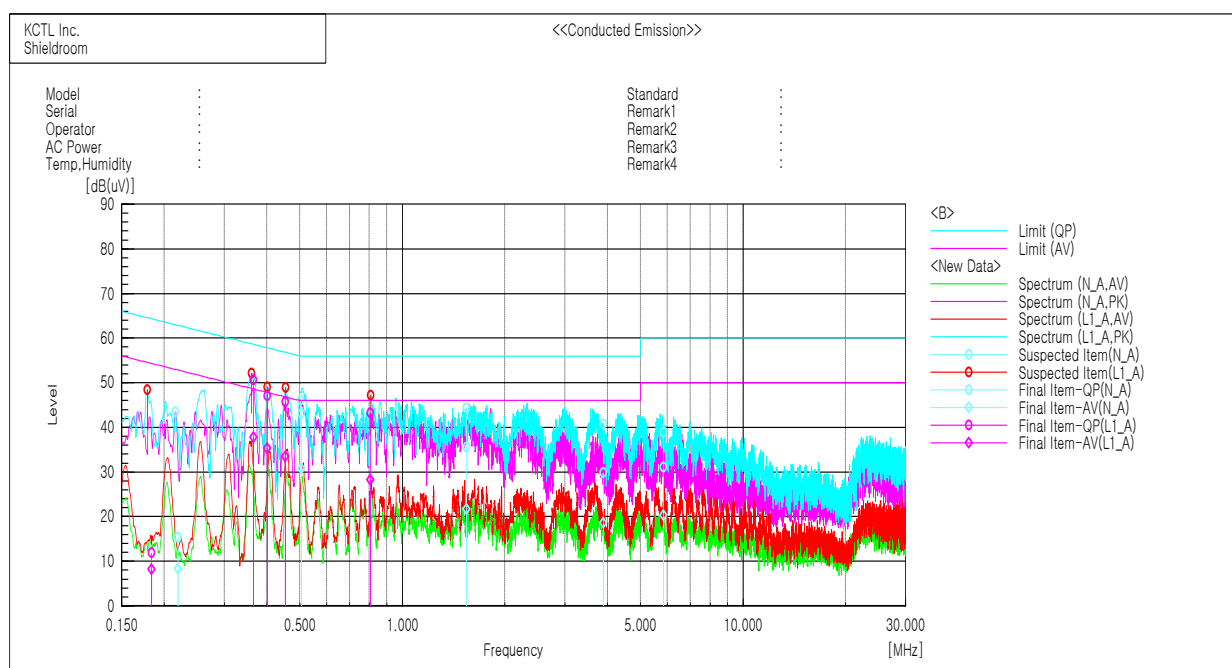

Final Result

--- N_A Phase ---

| No. | Frequency | Reading | Reading | c.f | Result | Result | Limit | Limit | Margin | Margin |
|-----|-----------|----------|----------|------|----------|----------|----------|----------|--------|--------|
| | [MHz] | QP | CAV | | QP | CAV | QP | AV | QP | CAV |
| | | [dB(μV)] | [dB(μV)] | [dB] | [dB(μV)] | [dB(μV)] | [dB(μV)] | [dB(μV)] | [dB] | [dB] |
| 1 | 0.21972 | 5.5 | -1.5 | 9.8 | 15.3 | 8.3 | 62.8 | 52.8 | 47.5 | 44.5 |
| 2 | 0.50491 | 32.9 | 20.5 | 10.2 | 43.1 | 30.7 | 56.0 | 46.0 | 12.9 | 15.3 |
| 3 | 1.54466 | 25.6 | 11.7 | 9.9 | 35.5 | 21.6 | 56.0 | 46.0 | 20.5 | 24.4 |
| 4 | 3.89034 | 19.8 | 8.6 | 10.0 | 29.8 | 18.6 | 56.0 | 46.0 | 26.2 | 27.4 |
| 5 | 5.83447 | 21.0 | 10.2 | 10.1 | 31.1 | 20.3 | 60.0 | 50.0 | 28.9 | 29.7 |

--- L1_A Phase ---

| No. | Frequency | Reading | Reading | c.f | Result | Result | Limit | Limit | Margin | Margin |
|-----|-----------|----------|----------|------|----------|----------|----------|----------|--------|--------|
| | [MHz] | QP | CAV | | QP | CAV | QP | AV | QP | CAV |
| | | [dB(μV)] | [dB(μV)] | [dB] | [dB(μV)] | [dB(μV)] | [dB(μV)] | [dB(μV)] | [dB] | [dB] |
| 1 | 0.18337 | 1.6 | -2.0 | 10.2 | 11.8 | 8.2 | 64.3 | 54.3 | 52.5 | 46.1 |
| 2 | 0.36559 | 40.6 | 27.7 | 10.1 | 50.7 | 37.8 | 58.6 | 48.6 | 7.9 | 10.8 |
| 3 | 0.4015 | 37.0 | 25.2 | 10.1 | 47.1 | 35.3 | 57.8 | 47.8 | 10.7 | 12.5 |
| 4 | 0.45296 | 35.5 | 23.3 | 10.2 | 45.7 | 33.5 | 56.8 | 46.8 | 11.1 | 13.3 |
| 5 | 0.80581 | 33.2 | 18.2 | 10.0 | 43.2 | 28.2 | 56.0 | 46.0 | 12.8 | 17.8 |

6. Test equipment used for test

| | Equipment Name | Manufacturer | Model No. | Serial No. | Next Cal. Date |
|---|-------------------------|-----------------------------|----------------------------|-------------|----------------|
| ■ | Spectrum Analyzer | R & S | FSV40 | 100989 | 17.01.07 |
| ■ | DC Power Supply | Agilent | E3632A | KR75304571 | 17.07.07 |
| ■ | Signal Generator | R & S | SMR40 | 100007 | 17.06.02 |
| ■ | Wideband Power Sensor | R & S | NRP-Z81 | 102398 | 17.02.11 |
| ■ | EMI TEST RECEIVER | R & S | ESCI | 101408 | 17.08.25 |
| ■ | Bi-Log Antenna | SCHWARZBECK | VULB 9163 | 552 | 18.06.27 |
| ■ | Amplifier | SONOMA INSTRUMENT | 310N | 186280 | 17.04.07 |
| ■ | Attenuator | SCHWARZBECK | DGA9552N | BU2404 | 17.04.08 |
| ■ | Horn antenna | ETS.lindgren | 3117 | 161225 | 17.05.03 |
| ■ | AMPLIFIER | L-3 Narda-MITEQ | AMF-7D -01001800-22-10P | 2003683 | 17.08.26 |
| ■ | LOOP Antenna | R & S | HFH2-Z2 | 100355 | 18.03.03 |
| ■ | Antenna Mast | MATURO | AM4.0 | 079/3440509 | - |
| ■ | Turn Table | MATURO | CO2000-SOFT | - | - |
| ■ | Highpass Filter | Wainwright Instruments GmbH | WHKX1.0/ 1.5S-10SS | 14 | 17.02.04 |
| ■ | Vector Signal Generator | R & S | SMBV100A | 257566 | 17.01.07 |
| ■ | TWO-LINE V-NETWORK | R & S | ENV216 | 101352 | 17.08.26 |
| ■ | Cable Assembly | HUER+SUHNER | SUCOFLEX 102 | MY3571/2 | - |