



FCC Test Report

FCC Part 15.247 for FHSS systems

FOR:

CDMA W63H

FCC ID: TYKNX6440

TEST REPORT #: EMC_CET10_038_15.247_Rev1

DATE: 2008-9-02



Certificate # 2135.01



LAB CODE 20020328-00

FCC listed
A2LA Accredited

IC recognized #
3462B

CETECOM Inc.

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: +1 (408) 586 6200 ♦ Fax: +1 (408) 586 6299 ♦ E-mail: info@cetecomusa.com ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

TABLE OF CONTENTS

1	Assessment	4
	<i>This report is reviewed by:</i>	4
	EMC & Radio	4
	<i>This report is prepared by:</i>	4
	EMC & Radio	4
2	Administrative Data	5
2.1	Identification of the Testing Laboratory Issuing the EMC Test Report	5
2.2	Identification of the Client	5
3	Equipment under Test (EUT)	5
3.1	Specification of the Equipment under Test	5
3.2	Identification of the Equipment Under Test (EUT)	6
3.3	Identification of Accessory equipment	6
4	Subject Of Investigation	7
5	Measurements (Radiated)	8
5.1	MAXIMUM PEAK OUTPUT POWER	8
5.1.1	Test Result:	8
5.2	RESTRICTED BAND EDGE COMPLIANCE RADIATED §15.247/15.205	18
5.2.1	LIMITS	18
5.2.2	RESULTS: GFSK	19
5.2.3	RESULTS: $\pi/4$ DQPSK	23
5.2.4	RESULTS: 8DPSK	27
5.3	TRANSMITTER SPURIOUS EMISSIONS RADIATED § 15.247/15.205/15.209	31
5.3.1	LIMITS	31
5.3.2	RESULTS	32
6	Measurements (Conducted)	41
6.1	MAXIMUM PEAK OUTPUT POWER § 15.247 (CONDUCTED)	41
6.1.1	LIMIT SUB CLAUSE § 15.247 (b) (1)	41
6.1.2	RESULTS:	41
6.2	20dB BANDWIDTH	51
6.2.1	LIMIT SUB CLAUSE § 15.247 (a) (1) (i) (ii) (iii)	51
6.2.2	RESULTS:	51
6.3	CARRIER FREQUENCY SEPARATION	61
6.3.1	LIMIT SUB CLAUSE § 15.247 (a) (1) (i) (ii) (iii)	61
6.3.2	RESULTS: 1.002 MHz	61
6.4	NUMBER OF HOPPING CHANNELS	62
6.4.1	LIMIT SUB CLAUSE § 15.247 (a) (1) (iii)	62
6.4.2	RESULTS: 79	62
6.5	TIME OF OCCUPANCY (DWELL TIME)	63
6.5.1	LIMIT SUB CLAUSE § 15.247 (a) (1) (i) (ii) (iii)	63

Test Report #: EMC_CET10_038_15.247_Rev1

Date of Report : 2008-9-02

Page 3 of 74



6.5.2	RESULTS:	63
6.6	CONDUCTED SPURIOUS EMISSION	64
6.6.1	LIMIT SUB CLAUSE § 15.247 (d)	64
6.6.2	RESULTS: Tnom(23)°C VnomVDC	64
6.7	AC POWER LINE CONDUCTED EMISSIONS § 15.107/207	68
6.7.1	LIMITS	68
6.7.2	Test Results:	68
7	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	71
8	BLOCK DIAGRAMS	72



1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Part 15.247 of the Code of Federal Regulations.

Company	Description	Model #
Casio Hitachi Mobile Communications Co., Ltd.	The cellular phone for the global roaming of the CDMA method of 3G equipped with the Bluetooth function and the FeliCa function sold in Japan.	CDMA W63H

This report is reviewed by:

Satya Radhakrishna
(EMC Project Engineer)

2008-9-02 EMC & Radio

Date	Section	Name	Signature
------	---------	------	-----------

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

This report is prepared by:

Marc Douat
(EMC Project Engineer)

2008-9-02 EMC & Radio

Date	Section	Name	Signature
------	---------	------	-----------

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	EMC
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Responsible Test Lab Manager:	Lothar Schmidt
Responsible Project Leader:	Marc Douat
Date of test:	2008-8-08 to 2008-8-21

2.2 Identification of the Client

APPLICANT	
Applicant (Company Name)	Casio Hitachi Mobile Communications Co., Ltd.
Street Address	2-229-1, Sakuragaoka
City/Zip Code	Higashiyamato-shi, Tokyo 207-8501
Country	Japan
Contact Person	Toshiaki Otsuka
Telephone	+81-42-516-2184
Fax	+81-42-516-2505
e-mail	otsuka@ch-mobile.co.jp

3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

Marketing Name:	CDMA W63H
Description:	The cellular phone for the global roaming of the CDMA method of 3G equipped with the Bluetooth function and the FeliCa function sold in Japan.

Model No:	CDMA W63H
Antenna Type:	Integral
Type(s) of Modulation:	GFSK, DQPSK, 8DPSK
Frequency Band(s) of Operation:	2400~2483.5MHz
Numbers of Channels:	79
Equipment Classification: (CLASS)	<input type="checkbox"/> FIXED <input type="checkbox"/> VEHICULAR <input checked="" type="checkbox"/> PORTABLE <input type="checkbox"/> MODULE
Equipment Classification: (POWER(AC MAINS))	<input type="checkbox"/> 110VAC (<i>GROUND</i>) <input checked="" type="checkbox"/> 110VAC (<i>NO GROUND</i>) <input type="checkbox"/> 12VDC <input checked="" type="checkbox"/> 3.0/3.8/4.2VDC Li battery

3.2 Identification of the Equipment Under Test (EUT)

EUT #	TYPE	MODEL	SERIAL #	HW Version
1	EUT	CDMA W63H	SHIDE000091	PWB-6440-MAIN20S
2	EUT	CDMA W63H	SHIDE000093	PWB-6440-MAIN20S

SW version: v008a

3.3 Identification of Accessory equipment

AE #	TYPE	MODEL
1	AC Adapter	0203PQA
2	Cradle	63HIPUA
3	USB Cable	N/A
4	Headset	N/A



4 Subject Of Investigation

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations. The maximization of portable equipment is conducted in accordance with ANSI C63.4.

All testing was performed on the product referred to in Section 3 as EUT. This test report contains full radiated and conducted testing results as per FCC15.247.

During the testing process the EUT was tested on a single channel using PRBS9 payload using DH5, 2DH5 or 3DH5 packets, all data in this report shows the worst case between horizontal and vertical polarization for above 1GHz.

5 Measurements (Radiated)

5.1 MAXIMUM PEAK OUTPUT POWER

5.1.1 Test Result:

EIRP: GFSK

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom} VDC	-5.26	-4.77	-3.10
Measurement uncertainty		±0.5dBm		

EIRP: $\pi / 4$ DQPSK

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom} VDC	-5.37	-4.71	-3.02
Measurement uncertainty		±0.5dBm		

EIRP: 8DPSK

4


TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom} VDC	-5.35	-4.85	-3.08
Measurement uncertainty		±0.5dBm		

EIRP LOW CHANNEL-GFSK

EUT: W63H
Customer:: Casio Hitachi
Test Mode: BT Ch 0
ANT Orientation: V
EUT Orientation: V
Test Engineer: Marc
Voltage: battery and AC
Comments:

SWEEP TABLE: "EIRP BT low channel"

Short Description: EIRP Bluetooth channel-2402MHz
Start Stop Detector Meas. IF Transducer
Frequency Frequency Time Bandw.
2.4 GHz 2.4 GHz MaxPeak Coupled 3 MHz DUMMY-DBM
MaxPeak

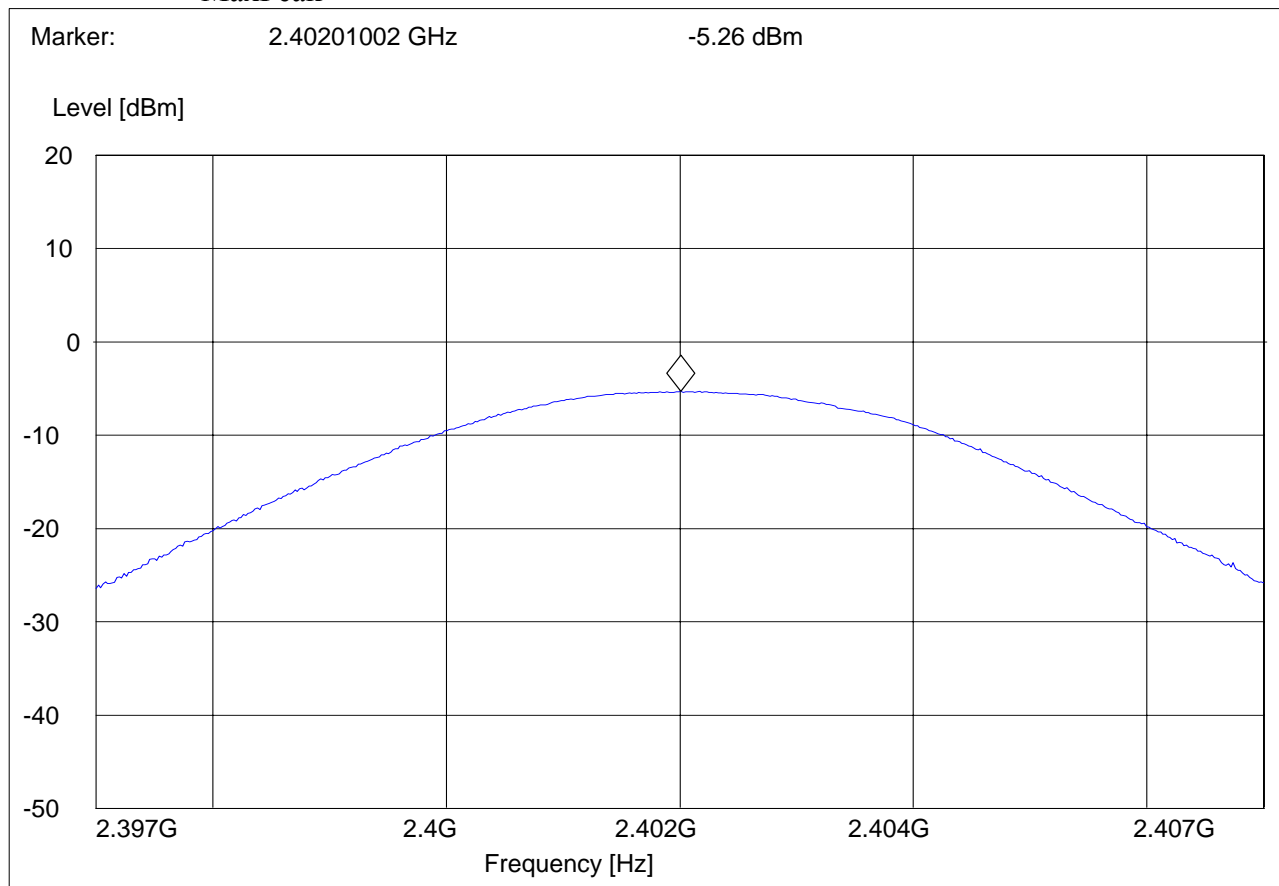

EIRP MIDDLE CHANNEL-GFSK

EUT: W63H

Customer:: Casio Hitachi

Test Mode: BT Ch 39

ANT Orientation: V

EUT Orientation: V

Test Engineer: Marc

Voltage: battery and AC

Comments: TT @ 217°

SWEEP TABLE: "EIRP BT mid channel"


Short Description: EIRP Bluetooth channel-2441MHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

2.4 GHz 2.4 GHz MaxPeak Coupled 3 MHz DUMMY-DBM

MaxPeak

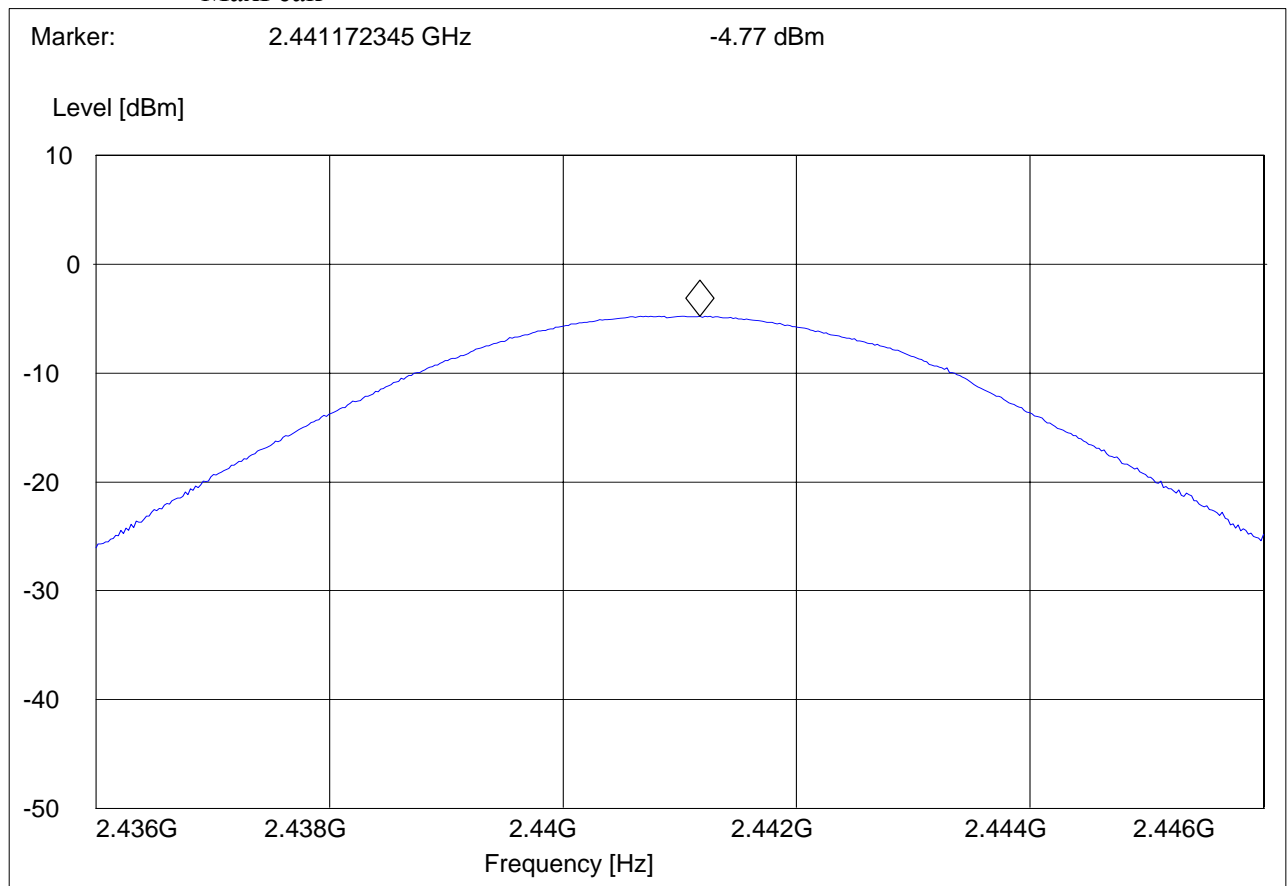

EIRP HIGH CHANNEL-GFSK

EUT: W63H
Customer:: Casio Hitachi
Test Mode: BT Ch 78
ANT Orientation: V
EUT Orientation: V
Test Engineer: Marc
Voltage: battery and AC
Comments: TT @ 217°

SWEEP TABLE: "EIRP BT high channel"


Short Description: EIRP Bluetooth channel-2480MHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

2.5 GHz 2.5 GHz MaxPeak Coupled 3 MHz DUMMY-DBM

MaxPeak

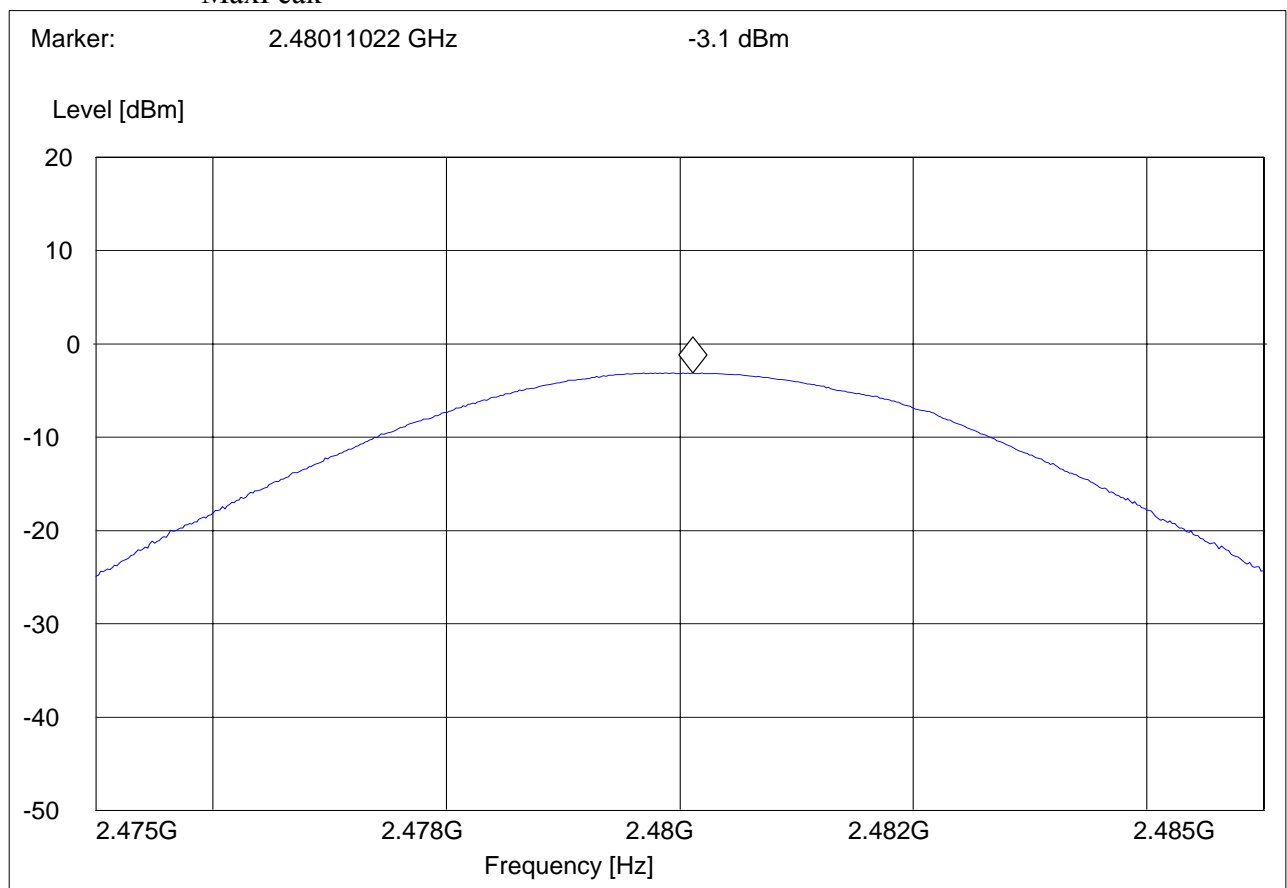


EIRP LOW CHANNEL- $\pi / 4$ DQPSK

EUT: W63H
Customer:: Casio Hitachi
Test Mode: BT DQPSK Ch 0
ANT Orientation: V
EUT Orientation: V
Test Engineer: Marc
Voltage: battery and AC
Comments: TT @ 217°

SWEEP TABLE: "EIRP BT low channel"

Short Description: EIRP Bluetooth channel-2402MHz
Start Stop Detector Meas. IF Transducer
Frequency Frequency Time Bandw.
2.4 GHz 2.4 GHz MaxPeak Coupled 3 MHz DUMMY-DBM
MaxPeak

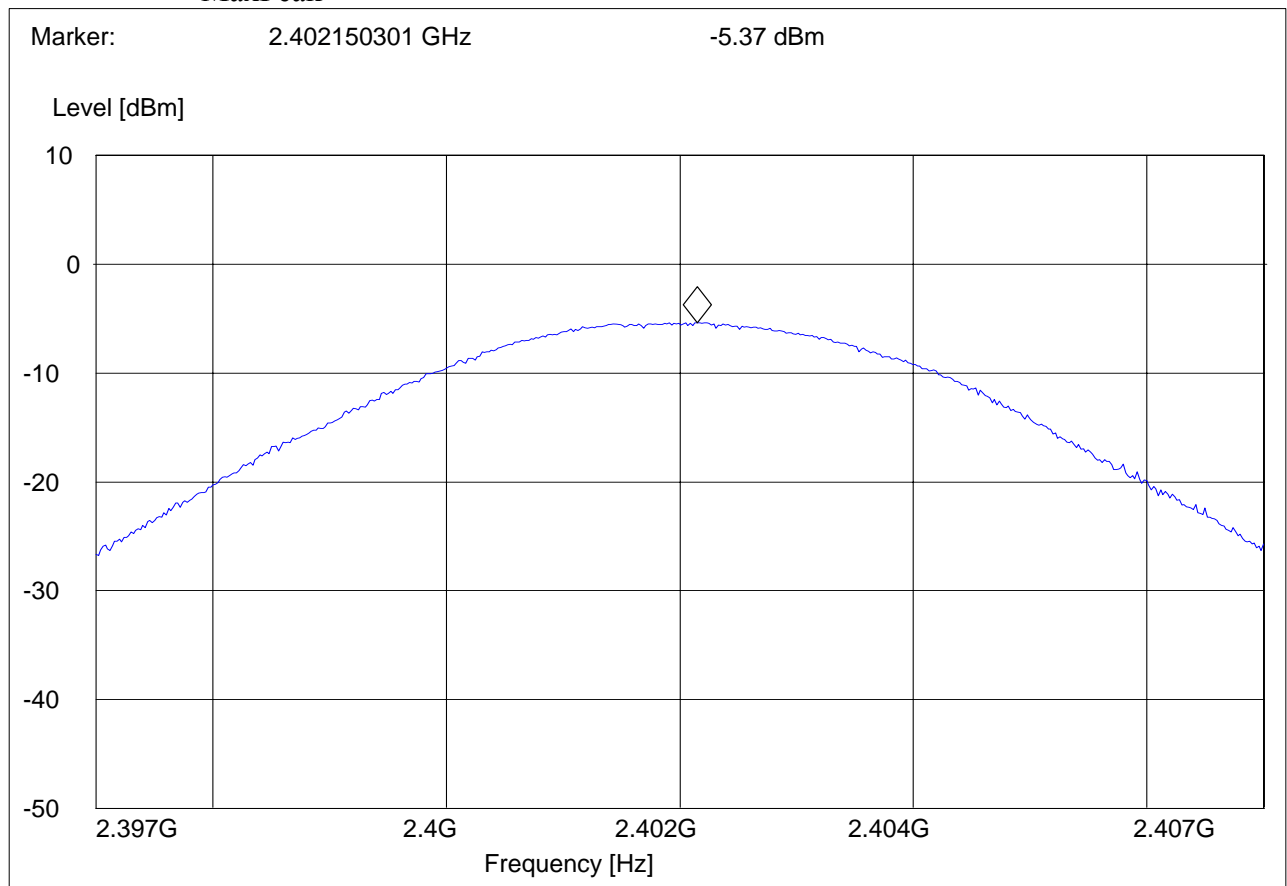

EIRP MIDDLE CHANNEL- $\pi / 4$ DQPSK

EUT: W63H
Customer:: Casio Hitachi
Test Mode: BT DQPSK Ch 39
ANT Orientation: V
EUT Orientation: V
Test Engineer: Marc
Voltage: battery and AC
Comments: TT @ 217°

SWEEP TABLE: "EIRP BT mid channel"


Short Description: EIRP Bluetooth channel-2441MHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

2.4 GHz 2.4 GHz MaxPeak Coupled 3 MHz DUMMY-DBM

MaxPeak

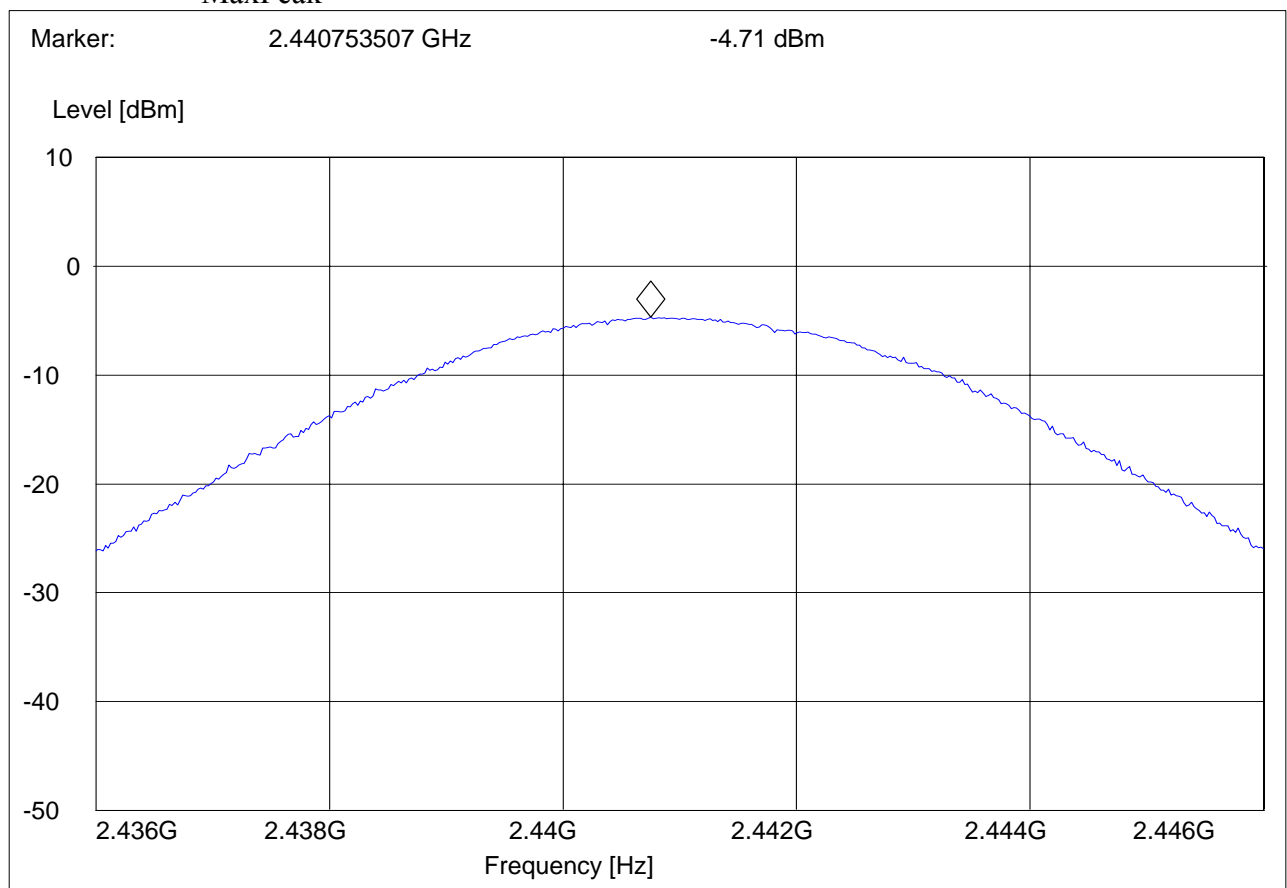

EIRP HIGH CHANNEL- $\pi / 4$ DQPSK

EUT: W63H
Customer:: Casio Hitachi
Test Mode: BT DQPSK Ch 78
ANT Orientation: V
EUT Orientation: V
Test Engineer: Marc
Voltage: battery and AC
Comments: TT @ 217°

SWEEP TABLE: "EIRP BT high channel"


Short Description: EIRP Bluetooth channel-2480MHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

2.5 GHz 2.5 GHz MaxPeak Coupled 3 MHz DUMMY-DBM

MaxPeak

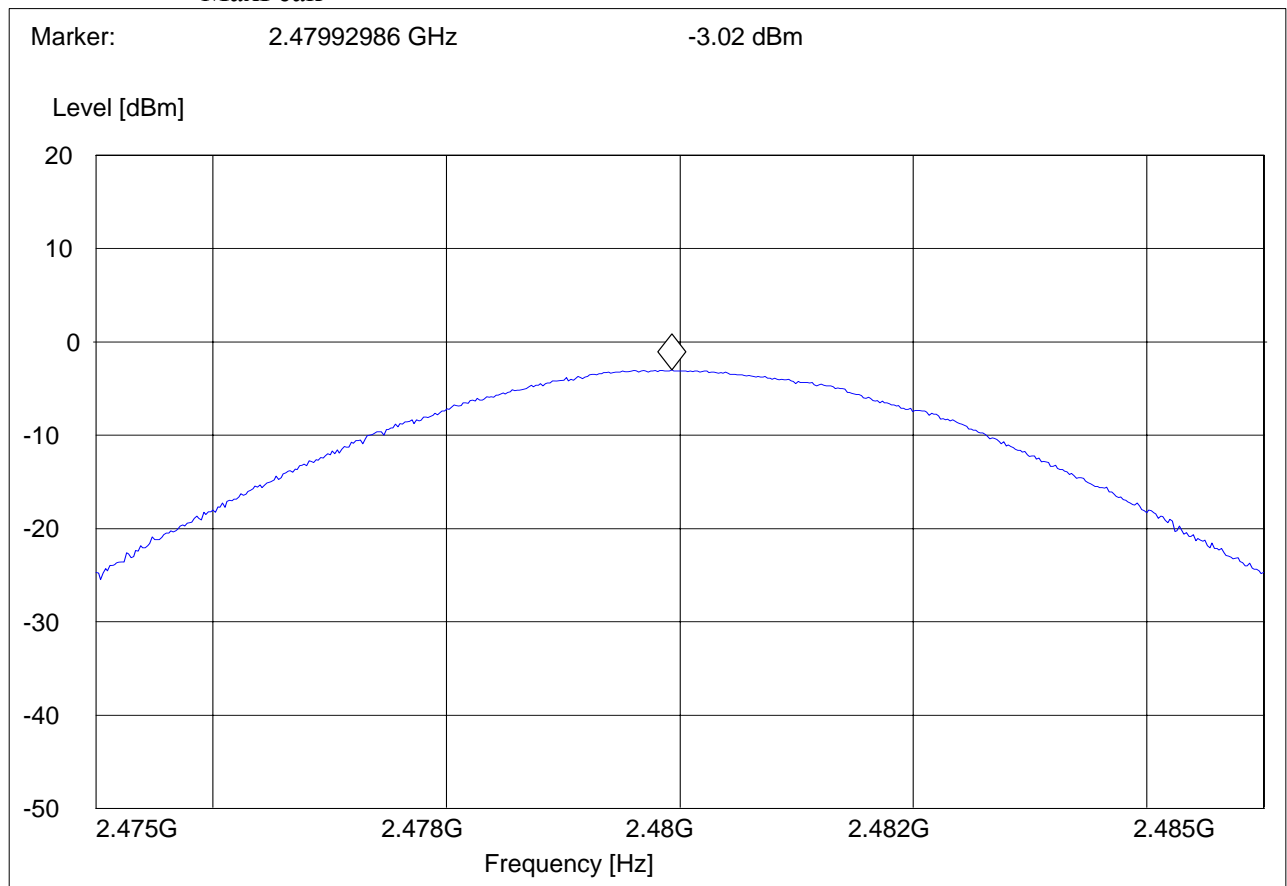


EIRP LOW CHANNEL- 8DPSK

EUT: W63H
 Customer:: Casio Hitachi
 Test Mode: BT 8DPSK Ch 0
 ANT Orientation: V
 EUT Orientation: V
 Test Engineer: Marc
 Voltage: battery and AC
 Comments: TT @ 217°

SWEEP TABLE: "EIRP BT low channel"

Short Description: EIRP Bluetooth channel-2402MHz
 Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 2.4 GHz 2.4 GHz MaxPeak Coupled 3 MHz DUMMY-DBM
 MaxPeak

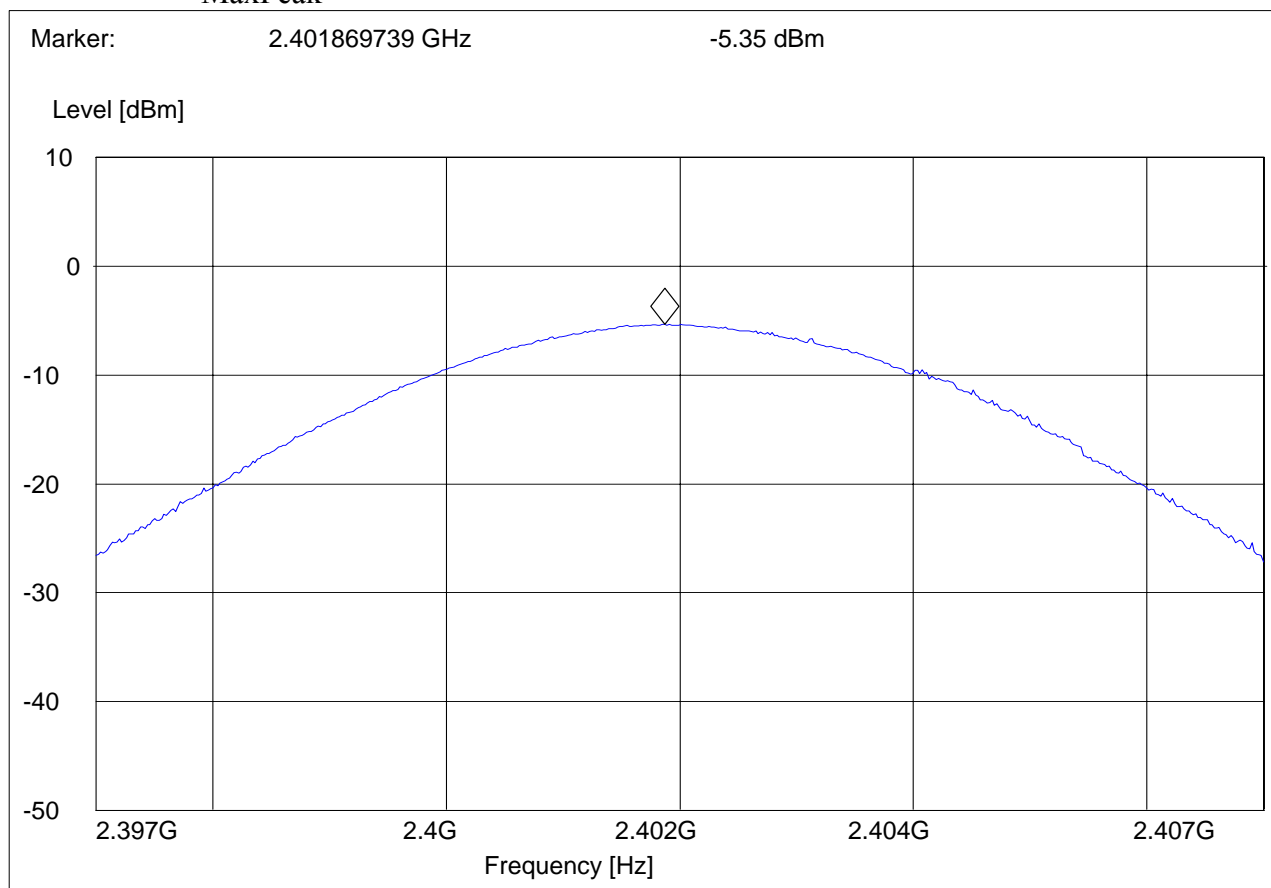

EIRP MIDDLE CHANNEL- 8DPSK

EUT: W63H

Customer:: Casio Hitachi

Test Mode: BT 8DPSK Ch 39

ANT Orientation: V

EUT Orientation: V

Test Engineer: Marc

Voltage: battery and AC

Comments: TT @ 217°

SWEEP TABLE: "EIRP BT mid channel"


Short Description: EIRP Bluetooth channel-2441MHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

2.4 GHz 2.4 GHz MaxPeak Coupled 3 MHz DUMMY-DBM

MaxPeak

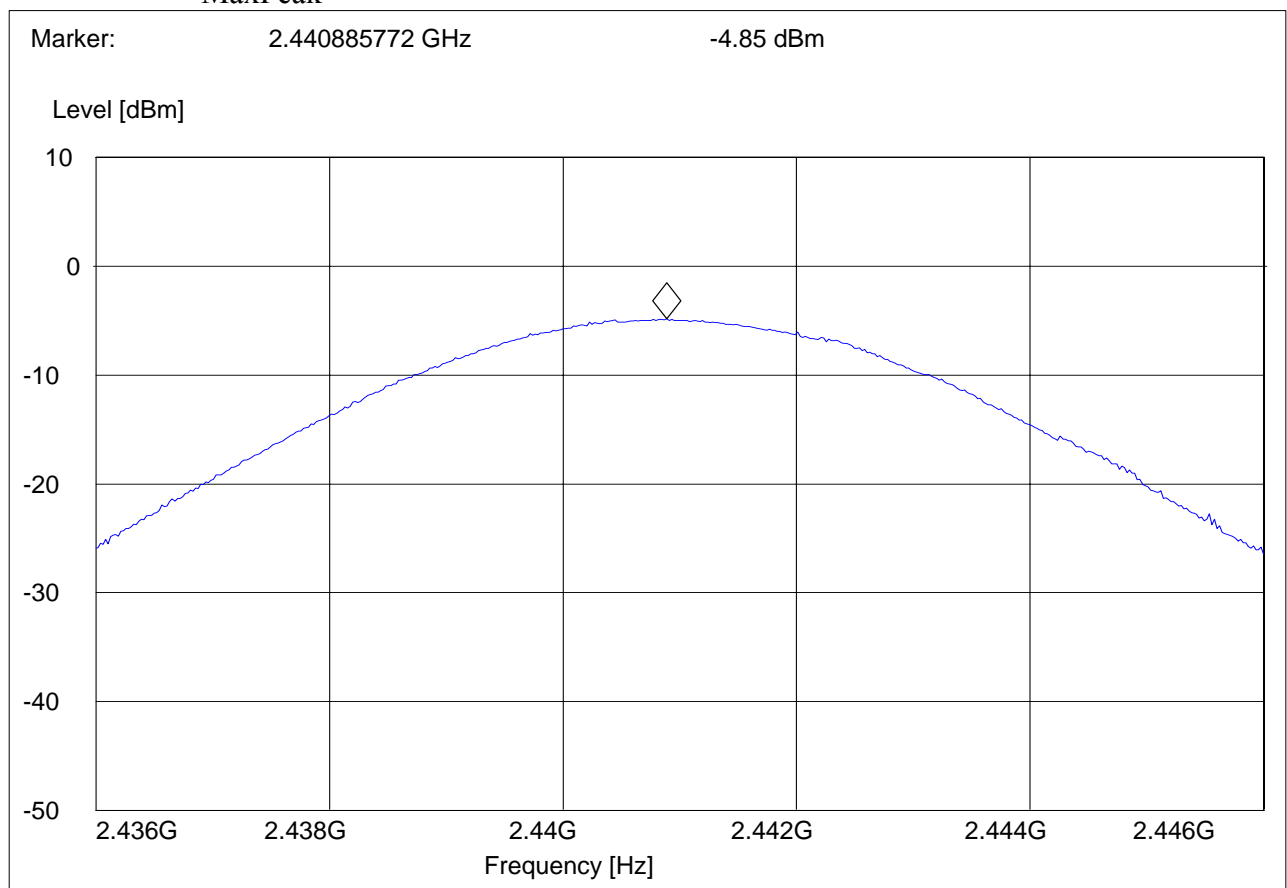

EIRP HIGH CHANNEL- 8DPSK

EUT: W63H

Customer:: Casio Hitachi

Test Mode: BT 8DPSK Ch 78

ANT Orientation: V

EUT Orientation: V

Test Engineer: Marc

Voltage: battery and AC

Comments: TT @ 217°

SWEEP TABLE: "EIRP BT high channel"


Short Description: EIRP Bluetooth channel-2480MHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

2.5 GHz 2.5 GHz MaxPeak Coupled 3 MHz DUMMY-DBM

MaxPeak

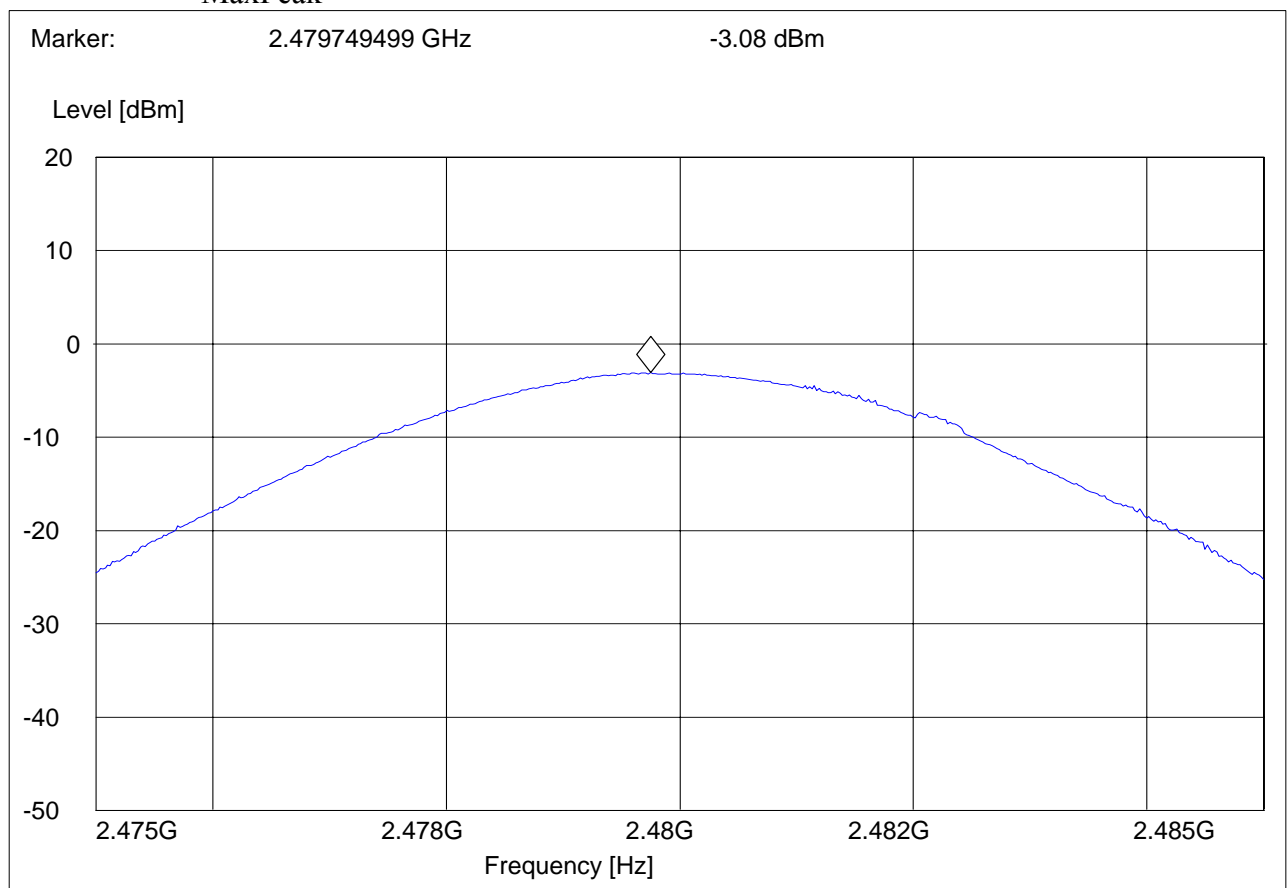

5.2 RESTRICTED BAND EDGE COMPLIANCE RADIATED §15.247/15.205

5.2.1 LIMITS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

*PEAK LIMIT= 74dBuV/m


*AVG. LIMIT= 54dBuV/m

5.2.2 RESULTS: GFSK (2402MHz) LOWER BAND EDGE PEAK -GFSK MODULATION

EUT: W63H
Customer:: Casio Hitachi
Test Mode: BT GFSK Ch 0
ANT Orientation: V
EUT Orientation: V
Test Engineer: Marc
Voltage: battery and AC
Comments: TT @ 217°

SWEEP TABLE: "FCC15.247 LBE_PK"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert
MaxPeak					

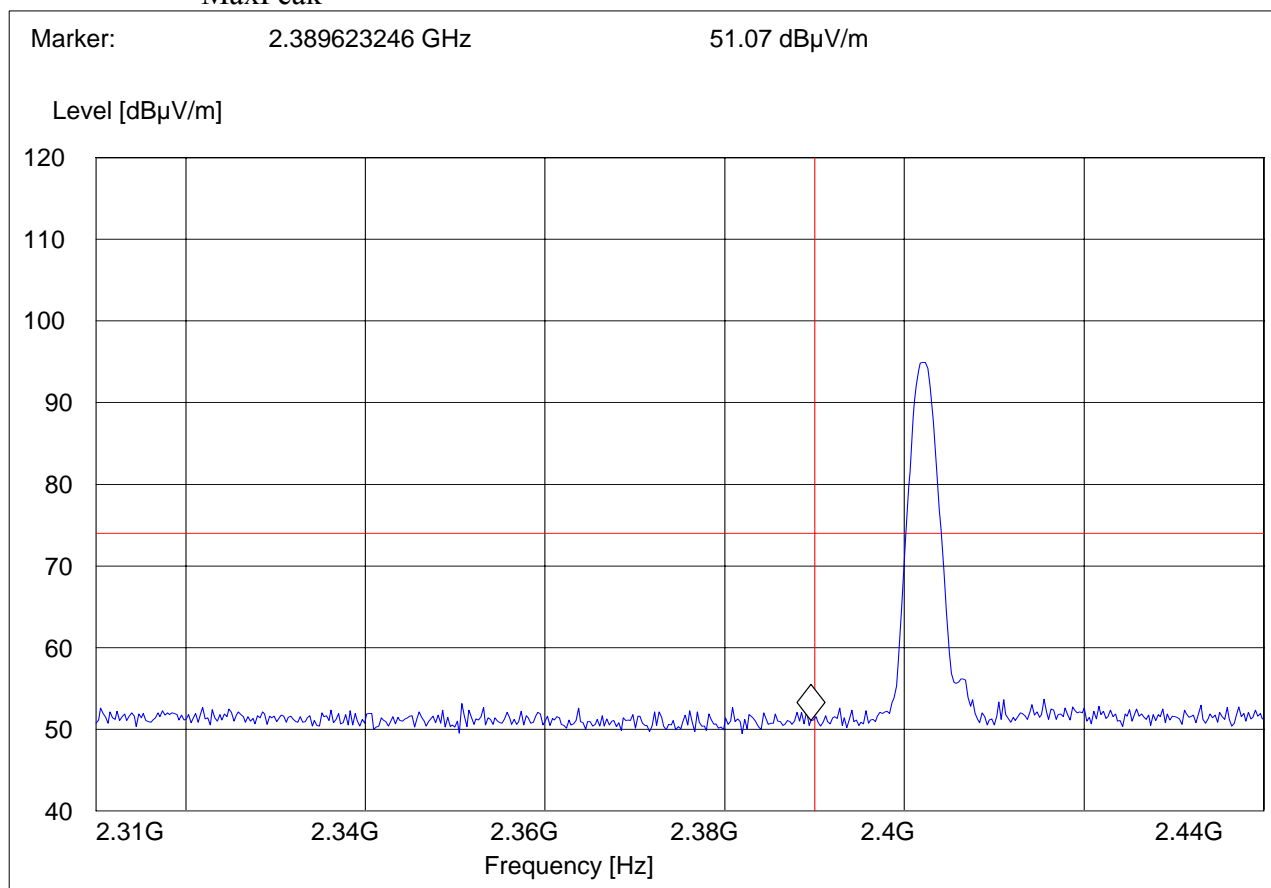

(2402MHz) LOWER BAND EDGE AVERAGE -GFSK MODULATION


EUT: W63H
Customer:: Casio Hitachi
Test Mode: BT GFSK Ch 0
ANT Orientation: V
EUT Orientation: V
Test Engineer: Marc
Voltage: battery and AC
Comments: TT @ 217°

SWEEP TABLE: "FCC15.247 LBE_AVG"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn AF_vert

Marker: 2.389799599 GHz 39.87 dBμV/m

Level [dBμV/m]

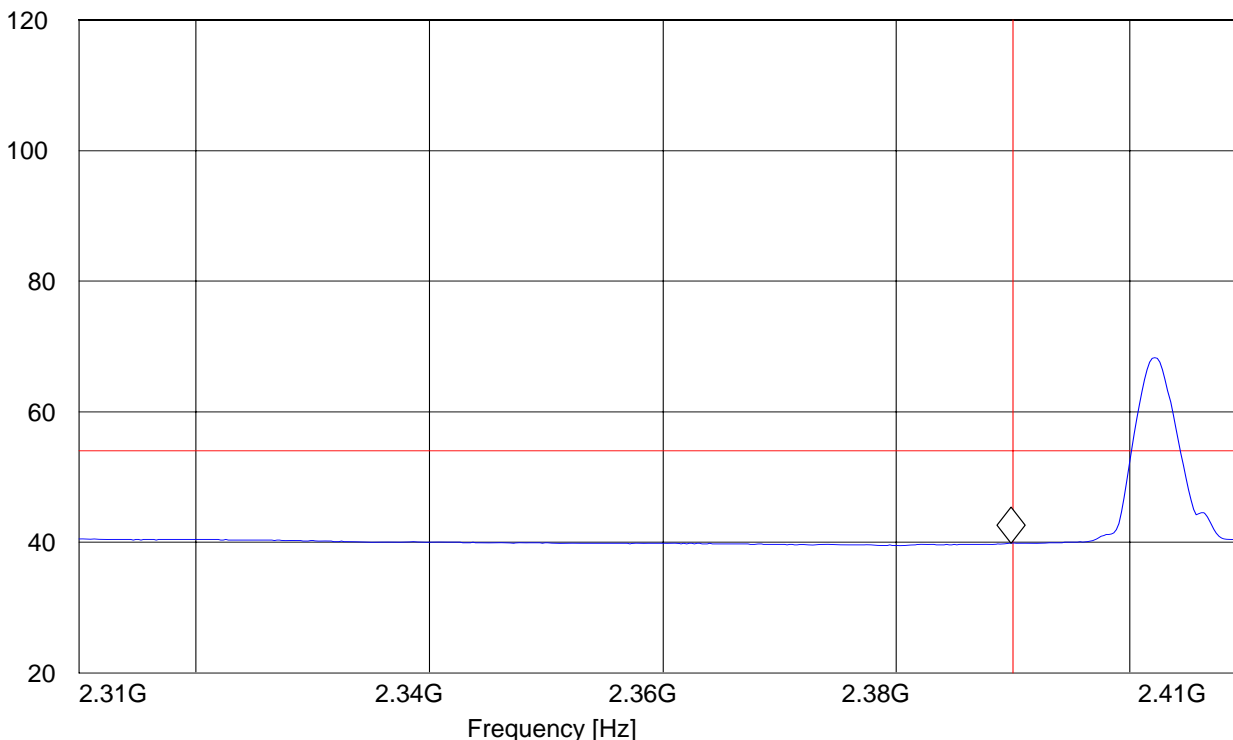

(2480MHz) HIGHER BAND EDGE PEAK -GFSK MODULATION

EUT: W63H

Customer:: Casio Hitachi

Test Mode: BT GFSK Ch 78

ANT Orientation: V

EUT Orientation: V


Test Engineer: Marc

Voltage: battery and AC

Comments: TT @ 217°

SWEEP TABLE: "FCC15.247 HBE_PK"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time		Bandw.
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert
		MaxPeak			

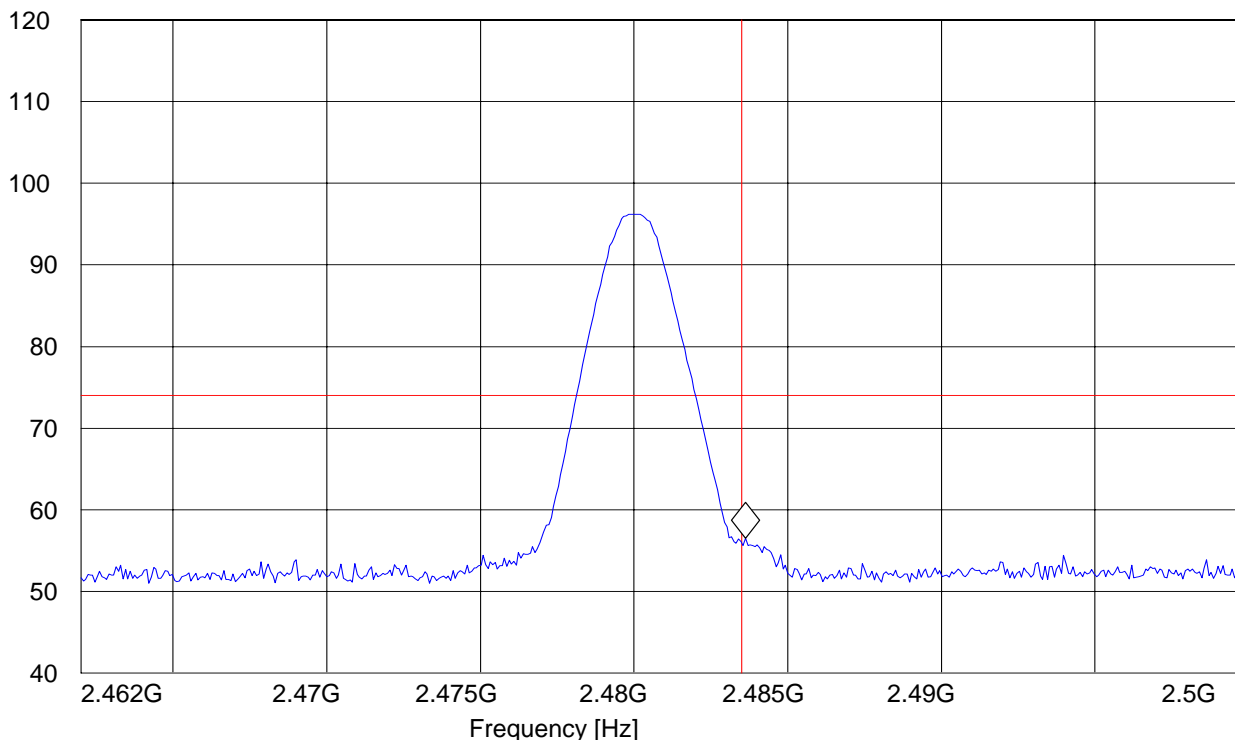Marker: 2.483627255 GHz 56.47 dB μ V/mLevel [dB μ V/m]

HIGHER BAND EDGE AVERAGE-GFSK MODULATION


EUT: W63H
Customer:: Casio Hitachi
Test Mode: BT GFSK Ch 78
ANT Orientation: V
EUT Orientation: V
Test Engineer: Marc
Voltage: battery and AC
Comments: TT @ 217°

SWEEP TABLE: "FCC15.247 HBE_AVG"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn AF horz

Marker: 2.483547094 GHz 44.54 dB μ V/m

Level [dB μ V/m]

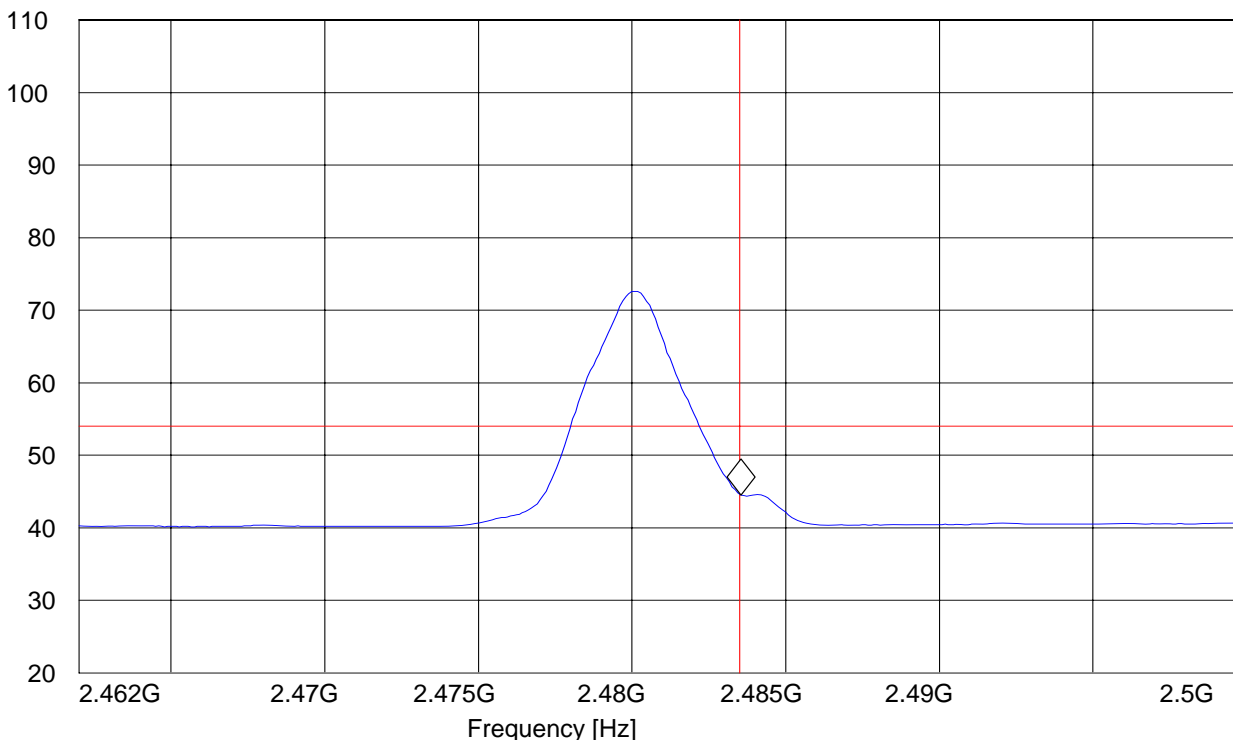


**5.2.3 RESULTS: $\pi/4$ DQPSK
(2402MHz) LOWER BAND EDGE PEAK - $\pi/4$ DQPSK MODULATION**

EUT: W63H
Customer:: Casio Hitachi
Test Mode: BT DQPSK Ch 0
ANT Orientation: V
EUT Orientation: V
Test Engineer: Marc
Voltage: battery and AC
Comments: TT @ 217°

SWEEP TABLE: "FCC15.247 LBE_PK"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert
MaxPeak					

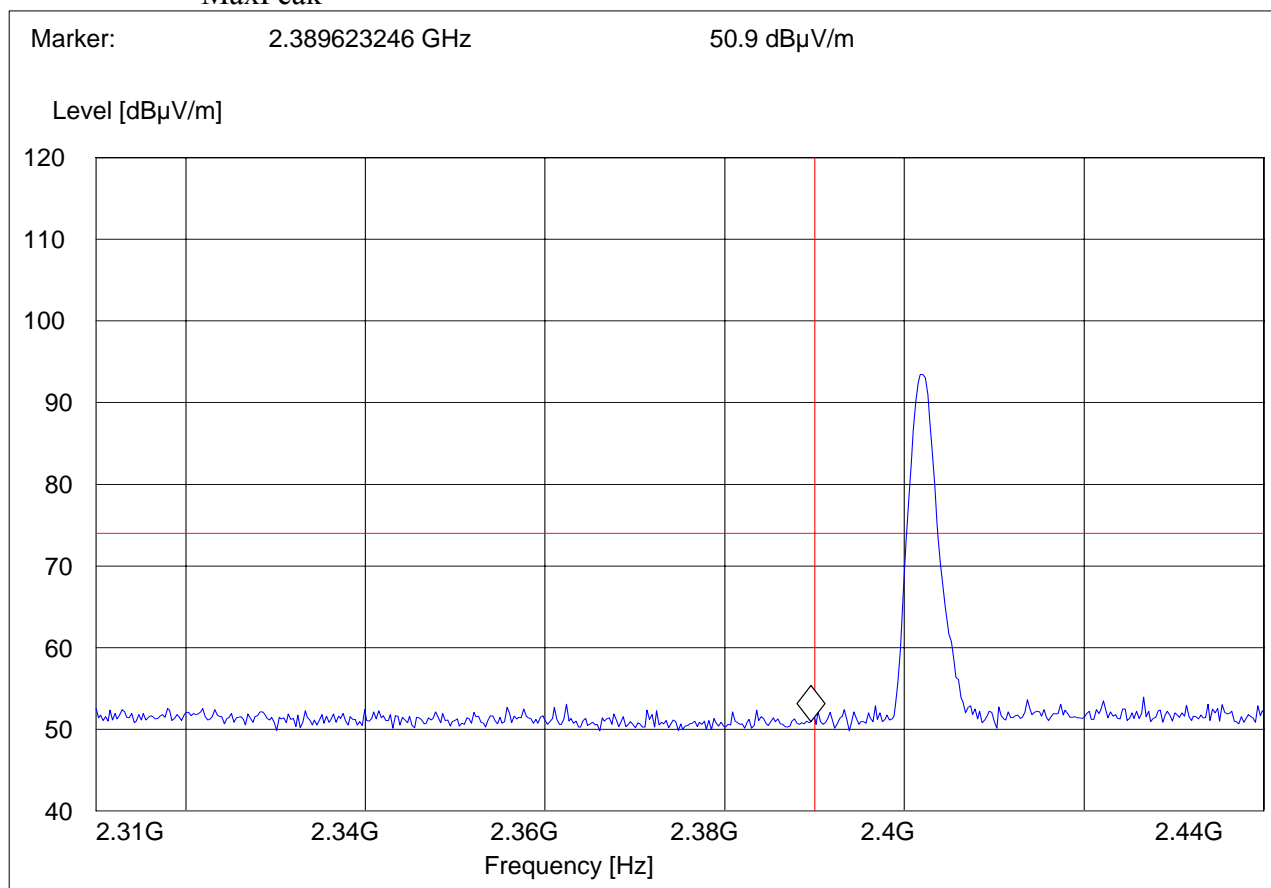

(2402MHz) LOWER BAND EDGE AVERAGE $-\pi/4$ DQPSK MODULATION


EUT: W63H
Customer:: Casio Hitachi
Test Mode: BT DQPSK Ch 0
ANT Orientation: V
EUT Orientation: V
Test Engineer: Marc
Voltage: battery and AC
Comments: TT @ 217°

SWEEP TABLE: "FCC15.247 LBE_AVG"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn AF_vert

Marker: 2.389799599 GHz 39.93 dB μ V/m

Level [dB μ V/m]

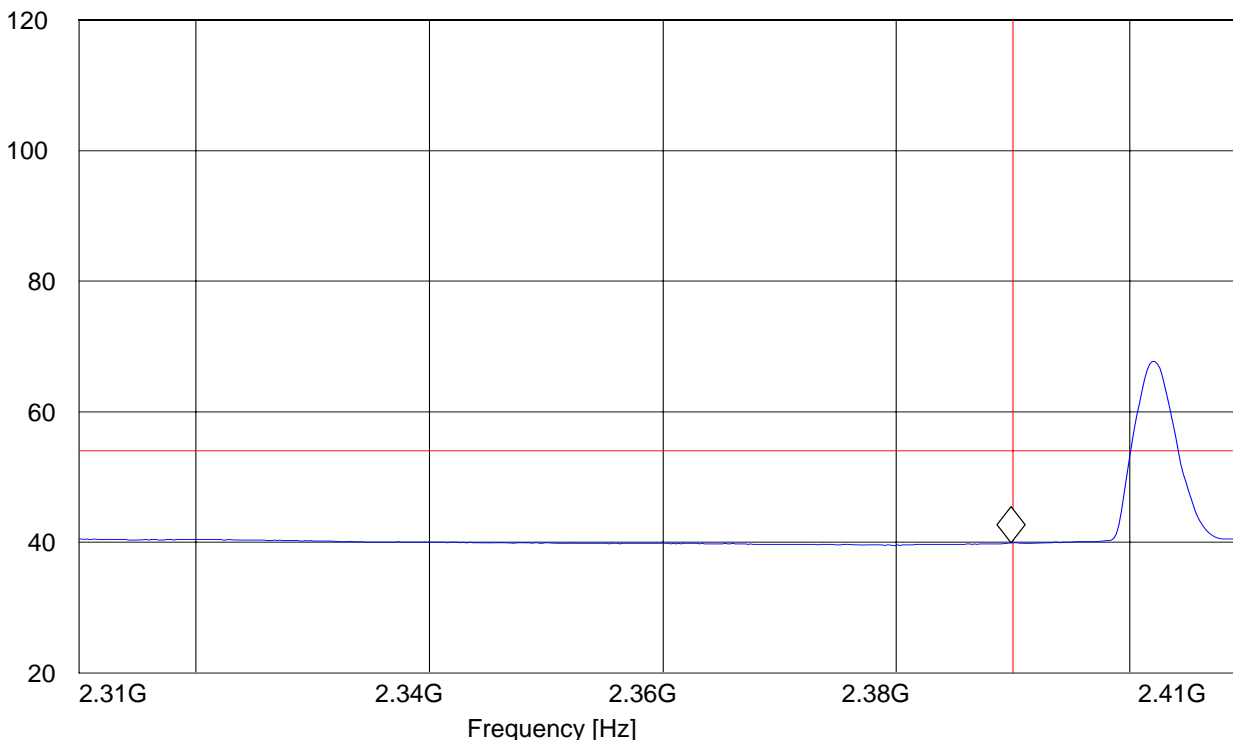


(2480MHz) HIGHER BAND EDGE PEAK - $\pi/4$ DQPSK MODULATION

EUT: W63H
Customer:: Casio Hitachi
Test Mode: BT DQPSK Ch 78
ANT Orientation: V
EUT Orientation: V
Test Engineer: Marc
Voltage: battery and AC
Comments: TT @ 217°

SWEEP TABLE: "FCC15.247 HBE_PK"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert
MaxPeak					

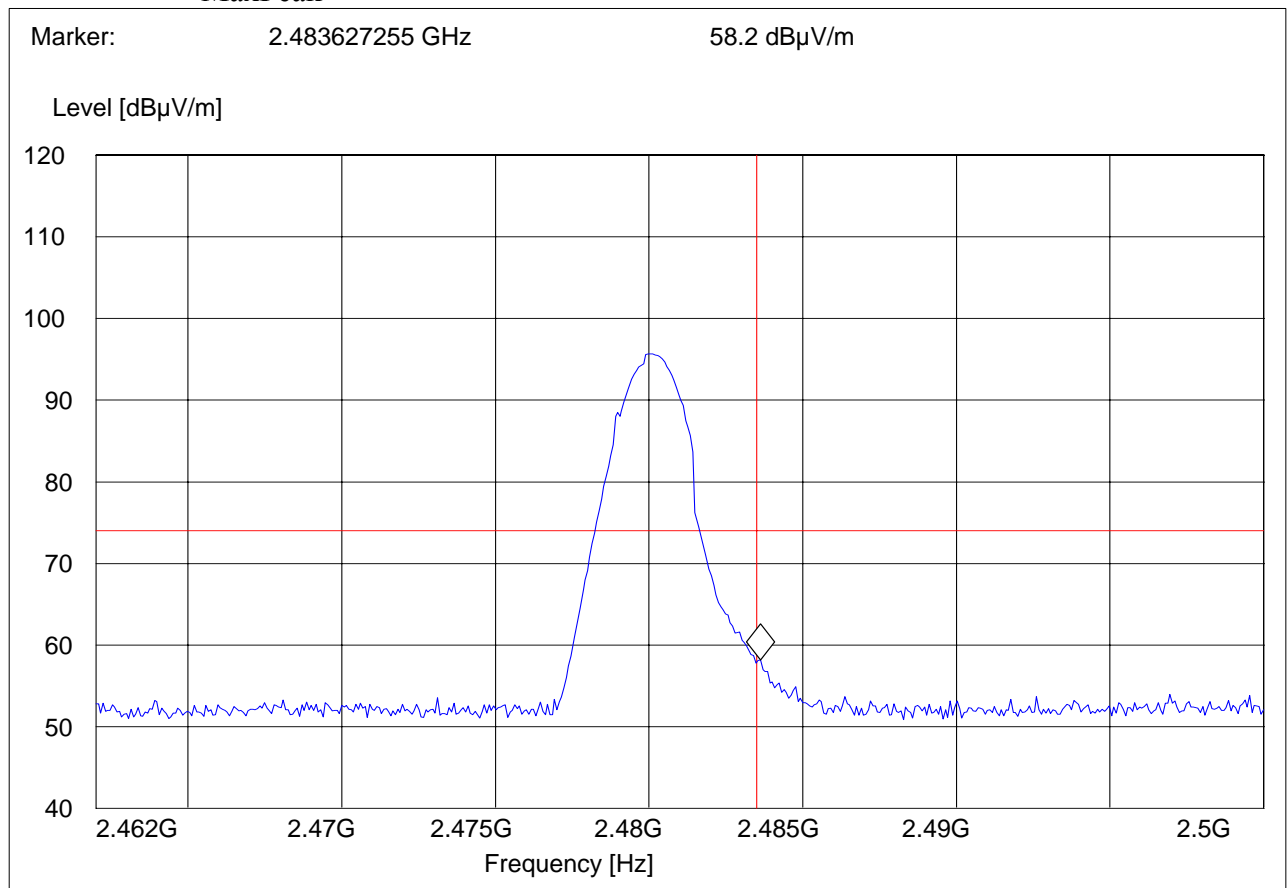


HIGHER BAND EDGE AVERAGE- $\pi/4$ DQPSK MODULATION

EUT: W63H
Customer:: Casio Hitachi
Test Mode: BT DQPSK Ch 78
ANT Orientation: V
EUT Orientation: V
Test Engineer: Marc
Voltage: battery and AC
Comments: TT @ 217°

SWEEP TABLE: "FCC15.247 HBE_AVG"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn AF horz

Marker: 2.483547094 GHz 44.55 dB μ V/m

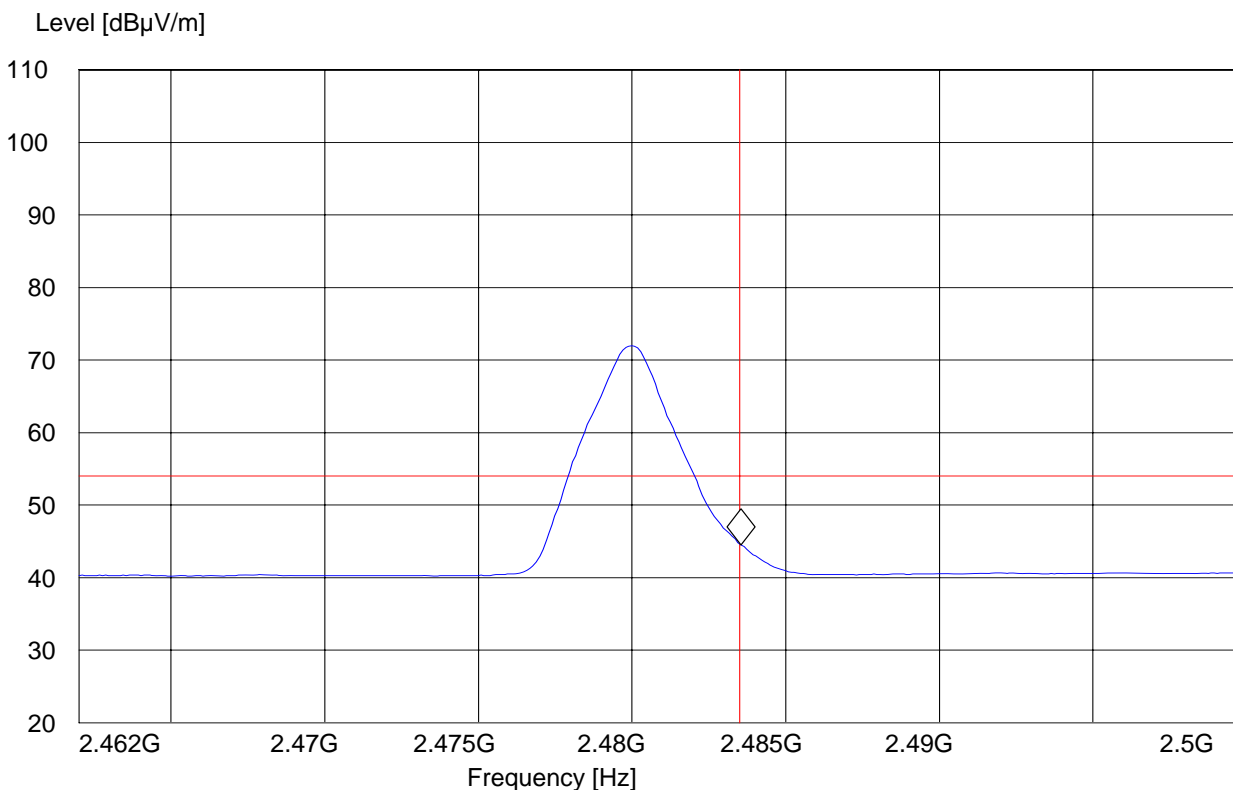


**5.2.4 RESULTS: 8DPSK
(2402MHz) LOWER BAND EDGE PEAK - 8DPSK MODULATION**

EUT: W63H
Customer:: Casio Hitachi
Test Mode: BT 8DPSK Ch 0
ANT Orientation: V
EUT Orientation: V
Test Engineer: Marc
Voltage: battery and AC
Comments: TT @ 217°

SWEEP TABLE: "FCC15.247 LBE_PK"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert
MaxPeak					

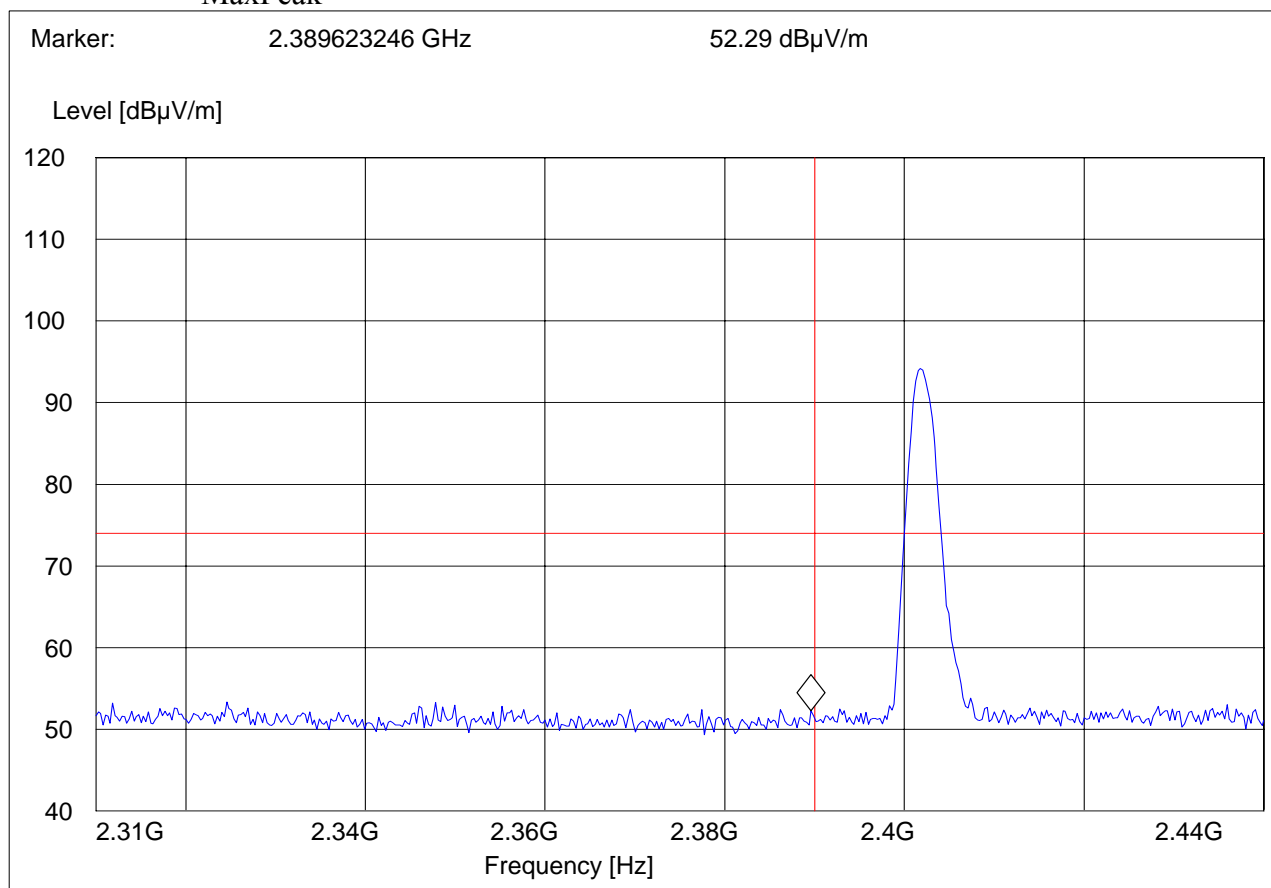

(2402MHz) LOWER BAND EDGE AVERAGE -8DPSK MODULATION


EUT: W63H
Customer:: Casio Hitachi
Test Mode: BT 8DPSK Ch 0
ANT Orientation: V
EUT Orientation: V
Test Engineer: Marc
Voltage: battery and AC
Comments: TT @ 217°

SWEEP TABLE: "FCC15.247 LBE_AVG"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn AF_vert

Marker: 2.389799599 GHz 39.89 dBμV/m

Level [dBμV/m]

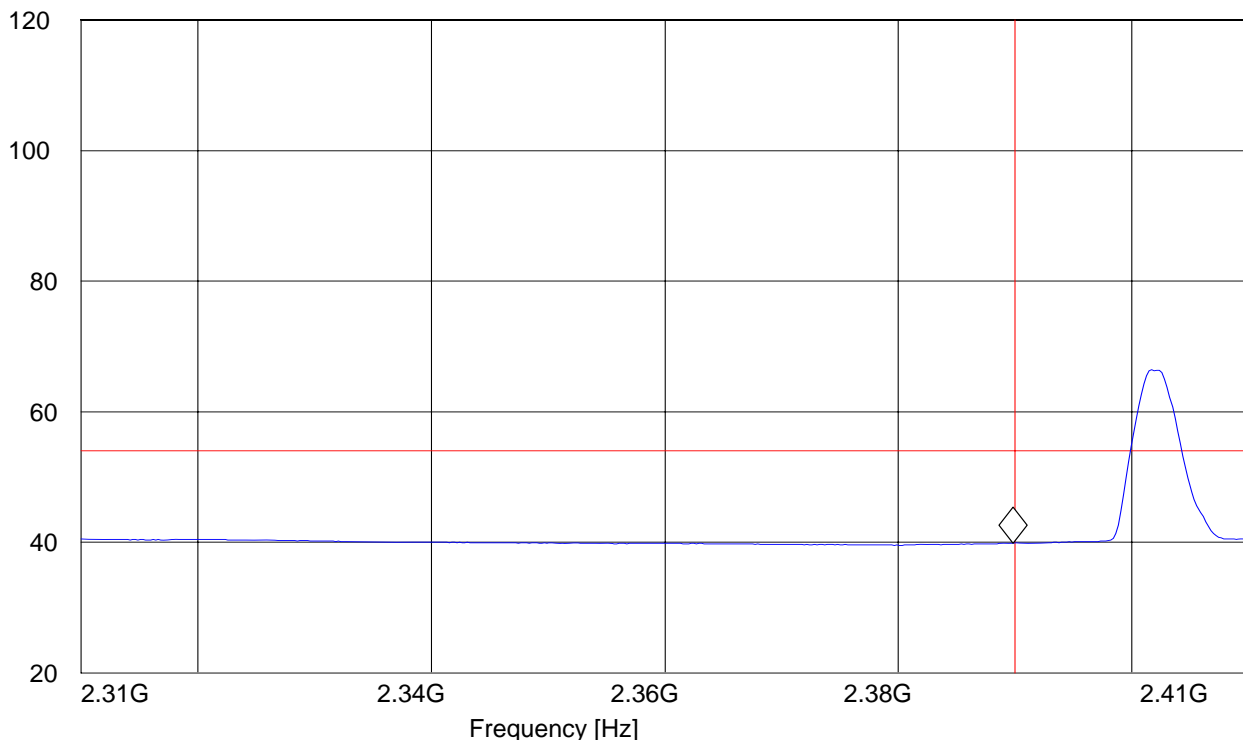


RESULTS (2480MHz) HIGHER BAND EDGE PEAK - 8DPSK MODULATION

EUT: W63H
Customer:: Casio Hitachi
Test Mode: BT 8DPSK Ch 78
ANT Orientation: V
EUT Orientation: V
Test Engineer: Marc
Voltage: battery and AC
Comments: TT @ 217°

SWEEP TABLE: "FCC15.247 HBE_PK"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert
MaxPeak					

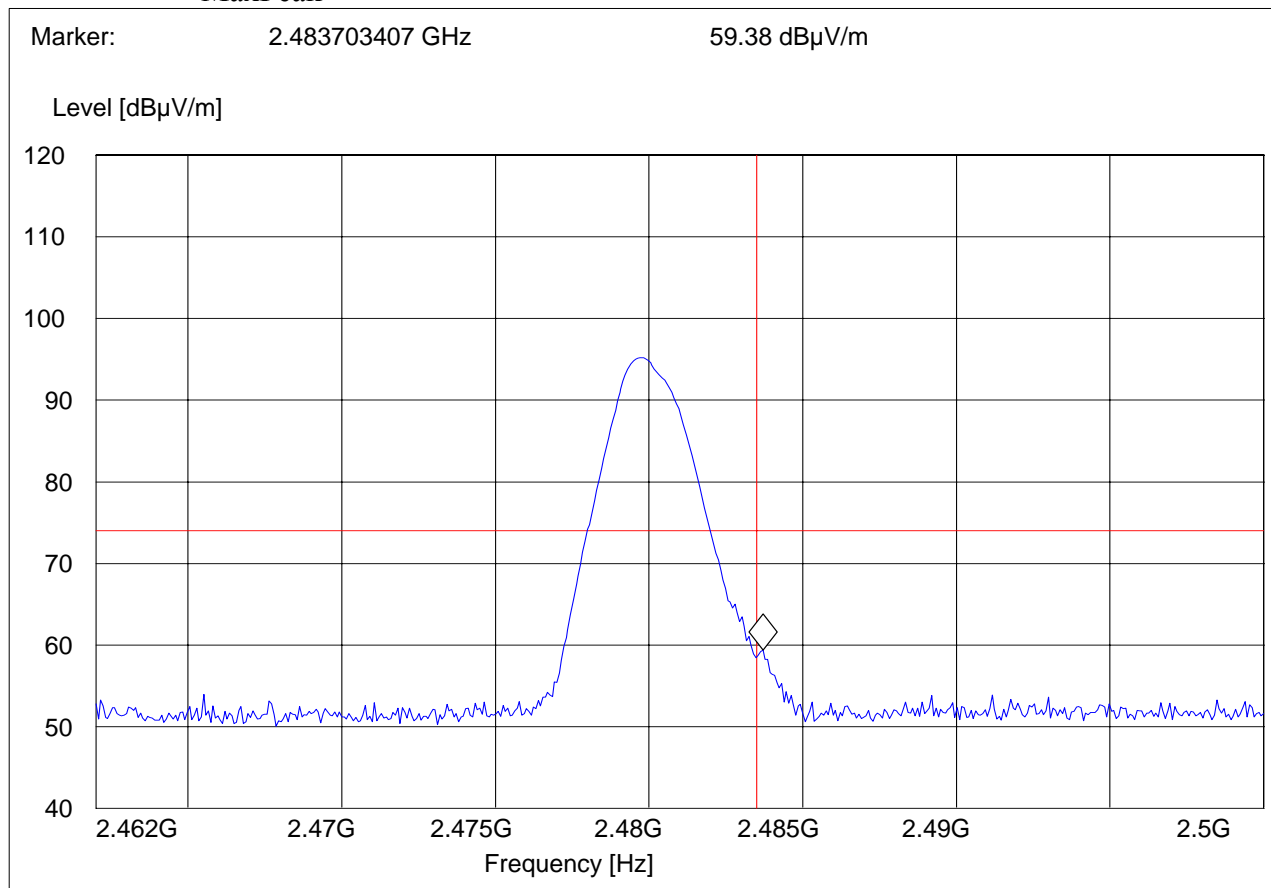


HIGHER BAND EDGE AVERAGE-8DPSK MODULATION

EUT: W63H
Customer:: Casio Hitachi
Test Mode: BT 8DPSK Ch 78
ANT Orientation: V
EUT Orientation: V
Test Engineer: Marc
Voltage: battery and AC
Comments: TT @ 217°

SWEEP TABLE: "FCC15.247 HBE_AVG"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn AF horz

Marker: 2.483547094 GHz 45.5 dB μ V/m

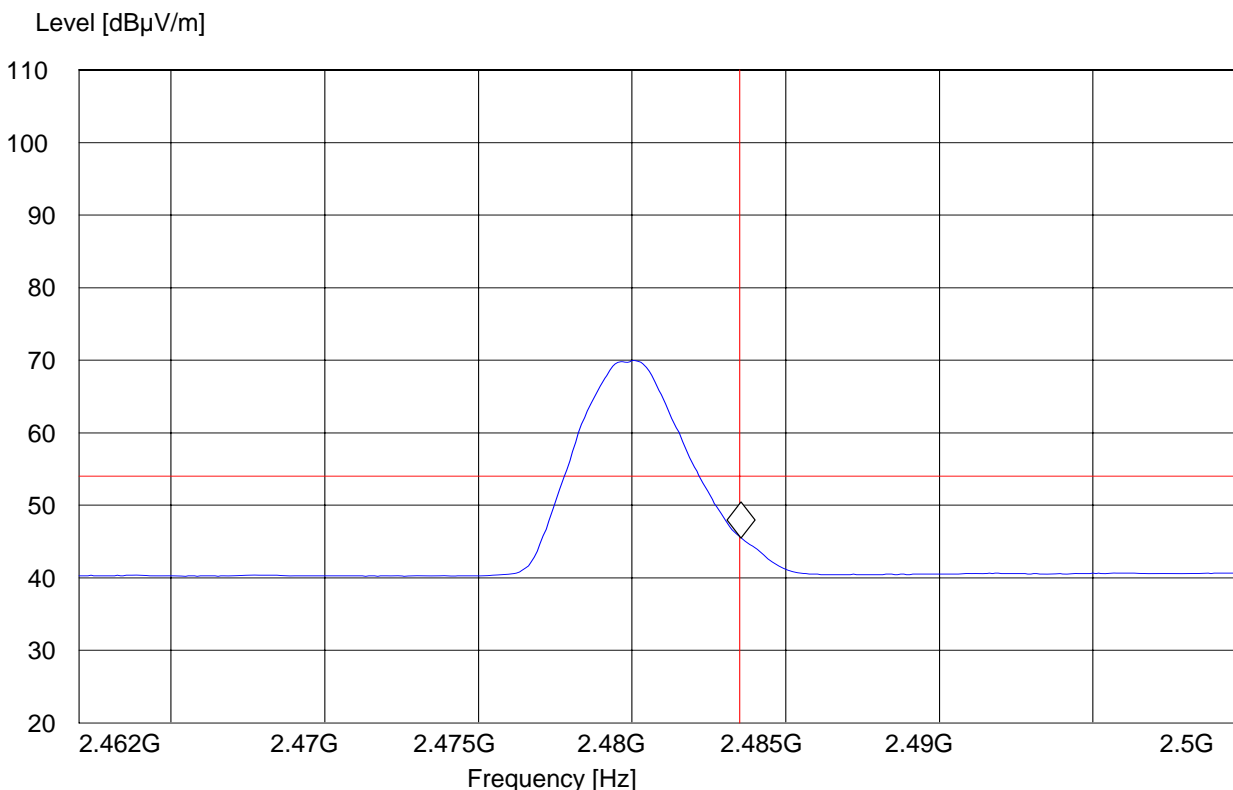

5.3 TRANSMITTER SPURIOUS EMISSIONS RADIATED § 15.247/15.205/15.209

5.3.1 LIMITS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

*PEAK LIMIT= 74dBuV/m

*AVG. LIMIT= 54dBuV/m

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.

2. All measurements are done in peak mode using an average limit , unless specified with the plots.

Results for the radiated measurements below 30MHz according § 15.33

Frequency	Measured values	Remarks
9KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested channels

5.3.2 RESULTS**30MHz – 1GHz****Antenna: vertical****Note: Worse case representation for all channels.**

EUT: W63H

Customer:: Casio Hitachi

Test Mode: BT GFSK Ch 39

ANT Orientation: V

EUT Orientation: V


Test Engineer: Marc

Voltage: battery and AC

Comments: TT @ 217°

SWEEP TABLE: "FCC15.247_30M-1G_Ver"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

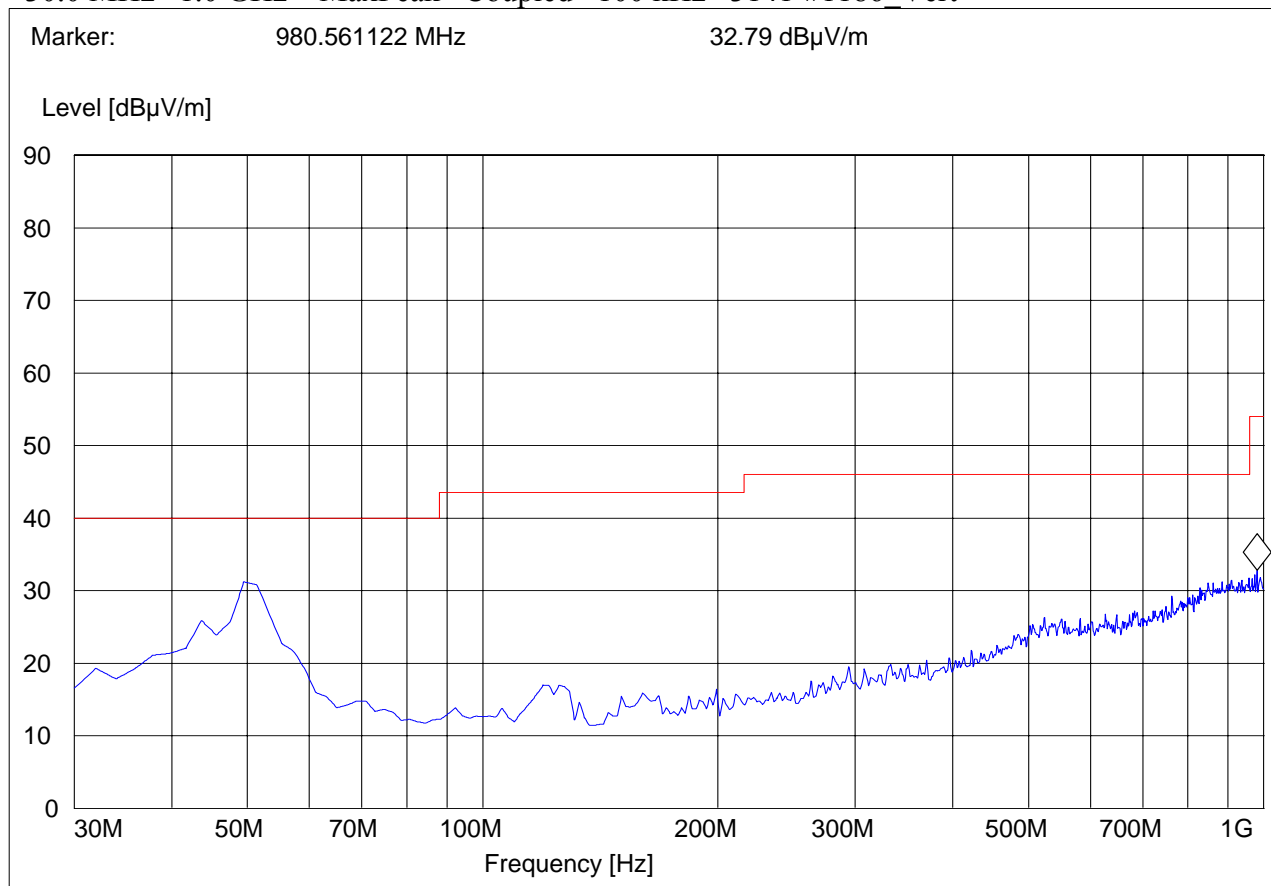

30MHz – 1GHz**Antenna: horizontal****Note: Worse case representation for all channels.**

EUT: W63H

Customer:: Casio Hitachi

Test Mode: BT GFSK Ch 39

ANT Orientation: H

EUT Orientation: V

Test Engineer: Marc

Voltage: battery and AC


Comments: TT @ 217°

SWEEP TABLE: "FCC15.247_30M-1G_Hor"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horz

Marker: 992.224449 MHz 33.37 dBµV/m

Level [dBµV/m]

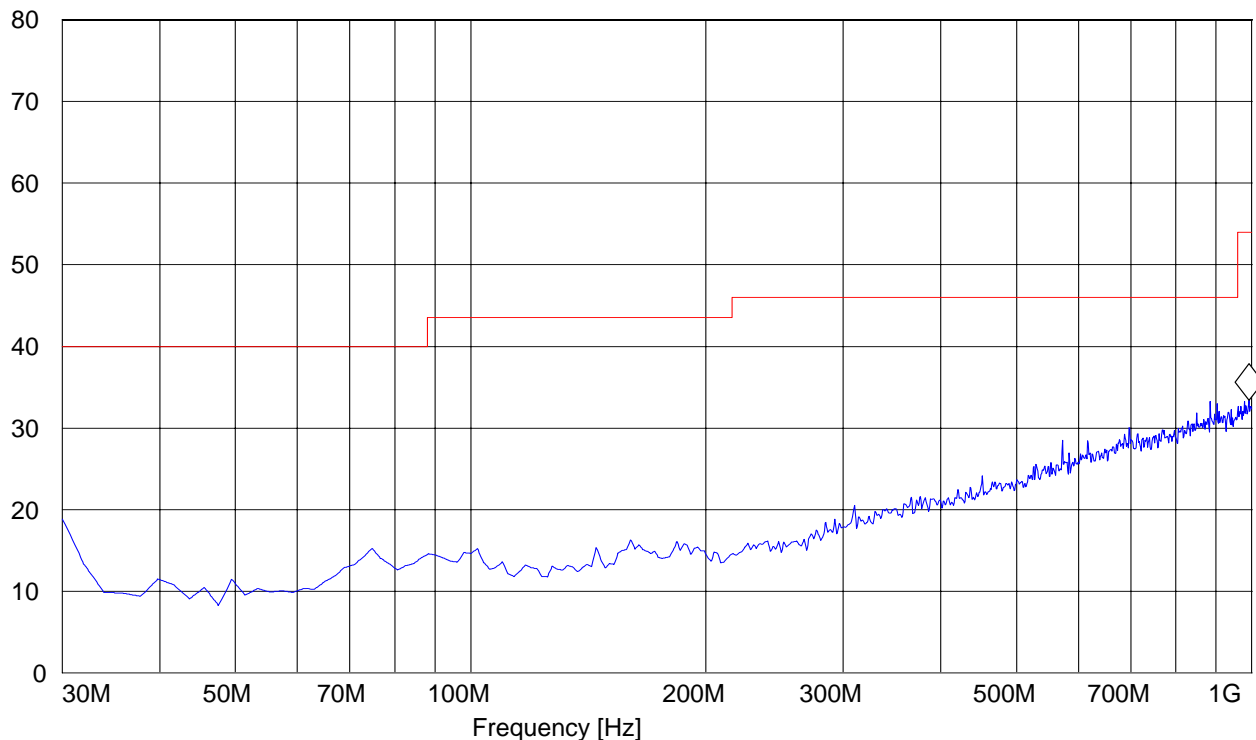

1-3GHz (2402MHz)**Note: The peak above the limit line is the carrier freq.****Note: Peak Reading vs. Average limit**

EUT: W63H

Customer:: Casio Hitachi

Test Mode: BT GFSK Ch 0

ANT Orientation: V

EUT Orientation: V

Test Engineer: Marc

Voltage: battery and AC


Comments: TT @ 217°

SWEEP TABLE: "FCC15.247_1-3G"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn AF_vert

Marker:	2.402805611 GHz	89.26 dBµV/m
---------	-----------------	--------------

Level [dBµV/m]

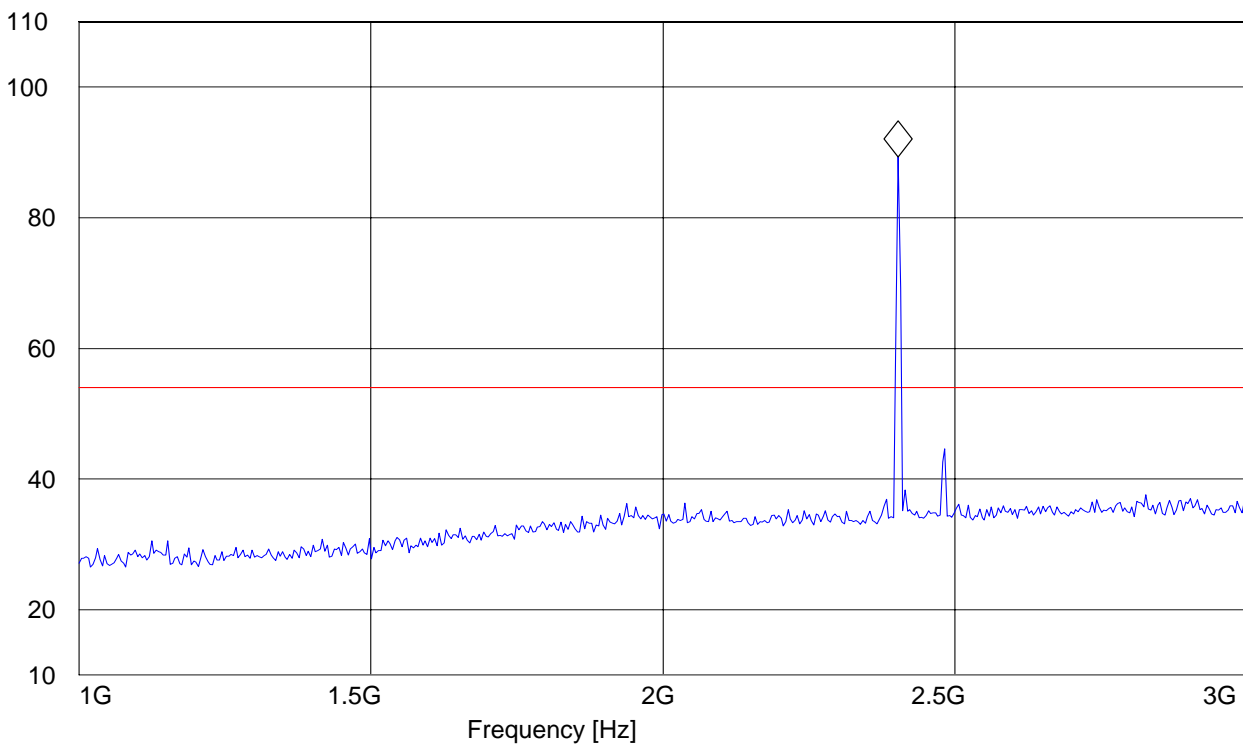

1-3GHz (2441MHz)**Note: The peaks above the limit line is the carrier freq.****Note: Peak Reading vs. Average limit**


EUT: W63H
Customer:: Casio Hitachi
Test Mode: BT GFSK Ch 39
ANT Orientation: V
EUT Orientation: V
Test Engineer: Marc
Voltage: battery and AC
Comments: TT @ 217°

SWEEP TABLE: "FCC15.247_1-3G"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.442885772 GHz 89.63 dBμV/m

Level [dBμV/m]

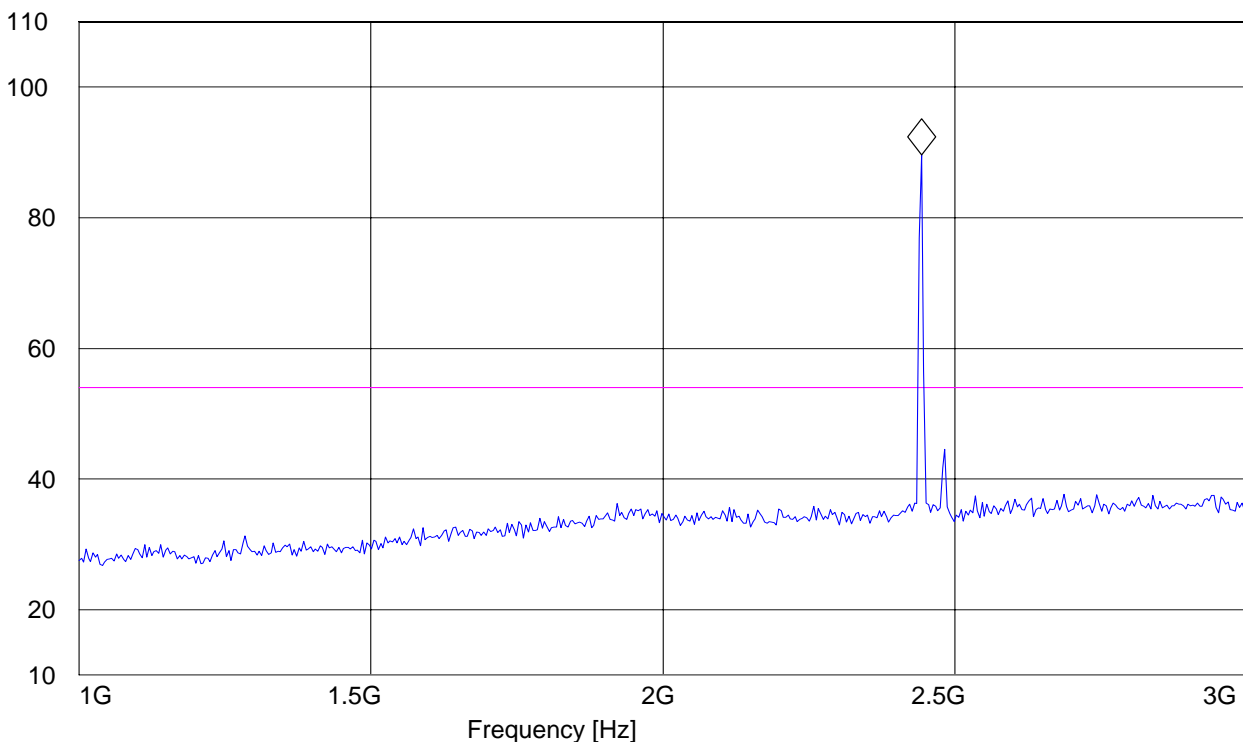

1-3GHz (2480MHz)**Note: The peaks above the limit line is the carrier freq.****Note: Peak Reading vs. Average limit**

EUT: W63H

Customer:: Casio Hitachi

Test Mode: BT GFSK Ch 78

ANT Orientation: V

EUT Orientation: V

Test Engineer: Marc

Voltage: battery and AC


Comments: TT @ 217°

SWEEP TABLE: "FCC15.247_1-3G"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn AF_vert

Marker: 2.482965932 GHz 90.52 dBµV/m

Level [dBµV/m]

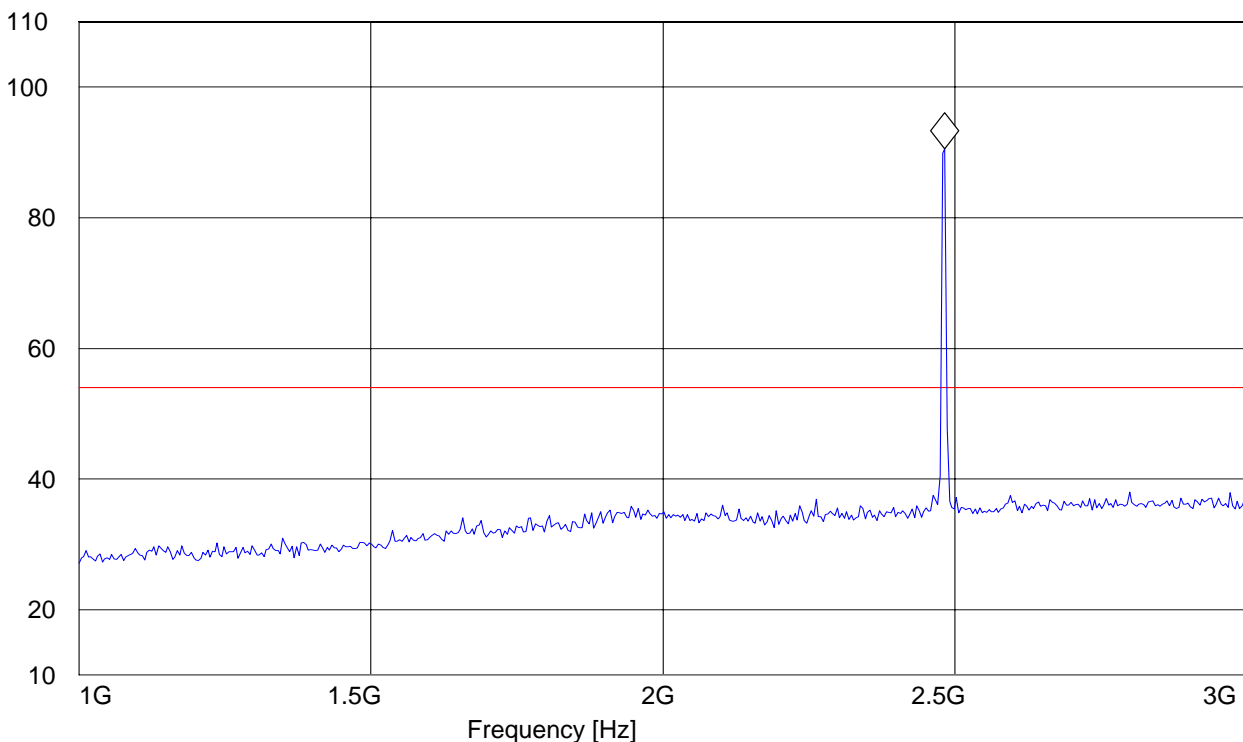

3-18GHz (2402MHz)

Note: Peak Reading vs. Average limit


EUT: W63H
Customer:: Casio Hitachi
Test Mode: BT GFSK Ch 0
ANT Orientation: V
EUT Orientation: V
Test Engineer: Marc
Voltage: battery and AC
Comments: TT @ 217°

SWEEP TABLE: "FCC15.247_3-18G"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 4.803607214 GHz 46.54 dBμV/m

Level [dBμV/m]

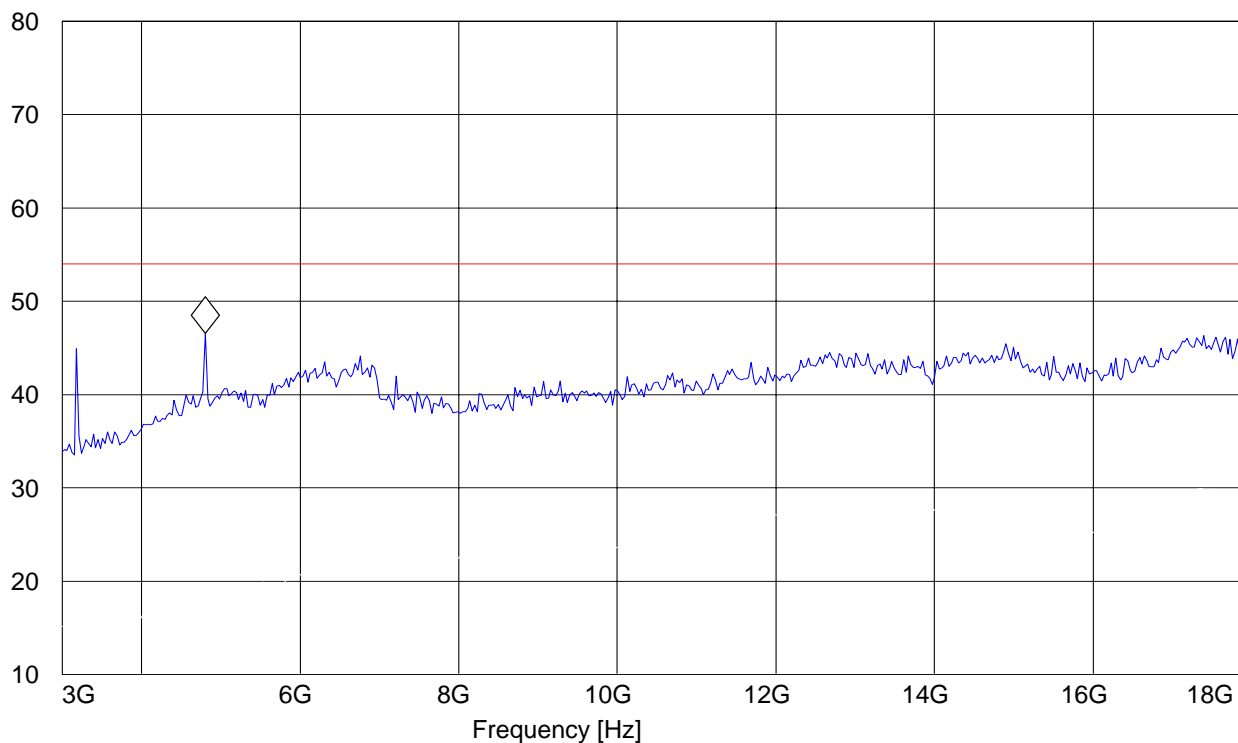

3-18GHz (2441MHz)

Note: Peak Reading vs. Average limit


EUT: W63H
Customer:: Casio Hitachi
Test Mode: BT GFSK Ch 39
ANT Orientation: V
EUT Orientation: V
Test Engineer: Marc
Voltage: battery and AC
Comments: TT @ 217°

SWEEP TABLE: "FCC15.247_3-18G"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 17.519038076 GHz 48.57 dBμV/m

Level [dBμV/m]

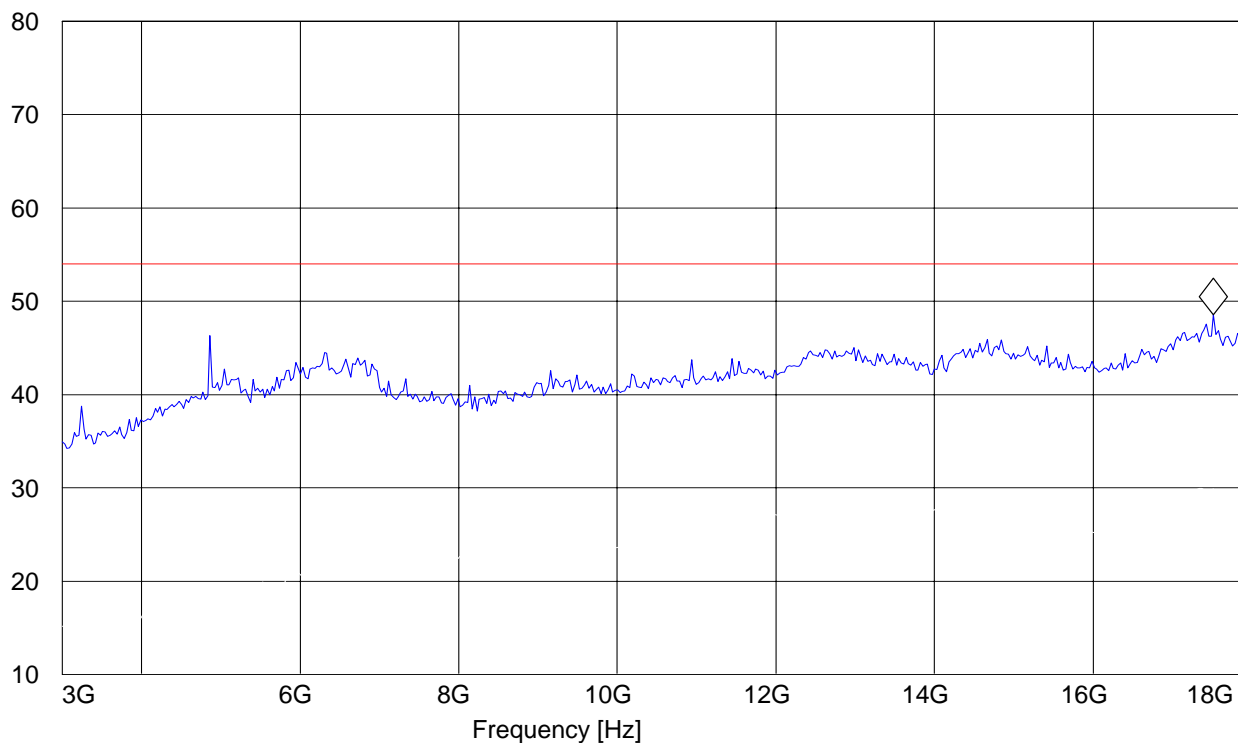

3-18GHz (2480MHz)**Note: Peak Reading vs. Average limit**

EUT: W63H

Customer:: Casio Hitachi

Test Mode: BT GFSK Ch 78

ANT Orientation: V

EUT Orientation: V

Test Engineer: Marc

Voltage: battery and AC


Comments: TT @ 217°

SWEEP TABLE: "FCC15.247_3-18G"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 17.128256513 GHz 46.5 dBµV/m

Level [dBµV/m]

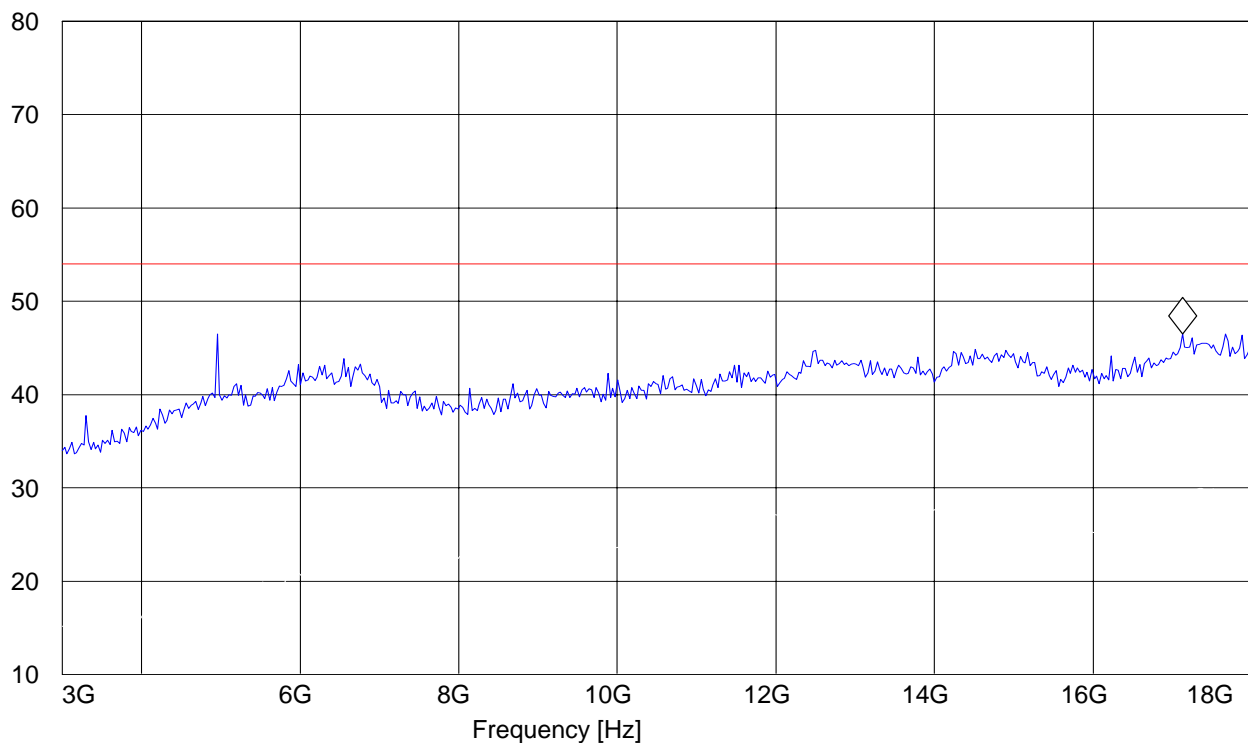

18-25GHz**Note: This plot is valid for low, mid, high channels (worst-case plot)****Note: Peak Reading vs. Average limit**

EUT: W63H

Customer:: Casio Hitachi

Test Mode: BT GFSK Ch 39

ANT Orientation: V

EUT Orientation: V


Test Engineer: Marc

Voltage: battery and AC

Comments: TT @ 217°

SWEEP TABLE: "FCC15.247_18-26.5G"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
18.0 GHz	26.5 GHz	MaxPeak	Coupled	100 kHz	Horn # 3116_18-40G
		MaxPeak			

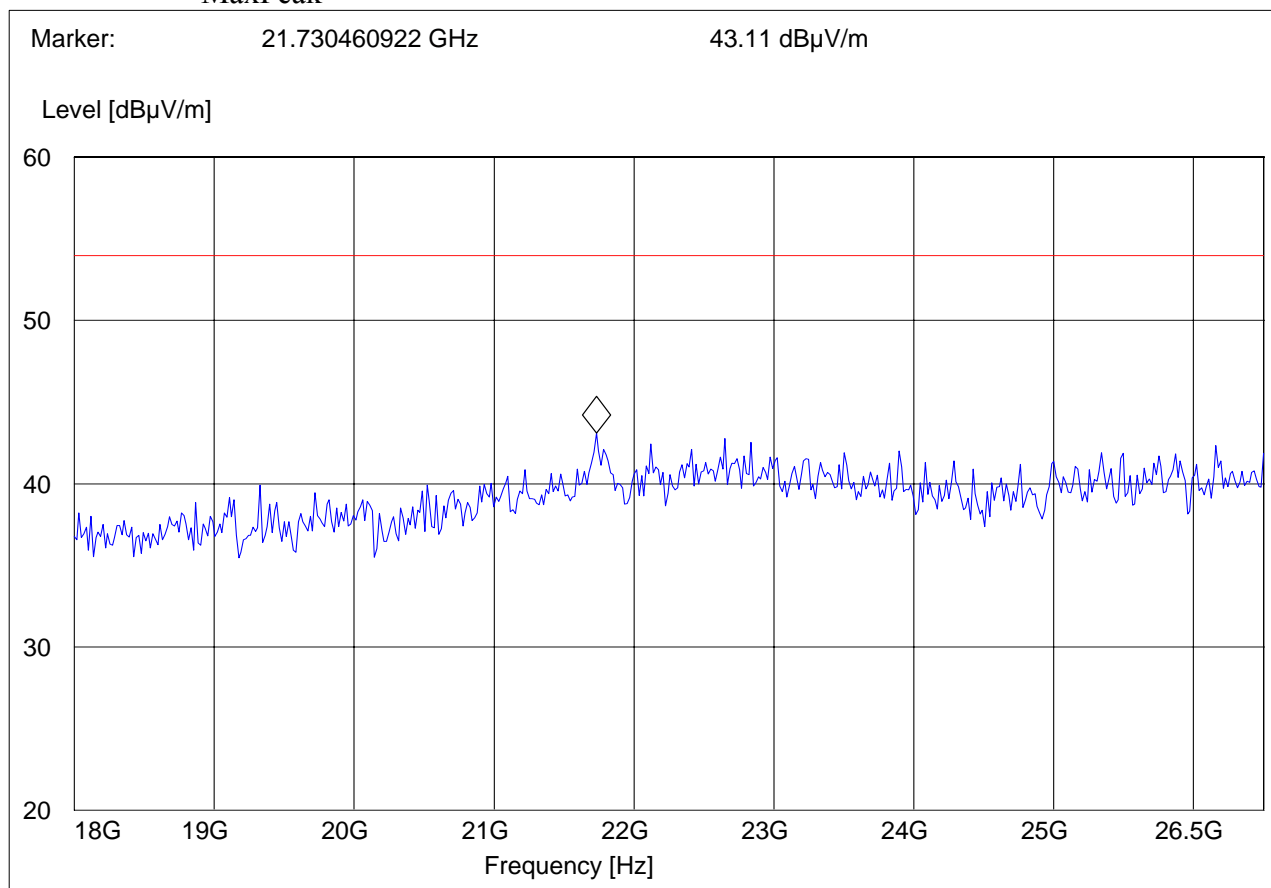

6 Measurements (Conducted)

6.1 MAXIMUM PEAK OUTPUT POWER § 15.247 (CONDUCTED)

6.1.1 LIMIT SUB CLAUSE § 15.247 (b) (1)

Frequency range	RF power output
2400-2483.5 MHz	30dBm

*limit is based upon antenna gain of less than or equal to 6dBi.

6.1.2 RESULTS:

Conducted Peak Power: GFSK

TEST CONDITIONS		Conducted Peak Power (dBm)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom} VDC	0.6	0.7	0.7
Measurement uncertainty		±0.5dBm		


Conducted Peak Power: $\pi / 4$ DQPSK

TEST CONDITIONS		Conducted Peak Power (dBm)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom} VDC	1.4	1.2	1.1
Measurement uncertainty		±0.5dBm		


Conducted Peak Power: 8DPSK


TEST CONDITIONS		Conducted Peak Power (dBm)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom} VDC	1.5	1.4	1.3
Measurement uncertainty		±0.5dBm		


NOTE: all conducted power measurements were done with 3MHz RBW/VBW

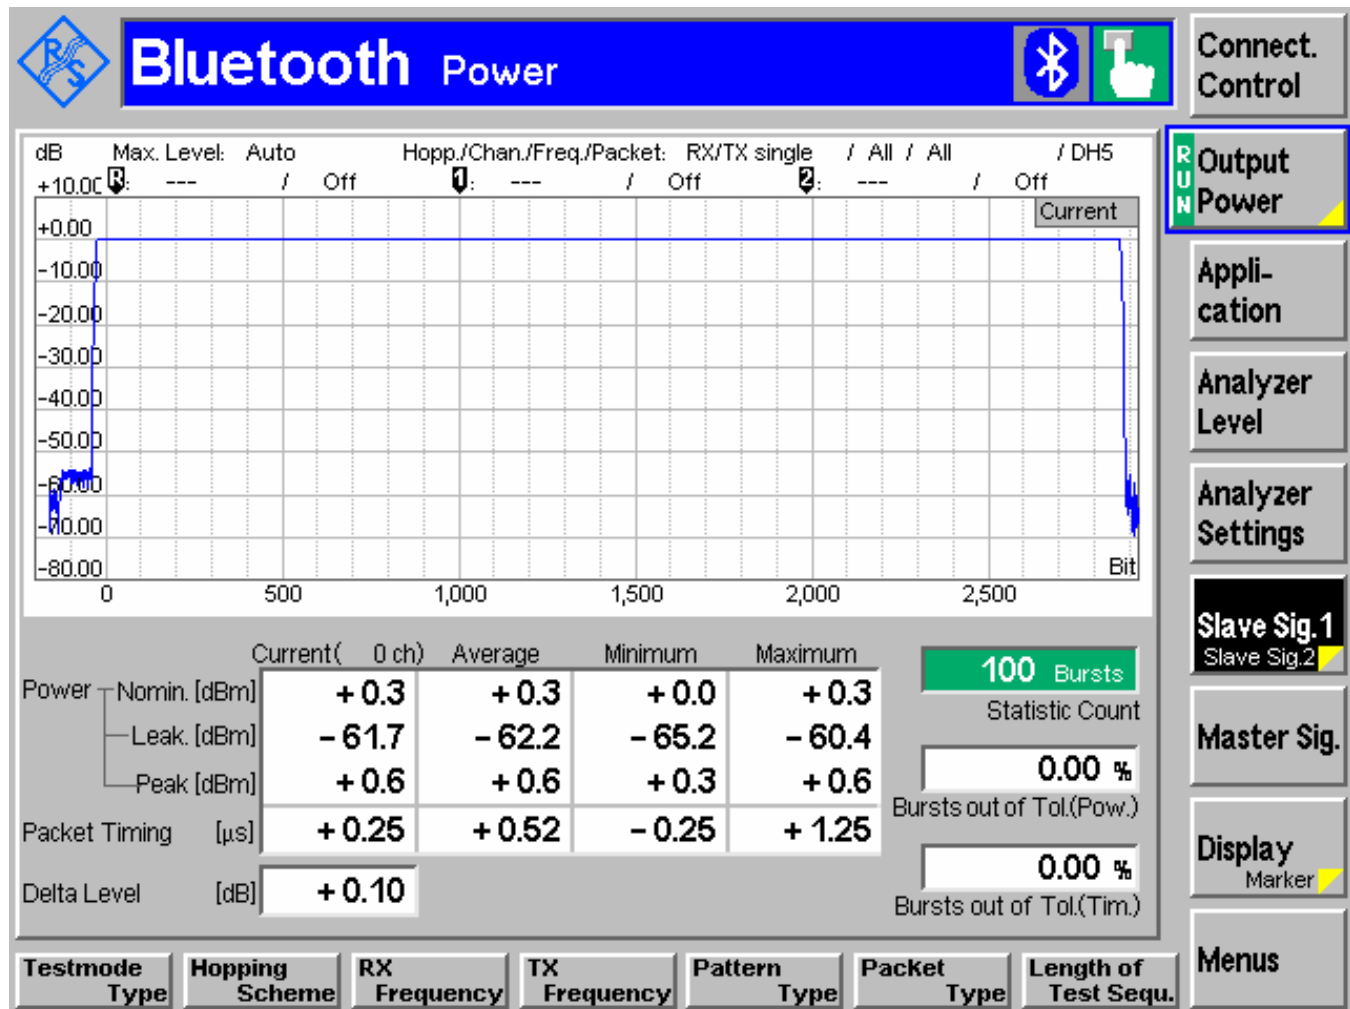
Conducted Peak Power GFSK 2402 MHz


Conducted Peak Power GFSK 2441 MHz

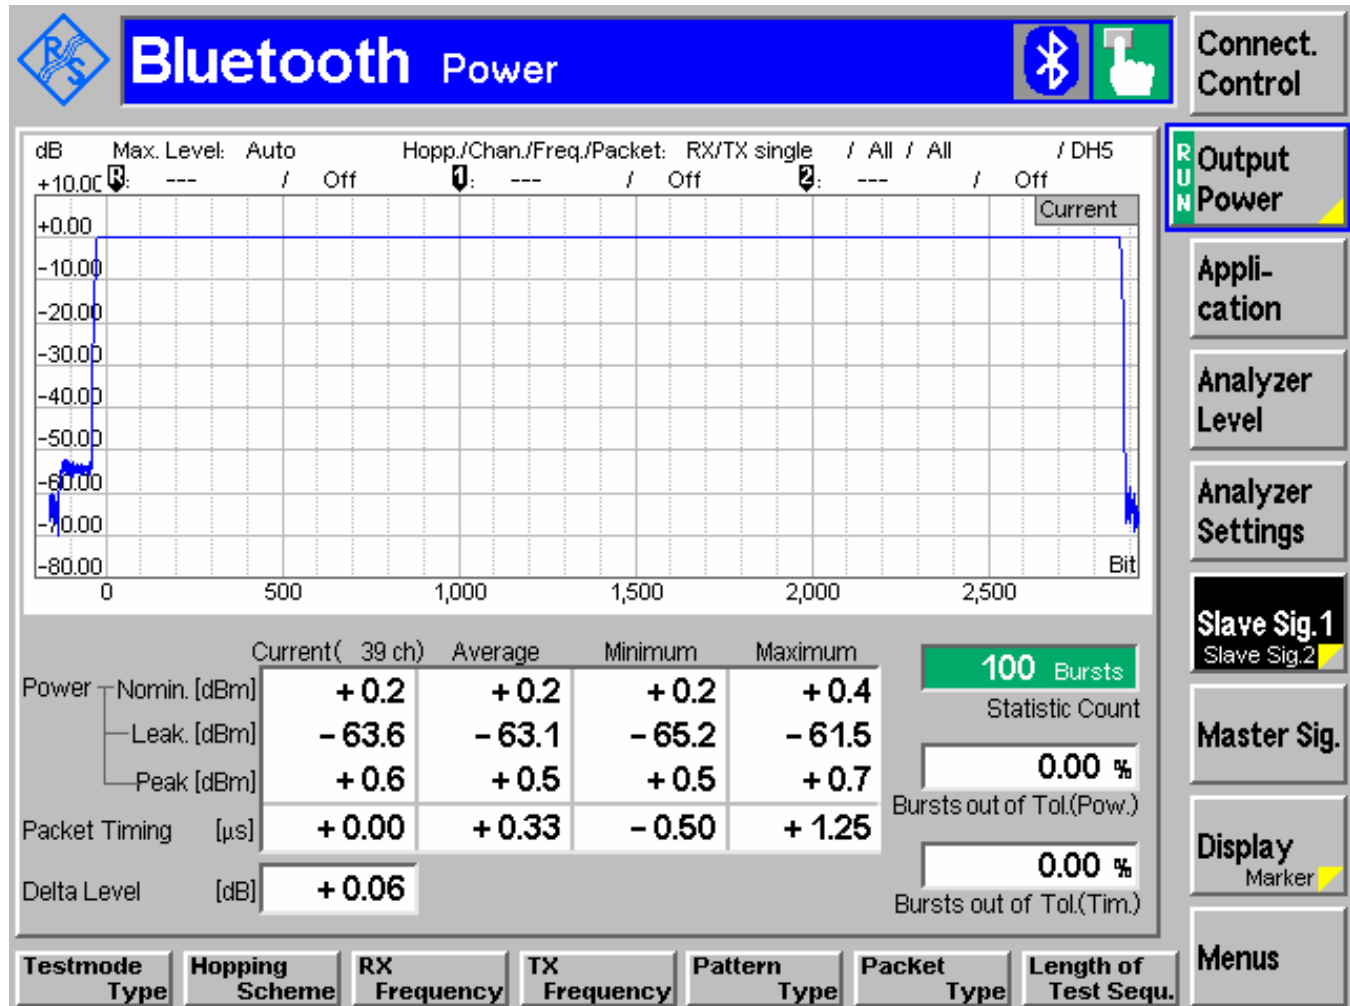


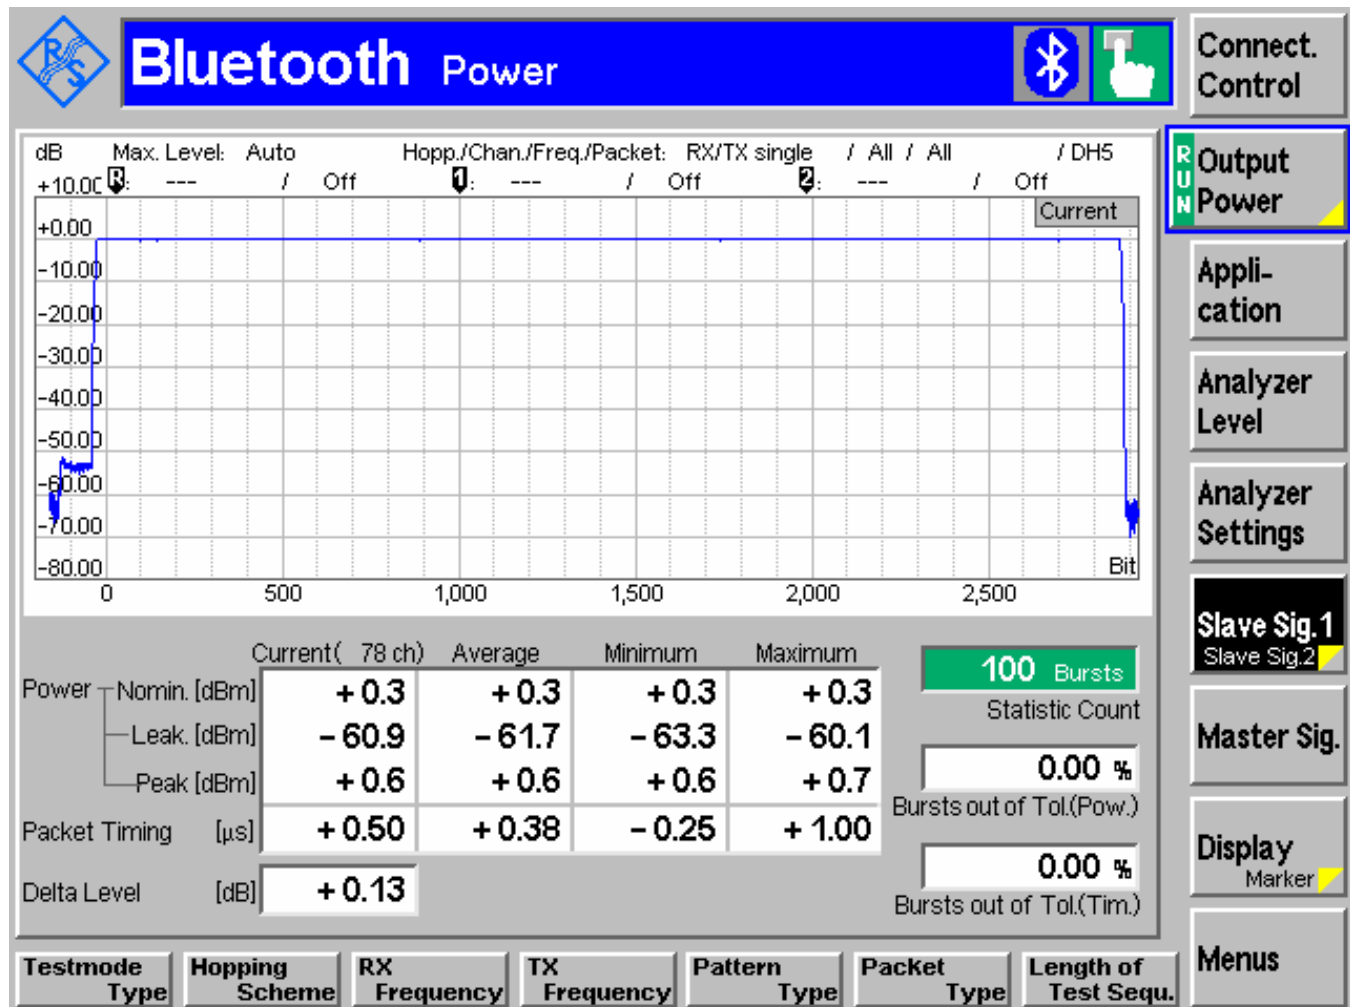Conducted Peak Power GFSK 2480 MHz

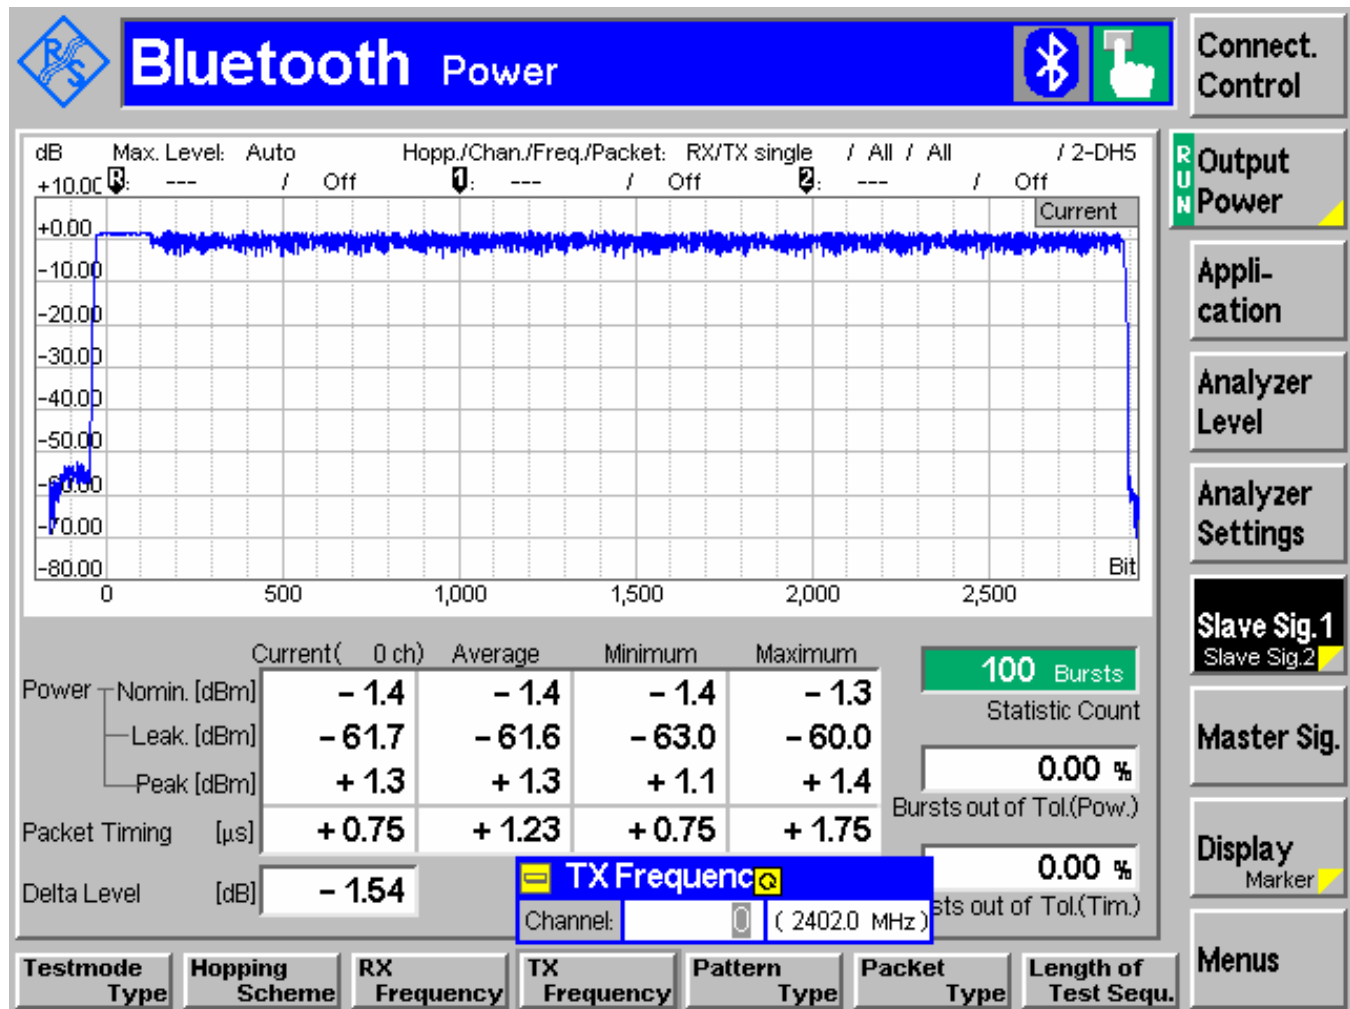
Conducted Peak Power π / 4 DQPSK 2402 MHz

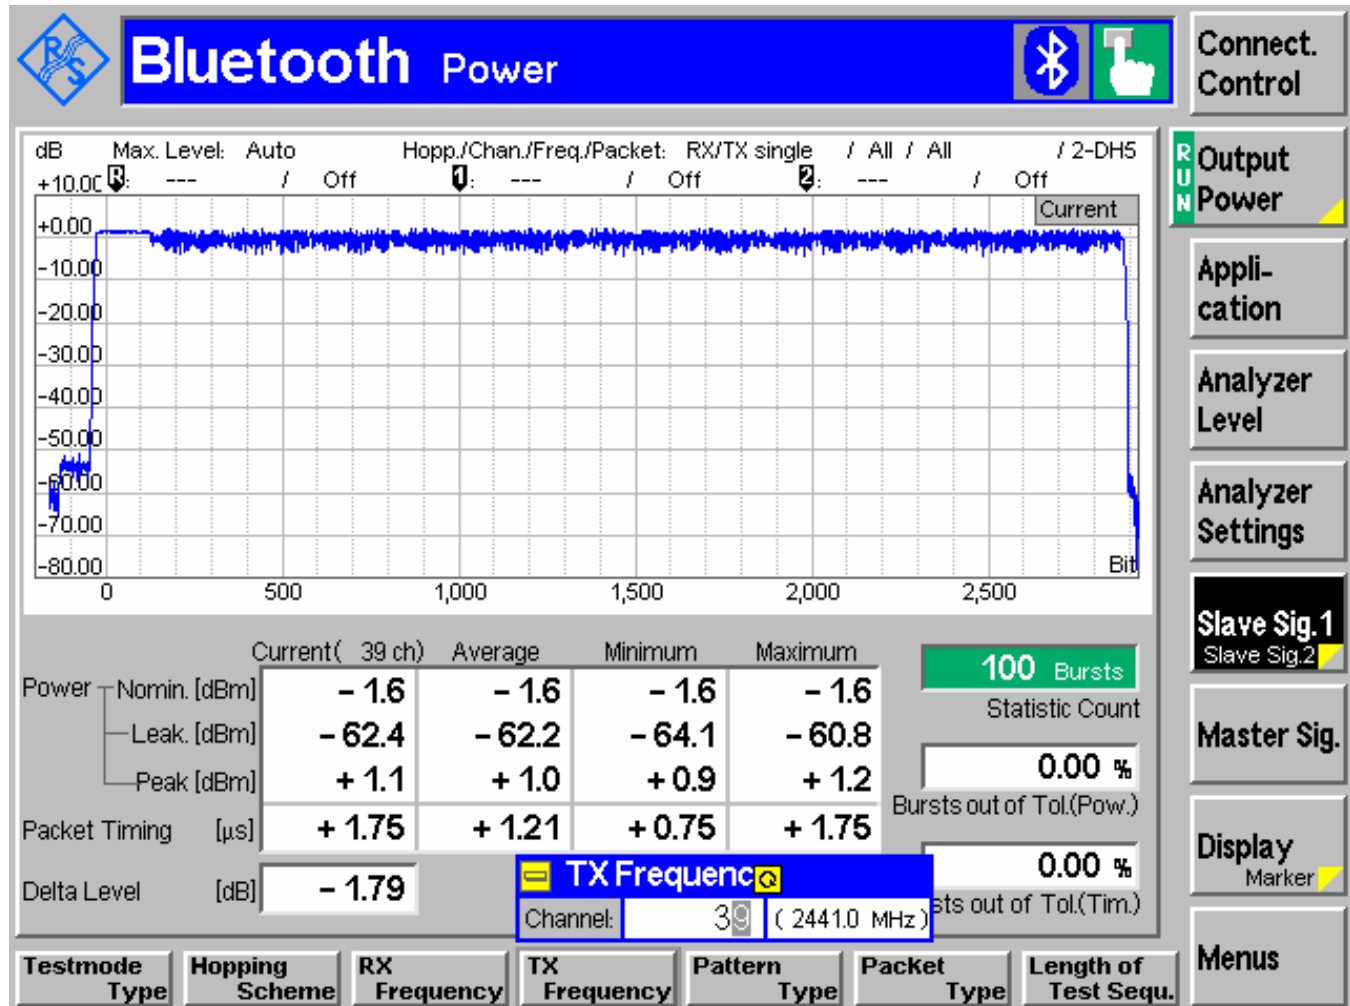
Conducted Peak Power π / 4 DQPSK 2441 MHz

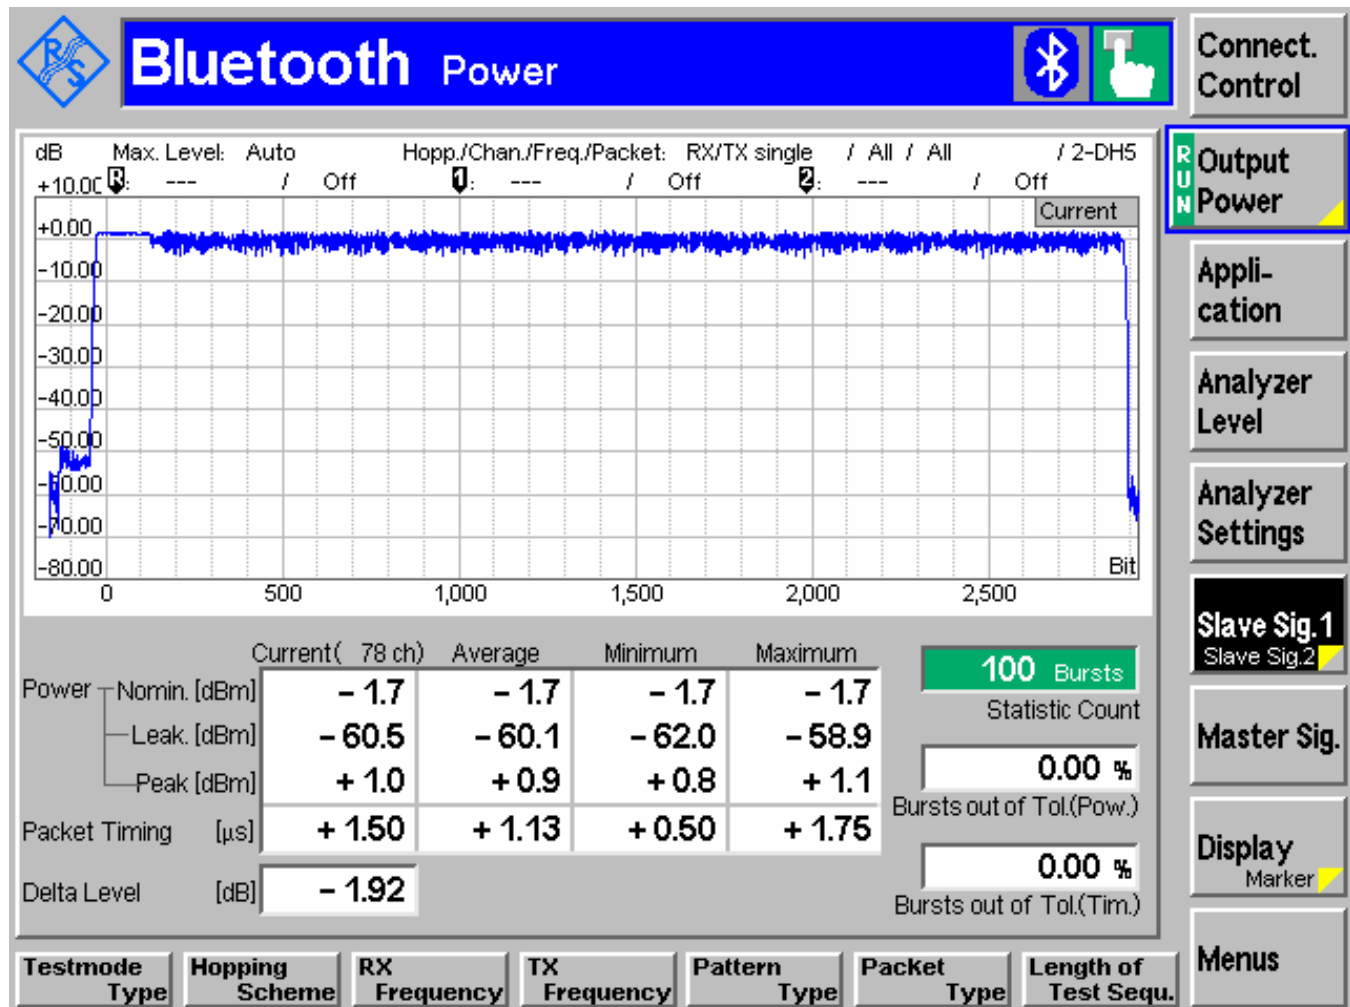Conducted Peak Power π / 4 DQPSK 2480 MHz

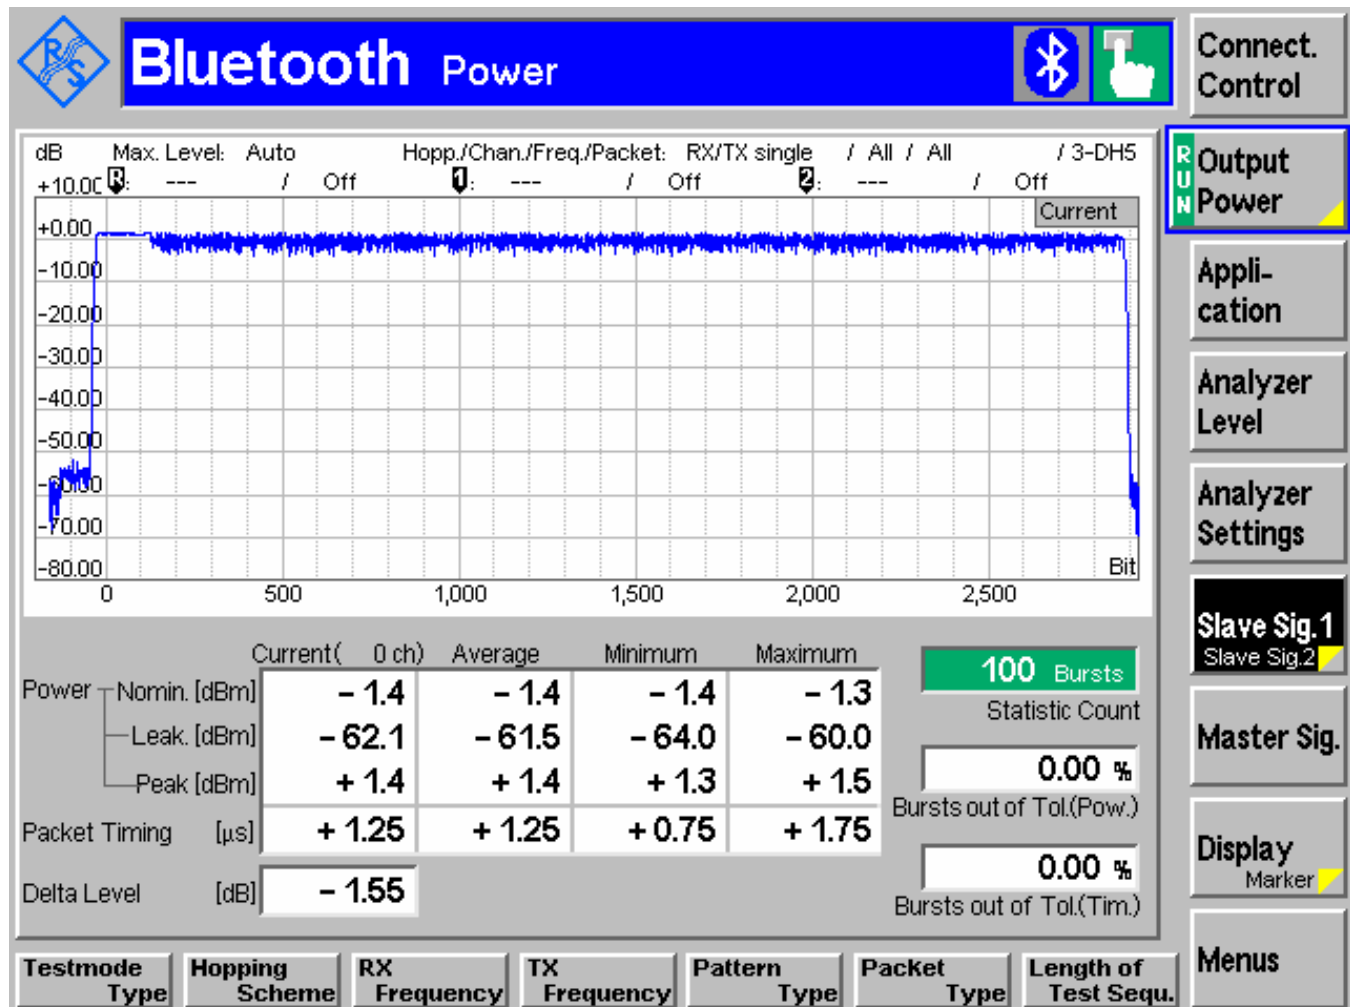Conducted Peak Power 8DPSK 2402 MHz

Conducted Peak Power 8DPSK 2441 MHz

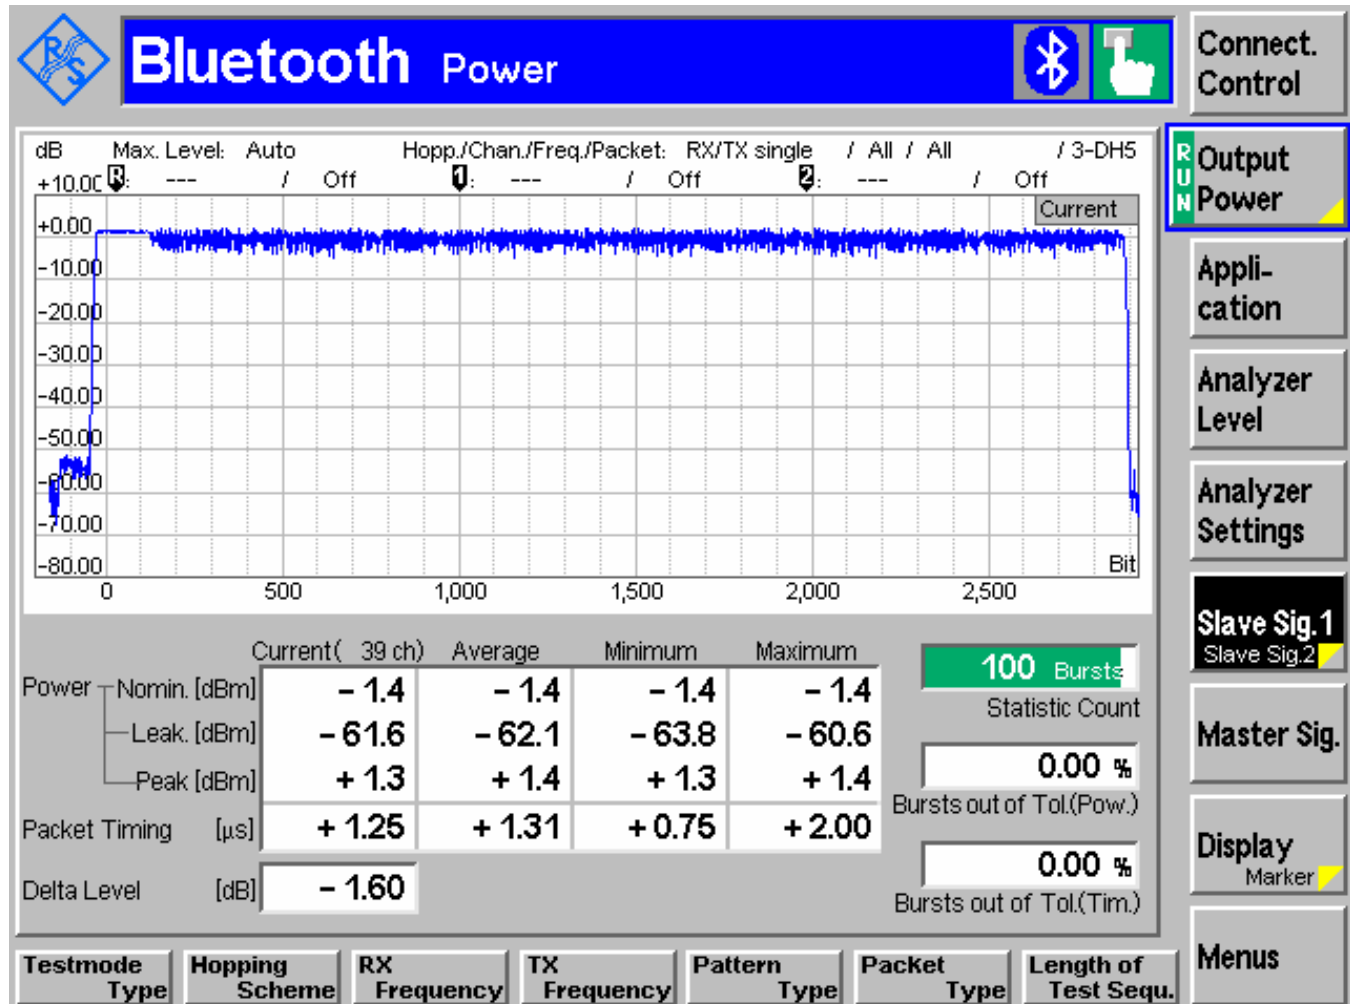

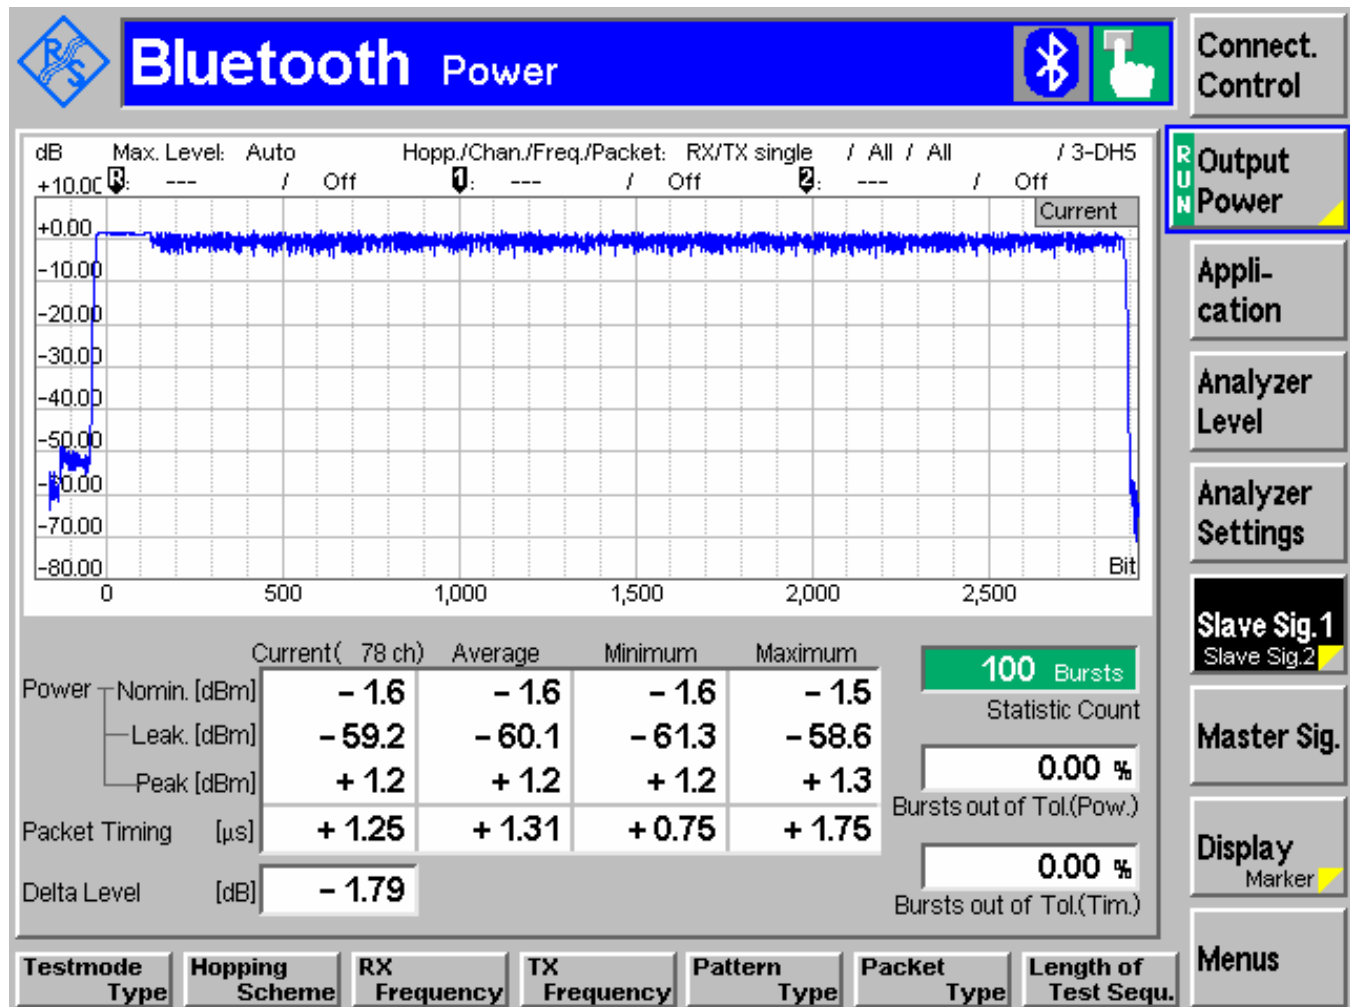Conducted Peak Power 8DPSK 2480 MHz

6.2 20dB BANDWIDTH

6.2.1 LIMIT SUB CLAUSE § 15.247 (a) (1) (i) (ii) (iii)

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

6.2.2 RESULTS:

20dB Bandwidth: GFSK


TEST CONDITIONS		20dB Bandwidth (kHz)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom} VDC	948	942	922


20dB Bandwidth: $\pi / 4$ DQPSK


TEST CONDITIONS		20dB Bandwidth (kHz)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom} VDC	1148	1151	1142

20dB Bandwidth: 8DPSK


TEST CONDITIONS		20dB Bandwidth (kHz)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom} VDC	1209	1209	1201

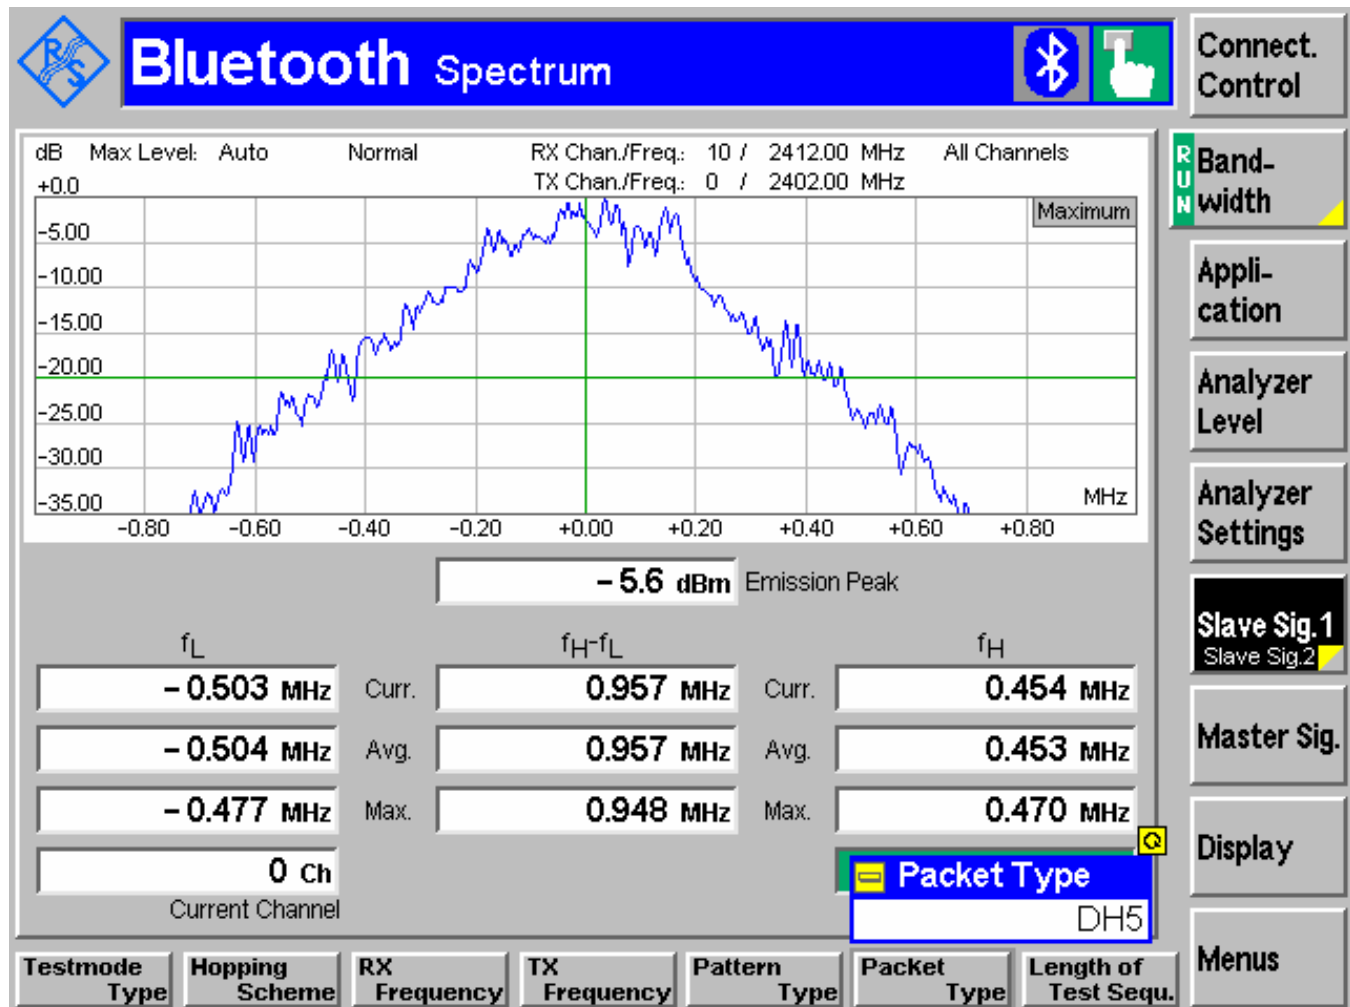
20dB Bandwidth GFSK 2402MHz

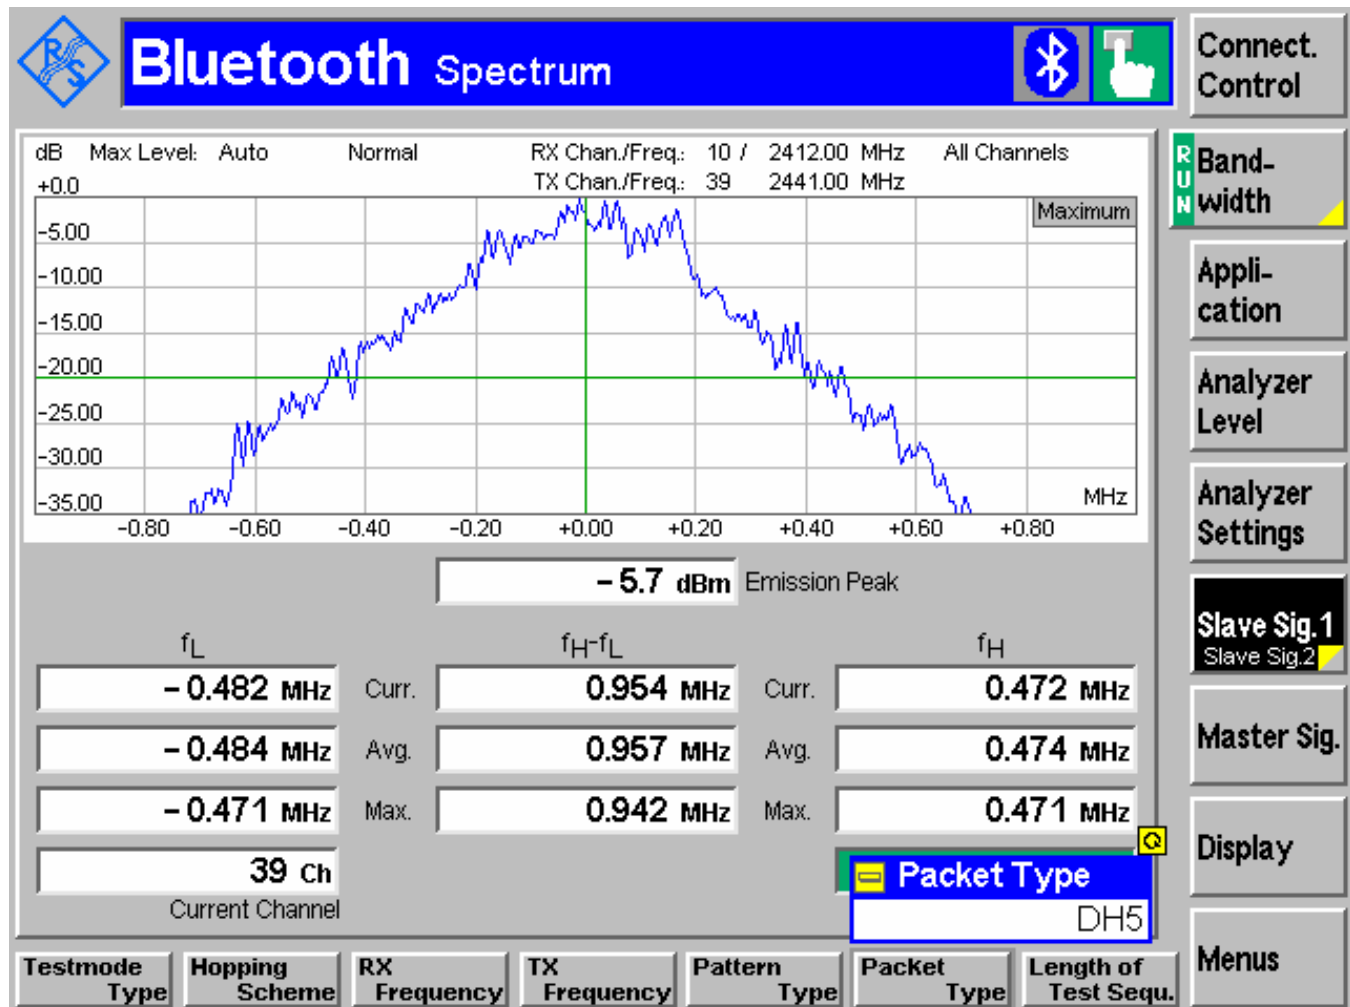
20dB Bandwidth GFSK 2441MHz

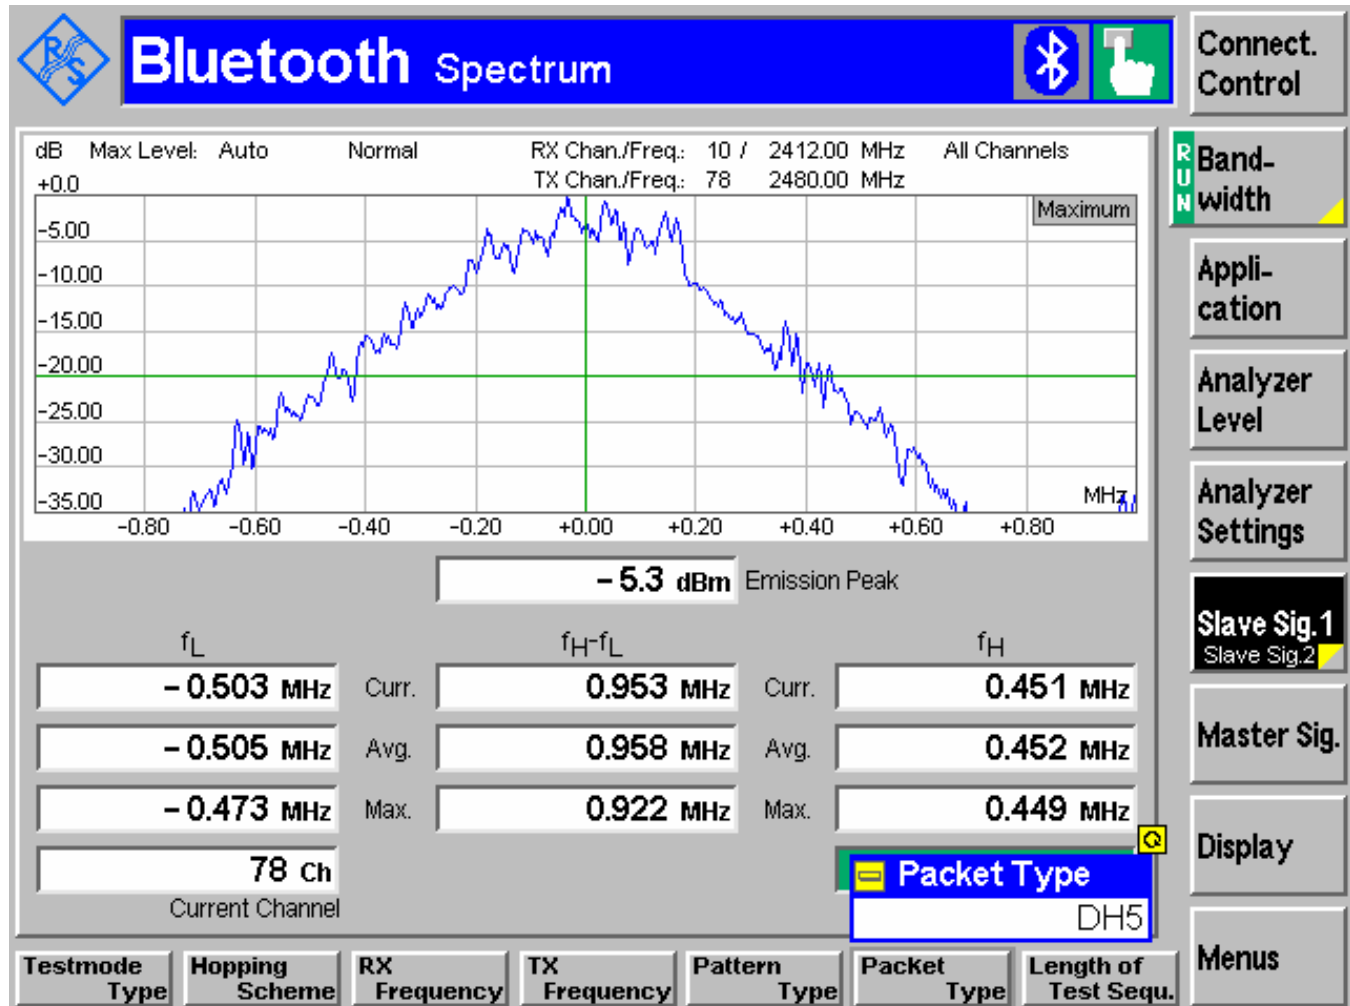
20dB Bandwidth GFSK 2480MHz


20dB Bandwidth $\pi / 4$ DQPSK 2402MHz

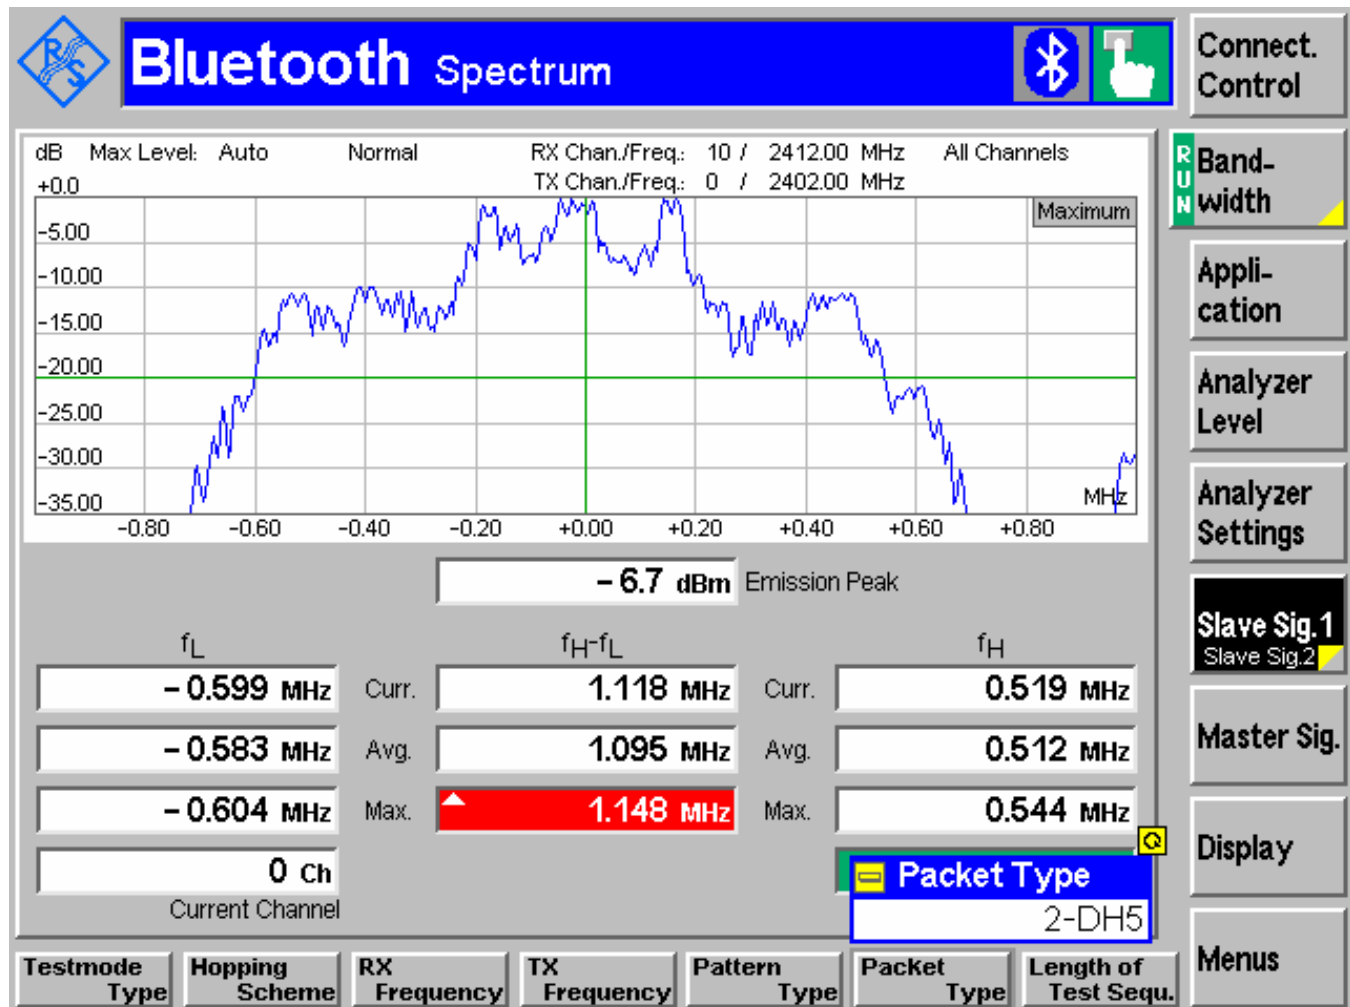


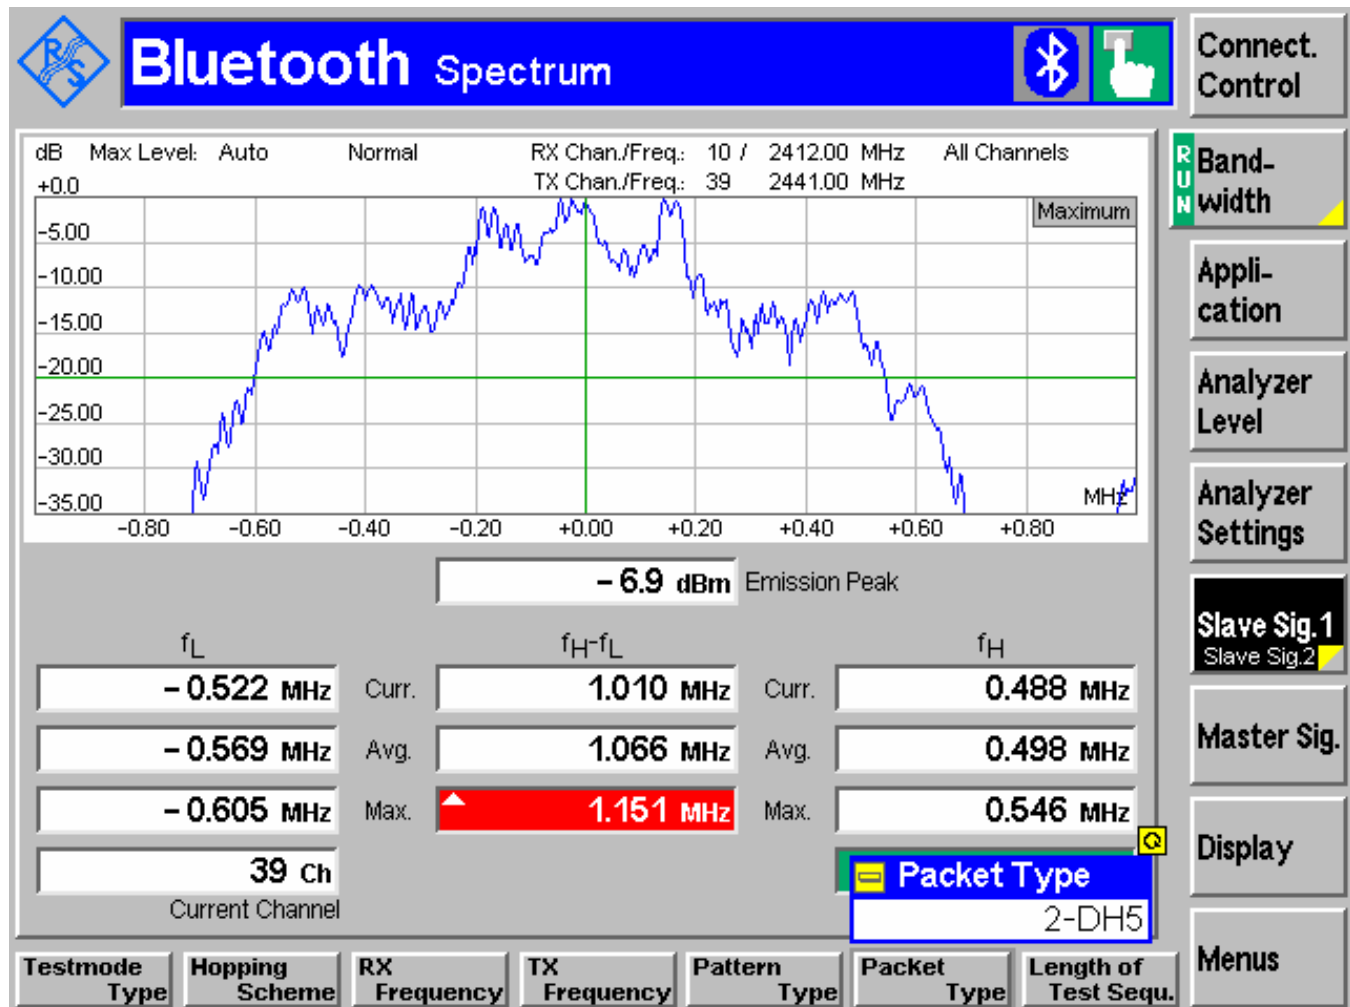20dB Bandwidth π / 4 DQPSK 2441MHz

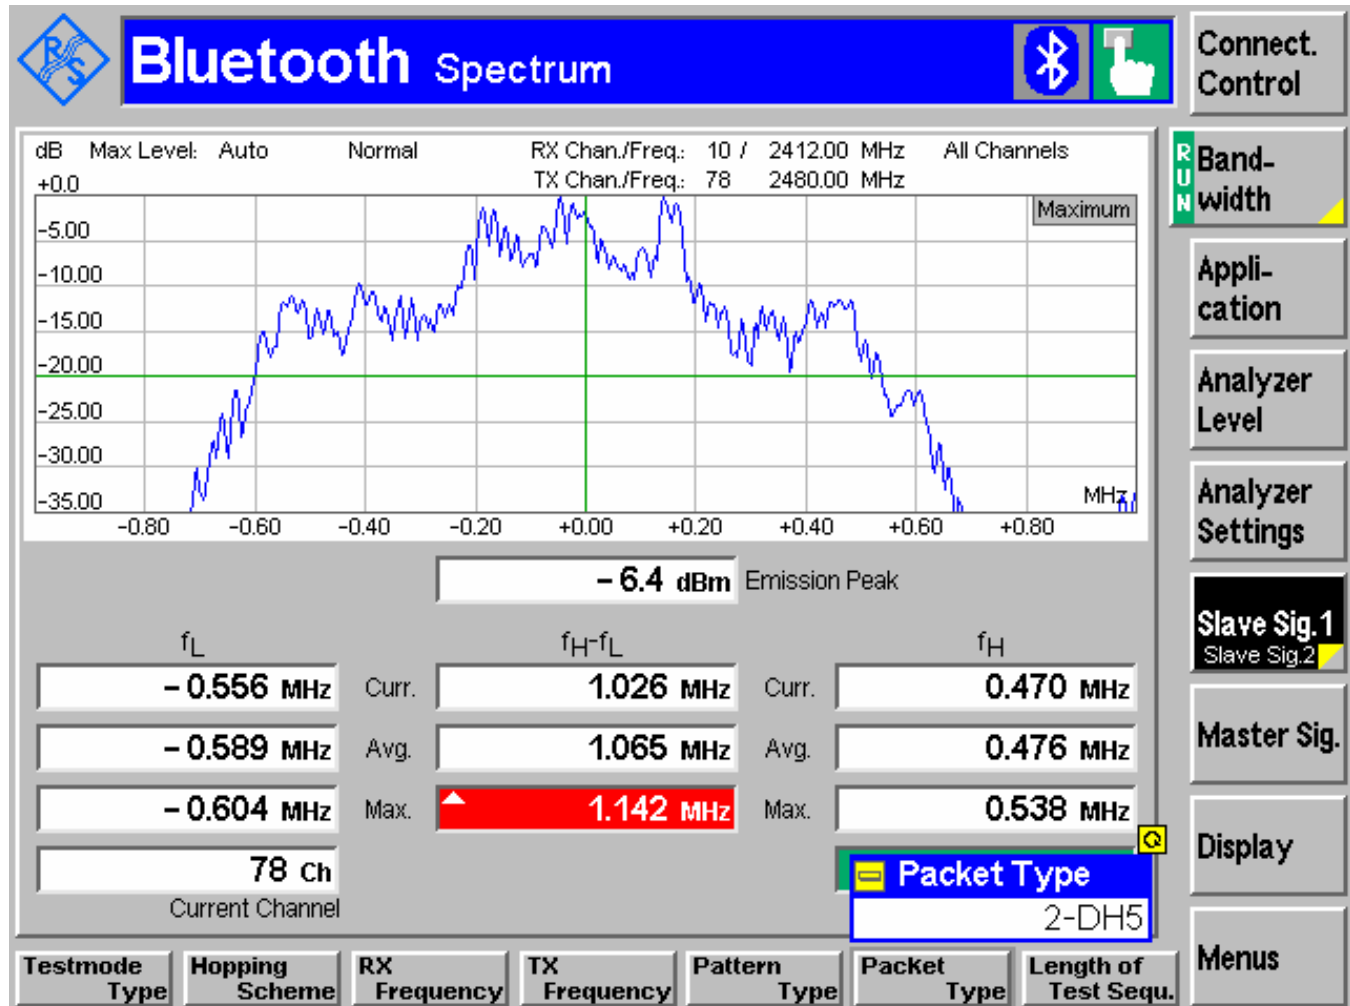20dB Bandwidth π / 4 DQPSK 2480MHz

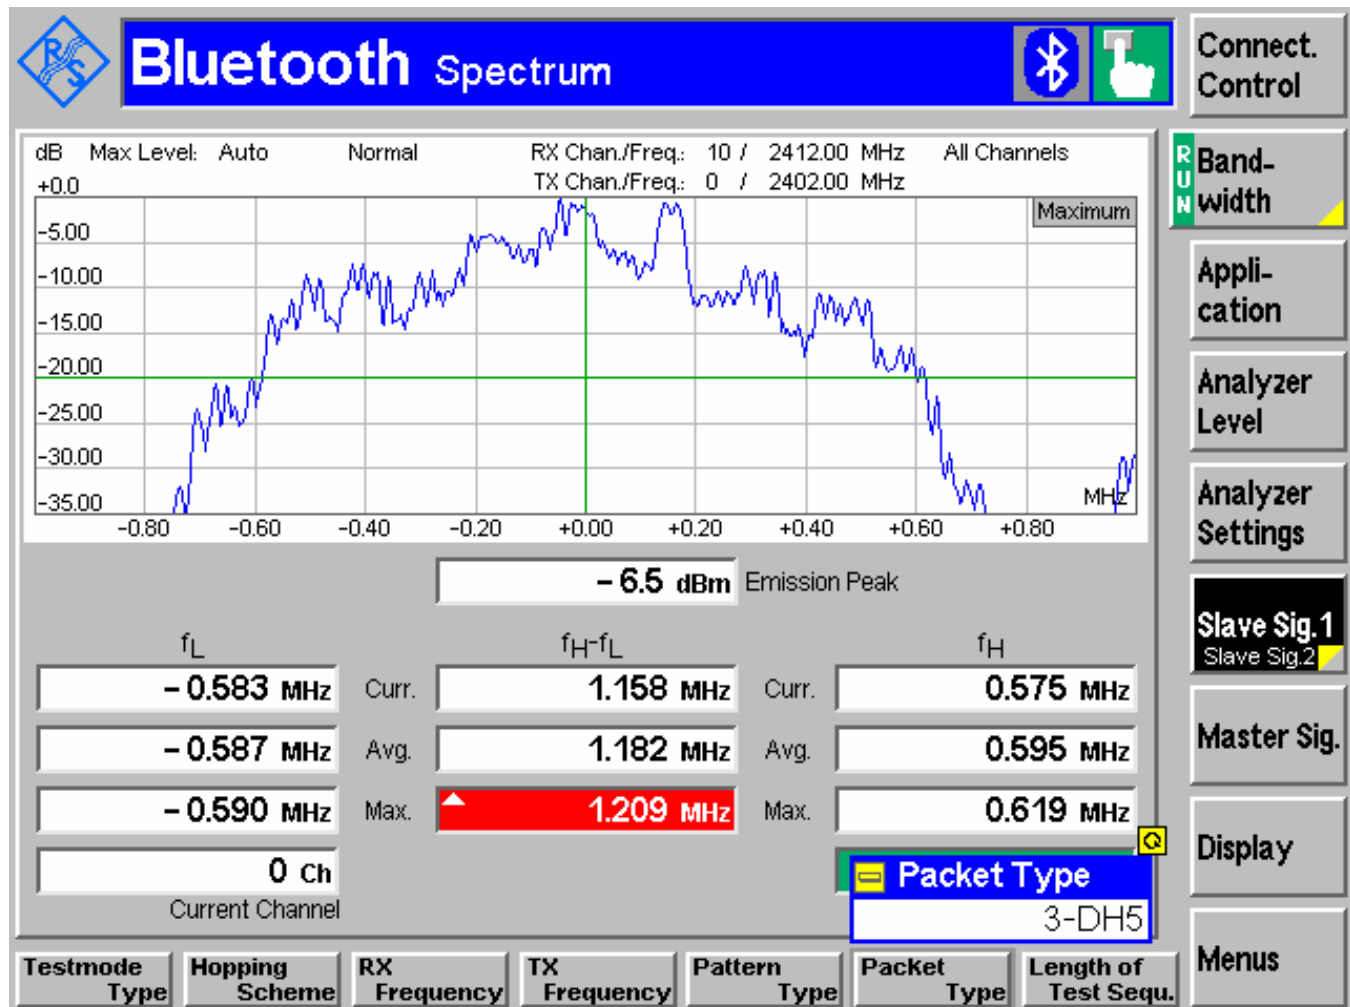20dB Bandwidth 8PSK 2402MHz

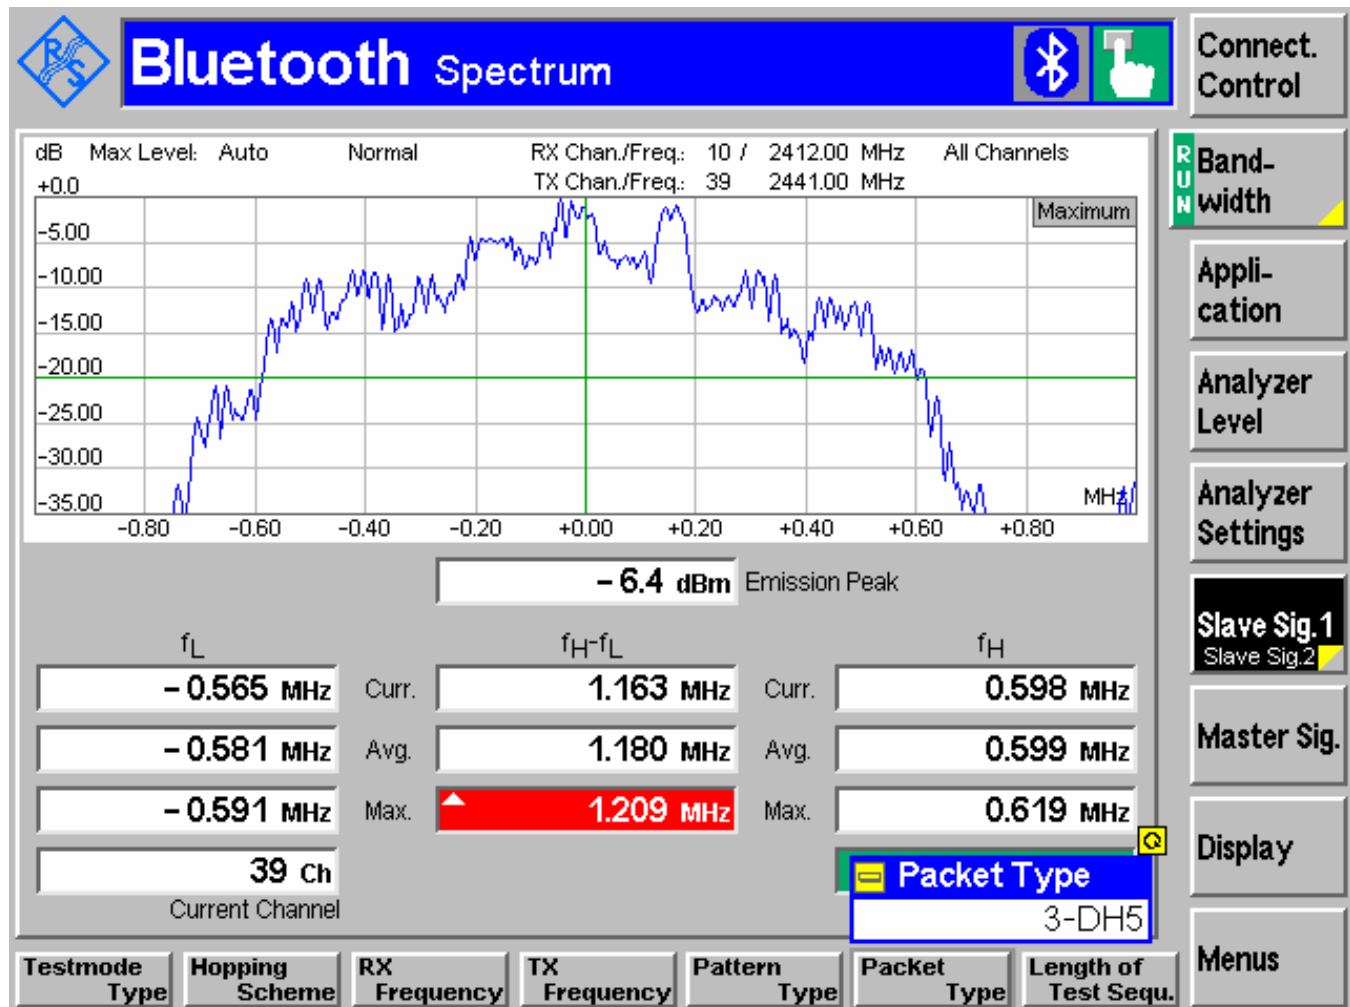20dB Bandwidth 8PSK 2441MHz

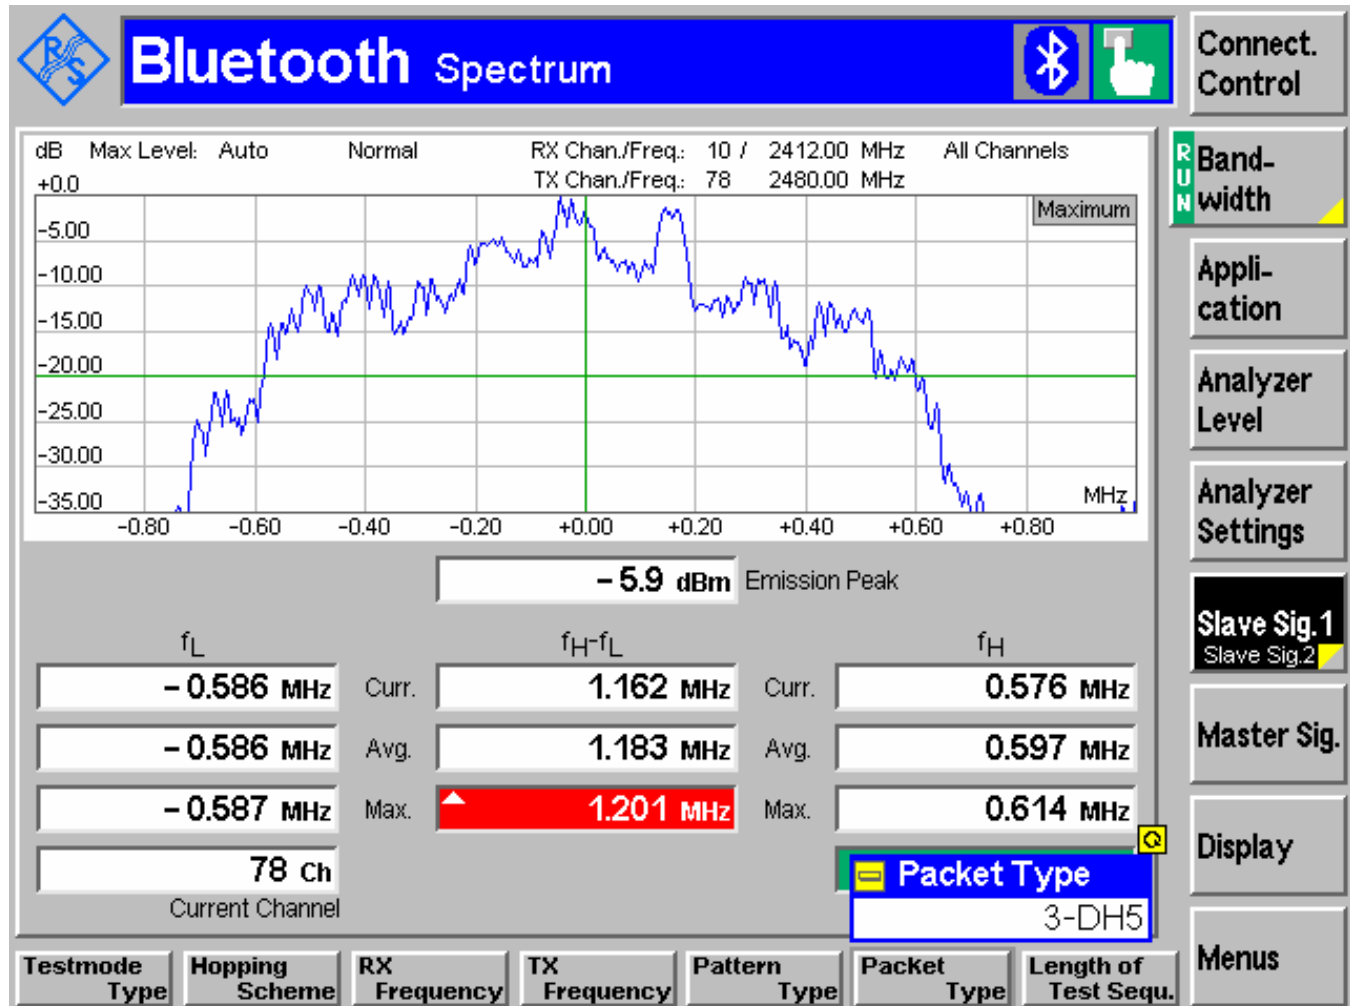
20dB Bandwidth 8PSK 2480MHz

6.3 CARRIER FREQUENCY SEPARATION

6.3.1 LIMIT SUB CLAUSE § 15.247 (a) (1) (i) (ii) (iii)

SEPARATION
> 25 KHz or > 2/3 * 20 dB BANDWIDTH = 839kHz

6.3.2 RESULTS: 1.002 MHz

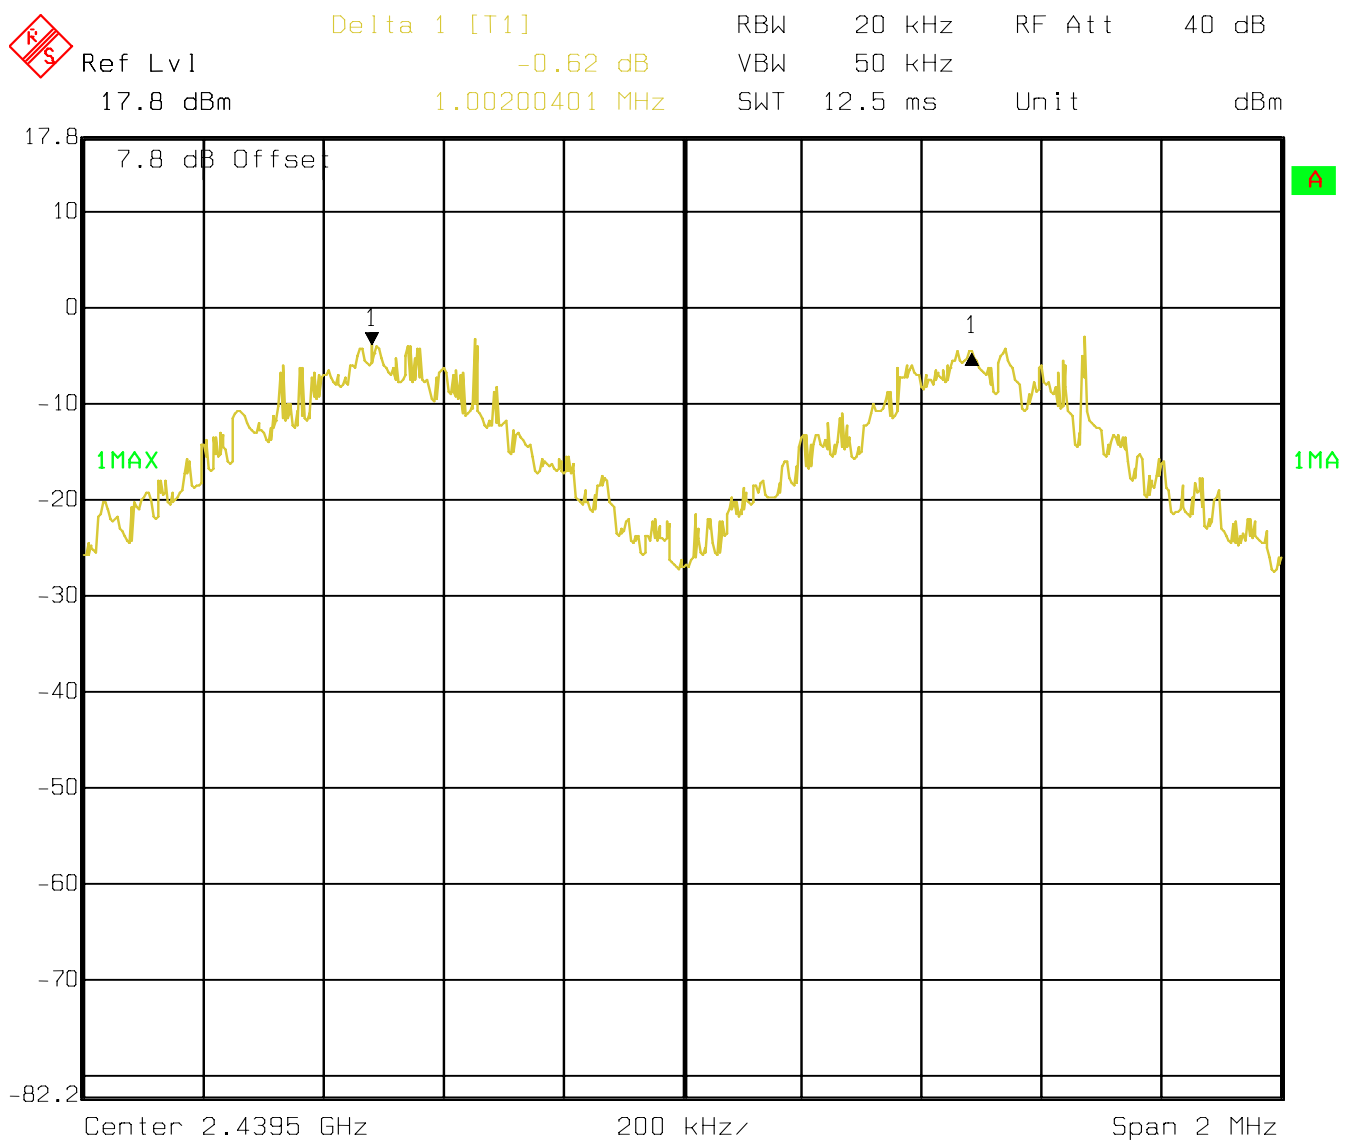


Date: 21.AUG.2008 16:38:10

6.4 NUMBER OF HOPPING CHANNELS

6.4.1 LIMIT SUB CLAUSE § 15.247 (a) (1) (iii)

NUMBER OF CHANNELS
> 15

6.4.2 RESULTS: 79

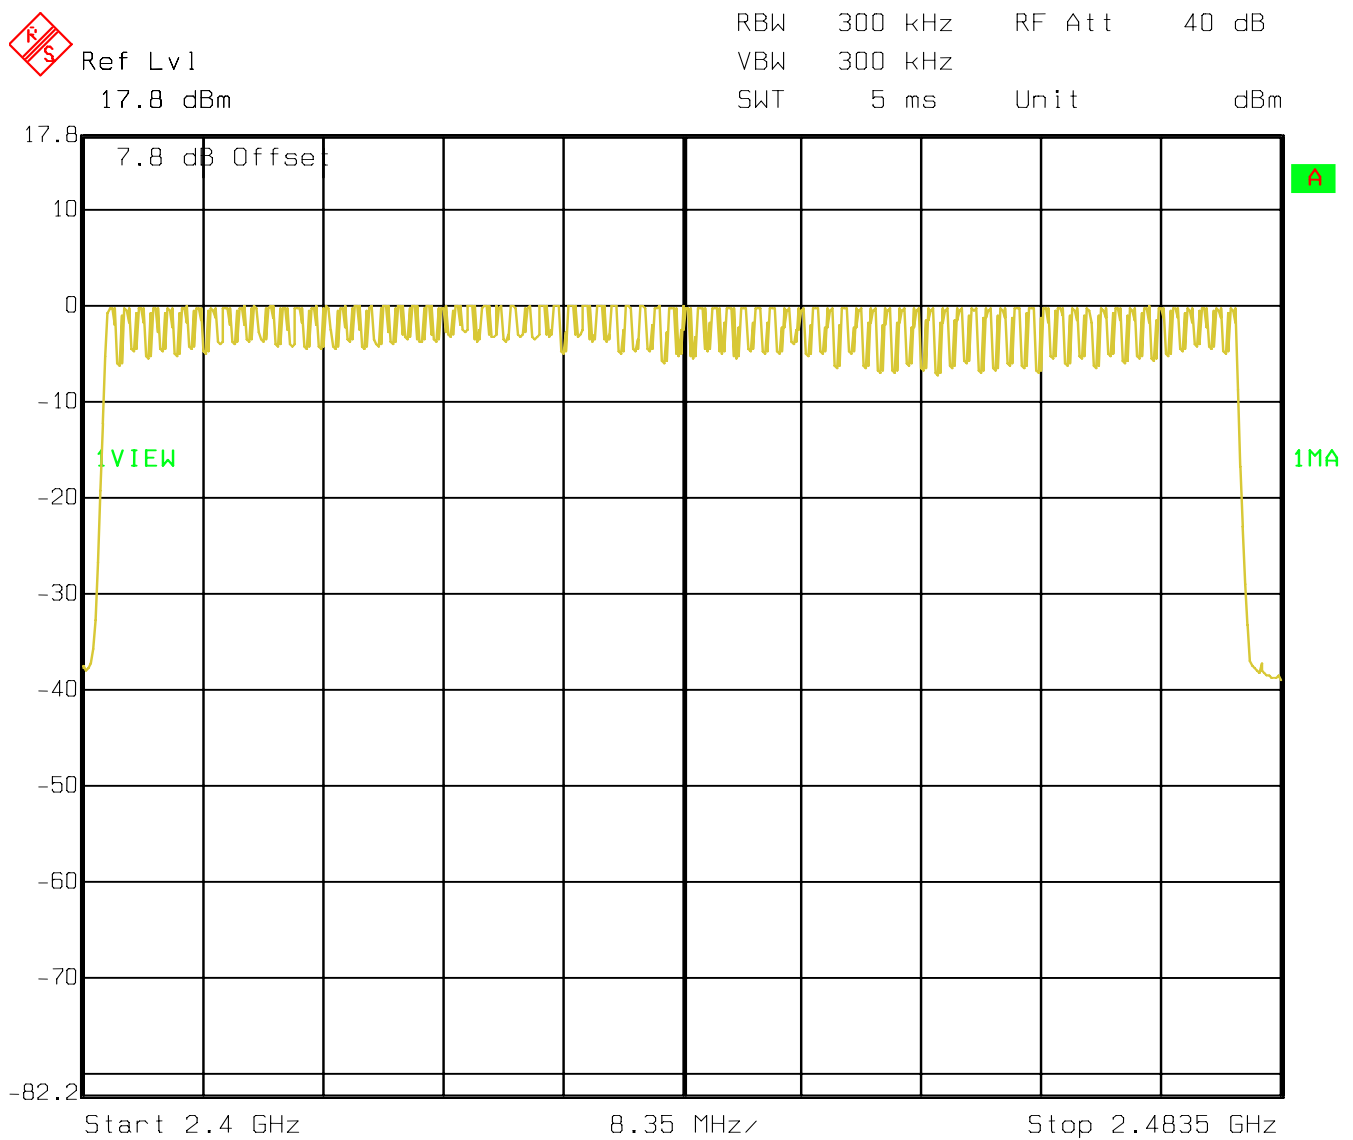

Date: 21.AUG.2008 16:33:22

6.5 TIME OF OCCUPANCY (DWELL TIME)

6.5.1 LIMIT SUB CLAUSE § 15.247 (a) (1) (i) (ii) (iii)

FREQUENCY RANGE	AVERAGE TIME OF OCCUPANCY PER 31.6 SECONDS (LIMIT)
2400-2483.5	0.4 SECONDS

6.5.2 RESULTS:

T _{nom} (23)°C	V _{nom} VDC
-------------------------	----------------------

For Bluetooth devices:

The dwell time of 0.4 s within a 31.6 second period in data mode is independent from the packet type (packet length). The calculation for a 31.6 second period is as follows:

Dwell time = time slot length * hop rate / number of hopping channels * 31.6 s

Example for a DH1 packet (with a maximum length of one time slot)

Dwell time = 625 μs * 1600 1/s / 79 * 31.6 s = 0.4 s (in a 31.6 s period)

For multi-slot packet the hopping is reduced according to the length of the packet.

Example for a DH5 packet (with a maximum length of five time slots)

Dwell time = 5 * 625 μs * 1600 * 1/5 * 1/s / 79 * 31.6 s = 0.4 s (in a 31.6 s period)

This is the same for all BT devices and therefore all BT devices satisfy FCC requirement on time of occupancy (dwell time).

6.6 CONDUCTED SPURIOUS EMISSION**6.6.1 LIMIT SUB CLAUSE § 15.247 (d)**


FREQUENCY RANGE	limit
30M-25GHz	-20dBc

6.6.2 RESULTS: Tnom(23)°C VnomVDC

All tests conducted in GFSK mode.


Verdict: PASS

Conducted Spurious Emission 2402MHz

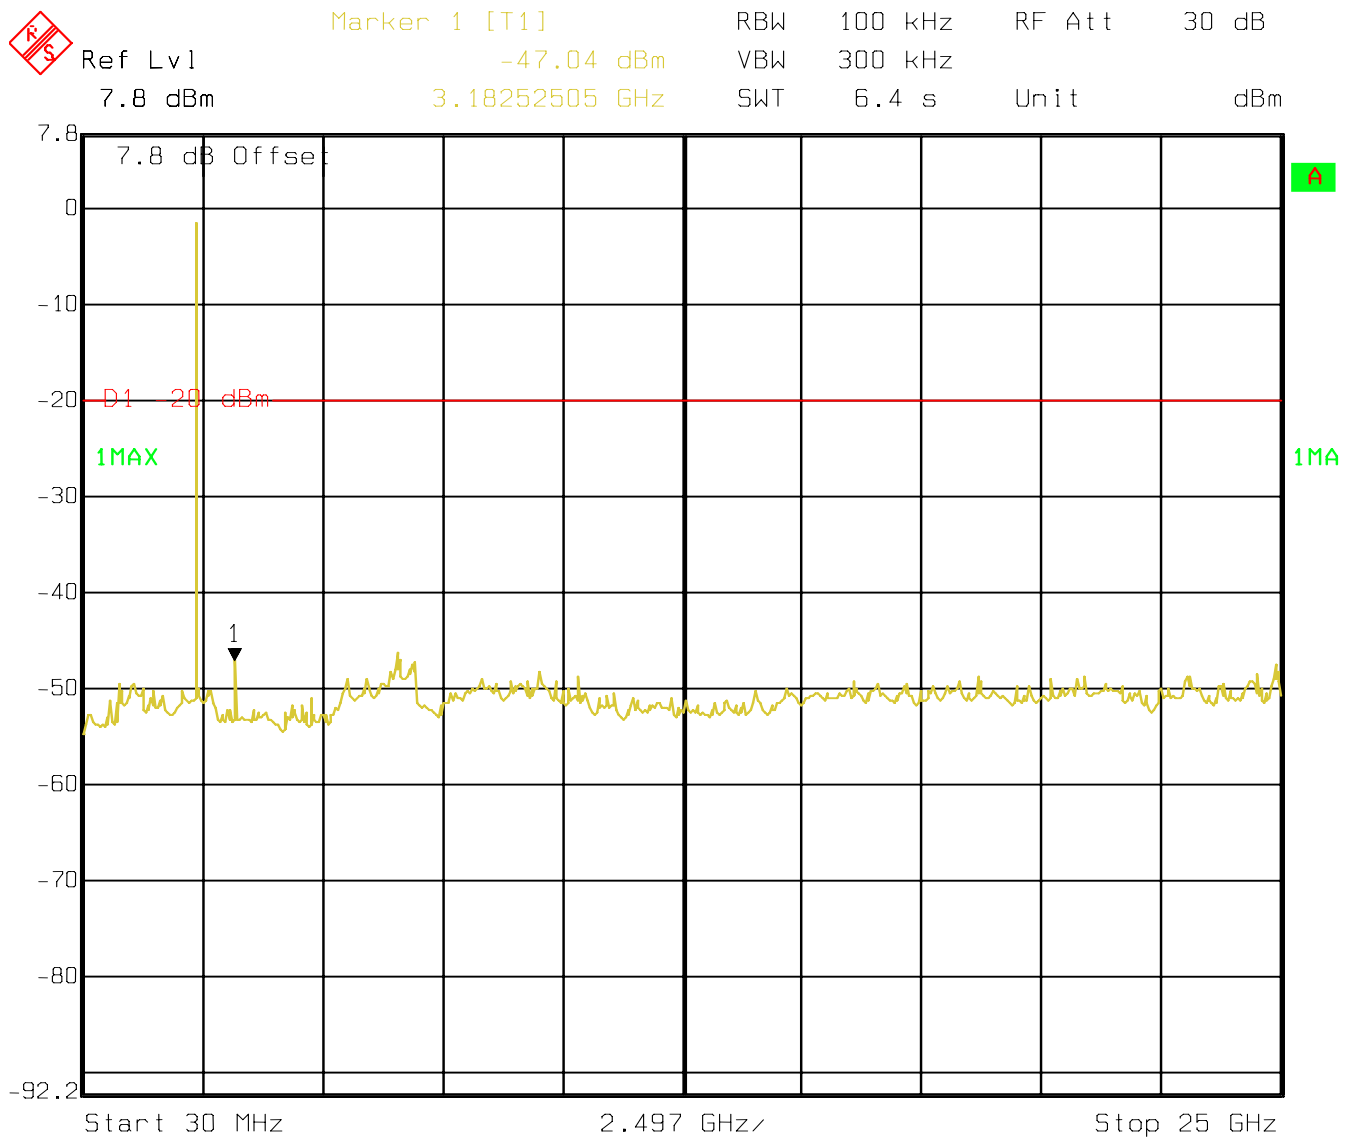


Date: 21.AUG.2008 16:47:08

Conducted Spurious Emission 2441 MHz

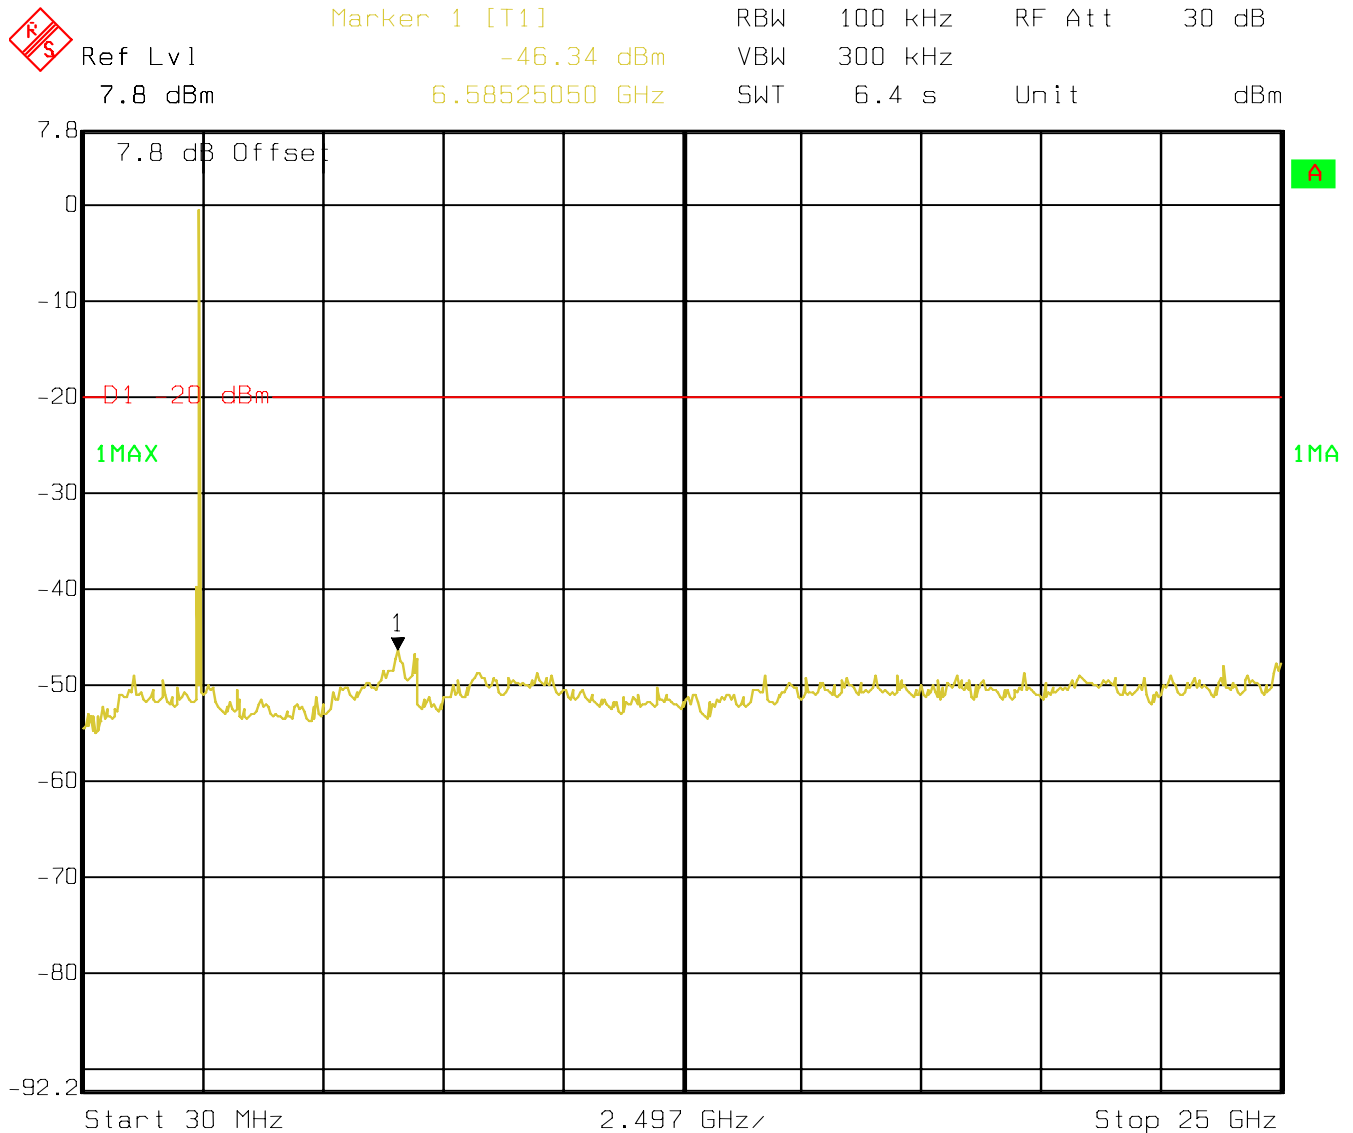

Date: 21.AUG.2008 16:43:01

Conducted Spurious Emission 2480MHz

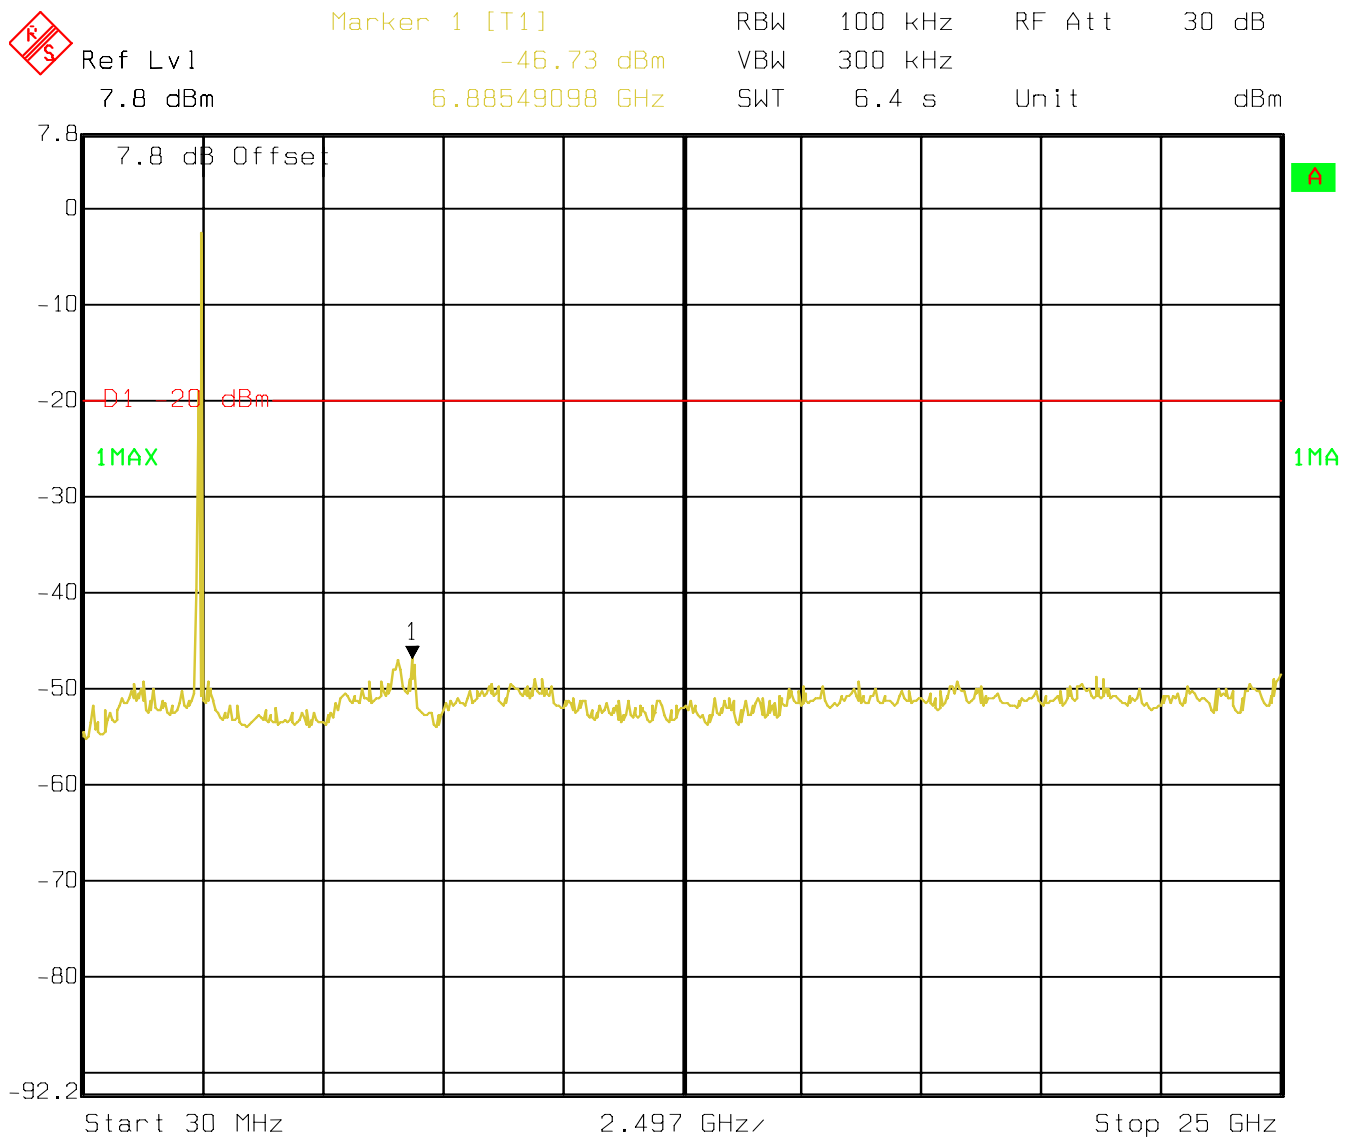

Date: 21.AUG.2008 16:43:50

6.7 AC POWER LINE CONDUCTED EMISSIONS § 15.107/207**6.7.1 LIMITS****Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)****Limit**


Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50
* Decreases with logarithm of the frequency		

ANALYZER SETTINGS: RBW = 10KHz**VBW = 10KHz****6.7.2 Test Results:****Pass, see plots.**

Results TX Line

EUT: W63H
Customer: Casio Hitachi
Test Mode: BT CH 39
ANT Orientation:: LISN
EUT Orientation:: H
Test Engineer:: SAM
Power Supply: : 120V
Comments: : Line

Marker: 218 kHz 47.24 dB μ V 1

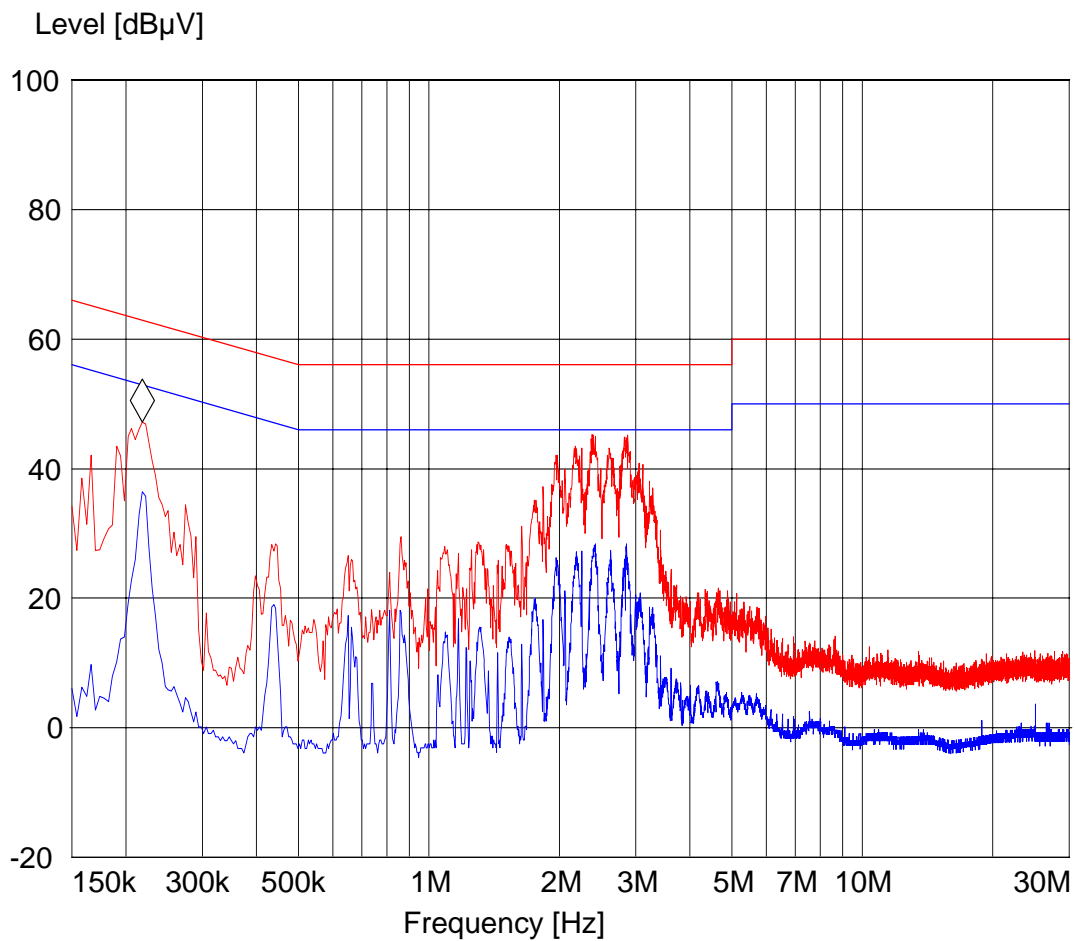

— MES 55022 cond MaxPk
— MES 55022 cond Avg
— LIM EN 55022 V QP Voltage QP Limit
— LIM EN 55022 V AV Voltage AV Limit

Results TX Neutral

EUT: W63H

Customer: Casio Hitachi

Test Mode: BT CH 39

ANT Orientation:: LISN


EUT Orientation:: H

Test Engineer:: SAM

Power Supply: : 120V

Comments: : Neutral

Marker: 218 kHz 47.36 dBμV 1

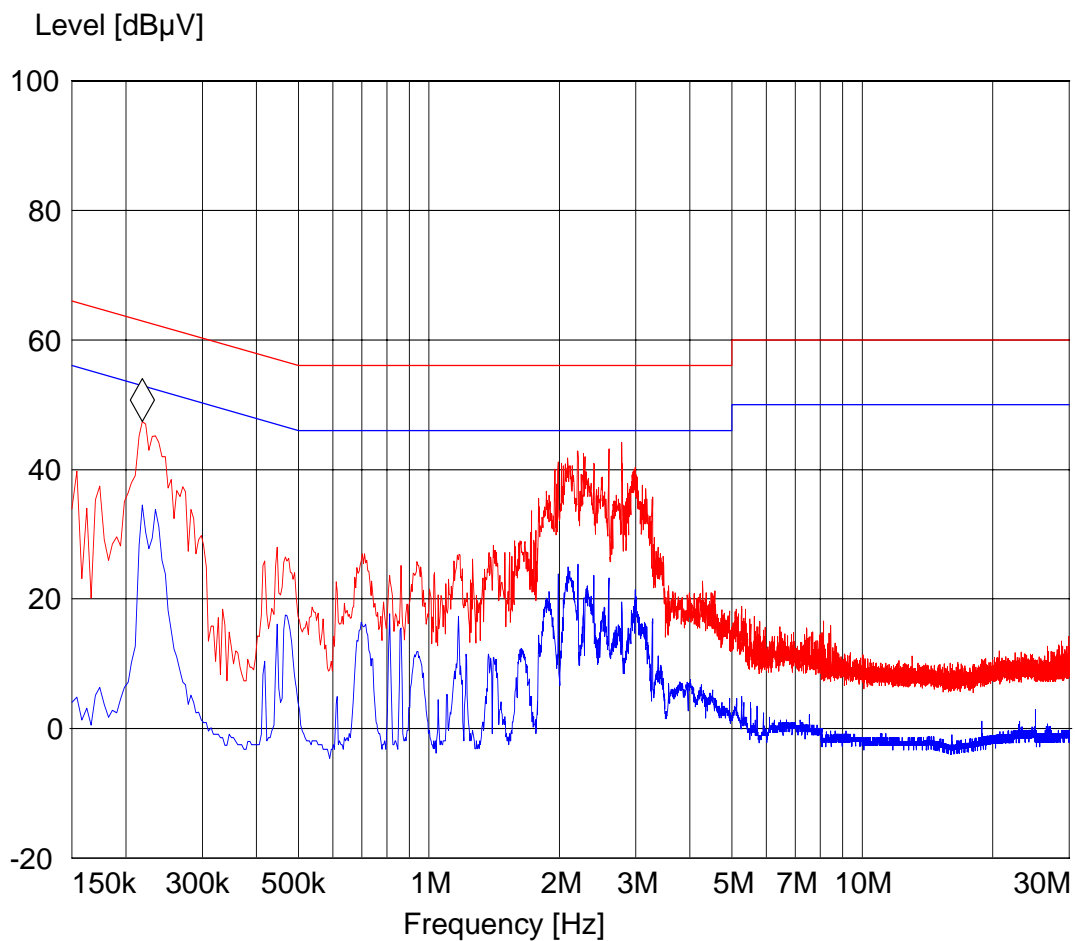

— MES 55022 cond MaxPk

— MES 55022 cond Avg

— LIM EN 55022 V QP Voltage QP Limit


— LIM EN 55022 V AV Voltage AV Limit

7 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due	Interval
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2009	1 year
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	100017	May 2009	1 year
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011	May 2009	1 year
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02	May 2009	1 year
05	Biconilog Antenna	3141	EMCO	0005-1186	June 2009	1 year
06	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325	June 2009	1 year
07	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240	June 2009	1 year
08	Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
09	Climatic Chamber	VT4004	Voltsch	G1115	May 2009	1 year
10	High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
11	High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
12	Pre-Amplifier	JS4-00102600	Miteq	00616	May 2009	1 year
13	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807	May 2009	1 year
14	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008	May 2009	1 year
15	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06	May 2009	1 year
16	LISN	ESH3-Z5	Rohde & Schwarz	836679/003	May 2009	1 year
17	Loop Antenna	6512	EMCO	00049838	July 2010	2 years


8 BLOCK DIAGRAMS

Conducted Testing

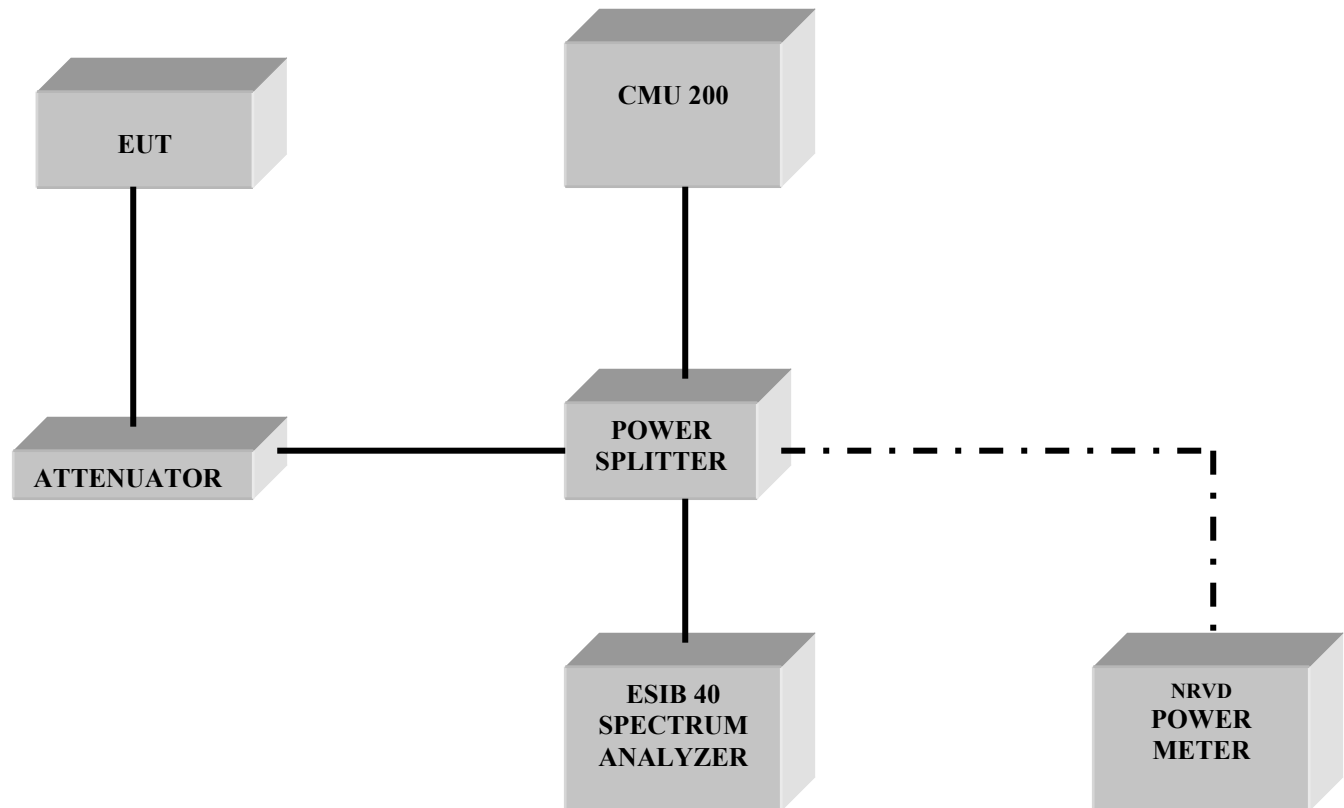

Radiated Testing

ANECHOIC CHAMBER

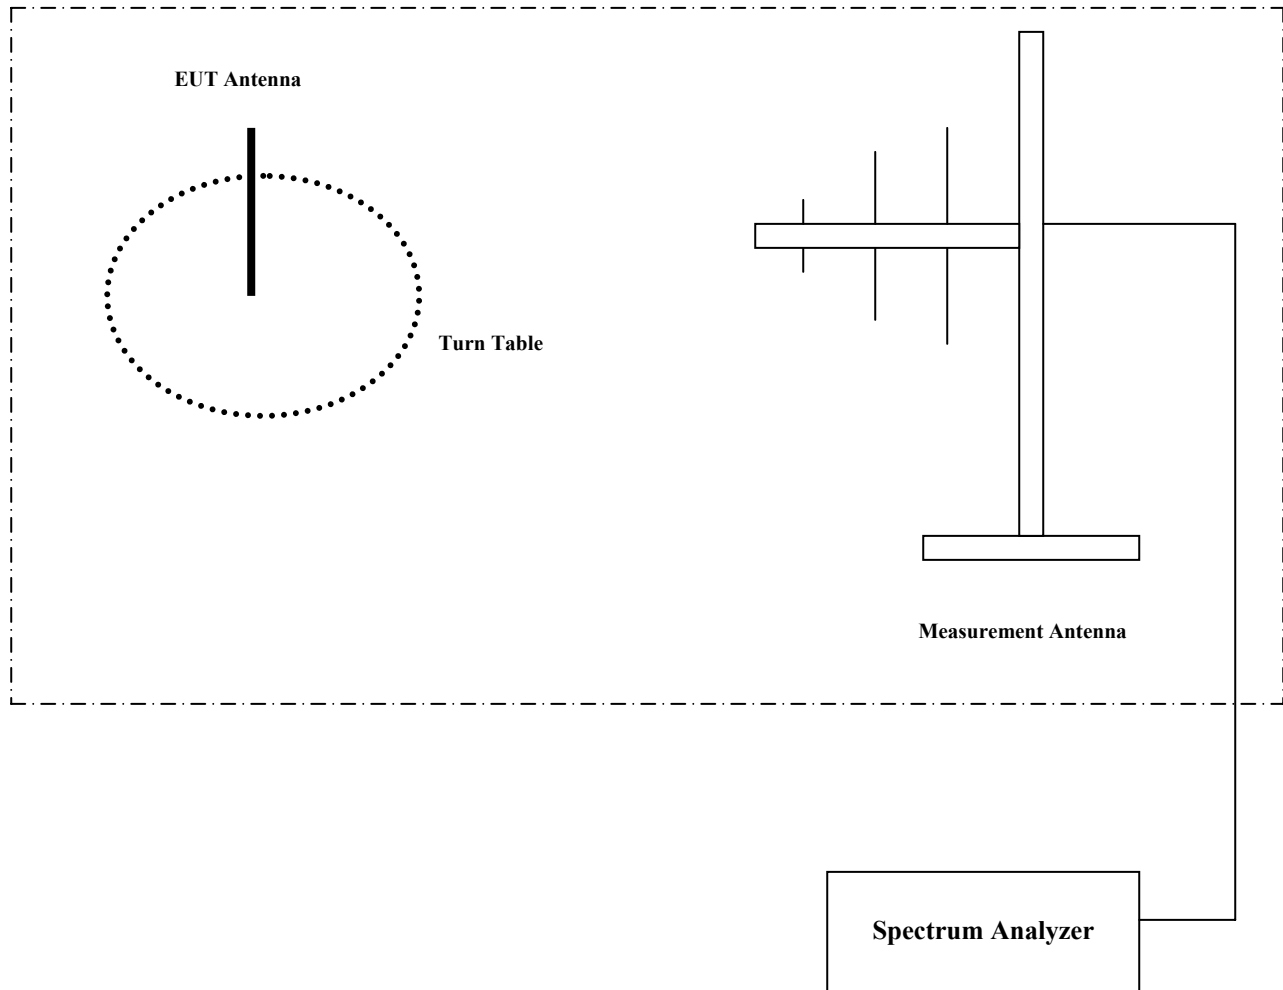

Test Report #: **EMC_CET10_038_15.247_Rev1**

Date of Report : 2008-9-02

Page 74 of 74



9 Report History

2008-8-26 Original Report

2008-9-02 Changed Manufacturer to Customer on page 69 and 70. Updated Report No. and date.