



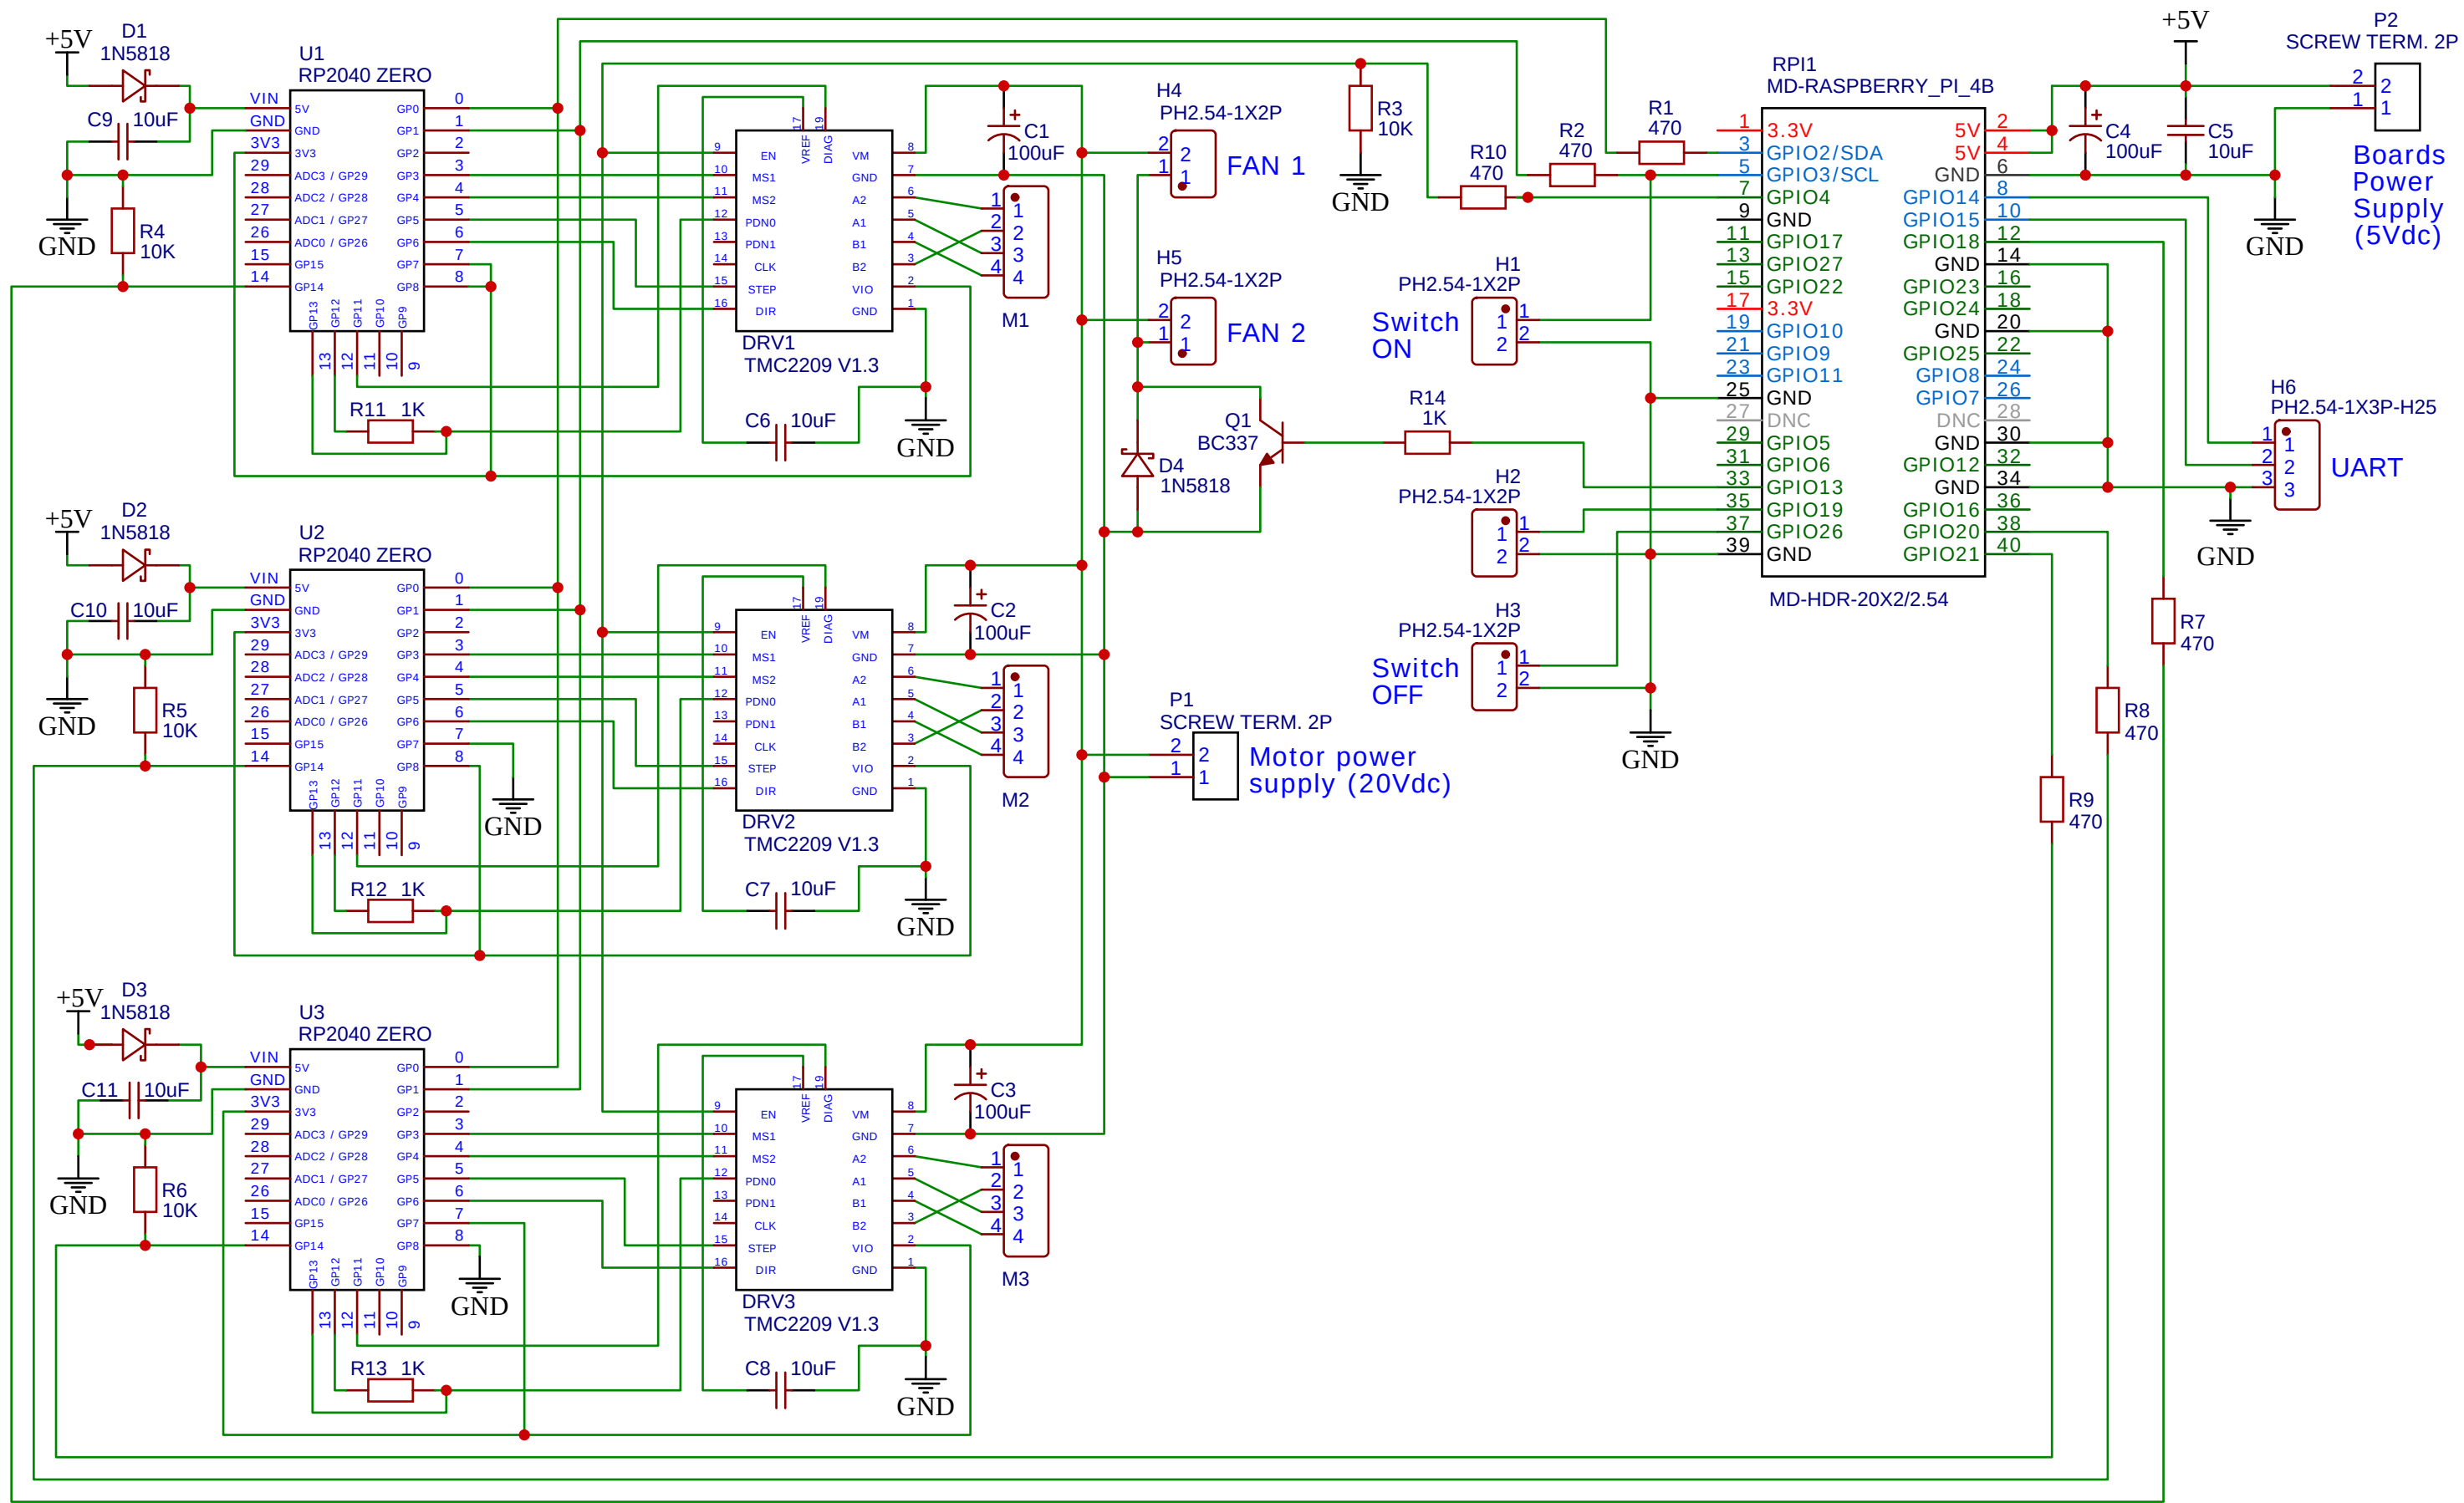

Info:
RP2040 Pins 7 & 8 are used to set different I2C addresses to the 3 boards. This is the only wiring difference between the 3 'blocks'.



TITLE: MirrorBallBalance (RPI 4b + 3x RP2040-Zero)		REV: 1.6
Company:		Sheet: 1/1
Date: 2026-05-30	Drawn By: andreafavero71	