File name: J85217C1.RES
Date: 28. Nov 06 10:46
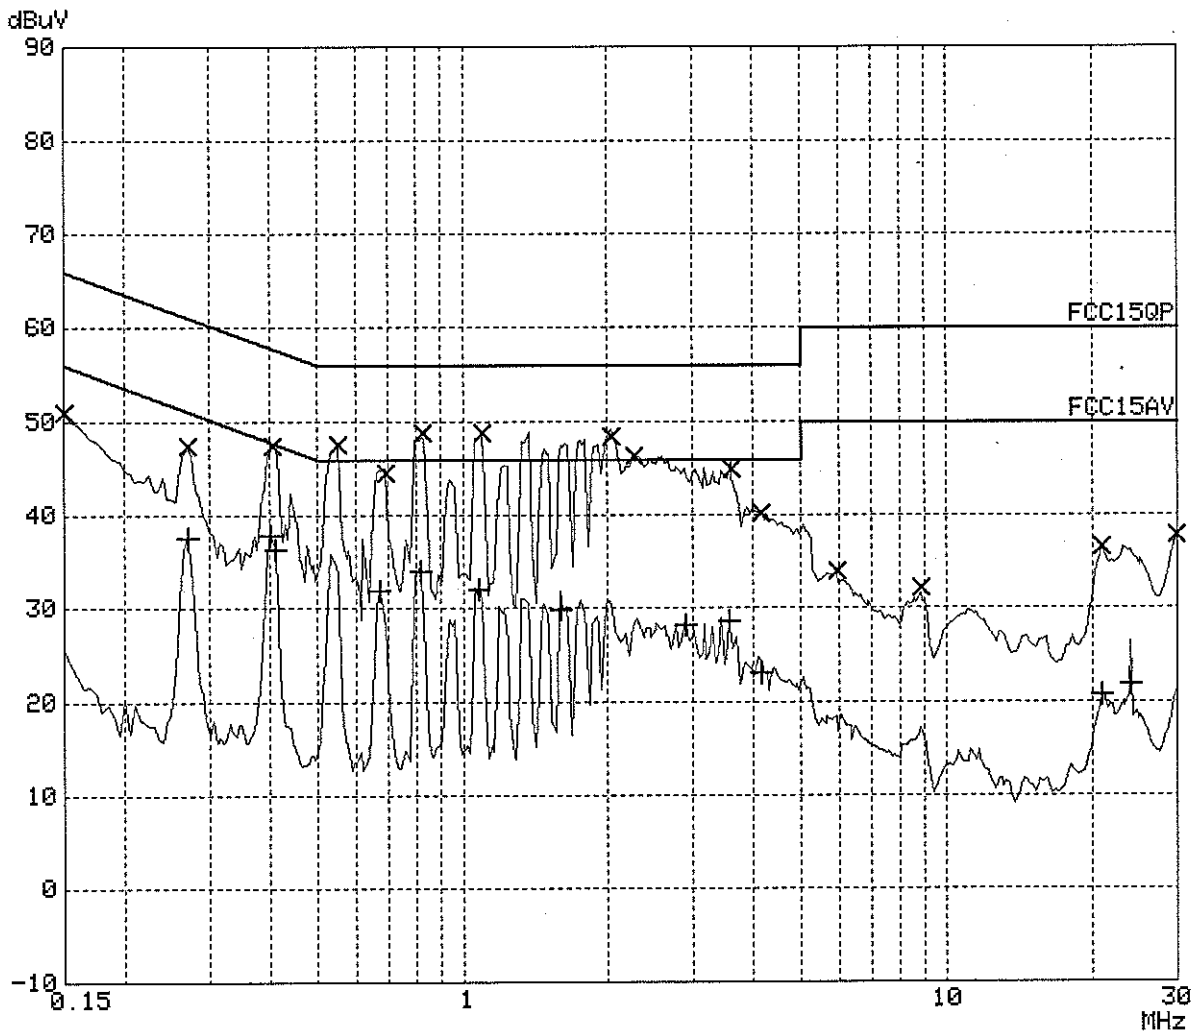
CMA Testing
and Certification
Laboratories
廠商會檢定中心

Scan Settings (2 Ranges)
|--------- Frequencies -----------||--------- Receiver Settings ---------|
   Start   Stop   Step   IF BW   Detector M-Time Atten Preamp
  150k   1M   5k   9k   QP+AV   20ms   AUTO LN OFF
   1M   30M   10k   9k   QP+AV   20ms   AUTO LN OFF

Transducer No. Start   Stop   Name
               12   150k   30M   CECF

Final Measurement: x QP / + AV
                   Meas Time: 1 s
                   Subranges: 16
                   Acc Margin: 30dB

Mode: EUT (PC Connection)

Final Measurement Results:

Indicated Phase/PE shows Configuration of max. Emission

Frequency MHz	QP Level dBuV	Delta Limit dB	Phase –	PE –
0.15000	51.0	-14.9	N	gnd
0.27000	47.5	-13.6	N	gnd
0.40500	47.4	-10.4	N	gnd
0.55000	47.6	-8.3	N	gnd
0.69000	44.6	-11.4	L1	gnd
0.82500	48.8	-7.2	N	gnd
1.10000	48.8	-7.1	N	gnd
2.03000	48.4	-7.5	L1	gnd
2.27000	46.3	-9.6	N	gnd
3.60000	44.9	-11.0	L1	gnd
4.15000	40.3	-15.6	N	gnd
5.93000	34.1	-25.8	N	gnd
8.86000	32.2	-27.7	N	gnd
20.83000	36.6	-23.3	N	gnd
29.90000	37.9	-22.0	N	gnd

Frequency MHz	AV Level dBuV	Delta Limit dB	Phase –	PE –
0.27000	37.6	-13.5	L1	gnd
0.40000	37.8	-9.9	L1	gnd
0.41000	36.3	-11.3	L1	gnd
0.67000	31.9	-14.0	L1	gnd
0.81500	34.0	-11.9	L1	gnd
1.08000	32.1	-13.8	N	gnd
1.59000	29.9	-16.0	N	gnd
2.90000	28.2	-17.7	N	gnd
3.57000	28.5	-17.4	N	gnd
4.14000	23.1	-22.8	N	gnd
20.81000	20.7	-29.2	N	gnd
24.01000	21.8	-28.1	N	gnd

* limit exceeded

CMA Testing
and Certification
Laboratories
藏商會檢定中心

Scan Settings (2 Ranges)
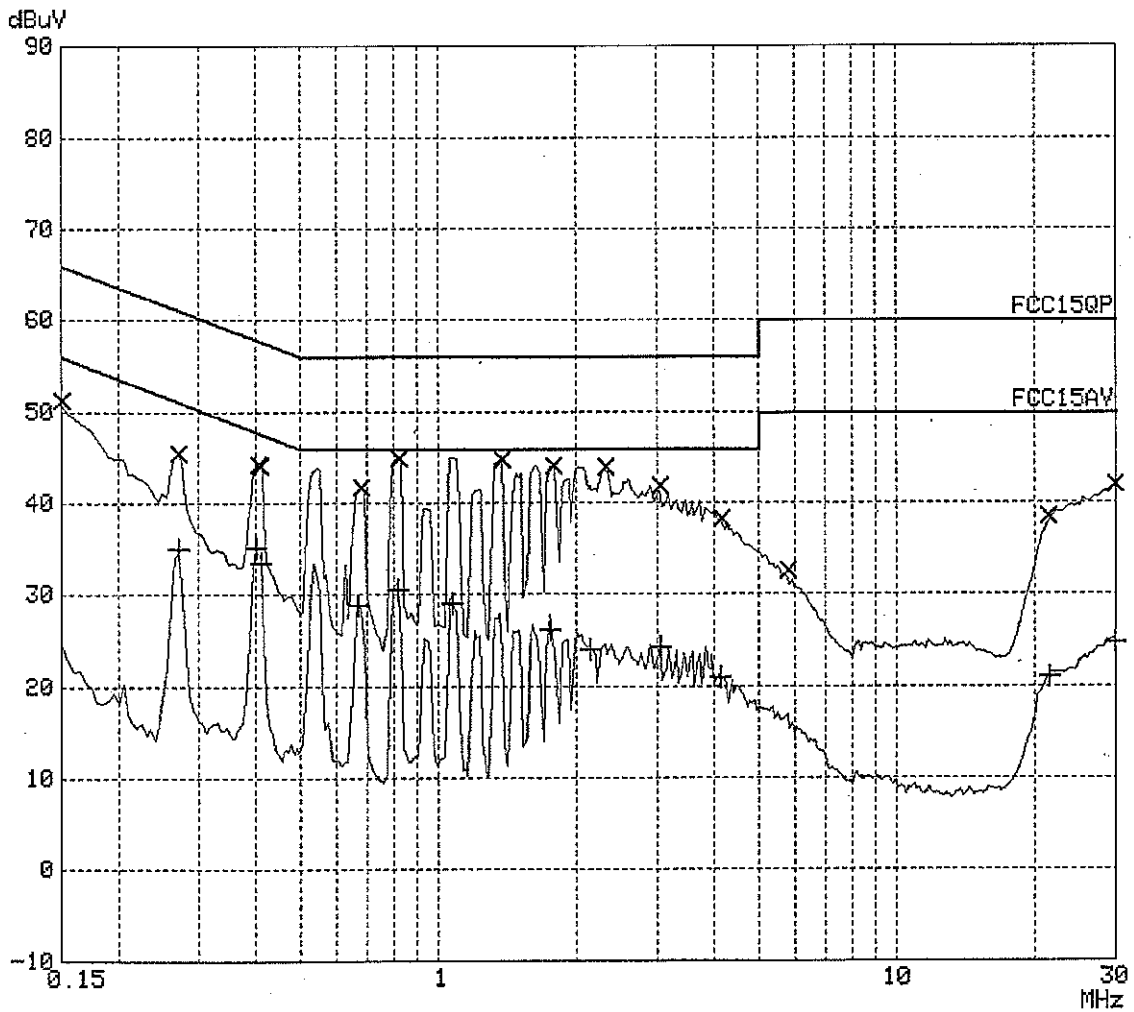|--------- Frequencies -----------||--------- Receiver Settings ---------|
    Start   Stop   Step   IF BW Detector M-Time Atten Preamp
    150k   1M   5k   9k   QP+AV   20ms AUTO LN OFF
    1M   30M   10k   9k   QP+AV   20ms AUTO LN OFF

Transducer No. Start   Stop   Name
           12 150k   30M   CECF

Final Measurement: x QP / + AV
                   Meas Time: 1 s
                   Subranges: 16
                   Acc Margin: 30dB

Mode: EUT (Stand alone)

File name: J85217C2.RES
Date: 28. Nov 06 11:53

**CMA Testing
and Certification
Laboratories
香港商會檢定中心**

Final Measurement Results:

Indicated Phase/PE shows Configuration of max. Emission

Frequency MHz	QP Level dBuV	Delta Limit dB	Phase −	PE −
0.15000	51.3	-14.6	N	gnd
0.27000	45.6	-15.5	N	gnd
0.40500	44.3	-13.5	N	gnd
0.41000	44.1	-13.5	L1	gnd
0.68000	41.7	-14.2	N	gnd
0.82000	45.0	-10.9	L1	gnd
1.38000	44.8	-11.1	L1	gnd
1.78000	44.2	-11.8	N	gnd
2.31000	44.0	-11.9	N	gnd
3.04000	41.8	-14.1	N	gnd
4.14000	38.3	-17.6	N	gnd
5.80000	32.7	-27.2	N	gnd
21.44000	38.6	-21.3	N	gnd
29.89000	42.0	-17.9	N	gnd

Frequency MHz	AV Level dBuV	Delta Limit dB	Phase −	PE −
0.27000	35.0	-16.1	L1	gnd
0.40000	35.0	-12.7	L1	gnd
0.41000	33.4	-14.2	L1	gnd
0.66500	28.9	-17.0	L1	gnd
0.81500	30.6	-15.3	L1	gnd
1.07000	29.0	-16.9	N	gnd
1.75000	26.2	-19.7	N	gnd
2.14000	24.1	-21.8	N	gnd
3.04000	24.3	-21.6	N	gnd
4.12000	21.0	-25.0	N	gnd
21.48000	21.0	-28.9	N	gnd
29.91000	24.7	-25.2	N	gnd

* limit exceeded