

TEST REPORT

Ref. No. ARSK00039

Date: 2010-05-19

Measurements performed in accordance with:



FCC Rules: Code of Federal Regulations (CFR) no. 47

PART 15 - RADIO FREQUENCY DEVICES

PRODUCT : Ground penetrating radar

TESTED MODEL : ALADDIN NA

FCC ID : UFW-ALADDIN-NA

IDS INGEGNERIA DEI SISTEMI S.p.A. **APPLICANT** Via Livornese, 1019 - I-56122 PISA

IDS INGEGNERIA DEI SISTEMI S.p.A.

MANUFACTURER : Via Sterpulino, 20 – I-56121 PISA

: IDS INGEGNERIA DEI SISTEMI S.p.A **TRADEMARK**

OTHER

: 2010-03-15 ÷ 2010-03-17 Testing dates **INFORMATION**

B.E.M. No. (IMQ ref.) : 53513

Tested samples No. : 1

: IMQ S.p.A. Via Quintiliano, 43 I-20138 MILANO Testing Laboratory

: Viale Lombardia, 20 - I-20021 Bollate Testing site

2010-05-19 Date: Signature: R. Torri Tested by:

Batto Bluto R. Colombo Date: 2010-05-19 Checked by: (EMC Testing Lab Head)

Revision Sheet

| Release No. | Date | Revision Description |
|-------------|------------|----------------------|
| Rev. 0 | 2010-05-19 | First edition |



CONTENTS

| 1 I | Introduction1 | -3 |
|------|------------------------------------------------------------------|------------|
| 1.1 | Scope 1 | -3 |
| 1.2 | Test specifications, methods & procedures1 | -3 |
| 2 (| General Description of Equipment under Test2 | 2-4 |
| 2.1 | Applicant2 | 2-4 |
| 2.2 | Manufacturer2 | 2-4 |
| 2.3 | Equipment classification | 2-4 |
| 2.4 | Basic description of equipment under test | 2-5 |
| 2.5 | Feature of equipment under test2 | 2-5 |
| 3 | Test Configuration of EUT3 | 8-6 |
| 3.1 | EUT Operating test conditions | |
| 3.2 | EUT Configurations | |
| 3.3 | Description of support equipment | |
| | | |
| | General Test Set-Up4 | |
| 4.1 | Environmental conditions | |
| 4.2 | Description4 | |
| 4.3 | Drawings4 | F-8 |
| 5 | Summary Of Test Results5 | 5-9 |
| 6 I | Measurements and Tests Data6- | 10 |
| 7 | Technical Documentation7- | 44 |
| 8 I | Photographic Documentation8 | 45 |
| | EUT Identification 8-4 | |
| 8.2 | Test set-up8 | 46 |
| 9 I | Measurement Uncertainty9 | 47 |
| 9.1 | Radiated Emission Measurement Uncertainty from 30 to 1000 MHz 9- | |
| 9.2 | Radiated Emission Measurement Uncertainty above 1000 MHz 9-4 | |
| 10 1 | List Of Measuring Equipment And Calibration Information 10- | 1 2 |



1 Introduction

1.1 Scope

Obtain FCC Certification Authorization with the requirement of Title 47 of the Code of Federal Regulations Part 15 subpart F.

1.2 Test specifications, methods & procedures

| Publication | Year | Title | | |
|----------------------------------------------------|------|-----------------------------------------------------------------------------------------------------------------------------------------------|--|--|
| 47 CFR Part 15 | 2008 | Radio Frequency Device | | |
| ANSI C63.4 | 2004 | Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz | | |
| FCC Order, ET Docket No. 98- 153 (FCC 02-48) | 2002 | Revision of Part 15 of the Commission's Rules Regarding Ultra-Wideband Transmission Systems | | |
| KDB Publication No. 393764 | 2007 | UWB Compliance Measurements | | |



2 GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST

2.1 Applicant

NAME IDS INGEGNERIA DEI SISTEMI S.p.A.

ADDRESS Via Livornese, 1019 – I-56122 PISA

COUNTRY ITALY

2.2 Manufacturer

NAME IDS INGEGNERIA DEI SISTEMI S.p.A.

ADDRESS Via Sterpulino, 20 – I-56121 PISA

COUNTRY ITALY

2.3 Equipment classification

According to the definition 15.503 EUT is a **Ground penetrating radar (GPR)** system so it shall fulfil provisions of 47 CFR **Part 15 Subpart F – Ultra Wideband Operation– Section 15.509**.



2.4 Basic description of equipment under test

| Parameters | Value | | |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|
| Type of equipment | Ground penetrating radar (GPR) system | | |
| Model | ALADDIN NA | | |
| FCC ID | UFW-ALADDIN-NA | | |
| Trade Name | IDS INGEGNERIA DEI SISTEMI S.p.A. | | |
| General Overview | The ALADDIN NA system is a Ground penetrating radar (GPR) system, i.e., according to the FCC definition, a field disturbance sensor that is designed to operate only when in contact with the ground for the purpose of detecting or obtaining the images of buried objects or determining the physical properties within the ground. The energy from the GPR is intentionally directed down into the ground for this purpose. The EUT is a small device that may also be Hand Held without employ a fixed infrastructure. The System product includes The ALADDIN bipolar antenna (including two couples of transmitting and receivingdipoles) The control unit (hereinafter referred as D.A.D – Digital Antenna Driver) that is linked to a laptop computer for storing the collected data. | | |

2.5 Feature of equipment under test

| Parameters | Value |
|-------------------------------------|-----------------------------------------|
| Power supply type | DC 12 V battery supplied |
| Operating frequency | 620,00 to 2930,00 MHz (10 dB Bandwidth) |
| Channel Spacing | Not applicable |
| Pulse Repetition Frequency (PRF) | 200 KHz |
| Antenna description | Integral permanently attached |
| Antenna Type | Dipole |



3 TEST CONFIGURATION OF EUT

3.1 EUT Operating test conditions

| Ref. | Description | | | |
|------|---------------------------------------------------------------------------------------------|--|--|--|
| #1 | Continuous transmission with the antenna fitted in a manner typical of normal indented use. | | | |

3.2 EUT Configurations

The Equipment under test was powered with a battery and placed directly on the dry sand with no ground plane under it.





Hand Held

with a support infrastructure

3.3 Description of support equipment

Here following the details concerning equipment needed for correct operation or loading of the EUT:

None.



4 GENERAL TEST SET-UP

4.1 Environmental conditions


| TEST CONDITIONS | MEASURED | |
|----------------------|-----------------|--|
| Ambient Temperature | 20 ÷ 25 °C | |
| Relative Humidity | 50 ÷ 60 % | |
| Atmospheric Pressure | 900 ÷ 1000 mbar | |

4.2 Description

| TYPE OF TEST FACILITIES | Open Area Test Site (OATS) The test site is flat and the level area is clear of overhead wires and reflecting structures, it is sufficiently large to permit measuring antenna placement at specified distance. Adequate spacing distance is assured between the EUT and measuring antenna to any adjacent large reflecting structures. |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TEST DISTANCE | 3 meters measuring distance. 1 meter above 960 MHz for measurement to device not placed on the ground plane with the antenna pointed in the direction of the radiating head. |
| GROUND PLANE | Galvanized sheet steel soldered panels is installed on the floor, electric contact between the individual plates is provided via continues metallic strips. Dimensions: 6.0m x 4.0m x 3.0mm (LxWxD) |
| ANTENNA POSITIONER | Semi-Automatic remotely controlled Antenna mast, scan over a range of 1 to 4 meters above the ground plane, Manual antenna polarization change. |
| SANDPIT | 1.5m x 4.0m x 50cm (LxWxD) sandpit area filled with dry sand placed in front of the ground plane (test on UWB Ground penetrating radar). |



4.3 Drawings

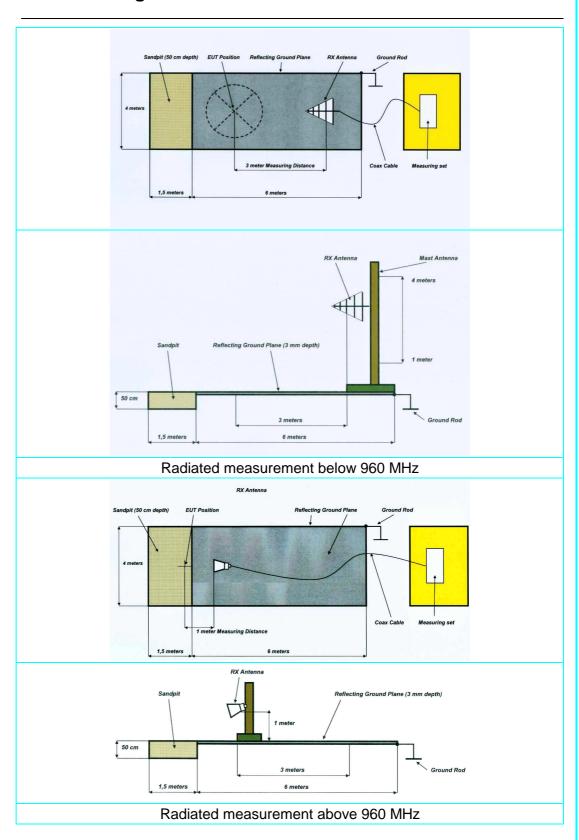



5 SUMMARY OF TEST RESULTS

| CFR47 Part 15 Section | Title | Operating condition | Result | Test No. |
|-----------------------------|-------------------------------------------------------------|---------------------|----------------|----------|
| 15.207 (a) | Conducted Emission | Ν | lot applicable | 1 |
| 15.505 | Cross reference | / | PASS | 1 |
| 15.507 | Marketing of UWB equipment | / | PASS | 2 |
| 15.509 | Pulse Repetition Frequency (PRF) | #1 | PASS | 3 |
| 15.509(a) | UWB Bandwidth | #1 | PASS | 4 |
| 15.509(b) | General requirements for Low Frequency Imaging System | / | PASS | 11 |
| 15.509(c) | Transmission duration | / | PASS | 5 |
| 15.509(d) 15.209 | Radiated emission ≤ 960 MHz | #1 | PASS | 6 |
| 15.509(d) | Radiated emission > 960 MHz | #1 | PASS | 7 |
| 15.509(e) | Radiated emission in GPS bands | #1 | PASS | 8 |
| 15.509(f) | Highest radiated emission at f _M | #1 | PASS | 9 |
| 15.521 | Technical requirements applicable to all UWB devices | / | PASS | 10 |
| 15.525 | Coordination requirement | / | PASS | 11 |

¹Port not present, battery operating device



6 MEASUREMENTS AND TESTS DATA

| TEST | | Title | 47CFR Part 15 Ref. Section |
|-------------------|----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| No. 1 | | "Cross reference" | 15.505 |
| TEST REQUIREMENTS | b) | Except where specifically stated otherwise was provisions of Subparts A and B and of Section 15.204 and Section 15.207 of Subpart C unlicensed UWB intentional radiators. The provisions of the provisions of Footnote US is Frequency Allocations contained in Section does not apply to devices operated under this The requirements of Subpart F apply only to i.e., the intentional radiator, contained in the aspects of the operation of a UWB device requirements contained elsewhere in this chuWB device that contains digital circuitry in with the operation of the transmitter also requirements for unintentional radiators in chapter. Similarly, an associated receiver within the frequency range 30 MHz to 960 requirements in Subpart B of this chapter. | ctions 15.201 through of this part apply to provisions of Sections is operated under this 246 to the Table of 2.106 of this chapter subpart. The radio transmitter, the UWB device. Other is may be subject to papter. In particular, a cot directly associated to is subject to the Subpart B of this that operates (tunes) |

| Requirement | Description |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15.505(a) | Equipment under test complies with all the relevant and applicable requirements of Subpart A, Subpart B and Section 15.201 through 15.204 and Section 15.207 of Subpart C. |
| 15.505(b) | The Digital circuitry portion of the EUT has been tested and verified to comply with 47 CFR Part 15, subpart B. |

Test Result:

The EUT meets the requirements of section 15.505



| TEST | Title | 47CFR Part 15 Ref. Section |
|-------|------------------------------|-------------------------------|
| No. 2 | "Marketing of UWB equipment" | 15.507 |

TEST REQUIREMENTS

In some cases, the operation of UWB devices is limited to specific parties, e.g., law enforcement, fire and rescue organizations operating under the auspices of a state or local government. The marketing of UWB devices must be directed solely to parties eligible to operate the equipment. The responsible party, as defined in Section 2.909 of this chapter, is responsible for ensuring that the equipment is marketed only to eligible parties. Marketing of the equipment in any other manner may be considered grounds for revocation of the grant of certification issued for the equipment

| Requirement | Description |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15.507 / 2.909 | The responsible party is properly informed about the responsible for ensuring that the equipment is marketed only to eligible parties, and provide correct information on the customers and users. |
| | (See Important note for the US customers of the "ALADDIN" STRUCTURE KIT User manual) |


Test Result:

The EUT meets the requirements of section 15.507



| TEST No. 3 | | Title "Pulse Repetition Frequency (PRF)" | | |
|---------------|-----------------|--------------------------------------------|------------------------------|--|
| | r dies repenien | rioquency (i i ii) | 15.509(d) / 15.209 | |
| | Test definition | Pulse Repetition Fr trigger repetition fre | equency (PRF) is the equency | |
| Z | Test setup | ANSI C63.4 | | |
| N N | Test facility | Open Area Test Site (OATS) | | |
| REQUIREMENTS | Test distance | 3 meters | | |
| REG | RBW bandwidth | 30 kHz | | |
| TEST | VBW bandwidth | 30 kHz | | |
| 뿌 | Detector | A-Peak | | |
| | Remark | | | |

Test Result Data:

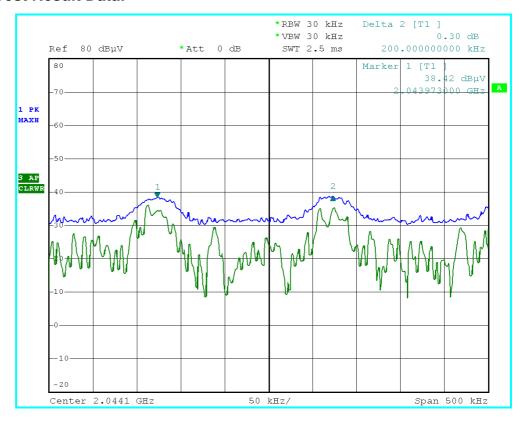

| PRF Declared | PRF Measured | Result |
|--------------|--------------|--------|
| 200 kHz | 200 kHz | Comply |



| TEST | Title 47CFR Part 15 Section "UWB bandwidth" | | | | |
|--------------|---------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|--|--|
| No. 4 | OWE | o pandwidth | 15.509(a) | | |
| REQUIREMENTS | UWB definition | The bandwidth of a UWB emission is defined by the points on the emission spectrum where the amplitude is 10 dB below the maximum emission amplitude (i.e., the -10 dB points). In cases where the measured emission spectrum contains multiple (more than two) -10 dB points the outermost points define the bandwidth (i.e., the widest bandwidth is assumed). | | | |
| UR | Test setup | ANSI C63.4 | | | |
| ğ | Test facility | Open Area Test Site (OATS) | | | |
| ST R | Test distance | 3 meters | | | |
| ES | RBW bandwidth | 1 MHz | | | |
| · | VBW bandwidth | 3 MHz | | | |
| | Detector | Peak | | | |
| | Remark | Frequency span is large er spectrum of the RF emission | n is large enough to display a full e RF emission | | |

Limits:

The UWB bandwidth of an GPR under the provisions of this section must be below 10.6 GHz.



Test Procedure:

- 1) The receiving antenna which varied from 1 to 4 m to find the highest emission is positioned 3 m away from the EUT.
- 2) Measure the Highest radiated emission at f_M as described in the test No. 8.
- 3) Recorded the upper and lower frequency that are at the side of the band bounded by the points at 10 dB below the highest radiated UWB emission level.

Measuring the bandwidth of a UWB device using a radiated test set-up, it is imperative that appropriate adjustments be made to the measured amplitude levels to account for the frequency-dependent components of the measurement system (e.g., antenna gain or factor, pre-amplifier gain, cable loss, etc). Since UWB emissions can have bandwidths several GHz wide, these frequency-dependent characteristics can vary dramatically over the fundamental emission

According to the nature of the broadband emission characteristics, significant care mast be taken to capture the true spectrum of emission, extremely narrow sweep widths is recommended

4) The UWB bandwidth is the different of the upper and lower frequency recorded.

Test Result Data:

| Frequency of Maximum | | | Lower ar | nd Upper equencies | 10 dB Bandwidth | Result |
|----------------------------|-------|-----------------------------|-------------|-----------------------|--------------------|--------|
| emission level fM | | @ 1 MHz RBW (Peak/QP) | Lower fL | Upper fH | | |
| MHz | (V/H) | dBμV/m | MHz | MHz | MHz | |
| 1645 | Н | 45,78 | 620,00 | 2930,00 | 2310,00 | Comply |

Test Result

The EUT meets the requirements of sections 15.509(a)



| | TEST | Title | 47CFR Part 15 Ref. Section |
|---|-------|-------------------------|-------------------------------|
| | No. 5 | "Transmission duration" | 15.509(c) |
| • | | \ | |

TEST REQUIREMENTS c) A GPR that is designed to be operated while being hand held and a wall imaging system shall contain a manually operated switch that causes the transmitter to cease operation within 10 seconds of being released by the operator. In lieu of a switch located on the imaging system, it is permissible to operate an imaging system by remote control provided the imaging system ceases transmission within 10 seconds of the remote switch being released by the operator.

Description

The EUT is provided with a manually operated switch ("dead-man switch") that causes the transmitter to cease operation within 10 seconds of being released by the operator.

Test Result:

The EUT meets the requirements of section 15.509(c)



Photographic description:



"Dead-man" switch on the antenna, must be pushed at all time. When switch is released, pulse generator will stop firing pulses within 10 seconds.

Hand Held



with a support infrastructure



| TEST No. 6 | Tit "Radiated disturba | 47CFR Part 15 Ref. Section 15.509(d) / 15.209 | | |
|-------------------|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|
| TEST REQUIREMENTS | Test definition | The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in Section 15.209. | | |
| ĭ. E | Test setup | | | |
| IRE | Test facility | OATS) | | |
| EQL | Test distance | | | |
| _ R | RBW bandwidth | 120 kHz | | |
| TES | VBW bandwidth | 1 MHz | | |
| • | Detector | Quasi-Peak | | |
| | Remark | | | |

Limits:

| Frequency | Field Strengths Limits | Measuring RBW | Distance |
|-------------|---------------------------|---------------|----------|
| (MHz) | (dBµV/m) | kHz | (meters) |
| 0.009-0.490 | 67,6-20*Logf(kHz) | 1 | 300 |
| 0.490-1.705 | 87,6-20*Logf(kHz) | 9 | 30 |
| 1.705-30 | 29,5 | 9 | 30 |
| 30-88 | 40,0 | 120 | 3 |
| 88-216 | 43,5 | 120 | 3 |
| 216-960 | 46,0 | 120 | 3 |



Test Procedure:

- 1) The EUT was placed on sandpit area filled with dry sand initially placed in front of the ground plane (0° degree position)
- 2) The receiving antenna which varied from 1 to 4 m to find the highest emission is positioned 3 m away from the EUT.
- 3) The receiving antenna was positioned in horizontal polarization.
- 4) The measurements were made with the detector set to peak with a bandwidth of 120 kHz during monitoring the frequency range below 960 MHz.
- 5) Upon detection of a suspect emission signal, its amplitude and frequency were noted.
- 6) It is recommended to demodulate the received signals for suitable discrimination of the ambient emission from the EUT emission.
- 7) At the worst case combination of the EUT operating mode and antenna height , the field strength measure was recorded. At each of the frequencies were a field strength was recorded the final measurement was performed with a Quasi-Peak detector.
- 8) The receiving antenna was positioned in vertical polarization and the steps 2 to 6 was repeated.
- 9) The EUT was rotating from 0° to 360° degrees with 45° step increment and the steps 4 to 7 was repeated.
- 10) All the worst case combination field strength emissions founded of each EUT position and antenna polarization was recorded in the following table and compared with the applicable limits.

Summary of Test Result data:

| Frequency | EUT Position | Antenna Polarization | Correcting reading | Limit | Margin | Result |
|-----------|-----------------------|-------------------------|--------------------|----------|--------|--------|
| (MHz) | (angle ⁹) | (V/H) | (dBµV/m) | (dBµV/m) | (dB) | |
| 49,38 | 135 | V | 38,28 | 40,00 | -1,72 | Comply |
| 71,60 | 135 | V | 38,37 | 40,00 | -1,63 | Comply |
| 154,00 | 135 | V | 41,53 | 43,50 | -1,97 | Comply |
| 192,00 | 90 | V | 42,13 | 43,50 | -1,37 | Comply |
| 220,00 | 275 | V | 41,62 | 46,00 | -4,38 | Comply |
| 279,00 | 90 | V | 43,50 | 46,00 | -2,50 | Comply |
| 306,00 | 275 | V | 37,48 | 46,00 | -8,52 | Comply |
| 345,00 | 0 | V | 36,36 | 46,00 | -9,64 | Comply |
| 429,00 | 180 | V | 39,40 | 46,00 | -6,60 | Comply |

Remark: Ambient signal were detected in the different frequency ranges, each of measured signal close or above the limits was examined with relation to the EUT.



Test Data detail:

| EUT P | EUT Position (angle ⁹ | | | Ant | Antenna Polarization | | |
|-----------------|----------------------------------|------------------------------|-----------------------|--------------------------|-----------------------------------|-------------------|----------------|
| Frequency (MHz) | Reading value (dBµV) | Antenna Factor (dB1/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Correcting reading (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
| 49,38 | 21,56 | 11,40 | 0,25 | 0,00 | 33,21 | 40,00 | -6,79 |
| 71,60 | 26,80 | 8,00 | 0,30 | 0,00 | 35,10 | 40,00 | -4,90 |
| 154,00 | 28,91 | 9,65 | 0,46 | 0,00 | 39,02 | 43,50 | -4,48 |
| 192,00 | 29,01 | 9,40 | 0,52 | 0,00 | 38,93 | 43,50 | -4,57 |
| 220,00 | 22,77 | 11,20 | 0,52 | 0,00 | 34,49 | 46,00 | -11,51 |
| 279,00 | 28,03 | 12,80 | 0,65 | 0,00 | 41,48 | 46,00 | -4,52 |
| 306,00 | 19,82 | 13,60 | 0,65 | 0,00 | 34,07 | 46,00 | -11,93 |
| 345,00 | 17,61 | 14,70 | 0,70 | 0,00 | 33,01 | 46,00 | -12,99 |
| 429,00 | 18,36 | 16,05 | 0,80 | 0,00 | 35,21 | 46,00 | -10,79 |

| EUT P | EUT Position (angle ⁹) | | | Antenna Polarization | | | Н |
|--------------------|------------------------------------|------------------------------|-----------------------|--------------------------|-----------------------------------|-------------------|----------------|
| Frequency (MHz) | Reading value (dBµV) | Antenna Factor (dB1/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Correcting reading (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
| 49,38 | 20,59 | 11,40 | 0,25 | 0,00 | 32,24 | 40,00 | -7,76 |
| 71,60 | 27,66 | 8,00 | 0,30 | 0,00 | 35,96 | 40,00 | -4,04 |
| 154,00 | 24,02 | 9,65 | 0,46 | 0,00 | 34,13 | 43,50 | -9,37 |
| 192,00 | 29,00 | 9,40 | 0,52 | 0,00 | 38,92 | 43,50 | -4,58 |
| 220,00 | 26,30 | 11,20 | 0,52 | 0,00 | 38,02 | 46,00 | -7,98 |
| 279,00 | 27,60 | 12,80 | 0,65 | 0,00 | 41,05 | 46,00 | -4,95 |
| 306,00 | 19,87 | 13,60 | 0,65 | 0,00 | 34,12 | 46,00 | -11,88 |
| 345,00 | 20,20 | 14,70 | 0,70 | 0,00 | 35,60 | 46,00 | -10,40 |
| 429,00 | 18,94 | 16,05 | 0,80 | 0,00 | 35,79 | 46,00 | -10,21 |



| EUT P | EUT Position (angle ⁹) | | | Antenna Polarization | | | Н |
|-----------------|------------------------------------|------------------------------|-----------------------|--------------------------|-----------------------------------|-------------------|----------------|
| Frequency (MHz) | Reading value (dBµV) | Antenna Factor (dB1/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Correcting reading (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
| 49,38 | 22,70 | 11,40 | 0,25 | 0,00 | 34,35 | 40,00 | -5,65 |
| 71,60 | 28,00 | 8,00 | 0,30 | 0,00 | 36,30 | 40,00 | -3,70 |
| 154,00 | 24,49 | 9,65 | 0,46 | 0,00 | 34,60 | 43,50 | -8,90 |
| 192,00 | 27,90 | 9,40 | 0,52 | 0,00 | 37,82 | 43,50 | -5,68 |
| 220,00 | 25,74 | 11,20 | 0,52 | 0,00 | 37,46 | 46,00 | -8,54 |
| 279,00 | 27,53 | 12,80 | 0,65 | 0,00 | 40,98 | 46,00 | -5,02 |
| 306,00 | 19,05 | 13,60 | 0,65 | 0,00 | 33,30 | 46,00 | -12,70 |
| 345,00 | 19,09 | 14,70 | 0,70 | 0,00 | 34,49 | 46,00 | -11,51 |
| 429,00 | 19,55 | 16,05 | 0,80 | 0,00 | 36,40 | 46,00 | -9,60 |

| EUT Position (angle ງ | | | 135 | An | tenna Polariza | tion | Н |
|-----------------------|----------------------------|------------------------------|-----------------------|--------------------------|-----------------------------------|-------------------|----------------|
| Frequency (MHz) | Reading value (dBµV) | Antenna Factor (dB1/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Correcting reading (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
| 49,38 | 22,76 | 11,40 | 0,25 | 0,00 | 34.41 | 40.00 | -5,59 |
| 71,60 | 29,41 | 8,00 | 0,30 | 0,00 | 37,71 | 40,00 | -2,29 |
| 154,00 | 24,44 | 9,65 | 0,46 | 0,00 | 34,55 | 43,50 | -8,95 |
| 192,00 | 28,19 | 9,40 | 0,52 | 0,00 | 38,11 | 43,50 | -5,39 |
| 220,00 | 26,87 | 11,20 | 0,52 | 0,00 | 38,59 | 46,00 | -7,41 |
| 279,00 | 26,42 | 12,80 | 0,65 | 0,00 | 39,87 | 46,00 | -6,13 |
| 306,00 | 19,56 | 13,60 | 0,65 | 0,00 | 33,81 | 46,00 | -12,19 |
| 345,00 | 20,63 | 14,70 | 0,70 | 0,00 | 36,03 | 46,00 | -9,97 |
| 429,00 | 19,96 | 16,05 | 0,80 | 0,00 | 36,81 | 46,00 | -9,19 |



| EUT Position (angle ງ | | | 180 | An | Antenna Polarization | | |
|-----------------------|----------------------------|------------------------------|-----------------------|--------------------------|-----------------------------------|-------------------|----------------|
| Frequency (MHz) | Reading value (dBµV) | Antenna Factor (dB1/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Correcting reading (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
| 49,38 | 22,22 | 11,40 | 0,25 | 0,00 | 33,87 | 40.00 | -6,13 |
| 71.60 | 28,60 | 8.00 | 0.30 | 0.00 | 36,90 | 40.00 | -3.10 |
| 154,00 | 24,32 | 9,65 | 0,46 | 0,00 | 34,43 | 43,50 | -9,07 |
| 192,00 | 29,54 | 9,40 | 0,52 | 0,00 | 39,46 | 43,50 | -4,04 |
| 220,00 | 27,84 | 11,20 | 0,52 | 0,00 | 39,56 | 46,00 | -6,44 |
| 279,00 | 28,43 | 12,80 | 0,65 | 0,00 | 41,88 | 46,00 | -4,12 |
| 306,00 | 20,65 | 13,60 | 0,65 | 0,00 | 34,90 | 46,00 | -11,10 |
| 345,00 | 19,35 | 14,70 | 0,70 | 0,00 | 34,74 | 46,00 | -11,26 |
| 429,00 | 19,97 | 16,05 | 0,80 | 0,00 | 36,82 | 46,00 | -9,18 |

| EUT P | EUT Position (angle ງ | | | Antenna Polarization | | | Н |
|--------------------|----------------------------|------------------------------|-----------------------|--------------------------|-----------------------------------|-------------------|----------------|
| Frequency (MHz) | Reading value (dBµV) | Antenna Factor (dB1/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Correcting reading (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
| 49,38 | 22,04 | 11,40 | 0,25 | 0,00 | 33,69 | 40,00 | -6,31 |
| 71,60 | 28,35 | 8,00 | 0,30 | 0,00 | 36,65 | 40,00 | -3,35 |
| 154,00 | 25,38 | 9,65 | 0,46 | 0,00 | 35,49 | 43,50 | -8,01 |
| 192,00 | 29,91 | 9,40 | 0,52 | 0,00 | 39,83 | 43,50 | -3,67 |
| 220,00 | 28,35 | 11,20 | 0,52 | 0,00 | 40,07 | 46,00 | -5,93 |
| 279,00 | 28,71 | 12,80 | 0,65 | 0,00 | 42,16 | 46,00 | -3,84 |
| 306,00 | 21,11 | 13,60 | 0,65 | 0,00 | 35,36 | 46,00 | -10,64 |
| 345,00 | 18,46 | 14,70 | 0,70 | 0,00 | 33,86 | 46,00 | -12,14 |
| 429,00 | 20,83 | 16,05 | 0,80 | 0,00 | 37,68 | 46,00 | -8,32 |



| EUT Position (angle ງ | | | 275 | An | tenna Polariza | tion | Н |
|-----------------------|----------------------------|------------------------------|-----------------------|--------------------------|-----------------------------------|-------------------|----------------|
| Frequency (MHz) | Reading value (dBµV) | Antenna Factor (dB1/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Correcting reading (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
| 49,38 | 22,14 | 11,40 | 0,25 | 0,00 | 33,79 | 40,00 | -6,21 |
| 71,60 | 29,24 | 8,00 | 0,30 | 0,00 | 37,54 | 40,00 | -2,46 |
| 154,00 | 26,47 | 9,65 | 0,46 | 0,00 | 36,58 | 43,50 | -6,92 |
| 192,00 | 29,27 | 9,40 | 0,52 | 0,00 | 39,19 | 43,50 | -4,31 |
| 220,00 | 28,62 | 11,20 | 0,52 | 0,00 | 40,34 | 46,00 | -5,66 |
| 279,00 | 28,96 | 12,80 | 0,65 | 0,00 | 42,41 | 46,00 | -3,59 |
| 306,00 | 21,28 | 13,60 | 0,65 | 0,00 | 35,53 | 46,00 | -10,47 |
| 345,00 | 20,00 | 14,70 | 0,70 | 0,00 | 35,39 | 46,00 | -10,61 |
| 429,00 | 19,71 | 16,05 | 0,80 | 0,00 | 36,56 | 46,00 | -9,44 |

| EUT P | EUT Position (angle ⁹) | | | Ant | tenna Polariza | tion | Н |
|--------------------|------------------------------------|------------------------------|-----------------------|--------------------------|-----------------------------------|-------------------|----------------|
| Frequency (MHz) | Reading value (dBµV) | Antenna Factor (dB1/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Correcting reading (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
| 49,38 | 21,70 | 11,40 | 0,25 | 0,00 | 33,35 | 40,00 | -6,65 |
| 71,60 | 27,95 | 8,00 | 0,30 | 0,00 | 36,25 | 40,00 | -3,75 |
| 154,00 | 25,01 | 9,65 | 0,46 | 0,00 | 35,12 | 43,50 | -8,38 |
| 192,00 | 27,16 | 9,40 | 0,52 | 0,00 | 37,08 | 43,50 | -6,42 |
| 220,00 | 29,06 | 11,20 | 0,52 | 0,00 | 40,78 | 46,00 | -5,22 |
| 279,00 | 28,80 | 12,80 | 0,65 | 0,00 | 42,25 | 46,00 | -3,75 |
| 306,00 | 19,84 | 13,60 | 0,65 | 0,00 | 34,09 | 46,00 | -11,91 |
| 345,00 | 20,80 | 14,70 | 0,70 | 0,00 | 36,20 | 46,00 | -9,80 |
| 429,00 | 20,89 | 16,05 | 0,80 | 0,00 | 37,74 | 46,00 | -8,26 |



| EUT P | EUT Position (angle ງ | | | An | tenna Polariza | tion | V |
|--------------------|----------------------------|------------------------------|-----------------------|--------------------------|-----------------------------------|-------------------|----------------|
| Frequency (MHz) | Reading value (dBµV) | Antenna Factor (dB1/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Correcting reading (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
| 49,38 | 26,60 | 11,40 | 0,25 | 0,00 | 38,25 | 40.00 | -1,75 |
| 71,60 | 30,01 | 8,00 | 0,30 | 0,00 | 38,31 | 40,00 | -1,69 |
| 154,00 | 29,48 | 9,65 | 0,46 | 0,00 | 39,59 | 43,50 | -3,91 |
| 192,00 | 31,95 | 9,40 | 0,52 | 0,00 | 41,87 | 43,50 | -1,63 |
| 220,00 | 29,49 | 11,20 | 0,52 | 0,00 | 41,21 | 46,00 | -4,79 |
| 279,00 | 29,60 | 12,80 | 0,65 | 0,00 | 43,05 | 46,00 | -2,95 |
| 306,00 | 20,26 | 13,60 | 0,65 | 0,00 | 34,51 | 46,00 | -11,49 |
| 345,00 | 20,97 | 14,70 | 0,70 | 0,00 | 36,36 | 46,00 | -9,64 |
| 429,00 | 17,44 | 16,05 | 0,80 | 0,00 | 34,29 | 46,00 | -11,71 |

| EUT P | EUT Position (angle) | | | An | tenna Polariza | tion | V |
|--------------------|----------------------------|------------------------------|-----------------------|--------------------------|-----------------------------------|-------------------|----------------|
| Frequency (MHz) | Reading value (dBµV) | Antenna Factor (dB1/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Correcting reading (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
| 49,38 | 26,54 | 11,40 | 0,25 | 0,00 | 38,19 | 40,00 | -1,81 |
| 71,60 | 30,02 | 8,00 | 0,30 | 0,00 | 38,32 | 40,00 | -1,68 |
| 154,00 | 31,17 | 9,65 | 0,46 | 0,00 | 41,28 | 43,50 | -2,22 |
| 192,00 | 31,99 | 9,40 | 0,52 | 0,00 | 41,91 | 43,50 | -1,59 |
| 220,00 | 29,03 | 11,20 | 0,52 | 0,00 | 40,75 | 46,00 | -5,25 |
| 279,00 | 29,96 | 12,80 | 0,65 | 0,00 | 43,41 | 46,00 | -2,59 |
| 306,00 | 19,34 | 13,60 | 0,65 | 0,00 | 33,59 | 46,00 | -12,41 |
| 345,00 | 18,77 | 14,70 | 0,70 | 0,00 | 34,16 | 46,00 | -11,84 |
| 429,00 | 16,80 | 16,05 | 0,80 | 0,00 | 33,65 | 46,00 | -12,35 |



| EUT Position (angle ⁹) | | | 90 | Ant | Antenna Polarization | | |
|------------------------------------|----------------------------|------------------------------|-----------------------|--------------------------|-----------------------------------|-------------------|----------------|
| Frequency (MHz) | Reading value (dBµV) | Antenna Factor (dB1/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Correcting reading (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
| 49,38 | 26,09 | 11,40 | 0,25 | 0,00 | 37,74 | 40,00 | -2,26 |
| 71,60 | 29,95 | 8,00 | 0,30 | 0,00 | 38,25 | 40,00 | -1,75 |
| 154,00 | 30,85 | 9,65 | 0,46 | 0,00 | 40,96 | 43,50 | -2,54 |
| 192,00 | 32,21 | 9,40 | 0,52 | 0,00 | 42,13 | 43,50 | -1,37 |
| 220,00 | 28,31 | 11,20 | 0,52 | 0,00 | 40,03 | 46,00 | -5,97 |
| 279,00 | 30,05 | 12,80 | 0,65 | 0,00 | 43,50 | 46,00 | -2,50 |
| 306,00 | 20,66 | 13,60 | 0,65 | 0,00 | 34,91 | 46,00 | -11,09 |
| 345,00 | 17,75 | 14,70 | 0,70 | 0,00 | 33,15 | 46,00 | -12,85 |
| 429,00 | 19,00 | 16,05 | 0,80 | 0,00 | 35,85 | 46,00 | -10,15 |

| EUT P | EUT Position (angle ⁹ | | | Ant | Antenna Polarization | | |
|--------------------|----------------------------------|------------------------------|-----------------------|--------------------------|-----------------------------------|-------------------|----------------|
| Frequency (MHz) | Reading value (dBµV) | Antenna Factor (dB1/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Correcting reading (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
| 49,38 | 26,63 | 11,40 | 0,25 | 0,00 | 38,28 | 40,00 | -1,72 |
| 71,60 | 30,07 | 8,00 | 0,30 | 0,00 | 38,37 | 40,00 | -1,63 |
| 154,00 | 31,42 | 9,65 | 0,46 | 0,00 | 41,53 | 43,50 | -1,97 |
| 192,00 | 31,72 | 9,40 | 0,52 | 0,00 | 41,64 | 43,50 | -1,86 |
| 220,00 | 28,82 | 11,20 | 0,52 | 0,00 | 40,54 | 46,00 | -5,46 |
| 279,00 | 25,48 | 12,80 | 0,65 | 0,00 | 38,93 | 46,00 | -7,07 |
| 306,00 | 20,66 | 13,60 | 0,65 | 0,00 | 34,91 | 46,00 | -11,09 |
| 345,00 | 17,47 | 14,70 | 0,70 | 0,00 | 32,86 | 46,00 | -13,14 |
| 429,00 | 17,67 | 16,05 | 0,80 | 0,00 | 34,52 | 46,00 | -11,48 |



| EUT P | EUT Position (angle °) | | | Ant | Antenna Polarization | | |
|-----------------|----------------------------|------------------------------|-----------------------|--------------------------|-----------------------------------|-------------------|----------------|
| Frequency (MHz) | Reading value (dBµV) | Antenna Factor (dB1/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Correcting reading (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
| 49,38 | 25,27 | 11,40 | 0,25 | 0,00 | 36,92 | 40,00 | -3,08 |
| 71,60 | 30,07 | 8,00 | 0,30 | 0,00 | 38,37 | 40,00 | -1,63 |
| 154,00 | 31,14 | 9,65 | 0,46 | 0,00 | 41,25 | 43,50 | -2,25 |
| 192,00 | 26,21 | 9,40 | 0,52 | 0,00 | 36,13 | 43,50 | -7,37 |
| 220,00 | 27,95 | 11,20 | 0,52 | 0,00 | 39,67 | 46,00 | -6,33 |
| 279,00 | 25,62 | 12,80 | 0,65 | 0,00 | 39,07 | 46,00 | -6,93 |
| 306,00 | 21,53 | 13,60 | 0,65 | 0,00 | 35,78 | 46,00 | -10,22 |
| 345,00 | 19,99 | 14,70 | 0,70 | 0,00 | 35,38 | 46,00 | -10,62 |
| 429,00 | 22,55 | 16,05 | 0,80 | 0,00 | 39,40 | 46,00 | -6,60 |

| EUT P | osition (an | gle ງ | 225 | An | tion | V | |
|--------------------|----------------------------|------------------------------|-----------------------|--------------------------|-----------------------------|-------------------|----------------|
| Frequency (MHz) | Reading value (dBµV) | Antenna Factor (dB1/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Correcting reading (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
| 49,38 | 25,39 | 11,40 | 0,25 | 0,00 | 37,04 | 40,00 | -2,96 |
| 71,60 | 30,04 | 8,00 | 0,30 | 0,00 | 38,34 | 40,00 | -1,66 |
| 154,00 | 31,20 | 9,65 | 0,46 | 0,00 | 41,31 | 43,50 | -2,19 |
| 192,00 | 30,07 | 9,40 | 0,52 | 0,00 | 39,99 | 43,50 | -3,51 |
| 220,00 | 28,05 | 11,20 | 0,52 | 0,00 | 39,77 | 46,00 | -6,23 |
| 279,00 | 23,73 | 12,80 | 0,65 | 0,00 | 37,18 | 46,00 | -8,82 |
| 306,00 | 20,51 | 13,60 | 0,65 | 0,00 | 34,76 | 46,00 | -11,24 |
| 345,00 | 19,40 | 14,70 | 0,70 | 0,00 | 34,80 | 46,00 | -11,20 |
| 429,00 | 21,73 | 16,05 | 0,80 | 0,00 | 38,58 | 46,00 | -7,42 |



| EUT P | EUT Position (angle) | | | An | tenna Polariza | tion | V |
|--------------------|----------------------------|------------------------------|-----------------------|--------------------------|-----------------------------|-------------------|----------------|
| Frequency (MHz) | Reading value (dBµV) | Antenna Factor (dB1/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Correcting reading (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
| 49,38 | 23,12 | 11,40 | 0,25 | 0,00 | 34,77 | 40,00 | -5,23 |
| 49,30 | 23,12 | 11,40 | 0,25 | 0,00 | 34,77 | 40,00 | -5,23 |
| 71,60 | 27,36 | 8,00 | 0,30 | 0,00 | 35,66 | 40,00 | -4,34 |
| 154,00 | 28,42 | 9,65 | 0,46 | 0,00 | 38,53 | 43,50 | -4,97 |
| 192,00 | 30,25 | 9,40 | 0,52 | 0,00 | 40,17 | 43,50 | -3,33 |
| 220,00 | 29,90 | 11,20 | 0,52 | 0,00 | 41,62 | 46,00 | -4,38 |
| 279,00 | 25,25 | 12,80 | 0,65 | 0,00 | 38,70 | 46,00 | -7,30 |
| 306,00 | 23,23 | 13,60 | 0,65 | 0,00 | 37,48 | 46,00 | -8,52 |
| 345,00 | 18,05 | 14,70 | 0,70 | 0,00 | 33,45 | 46,00 | -12,55 |
| 429,00 | 17,43 | 16,05 | 0,80 | 0,00 | 34,28 | 46,00 | -11,72 |

| EUT P | osition (an | gle ງ | 315 | Ant | Antenna Polarization | | |
|--------------------|----------------------------|------------------------------|-----------------------|--------------------------|-----------------------------------|-------------------|----------------|
| Frequency (MHz) | Reading value (dBµV) | Antenna Factor (dB1/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Correcting reading (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
| 49,38 | 25,01 | 11,40 | 0,25 | 0,00 | 36,66 | 40,00 | -3,34 |
| 71,60 | 29,92 | 8,00 | 0,30 | 0,00 | 38,22 | 40,00 | -1,78 |
| 154,00 | 30,02 | 9,65 | 0,46 | 0,00 | 40,13 | 43,50 | -3,37 |
| 192,00 | 30,69 | 9,40 | 0,52 | 0,00 | 40,61 | 43,50 | -2,89 |
| 220,00 | 28,84 | 11,20 | 0,52 | 0,00 | 40,56 | 46,00 | -5,44 |
| 279,00 | 26,30 | 12,80 | 0,65 | 0,00 | 39,75 | 46,00 | -6,25 |
| 306,00 | 20,46 | 13,60 | 0,65 | 0,00 | 34,71 | 46,00 | -11,29 |
| 345,00 | 18,52 | 14,70 | 0,70 | 0,00 | 33,92 | 46,00 | -12,08 |
| 429,00 | 20,89 | 16,05 | 0,80 | 0,00 | 37,74 | 46,00 | -8,26 |



| TEST No. 7 | | Title "Radiated disturbances > 960 MHz" | |
|---------------|-----------------|---------------------------------------------|--------------------------------------------------------------------------------------------------|
| REQUIREMENTS | Test definition | device operating und section shall not exce | es above 960 MHz from a er the provisions of this ed the following average ed using a resolution |
| ∑ W | Test setup | ANSI C63.4 | |
| E E | Test facility | Open Area Test Site (| OATS) |
| ζEQ | Test distance | 1 meter | |
| | RBW bandwidth | 1 MHz | |
| TEST | VBW bandwidth | 1 MHz | |
| | Detector | RMS | |
| | Remark | / | |

Limits:

| Frequency | EIRP @ 3 meters (1 MHz BW) | Field strength @ 3 meters (1 MHz BW) | Field strength @ 1 meters (1 MHz BW) | |
|-------------|----------------------------------|--------------------------------------------|--------------------------------------------|--|
| (MHz) | (dBm) | (dBµV/m) | (dBµV/m) | |
| 960-1610 | -65.3 | 29,9 | 39,4 | |
| 1610-1990 | -53.3 | 41,9 | 51,4 | |
| 1990-3100 | -51.3 | 43,9 | 53,4 | |
| 3100-10600 | -41.3 | 53,9 | 63,4 | |
| Above 10600 | -51.3 | 43,9 | 53,4 | |

Remark: The limits were converted from EIRP to field strength at 3 and 1 meter according to FCC 15.503(k).

Test Result:

The EUT meets the requirements of section 15.509(d)



Test Procedure:

- 1) The EUT was placed on sandpit area filled with dry sand initially placed in front of the ground plane (0° degree position)
- 2) The receiving antenna is placed at 1 meter away from the EUT and it is pointed in the direction of the radiating head with an inclination of -10° to find the highest emission.
- 3) The receiving antenna was positioned in horizontal polarization.
- 4) The measurements were made with the detector set to RMS with a bandwidth of 1 MHz during monitoring the frequency range above 960 MHz.
- 5) Upon detection of a suspect emission signal, its amplitude and frequency were noted.
- 6) It is recommended to demodulate the received signals for suitable discrimination of the ambient emission from the EUT emission.
- 7) At the worst case combination of the EUT operating mode and antenna height , the field strength measure was recorded.
- 8) The receiving antenna was positioned in vertical polarization and the steps 2 to 6 was repeated.
- 9) The EUT was rotating from 0° to 360° degrees with 45° step increment and the steps 4 to 7 was repeated.
- 10) All the worst case combination field strength emissions founded of each EUT position and antenna polarization was recorded in the following table and compared with the applicable limits.

Summary of Test Result data:

All maximum Field strength emission are found at the following test set-up conditions:

| Frequency | EUT Position | Antenna Polarization | Correcting reading | Limit | Margin | Result |
|-----------|-----------------|-------------------------|--------------------|----------|--------|--------|
| (MHz) | (angle) | (V/H) | (dBµV/m) | (dBµV/m) | (dB) | |
| 1350,00 | 315 | Н | 51,47 | 39,40 | -0,74 | Comply |
| 1422,40 | 0 | Н | 51,21 | 39,40 | -0,79 | Comply |
| 1496,80 | 0 | Н | 51,14 | 39,40 | -0,66 | Comply |
| 1573,60 | 0 | Н | 51,21 | 39,40 | -0,58 | Comply |
| 1645,60 | 0 | Н | 55,84 | 51,40 | -7,76 | Comply |
| 1698,40 | 0 | Н | 57,37 | 51,40 | -6,23 | Comply |
| 1914,40 | 0 | Н | 57,91 | 51,40 | -5,22 | Comply |
| 2011,32 | 90 | V | 57,57 | 53,40 | -7,44 | Comply |
| 2058,40 | 90 | V | 56,86 | 53,40 | -8,16 | Comply |
| 2238,40 | 45 | V | 55,87 | 53,40 | -8,43 | Comply |
| 2241,80 | 45 | V | 55,69 | 53,40 | -8,59 | Comply |
| 2356,00 | 45 | V | 56,41 | 53,40 | -7,09 | Comply |
| 2447,20 | 45 | V | 57,88 | 53,40 | -5,60 | Comply |
| 3382,00 | 275 | V | 50,06 | 63,40 | -22,37 | Comply |
| 5425,00 | 225 | V | 48,61 | 63,40 | -20,29 | Comply |



Test Data detail:

| EUT P | osition (an | gle ງ | 0 | An | tenna Polariza | tion | Н |
|--------------------|----------------------------|------------------------------|-----------------------|--------------------------|-----------------------------|-------------------|----------------|
| Frequency (MHz) | Reading value (dBµV) | Antenna Factor (dB1/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Correcting reading (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
| 1350,00 | 51,09 | 24,90 | 0,30 | 38,00 | 38,29 | 39,40 | -1,11 |
| 1422,40 | 51,21 | 25,10 | 0,30 | 38,00 | 38,61 | 39,40 | -0,79 |
| 1496,80 | 51,14 | 25,30 | 0,30 | 38,00 | 38,74 | 39,40 | -0,66 |
| 1573,60 | 51,21 | 25,30 | 0,31 | 38,00 | 38,82 | 39,40 | -0,58 |
| 1645,60 | 57,84 | 25,48 | 0,32 | 38,00 | 45,64 | 51,40 | -5,76 |
| 1698,40 | 57,37 | 25,48 | 0,32 | 38,00 | 45,17 | 51,40 | -6,23 |
| 1914,40 | 57,91 | 25,90 | 0,37 | 38,00 | 46,18 | 51,40 | -5,22 |
| 2011,32 | 56,76 | 26,00 | 0,39 | 38,00 | 45,15 | 53,40 | -8,25 |
| 2058,40 | 56,60 | 26,00 | 0,38 | 38,00 | 44,98 | 53,40 | -8,42 |
| 2238,40 | 55,11 | 26,75 | 0,35 | 38,00 | 44,21 | 53,40 | -9,19 |
| 2241,80 | 55,16 | 26,75 | 0,38 | 38,00 | 44,28 | 53,40 | -9,12 |
| 2356,00 | 53,73 | 27,50 | 0,40 | 38,00 | 43,63 | 53,40 | -9,77 |
| 2447,20 | 53,57 | 27,50 | 0,42 | 38,00 | 43,49 | 53,40 | -9,91 |
| 3382,00 | 48,98 | 28,60 | 0,37 | 38,00 | 39,95 | 63,40 | -23,45 |
| 5425,00 | 47,58 | 32,00 | 0,50 | 38,00 | 42,07 | 63,40 | -21,33 |

| EUT P | osition (an | gle ງ | 45 | An | tenna Polariza | tion | Н |
|-----------|---------------|-------------------|---------------|------------------|--------------------|----------|--------|
| Frequency | Reading value | Antenna Factor | Cable Loss | Pre-Amp. Gain | Correcting reading | Limit | Margin |
| (MHz) | (dBµV) | (dB1/m) | (dB) | (dB) | (dBµV/m) | (dBµV/m) | (dB) |
| 1350,00 | 48,89 | 24,90 | 0,30 | 38,00 | 36,09 | 39,40 | -3,31 |
| 1422,40 | 47,72 | 25,10 | 0,30 | 38,00 | 35,12 | 39,40 | -4,28 |
| 1496,80 | 48,11 | 25,30 | 0,30 | 38,00 | 35,71 | 39,40 | -3,69 |
| 1573,60 | 47,97 | 25,30 | 0,31 | 38,00 | 35,58 | 39,40 | -3,82 |
| 1645,60 | 52,28 | 25,48 | 0,32 | 38,00 | 40,08 | 51,40 | -11,32 |
| 1698,40 | 52,55 | 25,48 | 0,32 | 38,00 | 40,35 | 51,40 | -11,05 |
| 1914,40 | 53,95 | 25,90 | 0,37 | 38,00 | 42,22 | 51,40 | -9,18 |
| 2011,32 | 53,83 | 26,00 | 0,39 | 38,00 | 42,22 | 53,40 | -11,18 |
| 2058,40 | 53,71 | 26,00 | 0,38 | 38,00 | 42,09 | 53,40 | -11,31 |
| 2238,40 | 52,37 | 26,75 | 0,35 | 38,00 | 41,47 | 53,40 | -11,93 |
| 2241,80 | 52,16 | 26,75 | 0,38 | 38,00 | 41,29 | 53,40 | -12,11 |
| 2356,00 | 51,21 | 27,50 | 0,40 | 38,00 | 41,11 | 53,40 | -12,29 |
| 2447,20 | 52,40 | 27,50 | 0,42 | 38,00 | 42,32 | 53,40 | -11,08 |
| 3382,00 | 49,29 | 28,60 | 0,37 | 38,00 | 40,26 | 63,40 | -23,14 |
| 5425,00 | 47,79 | 32,00 | 0,50 | 38,00 | 42,28 | 63,40 | -21,12 |



| EUT P | osition (an | gle ງ | 90 | An | tenna Polariza | tion | Н |
|-----------|---------------|-------------------|---------------|------------------|--------------------|----------|--------|
| Frequency | Reading value | Antenna Factor | Cable Loss | Pre-Amp. Gain | Correcting reading | Limit | Margin |
| (MHz) | (dBµV) | (dB1/m) | (dB) | (dB) | (dBµV/m) | (dBµV/m) | (dB) |
| 1350,00 | 50,13 | 24,90 | 0,30 | 38,00 | 37,32 | 39,40 | -2,08 |
| 1422,40 | 49,10 | 25,10 | 0,30 | 38,00 | 36,50 | 39,40 | -2,90 |
| 1496,80 | 49,45 | 25,30 | 0,30 | 38,00 | 37,05 | 39,40 | -2,35 |
| 1573,60 | 51,05 | 25,30 | 0,31 | 38,00 | 38,66 | 39,40 | -0,74 |
| 1645,60 | 54,08 | 25,48 | 0,32 | 38,00 | 41,88 | 51,40 | -9,52 |
| 1698,40 | 53,78 | 25,48 | 0,32 | 38,00 | 41,58 | 51,40 | -9,82 |
| 1914,40 | 53,65 | 25,90 | 0,37 | 38,00 | 41,92 | 51,40 | -9,48 |
| 2011,32 | 53,44 | 26,00 | 0,39 | 38,00 | 41,83 | 53,40 | -11,57 |
| 2058,40 | 52,93 | 26,00 | 0,38 | 38,00 | 41,31 | 53,40 | -12,09 |
| 2238,40 | 52,72 | 26,75 | 0,35 | 38,00 | 41,82 | 53,40 | -11,58 |
| 2241,80 | 52,56 | 26,75 | 0,38 | 38,00 | 41,68 | 53,40 | -11,72 |
| 2356,00 | 51,97 | 27,50 | 0,40 | 38,00 | 41,87 | 53,40 | -11,53 |
| 2447,20 | 52,15 | 27,50 | 0,42 | 38,00 | 42,07 | 53,40 | -11,33 |
| 3382,00 | 49,21 | 28,60 | 0,37 | 38,00 | 40,18 | 63,40 | -23,22 |
| 5425,00 | 47,36 | 32,00 | 0,50 | 38,00 | 41,85 | 63,40 | -21,55 |

| EUT P | osition (an | gle ⁹) | 135 | Ant | tenna Polariza | tion | Н |
|-----------|---------------|--------------------|---------------|------------------|--------------------|----------|--------|
| Frequency | Reading value | Antenna Factor | Cable Loss | Pre-Amp. Gain | Correcting reading | Limit | Margin |
| (MHz) | (dBµV) | (dB1/m) | (dB) | (dB) | (dBµV/m) | (dBµV/m) | (dB) |
| 1350,00 | 47,10 | 24,90 | 0,30 | 38,00 | 34,29 | 39,40 | -5,11 |
| 1422,40 | 46,86 | 25,10 | 0,30 | 38,00 | 34,26 | 39,40 | -5,14 |
| 1496,80 | 48,90 | 25,30 | 0,30 | 38,00 | 36,50 | 39,40 | -2,90 |
| 1573,60 | 50,43 | 25,30 | 0,31 | 38,00 | 38,04 | 39,40 | -1,36 |
| 1645,60 | 54,86 | 25,48 | 0,32 | 38,00 | 42,66 | 51,40 | -8,74 |
| 1698,40 | 53,70 | 25,48 | 0,32 | 38,00 | 41,50 | 51,40 | -9,90 |
| 1914,40 | 53,40 | 25,90 | 0,37 | 38,00 | 41,67 | 51,40 | -9,73 |
| 2011,32 | 52,29 | 26,00 | 0,39 | 38,00 | 40,68 | 53,40 | -12,72 |
| 2058,40 | 51,43 | 26,00 | 0,38 | 38,00 | 39,81 | 53,40 | -13,59 |
| 2238,40 | 49,32 | 26,75 | 0,35 | 38,00 | 38,42 | 53,40 | -14,98 |
| 2241,80 | 49,03 | 26,75 | 0,38 | 38,00 | 38,15 | 53,40 | -15,25 |
| 2356,00 | 48,52 | 27,50 | 0,40 | 38,00 | 38,42 | 53,40 | -14,98 |
| 2447,20 | 49,39 | 27,50 | 0,42 | 38,00 | 39,31 | 53,40 | -14,09 |
| 3382,00 | 49,28 | 28,60 | 0,37 | 38,00 | 40,25 | 63,40 | -23,15 |
| 5425,00 | 47,28 | 32,00 | 0,50 | 38,00 | 41,78 | 63,40 | -21,62 |



| EUT P | osition (an | gle ງ | 180 | An | tenna Polariza | tion | Н |
|-----------|---------------|-------------------|---------------|------------------|--------------------|----------|--------|
| Frequency | Reading value | Antenna Factor | Cable Loss | Pre-Amp. Gain | Correcting reading | Limit | Margin |
| (MHz) | (dBµV) | (dB1/m) | (dB) | (dB) | (dBµV/m) | (dBµV/m) | (dB) |
| 1350,00 | 50,19 | 24,90 | 0,30 | 38,00 | 37,39 | 39,40 | -2,01 |
| 1422,40 | 50,21 | 25,10 | 0,30 | 38,00 | 37,61 | 39,40 | -1,79 |
| 1496,80 | 50,79 | 25,30 | 0,30 | 38,00 | 38,39 | 39,40 | -1,01 |
| 1573,60 | 50,68 | 25,30 | 0,31 | 38,00 | 38,29 | 39,40 | -1,11 |
| 1645,60 | 55,00 | 25,48 | 0,32 | 38,00 | 42,80 | 51,40 | -8,60 |
| 1698,40 | 53,63 | 25,48 | 0,32 | 38,00 | 41,43 | 51,40 | -9,97 |
| 1914,40 | 52,73 | 25,90 | 0,37 | 38,00 | 41,00 | 51,40 | -10,40 |
| 2011,32 | 51,88 | 26,00 | 0,39 | 38,00 | 40,27 | 53,40 | -13,13 |
| 2058,40 | 51,73 | 26,00 | 0,38 | 38,00 | 40,11 | 53,40 | -13,29 |
| 2238,40 | 50,32 | 26,75 | 0,35 | 38,00 | 39,42 | 53,40 | -13,98 |
| 2241,80 | 49,14 | 26,75 | 0,38 | 38,00 | 38,27 | 53,40 | -15,13 |
| 2356,00 | 49,09 | 27,50 | 0,40 | 38,00 | 38,99 | 53,40 | -14,41 |
| 2447,20 | 50,04 | 27,50 | 0,42 | 38,00 | 39,96 | 53,40 | -13,44 |
| 3382,00 | 48,83 | 28,60 | 0,37 | 38,00 | 39,80 | 63,40 | -23,60 |
| 5425,00 | 47,37 | 32,00 | 0,50 | 38,00 | 41,87 | 63,40 | -21,53 |

| EUT P | osition (an | gle ງ | 225 | An | tenna Polariza | tion | Н |
|-----------|---------------|-------------------|---------------|------------------|--------------------|----------|--------|
| Frequency | Reading value | Antenna Factor | Cable Loss | Pre-Amp. Gain | Correcting reading | Limit | Margin |
| (MHz) | (dBµV) | (dB1/m) | (dB) | (dB) | (dBµV/m) | (dBµV/m) | (dB) |
| 1350,00 | 45,34 | 24,90 | 0,30 | 38,00 | 32,53 | 39,40 | -6,87 |
| 1422,40 | 46,37 | 25,10 | 0,30 | 38,00 | 33,77 | 39,40 | -5,63 |
| 1496,80 | 46,37 | 25,30 | 0,30 | 38,00 | 33,97 | 39,40 | -5,43 |
| 1573,60 | 48,51 | 25,30 | 0,31 | 38,00 | 36,12 | 39,40 | -3,28 |
| 1645,60 | 52,23 | 25,48 | 0,32 | 38,00 | 40,03 | 51,40 | -11,37 |
| 1698,40 | 52,68 | 25,48 | 0,32 | 38,00 | 40,48 | 51,40 | -10,92 |
| 1914,40 | 52,87 | 25,90 | 0,37 | 38,00 | 41,14 | 51,40 | -10,26 |
| 2011,32 | 52,04 | 26,00 | 0,39 | 38,00 | 40,43 | 53,40 | -12,97 |
| 2058,40 | 51,72 | 26,00 | 0,38 | 38,00 | 40,10 | 53,40 | -13,30 |
| 2238,40 | 48,87 | 26,75 | 0,35 | 38,00 | 37,97 | 53,40 | -15,43 |
| 2241,80 | 49,42 | 26,75 | 0,38 | 38,00 | 38,54 | 53,40 | -14,86 |
| 2356,00 | 47,38 | 27,50 | 0,40 | 38,00 | 37,28 | 53,40 | -16,12 |
| 2447,20 | 49,60 | 27,50 | 0,42 | 38,00 | 39,52 | 53,40 | -13,88 |
| 3382,00 | 48,52 | 28,60 | 0,37 | 38,00 | 39,49 | 63,40 | -23,91 |
| 5425,00 | 47,85 | 32,00 | 0,50 | 38,00 | 42,34 | 63,40 | -21,06 |



| EUT P | osition (an | gle ງ | 275 | An | tenna Polariza | tion | Н |
|--------------------|----------------------------|------------------------------|-----------------------|--------------------------|-----------------------------|-------------------|----------------|
| Frequency (MHz) | Reading value (dBµV) | Antenna Factor (dB1/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Correcting reading (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
| 1350,00 | 49,35 | 24,90 | 0,30 | 38,00 | 36,54 | 39,40 | -2,86 |
| 1422,40 | 48,50 | 25,10 | 0,30 | 38,00 | 35,90 | 39,40 | -3,50 |
| 1496,80 | 49,85 | 25,30 | 0,30 | 38,00 | 37,45 | 39,40 | -1,95 |
| 1573,60 | 50,24 | 25,30 | 0,31 | 38,00 | 37,85 | 39,40 | -1,55 |
| 1645,60 | 54,71 | 25,48 | 0,32 | 38,00 | 42,51 | 51,40 | -8,89 |
| 1698,40 | 54,61 | 25,48 | 0,32 | 38,00 | 42,41 | 51,40 | -8,99 |
| 1914,40 | 54,08 | 25,90 | 0,37 | 38,00 | 42,35 | 51,40 | -9,05 |
| 2011,32 | 52,70 | 26,00 | 0,39 | 38,00 | 41,09 | 53,40 | -12,31 |
| 2058,40 | 51,96 | 26,00 | 0,38 | 38,00 | 40,34 | 53,40 | -13,06 |
| 2238,40 | 51,30 | 26,75 | 0,35 | 38,00 | 40,40 | 53,40 | -13,00 |
| 2241,80 | 51,31 | 26,75 | 0,38 | 38,00 | 40,43 | 53,40 | -12,97 |
| 2356,00 | 50,89 | 27,50 | 0,40 | 38,00 | 40,79 | 53,40 | -12,61 |
| 2447,20 | 52,14 | 27,50 | 0,42 | 38,00 | 42,06 | 53,40 | -11,34 |
| 3382,00 | 48,70 | 28,60 | 0,37 | 38,00 | 39,67 | 63,40 | -23,73 |
| 5425,00 | 47,80 | 32,00 | 0,50 | 38,00 | 42,30 | 63,40 | -21,10 |

| EUT P | osition (an | gle ງ | 315 | Ant | tenna Polariza | tion | Н |
|--------------------|----------------------------|------------------------------|-----------------------|--------------------------|-----------------------------------|-------------------|----------------|
| Frequency (MHz) | Reading value (dBµV) | Antenna Factor (dB1/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Correcting reading (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
| 1350,00 | 51,47 | 24,90 | 0,30 | 38,00 | 38,66 | 39,40 | -0,74 |
| 1422,40 | 50,55 | 25,10 | 0,30 | 38,00 | 37,95 | 39,40 | -0,74 -1,45 |
| 1496,80 | 50,96 | 25,30 | 0,30 | 38,00 | 38,56 | 39,40 | -0,84 |
| 1573,60 | 50,66 | 25,30 | 0,31 | 38,00 | 38,27 | 39,40 | -1,13 |
| 1645,60 | 56,63 | 25,48 | 0,32 | 38,00 | 44,43 | 51,40 | -6,97 |
| 1698,40 | 56,24 | 25,48 | 0,32 | 38,00 | 44,04 | 51,40 | -7,36 |
| 1914,40 | 54,35 | 25,90 | 0,37 | 38,00 | 42,62 | 51,40 | -8,78 |
| 2011,32 | 52,35 | 26,00 | 0,39 | 38,00 | 40,74 | 53,40 | -12,66 |
| 2058,40 | 50,88 | 26,00 | 0,38 | 38,00 | 39,26 | 53,40 | -14,14 |
| 2238,40 | 51,49 | 26,75 | 0,35 | 38,00 | 40,59 | 53,40 | -12,81 |
| 2241,80 | 50,66 | 26,75 | 0,38 | 38,00 | 39,79 | 53,40 | -13,61 |
| 2356,00 | 50,97 | 27,50 | 0,40 | 38,00 | 40,87 | 53,40 | -12,53 |
| 2447,20 | 51,35 | 27,50 | 0,42 | 38,00 | 41,27 | 53,40 | -12,13 |
| 3382,00 | 48,60 | 28,60 | 0,37 | 38,00 | 39,57 | 63,40 | -23,83 |
| 5425,00 | 47,27 | 32,00 | 0,50 | 38,00 | 41,76 | 63,40 | -21,64 |



| EUT Position (angle ງ | | 0 | Antenna Polarization | | | V | |
|-----------------------|----------------------------|------------------------------|-----------------------|--------------------------|-----------------------------------|-------------------|----------------|
| Frequency (MHz) | Reading value (dBµV) | Antenna Factor (dB1/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Correcting reading (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
| 1350,00 | 47,13 | 24,90 | 0,30 | 38,00 | 34,33 | 39,40 | -5,07 |
| 1422,40 | 45,46 | 25,10 | 0,30 | 38,00 | 32,86 | 39,40 | -6,54 |
| 1496,80 | 45,43 | 25,30 | 0,30 | 38,00 | 33,03 | 39,40 | -6,37 |
| 1573,60 | 46,27 | 25,30 | 0,31 | 38,00 | 33,88 | 39,40 | -5,52 |
| 1645,60 | 52,20 | 25,48 | 0,32 | 38,00 | 40,00 | 51,40 | -11,40 |
| 1698,40 | 52,18 | 25,48 | 0,32 | 38,00 | 39,98 | 51,40 | -11,42 |
| 1914,40 | 52,43 | 25,90 | 0,37 | 38,00 | 40,70 | 51,40 | -10,70 |
| 2011,32 | 51,56 | 26,00 | 0,39 | 38,00 | 39,95 | 53,40 | -13,45 |
| 2058,40 | 49,89 | 26,00 | 0,38 | 38,00 | 38,27 | 53,40 | -15,13 |
| 2238,40 | 49,42 | 26,75 | 0,35 | 38,00 | 38,52 | 53,40 | -14,88 |
| 2241,80 | 48,67 | 26,75 | 0,38 | 38,00 | 37,79 | 53,40 | -15,61 |
| 2356,00 | 49,69 | 27,50 | 0,40 | 38,00 | 39,59 | 53,40 | -13,81 |
| 2447,20 | 55,13 | 27,50 | 0,42 | 38,00 | 45,05 | 53,40 | -8,35 |
| 3382,00 | 49,37 | 28,60 | 0,37 | 38,00 | 40,34 | 63,40 | -23,06 |
| 5425,00 | 47,40 | 32,00 | 0,50 | 38,00 | 41,90 | 63,40 | -21,50 |

| EUT Position (angle ⁹ | | 45 | Antenna Polarization | | | V | |
|----------------------------------|---------------|-------------------|----------------------|------------------|--------------------|----------|--------|
| Frequency | Reading value | Antenna Factor | Cable Loss | Pre-Amp. Gain | Correcting reading | Limit | Margin |
| (MHz) | (dBµV) | (dB1/m) | (dB) | (dB) | (dBµV/m) | (dBµV/m) | (dB) |
| 1350,00 | 48,12 | 24,90 | 0,30 | 38,00 | 35,32 | 39,40 | -4,08 |
| 1422,40 | 47,47 | 25,10 | 0,30 | 38,00 | 34,87 | 39,40 | -4,53 |
| 1496,80 | 47,95 | 25,30 | 0,30 | 38,00 | 35,55 | 39,40 | -3,85 |
| 1573,60 | 47,47 | 25,30 | 0,31 | 38,00 | 35,08 | 39,40 | -4,32 |
| 1645,60 | 52,61 | 25,48 | 0,32 | 38,00 | 40,41 | 51,40 | -10,99 |
| 1698,40 | 52,47 | 25,48 | 0,32 | 38,00 | 40,27 | 51,40 | -11,13 |
| 1914,40 | 55,73 | 25,90 | 0,37 | 38,00 | 44,00 | 51,40 | -7,40 |
| 2011,32 | 55,21 | 26,00 | 0,39 | 38,00 | 43,60 | 53,40 | -9,80 |
| 2058,40 | 55,20 | 26,00 | 0,38 | 38,00 | 43,58 | 53,40 | -9,82 |
| 2238,40 | 55,87 | 26,75 | 0,35 | 38,00 | 44,97 | 53,40 | -8,43 |
| 2241,80 | 55,69 | 26,75 | 0,38 | 38,00 | 44,81 | 53,40 | -8,59 |
| 2356,00 | 56,41 | 27,50 | 0,40 | 38,00 | 46,31 | 53,40 | -7,09 |
| 2447,20 | 57,88 | 27,50 | 0,42 | 38,00 | 47,80 | 53,40 | -5,60 |
| 3382,00 | 49,20 | 28,60 | 0,37 | 38,00 | 40,17 | 63,40 | -23,23 |
| 5425,00 | 47,88 | 32,00 | 0,50 | 38,00 | 42,38 | 63,40 | -21,02 |



| EUT Position (angle ⁹) | | | 90 | Antenna Polarization | | | V |
|------------------------------------|----------------------------|------------------------------|-----------------------|--------------------------|-----------------------------|-------------------|----------------|
| Frequency (MHz) | Reading value (dBµV) | Antenna Factor (dB1/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Correcting reading (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
| 1350,00 | 49,86 | 24,90 | 0,30 | 38,00 | 37,05 | 39,40 | -2,35 |
| 1422,40 | 46,54 | 25,10 | 0,30 | 38,00 | 33,94 | 39,40 | -5,46 |
| 1496,80 | 49,24 | 25,30 | 0,30 | 38,00 | 36,84 | 39,40 | -2,56 |
| 1573,60 | 50,47 | 25,30 | 0,31 | 38,00 | 38,08 | 39,40 | -1,32 |
| 1645,60 | 56,01 | 25,48 | 0,32 | 38,00 | 43,81 | 51,40 | -7,59 |
| 1698,40 | 56,38 | 25,48 | 0,32 | 38,00 | 44,18 | 51,40 | -7,22 |
| 1914,40 | 57,28 | 25,90 | 0,37 | 38,00 | 45,55 | 51,40 | -5,85 |
| 2011,32 | 57,57 | 26,00 | 0,39 | 38,00 | 45,96 | 53,40 | -7,44 |
| 2058,40 | 56,86 | 26,00 | 0,38 | 38,00 | 45,24 | 53,40 | -8,16 |
| 2238,40 | 55,73 | 26,75 | 0,35 | 38,00 | 44,83 | 53,40 | -8,57 |
| 2241,80 | 55,67 | 26,75 | 0,38 | 38,00 | 44,79 | 53,40 | -8,61 |
| 2356,00 | 55,96 | 27,50 | 0,40 | 38,00 | 45,86 | 53,40 | -7,54 |
| 2447,20 | 57,17 | 27,50 | 0,42 | 38,00 | 47,09 | 53,40 | -6,31 |
| 3382,00 | 48,55 | 28,60 | 0,37 | 38,00 | 39,52 | 63,40 | -23,88 |
| 5425,00 | 47,95 | 32,00 | 0,50 | 38,00 | 42,45 | 63,40 | -20,95 |

| EUT Position (angle ⁹ | | 135 | Antenna Polarization | | | V | |
|----------------------------------|---------------|-------------------|----------------------|------------------|--------------------|----------|--------|
| Frequency | Reading value | Antenna Factor | Cable Loss | Pre-Amp. Gain | Correcting reading | Limit | Margin |
| (MHz) | (dBµV) | (dB1/m) | (dB) | (dB) | (dBµV/m) | (dBµV/m) | (dB) |
| 1350,00 | 47,88 | 24,90 | 0,30 | 38,00 | 35,08 | 39,40 | -4,32 |
| 1422,40 | 46,83 | 25,10 | 0,30 | 38,00 | 34,23 | 39,40 | -5,17 |
| 1496,80 | 48,38 | 25,30 | 0,30 | 38,00 | 35,98 | 39,40 | -3,42 |
| 1573,60 | 50,39 | 25,30 | 0,31 | 38,00 | 38,00 | 39,40 | -1,40 |
| 1645,60 | 54,62 | 25,48 | 0,32 | 38,00 | 42,42 | 51,40 | -8,98 |
| 1698,40 | 55,86 | 25,48 | 0,32 | 38,00 | 43,66 | 51,40 | -7,74 |
| 1914,40 | 57,17 | 25,90 | 0,37 | 38,00 | 45,44 | 51,40 | -5,96 |
| 2011,32 | 55,13 | 26,00 | 0,39 | 38,00 | 43,52 | 53,40 | -9,88 |
| 2058,40 | 55,48 | 26,00 | 0,38 | 38,00 | 43,86 | 53,40 | -9,54 |
| 2238,40 | 53,34 | 26,75 | 0,35 | 38,00 | 42,44 | 53,40 | -10,96 |
| 2241,80 | 53,16 | 26,75 | 0,38 | 38,00 | 42,29 | 53,40 | -11,11 |
| 2356,00 | 53,18 | 27,50 | 0,40 | 38,00 | 43,08 | 53,40 | -10,32 |
| 2447,20 | 55,83 | 27,50 | 0,42 | 38,00 | 45,75 | 53,40 | -7,65 |
| 3382,00 | 48,99 | 28,60 | 0,37 | 38,00 | 39,96 | 63,40 | -23,44 |
| 5425,00 | 47,23 | 32,00 | 0,50 | 38,00 | 41,72 | 63,40 | -21,68 |



| EUT Position (angle ງ | | 180 | Antenna Polarization | | | V | |
|-----------------------|----------------------------|------------------------------|-----------------------|--------------------------|-----------------------------------|-------------------|----------------|
| Frequency (MHz) | Reading value (dBµV) | Antenna Factor (dB1/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Correcting reading (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
| 1350,00 | 46,47 | 24,90 | 0,30 | 38,00 | 33,67 | 39,40 | -5,73 |
| 1422,40 | 44,69 | 25,10 | 0,30 | 38,00 | 32,09 | 39,40 | -7,31 |
| 1496,80 | 45,31 | 25,30 | 0,30 | 38,00 | 32,91 | 39,40 | -6,49 |
| 1573,60 | 47,45 | 25,30 | 0,31 | 38,00 | 35,06 | 39,40 | -4,34 |
| 1645,60 | 49,95 | 25,48 | 0,32 | 38,00 | 37,75 | 51,40 | -13,65 |
| 1698,40 | 50,66 | 25,48 | 0,32 | 38,00 | 38,46 | 51,40 | -12,94 |
| 1914,40 | 51,75 | 25,90 | 0,37 | 38,00 | 40,02 | 51,40 | -11,38 |
| 2011,32 | 51,73 | 26,00 | 0,39 | 38,00 | 40,12 | 53,40 | -13,28 |
| 2058,40 | 50,92 | 26,00 | 0,38 | 38,00 | 39,30 | 53,40 | -14,10 |
| 2238,40 | 50,03 | 26,75 | 0,35 | 38,00 | 39,13 | 53,40 | -14,27 |
| 2241,80 | 49,31 | 26,75 | 0,38 | 38,00 | 38,43 | 53,40 | -14,97 |
| 2356,00 | 49,51 | 27,50 | 0,40 | 38,00 | 39,41 | 53,40 | -13,99 |
| 2447,20 | 54,71 | 27,50 | 0,42 | 38,00 | 44,63 | 53,40 | -8,77 |
| 3382,00 | 48,86 | 28,60 | 0,37 | 38,00 | 39,83 | 63,40 | -23,57 |
| 5425,00 | 47,64 | 32,00 | 0,50 | 38,00 | 42,13 | 63,40 | -21,27 |

| EUT P | EUT Position (angle ງ | | | Antenna Polarization | | | V |
|-----------|-----------------------|-------------------|---------------|----------------------|--------------------|----------|--------|
| Frequency | Reading value | Antenna Factor | Cable Loss | Pre-Amp. Gain | Correcting reading | Limit | Margin |
| (MHz) | (dBµV) | (dB1/m) | (dB) | (dB) | (dBµV/m) | (dBµV/m) | (dB) |
| 1350,00 | 47,32 | 24,90 | 0,30 | 38,00 | 34,52 | 39,40 | -4,88 |
| 1422,40 | 46,44 | 25,10 | 0,30 | 38,00 | 33,84 | 39,40 | -5,56 |
| 1496,80 | 48,32 | 25,30 | 0,30 | 38,00 | 35,92 | 39,40 | -3,48 |
| 1573,60 | 49,43 | 25,30 | 0,31 | 38,00 | 37,04 | 39,40 | -2,36 |
| 1645,60 | 54,82 | 25,48 | 0,32 | 38,00 | 42,62 | 51,40 | -8,78 |
| 1698,40 | 55,35 | 25,48 | 0,32 | 38,00 | 43,15 | 51,40 | -8,25 |
| 1914,40 | 56,67 | 25,90 | 0,37 | 38,00 | 44,94 | 51,40 | -6,46 |
| 2011,32 | 56,42 | 26,00 | 0,39 | 38,00 | 44,81 | 53,40 | -8,59 |
| 2058,40 | 56,23 | 26,00 | 0,38 | 38,00 | 44,61 | 53,40 | -8,79 |
| 2238,40 | 54,16 | 26,75 | 0,35 | 38,00 | 43,26 | 53,40 | -10,14 |
| 2241,80 | 54,38 | 26,75 | 0,38 | 38,00 | 43,51 | 53,40 | -9,89 |
| 2356,00 | 53,81 | 27,50 | 0,40 | 38,00 | 43,71 | 53,40 | -9,69 |
| 2447,20 | 56,46 | 27,50 | 0,42 | 38,00 | 46,38 | 53,40 | -7,02 |
| 3382,00 | 49,15 | 28,60 | 0,37 | 38,00 | 40,12 | 63,40 | -23,28 |
| 5425,00 | 48,61 | 32,00 | 0,50 | 38,00 | 43,11 | 63,40 | -20,29 |



| EUT Position (angle °) | | | 275 | An | tenna Polariza | tion | V |
|------------------------|---------------|-------------------|---------------|------------------|--------------------|----------|--------|
| Frequency | Reading value | Antenna Factor | Cable Loss | Pre-Amp. Gain | Correcting reading | Limit | Margin |
| (MHz) | (dBµV) | (dB1/m) | (dB) | (dB) | (dBµV/m) | (dBµV/m) | (dB) |
| 1350,00 | 48,78 | 24,90 | 0,30 | 38,00 | 35,98 | 39,40 | -3,42 |
| 1422,40 | 46,70 | 25,10 | 0,30 | 38,00 | 34,10 | 39,40 | -5,30 |
| 1496,80 | 48,61 | 25,30 | 0,30 | 38,00 | 36,21 | 39,40 | -3,19 |
| 1573,60 | 50,07 | 25,30 | 0,31 | 38,00 | 37,68 | 39,40 | -1,72 |
| 1645,60 | 54,78 | 25,48 | 0,32 | 38,00 | 42,58 | 51,40 | -8,82 |
| 1698,40 | 55,62 | 25,48 | 0,32 | 38,00 | 43,42 | 51,40 | -7,98 |
| 1914,40 | 56,52 | 25,90 | 0,37 | 38,00 | 44,79 | 51,40 | -6,61 |
| 2011,32 | 55,25 | 26,00 | 0,39 | 38,00 | 43,64 | 53,40 | -9,76 |
| 2058,40 | 55,11 | 26,00 | 0,38 | 38,00 | 43,49 | 53,40 | -9,91 |
| 2238,40 | 52,59 | 26,75 | 0,35 | 38,00 | 41,69 | 53,40 | -11,71 |
| 2241,80 | 53,01 | 26,75 | 0,38 | 38,00 | 42,13 | 53,40 | -11,27 |
| 2356,00 | 52,10 | 27,50 | 0,40 | 38,00 | 42,00 | 53,40 | -11,40 |
| 2447,20 | 54,50 | 27,50 | 0,42 | 38,00 | 44,42 | 53,40 | -8,98 |
| 3382,00 | 50,06 | 28,60 | 0,37 | 38,00 | 41,03 | 63,40 | -22,37 |
| 5425,00 | 47,45 | 32,00 | 0,50 | 38,00 | 41,94 | 63,40 | -21,46 |

| EUT Position (angle ⁹ | | 315 | Antenna Polarization | | | V | |
|----------------------------------|---------------|-------------------|----------------------|------------------|--------------------|----------|--------|
| Frequency | Reading value | Antenna Factor | Cable Loss | Pre-Amp. Gain | Correcting reading | Limit | Margin |
| (MHz) | (dBµV) | (dB1/m) | (dB) | (dB) | (dBµV/m) | (dBµV/m) | (dB) |
| 1350,00 | 49,01 | 24,90 | 0,30 | 38,00 | 36,21 | 39,40 | -3,19 |
| 1422,40 | 46,02 | 25,10 | 0,30 | 38,00 | 33,42 | 39,40 | -5,98 |
| 1496,80 | 48,41 | 25,30 | 0,30 | 38,00 | 36,01 | 39,40 | -3,39 |
| 1573,60 | 49,53 | 25,30 | 0,31 | 38,00 | 37,14 | 39,40 | -2,26 |
| 1645,60 | 55,47 | 25,48 | 0,32 | 38,00 | 43,27 | 51,40 | -8,13 |
| 1698,40 | 56,34 | 25,48 | 0,32 | 38,00 | 44,14 | 51,40 | -7,26 |
| 1914,40 | 57,27 | 25,90 | 0,37 | 38,00 | 45,54 | 51,40 | -5,86 |
| 2011,32 | 56,67 | 26,00 | 0,39 | 38,00 | 45,06 | 53,40 | -8,34 |
| 2058,40 | 56,37 | 26,00 | 0,38 | 38,00 | 44,75 | 53,40 | -8,65 |
| 2238,40 | 55,34 | 26,75 | 0,35 | 38,00 | 44,44 | 53,40 | -8,96 |
| 2241,80 | 54,96 | 26,75 | 0,38 | 38,00 | 44,09 | 53,40 | -9,31 |
| 2356,00 | 55,12 | 27,50 | 0,40 | 38,00 | 45,02 | 53,40 | -8,38 |
| 2447,20 | 57,21 | 27,50 | 0,42 | 38,00 | 47,13 | 53,40 | -6,27 |
| 3382,00 | 49,14 | 28,60 | 0,37 | 38,00 | 40,11 | 63,40 | -23,29 |
| 5425,00 | 47,51 | 32,00 | 0,50 | 38,00 | 42,00 | 63,40 | -21,40 |



| TEST | Tit | | 47CFR Part 15 Ref. Section | |
|--------------|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|--|
| No. 8 | "Radiated emission | 15.509(e) | | |
| REQUIREMENTS | Test definition | In addition to the radiated emission limits specified for frequency above 960 MHz, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz in the GPS frequency bands. | | |
| RE | Test setup | ANSI C63.4 | | |
| Ŋ | Test facility | Open Area Test Site (| OATS) | |
| | Test distance | 1 meter | | |
| TEST | RBW bandwidth | 1 kHz | | |
| _ | VBW bandwidth | 3 MHz | | |
| | Detector | RMS | | |
| | Remark | / | | |

Limits:

| Frequency | EIRP @ 3 meters (1 MHz BW) | Field strength @ 3 meters (1 MHz BW) | Field strength @ 1 meters (1 MHz BW) | |
|-----------|----------------------------------|--------------------------------------------|--------------------------------------------|--|
| (MHz) | (dBm) | (dBµV/m) | (dBµV/m) | |
| 1164-1240 | -75.3 | 19,9 | 29,4 | |
| 1559-1610 | -75.3 | 19,9 | 29,4 | |

Remark: The limits were converted from EIRP to field strength at 3 and 1 meter according to FCC 15.503(k).

Test Result:

The EUT meets the requirements of section 15.509(d)



Test Procedure:

- 1) The EUT was placed on sandpit area filled with dry sand initially placed in front of the ground plane (0° degree position)
- 2) The receiving antenna is placed at 1 meter away from the EUT and it is pointed in the direction of the radiating head with an inclination of -10° to find the highest emission.
- 3) The receiving antenna was positioned in horizontal polarization.
- 4) The measurements were made with the detector set to RMS with a bandwidth of 1 kHz during monitoring the GPS frequency ranges.
- 5) Upon detection of a suspect emission signal, its amplitude and frequency were noted.
- 6) It is recommended to demodulate the received signals for suitable discrimination of the ambient emission from the EUT emission.
- 7) At the worst case combination of the EUT operating mode and antenna height , the field strength measure was recorded.
- 8) The receiving antenna was positioned in vertical polarization and the steps 2 to 6 was repeated.
- 9) The EUT was rotating from 0° to 360° degrees with 45° step increment and the steps 4 to 7 was repeated.
- 10) All the worst case combination field strength emissions founded of each EUT position and antenna polarization was recorded in the following table and compared with the applicable limits.

Summary of Test Result data:

All maximum Field strength emission are found at the following test set-up conditions:


• EUT Position (angle) : 0 °


• Antenna Polarization : Horizontal

| Frequency | Reading value | Antenna Factor | Cable Loss | Pre-Amp. Gain | Correcting reading | Limit | Margin |
|-----------|---------------|-------------------|---------------|------------------|--------------------|----------|--------|
| (MHz) | (dBµV) | (dB1/m) | (dB) | (dB) | (dBµV/m) | (dBµV/m) | (dB) |
| 1182,84 | 0,55 | 24,70 | 1,92 | 0,00 | 27,17 | 29,40 | -2,23 |
| 1212,64 | 0,14 | 24,70 | 1,93 | 0,00 | 26,77 | 29,40 | -2,63 |
| 1224,80 | -0,02 | 24,70 | 1,93 | 0,00 | 26,61 | 29,40 | -2,79 |
| 1207,32 | -1,03 | 24,75 | 1,94 | 0,00 | 26,67 | 29,40 | -2,73 |
| 1575,32 | 37,07 | 25,30 | 2,16 | 37,96 | 26,57 | 29,40 | -2,83 |



Test Result Data Plot:

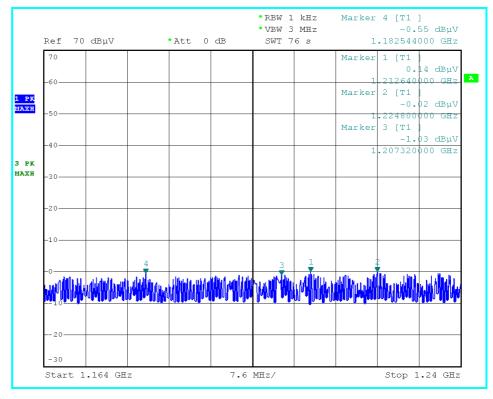

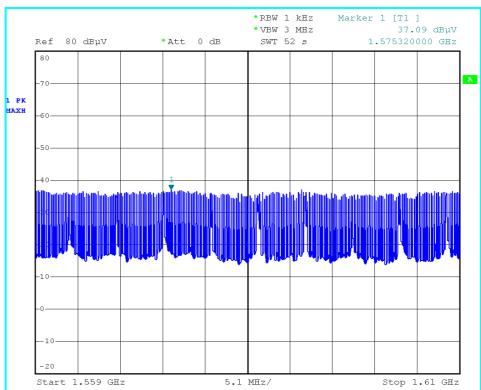



| TEST | Tit | 47CFR Part 15 Ref. Section | | |
|--------------|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|--|
| No. 9 | "Highest radiated | d emission at f _M " | 15.509(f) | |
| REQUIREMENTS | Test definition | For UWB devices where the frequency at which the highest radiated emission occurs, fM, is above 960 MHz, there is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on fm. | | |
| Ξ | Test setup | ANSI C63.4 | | |
| E E | Test facility | Open Area Test Site (OATS) | | |
| ZEQ. | Test distance | 3 meters | | |
| STF | RBW bandwidth | 1 MHz | | |
| Ë | VBW bandwidth | 3 MHz | | |
| | Detector | Peak | | |
| | Remark | 1 | | |

Limits:

The peak emission level contained within a 50 MHz bandwidth cantered on f_{M} mast be limited to a maximum of 0 dBm EIRP.

| EIRP limit | Field strength limit @ 3 meters | Field strength limit @ 3 meters (measured with 1 MHz RBW) |
|------------|------------------------------------|--------------------------------------------------------------------|
| (dBm) | (dBµV/m) | (dBµV/m) |
| 0 | 95,2 | 75,2 |

Remark: The limits were converted from EIRP to field strength at 3 meter according to FCC 15.503(k).

As the measurement was employed with a 1 MHz resolution bandwidth the applicable limit is adjusted with a 20log(1/50) dB factor.



Test Procedure:

- 1) The EUT was placed on sandpit area filled with dry sand initially placed in front of the ground plane (0° degree position)
- 2) The receiving antenna which varied from 1 to 4 m to find the highest emission is positioned 3 m away from the EUT.
- 3) The receiving antenna was positioned in horizontal polarization.
- 4) The measurements were made with the detector set to peak with a bandwidth of 1 MHz during monitoring the frequency range inside the UWB of the EUT..
- 5) At the worst case combination of the EUT operating mode and antenna height , the field strength measure was recorded.
- 6) The receiving antenna was positioned in vertical polarization and the steps 4 to 6 was repeated.
- 7) The EUT was rotating from 0° to 360° degrees with 45° step increment and the steps 4 to 7 was repeated.
- 8) Record the peak emission from the EUT.

Summary of Test Result data:

Maximum Peak emission contained within 50 MHz is found at the following test set-up conditions:

• EUT Position (angle) : 0 °

Antenna Polarization : Vertical

| Frequenc | value | Antenna Factor | Cable Loss | Pre-Amp. Gain | Correcting reading | Limit | Margin |
|----------|--------|-------------------|---------------|------------------|--------------------|----------|--------|
| (MHz) | (dBµV) | (dB1/m) | (dB) | (dB) | (dBµV/m) | (dBµV/m) | (dB) |
| 1645 | 57,98 | 25,48 | 0,32 | 38,00 | 45,78 | 75,20 | -29,42 |

Test Result:

The EUT meets the requirements of section 15.509(f)



| TEST No. 10 | Title "Technical requirements applicable to all | 47CFR Part 15 Ref. Section |
|----------------|----------------------------------------------------|-------------------------------|
| | UWB devices" | 15.521 |

| Requirement | Description |
|-------------|------------------------------------------------------------------------------------------------------------------------------|
| 15.521(a) | The EUT is not employed for the operation of toys, operation onboard an aircraft, ship and satellite. |
| 15.521(b) | Permanent attached antenna, no External radio frequency power amplifiers and antenna modifications are permitted. |
| 15.521(c) | The Digital circuitry portion of the EUT has been tested and verified to comply with 47 CFR Part 15, subpart B. |
| 15.521(d) | Considered |
| 15.521(e) | The f _M , frequency at which the highest radiated emission occurs is contained within the measured UWB bandwidth. |
| 15.521(f) | The EUT is not intended to detection of tags or the transfer or data or voice information. |
| 15.521(g) | Considered |
| 15.521(h) | Considered |
| 15.521(i) | Prohibition in Sections 2.201(f) and 15.5(d) of this chapter against Class B (damped wave) emissions is not applied. |
| 15.521(j) | Battery operating device not connected to AC power lines. |

Test Result:

The EUT meets the requirements of section 15.521



| TES | | Title | 47CFR Part 15 Ref. Section | | | |
|-------------------|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|--|--|--|
| No. 1 | 1 | "Coordination requirement" | 15.525 | | | |
| | | (a) UWB imaging systems require coordination the the equipment may be used. The operator structure constraints on equipment usage resulting from this (b) The users of UWB imaging devices shall suggested to the FCC Office of Engineering and Technique | nall comply with any s coordination. oply operational areas | | | |
| (O | vernment through the ministration. | | | | | |
| TEST REQUIREMENTS | | (c) The manufacturers, or their authorized sales agents, must inform purchasers and users of their systems of the requirement to undertake detailed coordination of operational areas with the FCC prior to the equipment being operated. | | | | |
| EST REQU | | (d) Users of authorized, coordinated UWB systems may transfer the to other qualified users. and to different locations upon coordination change of ownership or location to the FCC and coordination wiexisting authorized operations. | | | | |
| | | ify those geographical ging system requires eration of an imaging | | | | |
| | | system is prohibited. (f) The coordination of routine UWB operations shall not take longer than 15 business days from the receipt of the coordination request by NTIA. | | | | |

| Requirement | Description |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15.525 | The responsible party is properly informed about the required coordination requirement and provide correct information to the customers and users about their specific care and legislative obligations. |
| | (See Important note for the US customers of the the "ALADDIN" STRUCTURE KIT User manual) |

Test Result:

The EUT meets the requirements of section 15.525



7 TECHNICAL DOCUMENTATION

| DOCUMENT | REFERENCE |
|-------------------------------------|------------------------------------------------|
| DAD & antenna block diagrams | / |
| "ALADDIN" STRUCTURE KIT User manual | Protocol: MN/2009/061 rev. 1.1 |
| Technical description of the system | ALADDIN - TECHNICAL DESCRIPTION OF THE UNIT |



8 PHOTOGRAPHIC DOCUMENTATION

8.1 EUT Identification







8.2 Test set-up



Test set-up below 960 MHz



Test set-up above 960 MHz



9 MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the IMQ procedure No. IO-DT-U01 and requirement of NIST Technical Note 1297 and NIS 81: 1994 "The Treatment of Uncertainty in EMC Measurements"

9.1 Radiated Emission Measurement Uncertainty from 30 to 1000 MHz

Expanded uncertainty:

Level of confidence = 95 %Degree of freedom = 9Coverage factor kp = 2

Combined uncertainty = 4,77 dB

9.2 Radiated Emission Measurement Uncertainty above 1000 MHz

Expanded uncertainty:

Level of confidence = 95 %Degree of freedom = 9Coverage factor kp = 2

Combined uncertainty = 3,53 dB



10 LIST OF MEASURING EQUIPMENT AND CALIBRATION INFORMATION

| IMQ Serial Number | Instrument | Manufacturer | Туре | Last Cal. | Cal. Period. | Calibration Company |
|----------------------|----------------------|----------------------------|---------------------|--------------|-----------------|------------------------|
| S03463 | Horn Antenna | Schwarzbeck | BBHA 9120D | 06-09 | 36 | NPL |
| S03511 | Log-Per. Antenna | Ara | LPB-2520/1 | 06-09 | 36 | NPL |
| S03668 | Horn Antenna | Schwarzbeck | BBHA 9170 | 02-08 | 36 | TESEO |
| S03724 | Horn Antenna | Schwarzbeck | BBHA 9170 | 02-08 | 36 | TESEO |
| S02385 | Log-Per. Antenna | Ara | LPB-2513 | 06-09 | 36 | OKD |
| S03464 | Horn Antenna | Schwarzbeck | BBHA 9120D | 06-09 | 36 | OKD |
| S04271 | Log-Per. Antenna | Ara | LPB-2513/A | 03-09 | 36 | NPL |
| S04272 | Horn Antenna | Schwarzbeck | BBHA 9120D | 04-09 | 36 | NPL |
| S04197 | EMI Receiver | Rohde & Schwarz | ESVS-10 | 12-08 | 18 | I.N.RI.M. |
| S03629 | Spectrum Analyzer | Rohde & Schwarz | FSP40 | 01-10 | 24 | I.N.RI.M. |
| S03542 | Preamplifier | Hewlett Packard | HP 8449B | 07-08 | 24 | AGILENT |
| S04193 | Preamplifier | Bonn Elektronik | BLNA 0110- 15C35 | 02-10 | 24 | IMQ |
| S04322 | RF Coax Cable | Rosenberger micro- coax | N 50 Ohm | 05-08 | 24 | IMQ |
| S03745 | Oscilloscope | Yokogawa | DL 7200 | 05-09 | 12 | AVIATRONIK |
| S04159 | Multimenter | Fluke | 45 | 05-09 | 12 | IMQ |
| S00735 | Meter-graph | Salmoiraghi | 1656/2B | 05-09 | 12 | IMQ |
| P01723 | Antenna Mast | Sunol Sciences | TWR 93-4 | 1 | / | 1 |

The IMQ instruments are tested and calibrated according to UNI EN 45001, the IMQ procedure IP-037 "Calibration test equipment and measurement" and according to plans set on IMQ operating instruction IO-FT-034 "Criteria for the calibration of test equipment and measurement" which are an integral part of the Quality Manual of IMQ.