


File name: J96506C1.RES
Date: 28. Feb 07 17:20

Scan Settings (2 Ranges)

----- Frequencies -----			----- Receiver Settings -----					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	
150k	1M	5k	9k	QP+AV	20ms	AUTO	LN OFF	
1M	30M	10k	9k	QP+AV	20ms	AUTO	LN OFF	

Transducer No.	Start	Stop	Name
11	150k	30M	CECF219

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 30dB

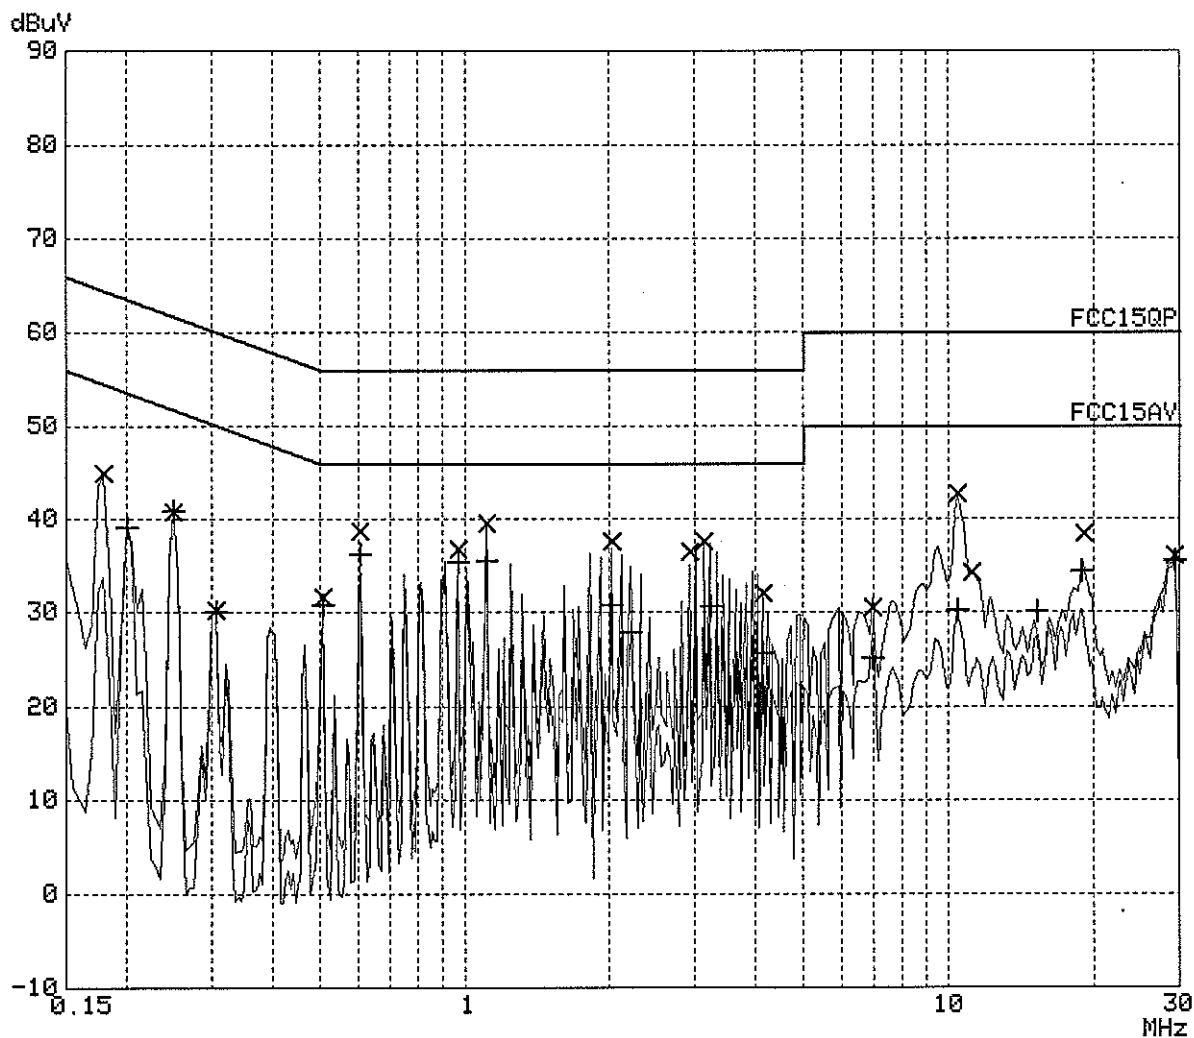

File name: J96506C1.RES
Date: 28. Feb 07 17:20

Final Measurement Results:

Indicated Phase/PE shows Configuration of max. Emission

Frequency MHz	QP Level dBuV	Delta Limit dB	Phase -	PE -
0.18000	44.9	-19.6	L1	gnd
0.25000	40.7	-21.0	L1	gnd
0.30500	30.2	-29.8	L1	gnd
0.50500	31.6	-24.3	N	gnd
0.60500	38.7	-17.2	N	gnd
0.96500	36.8	-19.1	L1	gnd
1.11000	39.6	-16.3	L1	gnd
2.02000	37.6	-18.3	N	gnd
2.93000	36.5	-19.5	N	gnd
3.13000	37.6	-18.3	N	gnd
4.14000	32.0	-23.9	L1	gnd
6.97000	30.6	-29.3	N	gnd
10.41000	42.7	-17.2	L1	gnd
11.12000	34.3	-25.6	L1	gnd
19.00000	38.4	-21.5	N	gnd
29.41000	36.1	-23.8	L1	gnd

Frequency MHz	AV Level dBuV	Delta Limit dB	Phase -	PE -
0.20000	39.1	-16.8	L1	gnd
0.25000	40.9	-12.6	L1	gnd
0.30500	30.1	-21.2	L1	gnd
0.50500	30.9	-15.0	N	gnd
0.60500	36.2	-9.8	N	gnd
0.96500	35.4	-10.5	L1	gnd
1.11000	35.6	-10.3	L1	gnd
2.02000	30.8	-15.1	N	gnd
2.22000	27.9	-18.0	N	gnd
3.23000	30.6	-15.3	L1	gnd
4.14000	25.8	-20.1	L1	gnd
6.97000	25.2	-24.7	N	gnd
10.41000	30.2	-19.7	N	gnd
15.16000	30.1	-19.8	N	gnd
18.80000	34.4	-15.5	N	gnd
29.31000	35.5	-14.4	L1	gnd

* limit exceeded