




Report No.: 0701859
PC AC Mains(L)
Operation (sending & receiving RF signal)

Tested By: Gary, Report No.: 0701859
Scan Settings (1 Range)

Frequencies				Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF 60dB

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2 1	9k	30M	EW0700
12	9k	30M	EW1449

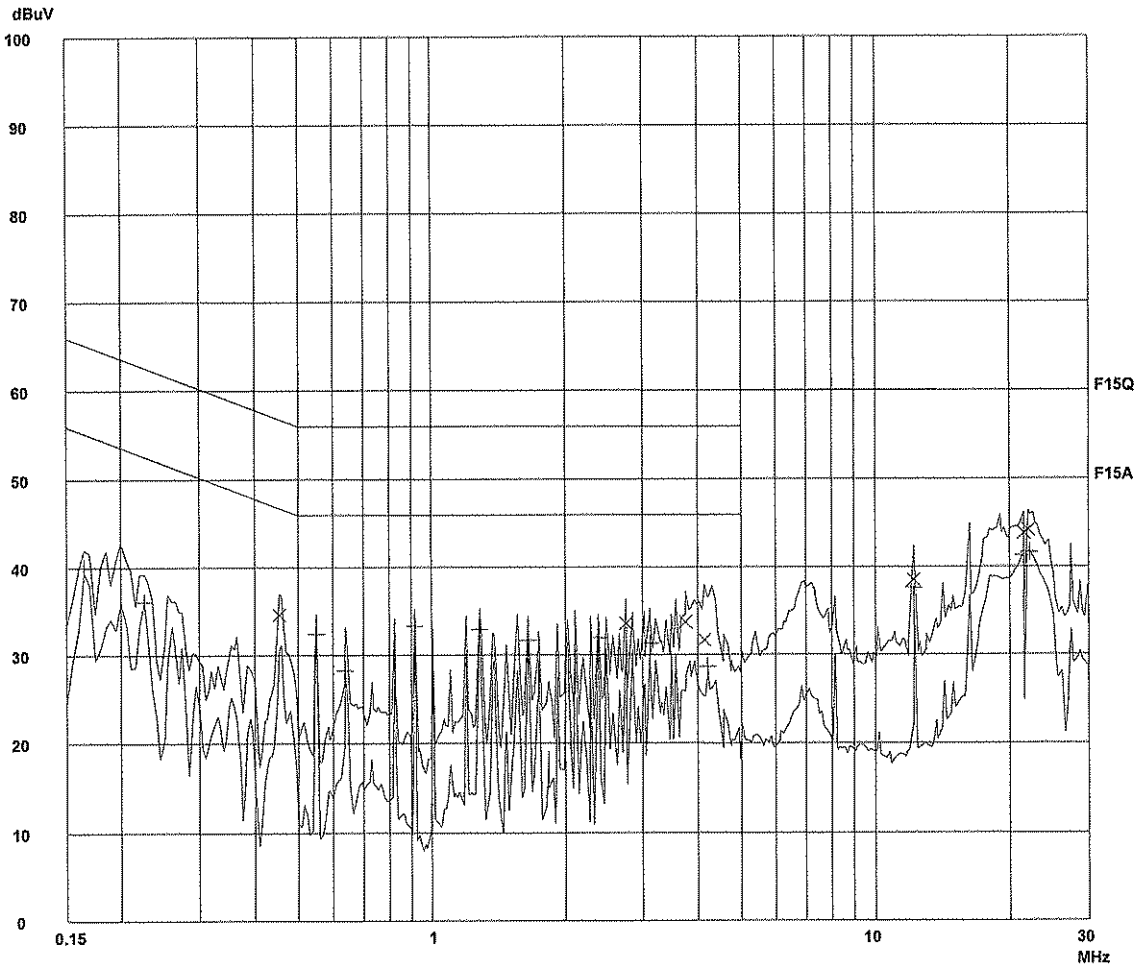

Report No.: 0701859

PC AC Mains(L)

Operation (sending & receiving RF signal)

Tested By:Gary, Report No.:0701859

Scan Settings (1 Range)

----- Frequencies -----

----- Receiver Settings -----

Start

Stop

Step

IF BW

Detector

M-Time

Atten

Preamp

OpRge

150k

30M

5k

10k

PK+AV

10ms

AUTO

LN

OFF

60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV
0.45500	34.5	56.8
2.74500	33.4	56.0
3.75000	33.6	56.0
4.14500	31.5	56.0
12.19500	38.4	60.0
21.50000	43.7	60.0
22.04500	44.1	60.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV
0.16500	40.0	55.2
0.22500	36.1	52.7
0.55000	32.4	46.0
0.64000	28.2	46.0
0.91500	33.3	46.0
1.28000	32.8	46.0
1.64500	31.5	46.0
2.38000	31.9	46.0
3.11000	31.1	46.0
4.21000	28.5	46.0
12.21000	37.5	50.0
21.50000	41.2	50.0
22.14000	41.6	50.0

* limit

Report No.: 0701859
PC AC Mains(N)
Programming mode

Tested By: Gary, Report No.: 0701859

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB


Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2	1	9k	30M
12	9k	30M	EW0700
			EW1449

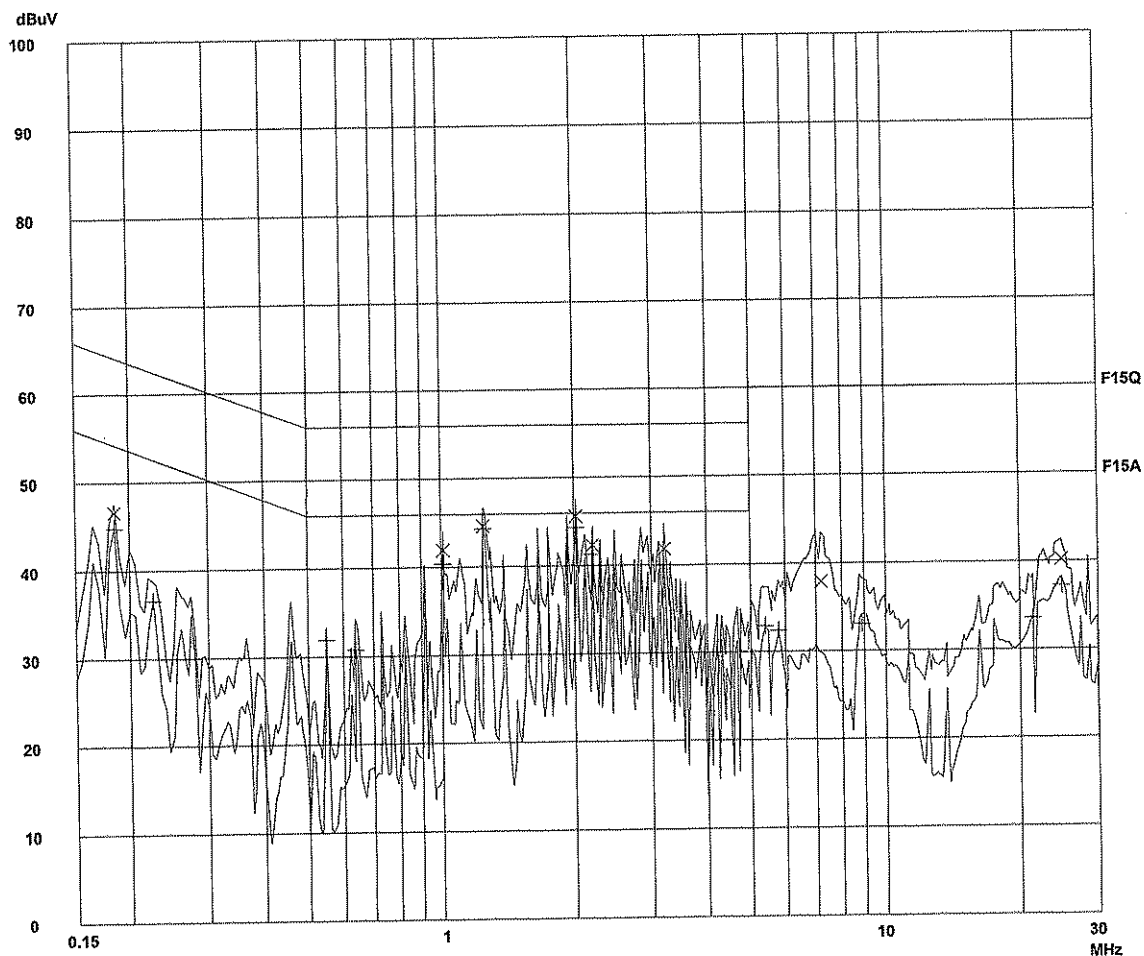

Report No.:

0701859

PC AC Mains(N)

Programming mode

Tested By:Gary, Report No.:0701859

Scan Settings (1 Range)

----- Frequencies -----

----- Receiver Settings -----

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.18500	46.5	64.3
1.01000	41.8	56.0
1.24500	44.6	56.0
2.01500	45.5	56.0
2.20000	42.3	56.0
3.21000	41.8	56.0
7.19500	37.7	60.0
24.83000	40.1	60.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

0.18500	44.7	54.3
0.22500	36.5	52.7
0.55000	31.8	46.0
0.64000	30.7	46.0
1.01000	40.3	46.0
1.24500	44.2	46.0
2.01500	44.3	46.0
2.20000	41.2	46.0
3.21000	39.9	46.0
5.41000	32.8	50.0
5.77500	32.3	50.0
8.89000	33.0	50.0
21.44000	33.5	50.0
24.83000	37.2	50.0

* limit