



USER'S MANUAL



CAR KIT

CK-606A

Index

Introduction	1
Function	1
Packing List	1
Installation guide	2
Connection	4
Control Panel Introduction	5
LCD Introduction	8
Operation Instruction	
Power On	9
Power Off	11
Matching	12
No operation situation	14
Display the number of coming the call	15
Answer the phone	15
Call Transfer	16
Silence function	17

Index

Voice dialing	18
Redialing	18
Check the number of coming call and dial the number of coming call	19
Increase volume	20
Decrease Volume	21
Language Update	21
Dialing or cancel the dialing	22
Finish the communication	23
Backlight indication	23
Shortage power indication	23
Charge the battery	24
Privacy protection	24
Technical specification	25

Introduction

CK-606A use the Blue tooth technology to communicate wirelessly in certain distance。

CK-606A system let you communicate freely and safely when driving 。

- Double lines LCD displayer, One line for current status and indication message, the other line will show the number of the coming call。
- Voice dialing function could make you operate this device freely even don't need to release the steering wheel when driving 。
- Adopting the DSP anti-echo system and built-in microphone, you could talk freely。

Function


- | | |
|---------------------------------|---|
| ■ Display the telephone number | ■ Storage the number of coming call |
| ■ Dial the number through voice | ■ Call transfer function |
| ■ Volume Control | ■ DSP anti-echo system technology |
| ■ Silence Function | ■ Built-in microphone and speaker |
| ■ Privacy Protection | ■ Built-in rechargeable lithium battery |

Packing List


- | | | |
|-------------|------------|-----------------|
| ■ Main Unit | ■ Earphone | ■ User's Manual |
| ■ Charger | ■ Bracket | |

Installation guide


1、Insert the bracket into the slot at the back of main unit ①。

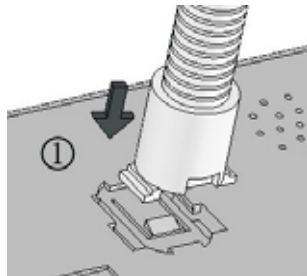

2、Push the bracket smoothly into the slot of main unit and the direction shows ②。

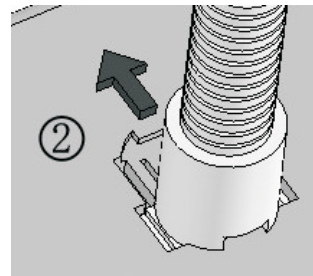

3、Accomplish the installation of bracket and Main unit ③。

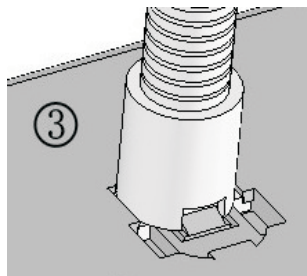

4、Take off the protection film in cupula ④。



Installation guide


5、Adhere the cupula on the glass tightly after clean the glass ⑤。



6、According to the arrow showed in picture ⑥, Press the cupula hardly ⑦。



Control Panel Introduction

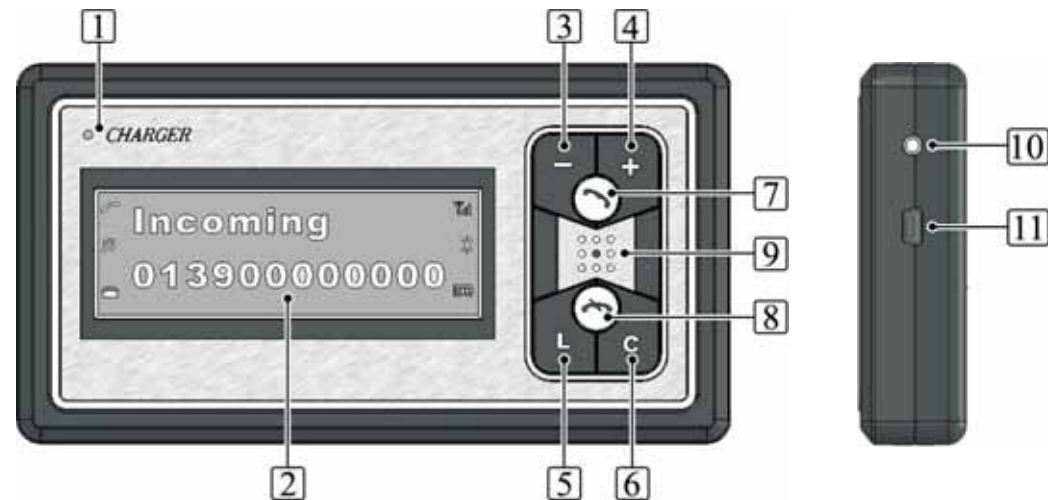

- 1 CHARGER LED: LED is bright all the time when charging and go out when Fully charged.
- 2 LCD display two lines as below:
First line: show the current status and Indication message;
The second line: Show the number of the coming call and the menu information .

Control Panel Introduction

3 -:

- A. During communication, Press the[-]button to decrease the volume 。
- B. Check the record when the device is free。
- C. During communication , press the[-]button for two seconds and change to Silence。
- D. When the device is free, Press the[-]button for two seconds and the device Will dial the last dialed telephone number automatically。

4 +:

- A. During communication, press the[+]button to increase the volume。
- B. Check the record when the device is free。
- C. During communication, press the[+]button for two seconds to transfer。
- D. When the device is free, Press the[+]button for two seconds and the Device will dial the last dialed telephone number automatically。





5 L: When power on, press [L] to show the language menu。

6 C:







- A. Under the language choice situation, Press the[C]to cancel the language Choice and return to standard status。
- B. Under record checking situation, cancel the chosen telephone number。

Control Panel Introduction

7 :

- A. When have coming call, press the[]button to answer the phone.
- B. Under record checking situation, press the[]button to dial the chosen telephone number.
- C. Under the language choice situation, press the[]button to confirm the chosen telephone.
- D. When the device is free, Press the[]button shortly to trigger the voice dialing function.

8 :

- A. Under power off situation, press the[]button for 2 seconds to power on.
- B. Under power off situation, press the[]button for 4 seconds to enter the Matching mode.
- C. Under power on situation, Press the[]button for 4 seconds to power off.
- D. If there is a coming call, press the[]**button to refuse answering the call.**
- E. When dialing the number, press the[]**button to cancel this Operation.**
- F. During communication, press the[]**button to hang off.**

9 Microphone

10 The socket for earphone

11 USB socket for charging


LCD Introduction



- ① Answer the coming call
- ② Indication for the coming call
- ③ Hang off
- ④ The indication of the signal intensity
- ⑤ The indication of the connection for mobile telephone
- ⑥ The indication of the power

Operation Instruction

■ Power On:


When power off, press the[]button, The LCD display the following pictures:



Press the[]button two seconds, The LCD display the following pictures :



Operation Instruction

Press the [] button for two seconds and release the button, LCD display the following pictures:



Successful connection, LCD display the following pictures:




注：“SGH-D808”为手机型号，不同品牌的手机显示不同的型号。

Operation Instruction

Unsuccessful connection, LCD display the following pictures:



■ Power off:

When power on, Press the[]button for 4 seconds to power off, The LCD display The pricures as below:



Operation Instruction

■ Matching :

When power off, Press the[]button for 4 seconds to enter the matching mode
Which needs 90 seconds, The LCD display the prictures as below:



If matching is overtime or fail, The LCD will show the pictures as below:



If match successfully,Some phone could connect automatically,some phone should make the connection by hands。 Please refer to the manual for the mobile telephone。 When connection for matching, the type for device is “CK-606A” and Password is: “0000” 。

Operation Instruction

During connection, The LCD show the pictures as below:



When Connection successful, The LCD show the pictures as below:



Operation Instruction

When connection unsuccessful, The LCD show the pictures as below:



■ No operation situation:


Lcd will display the following pictures after the successful connection:



Operation Instruction


- Display the number of coming call:

When there is a coming call, Lcd display the following pictures:

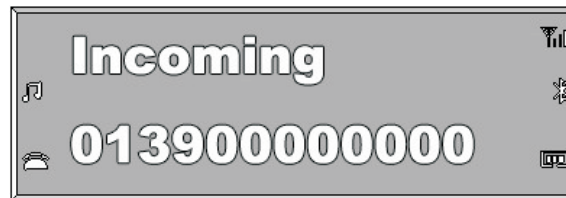

- Answer the phone:


When there is a coming call, press the [📞] button to answer, The LCD show the Picture as below:

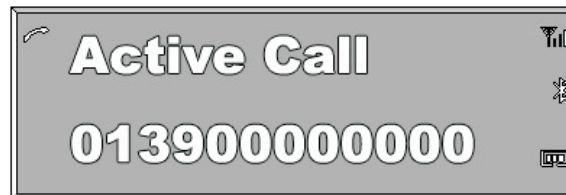

Operation Instruction

■ Call Transfer:

Under communication situation, Press the[+] button for two seconds to transfer The coming call. There are a voice indication when transferring. When transfer to Mobile telephone, The LCD show the pictures as below:

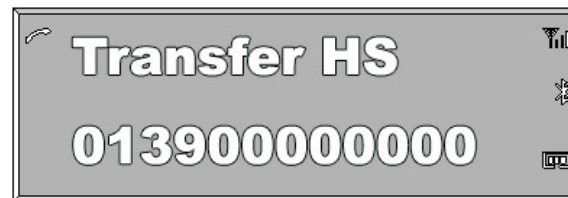

Then press the[+]button again for two seconds to transfer back, The LCD show the pictures as below:



Operation Instruction

■ Silence function:

When communication, press the[—]button for 2 seconds to transfer into silence.
After transferring to silence; The voice indication will be given an indication in
Every five seconds. LCD show the pictures as below :




Press the[—]button for two seconds could turn back communicating status, LCD
show the pictures as below :



Operation Instruction

- Voice dialing:

When the device is free after connection, Press the[]button shortly to trigger the voice dialing function,After hear the indication,Using the language set by Mobile Telephone to command the voice dialing, LCD display the following pictures:




- Redialing:

When the device is free after connection, press the[+]or[-]button for two seconds and the device could dial the last dialed number automatically, LCD display The following pictures:



Operation Instruction


- Check the number of coming call and dial the number of coming call:
When the device is free, press the [-] button shortly to check the number of Coming call downwards.
When the device is free, press the [+] button shortly to check the number of Coming call upwards.
The max for storage number is 20, LCD display the following pictures:

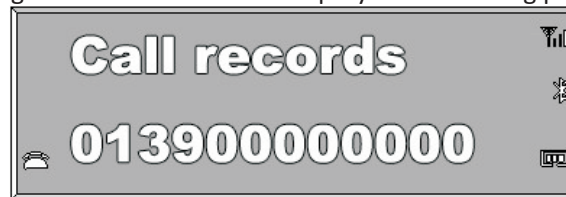


When checking the record, Press the [C] button to cancel then number and just to next number followed automatically; If cancel the last the one in the record, The first number will be showed; If there is no number in the record, LCD display the following pictures:



Operation Instruction

When checking the number, press the [] button to dial the number chosen, LCD display the following pictures:

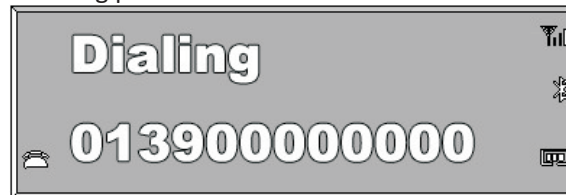

When checking the record, If don't have any operation in 5 seconds, Return to standard status.

■ Increase volume:

When communication, press the [+] button to add the volume (One press to add one degree), LCD show the pictures as below:



Under volume adjustment situation, If don't have any operation within 3 seconds, The device should return to communication status automatically.

Operation Instruction

■ Decrease volume:

When communication, press the[-]button to decrease the volume (One press to decrease one degree), LCD show the pictures as below:



Under volume adjustment situation, If don't have any operation within 3 seconds, the device should return to communication status automatically.

■ Language Update:

CK-606A support the language update function (Germany,Italy,Spanish,French)and factory default language is: [Englis]. When the device is free, press the [L] button to Choose the language; press the[L]or[+]to choose the language showed before and press the button[-]to choose the language showed after; press the[C]button to cancel the operation; If don't have any operation within 5 seconds, the device should return to standard interface automatically .


Operation Instruction

■ Dialing or cancel the dialing:

There are several ways to dial:

- A、When the device is free, press the[+]or[-]buttoner for two seconds, Dial Telephone number that is called at the last time。
- B、When checking the phone book, press the[↶]button to dial the Checking Number directly。
- C、When the device is free, press the[↶]button shortly to trigger the voice dialing。
- D、Use the mobile telephone to dial by hands。


When dialing, The LCD show the pictures as below:

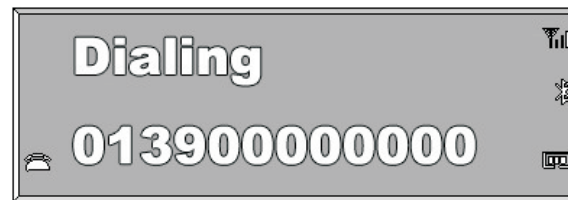

When dialing, press the[↶]button shortly to cancel the dialing。

Remark: The telephone number will be displayed when you call back the coming call。

Operation Instruction

- **Finish the communication:**
When communication, press the [] to end the communication.
- **Backlight indication:**
When there is coming call or press any button, The backlight will be bright automatically. If no coming call or any operation on the button within 8 seconds, The backlight will go out automatically.
- **Shortage power indication:**
When the voltage is less than 3.5V, There are both voice and pictures indication in every 10 seconds for 3 seconds. The LCD show the pictures as below:



Remark: When the voltage of the battery less than 3.1V, the device power off Automatically.

Operation Instruction

- Charge the battery:

When charging, The LED is bright all the time and go out when full charged。
The LCD show the pictures for 3 seconds every 10 seconds
as below:



- Privacy Protection:

When there are other passengers, Insert the earphone, Speaker keep silent automatically. Then passengers could not hear the communications to protect personal privacy.

Technical specification

- 1、Technical standard: BLUETOOTH 2.0 Version
- 2、Bluetooth Chip: CSR BC04
- 3、Wireless Frequency: 2.4GHz
- 4、Output Power: $-4\sim 4\text{dbm}$
- 5、Transmission Distance: 10m
- 6、Sensitivity for receiver: -80dbm
- 7、Power for charger: +12V
- 8、Operation Voltage: +3.3V
- 9、Operation current: 150mA
- 10、Static current : 5mA
- 11、Specification for battery: Rechargeable lithium 3.7V battery
- 12、Capability for battery: 1500mAh
- 13、Time for communication: ≥ 10 hours
- 14、Time for standby: 200~300 hours
- 15、Environment temperature: $-30^{\circ}\text{C}\sim +80^{\circ}\text{C}$
- 16、Operation temperature: $-20^{\circ}\text{C}\sim +70^{\circ}\text{C}$

H. K. FOREVER TECHNOLOGY

WWW.HKFHTECH.COM

RF exposure Compliance

To maintain compliance with FCC's RF exposure guidelines, this equipment should be installed and operated with minimum distance 20cm between the radiator and your body. Use only the supplied antenna.

FCC Caution:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Notes:

The manufacture is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.