

## RF Test Report

Applicant : Rajant Corporation

Product Type : BreadCrumb Wireless Nodes (ES1-2450R)

Trade Name : VIZMONET

Model Number : ES1-2450R

Test Specification : FCC 47 CFR PART 15 SUBPART E  
ANSI C63.10:2013

Receive Date : Dec. 06, 2018

Test Period : Dec. 14, 2018 ~ Feb. 14, 2019

Issue Date : Jul. 02, 2019

### Issue by

A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 33465, Taiwan (R.O.C)  
Tel : +86-3-2710188 / Fax : +86-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330  
Test Firm MRA designation number: TW0010

**Note:** This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.



### **Revision History**

Rev.	Issue Date	Revisions	Revised By
00	Mar. 08, 2019	Initial Issue	Nina Lin
01	May 24, 2019	Page 7 Revised Applicant. Page 1 & 3 & 7 Revised Trade Name.	Nina Lin
02	Jul. 02, 2019	Page 7 Revised Applicant Address.	Nina Lin

## Verification of Compliance

Issued Date: Jul. 02, 2019

Applicant : Rajant Corporation  
Product Type : BreadCrumb Wireless Nodes (ES1-2450R)  
Trade Name : VIZMONET  
Model Number : ES1-2450R  
FCC ID : VJA-ES12450R  
EUT Rated Voltage : DC 24 V, 0.8 A  
Test Voltage : 120 Vac / 60 Hz  
Applicable Standard : FCC 47 CFR PART 15 SUBPART E  
ANSI C63.10:2013  
Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 33465, Taiwan (R.O.C)  
Tel : +86-3-2710188 / Fax : +86-3-2710190  
Taiwan Accreditation Foundation accreditation number: 1330  
<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : Fly Lu Reviewed By : Eric Ou Yang  
(Manager) (Fly Lu) (Testing Engineer) (Eric Ou Yang)

## TABLE OF CONTENTS

<b>1</b>	<b>General Information .....</b>	<b>5</b>
1.1.	Summary of Test Result .....	5
1.2.	Measurement Uncertainty .....	6
<b>2</b>	<b>EUT Description .....</b>	<b>7</b>
<b>3</b>	<b>Test Methodology .....</b>	<b>9</b>
3.1.	Mode of Operation .....	9
3.2.	EUT Test Step .....	14
3.3.	Configuration of Test System Details .....	15
3.4.	Test Instruments .....	16
3.5.	Test Site Environment .....	17
<b>4</b>	<b>Measurement Procedure .....</b>	<b>18</b>
4.1.	AC Power Conducted Emission Measurement .....	18
4.2.	Transmitter Radiated Emissions Measurement .....	20
4.3.	Maximum Conducted Output Power Measurement & Additional Rule For Outdoor Operation ..	25
4.4.	26 dB RF Bandwidth & 99 % Occupied Bandwidth Measurement .....	27
4.5.	6 dB RF Bandwidth Measurement .....	28
4.6.	Maximum Power Spectral Density Measurement .....	29
4.7.	Frequency Stability Measurement .....	31
4.8.	Automatically discontinue transmission .....	32
4.9.	Antenna Requirement .....	32
<b>5</b>	<b>Test Results .....</b>	<b>33</b>
5.1.	AC Power Conducted Emission Measurement .....	33
5.2.	Transmitter Radiated Emissions Measurement .....	41
5.3.	Maximum Conducted Output Power Measurement & Additional Rule For Outdoor Operation	188
5.4.	26 dB RF Bandwidth & 99 % Occupied Bandwidth Measurement .....	193
5.5.	6 dB RF Bandwidth Measurement .....	201
5.6.	Maximum Power Spectral Density Measurement .....	209
5.7.	Frequency Stability Measurement .....	229



# 1 General Information

## 1.1. Summary of Test Result

Standard	Item	Result	Remark
FCC			
15.407(b)(6) 15.207	AC Power Conducted Emission	PASS	---
15.407(b) 15.205 / 15.209	Transmitter Radiated Emissions	PASS	---
15.407(a)	Maximum Conducted Output Power & Additional Rule For Outdoor Operation	PASS	---
15.407(a)	26 dB RF Bandwidth & 99 % Occupied Bandwidth	Reference	---
15.407(e)	6 dB RF Bandwidth	PASS	----
15.407(a)	Maximum Power Spectral Density	PASS	---
15.407(g)	Frequency Stability	PASS	---
15.407(c)	Automatically discontinue transmission	PASS	---
15.407(a) 15.203	Antenna Requirement	PASS	Note

The test results of this report relate only to the tested sample(s) identified in this report.

Note: This device must be professionally installed.

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
CFR47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB789033: D02	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

## 1.2. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9 kHz ~ 150 kHz	2.7
	150 kHz ~ 30 MHz	2.7
Radiated Emission	9 kHz ~ 30 MHz	1.7
	30 MHz ~ 1000 MHz	5.7
	1000 MHz ~ 18000 MHz	5.5
	18000 MHz ~ 26500 MHz	4.8
	26500 MHz ~ 40000 MHz	4.8
Conducted Output Power		+0.27 dB / -0.28 dB
RF Bandwidth		4.96 %
Power Spectral Density		+0.71 dB / -0.77 dB
Frequency Stability		+ 2.212 x 10 <sup>-7</sup> % / - 2.170 x 10 <sup>-7</sup>
Duty Cycle		1.06 %
Time Occupancy		1.40 %



## 2 EUT Description

Applicant	Rajant Corporation 200 Chesterfield Parkway, Malvern, Pennsylvania 19355-3258, United States <a href="http://www.rajant.com">www.rajant.com</a>				
Manufacturer	Vizmonet Pte Ltd 21, Woodlands Close, #02-07, Primz Biz Hub, Singapore 737 854 <a href="http://www.vizmonet.com">www.vizmonet.com</a>				
Product Type	BreadCrumb Wireless Nodes (ES1-2450R)				
Trade Name	VIZMONET				
Model No.	ES1-2450R				
FCC ID	VJA-ES12450R				
Operate Frequency	Frequency Band			Frequency Range (MHz)	Number of Channels
	IEEE 802.11a	U-NII Band I		5180 – 5240	4
		U-NII Band III		5745 – 5825	5
	IEEE 802.11n 5 GHz 20 MHz	U-NII Band I		5180 – 5240	4
		U-NII Band III		5745 – 5825	5
	IEEE 802.11n 5 GHz 40 MHz	U-NII Band I		5190 – 5230	2
		U-NII Band III		5755 – 5795	2
Modulation Type	OFDM				
Equipment Type	Master				
Antenna information	Antenna	Model Number	Type	Frequency Range (MHz)	Max. Gain (dBi)
	ANT-0 / ANT-1	KMA-5250-7-NM	External type(Omni)	5180 – 5240 MHz	7
	ANT-0 / ANT-1	KMA-5800-6-NM	External type(Omni)	5745 – 5825 MHz	6
	Note: Antenna connector is N type and this device must be professionally installed.				
Antenna Delivery	Reference section 3.1				
Frequency stability specification	± 20 ppm				
Operate Temp. Range	-40 ~ +85 ℃				



Frequency Band		RF Output Power (W)
IEEE 802.11a	U-NII Band I	0.198
	U-NII Band III	0.228
IEEE 802.11n 5 GHz 20 MHz	U-NII Band I	0.193
	U-NII Band III	0.314
IEEE 802.11n 5 GHz 40 MHz	U-NII Band I	0.186
	U-NII Band III	0.215

Equipment Type		
Outdoor access point	point-to-point	---
	point-to-multipoint	V
Indoor access point		---
Fixed point-to-point access points		---
Client devices		---



### 3 Test Methodology

#### 3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit mode
Mode 2: IEEE 802.11a Continuous TX mode
Mode 3: IEEE 802.11n 5 GHz 20 MHz Continuous TX mode
Mode 4: IEEE 802.11n 5 GHz 40 MHz Continuous TX mode
Mode 5: IEEE 802.11n 5 GHz 20 MHz Continuous TX mode
Mode 6: IEEE 802.11n 5 GHz 40 MHz Continuous TX mode

Note : ANT-1 is the worst case in Mode 2 / Mode 3 / Mode 4.

Software used to control the EUT for staying in continuous transmitting mode was programmed.  
After verification, all tests were carried out with the worst case test modes.

Test Mode	ANT-0	ANT-1	ANT-0+1
Mode 2	V	V	---
Mode 3	V	V	---
Mode 4	V	V	---
Mode 5	V	V	V
Mode 6	V	V	V

Test Mode	Antenna Delivery	Data Rate	Band	Test Channel
Mode 2	1TX (Diversity)	6 M	U-NII Band I	36, 40, 48
			U-NII Band III	149, 157, 165
Mode 3	1TX (SISO)	6.5 M	U-NII Band I	36, 40, 48
			U-NII Band III	149, 157, 165
Mode 4	1TX (SISO)	13.5 M	U-NII Band I	38, 46
			U-NII Band III	151,159
Mode 5	2TX (STBC)	13 M	U-NII Band I	36, 40, 48
			U-NII Band III	149, 157, 165
Mode 6	2TX (STBC)	27 M	U-NII Band I	38, 46
			U-NII Band III	151,159





**Duty cycle**

Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
Mode 2	5180.0	10.000	10.000	1.000	0.000	0.010
Mode 3	5180.0	10.000	10.000	1.000	0.000	0.010
Mode 4	5190.0	10.000	10.000	1.000	0.000	0.010
Mode 5	5180.0	10.000	10.000	1.000	0.000	0.010
Mode 6	5190.0	10.000	10.000	1.000	0.000	0.010




## Duty Cycle Graphs

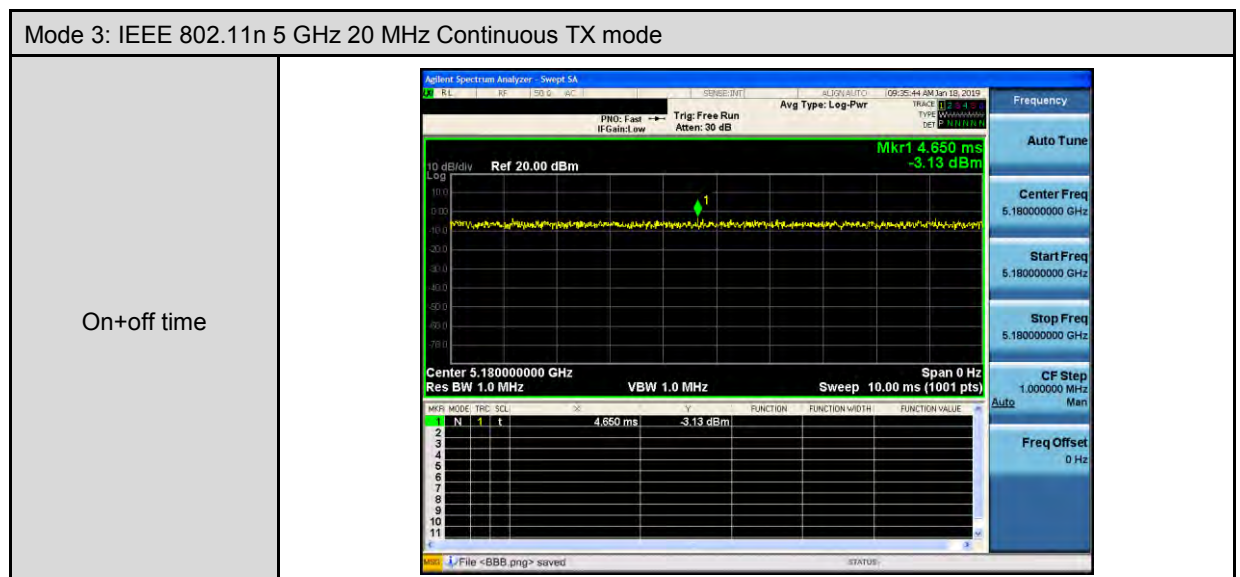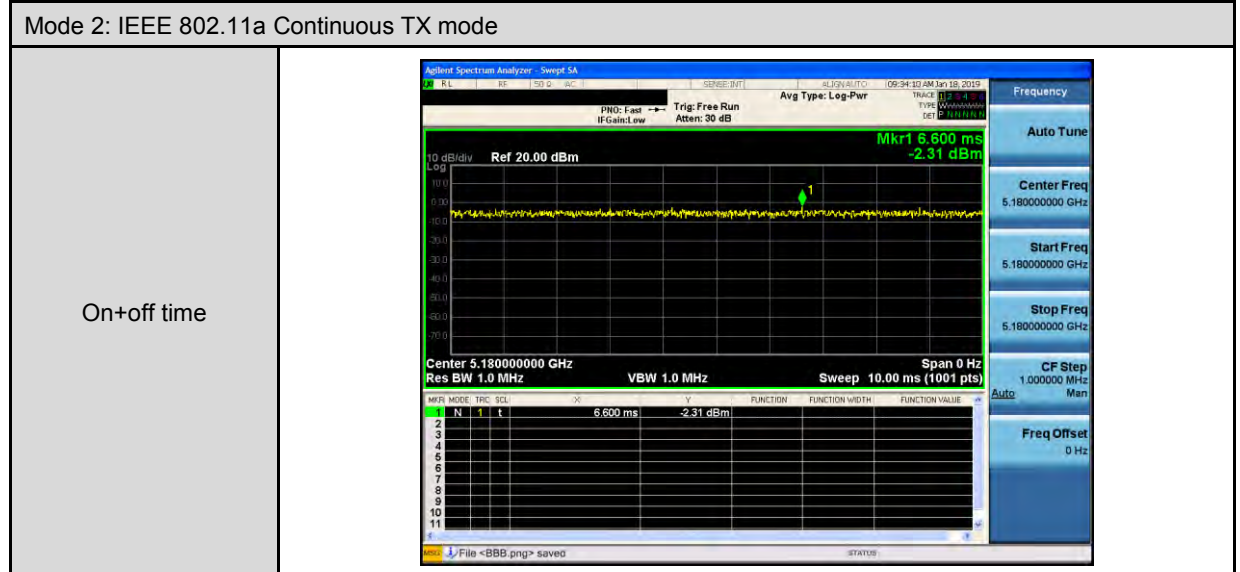




Mode 4: IEEE 802.11n 5 GHz 40 MHz Continuous TX mode


On+off time

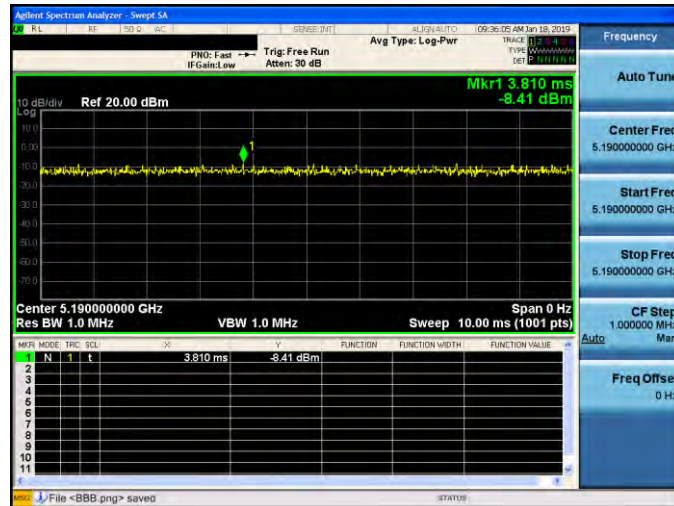

Mode 5: IEEE 802.11n 5 GHz 20 MHz Continuous TX mode

On+off time

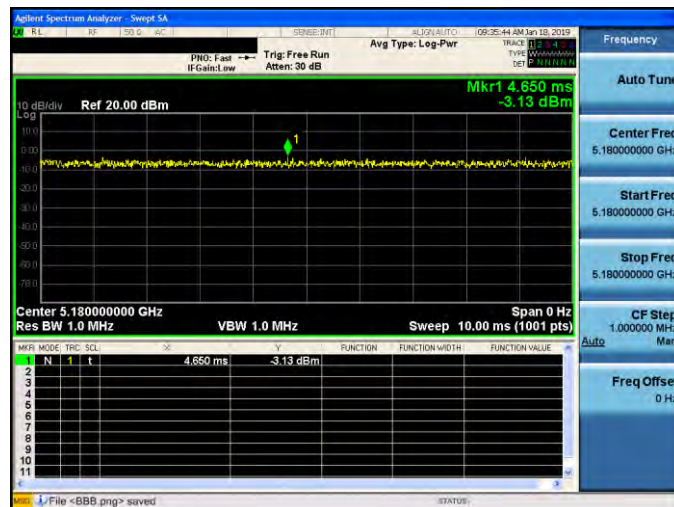

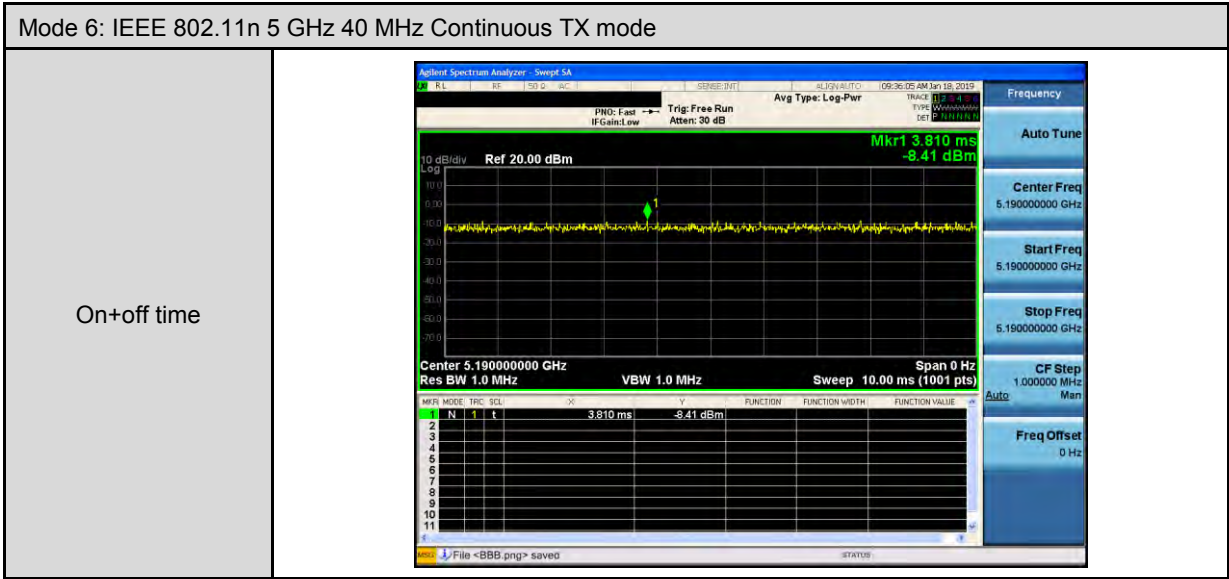



### 3.2. EUT Test Step


The EUT is operated in the engineering mode to fix the TX frequency for the purposes of measurement. According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

1.	Setup the EUT shown on "Configuration of Test System Details".
2.	Turn on the power of all equipment.
3.	Turn on TX function.
4.	EUT run test program.


Measurement Software			
No.	Description	Software	Version
1	Conducted Emission	EZ EMC	1.1.4.3
2	Radiated Emission	EZ EMC	1.1.4.4

### 3.3. Configuration of Test System Details

#### Conducted Emission

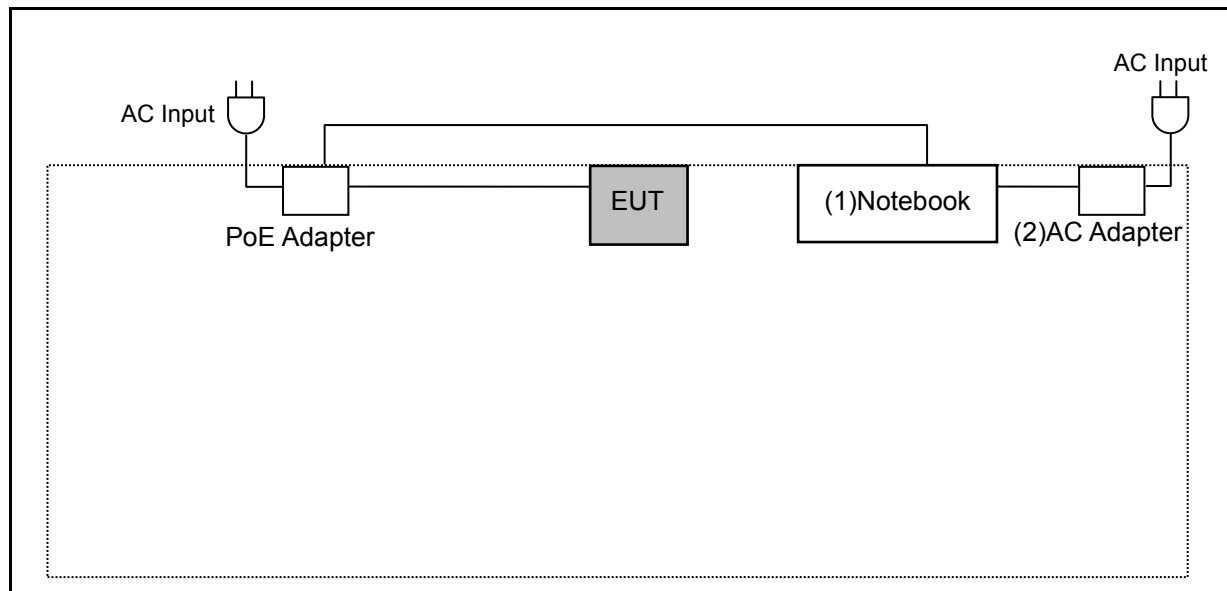

#### Radiated Emission

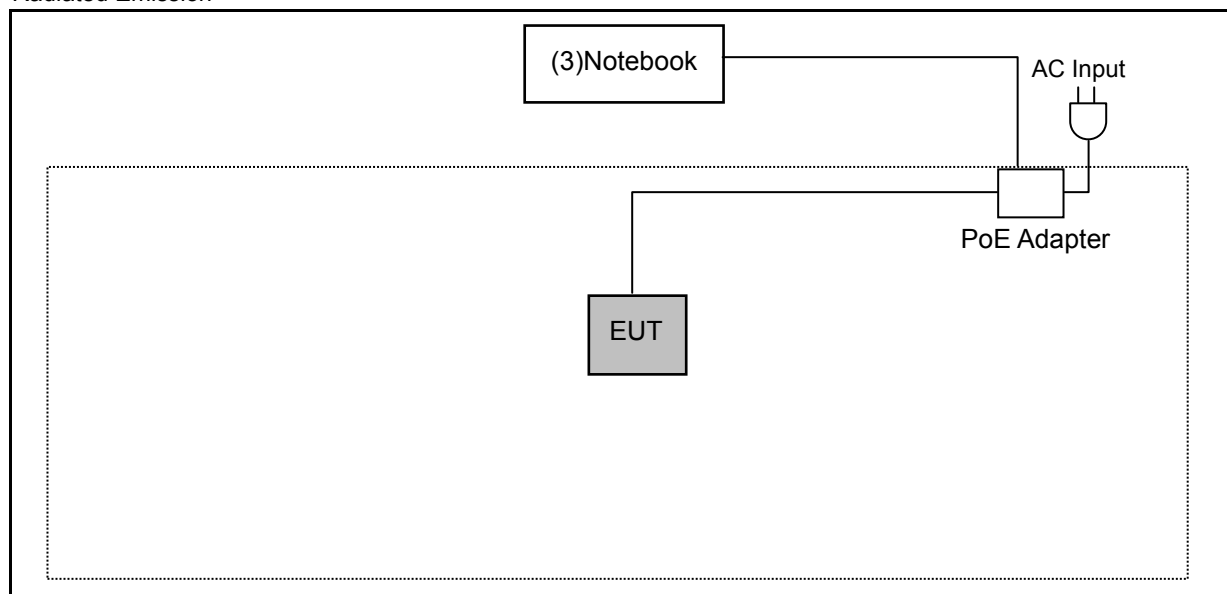

Devices Description					
	Product	Manufacturer	Model Number	Serial Number	Power Cord
(1)	Notebook	DELL	LATITUDE E6440	5HZBD72	---
(2)	AC Adapter	DELL	HA65NM130	---	Non-Shielded, 0.8 m
(3)	Notebook	HP	PROBOOK 4421s	CNF1182X1G	---

### 3.4. Test Instruments

For Conducted Emission

Test Period: Feb. 14, 2019

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Test Receiver	R&S	ESCI	100367	05/21/2018	1 year
LISN	R&S	ENV216	101040	04/11/2018	1 year
LISN	R&S	ENV216	101041	03/23/2018	1 year
RF Cable	Woken	00100D1380194M	TE-02-03	05/17/2018	1 year
Test Site	ATL	TE02	TE02	N.C.R.	-----

For Radiated Emissions

Test Period: Dec. 14 ~ Dec. 21, 2018

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9010A	MY52221312	01/15/2018	1 year
Pre Amplifier (1~26.5 GHz)	Agilent	8449B	3008A02237	10/16/2018	1 year
Pre Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A11119	01/10/2018	1 year
Pre Amplifier (26.5~40 GHz)	EMCI	EMC2654045	980028	08/23/2018	1 year
Trilog Broadband Antenna	Schwarzbeck Mess-Elektronik	VULB9168	416	10/23/2018	1 year
Horn Antenna (1~18 GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	08/23/2018	1 year
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	03/13/2018	1 year
RF Cable	EMCI	EMC104-N-N-6000	TE01-1	02/20/2018	1 year
Microwave Cable	EMCI	EMC102-KM-KM-14000	151001	02/20/2018	1 year
Broadband Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	9170	9170-320	08/07/2018	1 year
Microwave Cable	EMCI	EMC104-SM-SM-13000	170814	10/30/2018	1 year

Note: N.C.R. = No Calibration Request.





For Conducted

Test Period: Dec. 25 ~ Dec. 26, 2018

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Power Sensor	Anritsu	MA2411B	1126022	08/29/2018	1 year
Power Meter	Anritsu	ML2495A	1135009	08/29/2018	1 year
Spectrum Analyzer (3 Hz~50 GHz)	Agilent	N9030A	MY53120541	01/02/2018	1 year
Microwave Cable	EMCI	EMC102-SM-SM1500	001	11/21/2018	1 year
Temperature & Humidity Chamber	TAICHY	MHU-225LA	980729	04/16/2018	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

### 3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	990


## 4 Measurement Procedure

### 4.1. AC Power Conducted Emission Measurement

#### ■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

#### ■ Test Setup

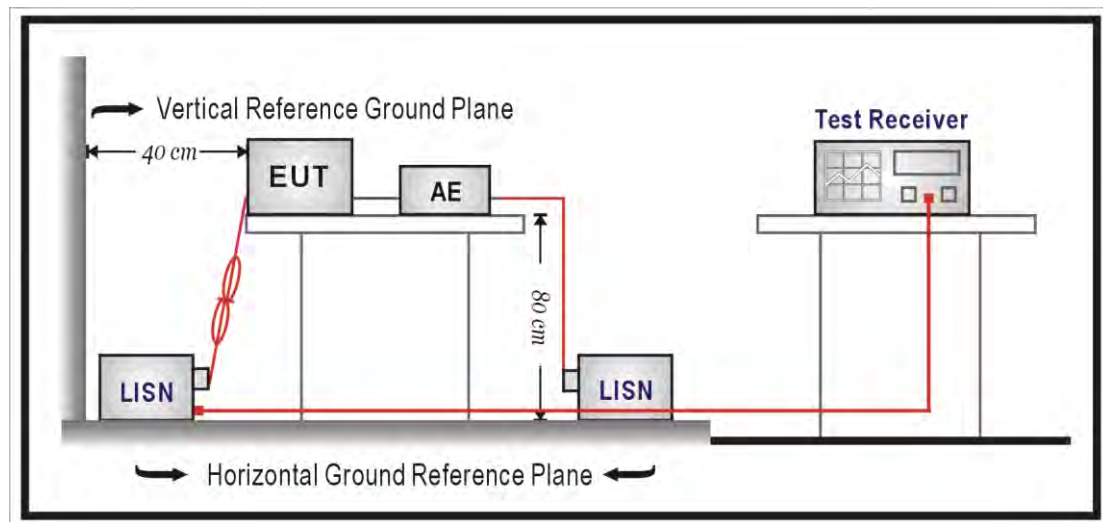

### ■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a  $50\ \Omega // 50\ \mu\text{H}$  coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a  $50\ \Omega // 50\ \mu\text{H}$  coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All 50  $\Omega$  ports of the LISN shall be resistively terminated into 50  $\Omega$  loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

## 4.2. Transmitter Radiated Emissions Measurement

### ■ Limit

(1) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (a) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (b) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (c) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (d) For transmitters operating in the 5.725-5.85 GHz band:
  - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2) Limits of Radiated Emission Measurement


Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequency Range (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	10	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


- Note:
- The lower limit shall apply at the transition frequencies.
  - Emission level (dBuV/m) = 20 log Emission level (uV/m).
  - As shown in 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

## ■ Setup


9 kHz ~ 30 MHz

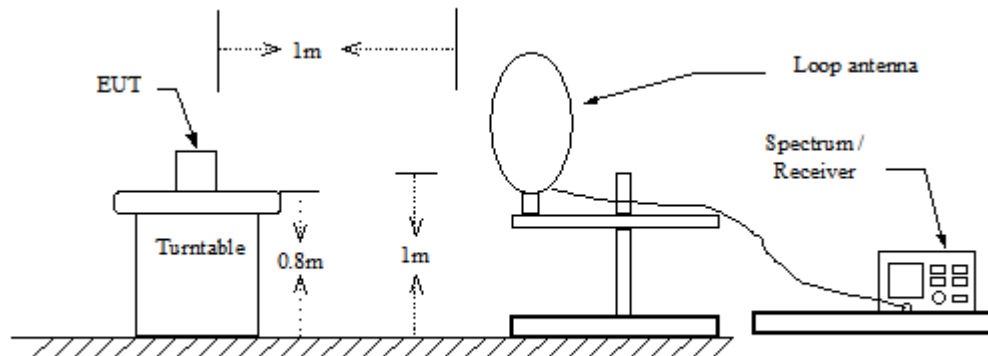

30 MHz ~ 1 GHz

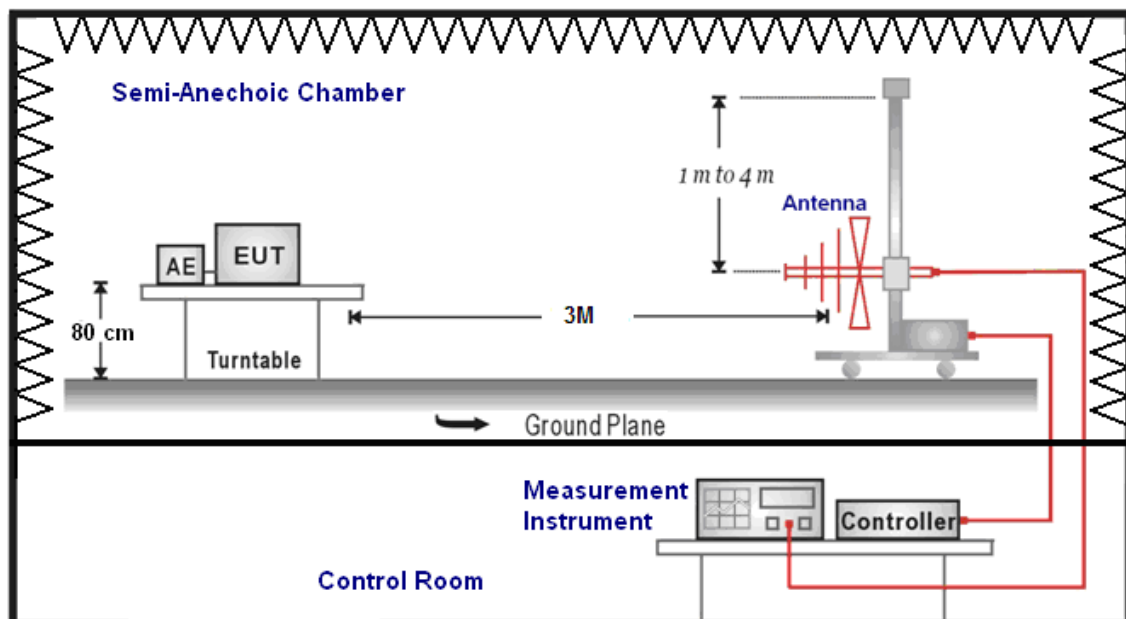

Above 1 GHz

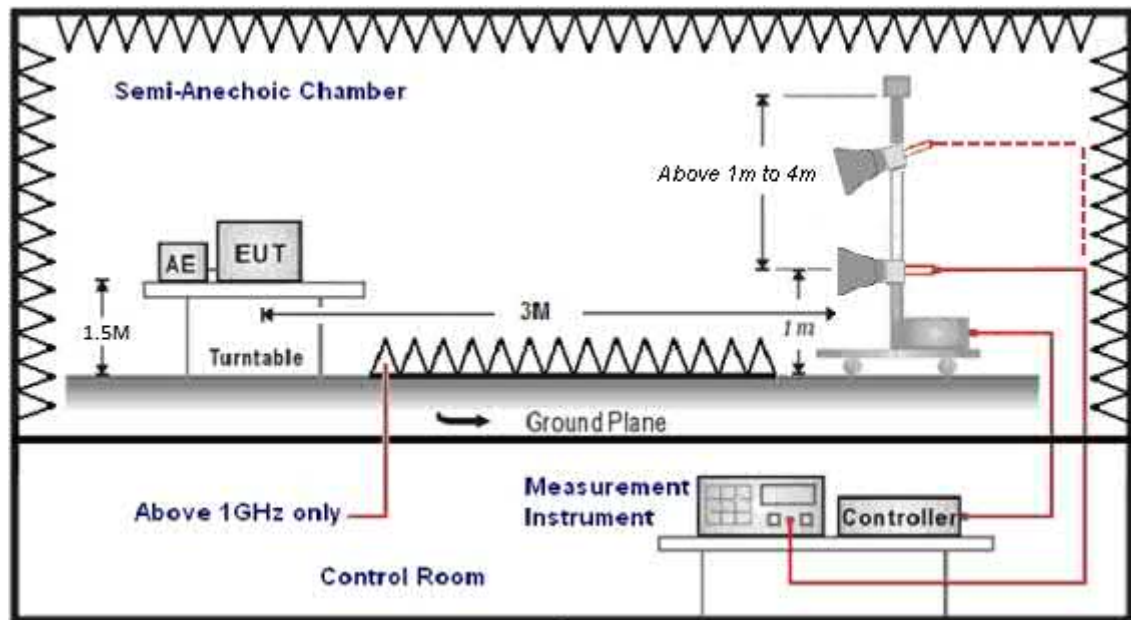

## ■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height (below 1 GHz use 0.8 m turntable / above 1 GHz use 1.5 m turntable), top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 40 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For restricted measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle > 0.98 / 1/T for average measurements when Duty cycle < 0.98.

For out of band measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Trilog-Broadband Antenna at 3 Meter and the ETS-Lindgren Double-Ridged Waveguide Horn antenna Schwarzbeck Mess-Elektronik Broadband Horn Antenna was used in frequencies 1 – 40 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field is intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1)  $\text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2)  $\text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

#### Measuring Instruments and setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW/VBW(Emission in restricted band)	1 MHz / 3 MHz for Peak 1 MHz / (1/T) for Average
RBW/VBW(Emission in non-restricted band)	1 MHz / 3 MHz for Peak



### 4.3. Maximum Conducted Output Power Measurement & Additional Rule For Outdoor Operation

#### ■ Limit

Frequency Range (MHz)	FCC Maximum Conducted Output Power Limit	Max_EIRP at any elevation angle > 30° from horizon
	Master	Outdoor AP Operation
5.150 ~ 5.250 GHz	The lesser of 1W (30dBm)	< 125 mW(21 dBm)
5.725 ~ 5.850 GHz	The lesser of 1W (30dBm)	NA


According FCC KDB 662911 D01 v02r01 – for power measurements on IEEE802.11 devices,

5.150 ~ 5.250 GHz

\* Antenna Gain = 7 dBi > 6 dBi

power limit shall be reduced = 30 - 1 = 29 dBm

#### ■ Test Setup

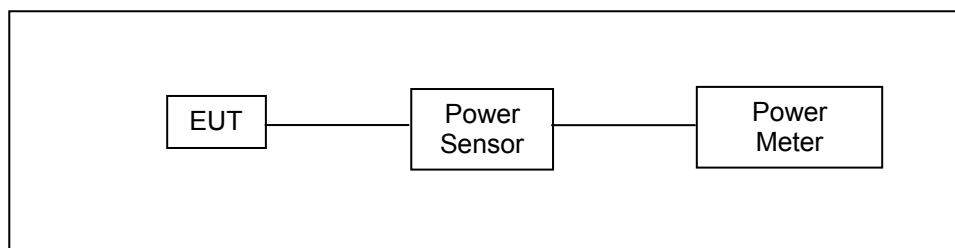

#### ■ Test Procedure

The test is performed in accordance with ANSI C63.10:2013 section 12.3.3.2, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices

Section (E) Maximum Conducted Output Power

3. Measurement using a Power Meter (PM)

b) Method PM-G (Measurement using a gated RF average power meter)



EIRP evaluation according to 789033 D02 General UNII Test Procedures New Rules v02r01 H.(1)(b)

Antenna measurement results such as antenna report presentation.

H. Measurement of emission at elevation angle higher than 30° from horizon

1. For fixed infrastructure, not electrically or mechanically steerable beam antenna

b) If elevation plane radiation pattern is not available, but the antenna type (such as dipole omnidirectional, Yagi, parabolic, or sector antenna) has symmetrical elevation plane pattern referenced at main beam and all lobes on the main beam elevation plane have highest gains, then the following measurement method is acceptable to determine compliance:

(i) Determine the device's intended mounting elevation angle referenced to the horizon.

(ii) Rotate EUT antenna by 90° around the main beam axis in horizontal position to transform measurement in elevation angle into azimuth angle and define 0° reference angle based on device's intended mounting elevation angle.

(iii) Move test antenna along the horizontal arc, or rotate the turn table with EUT antenna placed at the center, between 30° and 90° relative to the 0° reference angle, and then continuing down from 90° to 30° on the other side of the pattern, while maintaining the test antenna pointing with constant distance to the EUT antenna and search for the spot which

has the highest measured emission. Both horizontal and vertical polarization shall be investigated to find out the maximum radiated emission level.

Note: Moving of test antenna along the horizontal arc, or rotating the turn table, shall be performed in angular step size as small as possible, but not larger than 3°.

(iv) Calculate the EIRP based on the highest measured emission and compare to the limit of 125 mW to determine compliance.


(v) The antenna pattern measurements should be included in the filing.

#### 4.4. 26 dB RF Bandwidth & 99 % Occupied Bandwidth Measurement

■ **Limit**

N/A

■ **Test Setup**

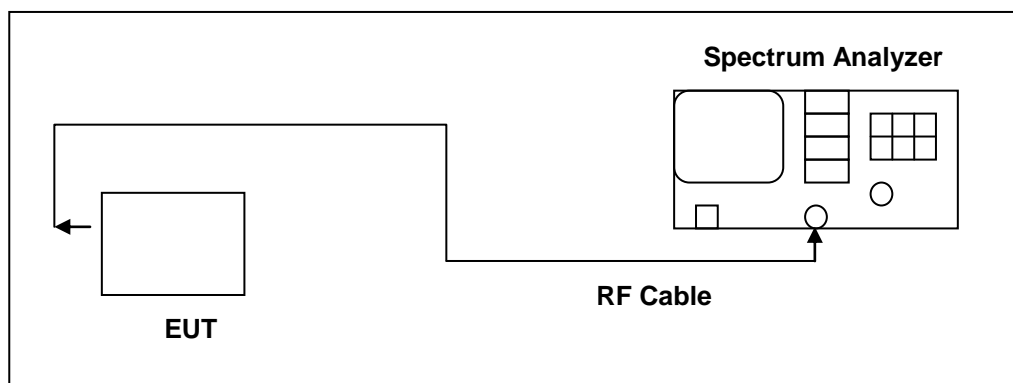

■ **Test Procedure**

The test is performed in accordance with ANSI C63.10:2013 section 12.4, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	>26 dB Bandwidth
RBW	Approximately 1 % of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


## 4.5. 6 dB RF Bandwidth Measurement

### ■ Limit

#### 6 dB RF Bandwidth

Systems using digital modulation techniques may operate in the 5725~5850 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

### ■ Test Setup

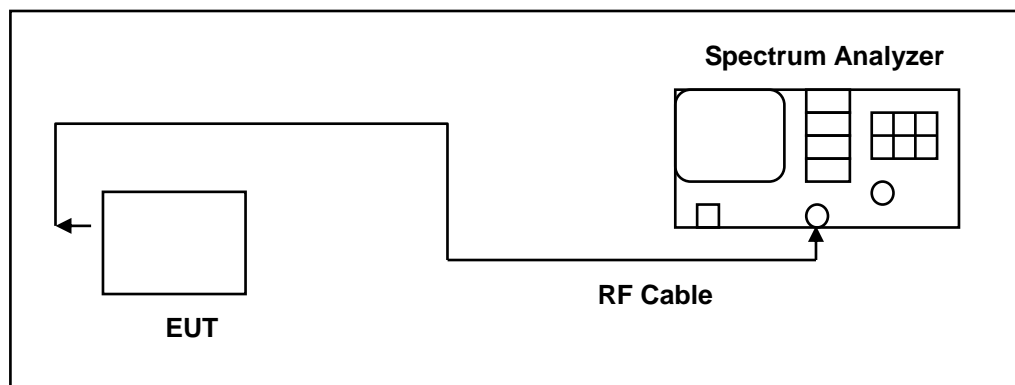

### ■ Test Procedure

#### 6 dB RF Bandwidth

The EUT tested to UNII test procedure of ANSI C63.10:2013 section 6.9.2 for compliance to FCC 47CFR 15.407 requirements.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels.

## 4.6. Maximum Power Spectral Density Measurement

### ■ Limit

Conducted power spectral density

Frequency Range (MHz)	FCC Limit
	Master
5.150 ~ 5.250 GHz	17 dBm/MHz
5.725 ~ 5.850 GHz	30 dBm/500 kHz


According FCC KDB 662911 D01 v02r01 – for power spectral density measurements on IEEE802.11 devices,

5.150 ~ 5.250 GHz

\* Antenna Gain = 7 dBi > 6 dBi

power limit shall be reduced =  $17 - 1 = 16$  dBm/MHz

### ■ Test Setup

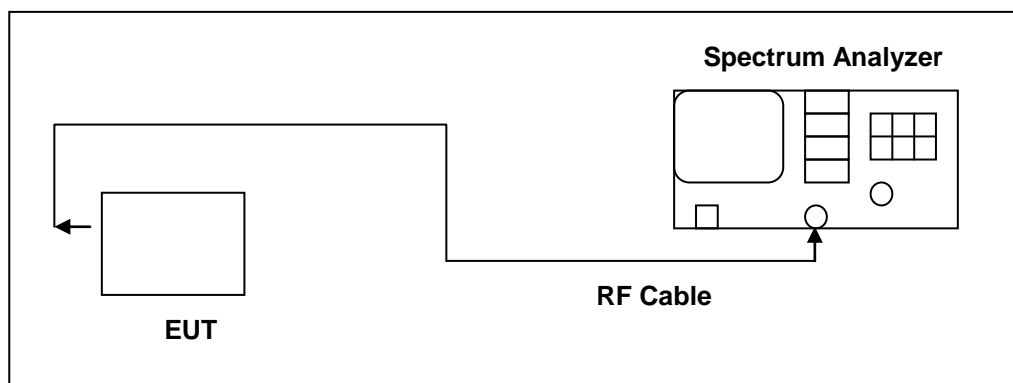



■ **Test Procedure**

The test is performed in accordance with ANSI C63.10:2013 section 12.5, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E.


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz (5725 ~ 5850 MHz use 100 kHz)
VBW	3 MHz (5725 ~ 5850 MHz use 300 kHz)
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log(500 \text{ kHz}/100 \text{ kHz})$ to the measured result.	

## 4.7. Frequency Stability Measurement

### ■ Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

### ■ Test Setup

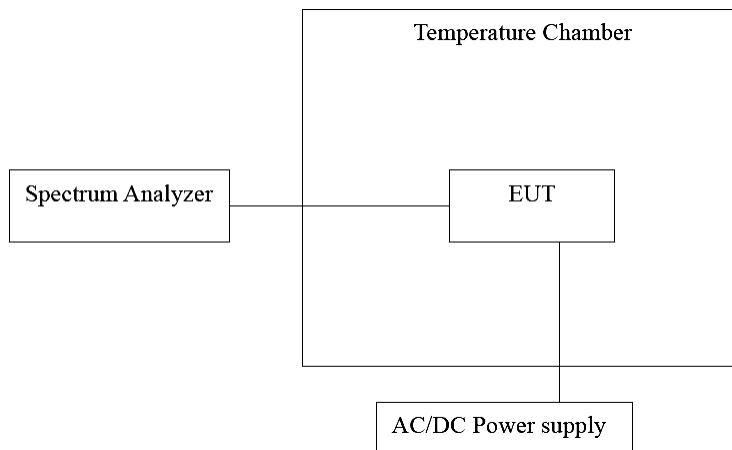

### ■ Test Procedure

1. The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85 % to 115 % and the frequency record.



#### 4.8. Automatically discontinue transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

##### ■ Declare

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving.

The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

#### 4.9. Antenna Requirement

##### ■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.407 (a), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### ■ Antenna Description

See section 2 – antenna information.

##### ■ Antenna Connector Construction

KDB 353028 D01 Antennas Part 15 Transmitters v01

II. BASIC RULE AND POLICY REQUIREMENTS FOR ANTENNAS USED WITH PART 15 TRANSMITTERS A. ANTENNA REQUIREMENTS—Section 15.203

2) The following describes the three ways that can be used to demonstrate compliance to Section 15.203:


c) Professional installation



## 5 Test Results

### 5.1. AC Power Conducted Emission Measurement

Standard:	FCC Part 15.407	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:	Antenna model : KMA-5250-7-NM (5180 – 5240 MHz)		

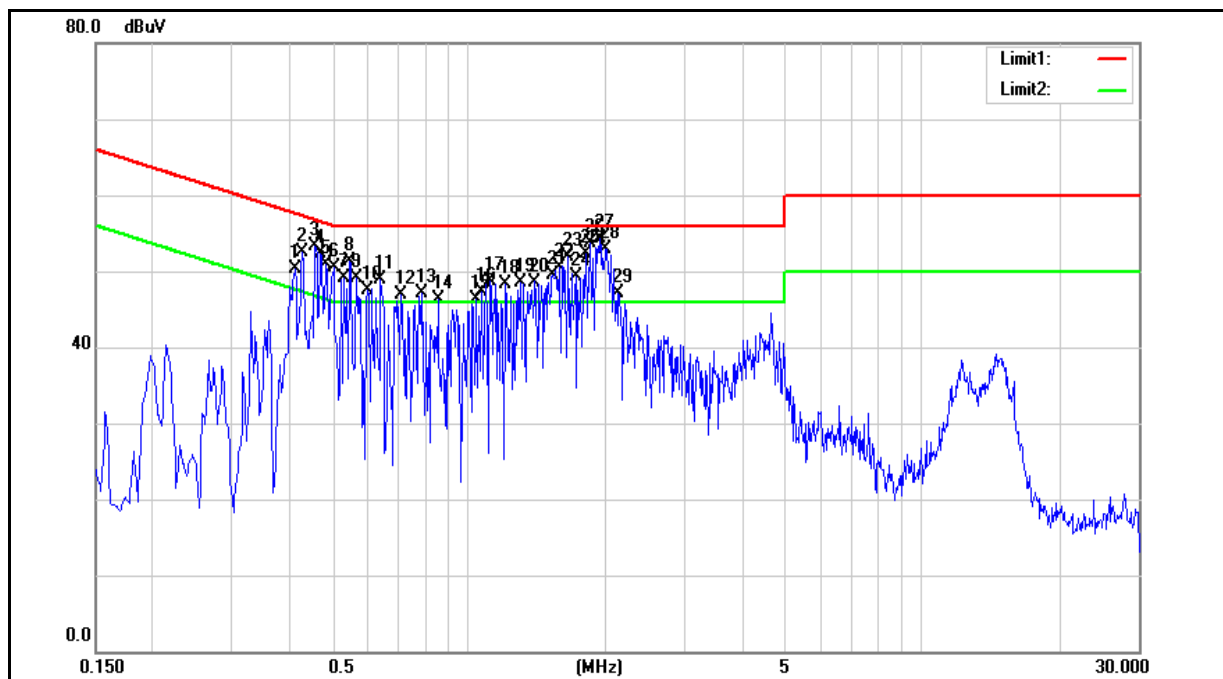

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.4140	38.00	21.01	9.60	47.60	30.61	57.57	47.57	-9.97	-16.96	Pass
2	0.4300	39.70	21.01	9.60	49.30	30.61	57.25	47.25	-7.95	-16.64	Pass
3	0.4580	40.86	23.93	9.60	50.46	33.53	56.73	46.73	-6.27	-13.20	Pass
4	0.4700	40.63	25.20	9.60	50.23	34.80	56.51	46.51	-6.28	-11.71	Pass
5	0.4860	40.32	23.95	9.60	49.92	33.55	56.24	46.24	-6.32	-12.69	Pass
6	0.5020	39.38	21.39	9.60	48.98	30.99	56.00	46.00	-7.02	-15.01	Pass
7	0.5300	38.36	20.93	9.60	47.96	30.53	56.00	46.00	-8.04	-15.47	Pass
8	0.5460	38.04	19.03	9.60	47.64	28.63	56.00	46.00	-8.36	-17.37	Pass
9	0.5660	35.88	16.75	9.60	45.48	26.35	56.00	46.00	-10.52	-19.65	Pass
10	0.5980	34.60	16.59	9.60	44.20	26.19	56.00	46.00	-11.80	-19.81	Pass

Note: 1. Result = Correction factor + Reading

2. Correction factor = Antenna Factor + Cable loss – Pre-Amplifier gain.




Standard:	FCC Part 15.407	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:	Antenna model : KMA-5250-7-NM (5180 – 5240 MHz)		

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
11	0.6380	36.18	17.46	9.61	45.79	27.07	56.00	46.00	-10.21	-18.93	Pass
12	0.7060	34.10	16.48	9.62	43.72	26.10	56.00	46.00	-12.28	-19.90	Pass
13	0.7900	34.92	17.33	9.62	44.54	26.95	56.00	46.00	-11.46	-19.05	Pass
14	0.8540	32.23	16.71	9.62	41.85	26.33	56.00	46.00	-14.15	-19.67	Pass
15	1.0380	33.60	15.35	9.63	43.23	24.98	56.00	46.00	-12.77	-21.02	Pass
16	1.0660	34.22	17.55	9.63	43.85	27.18	56.00	46.00	-12.15	-18.82	Pass
17	1.1140	34.61	17.04	9.63	44.24	26.67	56.00	46.00	-11.76	-19.33	Pass
18	1.2020	34.28	16.47	9.64	43.92	26.11	56.00	46.00	-12.08	-19.89	Pass
19	1.2980	32.52	15.51	9.64	42.16	25.15	56.00	46.00	-13.84	-20.85	Pass
20	1.4020	33.41	16.29	9.64	43.05	25.93	56.00	46.00	-12.95	-20.07	Pass
21	1.5340	35.54	17.99	9.66	45.20	27.65	56.00	46.00	-10.80	-18.35	Pass
22	1.5820	36.68	19.24	9.66	46.34	28.90	56.00	46.00	-9.66	-17.10	Pass
23	1.6540	37.48	18.90	9.66	47.14	28.56	56.00	46.00	-8.86	-17.44	Pass
24	1.7180	36.04	18.89	9.66	45.70	28.55	56.00	46.00	-10.30	-17.45	Pass
25	1.8140	36.99	19.30	9.66	46.65	28.96	56.00	46.00	-9.35	-17.04	Pass
26	1.8500	37.87	20.46	9.67	47.54	30.13	56.00	46.00	-8.46	-15.87	Pass
27	1.9460	38.60	21.80	9.67	48.27	31.47	56.00	46.00	-7.73	-14.53	Pass
28	2.0060	38.06	21.15	9.67	47.73	30.82	56.00	46.00	-8.27	-15.18	Pass
29	2.1340	33.18	16.67	9.67	42.85	26.34	56.00	46.00	-13.15	-19.66	Pass

Note: 1. Result = Correction factor + Reading  
2. Correction factor = Antenna Factor + Cable loss – Pre-Amplifier gain.

Standard:	FCC Part 15.407	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:	Antenna model : KMA-5250-7-NM (5180 – 5240 MHz)		

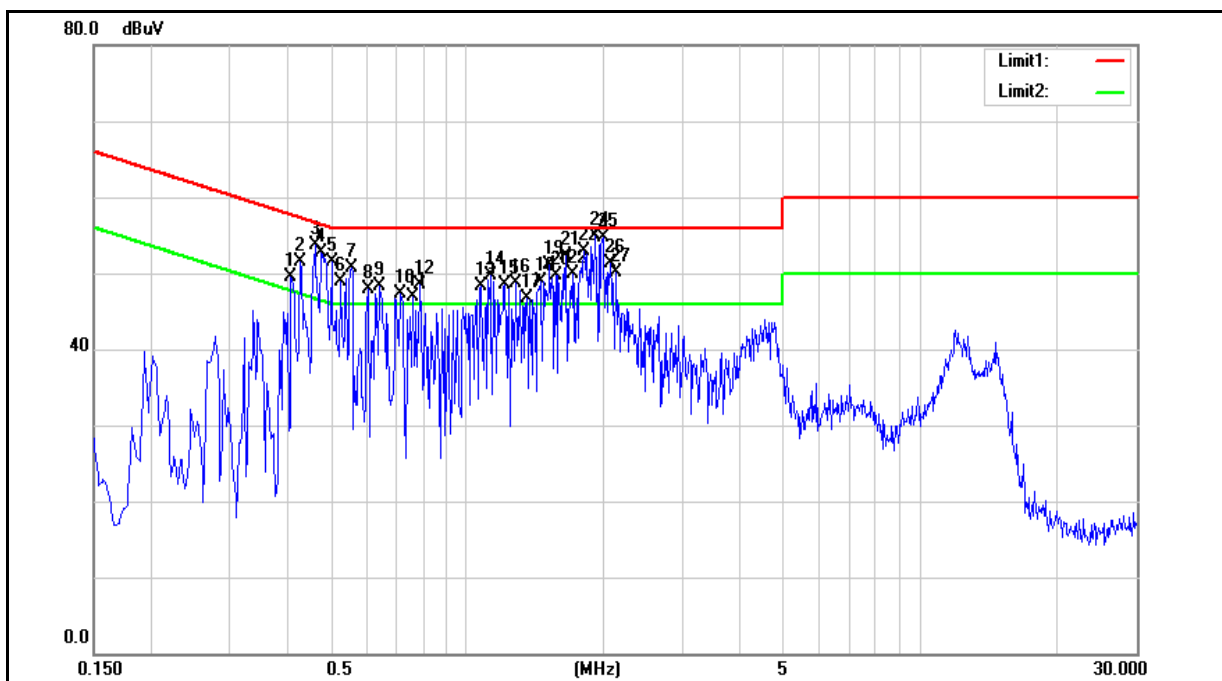

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.4100	37.36	20.61	9.71	47.07	30.32	57.65	47.65	-10.58	-17.33	Pass
2	0.4300	39.72	21.08	9.71	49.43	30.79	57.25	47.25	-7.82	-16.46	Pass
3	0.4620	40.89	24.68	9.71	50.60	34.39	56.66	46.66	-6.06	-12.27	Pass
4	0.4780	40.39	24.76	9.71	50.10	34.47	56.37	46.37	-6.27	-11.90	Pass
5	0.5020	39.21	21.17	9.71	48.92	30.88	56.00	46.00	-7.08	-15.12	Pass
6	0.5260	38.65	21.07	9.71	48.36	30.78	56.00	46.00	-7.64	-15.22	Pass
7	0.5580	36.69	17.42	9.71	46.40	27.13	56.00	46.00	-9.60	-18.87	Pass
8	0.6060	35.69	16.69	9.71	45.40	26.40	56.00	46.00	-10.60	-19.60	Pass
9	0.6420	35.94	18.28	9.72	45.66	28.00	56.00	46.00	-10.34	-18.00	Pass
10	0.7140	34.60	18.01	9.72	44.32	27.73	56.00	46.00	-11.68	-18.27	Pass
11	0.7620	32.86	14.66	9.72	42.58	24.38	56.00	46.00	-13.42	-21.62	Pass

Note: 1. Result = Correction factor + Reading

2. Correction factor = Antenna Factor + Cable loss – Pre-Amplifier gain.




Standard:	FCC Part 15.407	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:	Antenna model : KMA-5250-7-NM (5180 – 5240 MHz)		

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
12	0.7900	35.16	17.51	9.72	44.88	27.23	56.00	46.00	-11.12	-18.77	Pass
13	1.0740	34.39	17.18	9.73	44.12	26.91	56.00	46.00	-11.88	-19.09	Pass
14	1.1260	34.93	17.57	9.73	44.66	27.30	56.00	46.00	-11.34	-18.70	Pass
15	1.2100	34.71	17.32	9.74	44.45	27.06	56.00	46.00	-11.55	-18.94	Pass
16	1.2780	33.48	16.72	9.74	43.22	26.46	56.00	46.00	-12.78	-19.54	Pass
17	1.3540	32.15	16.50	9.74	41.89	26.24	56.00	46.00	-14.11	-19.76	Pass
18	1.4500	35.18	18.35	9.74	44.92	28.09	56.00	46.00	-11.08	-17.91	Pass
19	1.5220	35.66	18.49	9.76	45.42	28.25	56.00	46.00	-10.58	-17.75	Pass
20	1.5700	36.09	20.24	9.76	45.85	30.00	56.00	46.00	-10.15	-16.00	Pass
21	1.6540	37.83	19.29	9.76	47.59	29.05	56.00	46.00	-8.41	-16.95	Pass
22	1.7100	36.24	19.61	9.76	46.00	29.37	56.00	46.00	-10.00	-16.63	Pass
23	1.8180	37.78	20.13	9.76	47.54	29.89	56.00	46.00	-8.46	-16.11	Pass
24	1.9100	38.91	22.09	9.77	48.68	31.86	56.00	46.00	-7.32	-14.14	Pass
25	1.9980	38.25	21.48	9.77	48.02	31.25	56.00	46.00	-7.98	-14.75	Pass
26	2.0660	36.53	19.55	9.77	46.30	29.32	56.00	46.00	-9.70	-16.68	Pass
27	2.1420	33.48	17.55	9.77	43.25	27.32	56.00	46.00	-12.75	-18.68	Pass

Note: 1. Result = Correction factor + Reading

2. Correction factor = Antenna Factor + Cable loss – Pre-Amplifier gain.

Standard:	FCC Part 15.407	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:	Antenna model : KMA-5800-6-NM (5745 – 5825 MHz)		

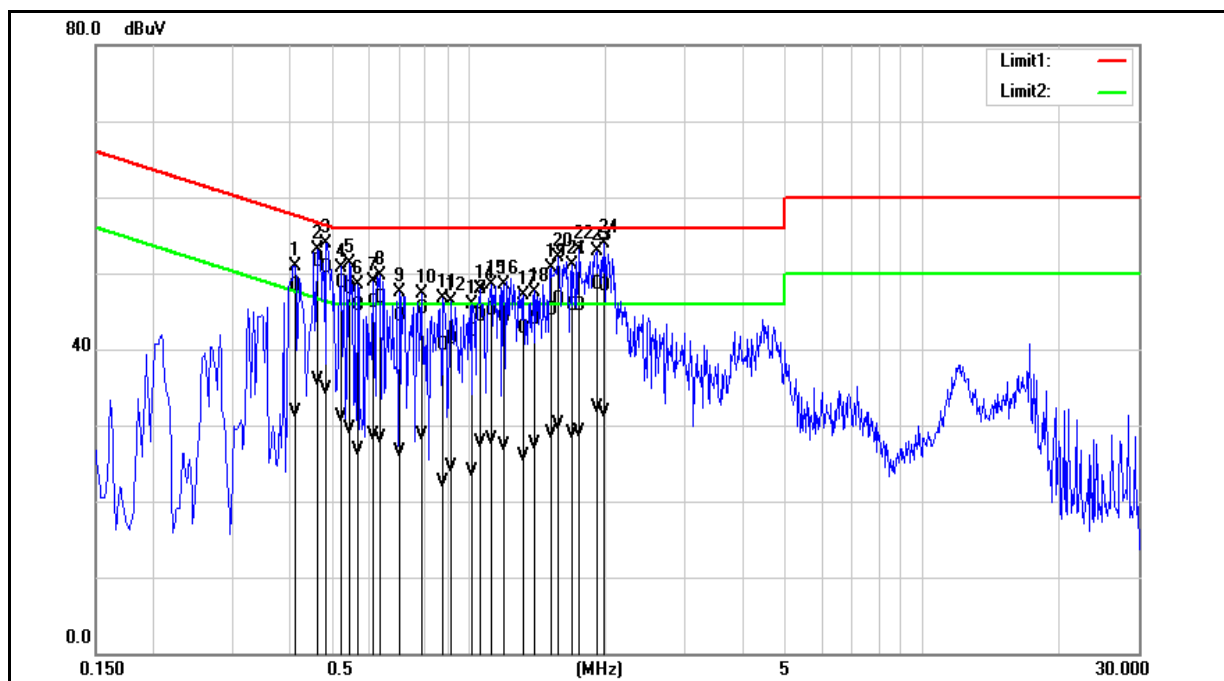

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.4140	38.65	22.01	9.60	48.25	31.61	57.57	47.57	-9.32	-15.96	Pass
2	0.4620	41.86	26.23	9.60	51.46	35.83	56.66	46.66	-5.20	-10.83	Pass
3	0.4860	41.18	25.17	9.60	50.78	34.77	56.24	46.24	-5.46	-11.47	Pass
4	0.5220	39.15	21.49	9.60	48.75	31.09	56.00	46.00	-7.25	-14.91	Pass
5	0.5460	38.23	19.82	9.60	47.83	29.42	56.00	46.00	-8.17	-16.58	Pass
6	0.5700	36.09	17.07	9.60	45.69	26.67	56.00	46.00	-10.31	-19.33	Pass
7	0.6140	36.46	19.07	9.60	46.06	28.67	56.00	46.00	-9.94	-17.33	Pass
8	0.6380	37.04	18.63	9.61	46.65	28.24	56.00	46.00	-9.35	-17.76	Pass
9	0.7020	34.72	16.93	9.62	44.34	26.55	56.00	46.00	-11.66	-19.45	Pass
10	0.7860	35.72	19.11	9.62	45.34	28.73	56.00	46.00	-10.66	-17.27	Pass
11	0.8780	30.93	12.84	9.63	40.56	22.47	56.00	46.00	-15.44	-23.53	Pass

Note: 1. Result = Correction factor + Reading

2. Correction factor = Antenna Factor + Cable loss – Pre-Amplifier gain.




Standard:	FCC Part 15.407	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:	Antenna model : KMA-5800-6-NM (5745 – 5825 MHz)		

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
12	0.9140	31.59	14.78	9.63	41.22	24.41	56.00	46.00	-14.78	-21.59	Pass
13	1.0180	32.70	14.22	9.63	42.33	23.85	56.00	46.00	-13.67	-22.15	Pass
14	1.0620	34.58	18.14	9.63	44.21	27.77	56.00	46.00	-11.79	-18.23	Pass
15	1.1220	35.57	18.41	9.63	45.20	28.04	56.00	46.00	-10.80	-17.96	Pass
16	1.1940	34.45	17.58	9.64	44.09	27.22	56.00	46.00	-11.91	-18.78	Pass
17	1.3180	32.98	16.28	9.64	42.62	25.92	56.00	46.00	-13.38	-20.08	Pass
18	1.3900	34.30	17.80	9.64	43.94	27.44	56.00	46.00	-12.06	-18.56	Pass
19	1.5140	35.53	19.32	9.66	45.19	28.98	56.00	46.00	-10.81	-17.02	Pass
20	1.5740	36.79	20.49	9.66	46.45	30.15	56.00	46.00	-9.55	-15.85	Pass
21	1.6860	35.97	19.26	9.66	45.63	28.92	56.00	46.00	-10.37	-17.08	Pass
22	1.7500	36.03	19.36	9.66	45.69	29.02	56.00	46.00	-10.31	-16.98	Pass
23	1.9180	38.84	22.70	9.67	48.51	32.37	56.00	46.00	-7.49	-13.63	Pass
24	1.9900	38.57	22.02	9.67	48.24	31.69	56.00	46.00	-7.76	-14.31	Pass

Note: 1. Result = Correction factor + Reading

2. Correction factor = Antenna Factor + Cable loss – Pre-Amplifier gain.

Standard:	FCC Part 15.407	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:	Antenna model : KMA-5800-6-NM (5745 – 5825 MHz)		

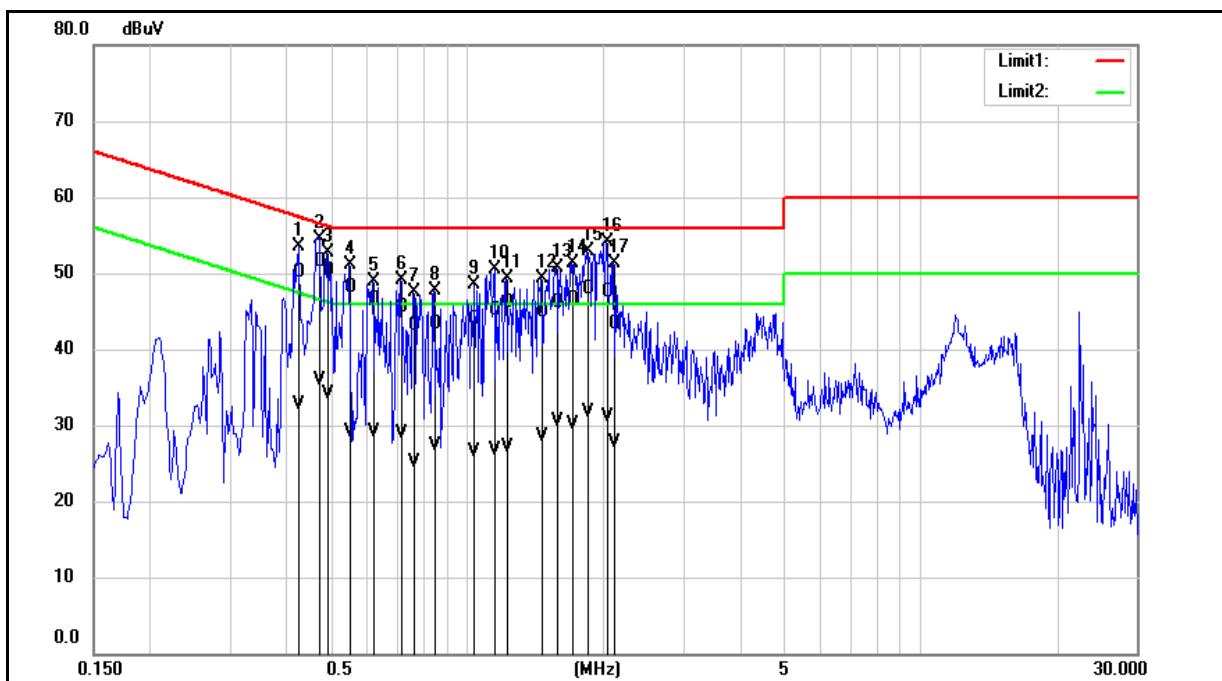

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.4260	40.36	22.94	9.71	50.07	32.65	57.33	47.33	-7.26	-14.68	Pass
2	0.4700	41.74	26.17	9.71	51.45	35.88	56.51	46.51	-5.06	-10.63	Pass
3	0.4900	40.62	24.37	9.71	50.33	34.08	56.17	46.17	-5.84	-12.09	Pass
4	0.5500	38.32	19.46	9.71	48.03	29.17	56.00	46.00	-7.97	-16.83	Pass
5	0.6180	36.88	19.44	9.71	46.59	29.15	56.00	46.00	-9.41	-16.85	Pass
6	0.7140	35.88	19.26	9.72	45.60	28.98	56.00	46.00	-10.40	-17.02	Pass
7	0.7620	33.47	15.35	9.72	43.19	25.07	56.00	46.00	-12.81	-20.93	Pass
8	0.8460	33.65	17.50	9.72	43.37	27.22	56.00	46.00	-12.63	-18.78	Pass
9	1.0380	34.16	16.84	9.73	43.89	26.57	56.00	46.00	-12.11	-19.43	Pass
10	1.1500	35.36	17.00	9.73	45.09	26.73	56.00	46.00	-10.91	-19.27	Pass
11	1.2180	36.27	17.27	9.74	46.01	27.01	56.00	46.00	-9.99	-18.99	Pass

Note: 1. Result = Correction factor + Reading

2. Correction factor = Antenna Factor + Cable loss – Pre-Amplifier gain.



Standard:	FCC Part 15.407	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:	Antenna model : KMA-5800-6-NM (5745 – 5825 MHz)		

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
12	1.4580	35.15	18.75	9.74	44.89	28.49	56.00	46.00	-11.11	-17.51	Pass
13	1.5700	36.40	20.81	9.76	46.16	30.57	56.00	46.00	-9.84	-15.43	Pass
14	1.7060	36.66	20.37	9.76	46.42	30.13	56.00	46.00	-9.58	-15.87	Pass
15	1.8420	38.18	21.96	9.77	47.95	31.73	56.00	46.00	-8.05	-14.27	Pass
16	2.0260	37.74	21.25	9.77	47.51	31.02	56.00	46.00	-8.49	-14.98	Pass
17	2.1100	33.45	17.86	9.77	43.22	27.63	56.00	46.00	-12.78	-18.37	Pass

Note: 1. Result = Correction factor + Reading

2. Correction factor = Antenna Factor + Cable loss – Pre-Amplifier gain.



## 5.2. Transmitter Radiated Emissions Measurement

### Harmonic

Below 1 GHz

Standard:		FCC Part 15.407		Test Distance:		3 m	
Test item:		Harmonic		Power:		AC 120 V/60 Hz	
Test Mode:		Mode 1		Temp.(°C)/Hum.(%RH):		26(°C)/60 %RH	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
97.5000	46.33	-12.40	33.93	43.50	-9.57	QP	H
200.0000	44.49	-9.30	35.19	43.50	-8.31	QP	H
540.0000	31.69	-1.14	30.55	46.00	-15.45	QP	H
720.0000	35.87	2.29	38.16	46.00	-7.84	QP	H
750.0000	31.79	2.90	34.69	46.00	-11.31	QP	H
875.0000	30.27	4.57	34.84	46.00	-11.16	QP	H
62.0000	37.79	-8.23	29.56	40.00	-10.44	QP	V
88.0000	42.94	-12.83	30.11	40.00	-9.89	QP	V
540.0000	37.29	-1.14	36.15	46.00	-9.85	QP	V
625.0000	36.90	0.65	37.55	46.00	-8.45	QP	V
720.0000	36.39	2.29	38.68	46.00	-7.32	QP	V
875.0000	33.48	4.57	38.05	46.00	-7.95	QP	V

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 33.93=-12.40+46.33.


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Above 1 GHz

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

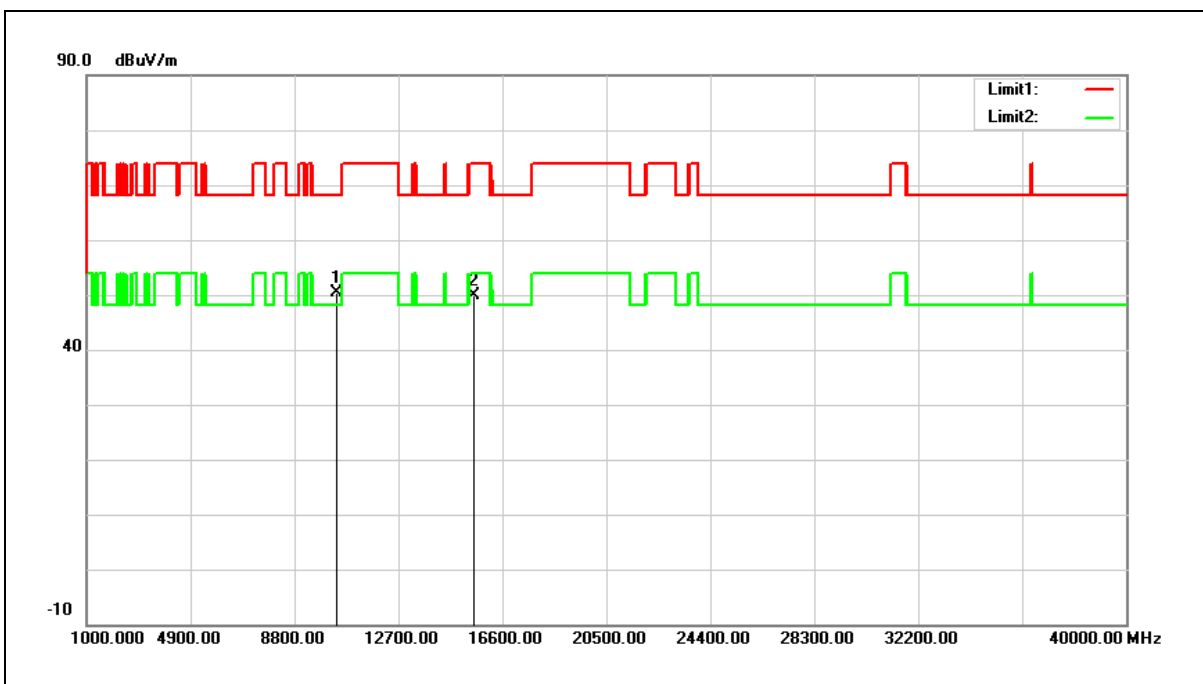

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	33.48	16.79	50.27	68.20	-17.93	peak
2	15540.000	30.89	19.03	49.92	74.00	-24.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 50.27=16.79+33.48.

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

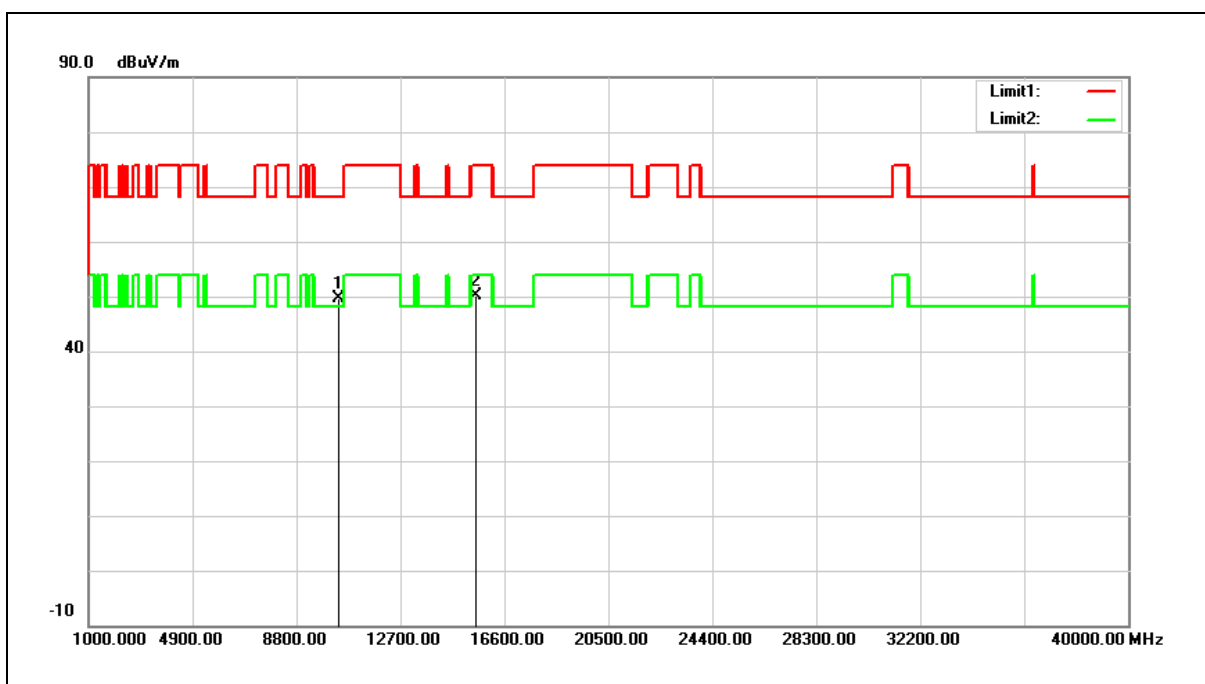

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	32.81	16.79	49.60	68.20	-18.60	peak
2	15540.000	31.15	19.03	50.18	74.00	-23.82	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).


Example:  $49.60 = 16.79 + 32.81$ .

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

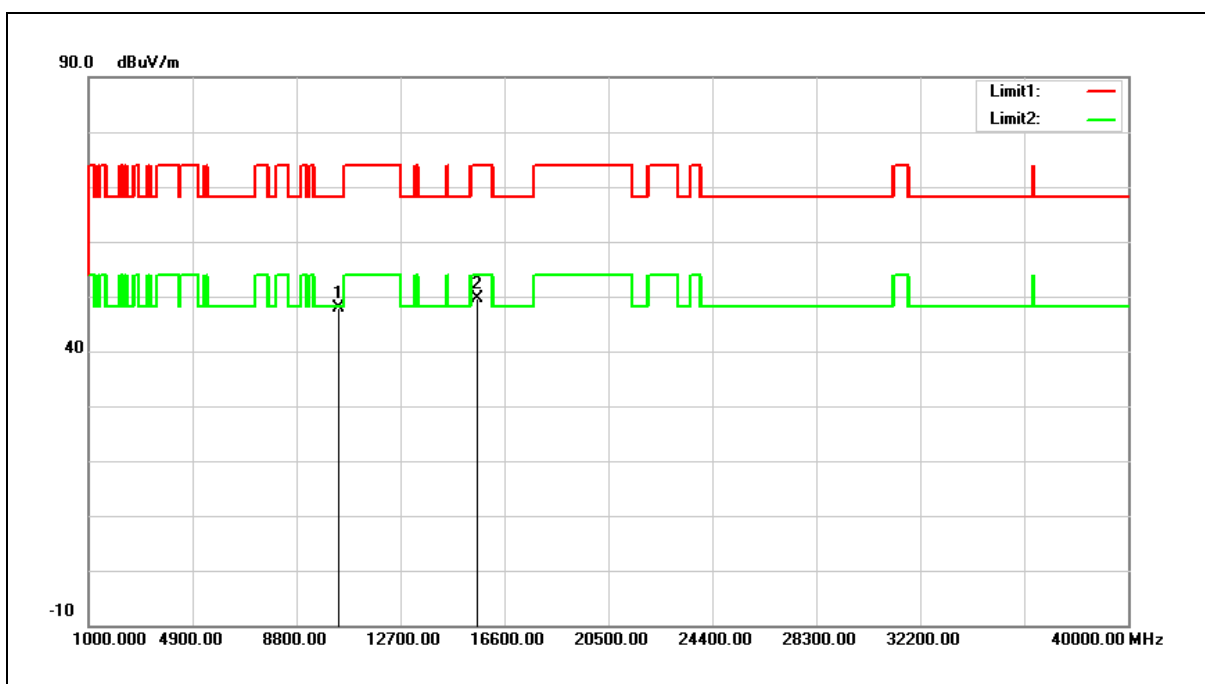

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	30.87	16.94	47.81	68.20	-20.39	peak
2	15600.000	30.73	18.87	49.60	74.00	-24.40	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

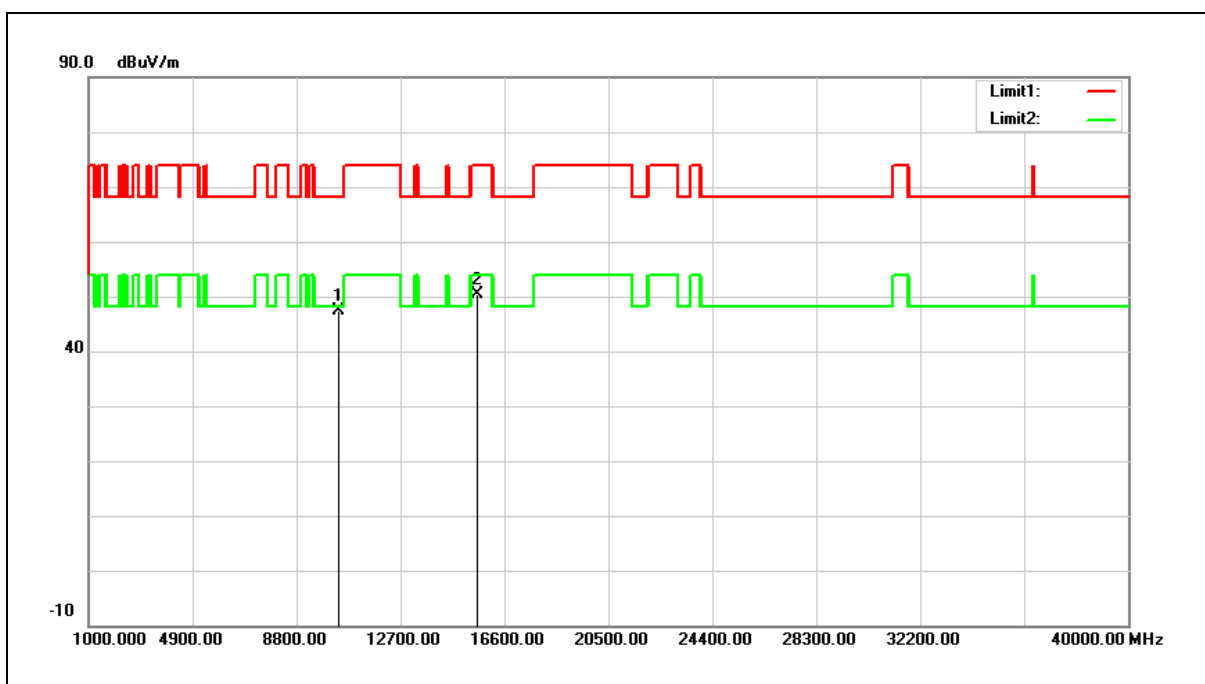

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	30.54	16.94	47.48	68.20	-20.72	peak
2	15600.000	31.61	18.87	50.48	74.00	-23.52	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

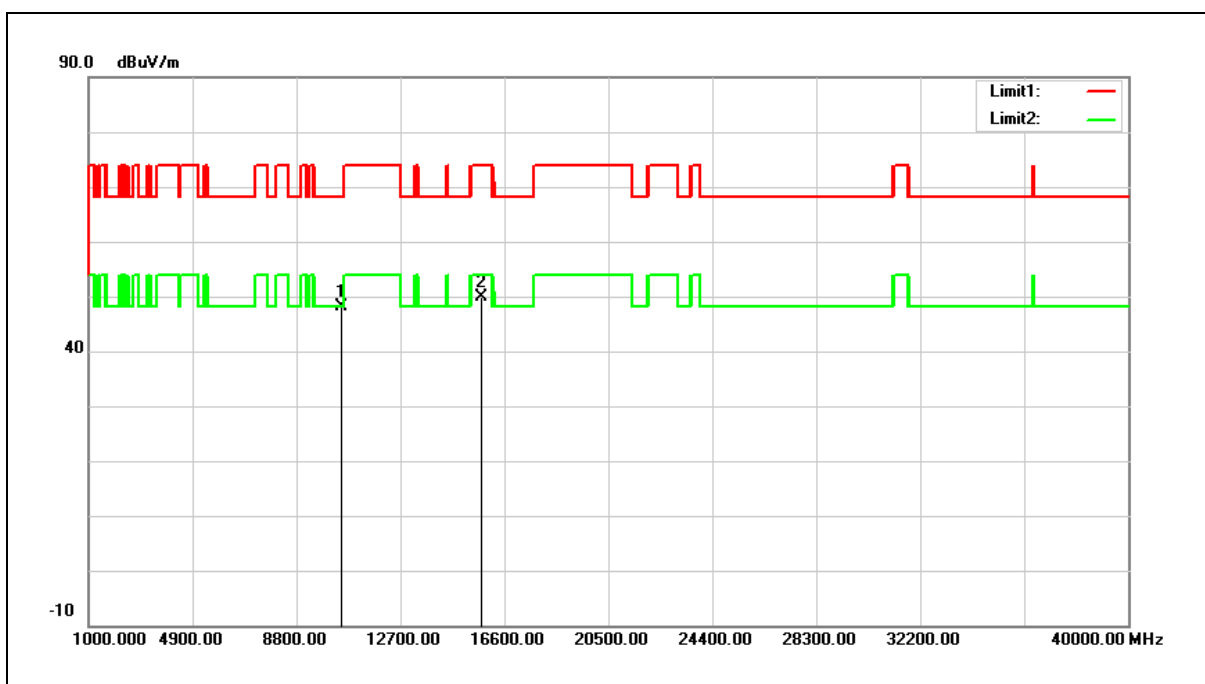

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	30.96	17.23	48.19	68.20	-20.01	peak
2	15720.000	31.41	18.57	49.98	74.00	-24.02	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

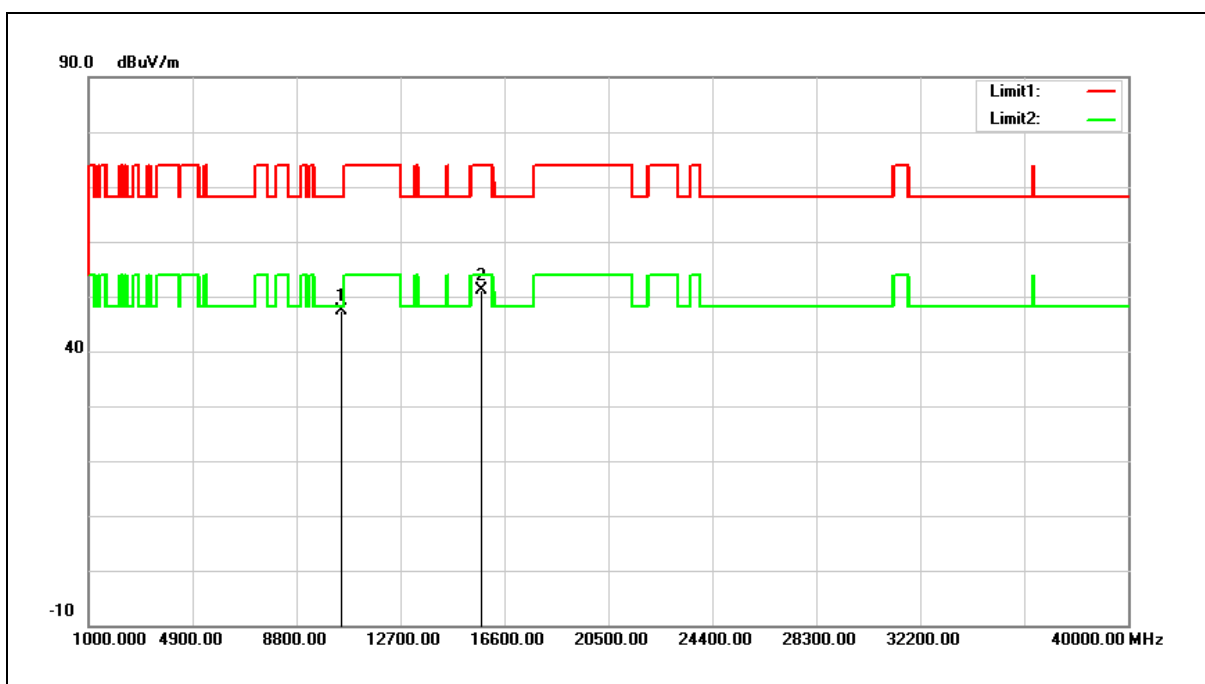

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	30.16	17.23	47.39	68.20	-20.81	peak
2	15720.000	32.49	18.57	51.06	74.00	-22.94	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

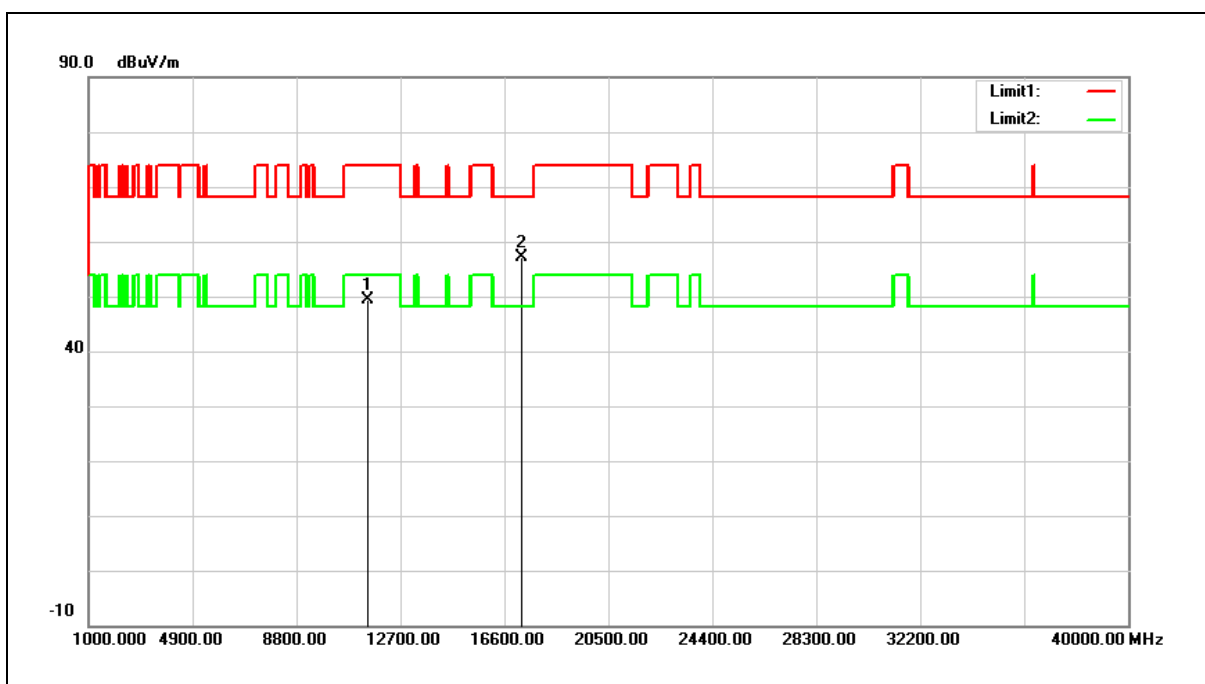

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	30.92	18.46	49.38	74.00	-24.62	peak
2	17235.000	32.85	24.18	57.03	68.20	-11.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

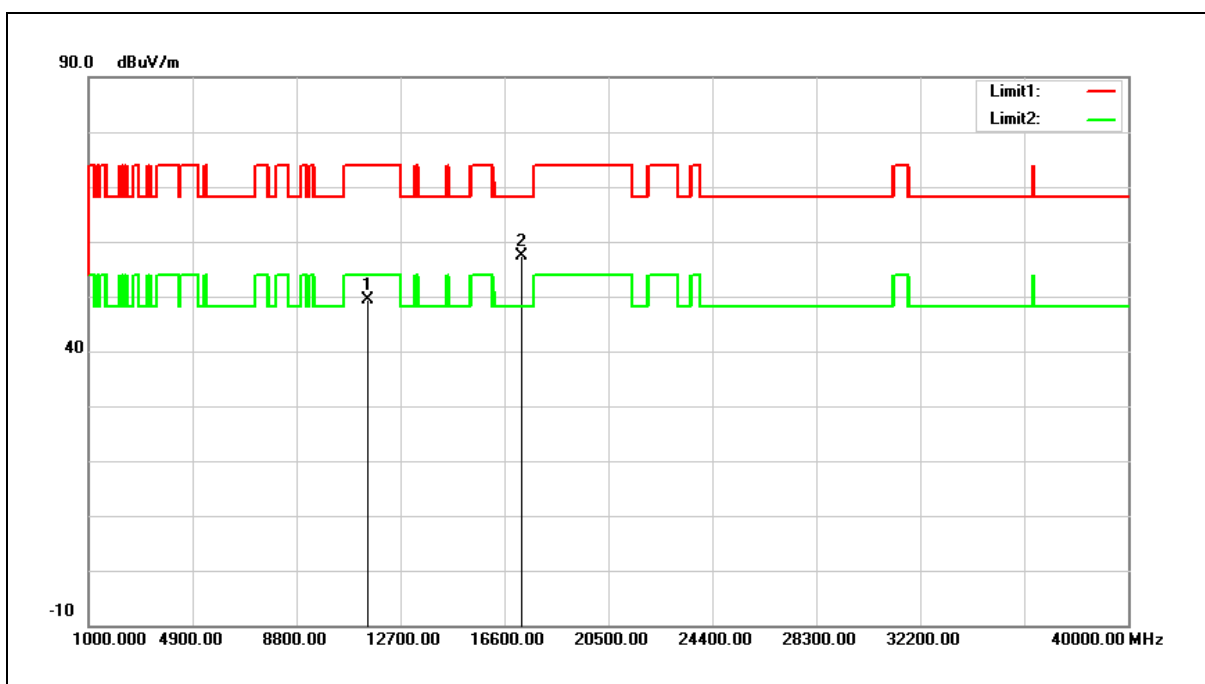

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	30.94	18.46	49.40	74.00	-24.60	peak
2	17230.000	33.26	24.16	57.42	68.20	-10.78	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

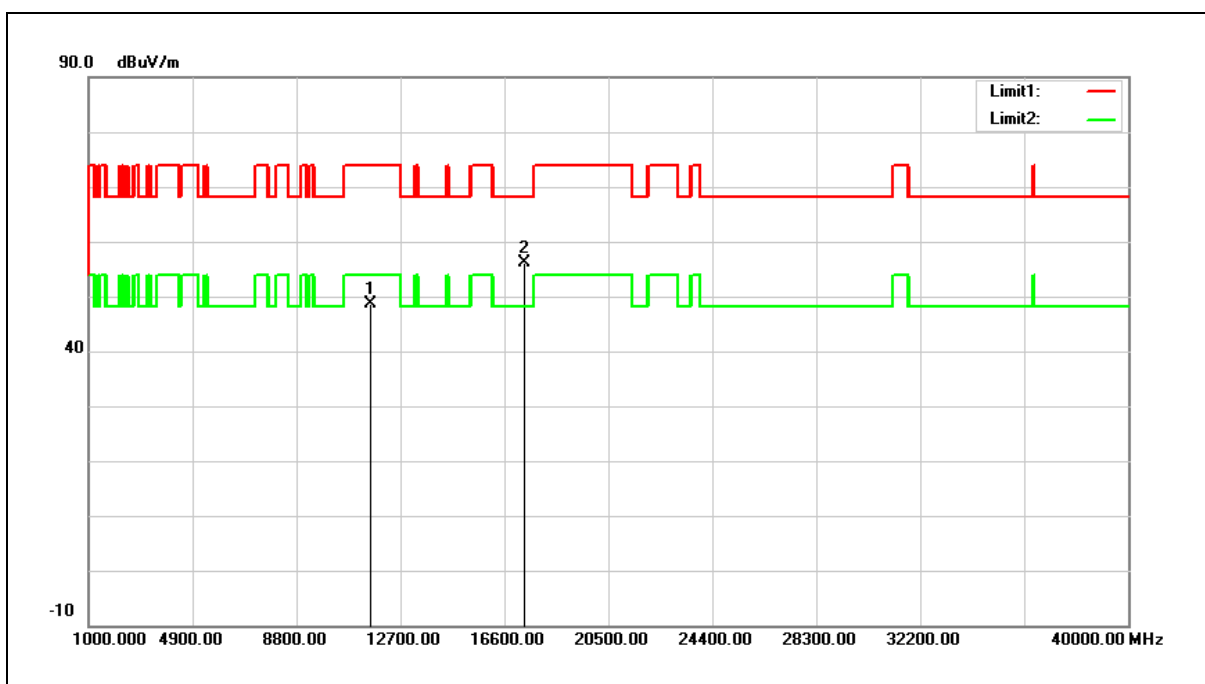

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	30.38	18.37	48.75	74.00	-25.25	peak
2	17355.000	31.35	24.68	56.03	68.20	-12.17	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

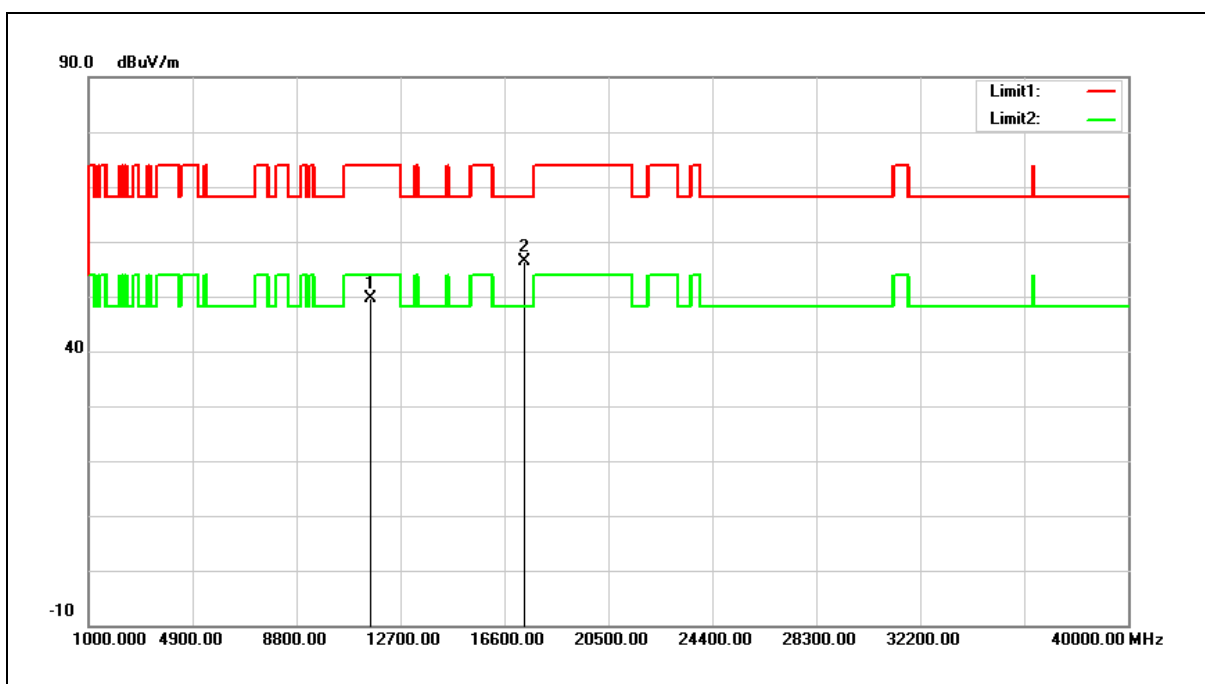

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	31.16	18.37	49.53	74.00	-24.47	peak
2	17355.000	31.67	24.68	56.35	68.20	-11.85	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

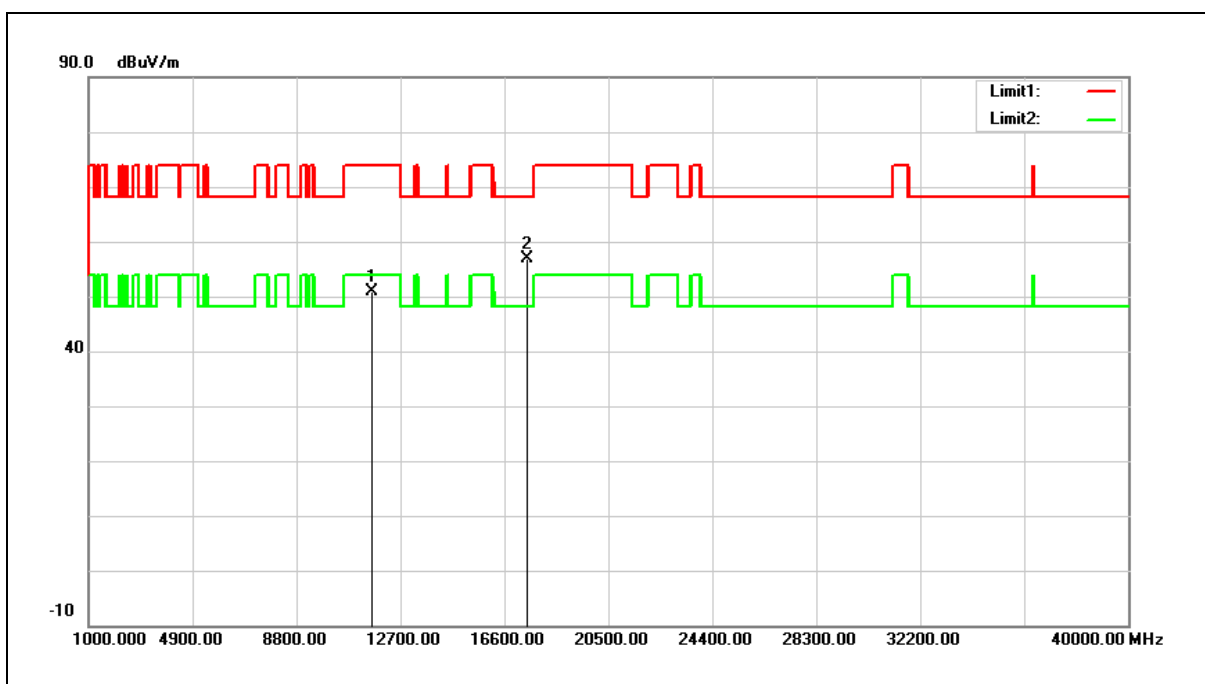

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	32.54	18.28	50.82	74.00	-23.18	peak
2	17475.000	31.70	25.18	56.88	68.20	-11.32	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

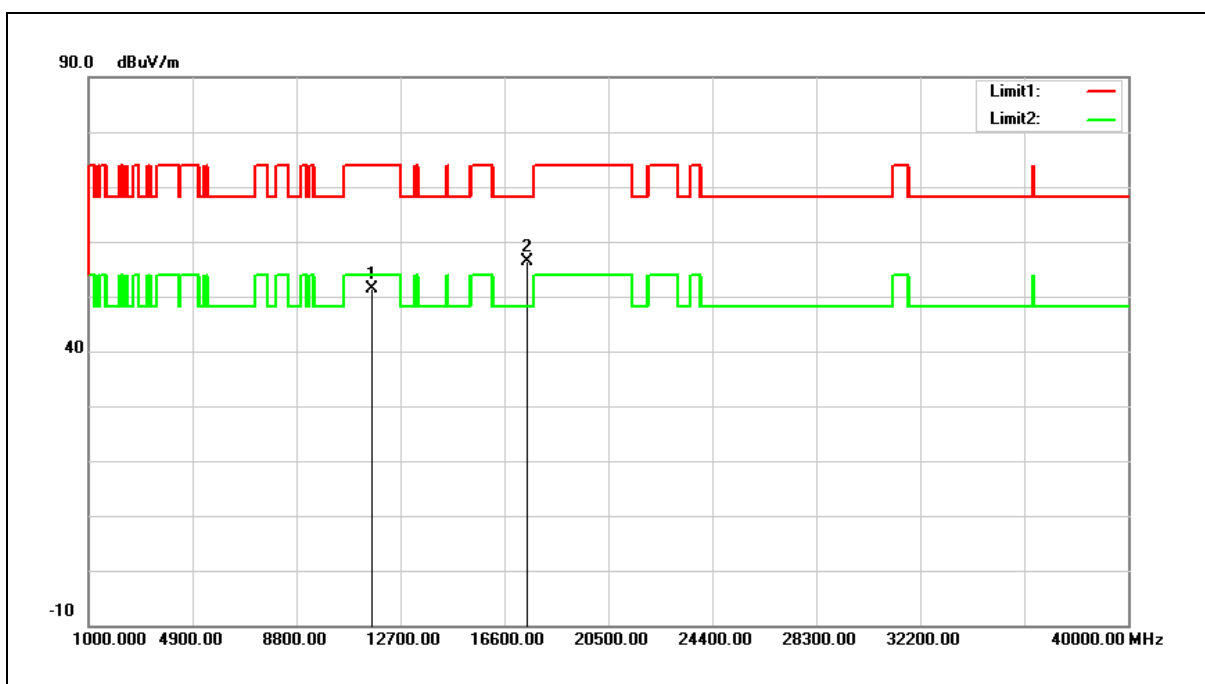

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	32.99	18.28	51.27	74.00	-22.73	peak
2	17475.000	31.22	25.18	56.40	68.20	-11.80	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

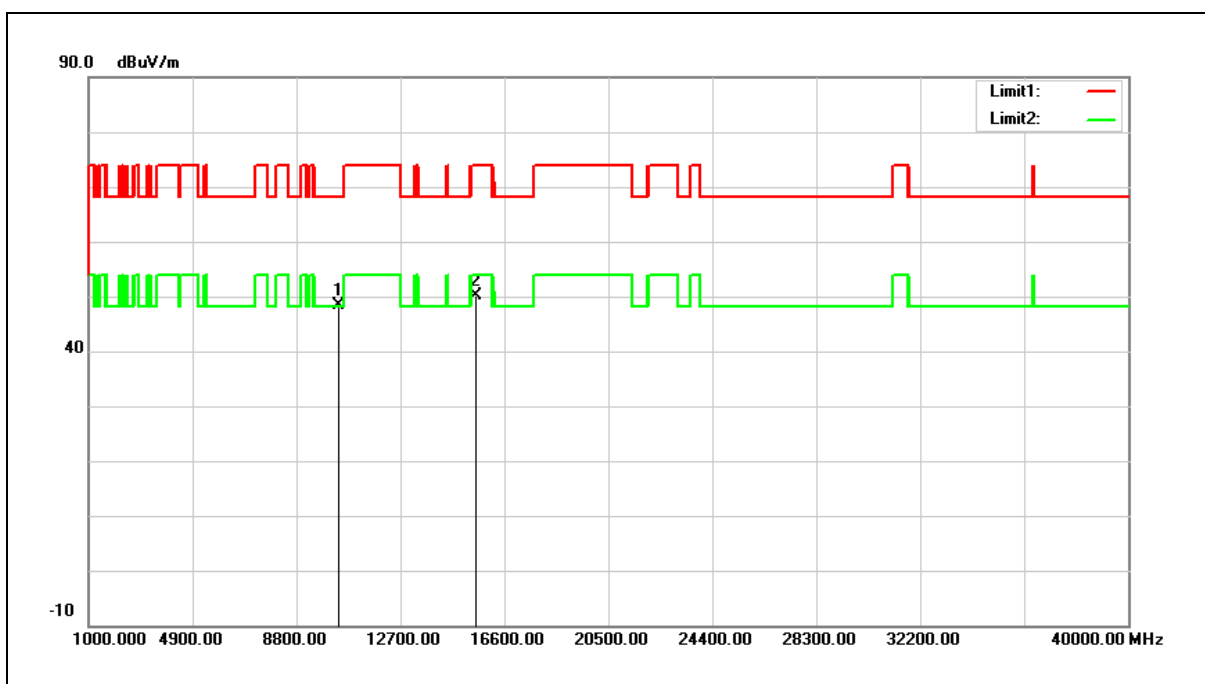

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	31.64	16.79	48.43	68.20	-19.77	peak
2	15540.000	31.17	19.03	50.20	74.00	-23.80	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

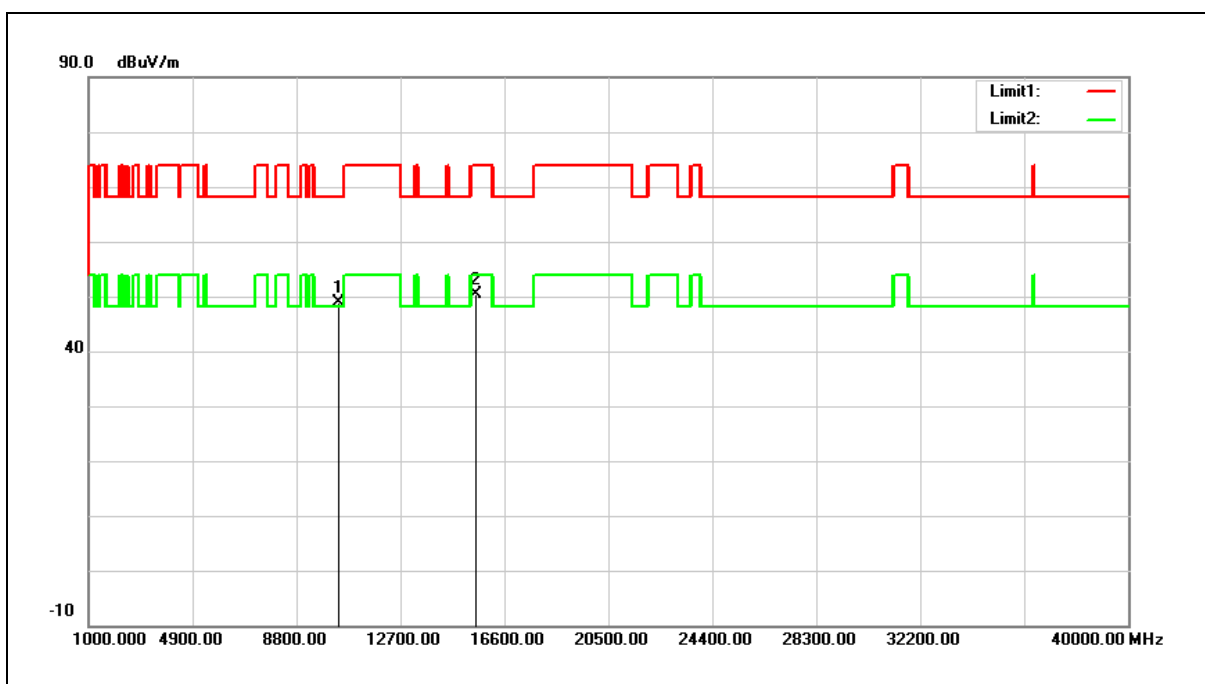

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	32.12	16.79	48.91	68.20	-19.29	peak
2	15540.000	31.42	19.03	50.45	74.00	-23.55	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

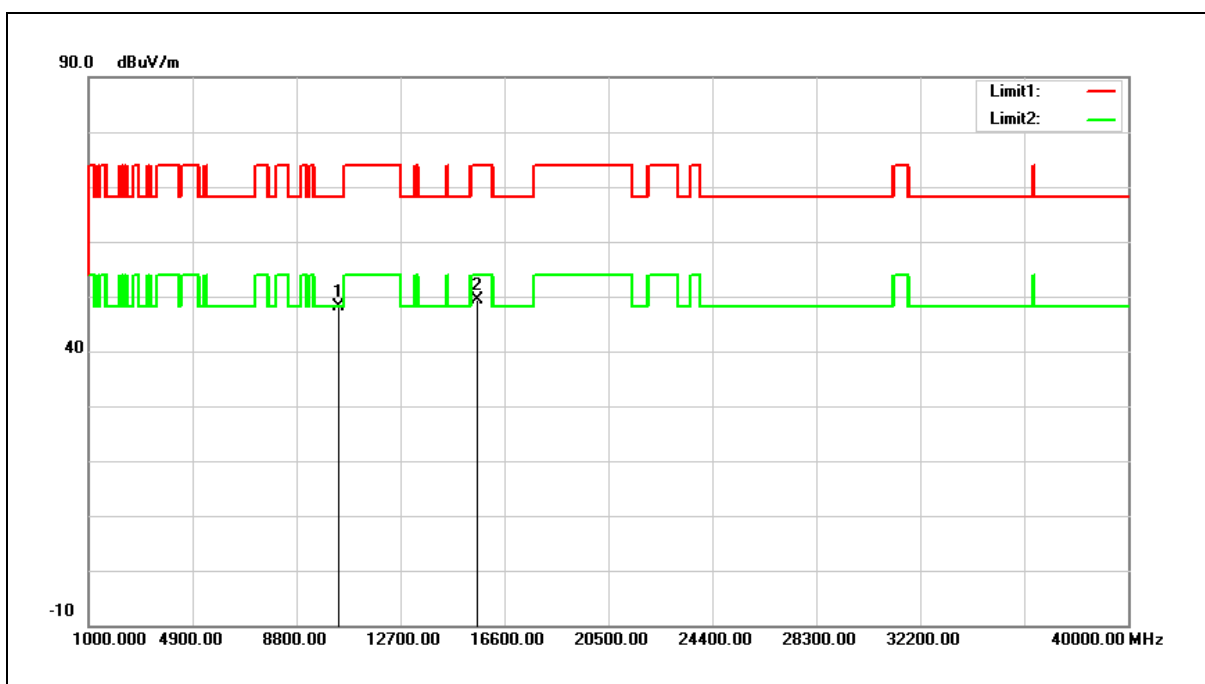

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	31.19	16.94	48.13	68.20	-20.07	peak
2	15600.000	30.48	18.87	49.35	74.00	-24.65	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

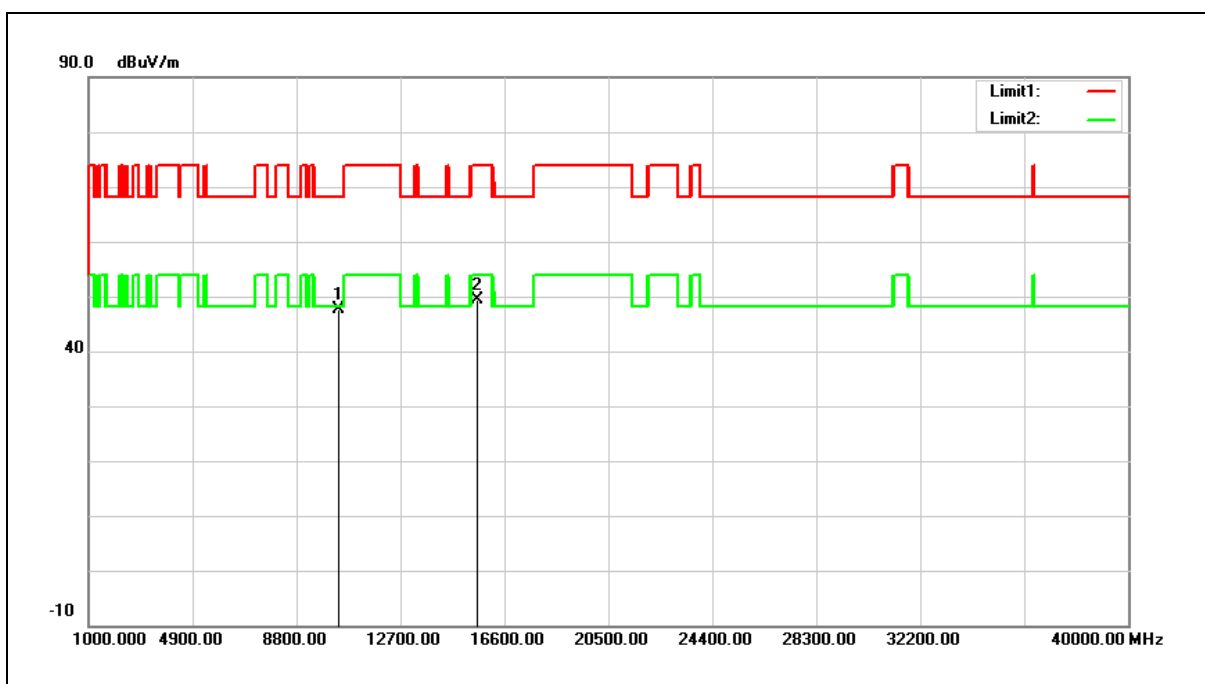

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	30.61	16.94	47.55	68.20	-20.65	peak
2	15600.000	30.40	18.87	49.27	74.00	-24.73	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

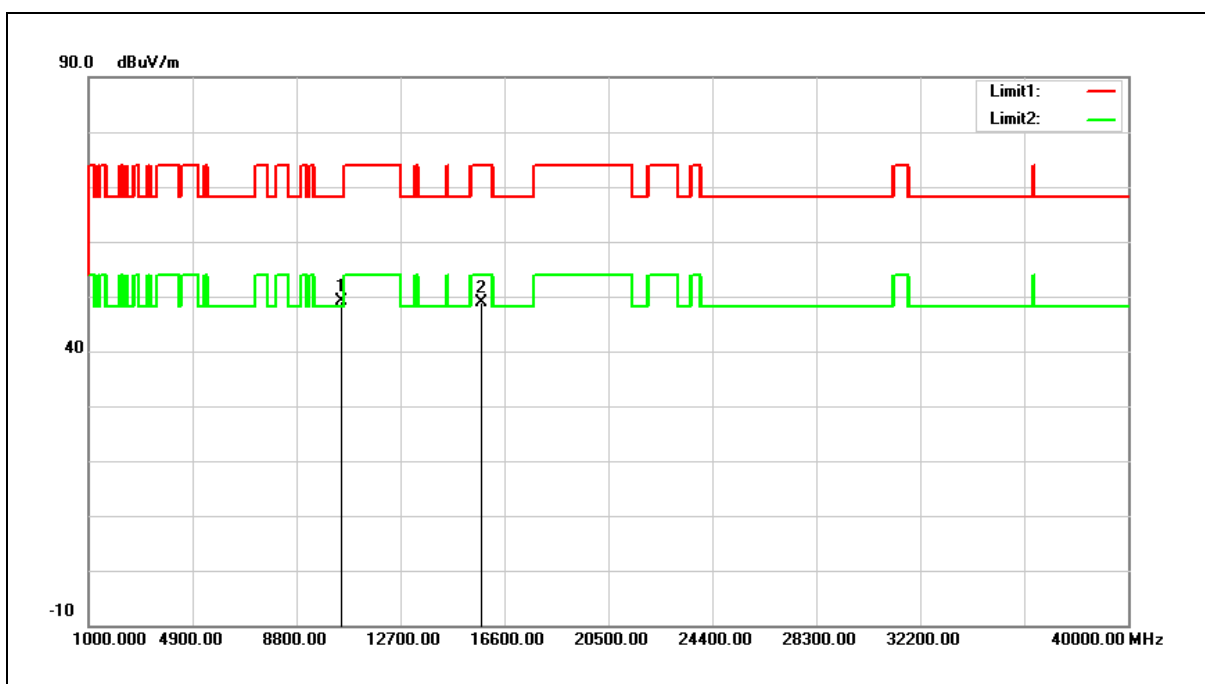

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	31.88	17.23	49.11	68.20	-19.09	peak
2	15720.000	30.31	18.57	48.88	74.00	-25.12	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

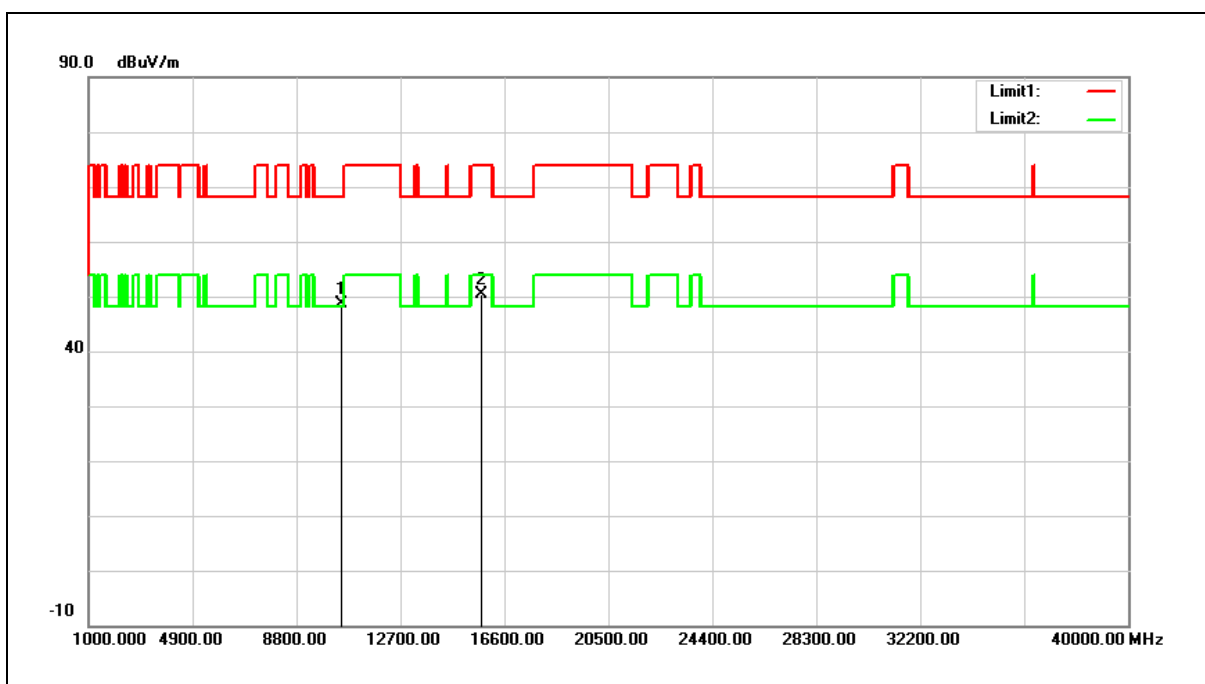

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	31.40	17.23	48.63	68.20	-19.57	peak
2	15720.000	31.77	18.57	50.34	74.00	-23.66	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

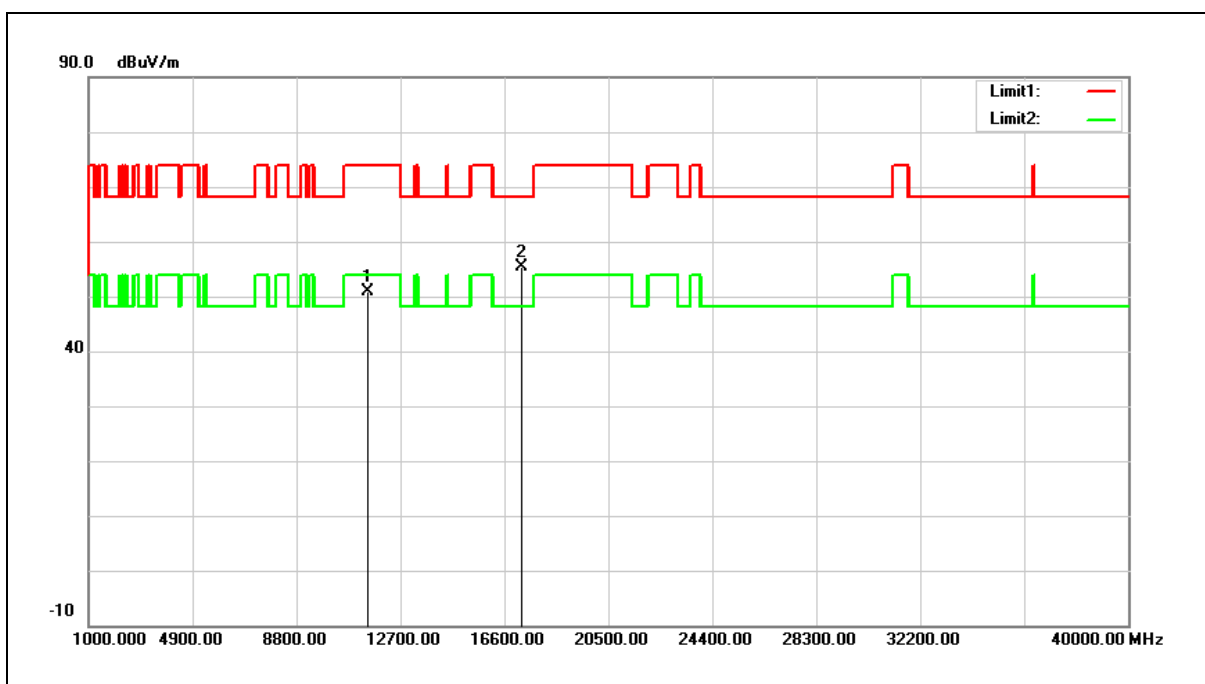

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	32.49	18.46	50.95	74.00	-23.05	peak
2	17235.000	31.21	24.18	55.39	68.20	-12.81	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

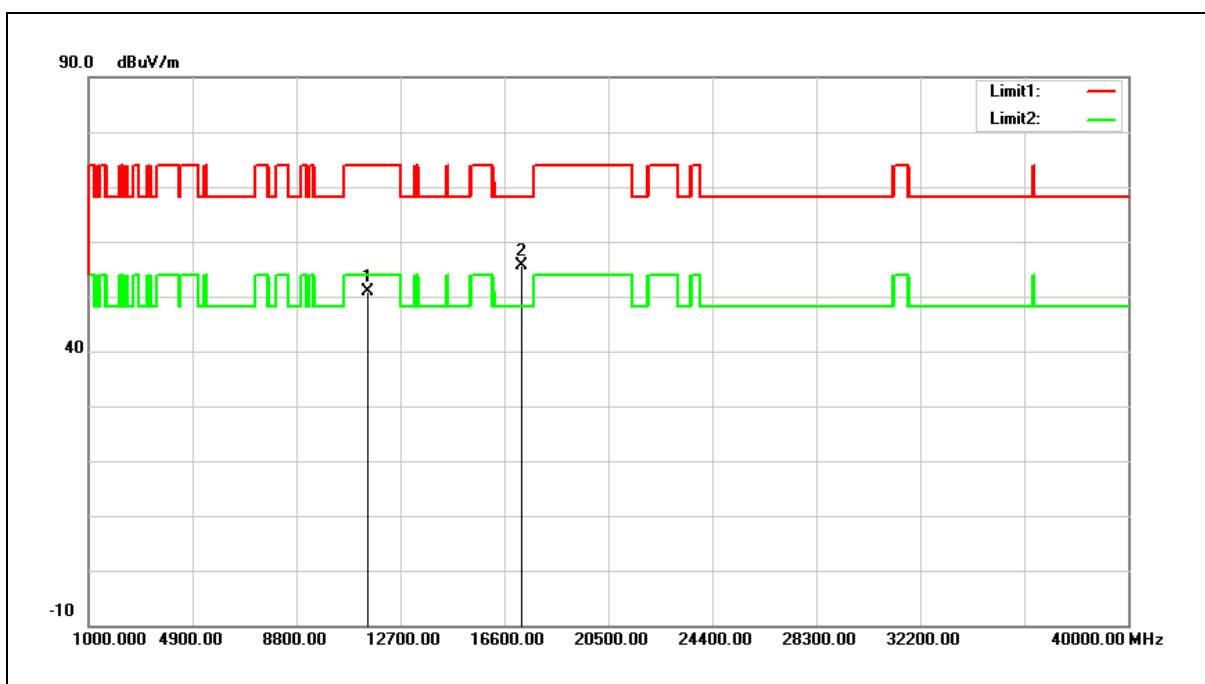

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	32.53	18.46	50.99	74.00	-23.01	peak
2	17235.000	31.49	24.18	55.67	68.20	-12.53	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

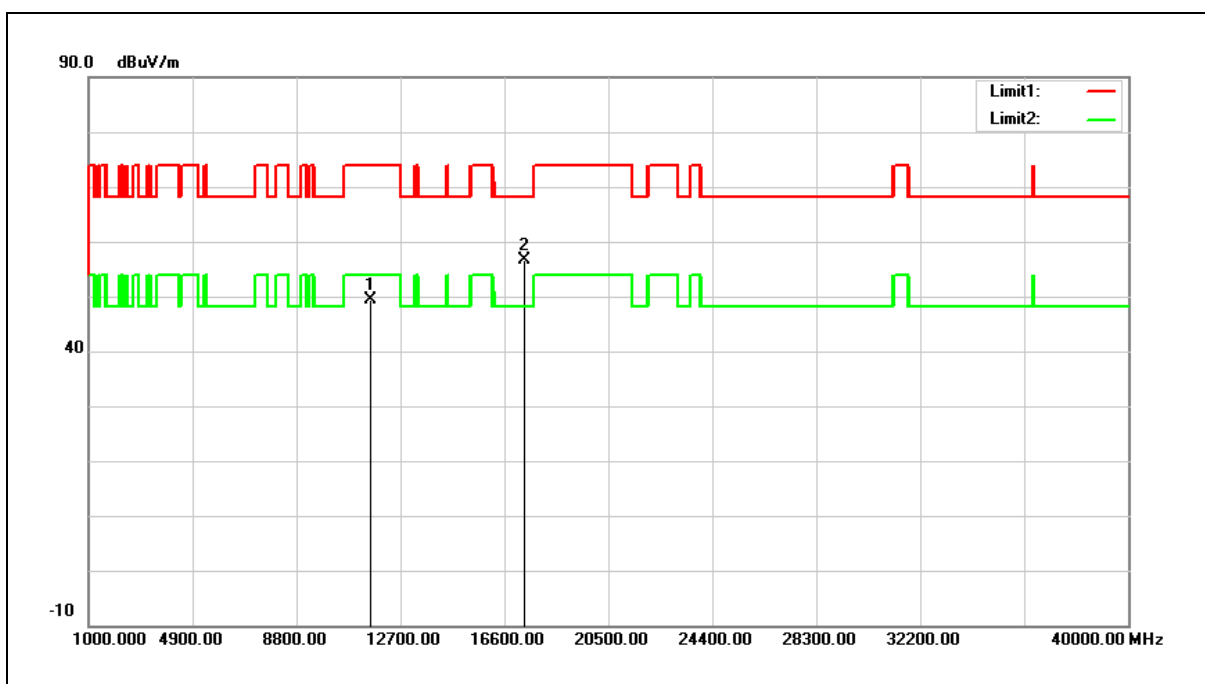


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	30.89	18.37	49.26	74.00	-24.74	peak
2	17355.000	31.84	24.68	56.52	68.20	-11.68	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

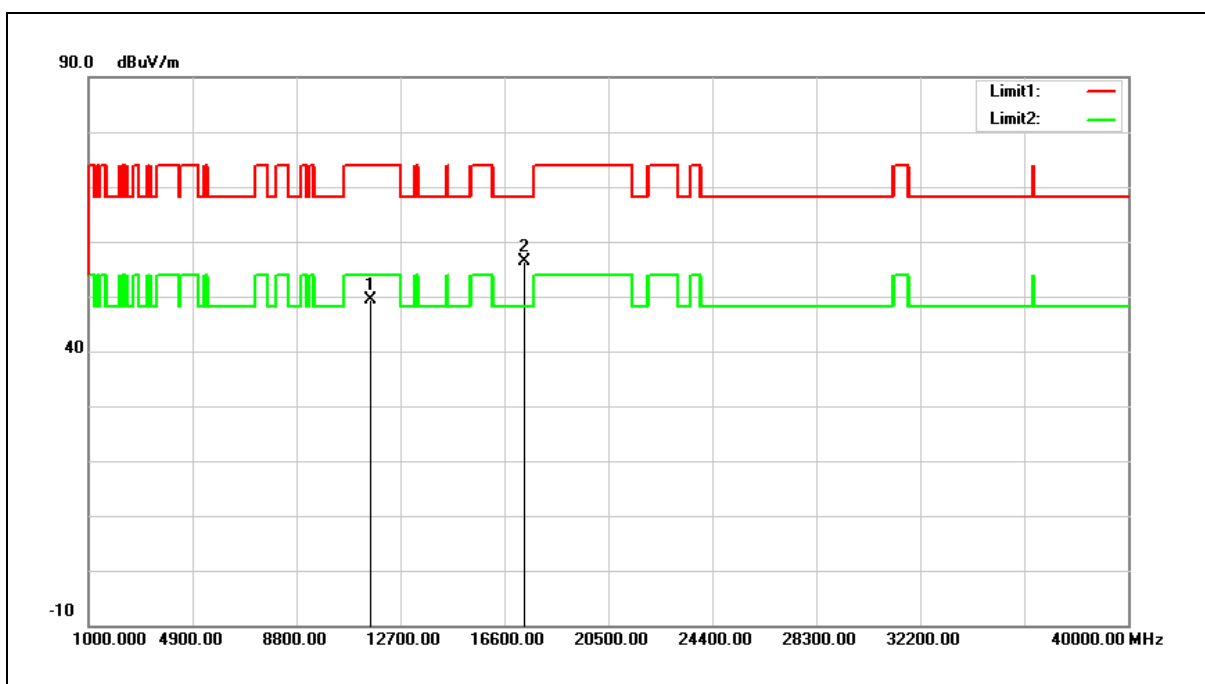

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	30.91	18.37	49.28	74.00	-24.72	peak
2	17355.000	31.77	24.68	56.45	68.20	-11.75	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

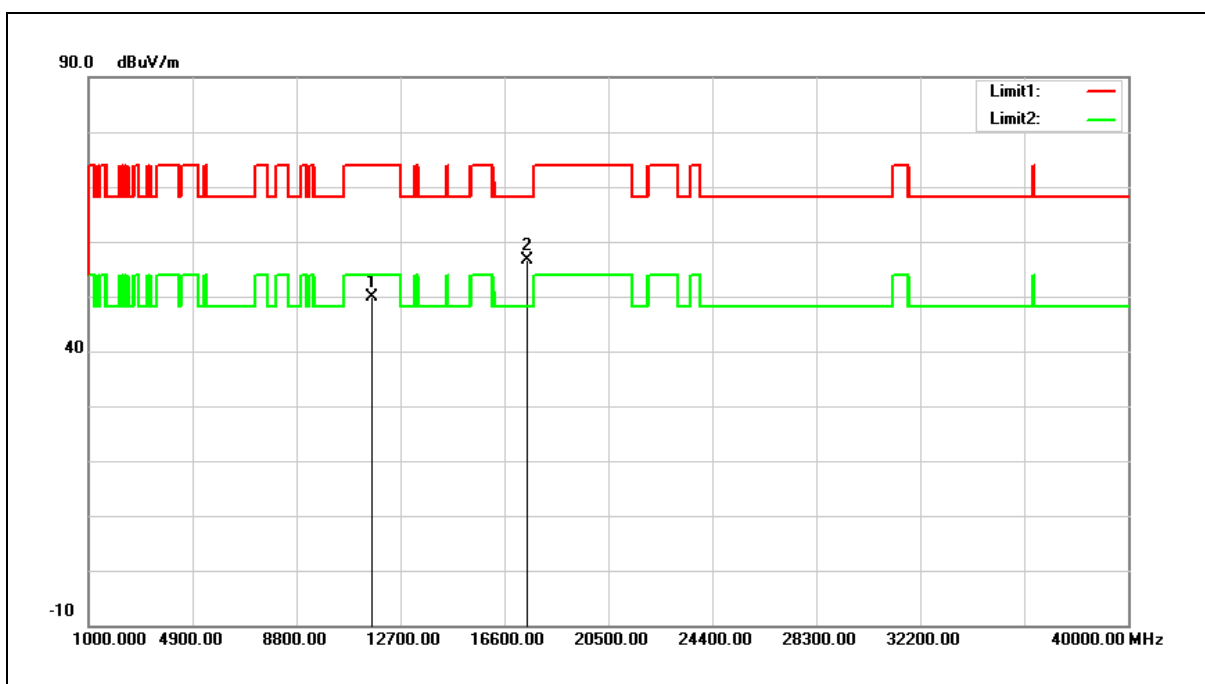

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	31.52	18.28	49.80	74.00	-24.20	peak
2	17475.000	31.44	25.18	56.62	68.20	-11.58	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

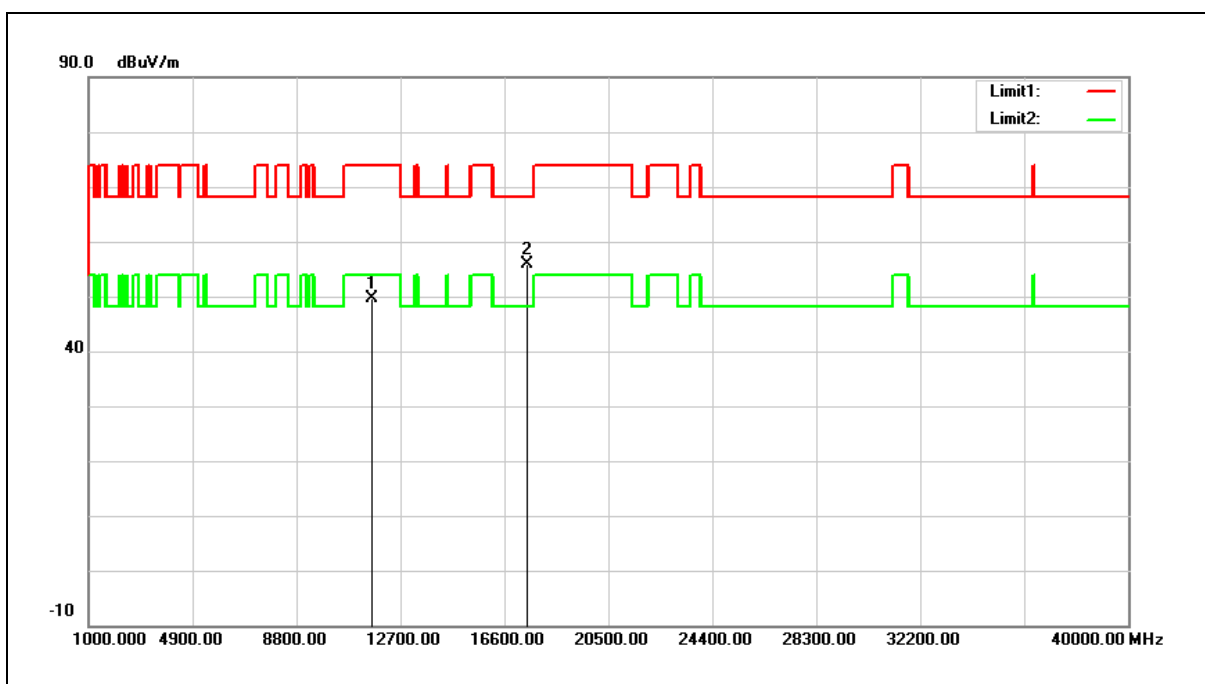

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	31.25	18.28	49.53	74.00	-24.47	peak
2	17475.000	30.64	25.18	55.82	68.20	-12.38	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

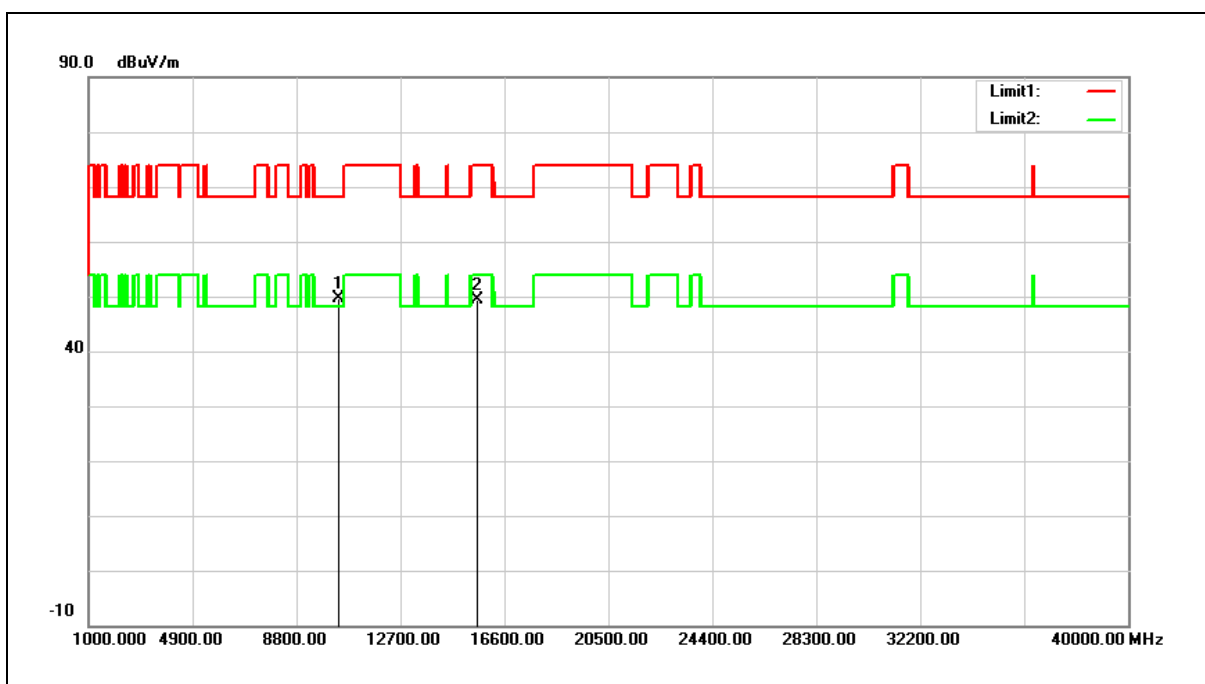

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	32.84	16.86	49.70	68.20	-18.50	peak
2	15570.000	30.48	18.95	49.43	74.00	-24.57	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

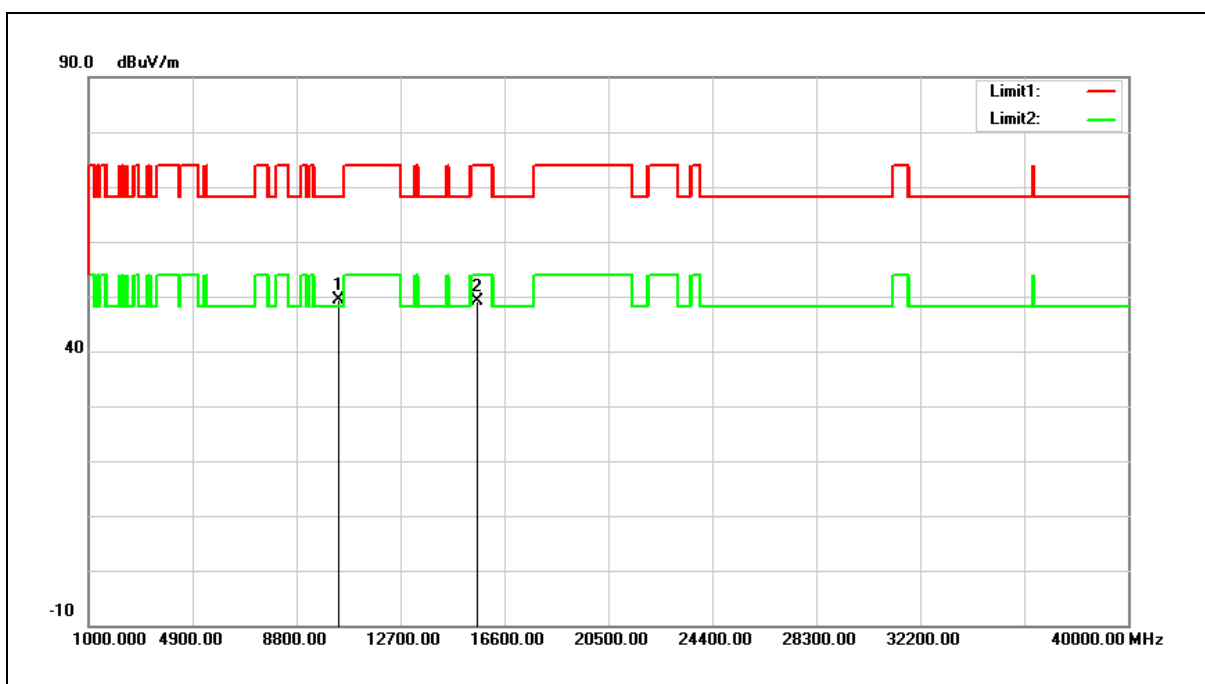

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	32.46	16.86	49.32	68.20	-18.88	peak
2	15570.000	30.18	18.95	49.13	74.00	-24.87	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

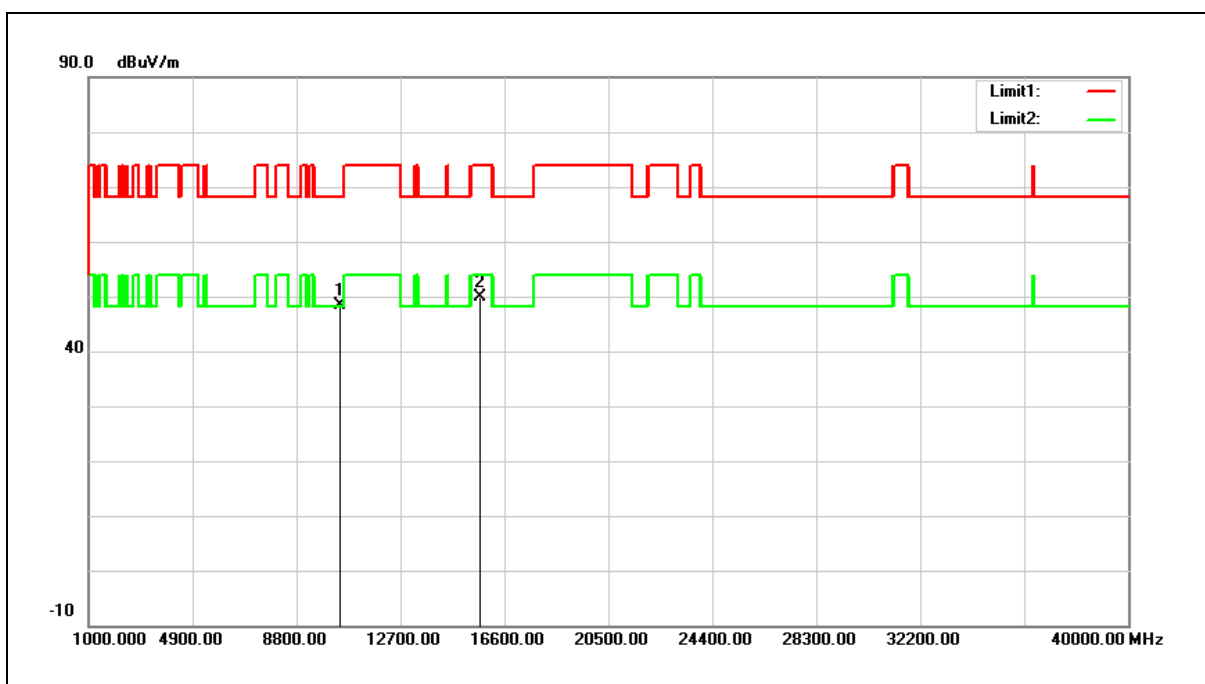

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	31.20	17.15	48.35	68.20	-19.85	peak
2	15690.000	31.13	18.64	49.77	74.00	-24.23	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

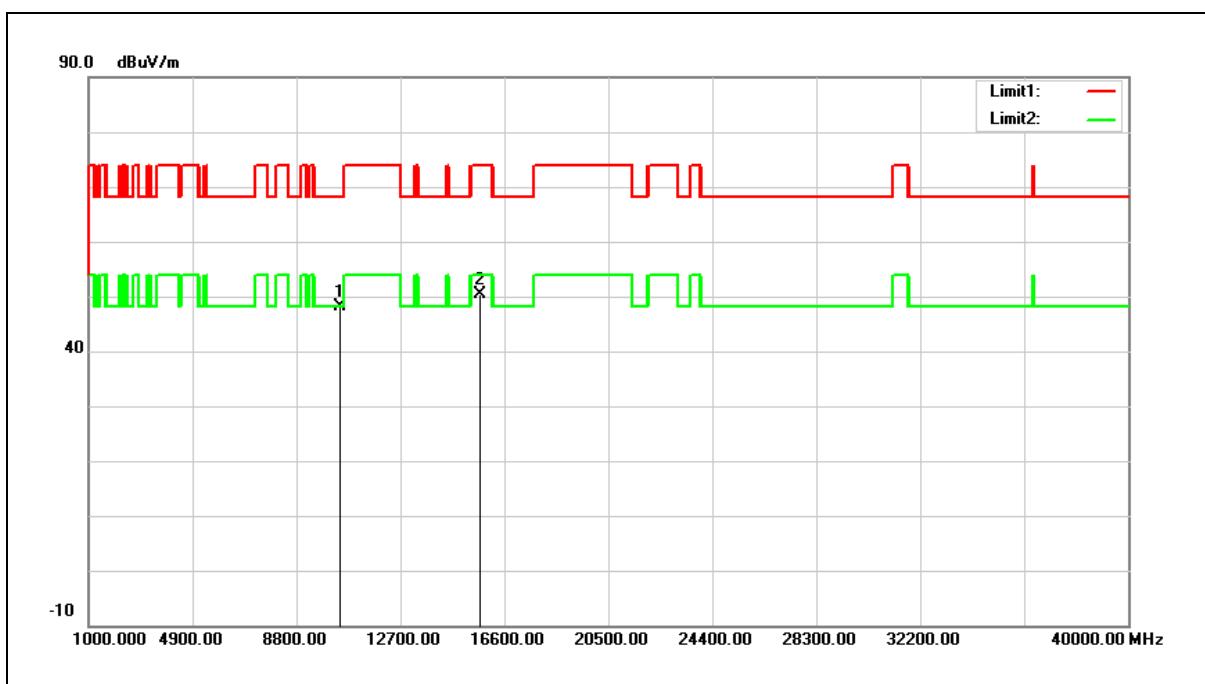

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	31.08	17.15	48.23	68.20	-19.97	peak
2	15690.000	31.74	18.64	50.38	74.00	-23.62	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

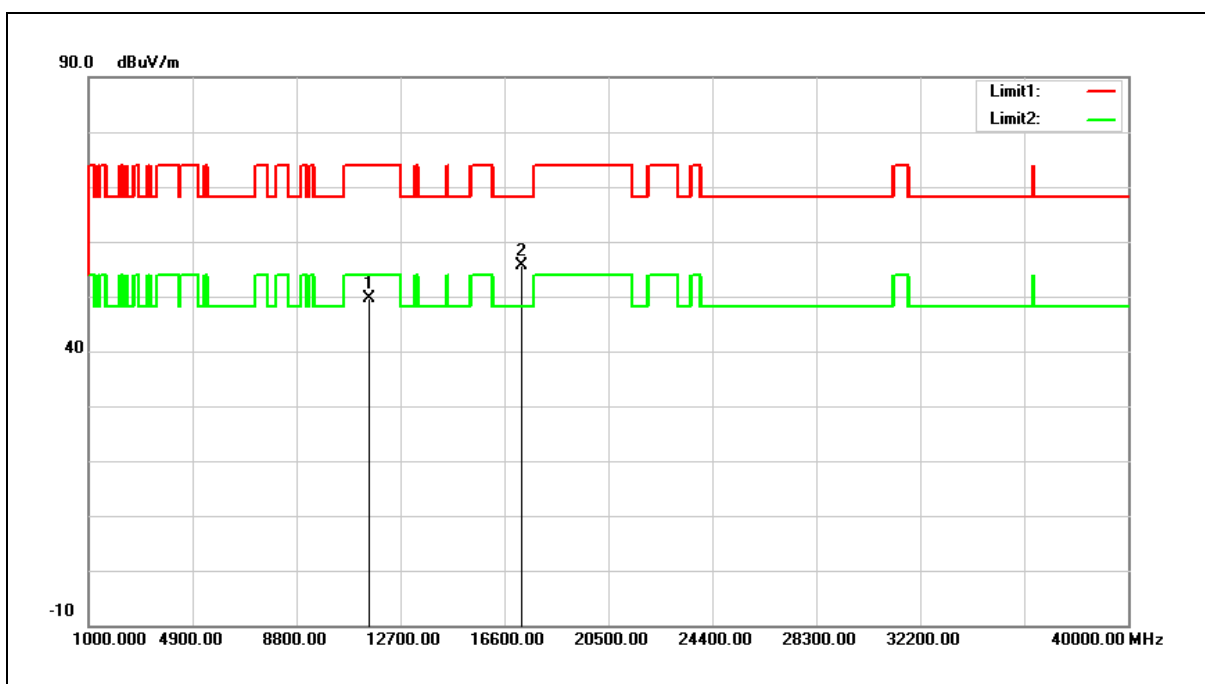


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	31.24	18.45	49.69	74.00	-24.31	peak
2	17265.000	31.28	24.31	55.59	68.20	-12.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

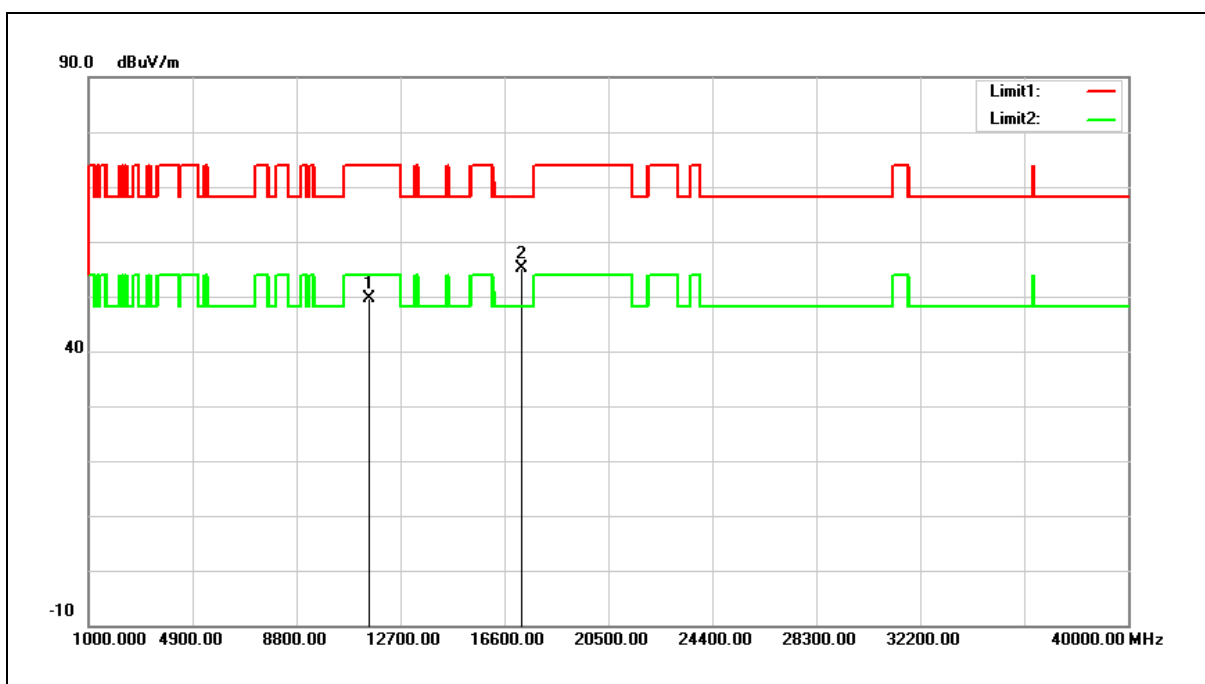

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	31.07	18.45	49.52	74.00	-24.48	peak
2	17265.000	30.79	24.31	55.10	68.20	-13.10	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

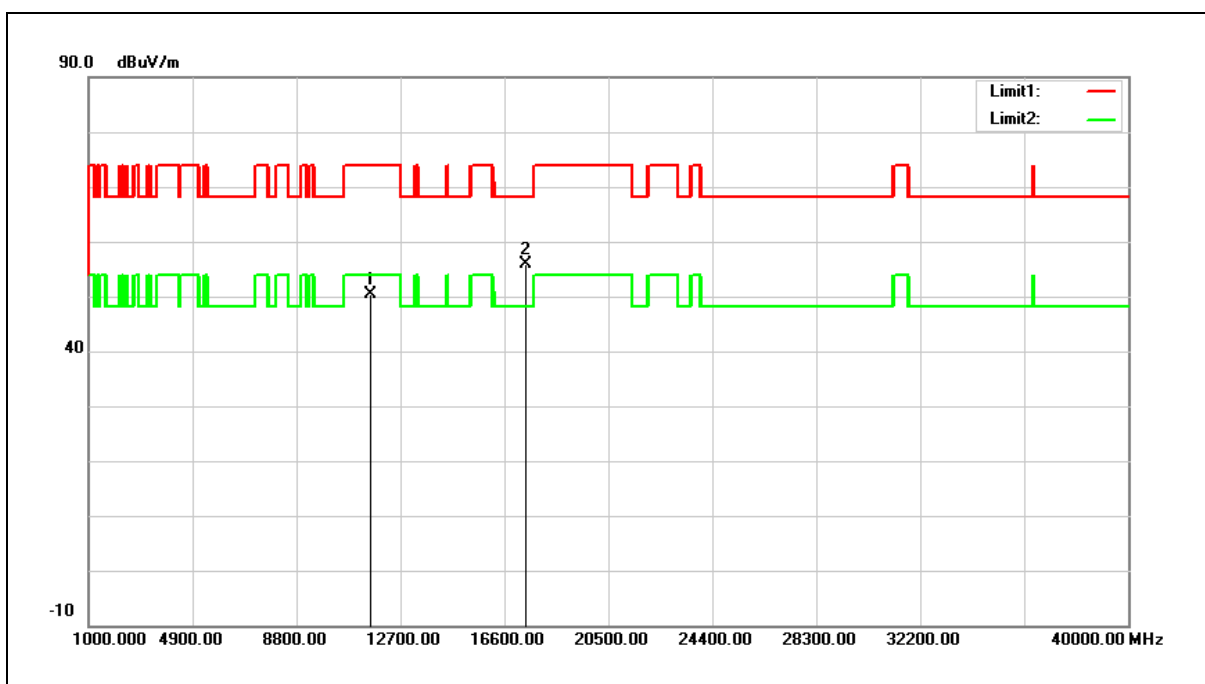

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	32.00	18.36	50.36	74.00	-23.64	peak
2	17385.000	31.14	24.80	55.94	68.20	-12.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

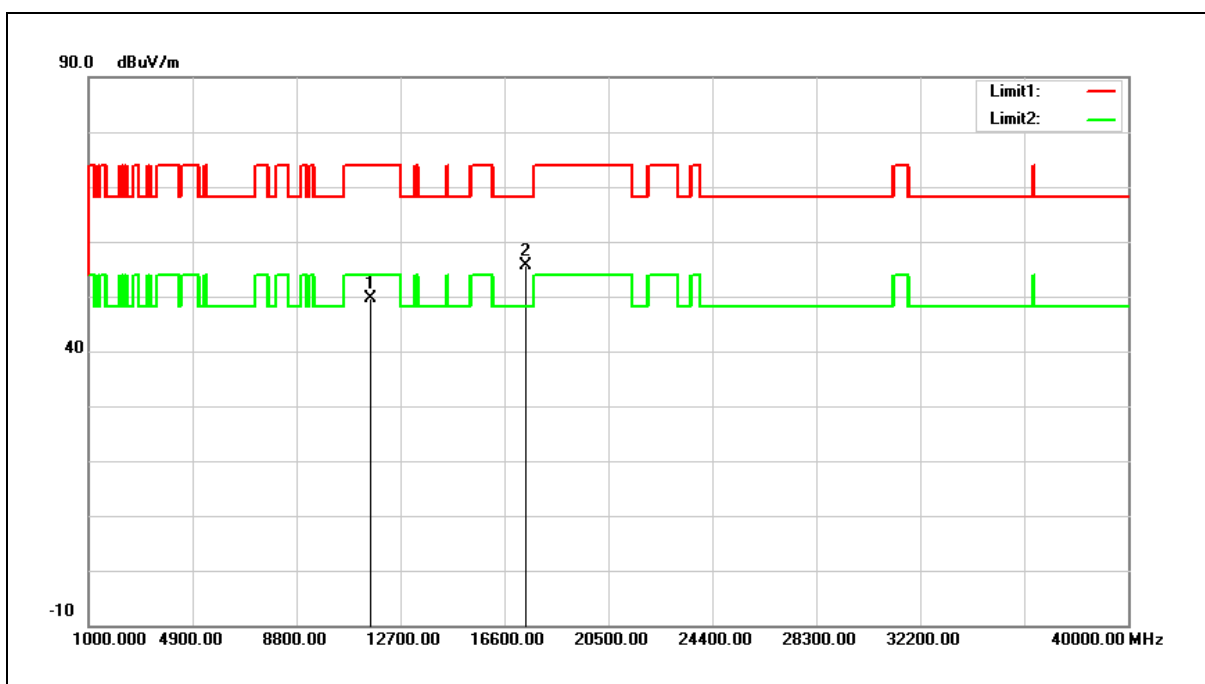

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	31.27	18.36	49.63	74.00	-24.37	peak
2	17385.000	30.95	24.80	55.75	68.20	-12.45	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

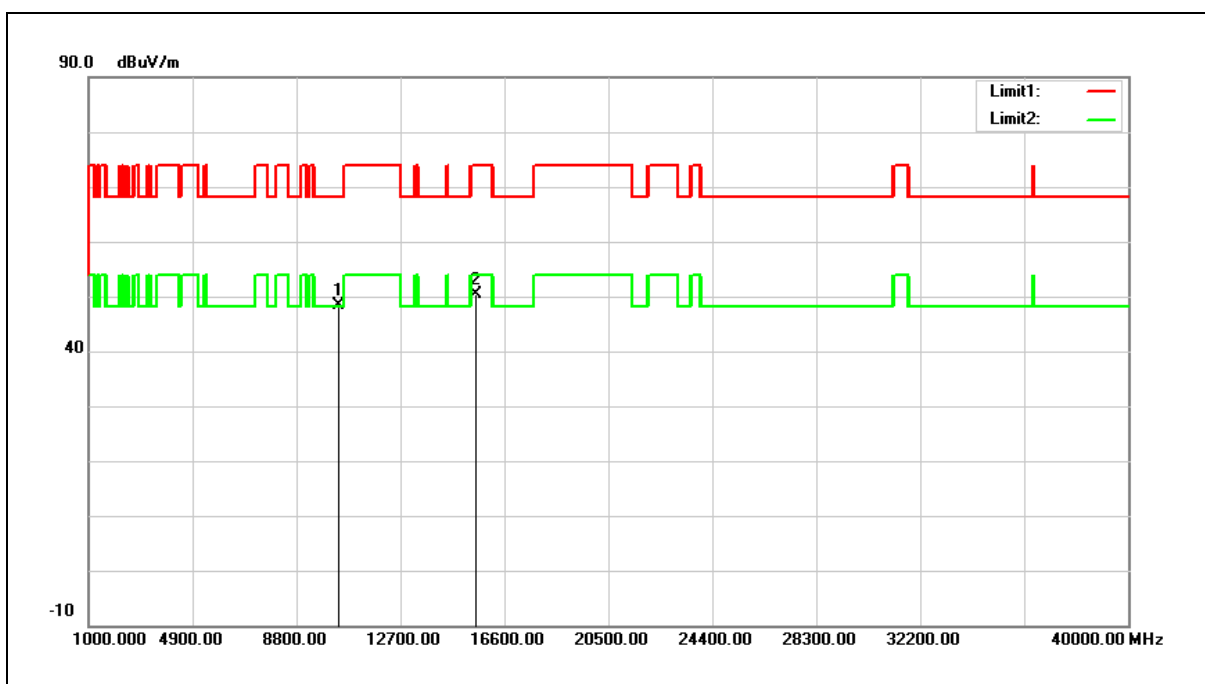

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	31.54	16.79	48.33	68.20	-19.87	peak
2	15540.000	31.42	19.03	50.45	74.00	-23.55	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

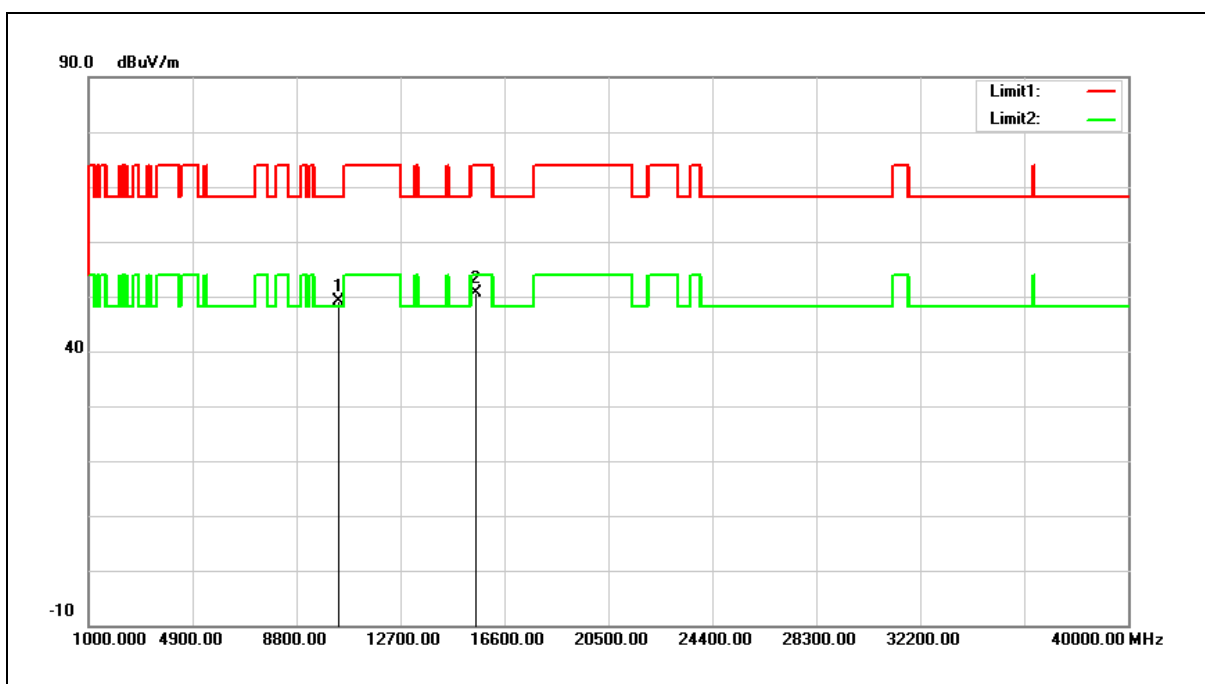

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	32.37	16.79	49.16	68.20	-19.04	peak
2	15540.000	31.52	19.03	50.55	74.00	-23.45	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

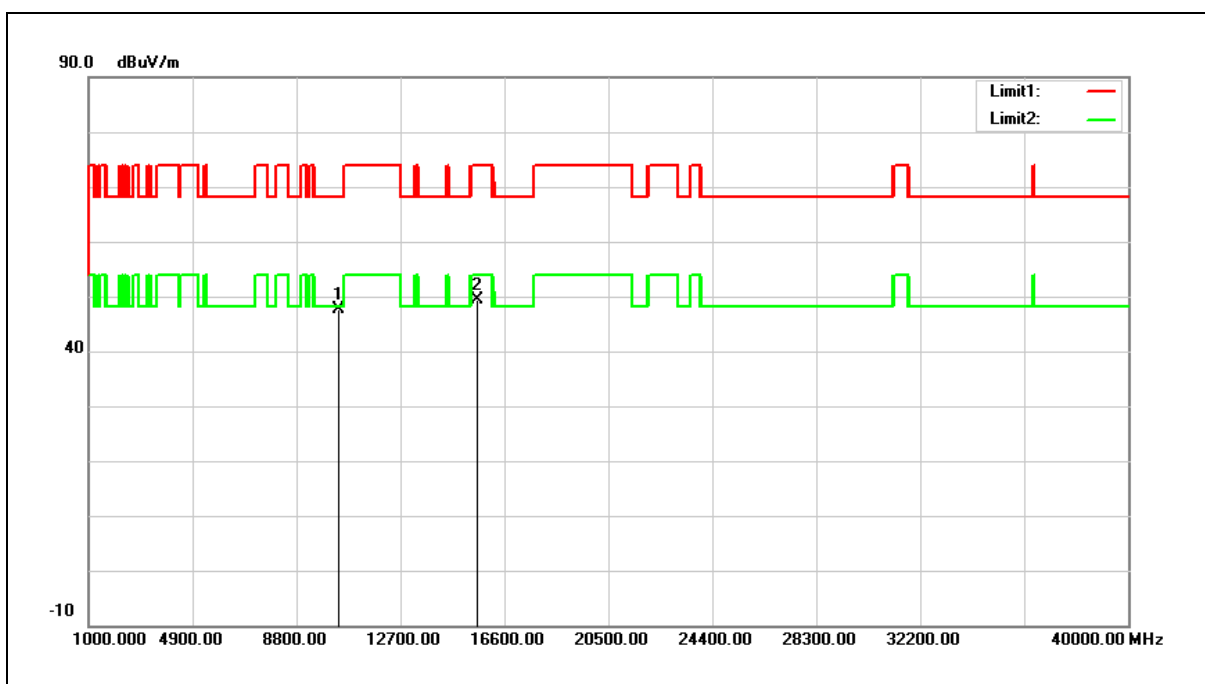


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	30.67	16.94	47.61	68.20	-20.59	peak
2	15600.000	30.54	18.87	49.41	74.00	-24.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

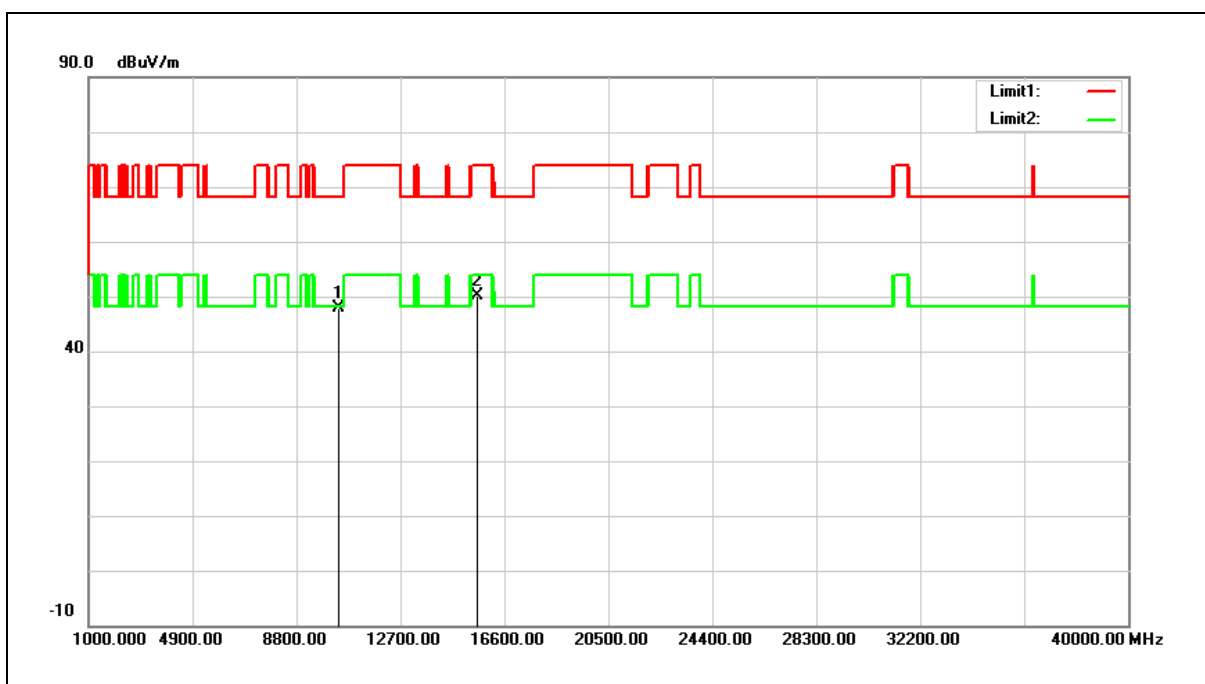

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	31.06	16.94	48.00	68.20	-20.20	peak
2	15600.000	31.26	18.87	50.13	74.00	-23.87	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

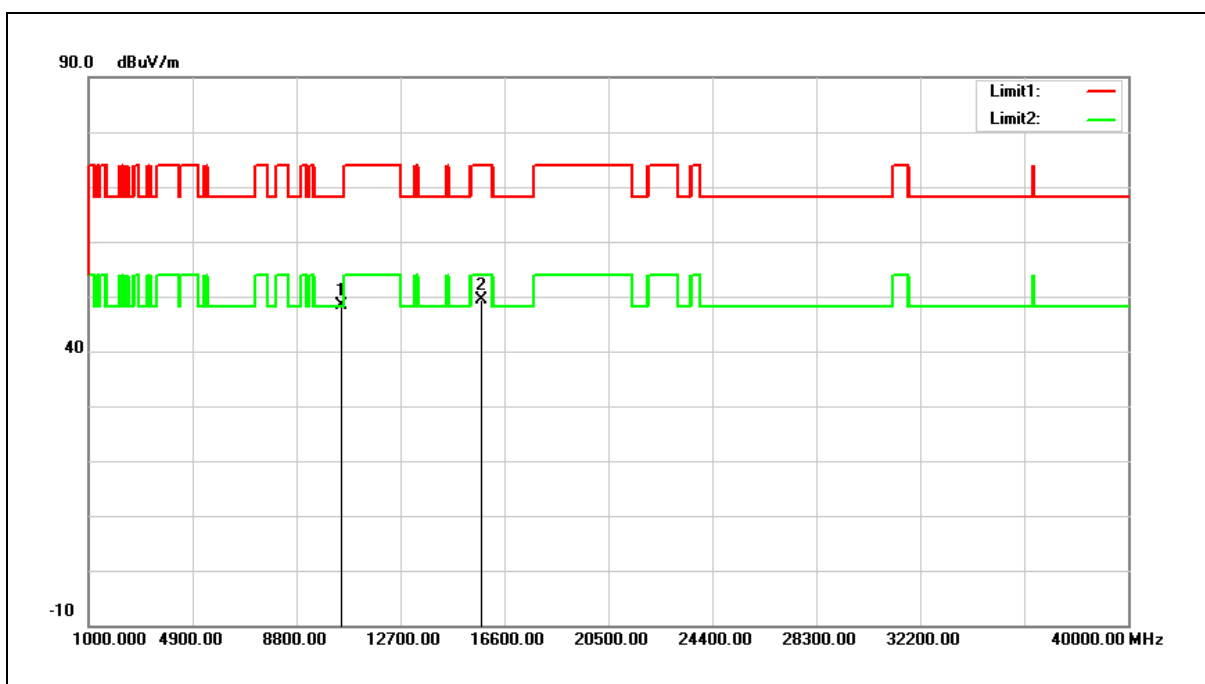

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	31.05	17.23	48.28	68.20	-19.92	peak
2	15720.000	30.81	18.57	49.38	74.00	-24.62	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

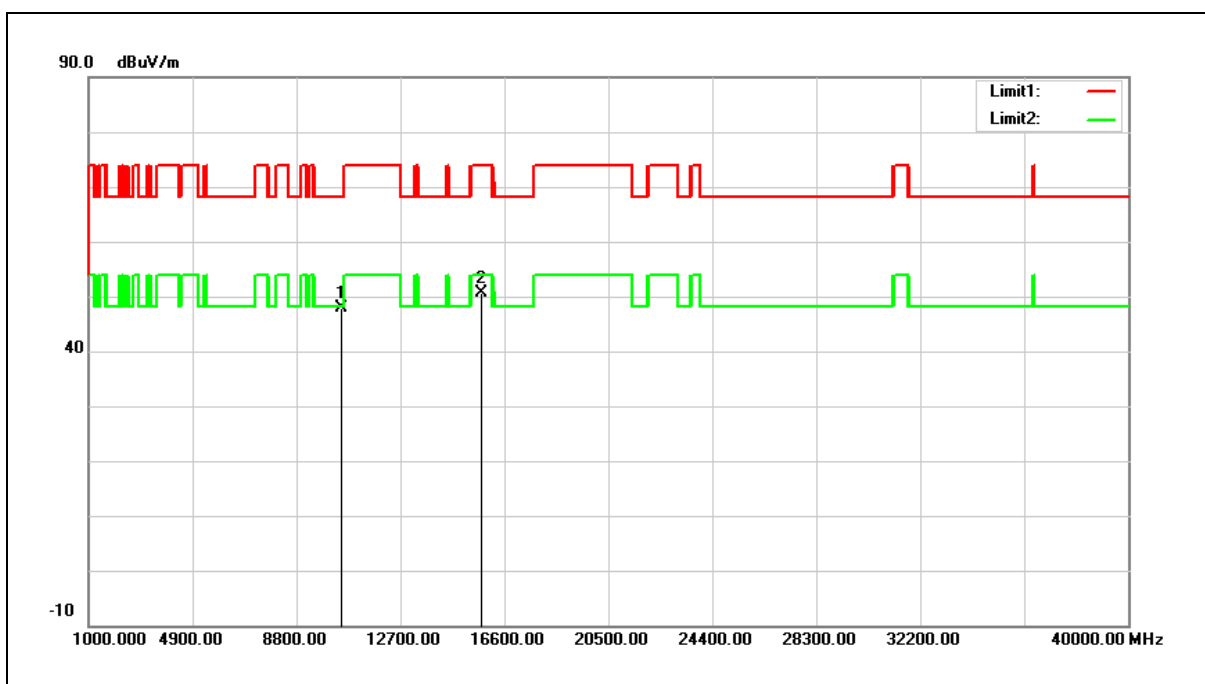

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	30.61	17.23	47.84	68.20	-20.36	peak
2	15720.000	32.13	18.57	50.70	74.00	-23.30	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

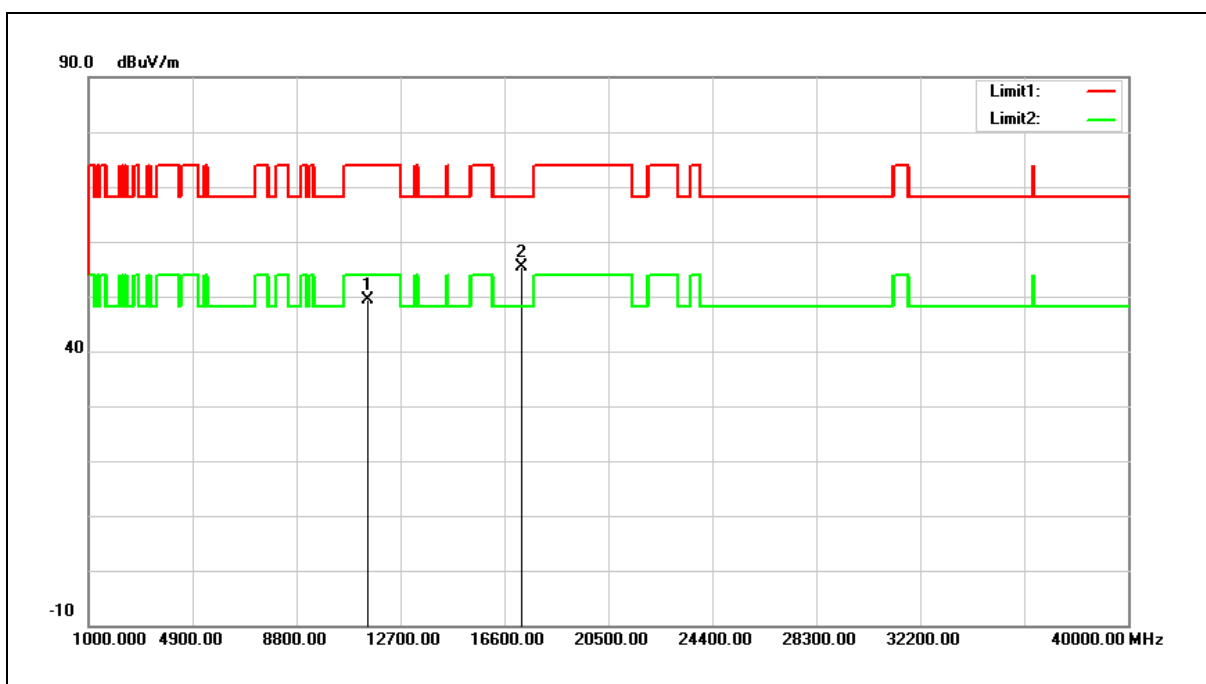

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	30.99	18.46	49.45	74.00	-24.55	peak
2	17235.000	31.19	24.18	55.37	68.20	-12.83	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

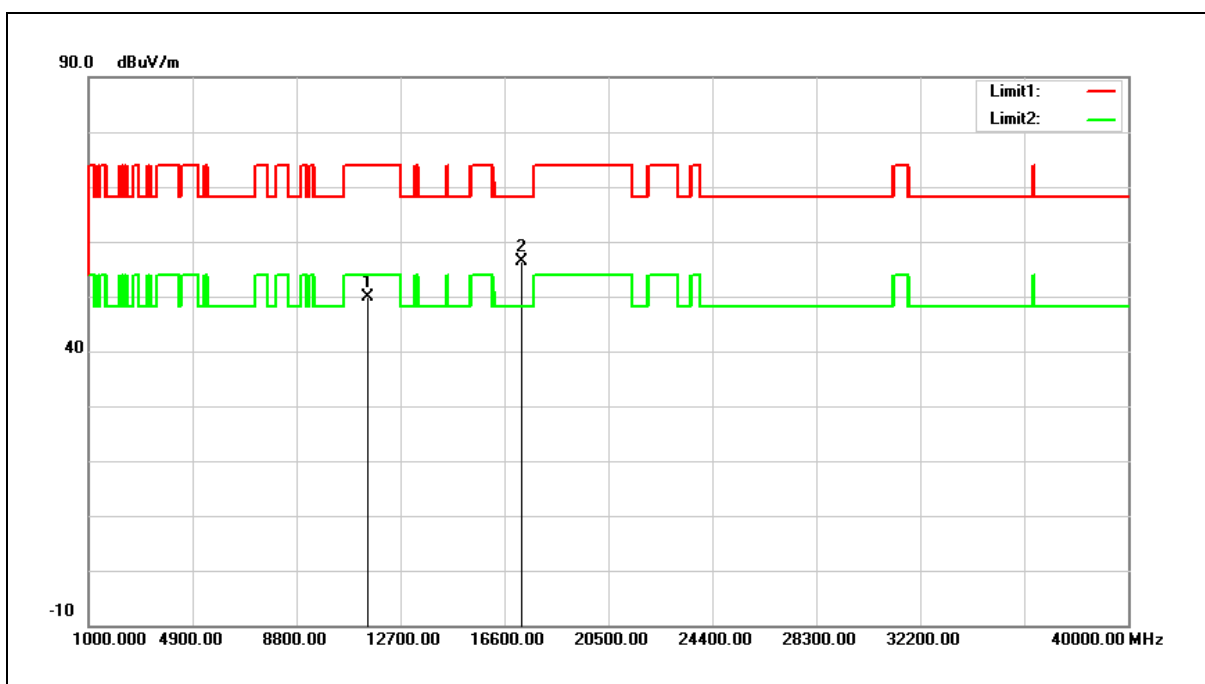


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	31.42	18.46	49.88	74.00	-24.12	peak
2	17235.000	32.28	24.18	56.46	68.20	-11.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

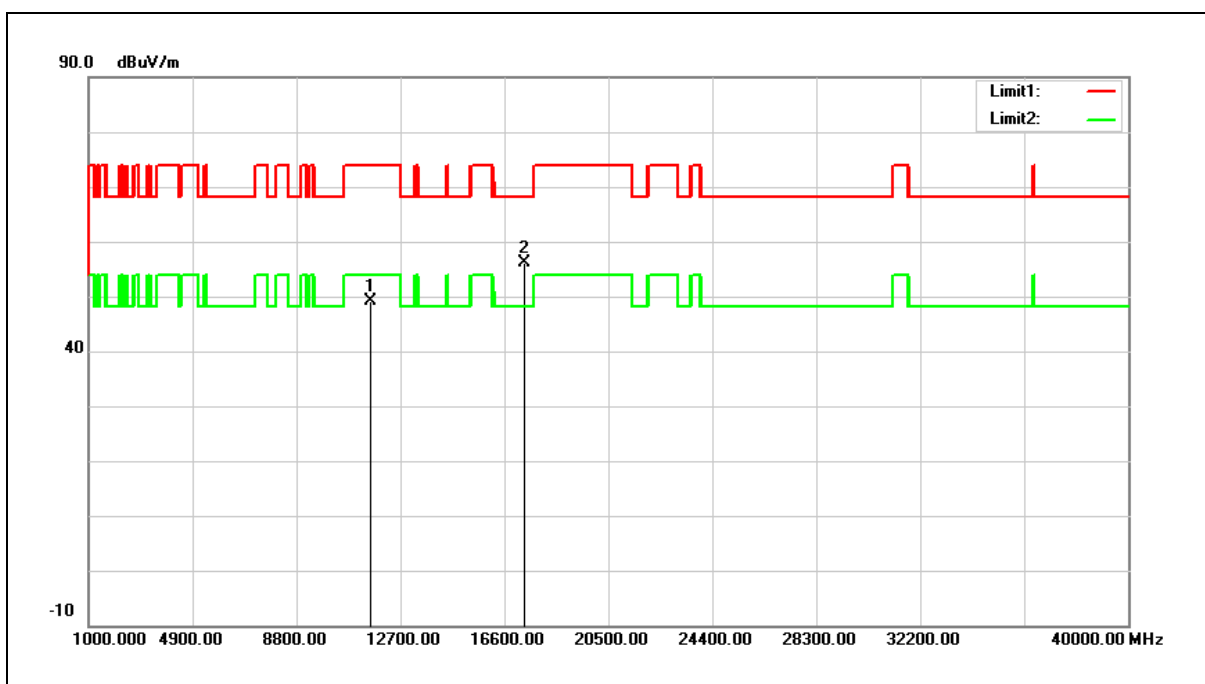

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	30.75	18.37	49.12	74.00	-24.88	peak
2	17355.000	31.55	24.68	56.23	68.20	-11.97	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

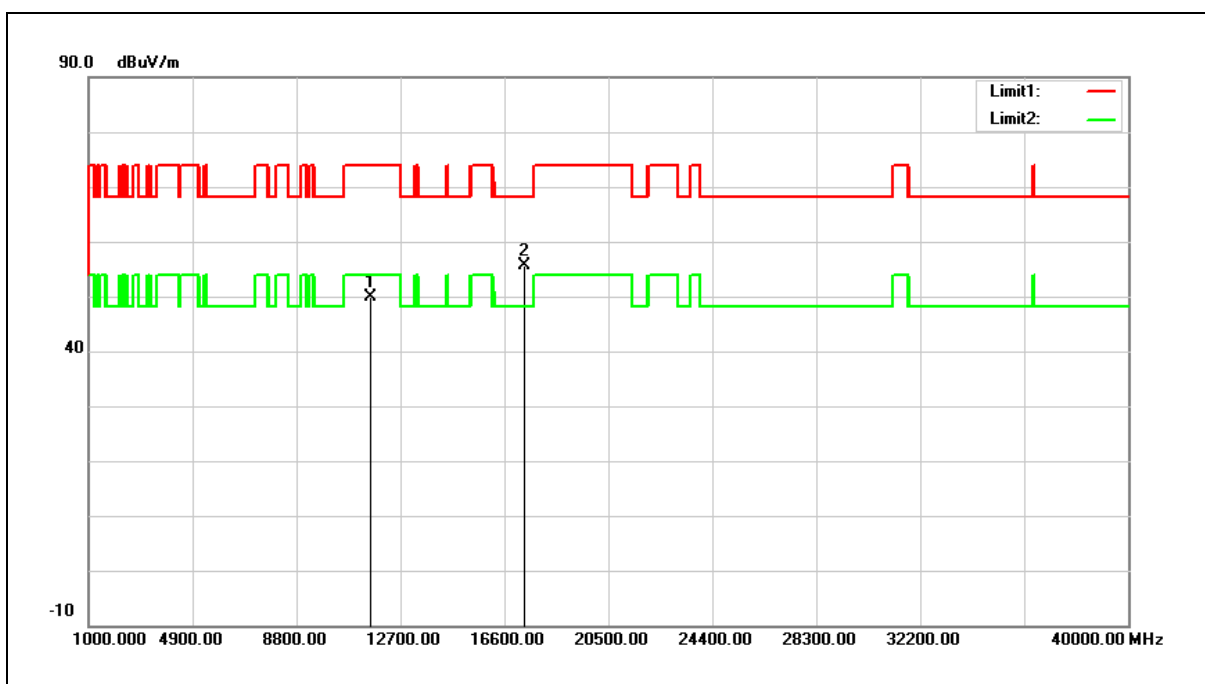

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	31.39	18.37	49.76	74.00	-24.24	peak
2	17355.000	30.84	24.68	55.52	68.20	-12.68	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

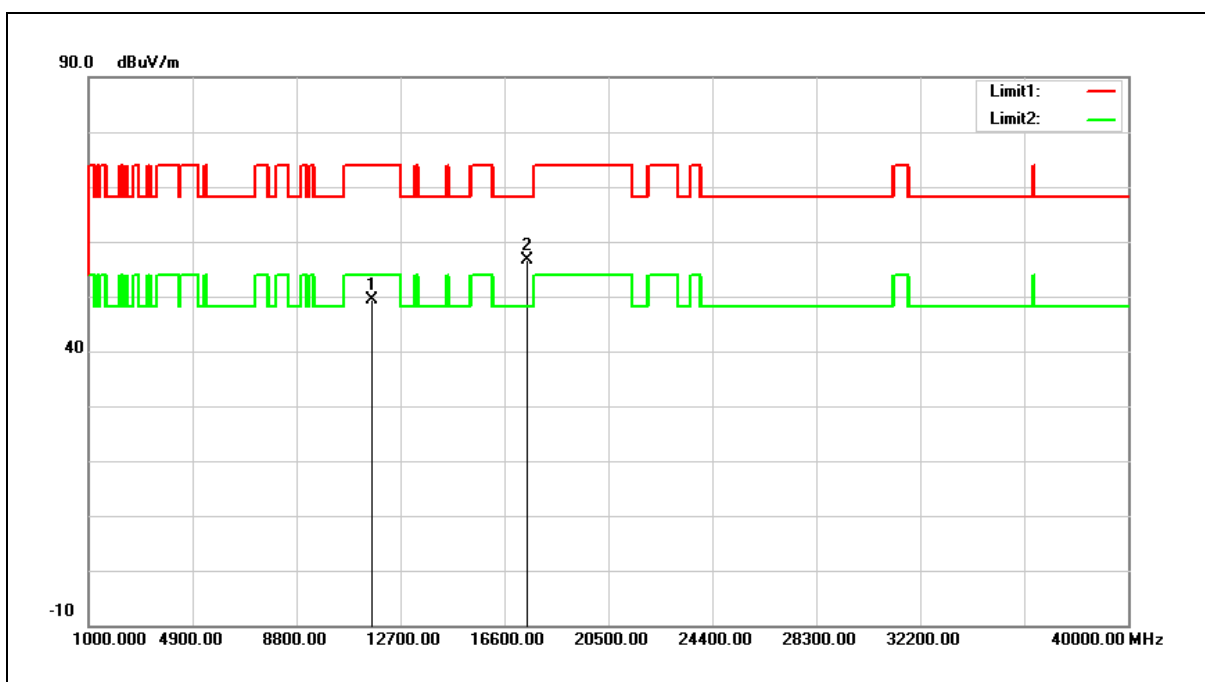

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	31.08	18.28	49.36	74.00	-24.64	peak
2	17475.000	31.50	25.18	56.68	68.20	-11.52	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

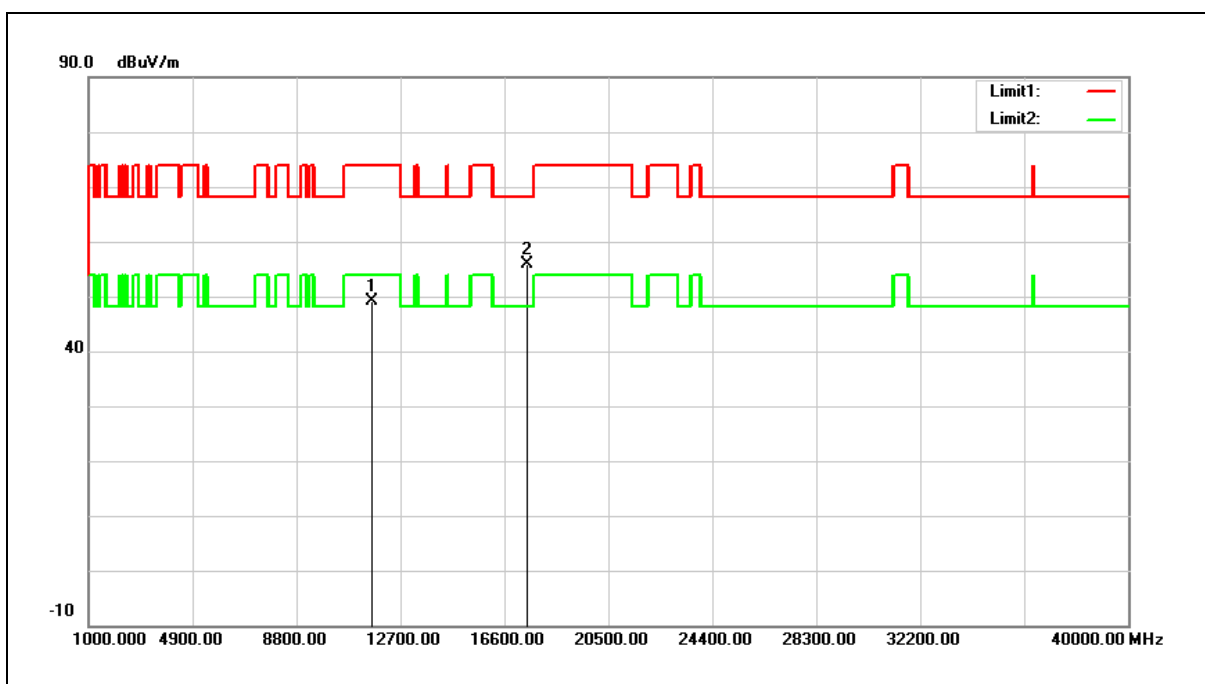

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	30.93	18.28	49.21	74.00	-24.79	peak
2	17475.000	30.63	25.18	55.81	68.20	-12.39	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

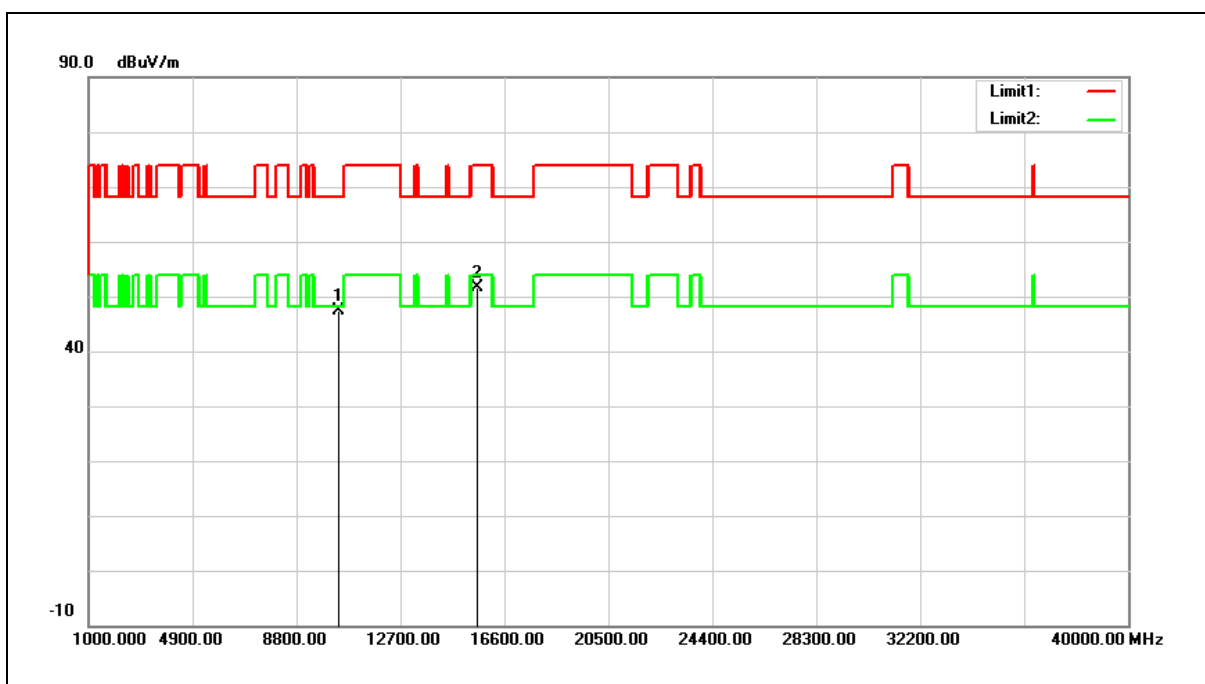

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	30.58	16.86	47.44	68.20	-20.76	peak
2	15570.000	32.75	18.95	51.70	74.00	-22.30	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

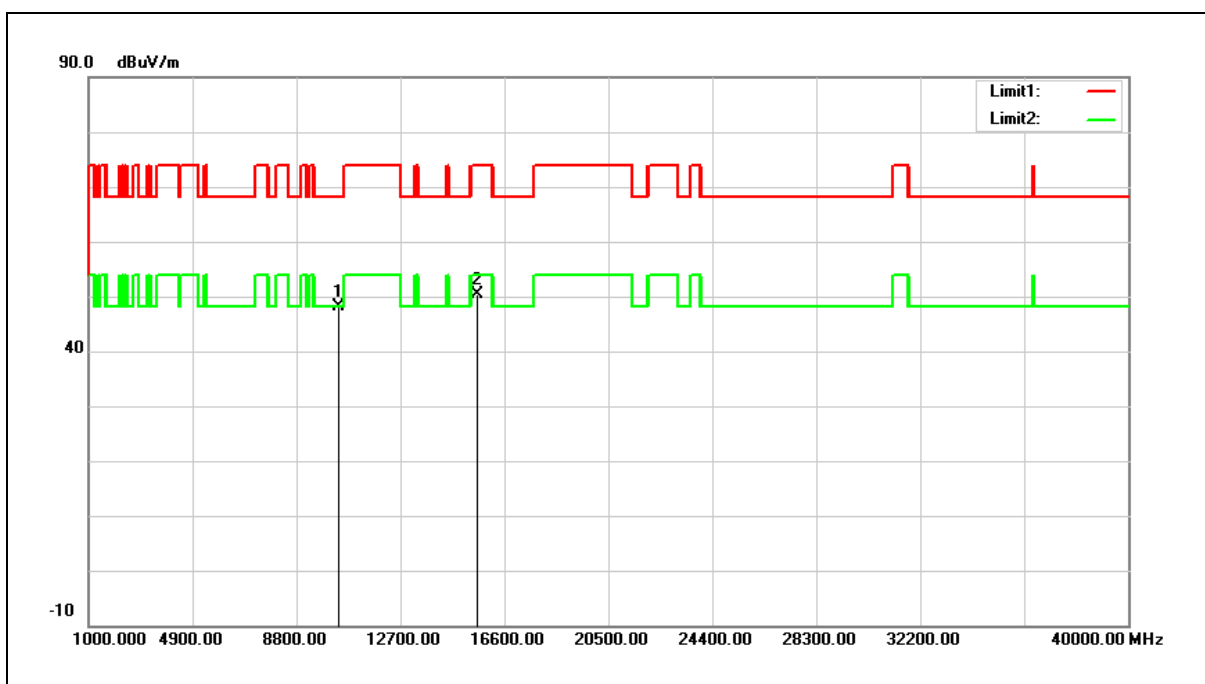

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	31.18	16.86	48.04	68.20	-20.16	peak
2	15570.000	31.50	18.95	50.45	74.00	-23.55	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

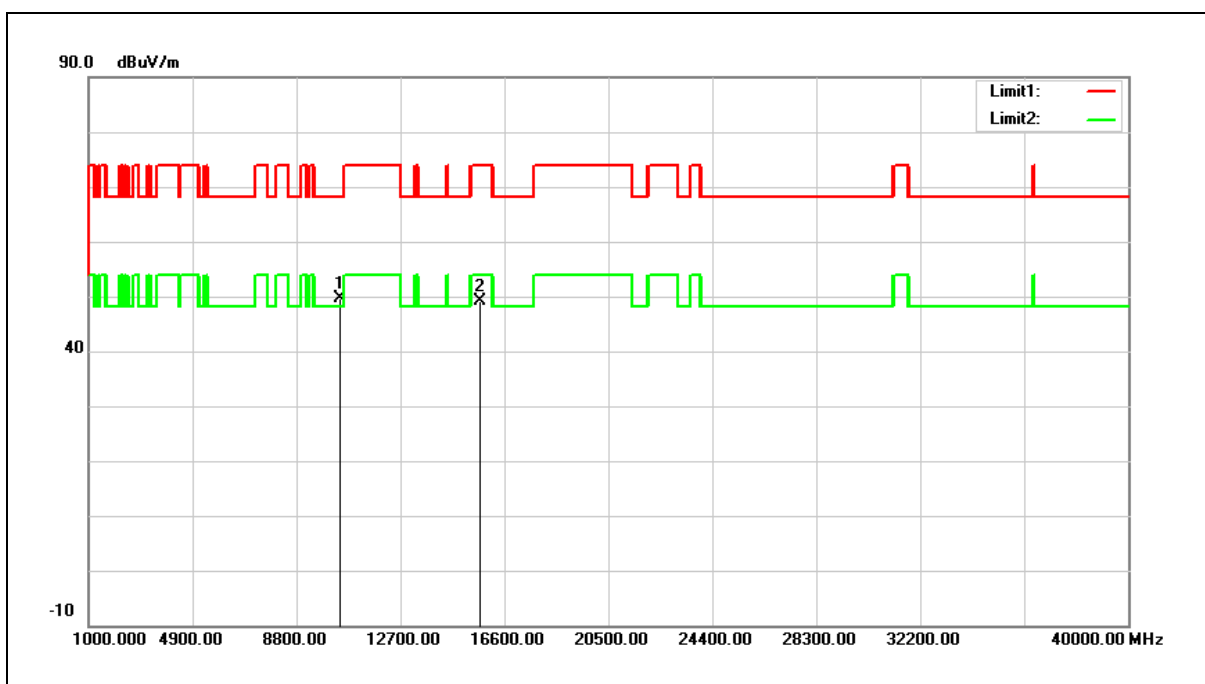

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	32.58	17.15	49.73	68.20	-18.47	peak
2	15690.000	30.49	18.64	49.13	74.00	-24.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

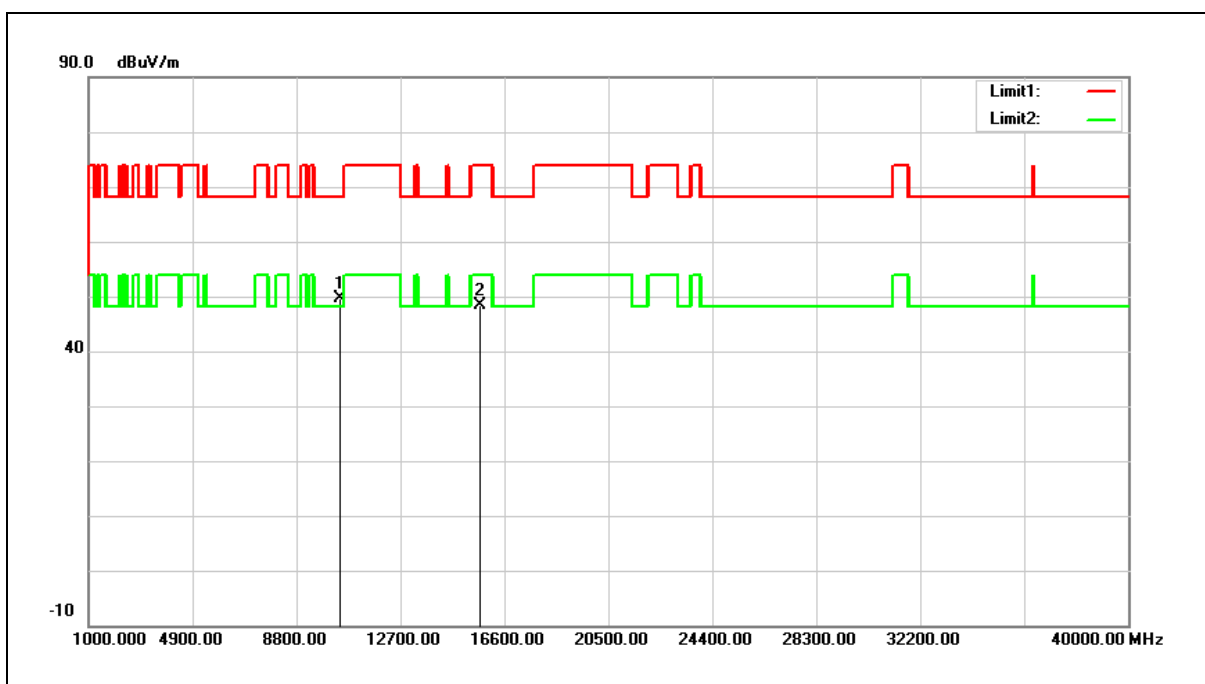

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	32.52	17.15	49.67	68.20	-18.53	peak
2	15690.000	29.69	18.64	48.33	74.00	-25.67	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

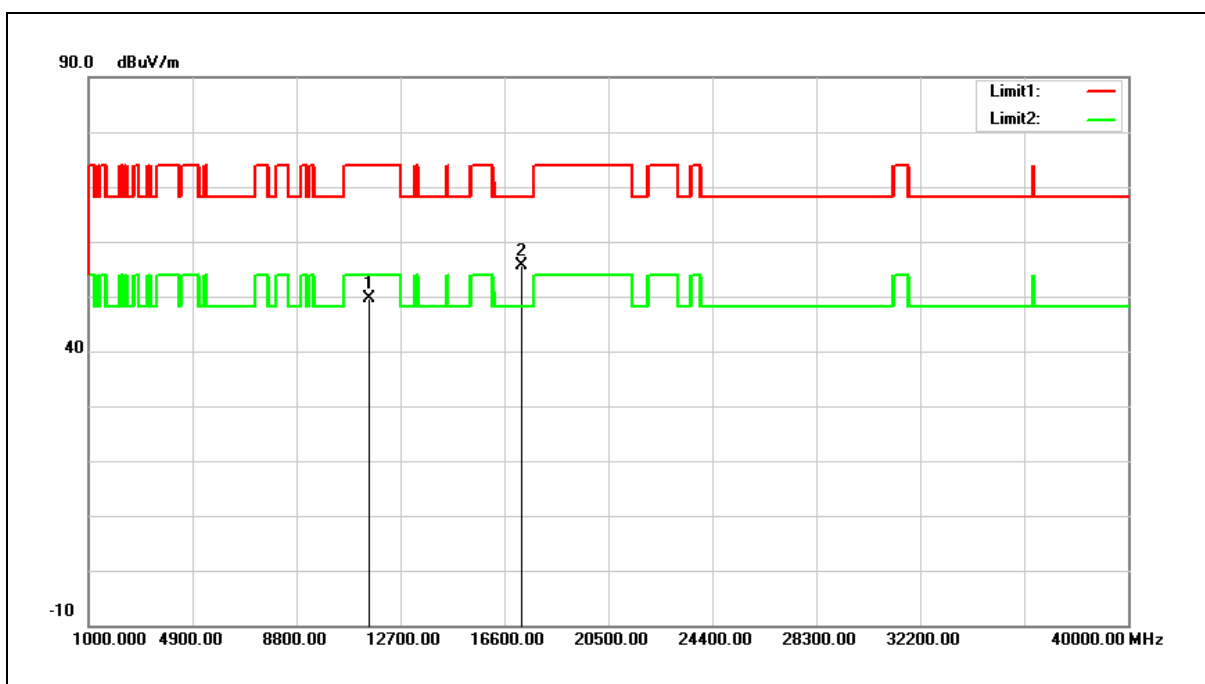

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	31.14	18.45	49.59	74.00	-24.41	peak
2	17265.000	31.21	24.31	55.52	68.20	-12.68	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

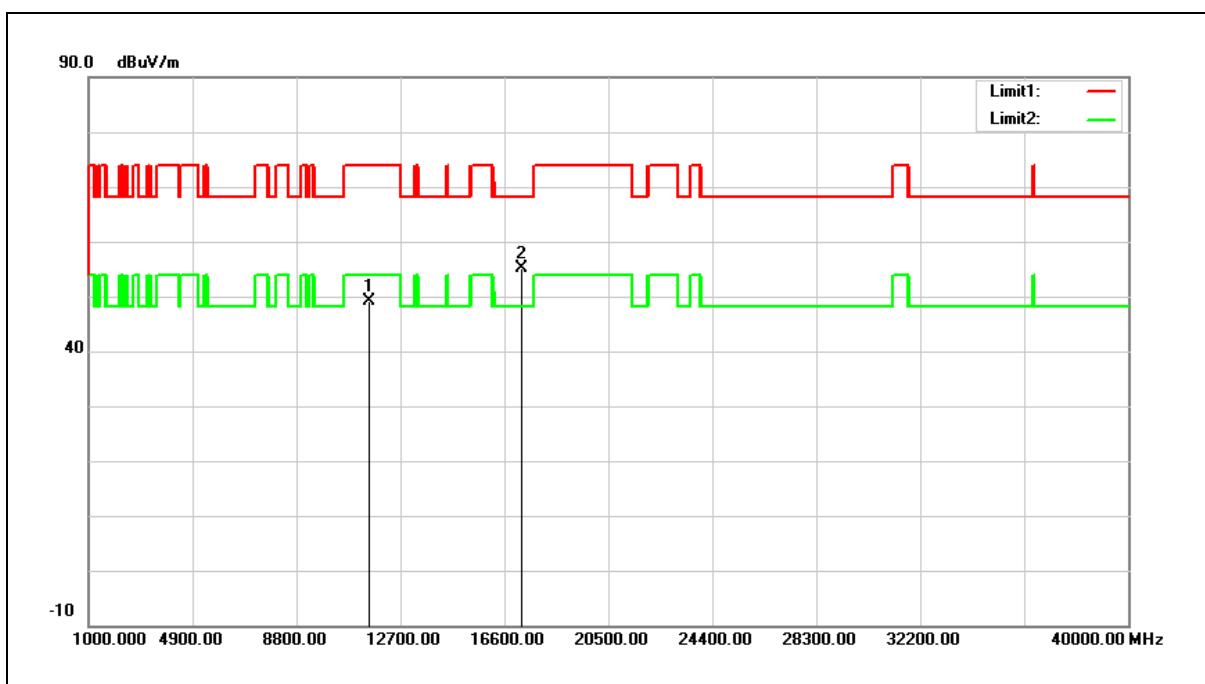

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	30.64	18.45	49.09	74.00	-24.91	peak
2	17265.000	30.77	24.31	55.08	68.20	-13.12	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

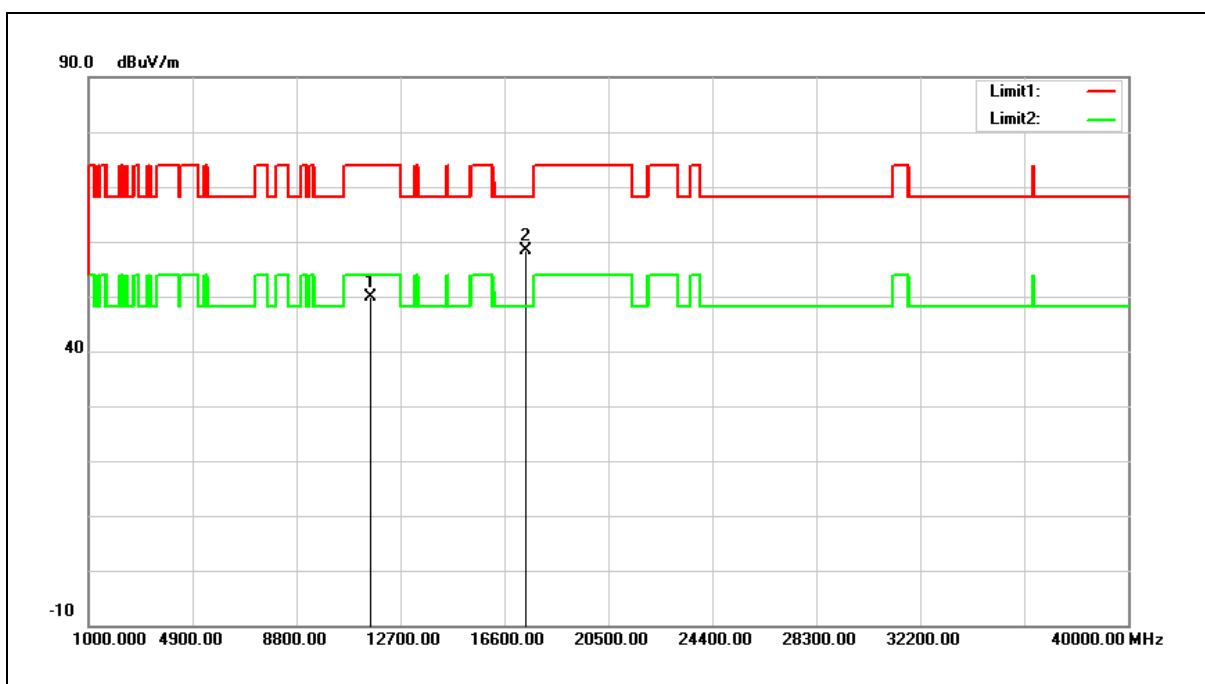

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	31.42	18.36	49.78	74.00	-24.22	peak
2	17385.000	33.47	24.80	58.27	68.20	-9.93	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

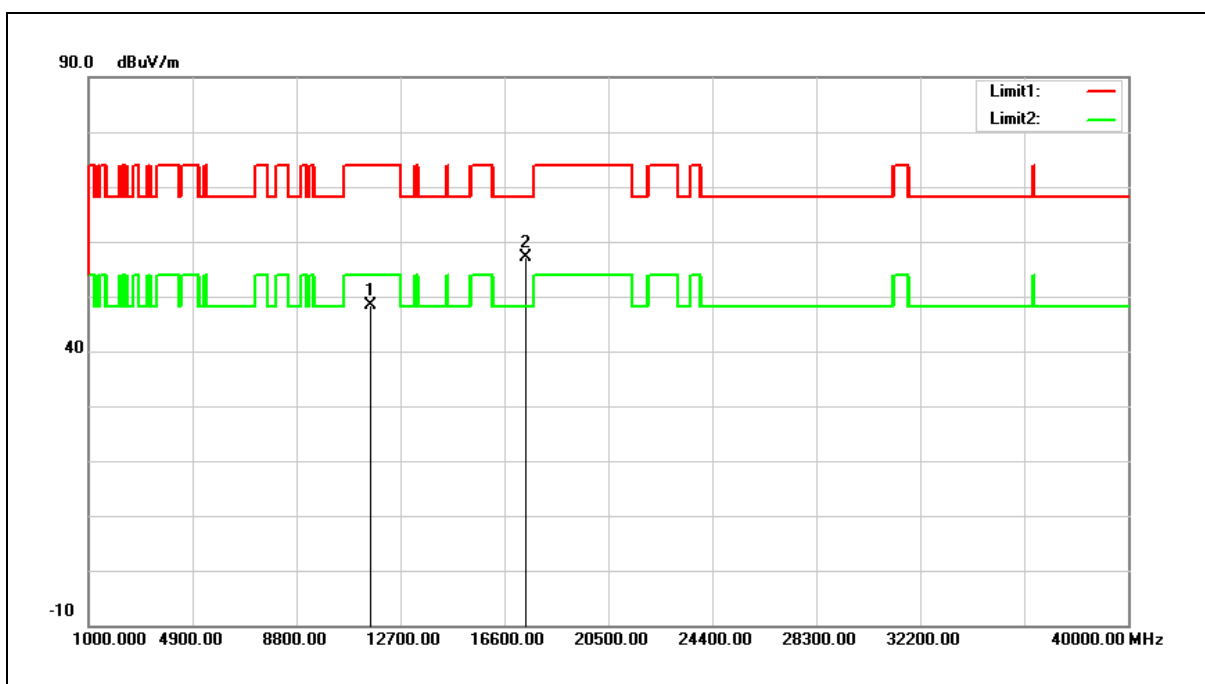

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	30.08	18.36	48.44	74.00	-25.56	peak
2	17385.000	32.29	24.80	57.09	68.20	-11.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Band Edge

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

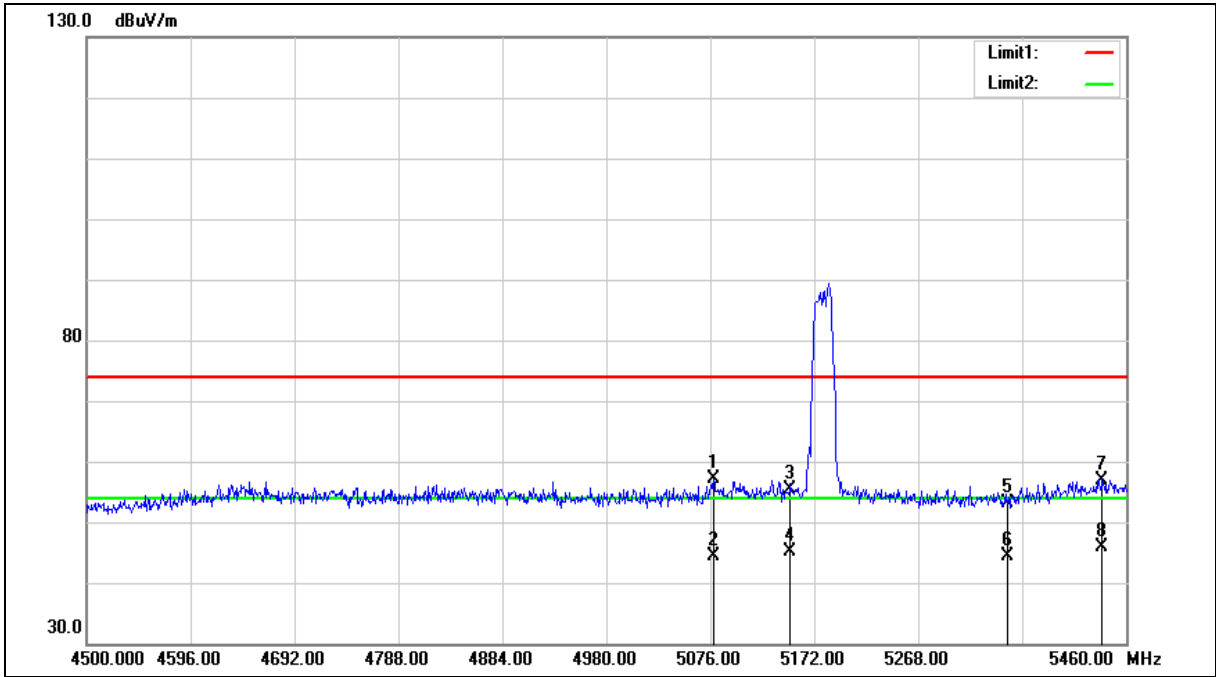



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5078.880	51.33	5.90	57.23	74.00	-16.77	peak
2	5078.880	38.53	5.90	44.43	54.00	-9.57	AVG
3	5150.000	49.38	6.07	55.45	74.00	-18.55	peak
4	5150.000	39.05	6.07	45.12	54.00	-8.88	AVG
5	5350.000	46.54	6.52	53.06	74.00	-20.94	peak
6	5350.000	37.81	6.52	44.33	54.00	-9.67	AVG
7	5437.920	50.27	6.73	57.00	74.00	-17.00	peak
8	5437.920	39.23	6.73	45.96	54.00	-8.04	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5180 MHz	Temp.(°C )/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

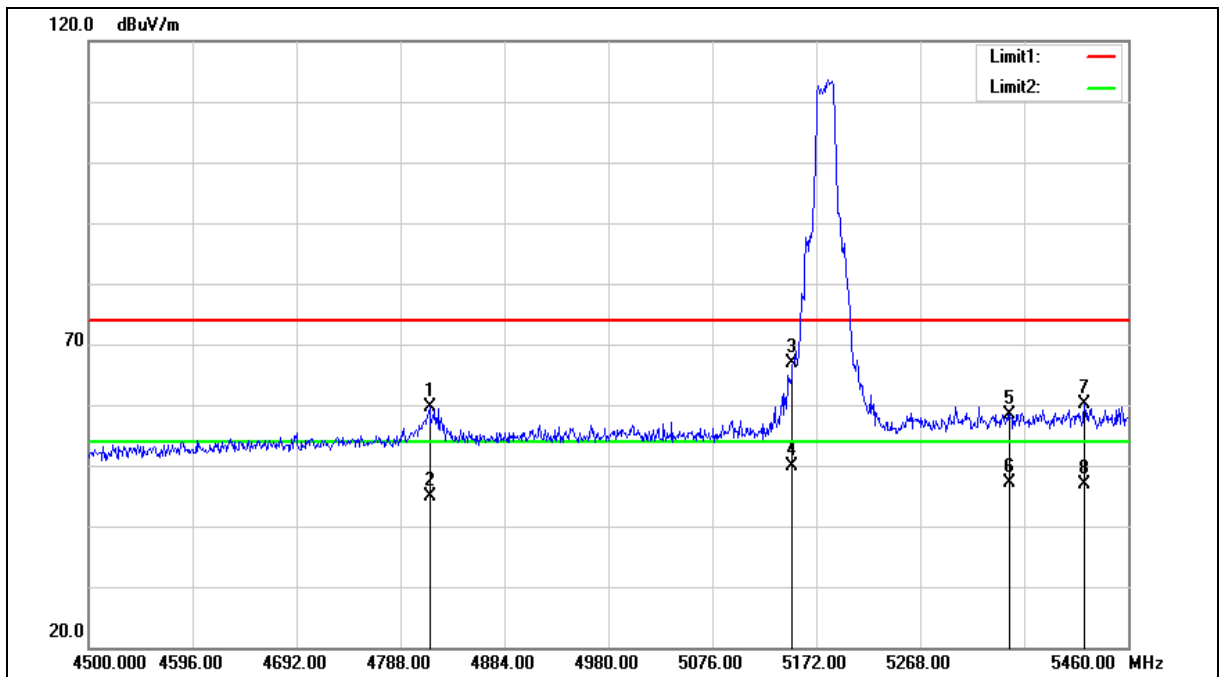





Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4814.880	54.35	5.35	59.70	74.00	-14.30	peak
2	4814.880	39.50	5.35	44.85	54.00	-9.15	AVG
3	5150.000	60.90	6.07	66.97	74.00	-7.03	peak
4	5150.000	43.86	6.07	49.93	54.00	-4.07	AVG
5	5350.000	51.83	6.52	58.35	74.00	-15.65	peak
6	5350.000	40.51	6.52	47.03	54.00	-6.97	AVG
7	5419.680	53.54	6.69	60.23	74.00	-13.77	peak
8	5419.680	40.14	6.69	46.83	54.00	-7.17	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

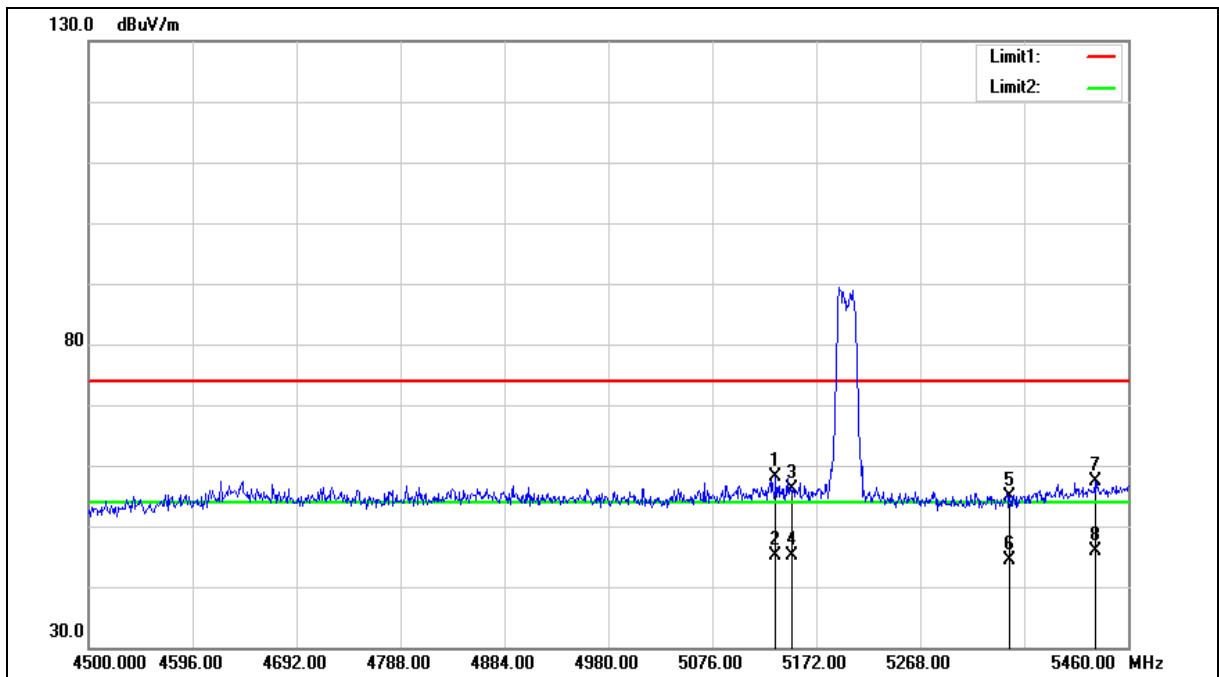



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5134.560	52.09	6.03	58.12	74.00	-15.88	peak
2	5134.560	38.98	6.03	45.01	54.00	-8.99	AVG
3	5150.000	50.15	6.07	56.22	74.00	-17.78	peak
4	5150.000	39.10	6.07	45.17	54.00	-8.83	AVG
5	5350.000	48.46	6.52	54.98	74.00	-19.02	peak
6	5350.000	37.81	6.52	44.33	54.00	-9.67	AVG
7	5429.280	50.60	6.70	57.30	74.00	-16.70	peak
8	5429.280	39.26	6.70	45.96	54.00	-8.04	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5200 MHz	Temp.(°C )/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

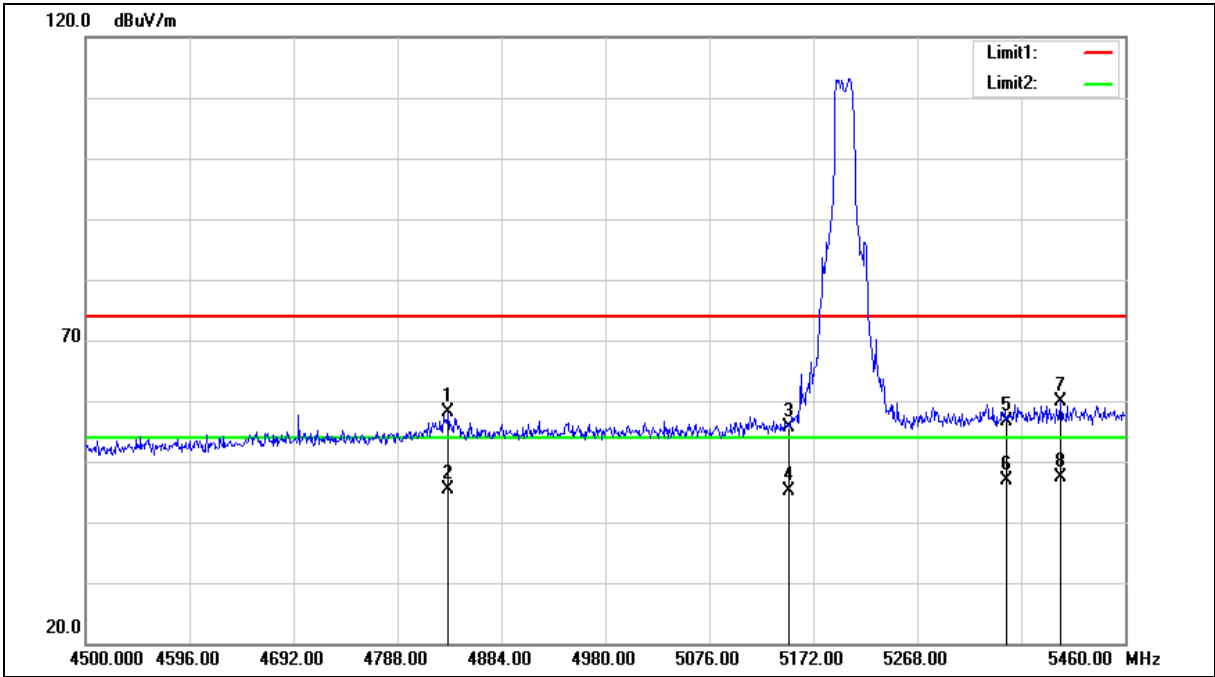



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4835.040	52.72	5.40	58.12	74.00	-15.88	peak
2	4835.040	39.92	5.40	45.32	54.00	-8.68	AVG
3	5150.000	49.51	6.07	55.58	74.00	-18.42	peak
4	5150.000	38.97	6.07	45.04	54.00	-8.96	AVG
5	5350.000	50.04	6.52	56.56	74.00	-17.44	peak
6	5350.000	40.46	6.52	46.98	54.00	-7.02	AVG
7	5400.480	53.25	6.63	59.88	74.00	-14.12	peak
8	5400.480	40.69	6.63	47.32	54.00	-6.68	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

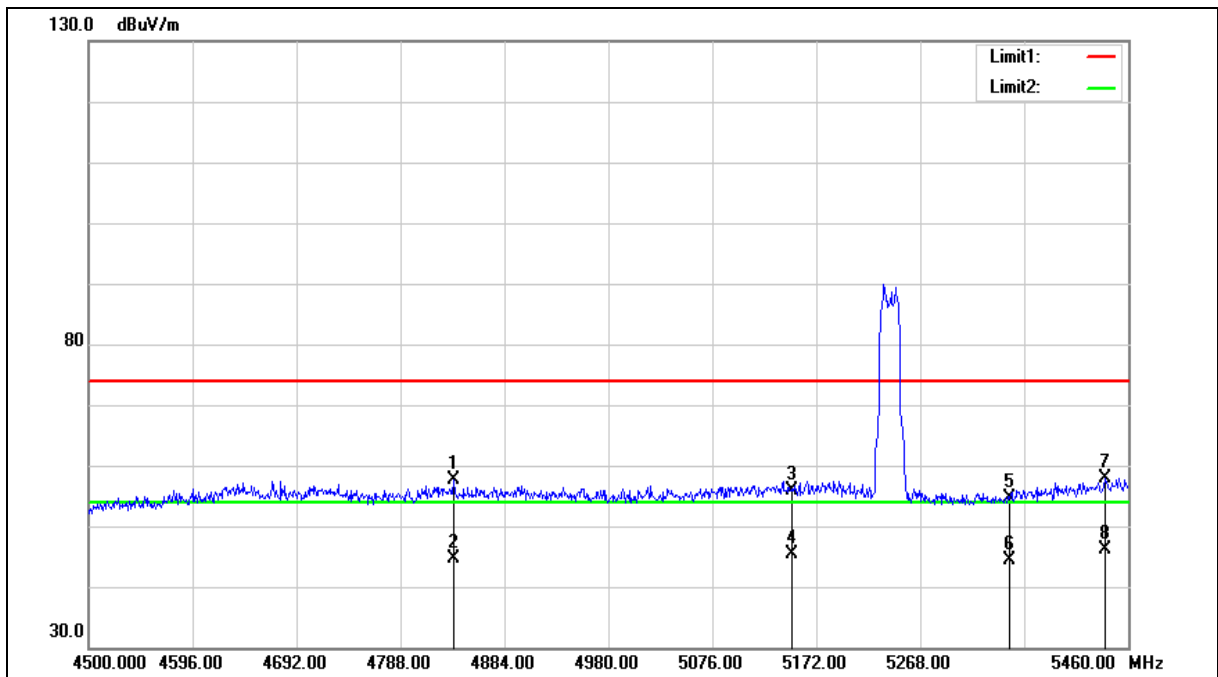



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4836.960	52.26	5.40	57.66	74.00	-16.34	peak
2	4836.960	39.15	5.40	44.55	54.00	-9.45	AVG
3	5150.000	49.69	6.07	55.76	74.00	-18.24	peak
4	5150.000	39.26	6.07	45.33	54.00	-8.67	AVG
5	5350.000	48.09	6.52	54.61	74.00	-19.39	peak
6	5350.000	37.84	6.52	44.36	54.00	-9.64	AVG
7	5438.880	51.15	6.73	57.88	74.00	-16.12	peak
8	5438.880	39.29	6.73	46.02	54.00	-7.98	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5240 MHz	Temp.(°C )/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

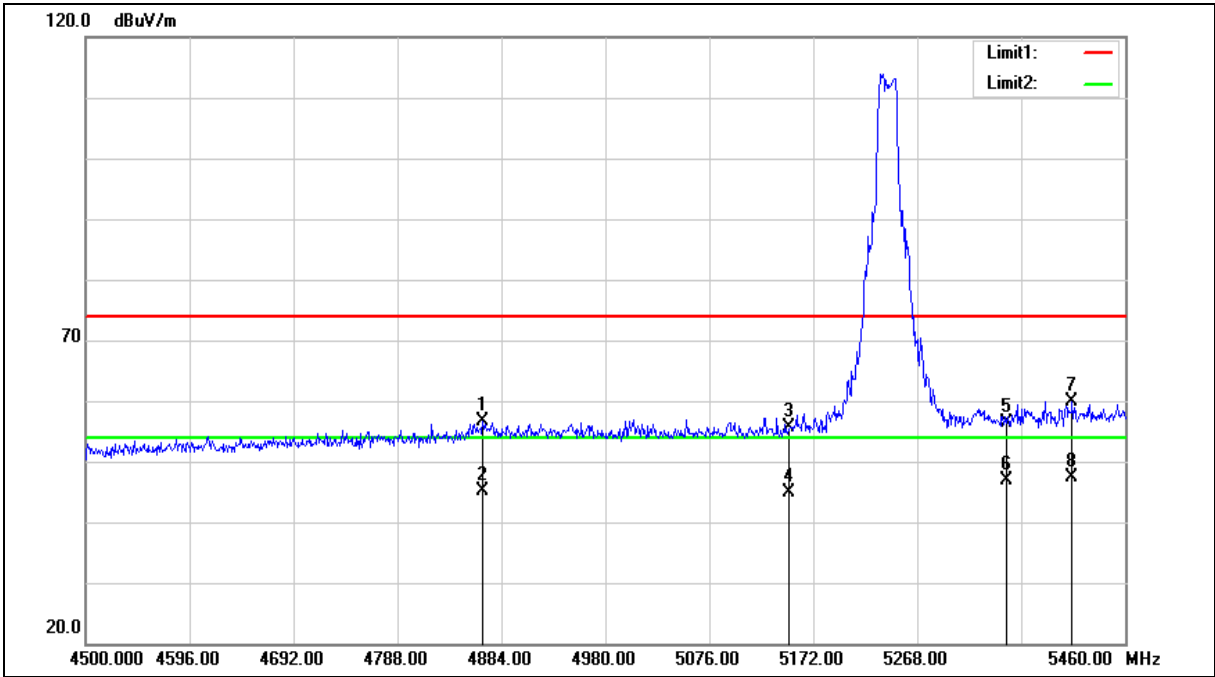





Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4866.720	51.09	5.45	56.54	74.00	-17.46	peak
2	4866.720	39.71	5.45	45.16	54.00	-8.84	AVG
3	5150.000	49.51	6.07	55.58	74.00	-18.42	peak
4	5150.000	38.78	6.07	44.85	54.00	-9.15	AVG
5	5350.000	49.88	6.52	56.40	74.00	-17.60	peak
6	5350.000	40.30	6.52	46.82	54.00	-7.18	AVG
7	5411.040	53.21	6.65	59.86	74.00	-14.14	peak
8	5411.040	40.64	6.65	47.29	54.00	-6.71	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

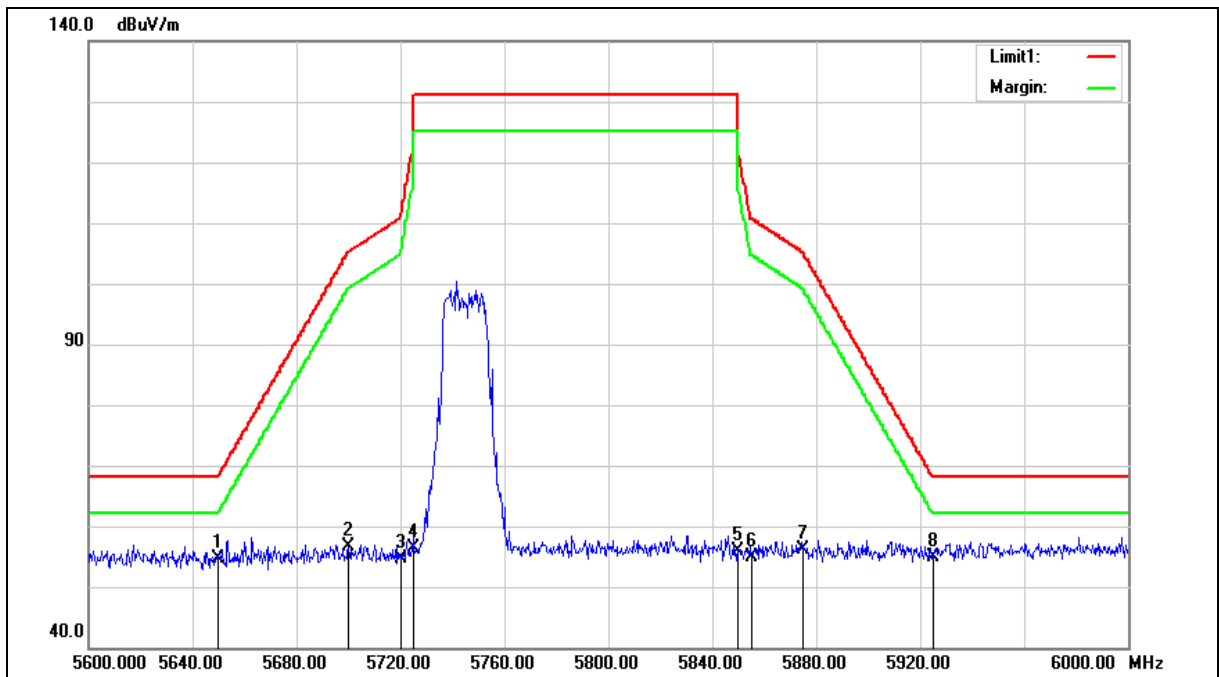



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.41	7.17	54.58	68.20	-13.62	peak
2	5700.000	49.30	7.27	56.57	105.20	-48.63	peak
3	5720.000	47.32	7.31	54.63	110.80	-56.17	peak
4	5725.000	49.08	7.32	56.40	122.20	-65.80	peak
5	5850.000	48.18	7.59	55.77	122.20	-66.43	peak
6	5855.000	47.17	7.60	54.77	110.80	-56.03	peak
7	5875.000	48.55	7.64	56.19	105.20	-49.01	peak
8	5925.000	47.17	7.75	54.92	68.20	-13.28	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

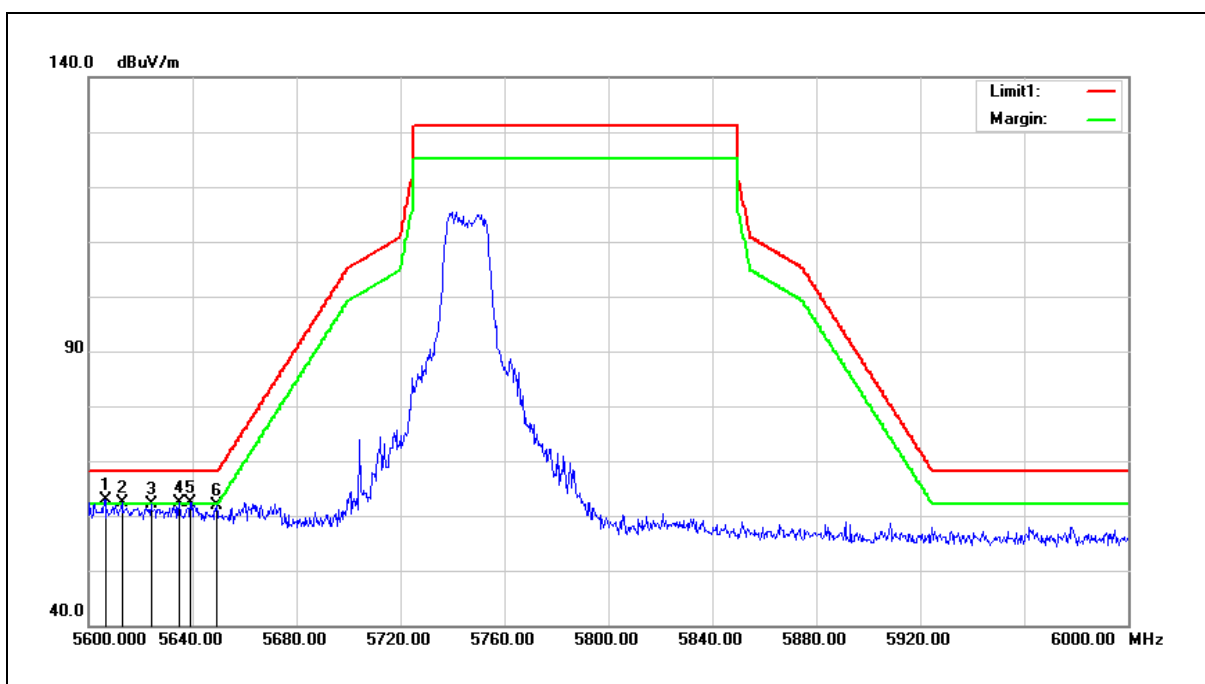

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5606.400	55.91	7.08	62.99	68.20	-5.21	peak
2	5612.800	55.24	7.10	62.34	68.20	-5.86	peak
3	5624.000	54.89	7.12	62.01	68.20	-6.19	peak
4	5634.800	55.14	7.15	62.29	68.20	-5.91	peak
5	5639.200	55.20	7.15	62.35	68.20	-5.85	peak
6	5649.200	54.70	7.17	61.87	68.20	-6.33	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

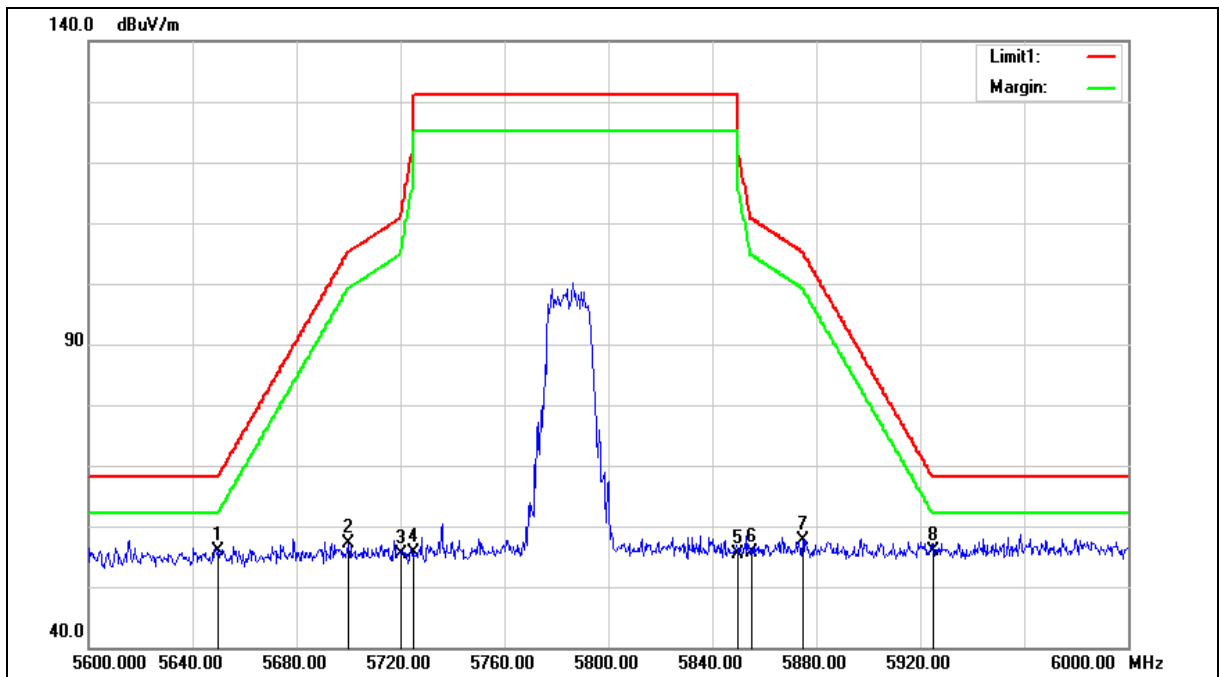



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	48.79	7.17	55.96	68.20	-12.24	peak
2	5700.000	49.92	7.27	57.19	105.20	-48.01	peak
3	5720.000	48.09	7.31	55.40	110.80	-55.40	peak
4	5725.000	48.39	7.32	55.71	122.20	-66.49	peak
5	5850.000	47.88	7.59	55.47	122.20	-66.73	peak
6	5855.000	48.14	7.60	55.74	110.80	-55.06	peak
7	5875.000	49.98	7.64	57.62	105.20	-47.58	peak
8	5925.000	48.10	7.75	55.85	68.20	-12.35	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

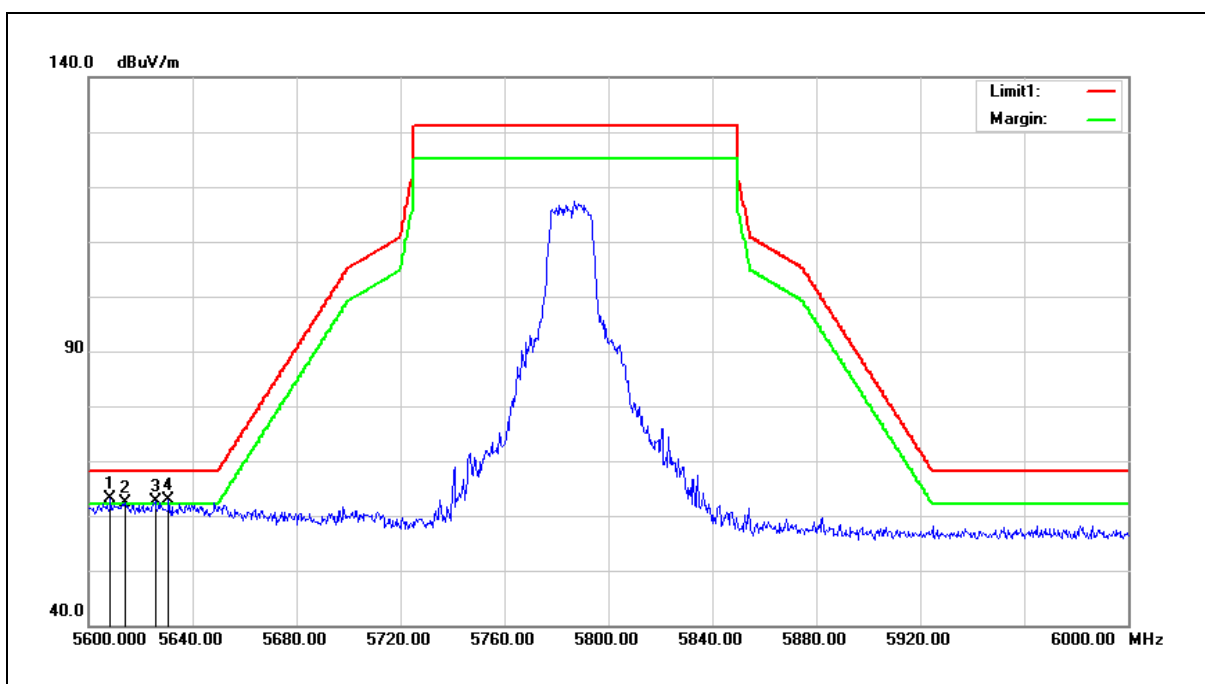

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5608.400	56.05	7.09	63.14	68.20	-5.06	peak
2	5614.000	55.25	7.10	62.35	68.20	-5.85	peak
3	5625.600	55.44	7.12	62.56	68.20	-5.64	peak
4	5630.800	55.78	7.13	62.91	68.20	-5.29	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

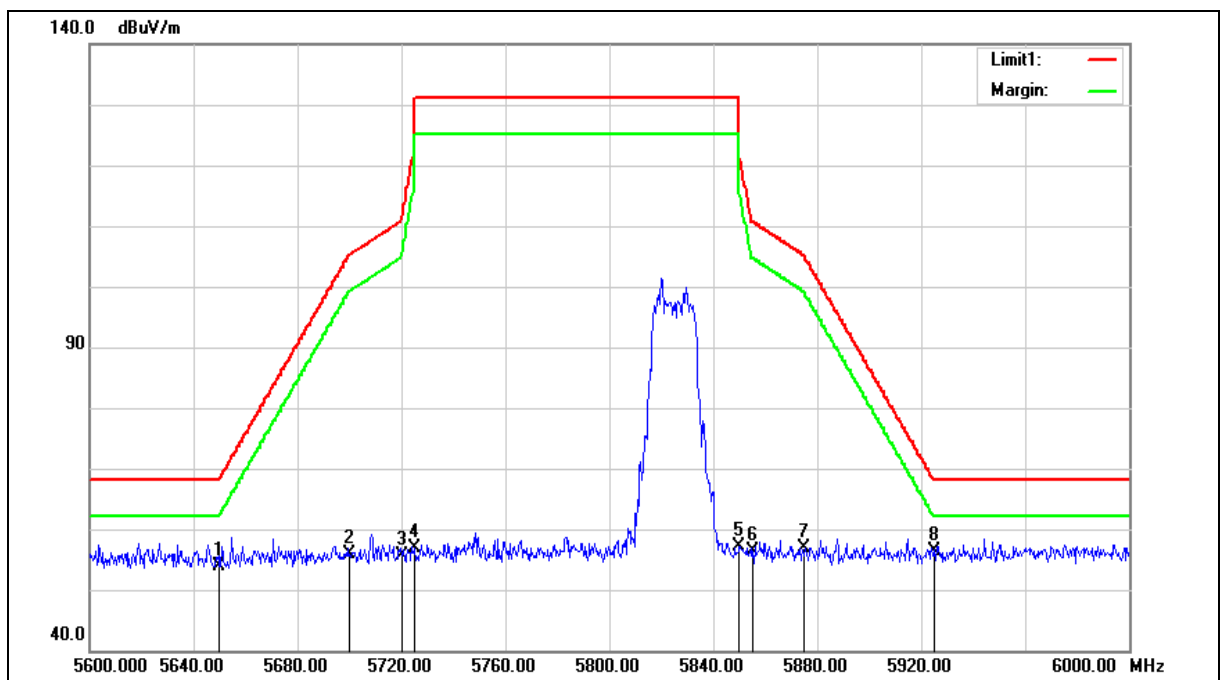





Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.64	7.17	53.81	68.20	-14.39	peak
2	5700.000	48.54	7.27	55.81	105.20	-49.39	peak
3	5720.000	48.28	7.31	55.59	110.80	-55.21	peak
4	5725.000	49.65	7.32	56.97	122.20	-65.23	peak
5	5850.000	49.45	7.59	57.04	122.20	-65.16	peak
6	5855.000	48.87	7.60	56.47	110.80	-54.33	peak
7	5875.000	49.28	7.64	56.92	105.20	-48.28	peak
8	5925.000	48.52	7.75	56.27	68.20	-11.93	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

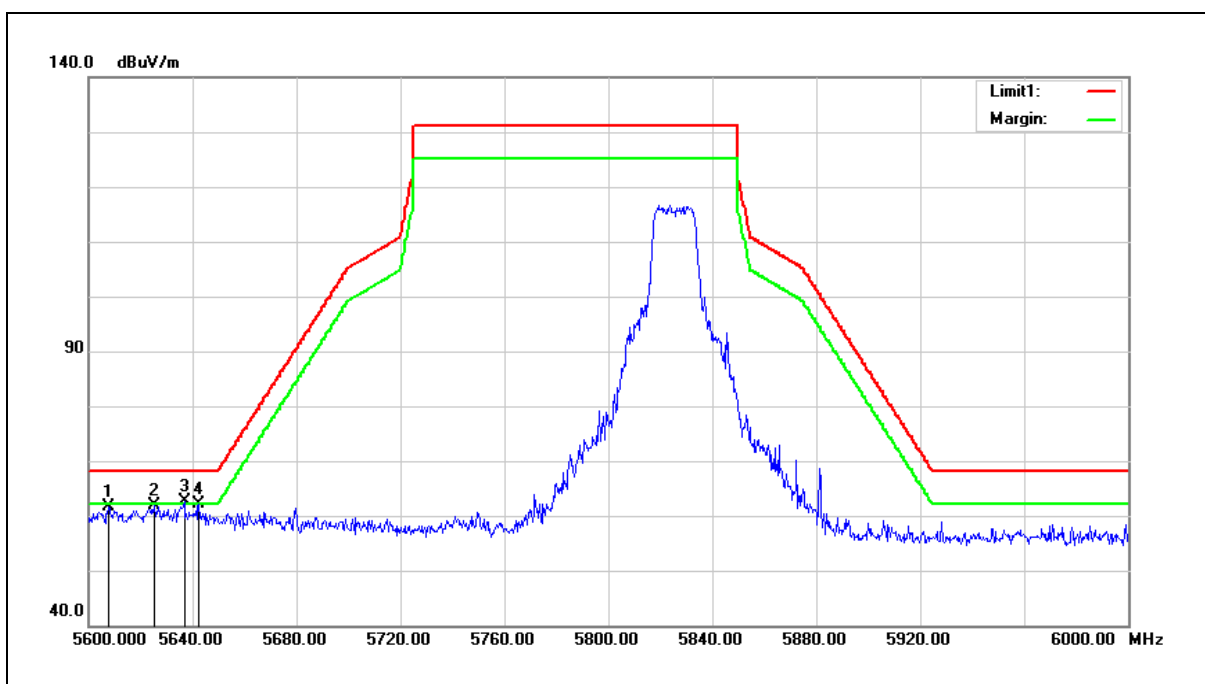

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5607.600	54.51	7.09	61.60	68.20	-6.60	peak
2	5625.200	54.76	7.12	61.88	68.20	-6.32	peak
3	5636.800	55.39	7.15	62.54	68.20	-5.66	peak
4	5642.400	54.85	7.16	62.01	68.20	-6.19	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

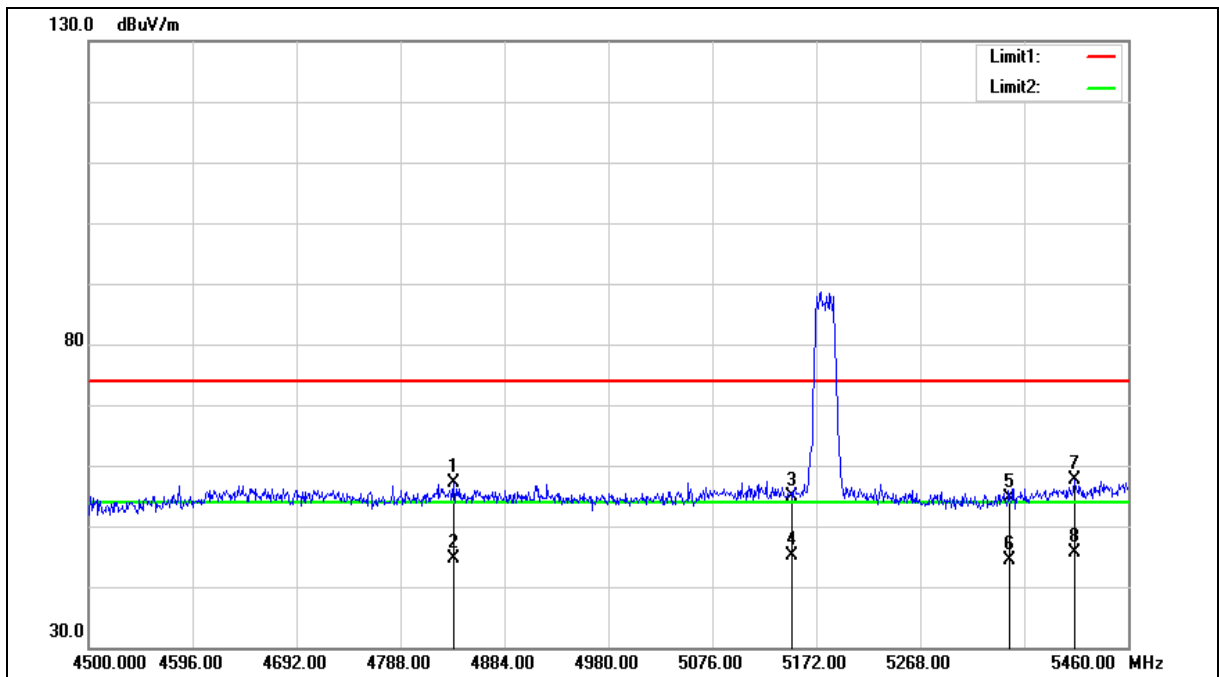



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4836.960	51.64	5.40	57.04	74.00	-16.96	peak
2	4836.960	39.12	5.40	44.52	54.00	-9.48	AVG
3	5150.000	48.70	6.07	54.77	74.00	-19.23	peak
4	5150.000	39.18	6.07	45.25	54.00	-8.75	AVG
5	5350.000	48.05	6.52	54.57	74.00	-19.43	peak
6	5350.000	37.97	6.52	44.49	54.00	-9.51	AVG
7	5410.080	50.91	6.65	57.56	74.00	-16.44	peak
8	5410.080	38.94	6.65	45.59	54.00	-8.41	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5180 MHz	Temp.(°C )/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

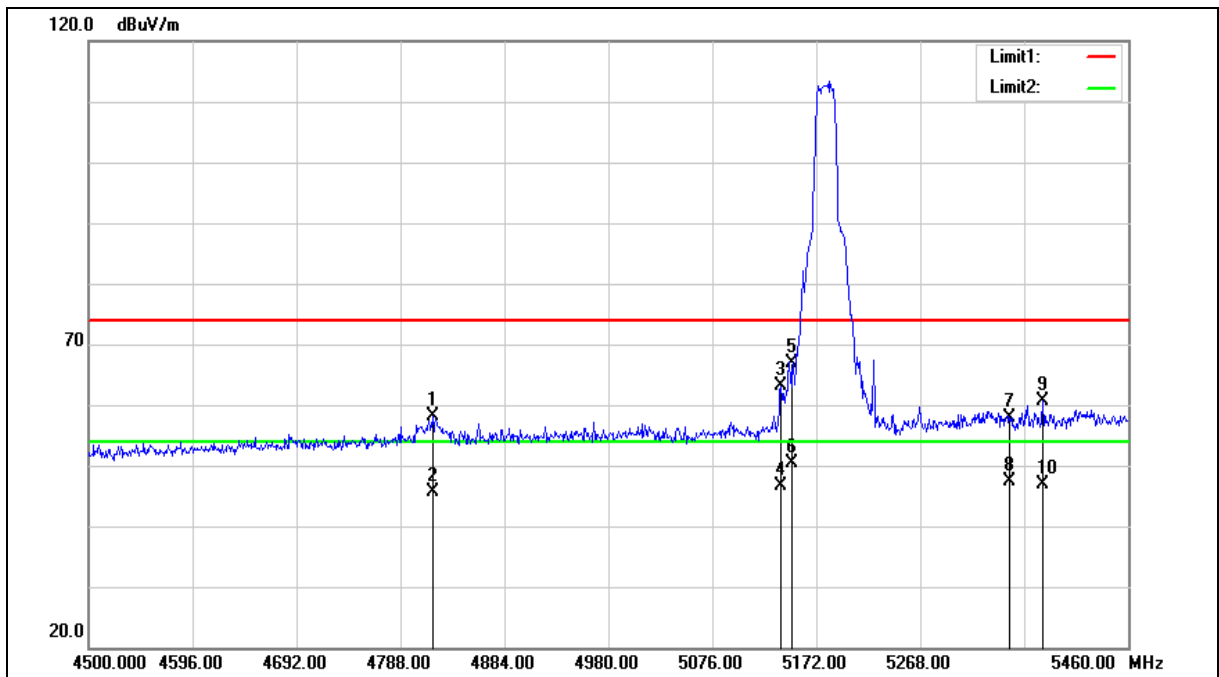



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4817.760	52.71	5.36	58.07	74.00	-15.93	peak
2	4817.760	40.38	5.36	45.74	54.00	-8.26	AVG
3	5139.360	57.05	6.05	63.10	74.00	-10.90	peak
4	5139.360	40.70	6.05	46.75	54.00	-7.25	AVG
5	5150.000	60.85	6.07	66.92	74.00	-7.08	peak
6	5150.000	44.29	6.07	50.36	54.00	-3.64	AVG
7	5350.000	51.39	6.52	57.91	74.00	-16.09	peak
8	5350.000	40.74	6.52	47.26	54.00	-6.74	AVG
9	5381.280	54.05	6.59	60.64	74.00	-13.36	peak
10	5381.280	40.38	6.59	46.97	54.00	-7.03	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

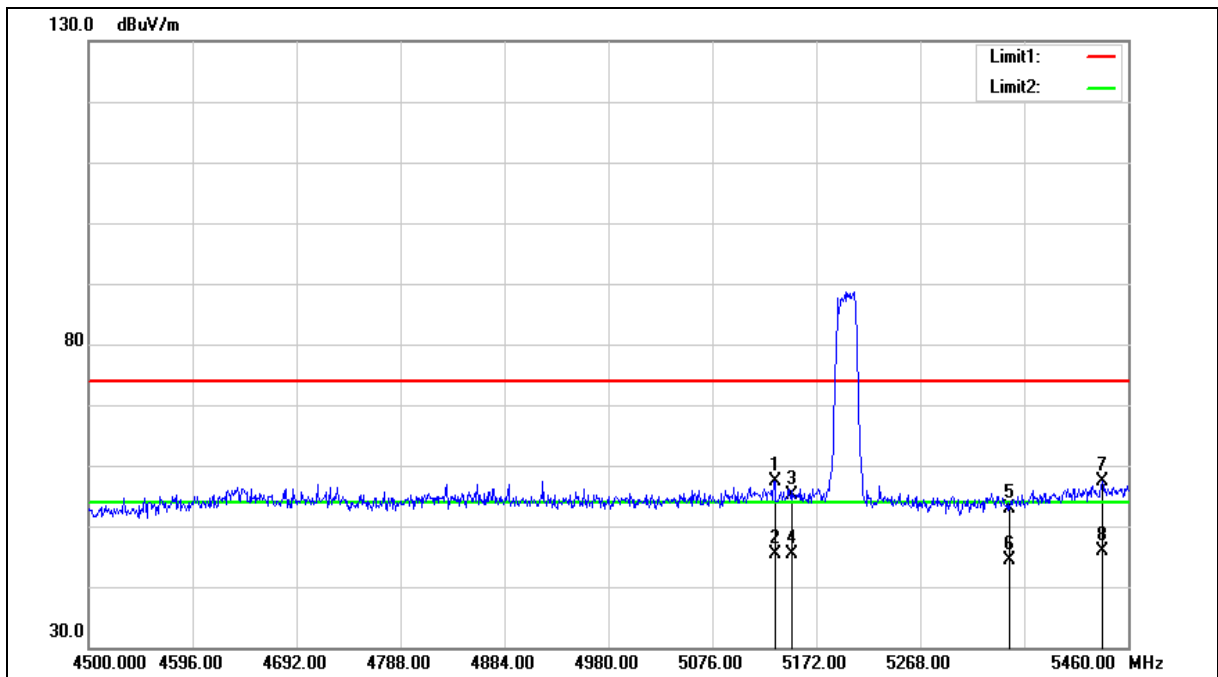



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5133.600	51.41	6.03	57.44	74.00	-16.56	peak
2	5133.600	39.32	6.03	45.35	54.00	-8.65	AVG
3	5150.000	48.98	6.07	55.05	74.00	-18.95	peak
4	5150.000	39.22	6.07	45.29	54.00	-8.71	AVG
5	5350.000	46.25	6.52	52.77	74.00	-21.23	peak
6	5350.000	37.96	6.52	44.48	54.00	-9.52	AVG
7	5436.000	50.61	6.71	57.32	74.00	-16.68	peak
8	5436.000	39.24	6.71	45.95	54.00	-8.05	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

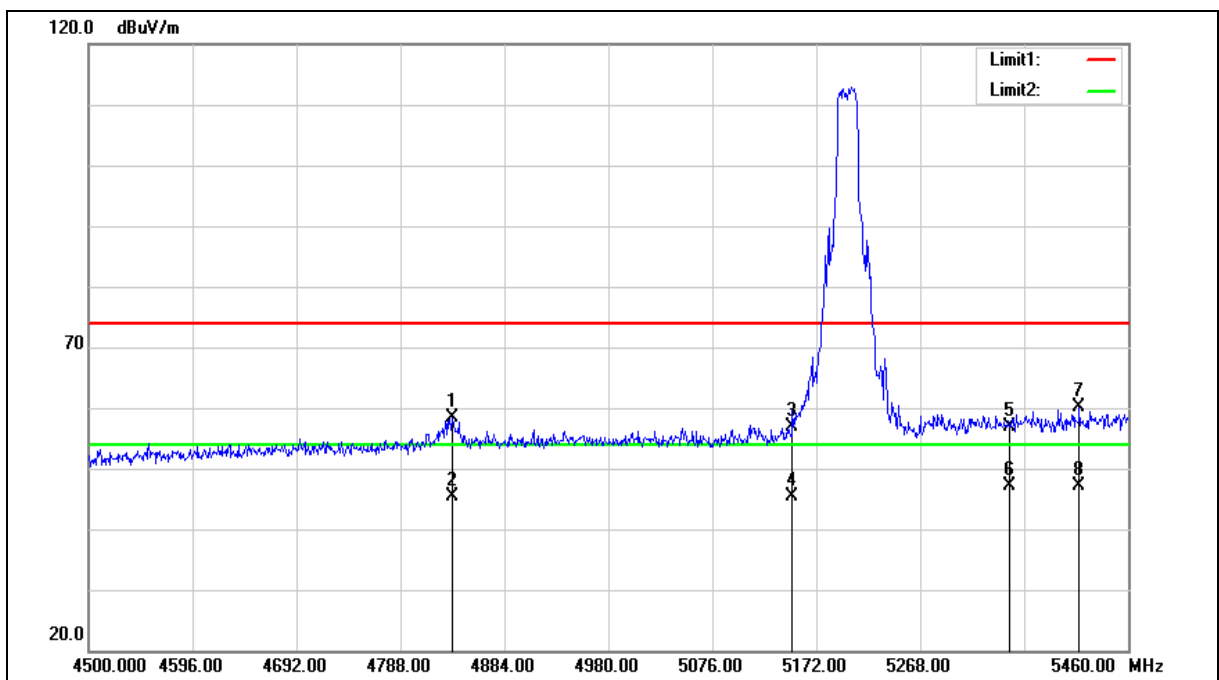



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4836.000	52.91	5.40	58.31	74.00	-15.69	peak
2	4836.000	39.96	5.40	45.36	54.00	-8.64	AVG
3	5150.000	50.82	6.07	56.89	74.00	-17.11	peak
4	5150.000	39.36	6.07	45.43	54.00	-8.57	AVG
5	5350.000	50.27	6.52	56.79	74.00	-17.21	peak
6	5350.000	40.63	6.52	47.15	54.00	-6.85	AVG
7	5414.880	53.43	6.67	60.10	74.00	-13.90	peak
8	5414.880	40.54	6.67	47.21	54.00	-6.79	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

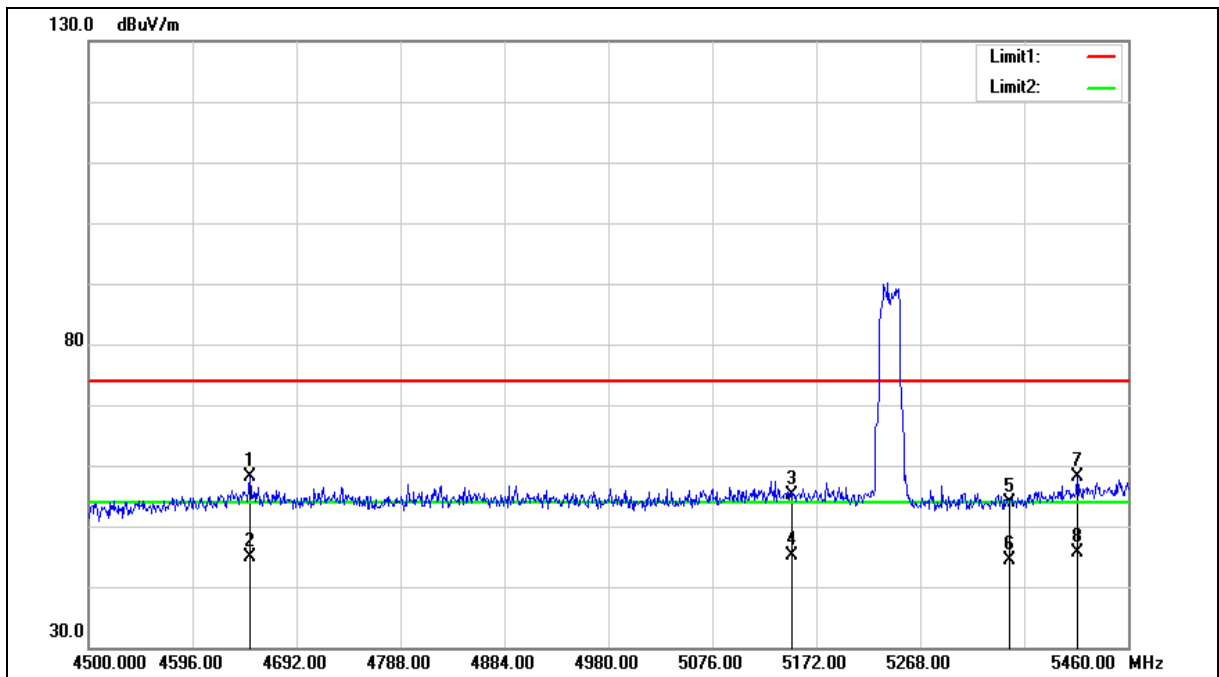



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4648.800	53.12	5.02	58.14	74.00	-15.86	peak
2	4648.800	39.95	5.02	44.97	54.00	-9.03	AVG
3	5150.000	49.05	6.07	55.12	74.00	-18.88	peak
4	5150.000	39.15	6.07	45.22	54.00	-8.78	AVG
5	5350.000	47.48	6.52	54.00	74.00	-20.00	peak
6	5350.000	37.96	6.52	44.48	54.00	-9.52	AVG
7	5412.960	51.54	6.66	58.20	74.00	-15.80	peak
8	5412.960	39.02	6.66	45.68	54.00	-8.32	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

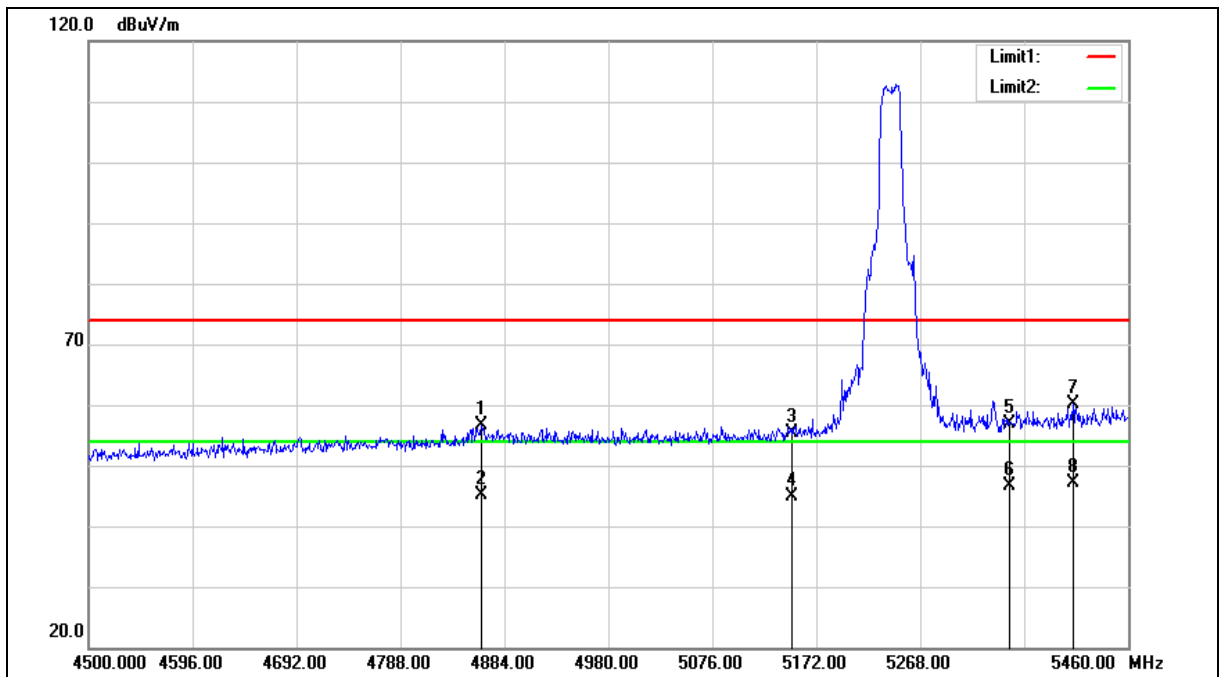



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4862.880	51.21	5.45	56.66	74.00	-17.34	peak
2	4862.880	39.78	5.45	45.23	54.00	-8.77	AVG
3	5150.000	49.22	6.07	55.29	74.00	-18.71	peak
4	5150.000	38.84	6.07	44.91	54.00	-9.09	AVG
5	5350.000	50.26	6.52	56.78	74.00	-17.22	peak
6	5350.000	40.17	6.52	46.69	54.00	-7.31	AVG
7	5409.120	53.42	6.65	60.07	74.00	-13.93	peak
8	5409.120	40.60	6.65	47.25	54.00	-6.75	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

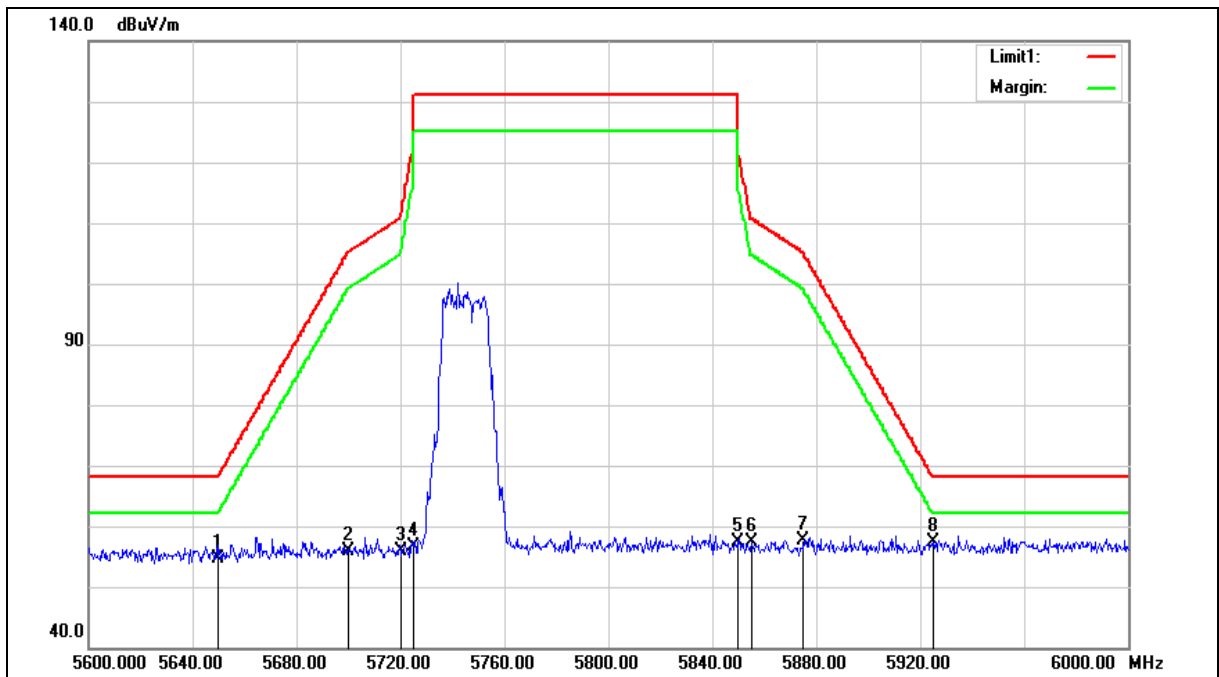



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.47	7.17	54.64	68.20	-13.56	peak
2	5700.000	48.50	7.27	55.77	105.20	-49.43	peak
3	5720.000	48.54	7.31	55.85	110.80	-54.95	peak
4	5725.000	49.38	7.32	56.70	122.20	-65.50	peak
5	5850.000	49.67	7.59	57.26	122.20	-64.94	peak
6	5855.000	49.80	7.60	57.40	110.80	-53.40	peak
7	5875.000	50.00	7.64	57.64	105.20	-47.56	peak
8	5925.000	49.69	7.75	57.44	68.20	-10.76	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

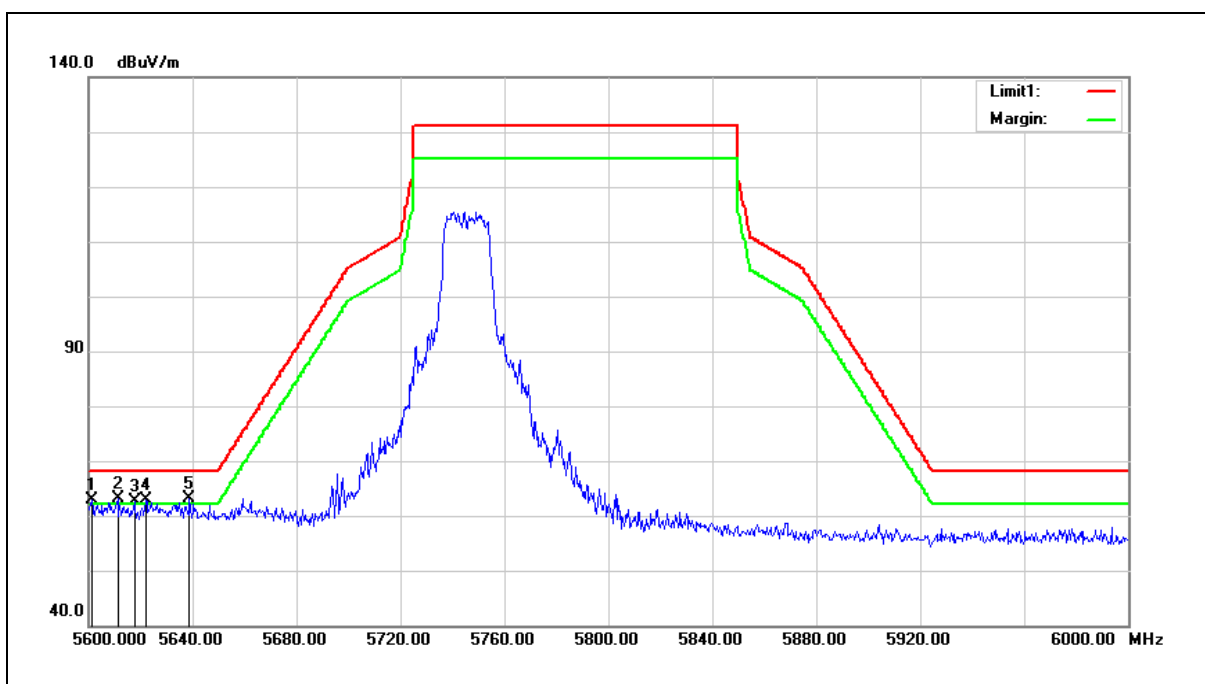

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5601.200	55.82	7.07	62.89	68.20	-5.31	peak
2	5611.200	55.94	7.10	63.04	68.20	-5.16	peak
3	5617.600	55.42	7.11	62.53	68.20	-5.67	peak
4	5622.000	55.67	7.12	62.79	68.20	-5.41	peak
5	5638.800	55.91	7.15	63.06	68.20	-5.14	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

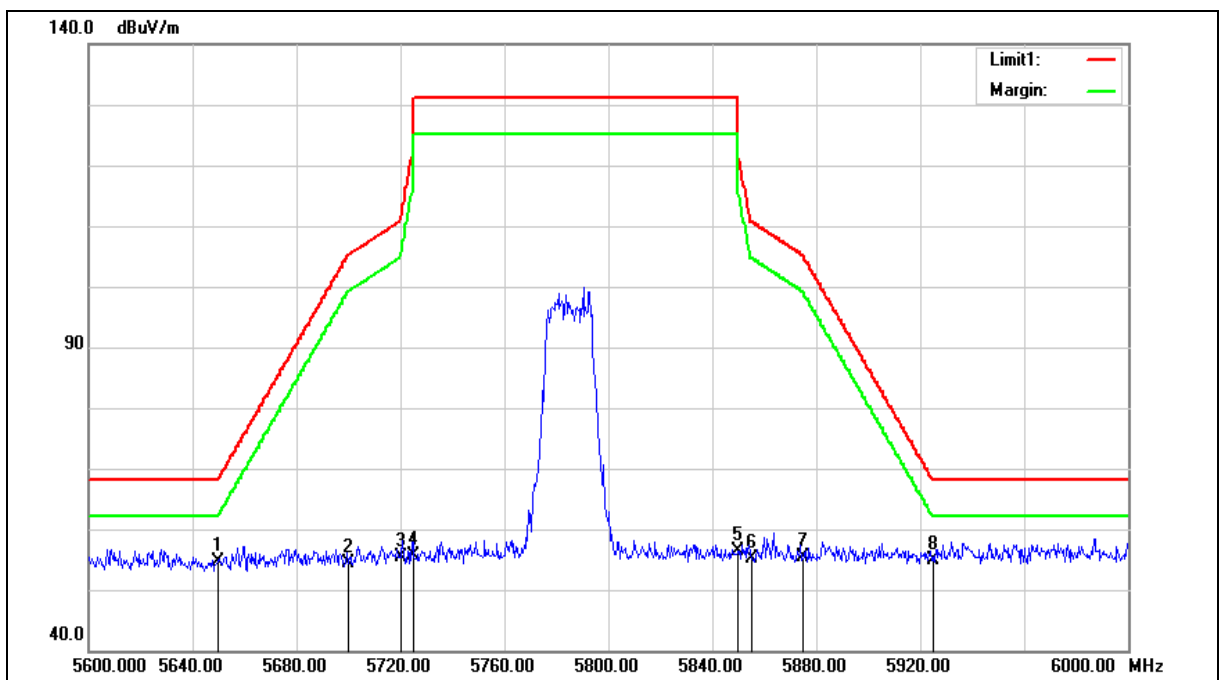



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.42	7.17	54.59	68.20	-13.61	peak
2	5700.000	47.21	7.27	54.48	105.20	-50.72	peak
3	5720.000	48.14	7.31	55.45	110.80	-55.35	peak
4	5725.000	48.38	7.32	55.70	122.20	-66.50	peak
5	5850.000	48.90	7.59	56.49	122.20	-65.71	peak
6	5855.000	47.48	7.60	55.08	110.80	-55.72	peak
7	5875.000	47.68	7.64	55.32	105.20	-49.88	peak
8	5925.000	47.09	7.75	54.84	68.20	-13.36	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

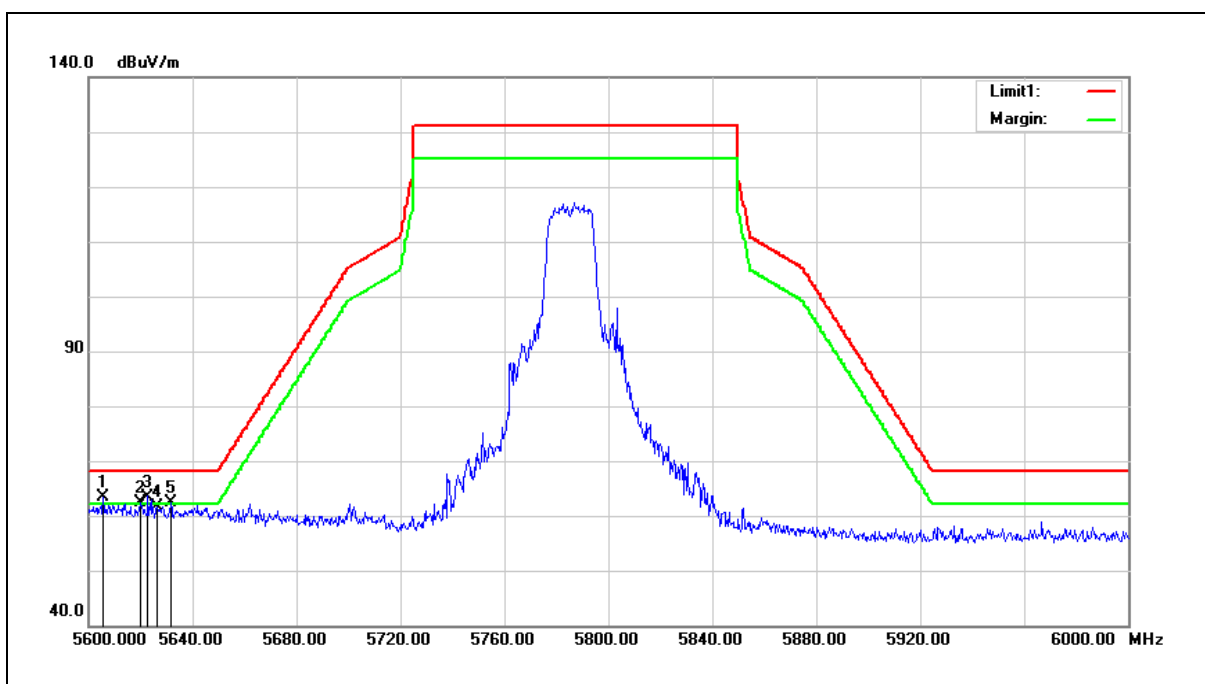

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5605.600	56.28	7.08	63.36	68.20	-4.84	peak
2	5620.000	55.28	7.11	62.39	68.20	-5.81	peak
3	5622.800	56.38	7.12	63.50	68.20	-4.70	peak
4	5626.400	54.60	7.12	61.72	68.20	-6.48	peak
5	5631.600	55.19	7.14	62.33	68.20	-5.87	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

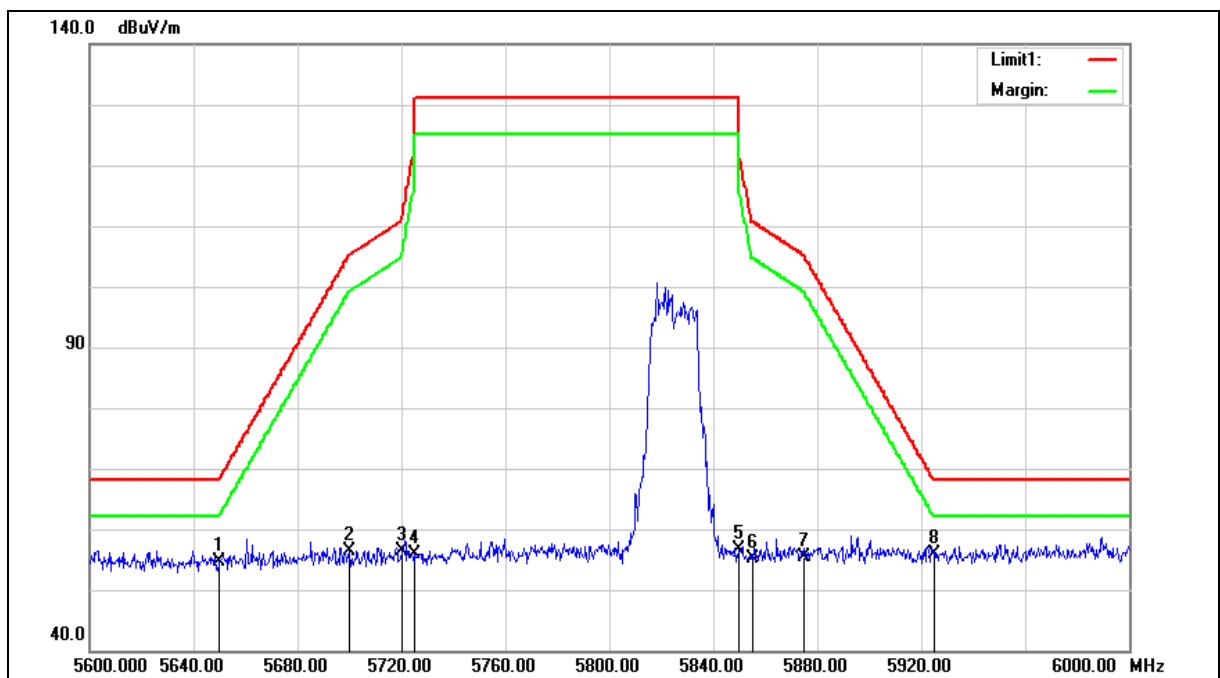



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.35	7.17	54.52	68.20	-13.68	peak
2	5700.000	49.19	7.27	56.46	105.20	-48.74	peak
3	5720.000	49.19	7.31	56.50	110.80	-54.30	peak
4	5725.000	48.58	7.32	55.90	122.20	-66.30	peak
5	5850.000	48.98	7.59	56.57	122.20	-65.63	peak
6	5855.000	47.64	7.60	55.24	110.80	-55.56	peak
7	5875.000	47.78	7.64	55.42	105.20	-49.78	peak
8	5925.000	48.25	7.75	56.00	68.20	-12.20	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

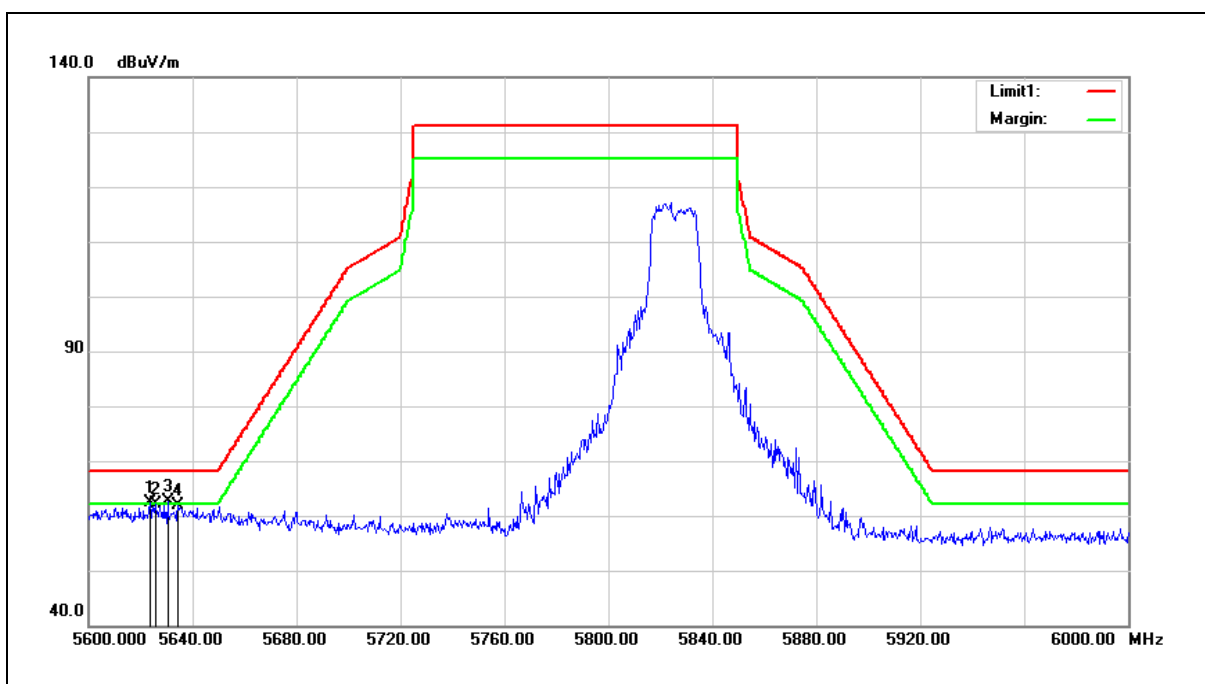

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5623.600	55.19	7.12	62.31	68.20	-5.89	peak
2	5625.600	54.91	7.12	62.03	68.20	-6.17	peak
3	5630.400	55.59	7.13	62.72	68.20	-5.48	peak
4	5634.400	54.67	7.15	61.82	68.20	-6.38	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

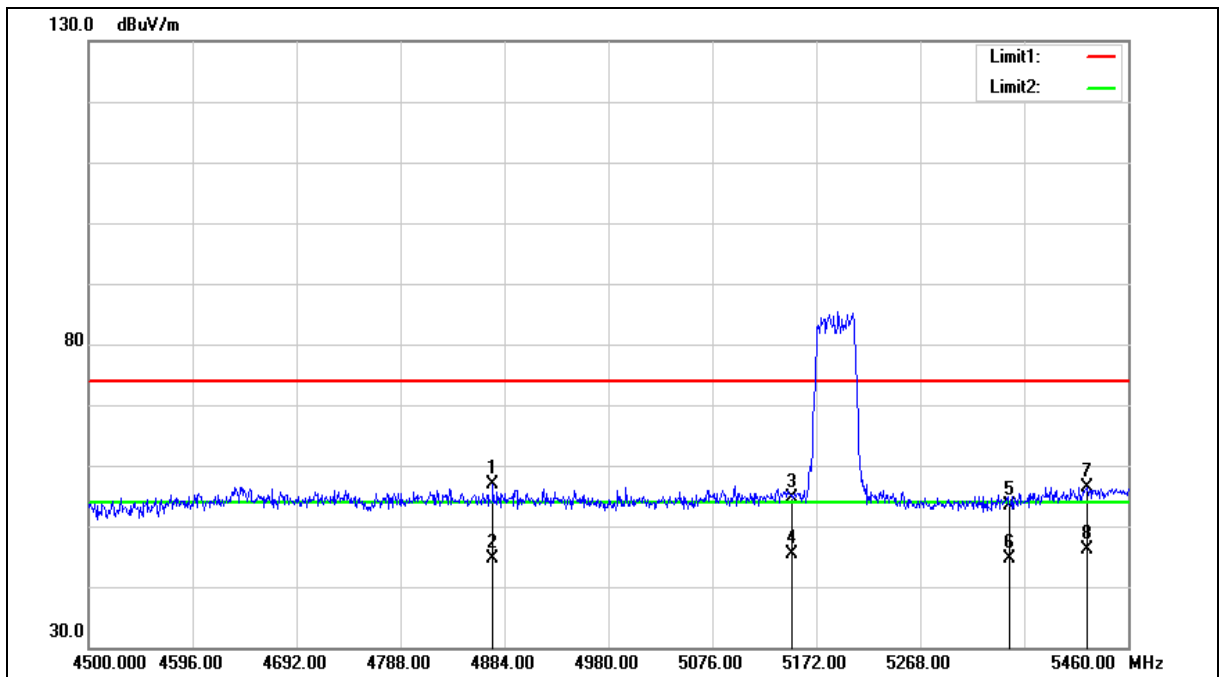





Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4873.440	51.39	5.47	56.86	74.00	-17.14	peak
2	4873.440	39.24	5.47	44.71	54.00	-9.29	AVG
3	5150.000	48.62	6.07	54.69	74.00	-19.31	peak
4	5150.000	39.29	6.07	45.36	54.00	-8.64	AVG
5	5350.000	46.87	6.52	53.39	74.00	-20.61	peak
6	5350.000	38.21	6.52	44.73	54.00	-9.27	AVG
7	5422.560	49.75	6.69	56.44	74.00	-17.56	peak
8	5422.560	39.47	6.69	46.16	54.00	-7.84	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

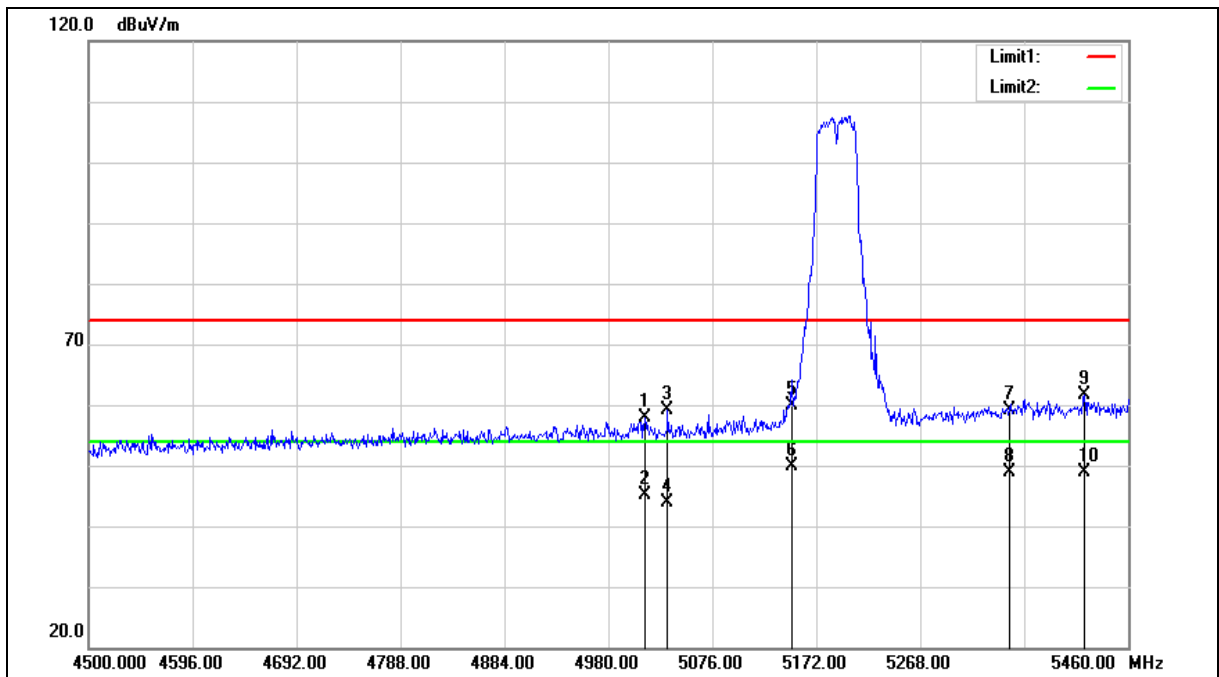



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5013.600	52.14	5.76	57.90	74.00	-16.10	peak
2	5013.600	39.49	5.76	45.25	54.00	-8.75	AVG
3	5034.720	53.39	5.80	59.19	74.00	-14.81	peak
4	5034.720	38.00	5.80	43.80	54.00	-10.20	AVG
5	5150.000	53.78	6.07	59.85	74.00	-14.15	peak
6	5150.000	43.74	6.07	49.81	54.00	-4.19	AVG
7	5350.000	52.69	6.52	59.21	74.00	-14.79	peak
8	5350.000	42.33	6.52	48.85	54.00	-5.15	AVG
9	5419.680	54.83	6.69	61.52	74.00	-12.48	peak
10	5419.680	42.10	6.69	48.79	54.00	-5.21	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

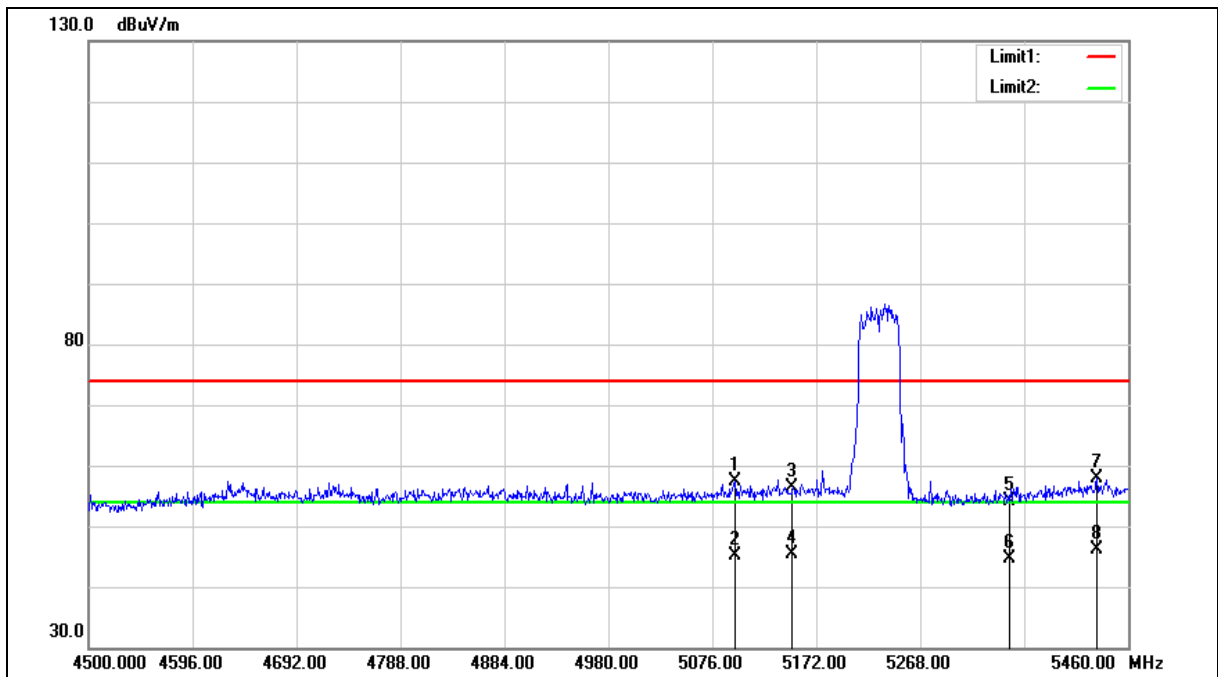



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5097.120	51.40	5.95	57.35	74.00	-16.65	peak
2	5097.120	39.25	5.95	45.20	54.00	-8.80	AVG
3	5150.000	50.27	6.07	56.34	74.00	-17.66	peak
4	5150.000	39.31	6.07	45.38	54.00	-8.62	AVG
5	5350.000	47.67	6.52	54.19	74.00	-19.81	peak
6	5350.000	38.19	6.52	44.71	54.00	-9.29	AVG
7	5431.200	51.06	6.71	57.77	74.00	-16.23	peak
8	5431.200	39.46	6.71	46.17	54.00	-7.83	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

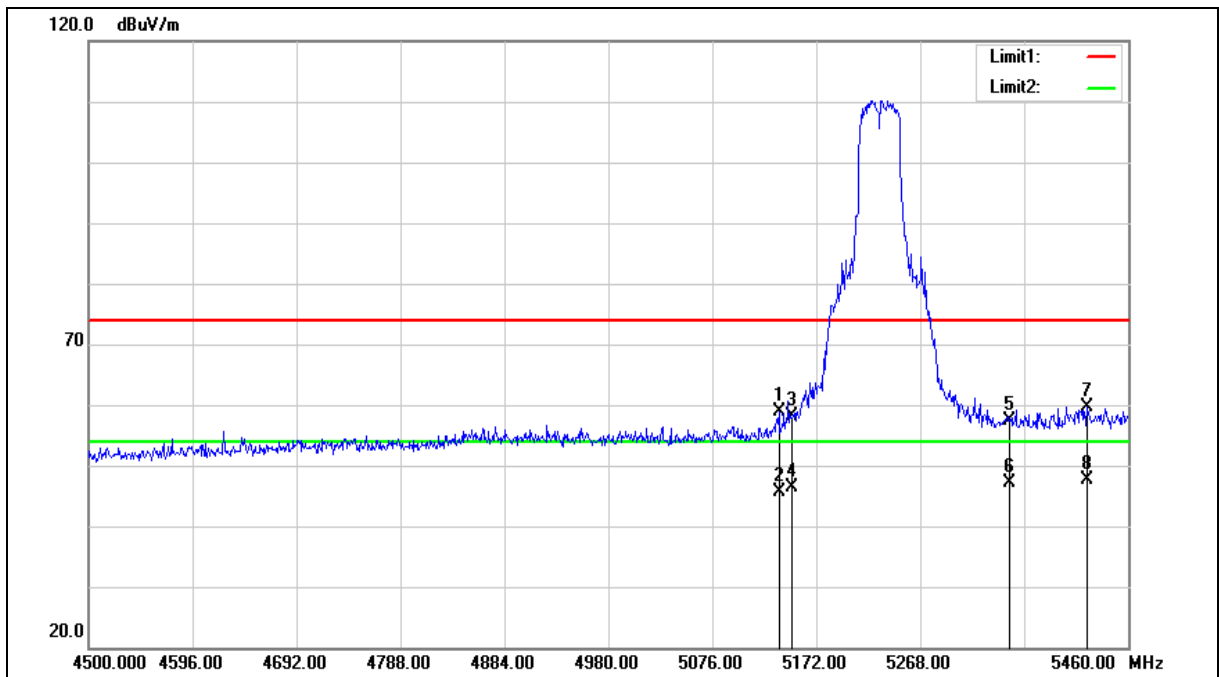



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5137.440	52.75	6.04	58.79	74.00	-15.21	peak
2	5137.440	39.47	6.04	45.51	54.00	-8.49	AVG
3	5150.000	52.04	6.07	58.11	74.00	-15.89	peak
4	5150.000	40.28	6.07	46.35	54.00	-7.65	AVG
5	5350.000	50.82	6.52	57.34	74.00	-16.66	peak
6	5350.000	40.52	6.52	47.04	54.00	-6.96	AVG
7	5421.600	52.98	6.69	59.67	74.00	-14.33	peak
8	5421.600	40.86	6.69	47.55	54.00	-6.45	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

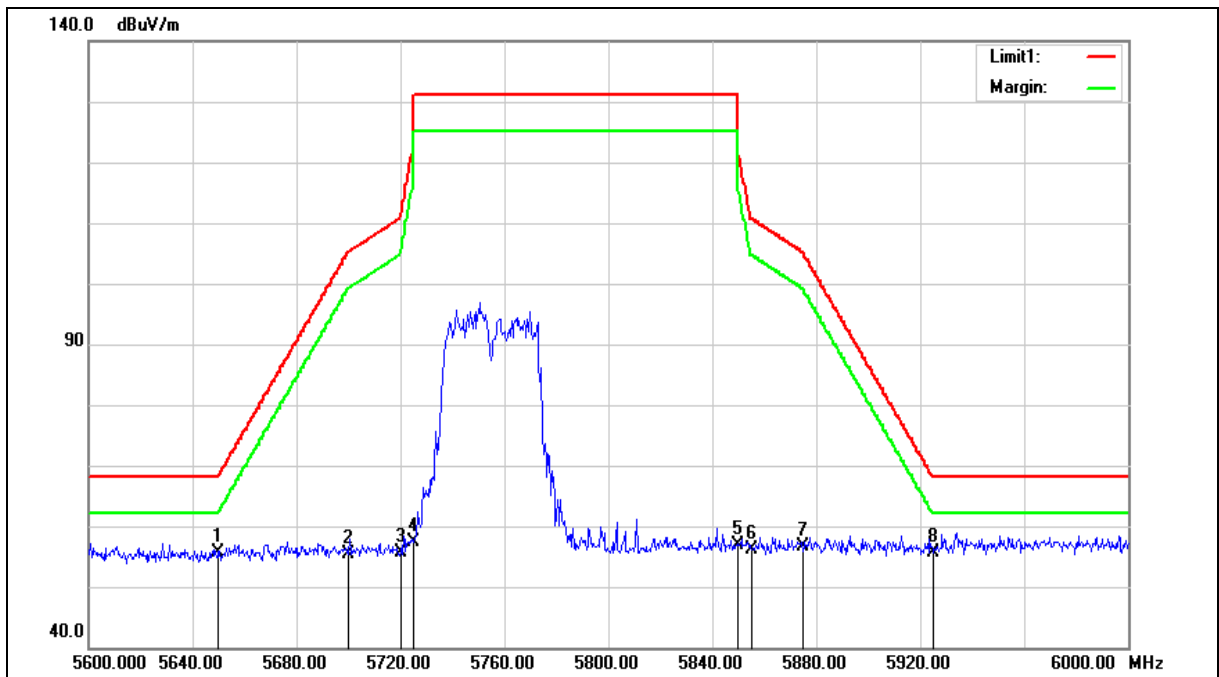





Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	48.58	7.17	55.75	68.20	-12.45	peak
2	5700.000	48.01	7.27	55.28	105.20	-49.92	peak
3	5720.000	48.29	7.31	55.60	110.80	-55.20	peak
4	5725.000	50.16	7.32	57.48	122.20	-64.72	peak
5	5850.000	49.29	7.59	56.88	122.20	-65.32	peak
6	5855.000	48.41	7.60	56.01	110.80	-54.79	peak
7	5875.000	48.92	7.64	56.56	105.20	-48.64	peak
8	5925.000	47.94	7.75	55.69	68.20	-12.51	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

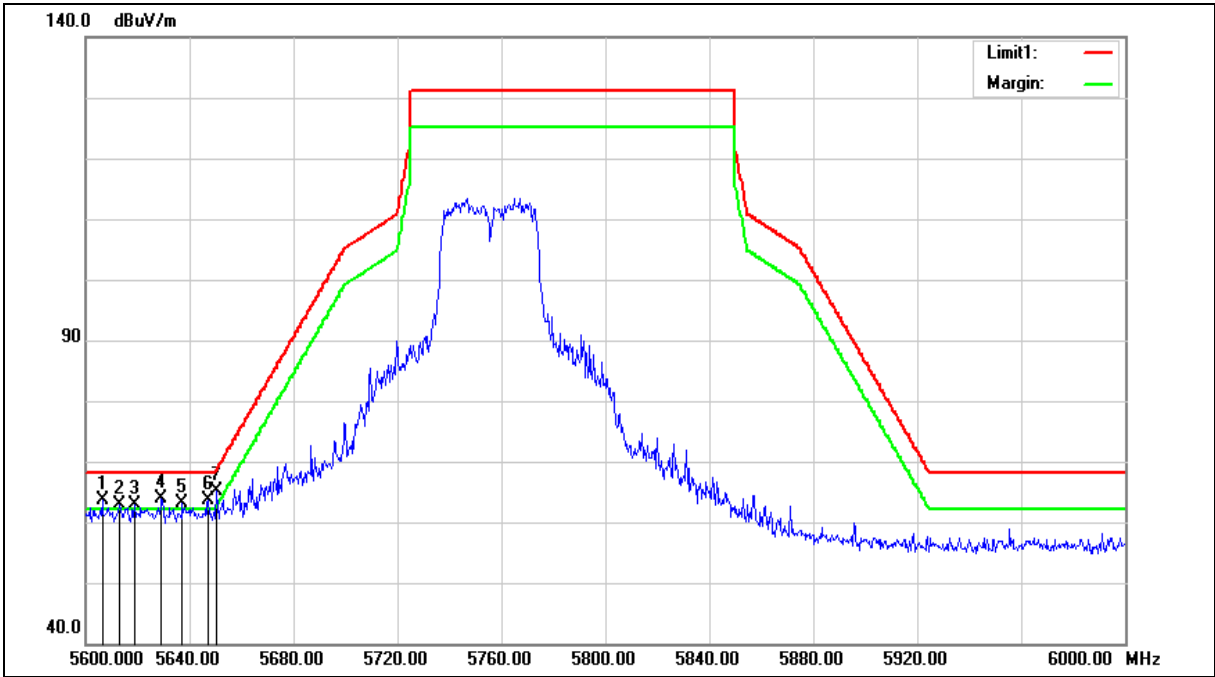



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5606.400	56.54	7.08	63.62	68.20	-4.58	peak
2	5612.800	55.75	7.10	62.85	68.20	-5.35	peak
3	5618.800	55.79	7.11	62.90	68.20	-5.30	peak
4	5629.200	56.68	7.13	63.81	68.20	-4.39	peak
5	5637.200	55.94	7.15	63.09	68.20	-5.11	peak
6	5647.200	56.53	7.17	63.70	68.20	-4.50	peak
7	5650.400	58.05	7.17	65.22	68.50	-3.28	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

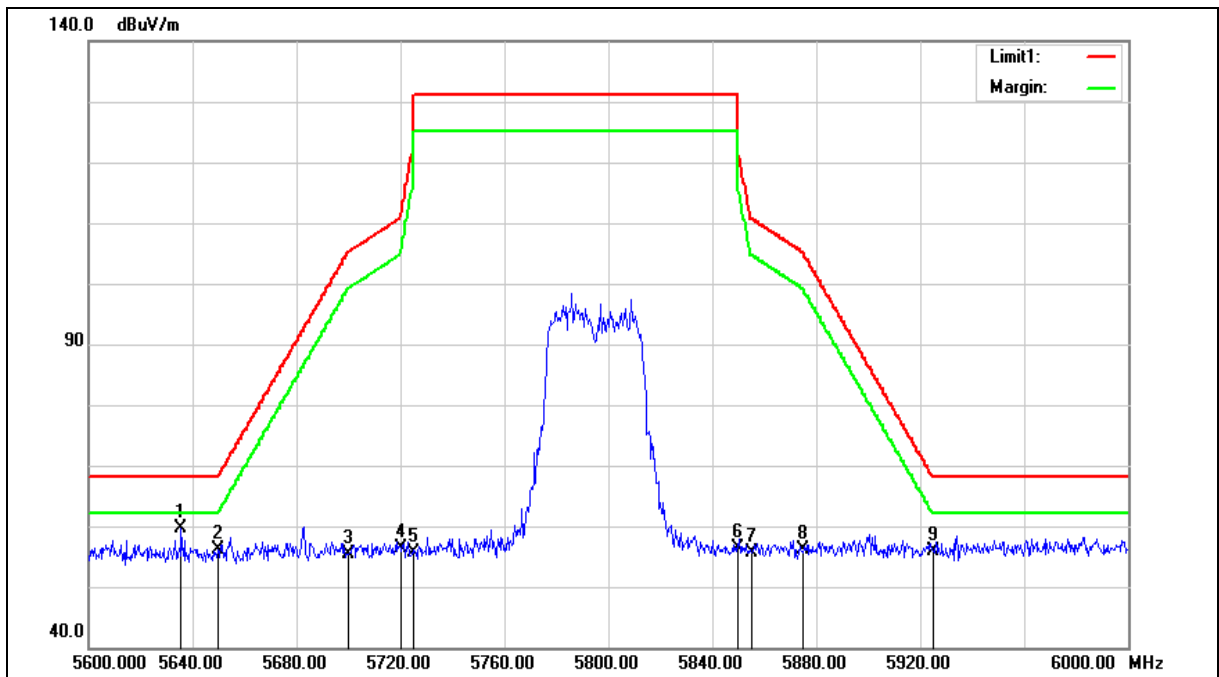



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5635.600	52.48	7.15	59.63	68.20	-8.57	peak
2	5650.000	48.88	7.17	56.05	68.20	-12.15	peak
3	5700.000	48.17	7.27	55.44	105.20	-49.76	peak
4	5720.000	49.14	7.31	56.45	110.80	-54.35	peak
5	5725.000	48.35	7.32	55.67	122.20	-66.53	peak
6	5850.000	48.74	7.59	56.33	122.20	-65.87	peak
7	5855.000	48.03	7.60	55.63	110.80	-55.17	peak
8	5875.000	48.61	7.64	56.25	105.20	-48.95	peak
9	5925.000	48.22	7.75	55.97	68.20	-12.23	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

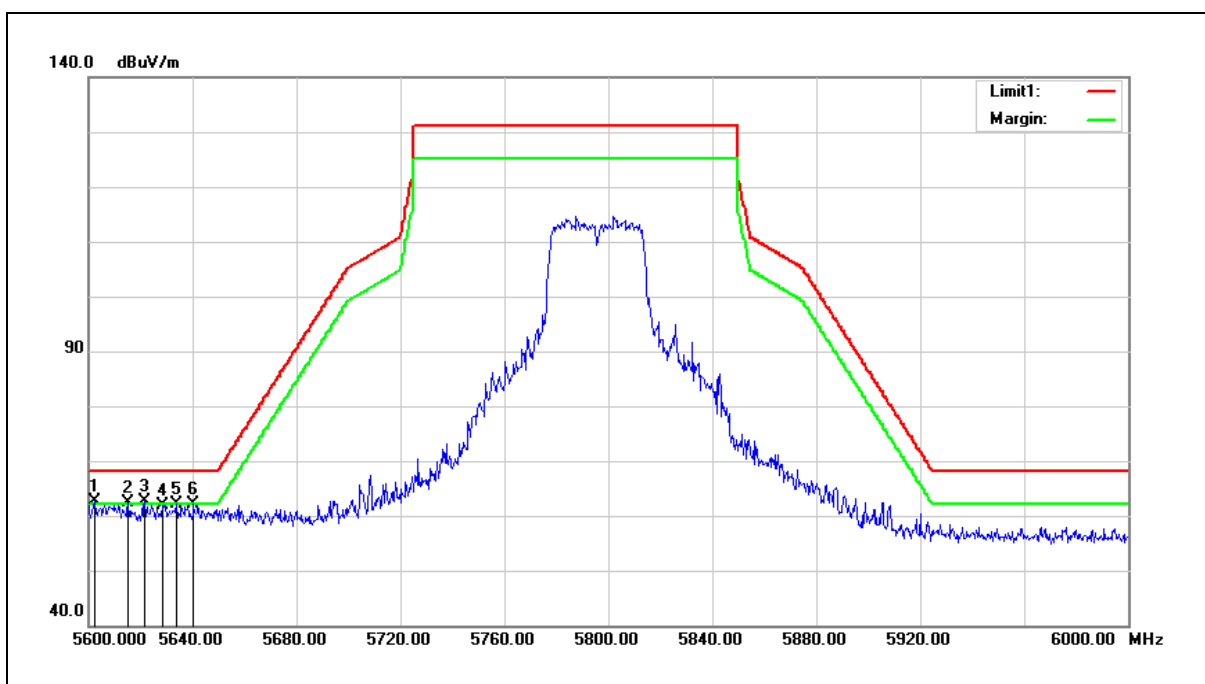

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5602.400	55.52	7.07	62.59	68.20	-5.61	peak
2	5615.200	55.21	7.10	62.31	68.20	-5.89	peak
3	5621.600	55.56	7.11	62.67	68.20	-5.53	peak
4	5628.400	54.86	7.13	61.99	68.20	-6.21	peak
5	5633.600	55.09	7.14	62.23	68.20	-5.97	peak
6	5640.400	54.98	7.15	62.13	68.20	-6.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.