


Test Mode: UNII-2A/TX A Mode_CH52/CH60/CH64_ANT2


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	35.49	19.80
CH60	5300	35.59	19.00
CH64	5320	33.00	18.40

TX CH52

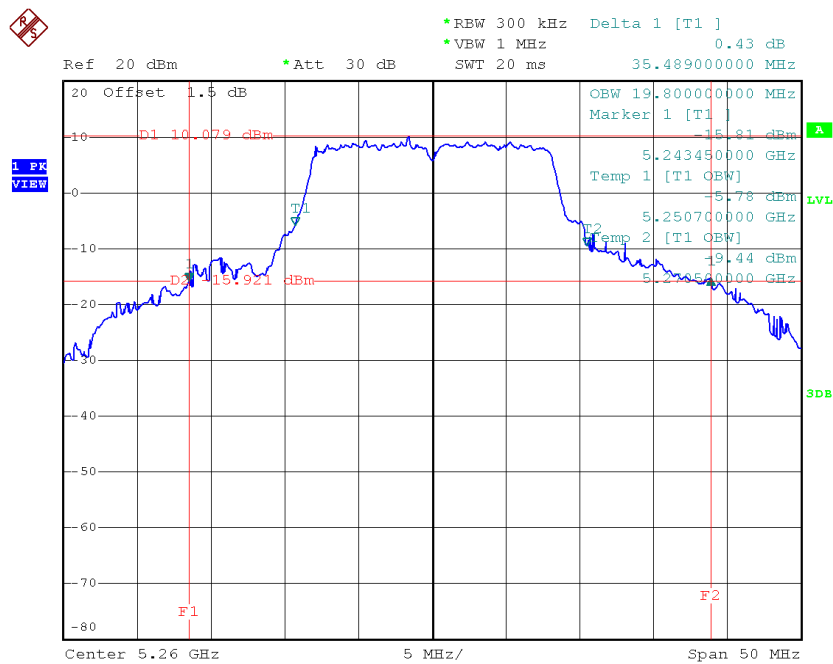


Date: 18.JUN.2016 17:24:41

TX CH60

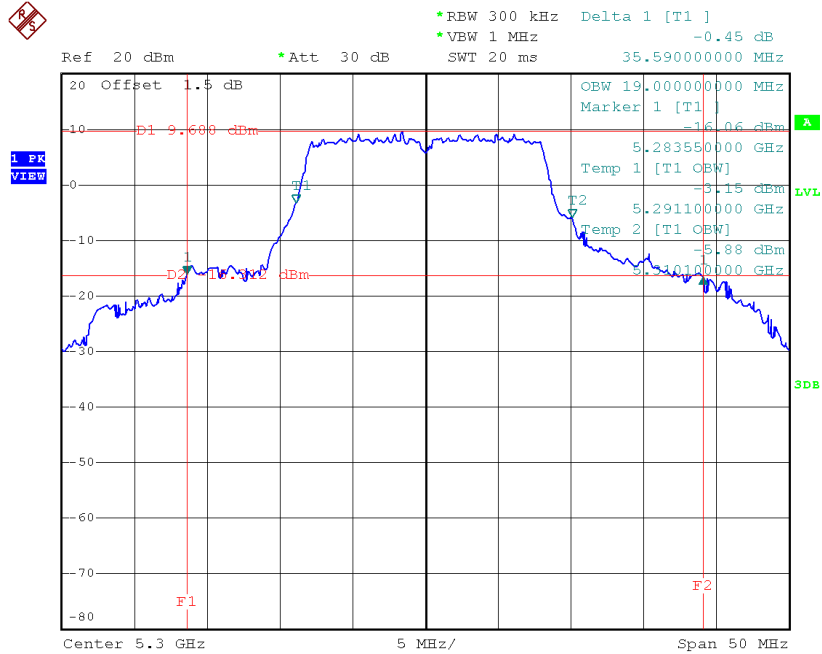

Date: 18.JUN.2016 17:30:14

TX CH64

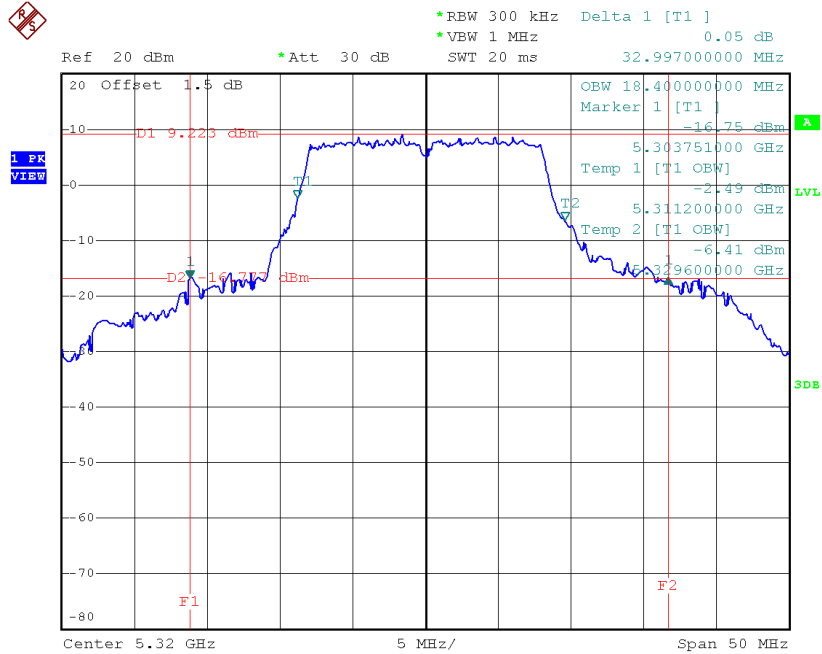


Date: 18.JUN.2016 17:31:07

Remark: This test data is from original report BTL-FCCP-4-1602C038.

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	22.29	18.40
CH60	5300	22.05	18.40
CH64	5320	22.05	18.40

TX CH52

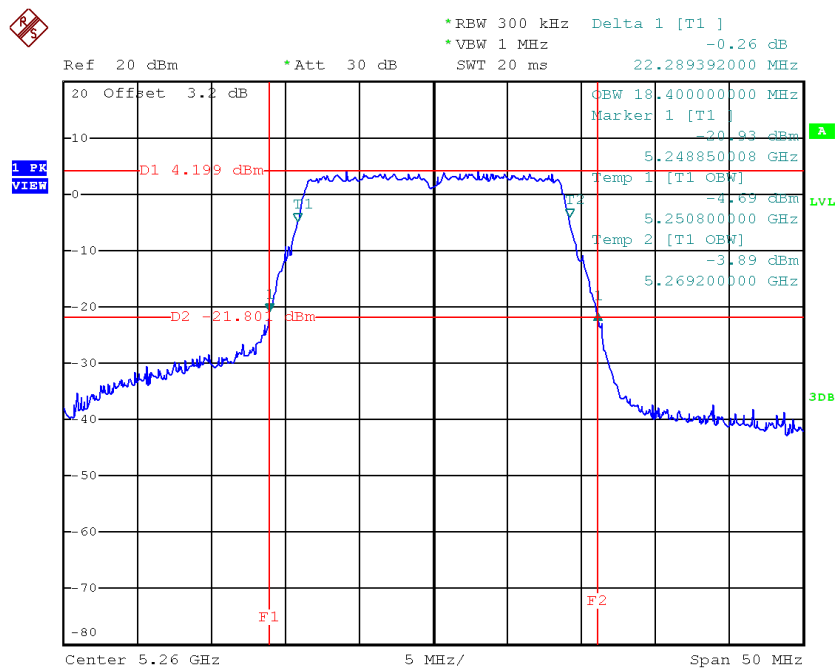


Date: 3.APR.2018 12:14:17

TX CH60

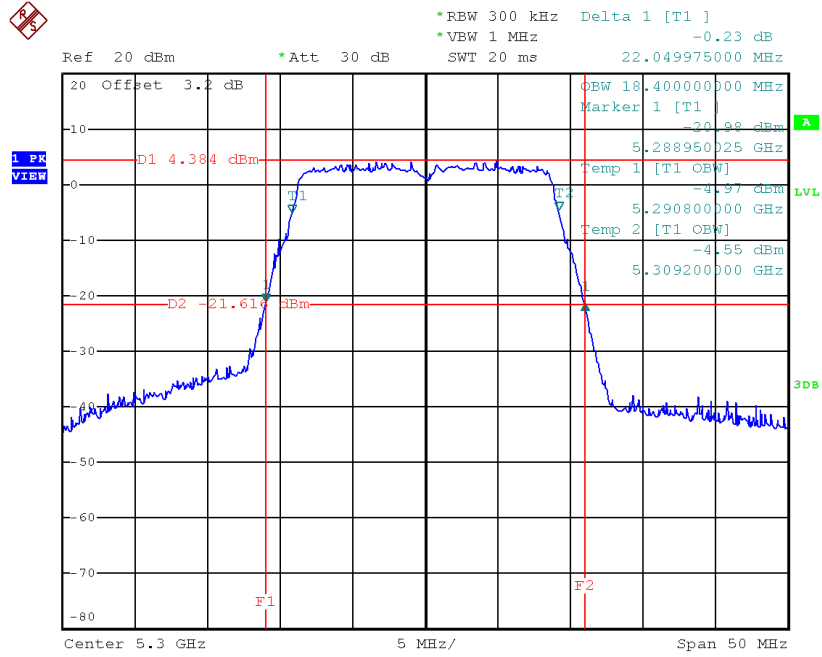

Date: 3.APR.2018 12:15:38

TX CH64

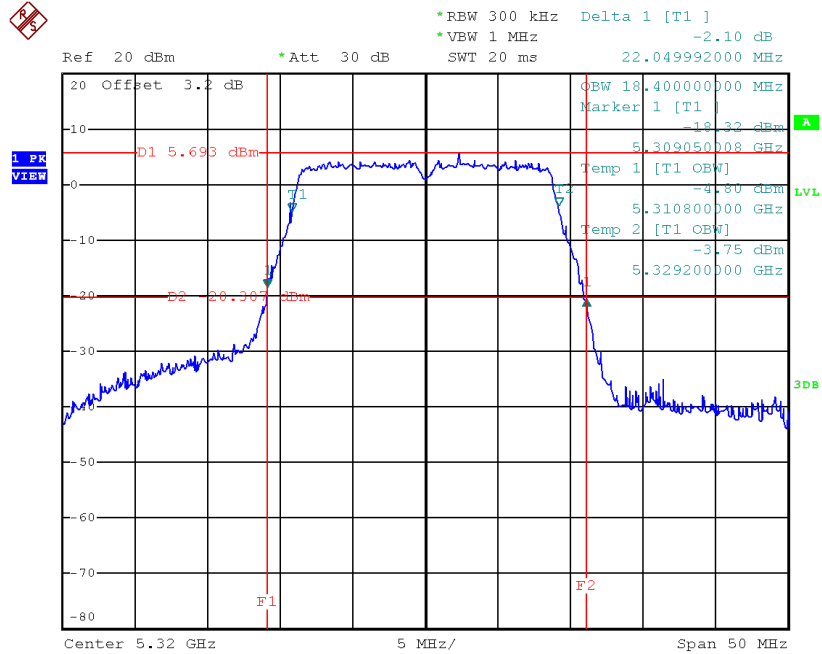


Date: 3.APR.2018 12:16:56

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	57.79	37.20
CH62	5310	41.50	36.80

TX CH54

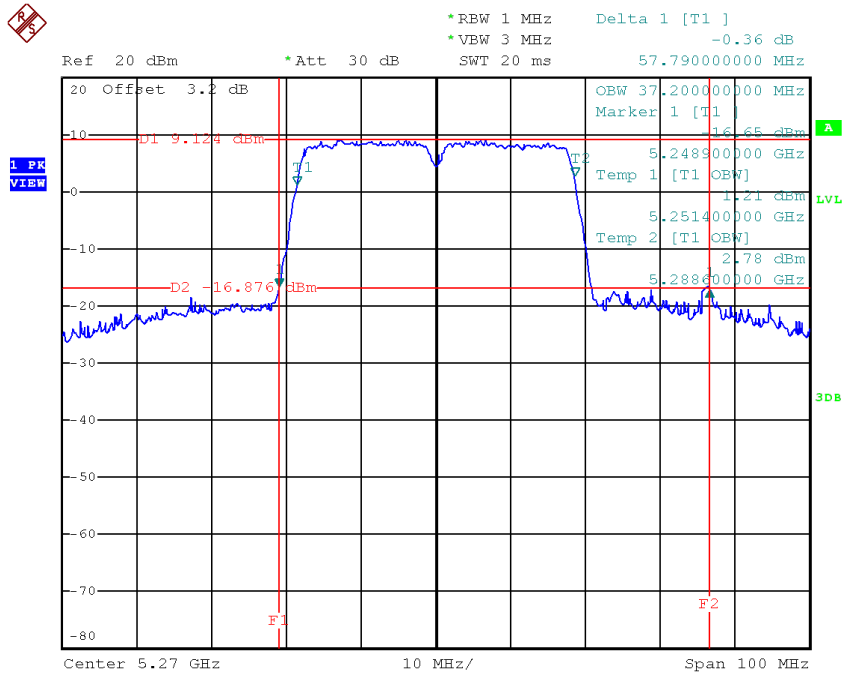

Date: 3.APR.2018 12:56:56

TX CH62

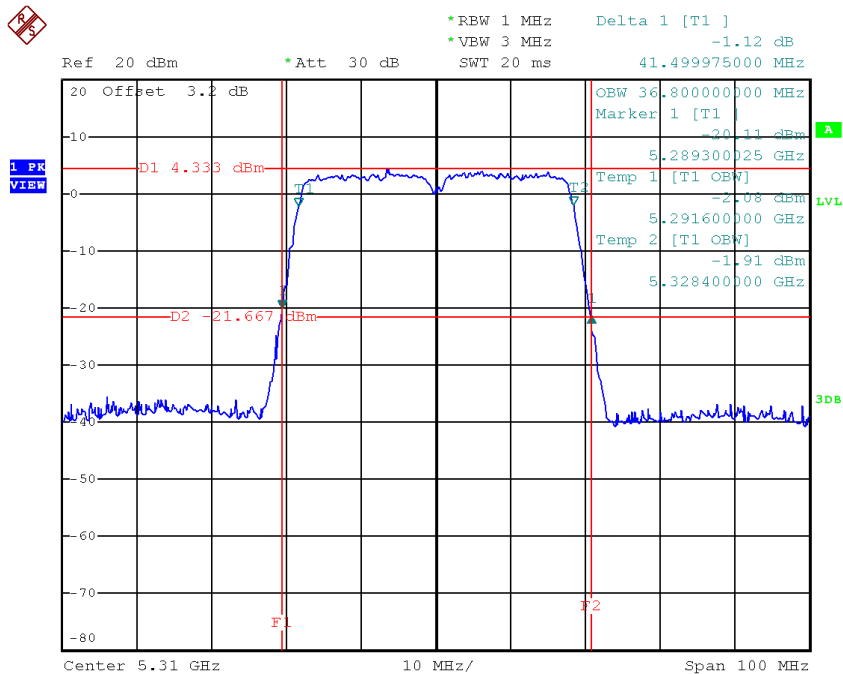


Date: 3.APR.2018 12:58:11

Test Mode: UNII-2C/TX A Mode_CH100/CH116/CH140_ANT1


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	21.80	17.40
CH116	5580	41.55	22.40
CH140	5700	22.01	17.50

TX CH100

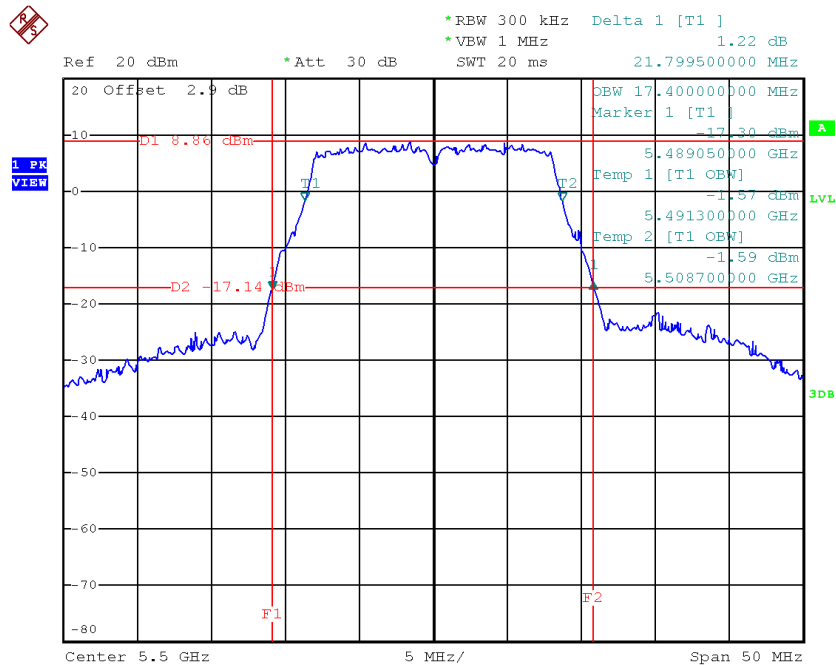


Date: 3.APR.2018 11:56:49

TX CH116

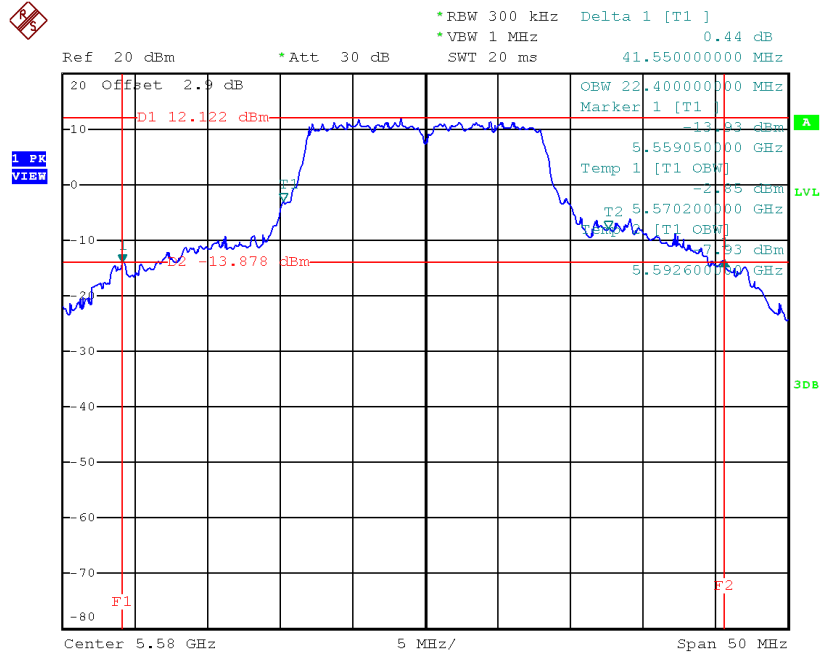

Date: 3.APR.2018 11:58:10

TX CH140

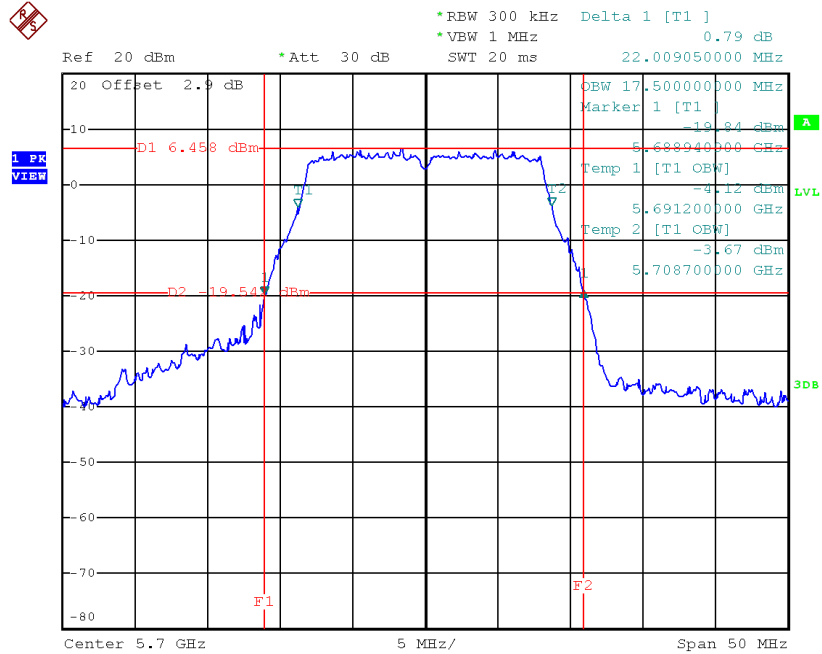


Date: 3.APR.2018 11:59:26

Test Mode: UNII-2C/TX A Mode_CH100/CH116/CH140_ANT2


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	31.29	17.90
CH116	5580	42.00	26.40
CH140	5700	23.71	17.70

TX CH100

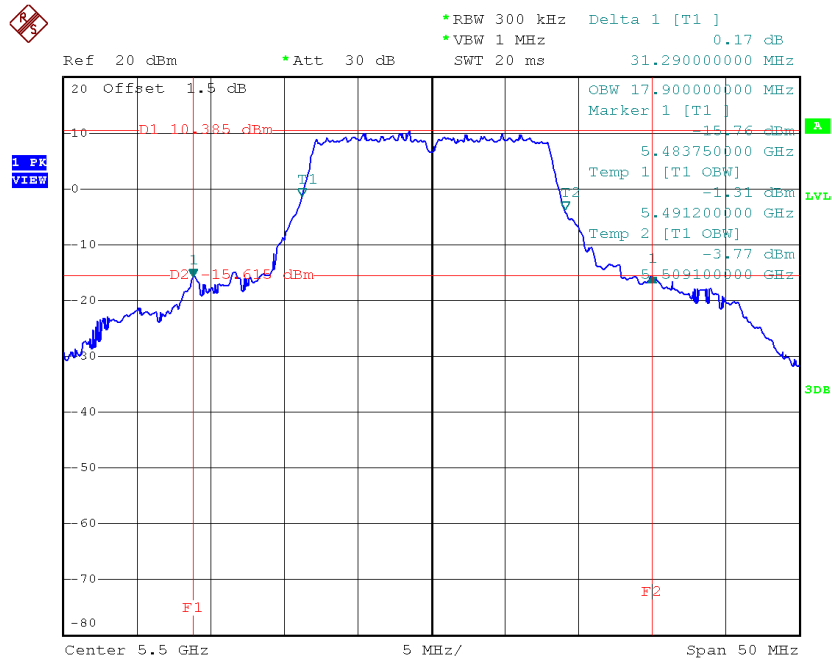


Date: 18.JUN.2016 17:34:21

TX CH116

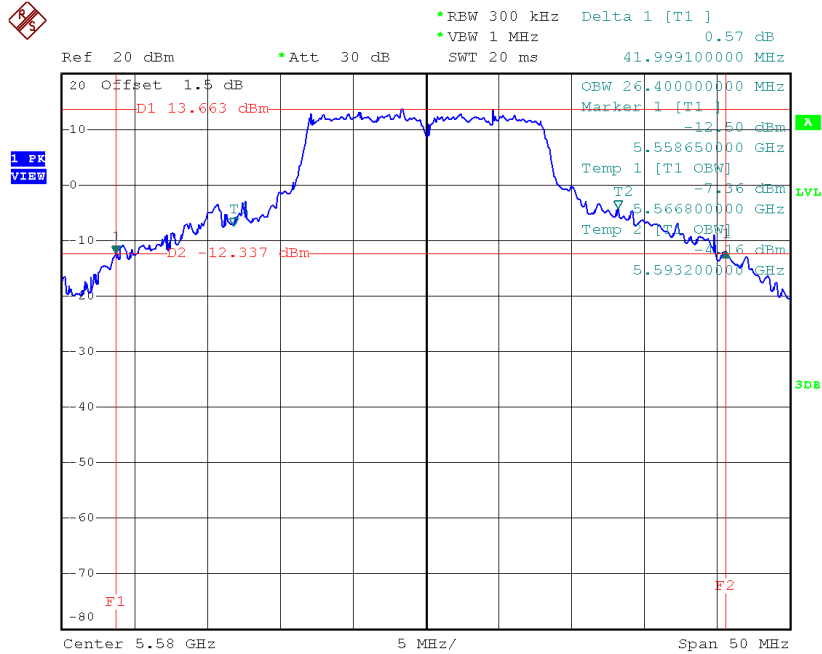

Date: 18.JUN.2016 17:35:59

TX CH140

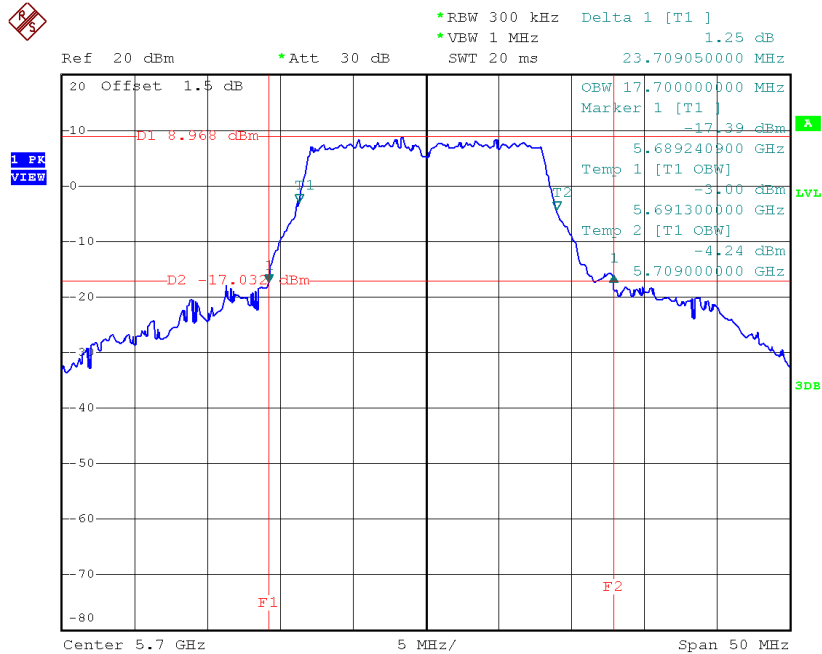


Date: 18.JUN.2016 17:38:39

Remark: This test data is from original report BTL-FCCP-4-1602C038.

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	22.15	18.30
CH116	5580	22.25	18.40
CH140	5700	22.25	18.40

TX CH100

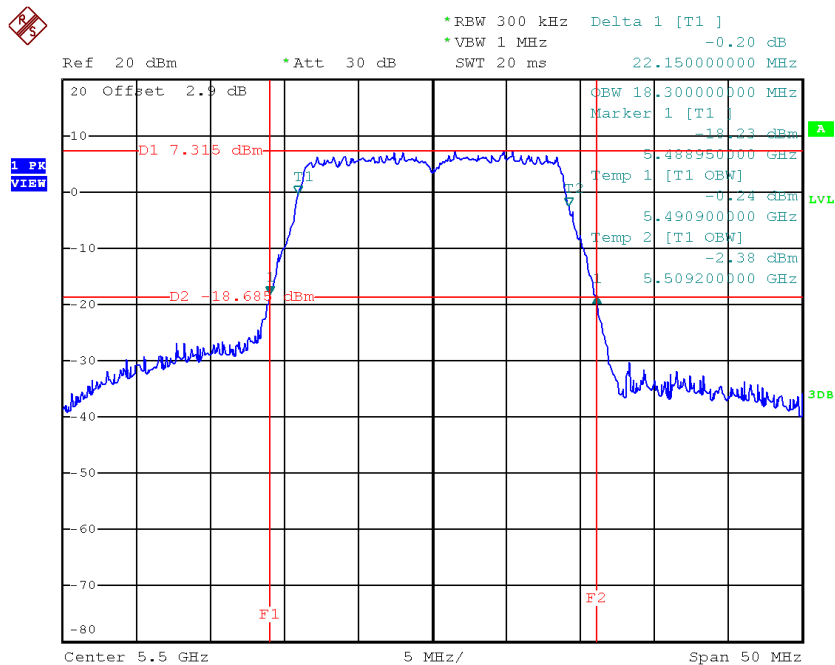


Date: 3.APR.2018 12:19:14

TX CH116

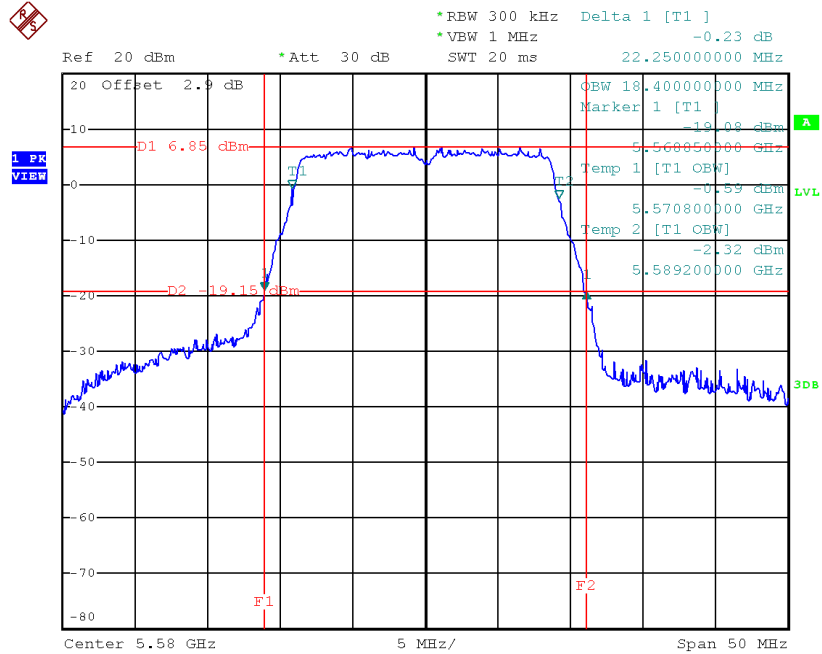

Date: 3.APR.2018 12:20:18

TX CH140

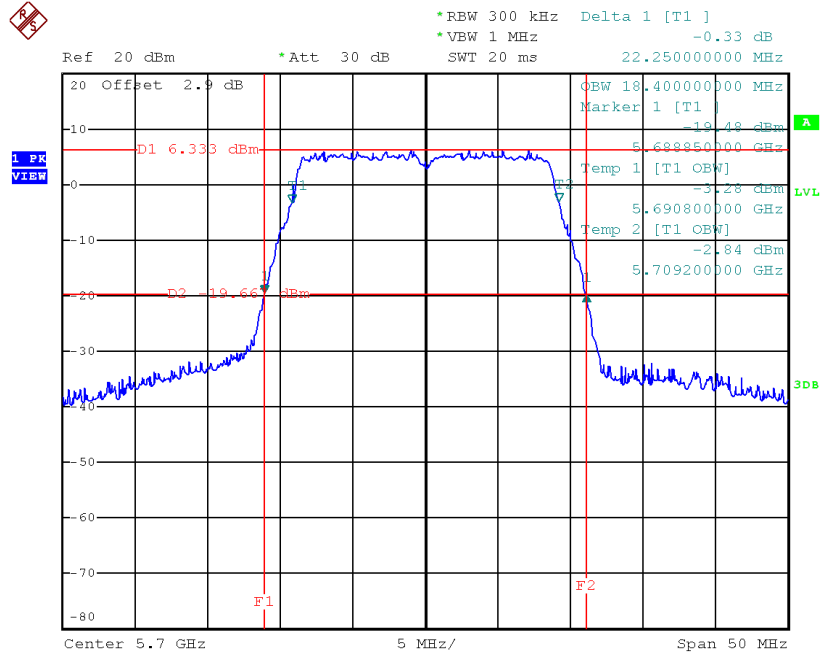


Date: 3.APR.2018 12:21:42

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	41.51	37.00
CH110	5550	58.79	37.40
CH134	5670	76.00	37.80

TX CH102

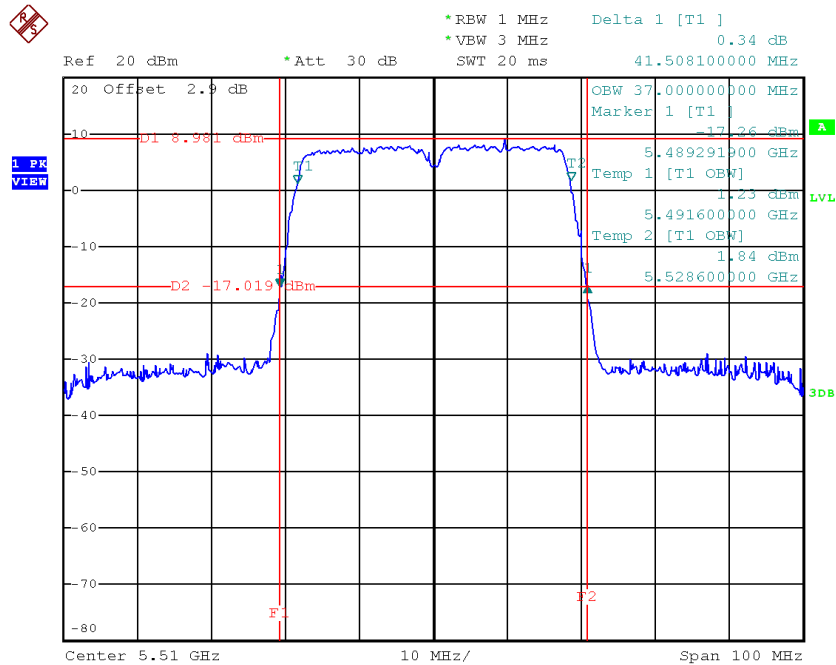


Date: 3.APR.2018 14:57:54

TX CH110

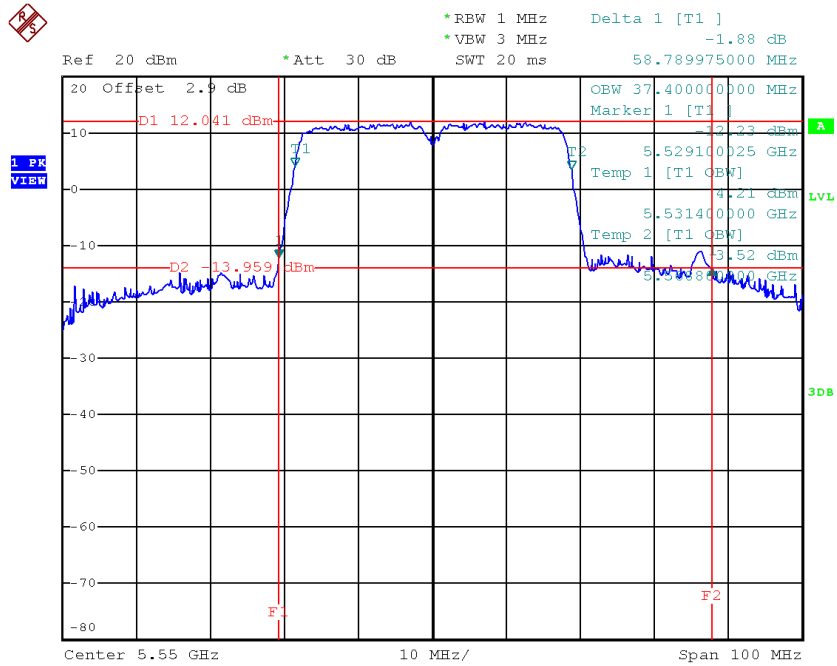

Date: 3.APR.2018 15:03:41

TX CH134

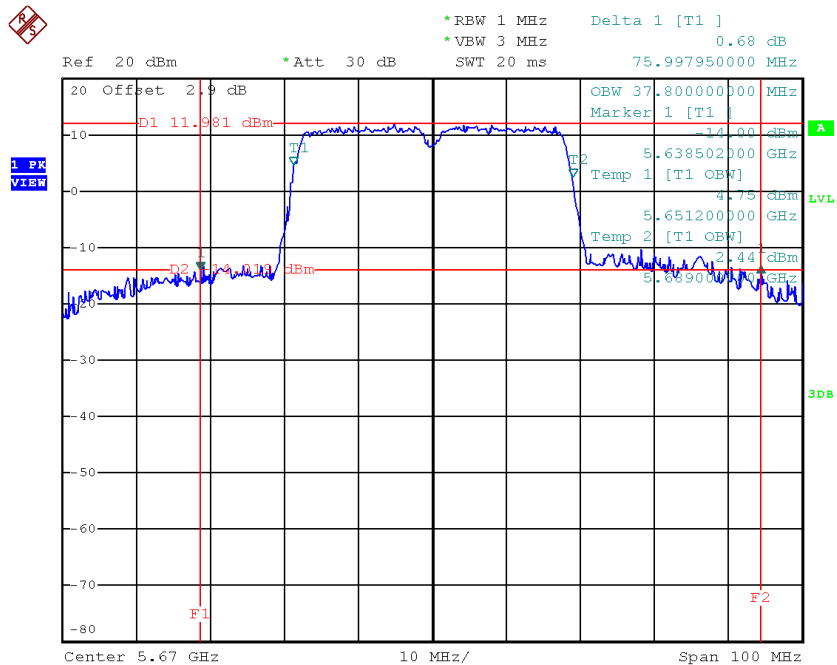


Date: 3.APR.2018 15:07:57

Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165_ANT1


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.35	26.50	>=500
CH157	5785	16.45	28.70	>=500
CH165	5825	16.45	30.00	>=500

TX CH 149

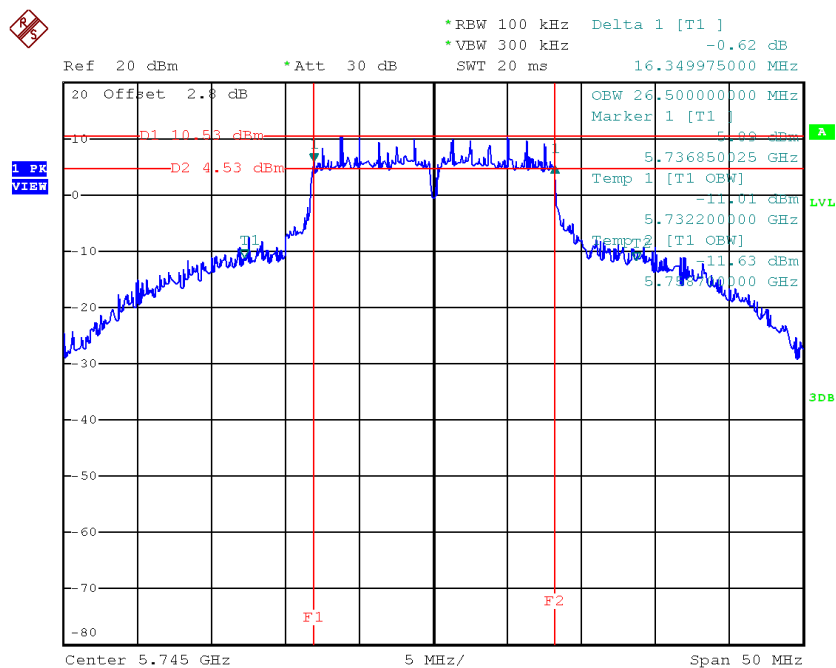


Date: 3.APR.2018 12:01:10

TX CH 157

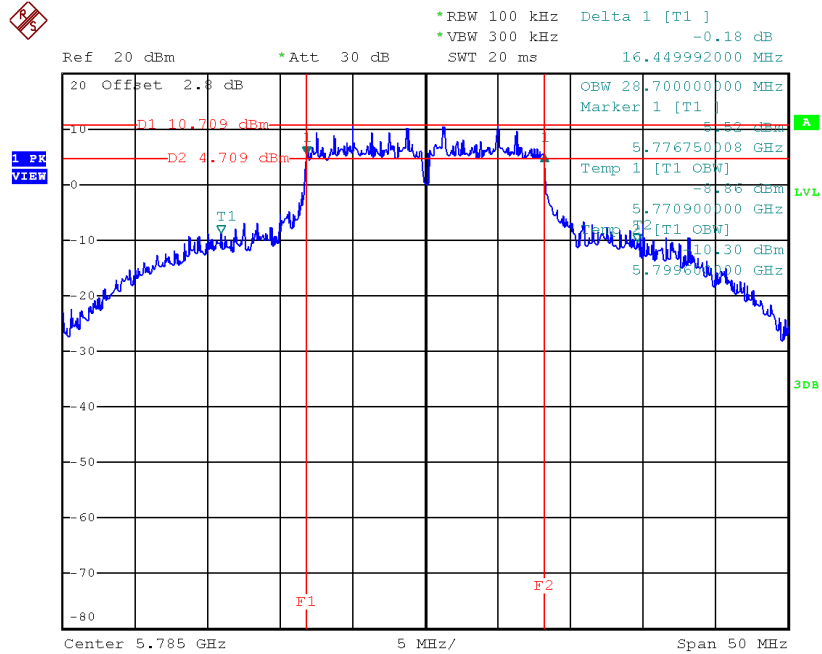

Date: 3.APR.2018 12:02:28

TX CH 165

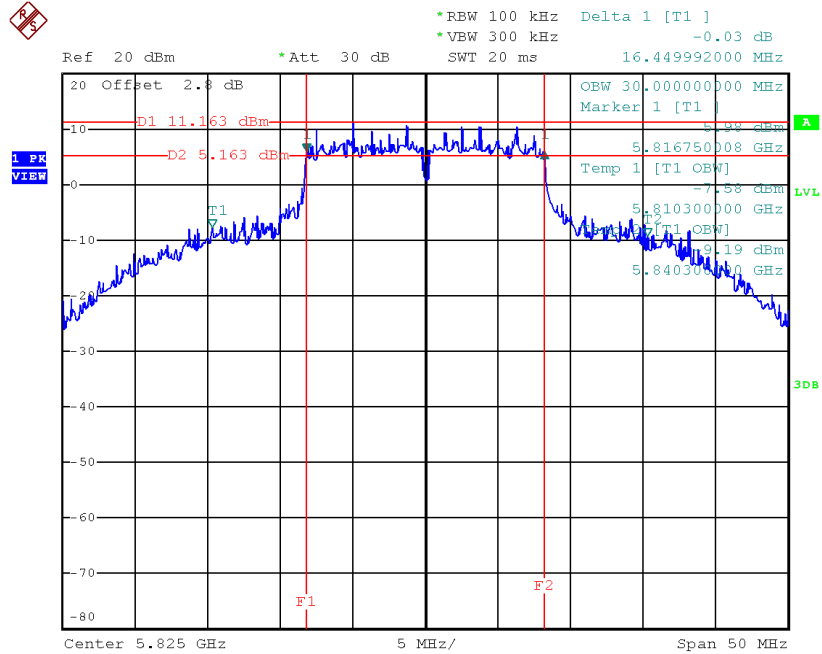


Date: 3.APR.2018 12:03:26

Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165_ANT2


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.35	32.90	>=500
CH157	5785	16.41	33.30	>=500
CH165	5825	16.35	34.30	>=500

TX CH 149

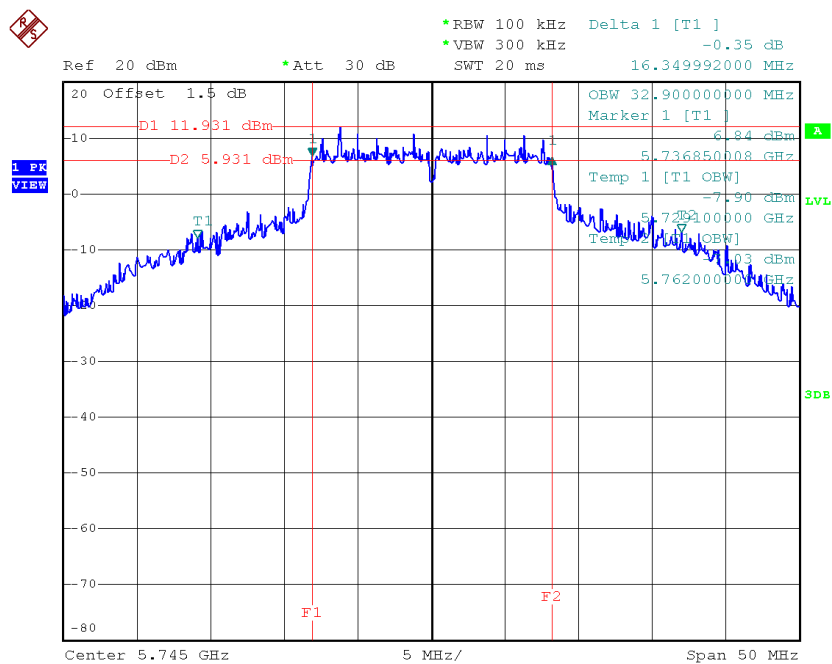


Date: 18.JUN.2016 17:39:35

TX CH 157

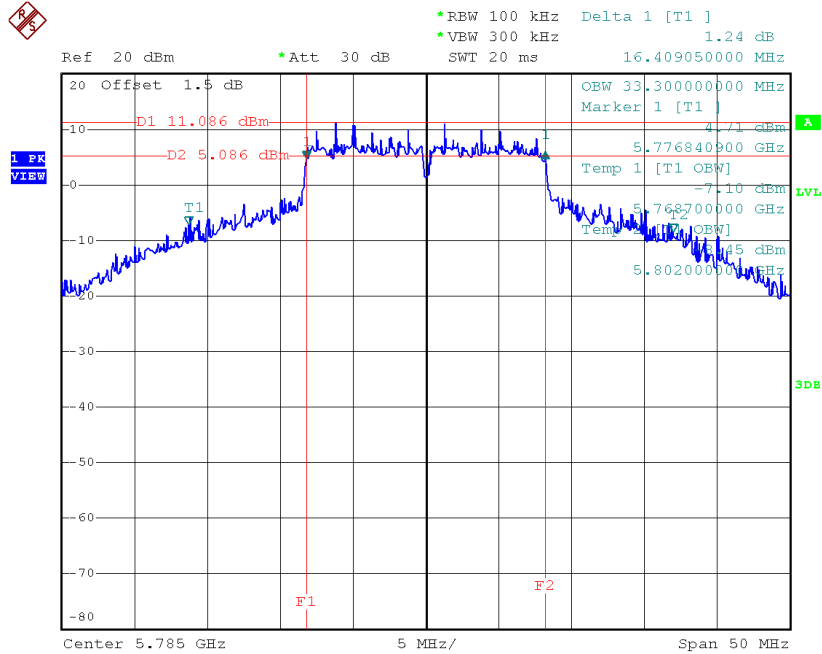

Date: 18.JUN.2016 17:42:39

TX CH 165

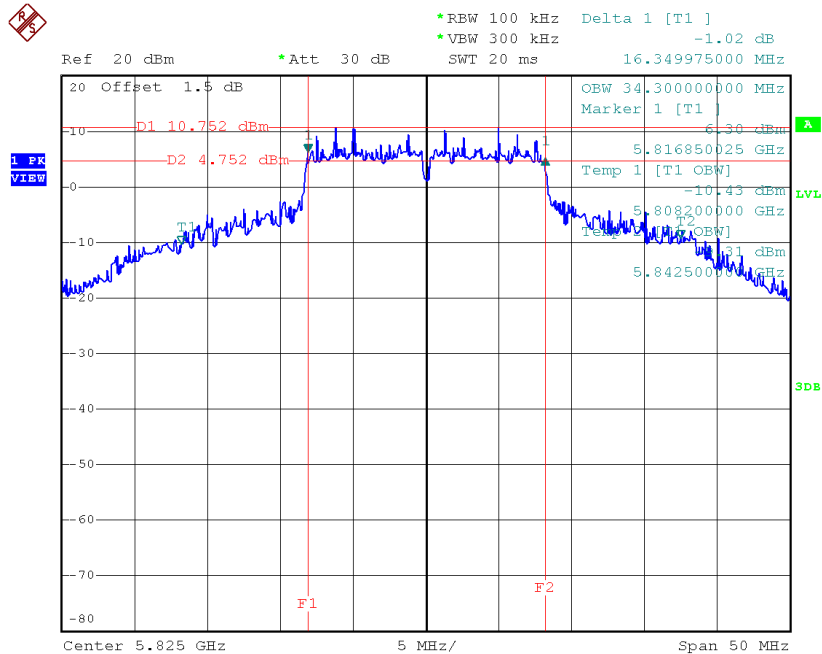


Date: 18.JUN.2016 17:43:55

Remark: This test data is from original report BTL-FCCP-4-1602C038.

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.55	30.00	>=500
CH157	5785	17.55	31.90	>=500
CH165	5825	17.59	30.50	>=500

TX CH 149

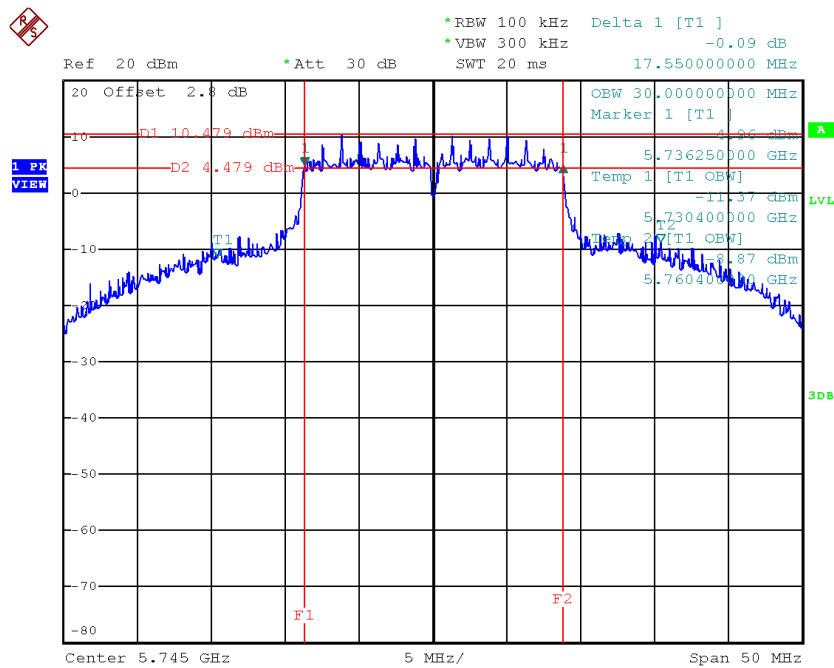


Date: 3.APR.2018 12:23:36

TX CH 157

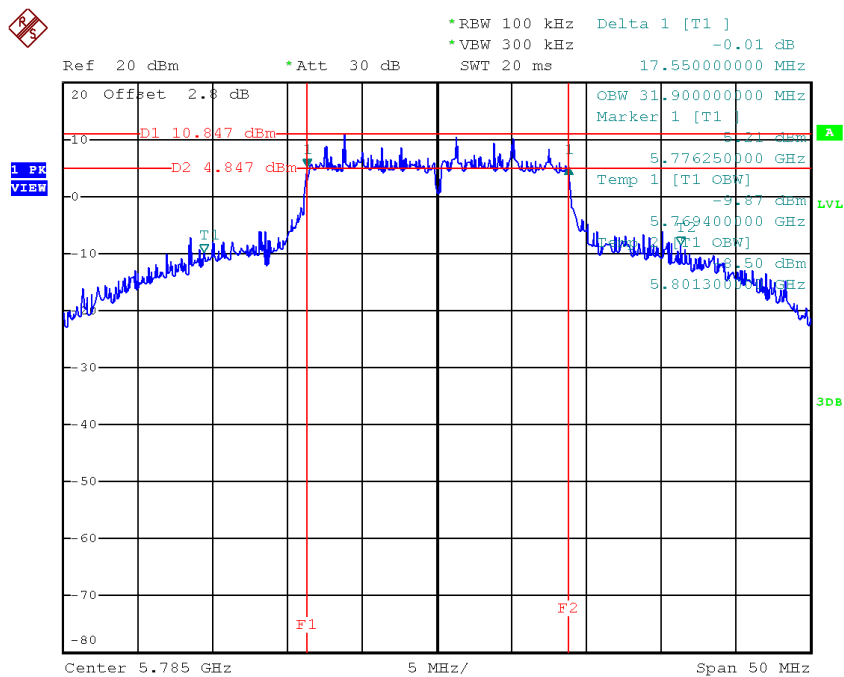

Date: 3.APR.2018 12:24:53

TX CH 165

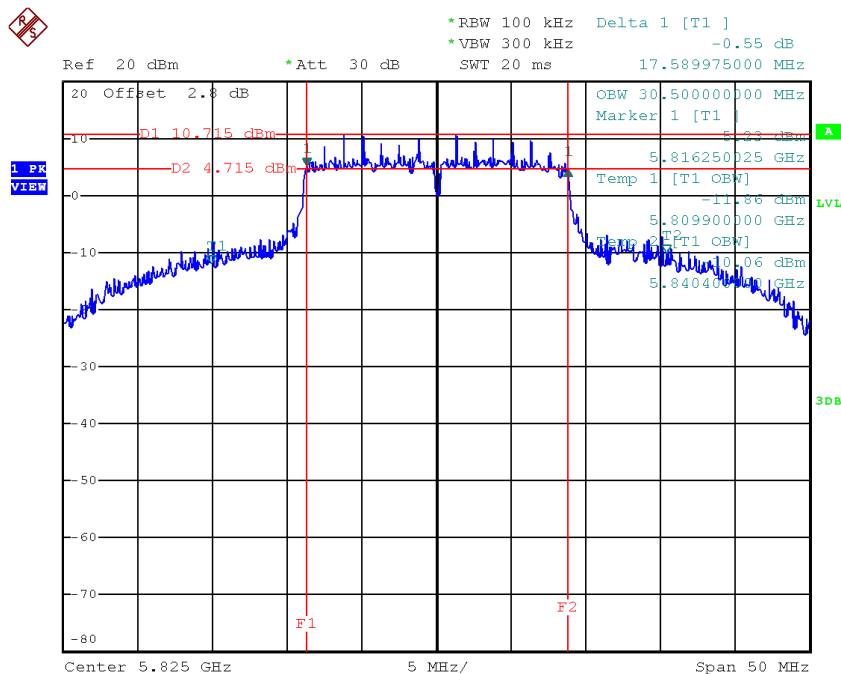


Date: 3.APR.2018 12:28:18

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.50	68.40	≥ 500
CH159	5795	36.50	66.80	≥ 500

TX CH 151

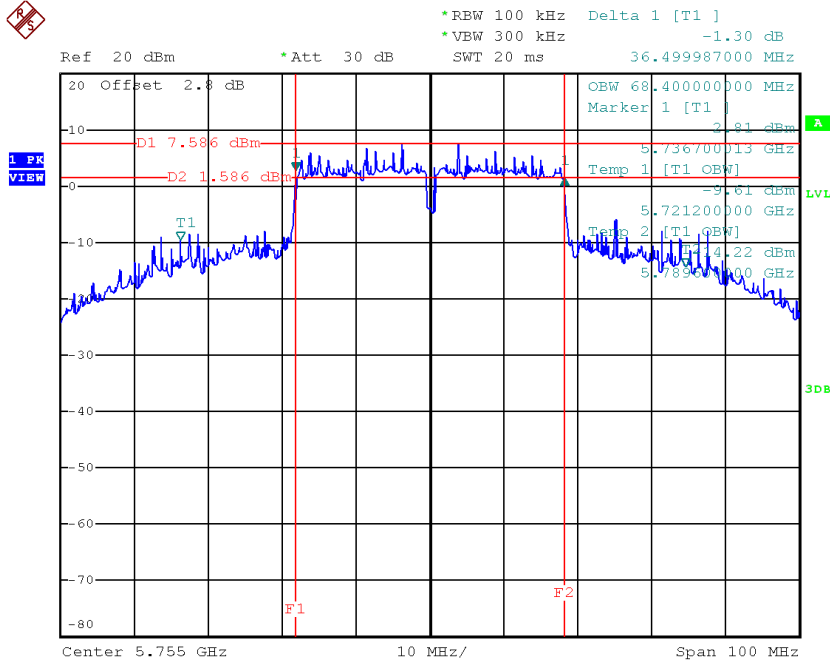

Date: 3.APR.2018 15:10:55

TX CH 159

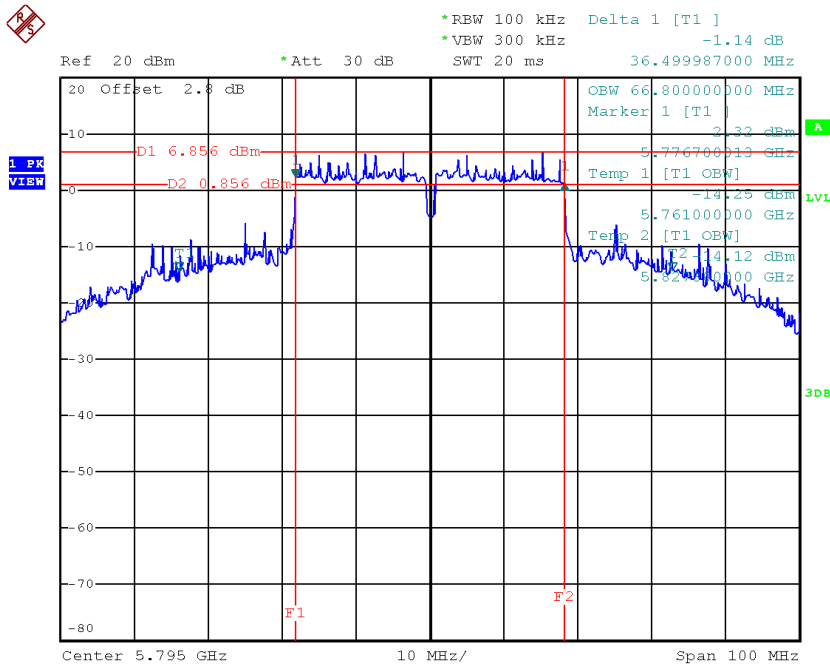


Date: 3.APR.2018 15:12:26

Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	22.35	18.30
CH40	5200	22.15	18.40
CH48	5240	22.16	18.40

TX CH36

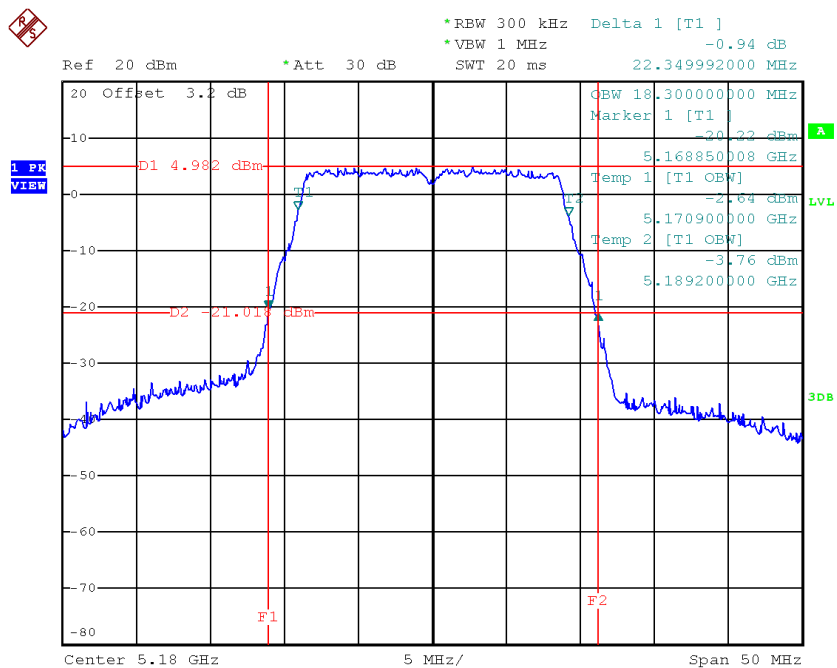


Date: 3.APR.2018 12:33:22

TX CH40

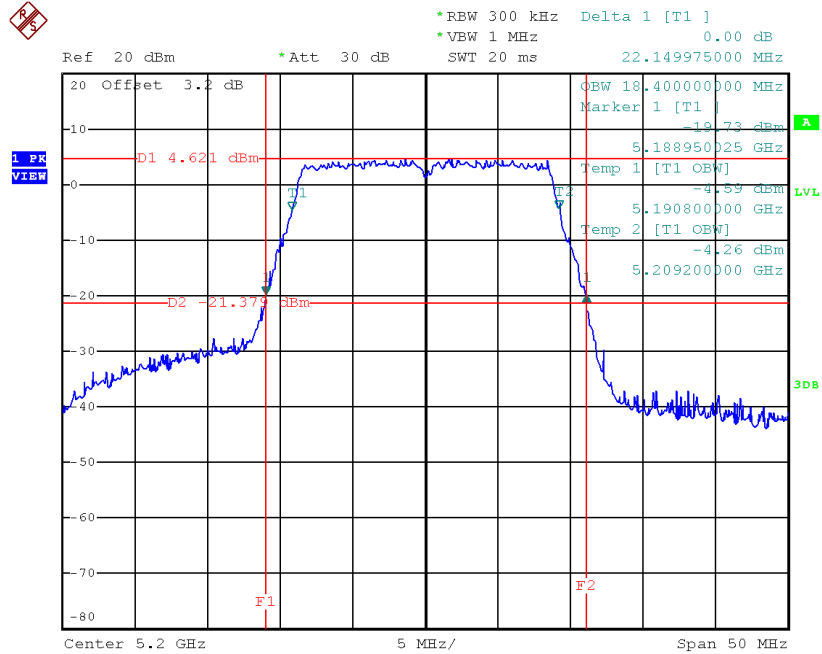

Date: 3.APR.2018 12:35:01

TX CH48

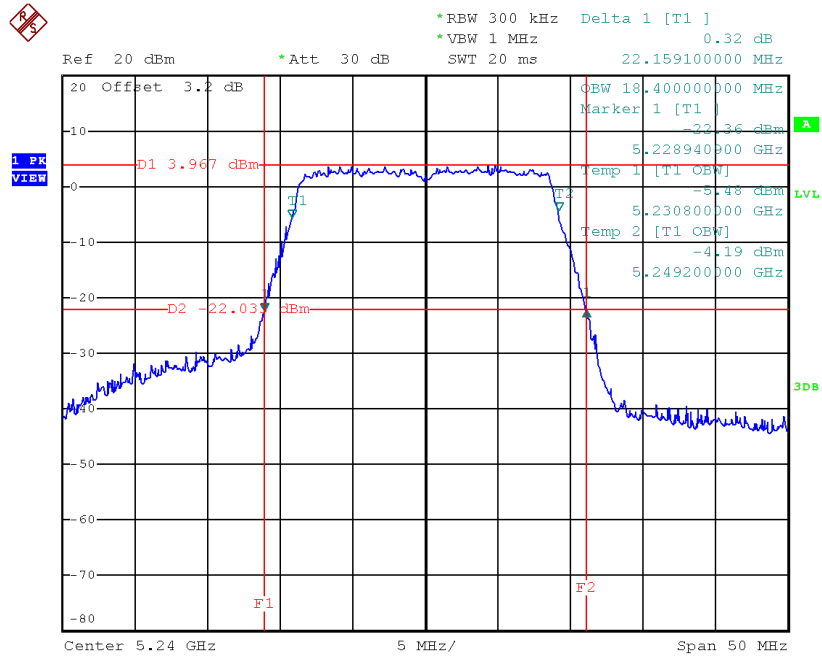


Date: 3.APR.2018 12:36:56

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	41.80	37.00
CH46	5230	54.40	37.40

TX CH38

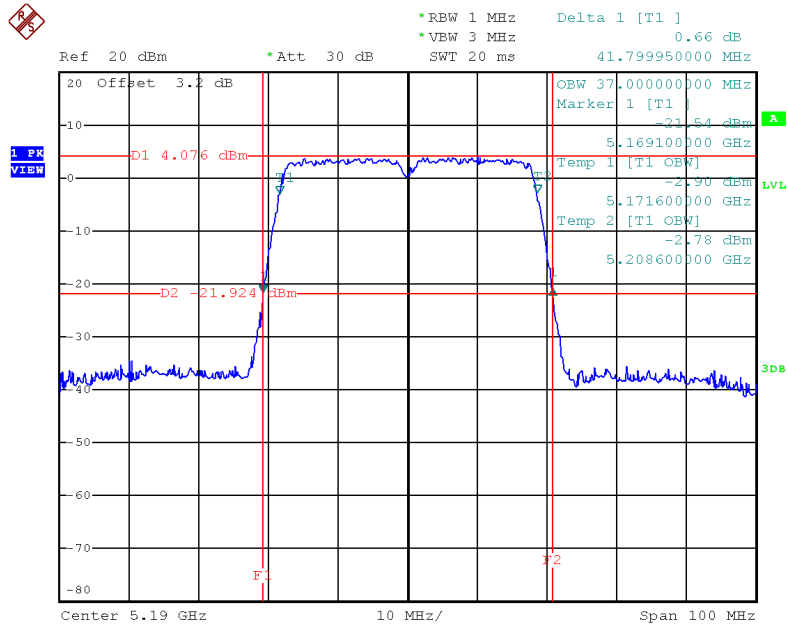

Date: 3.APR.2018 15:15:56

TX CH46

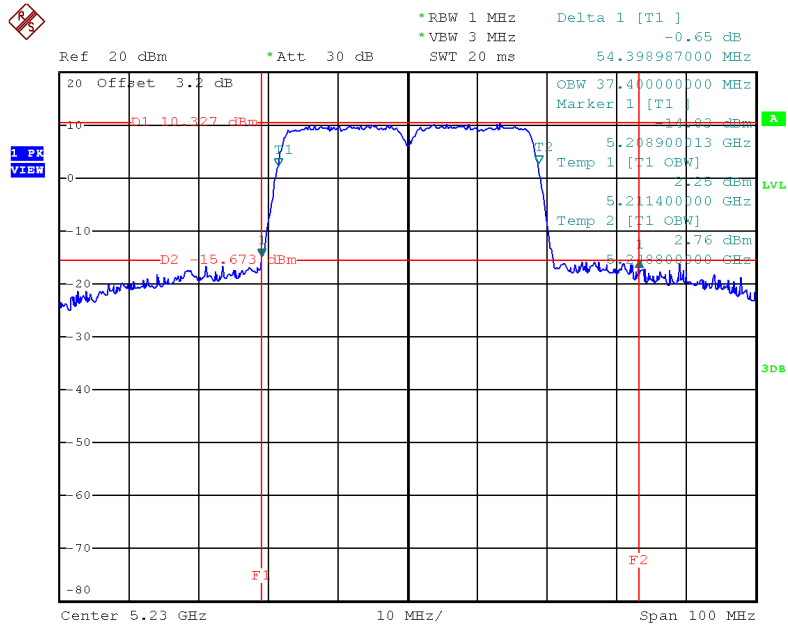


Date: 3.APR.2018 15:19:43

Test Mode: UNII-1/TX AC80 Mode_CH42

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	82.60	76.00

TX CH42

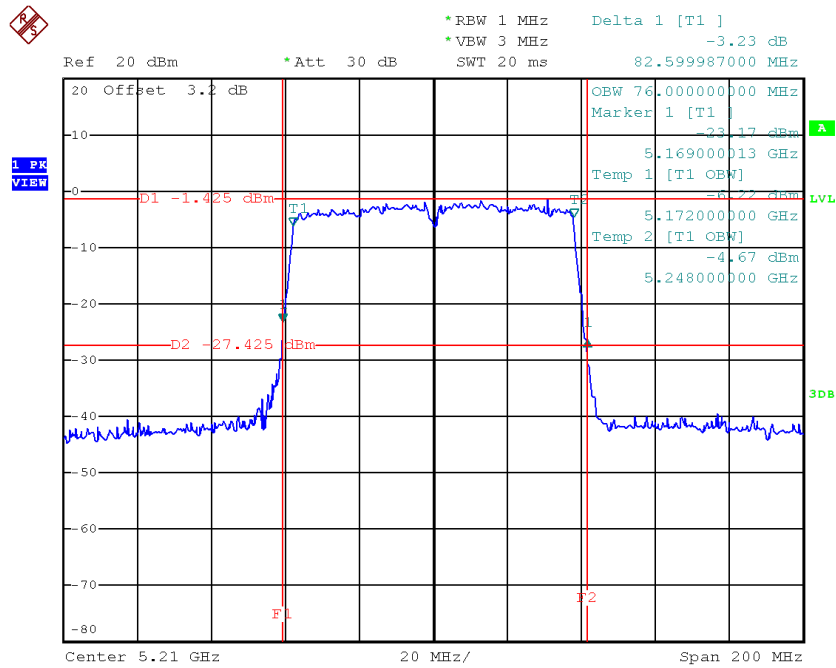


Date: 3.APR.2018 15:47:05

Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	22.35	18.30
CH60	5300	22.11	18.40
CH64	5320	22.05	18.40

TX CH52

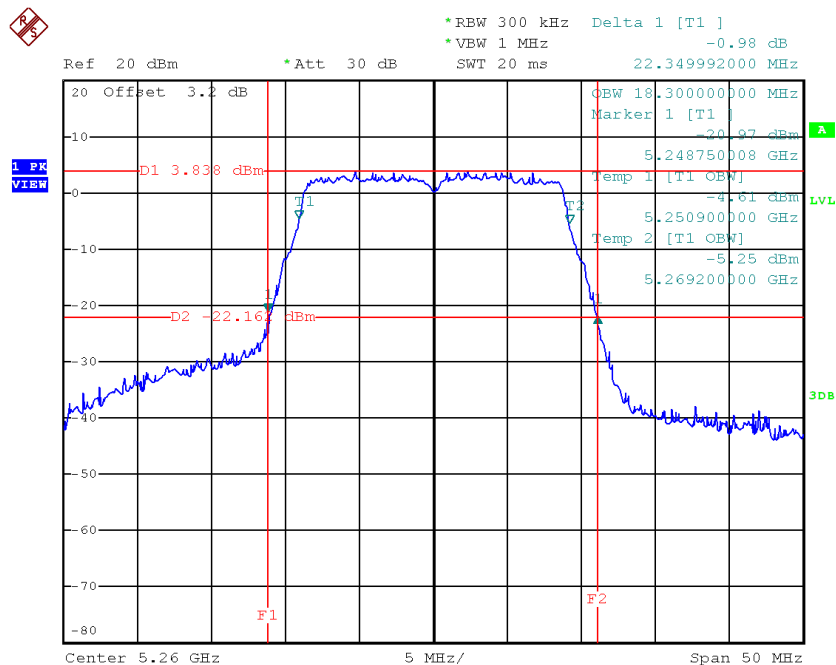


Date: 3.APR.2018 12:38:43

TX CH60

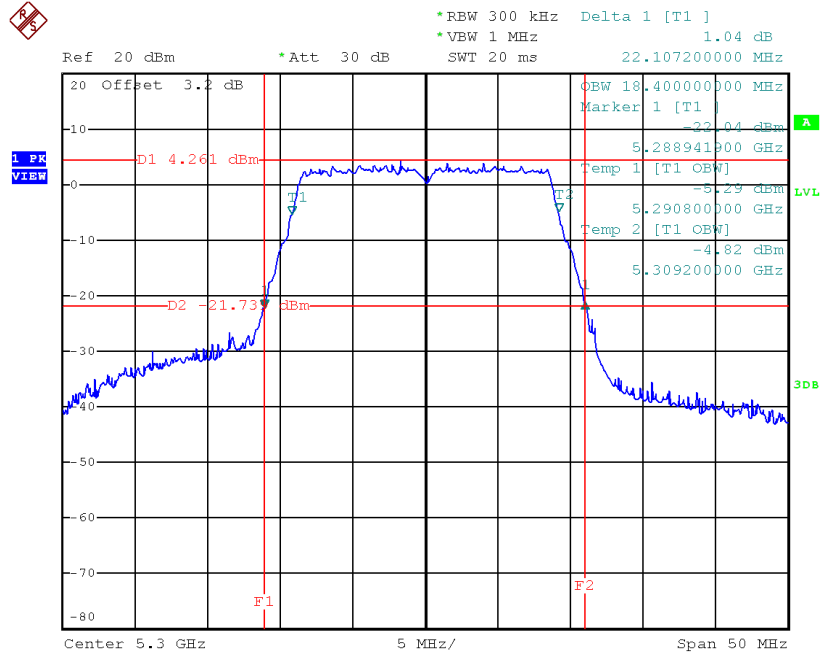

Date: 3.APR.2018 12:39:33

TX CH64

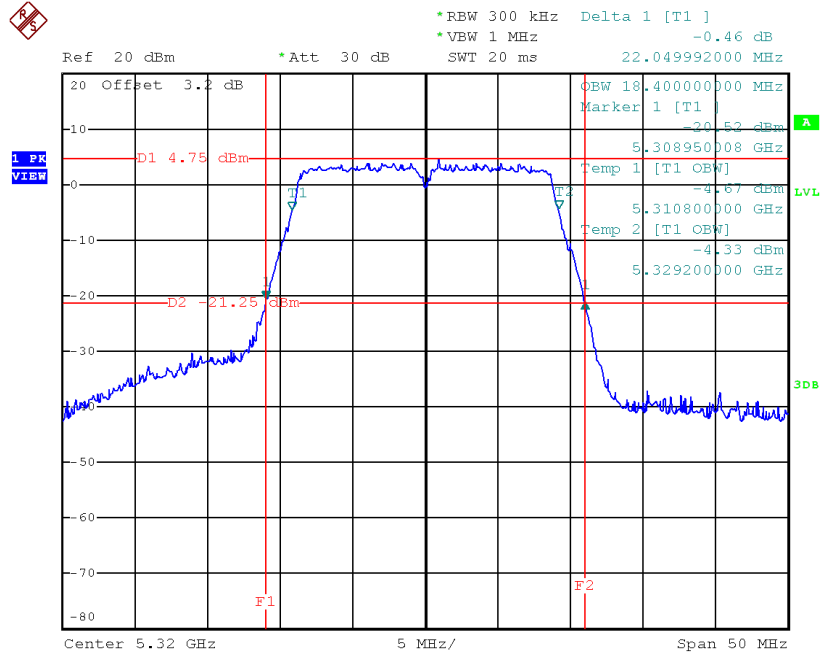


Date: 3.APR.2018 12:40:18

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	51.70	37.20
CH62	5310	41.80	37.00

TX CH54

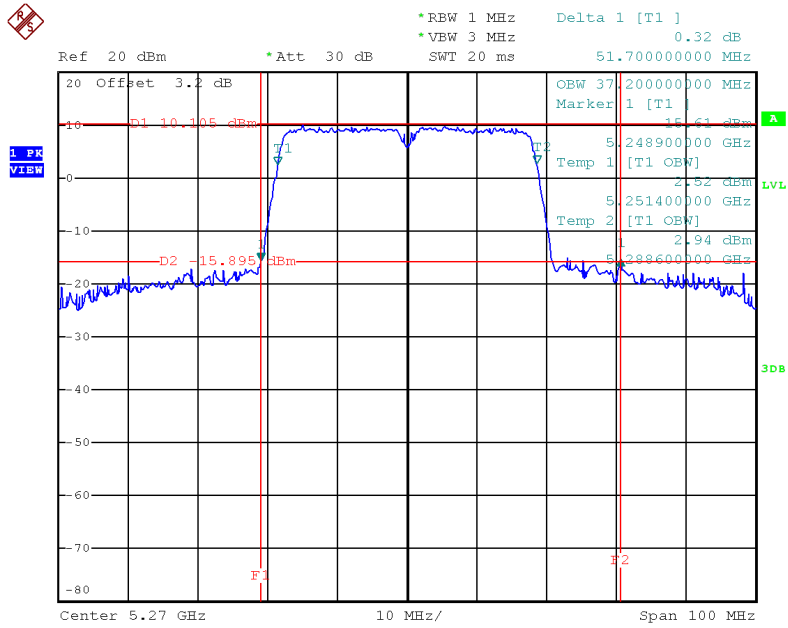

Date: 3.APR.2018 15:21:09

TX CH62

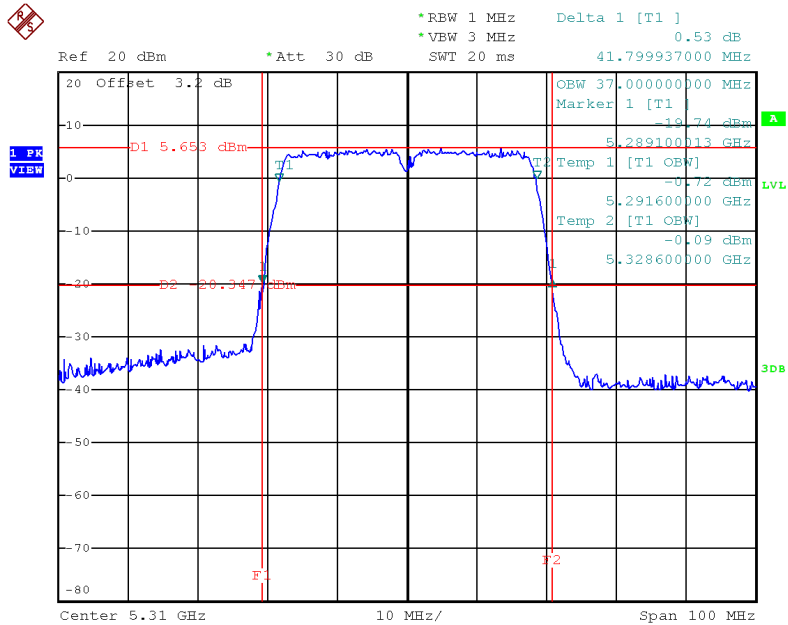


Date: 3.APR.2018 15:22:07

Test Mode: UNII-2A/TX AC80 Mode_CH58

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH58	5290	83.20	76.40

TX CH58

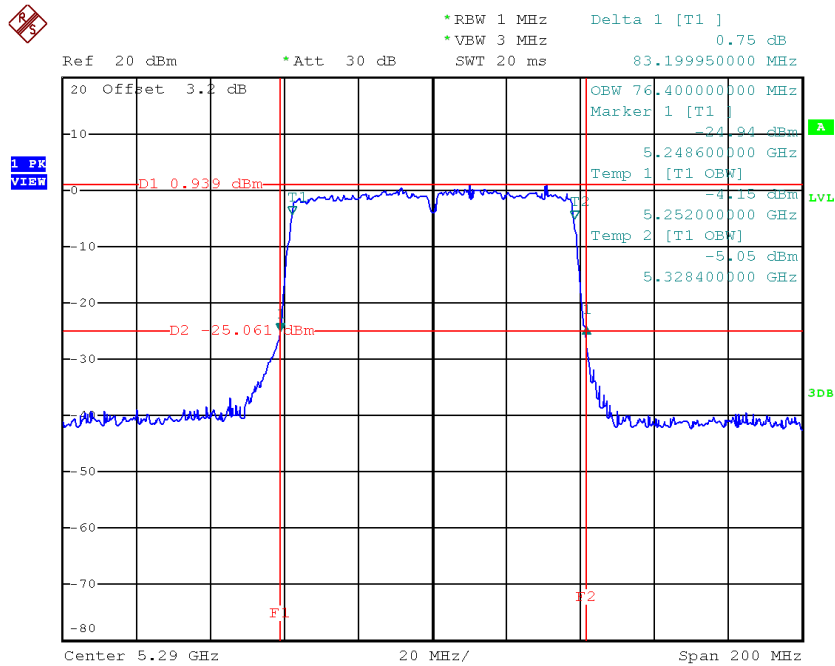


Date: 3.APR.2018 15:48:00

Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	22.35	18.30
CH116	5580	22.15	18.30
CH140	5700	22.10	18.40

TX CH100

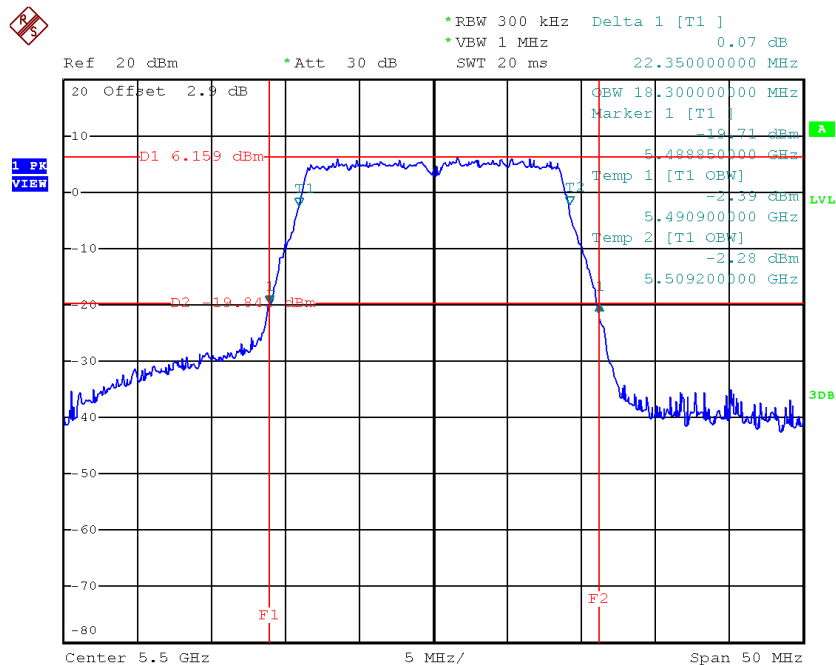


Date: 3.APR.2018 12:42:35

TX CH116

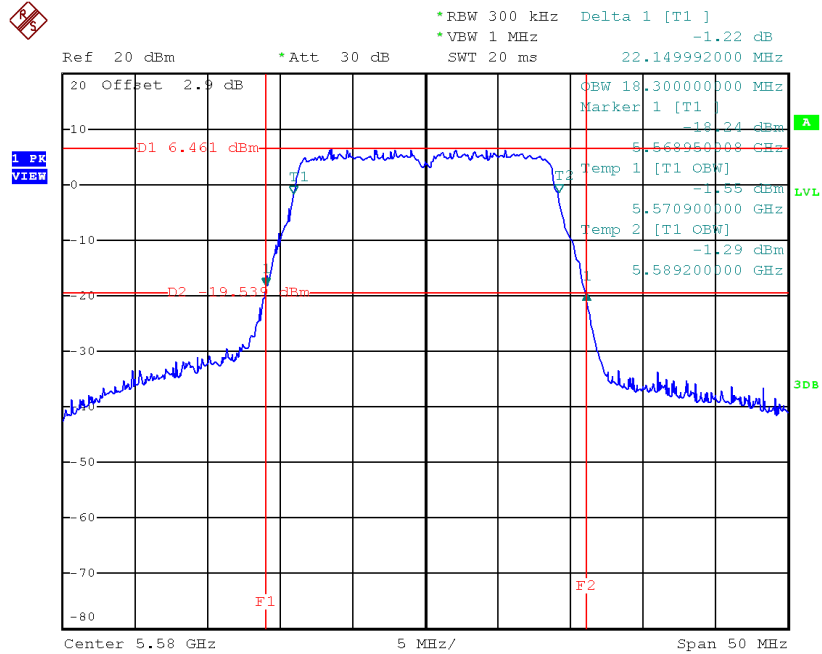

Date: 3.APR.2018 12:43:50

TX CH140

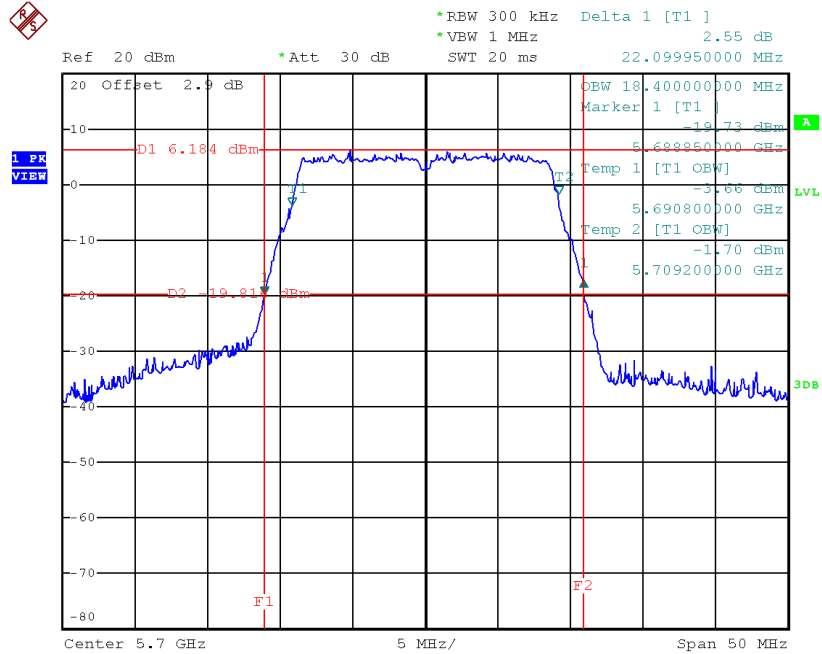


Date: 3.APR.2018 12:44:46

Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	41.70	37.00
CH110	5550	78.20	37.60
CH134	5670	50.00	37.40

TX CH102

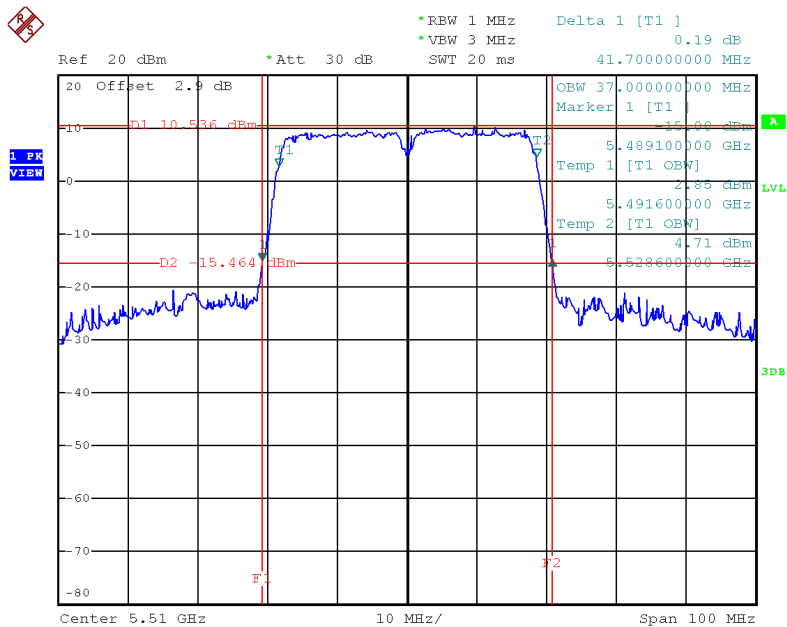


Date: 3.APR.2018 15:23:34

TX CH110

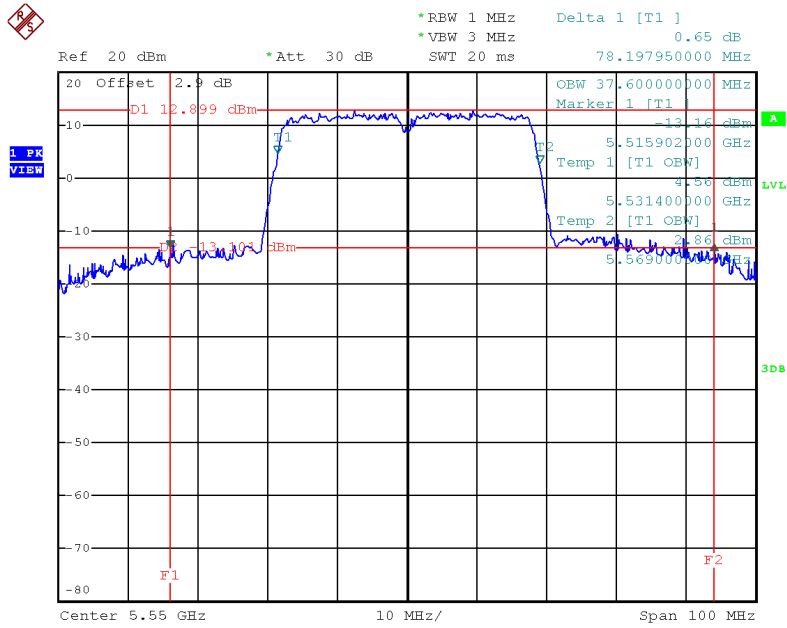

Date: 3.APR.2018 15:26:09

TX CH134

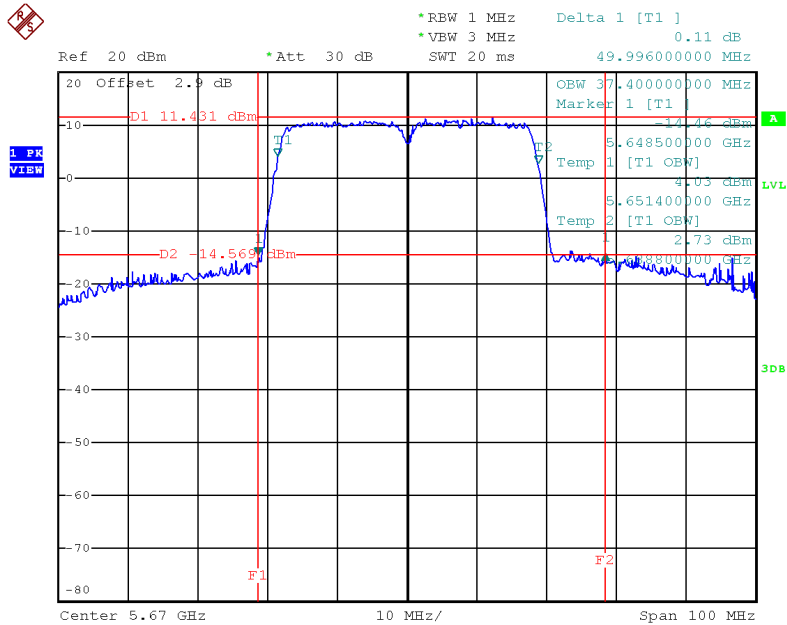


Date: 3.APR.2018 15:31:54

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH106	5530	82.60	76.40
CH122	5610	107.41	76.40

TX CH106

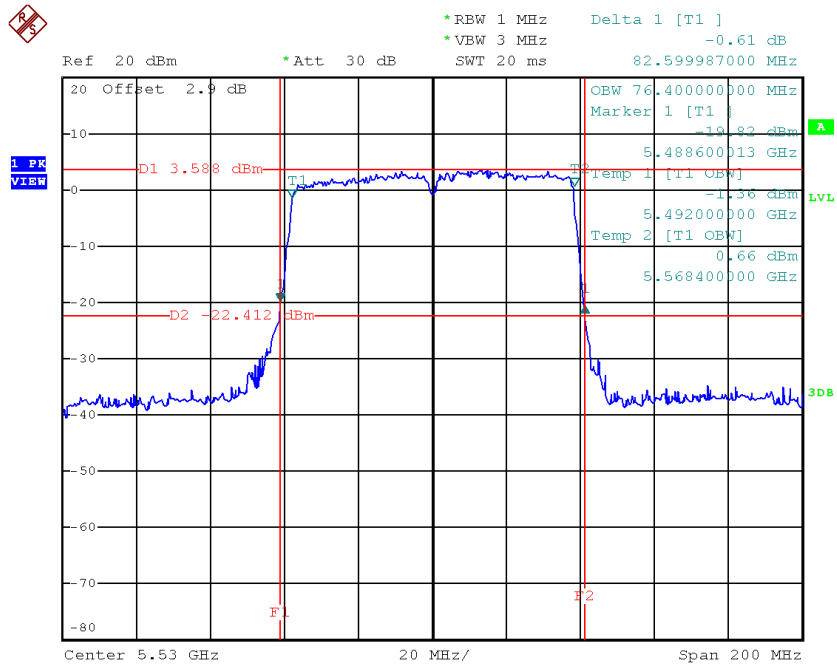

Date: 3.APR.2018 15:57:09

TX CH122

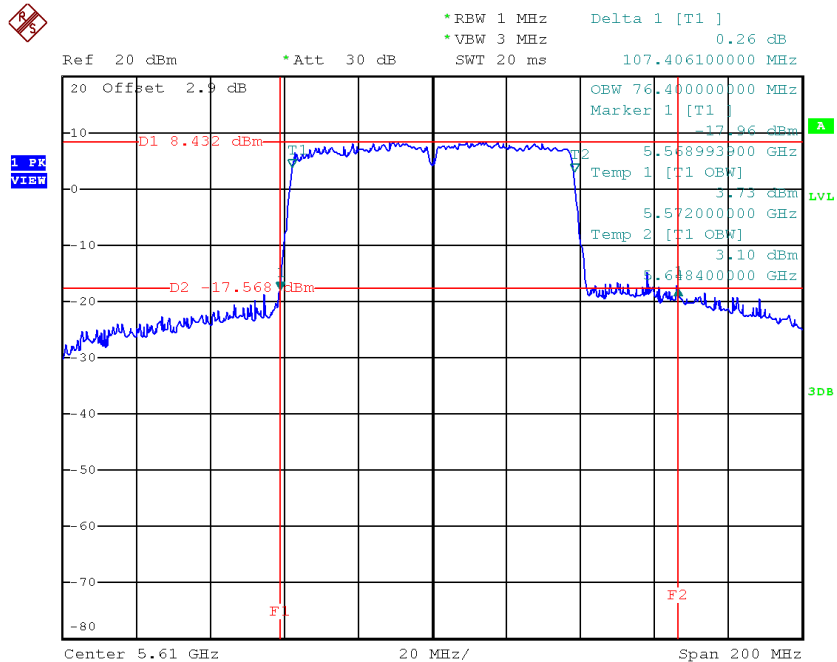


Date: 3.APR.2018 15:58:08

Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.59	30.40	>=500
CH157	5785	17.30	32.10	>=500
CH165	5825	17.55	30.40	>=500

TX CH 149

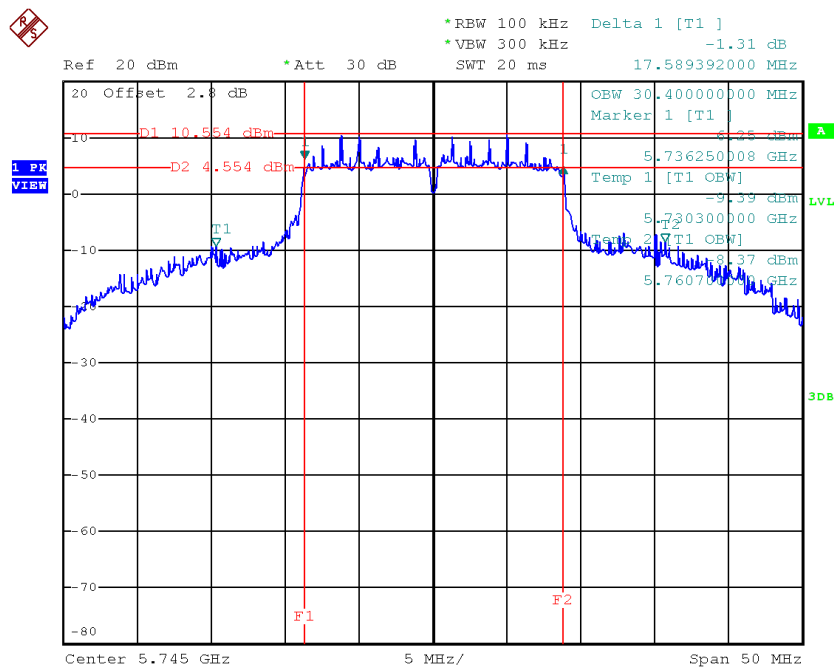


Date: 3.APR.2018 12:47:00

TX CH 157

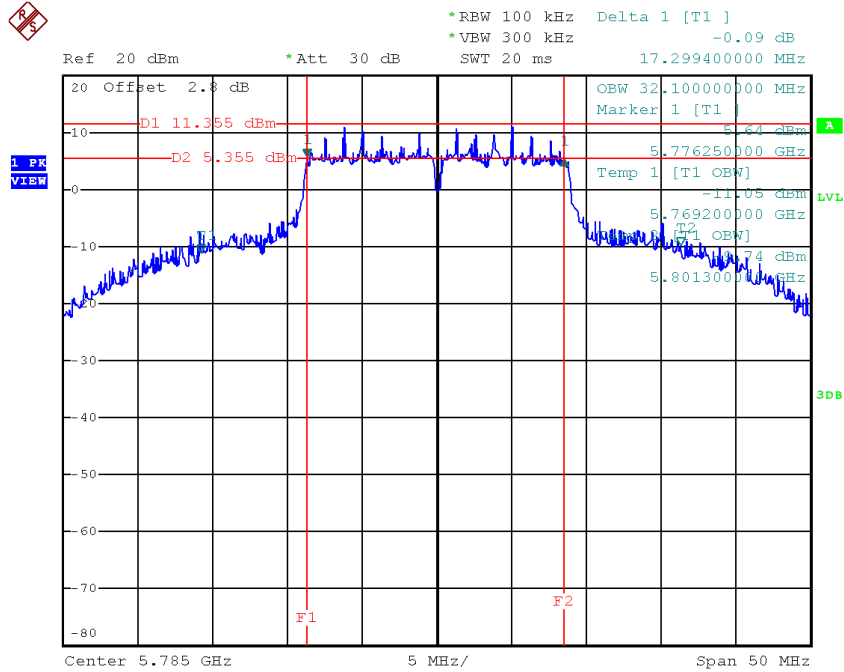

Date: 3.APR.2018 12:48:09

TX CH 165

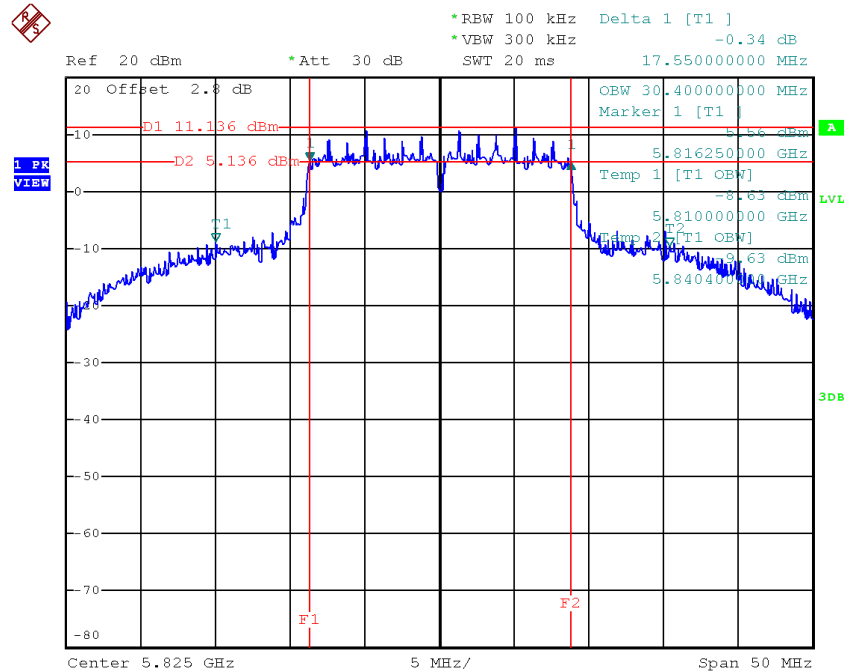


Date: 3.APR.2018 12:49:05

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.50	67.80	≥ 500
CH159	5795	36.50	67.40	≥ 500

TX CH 151

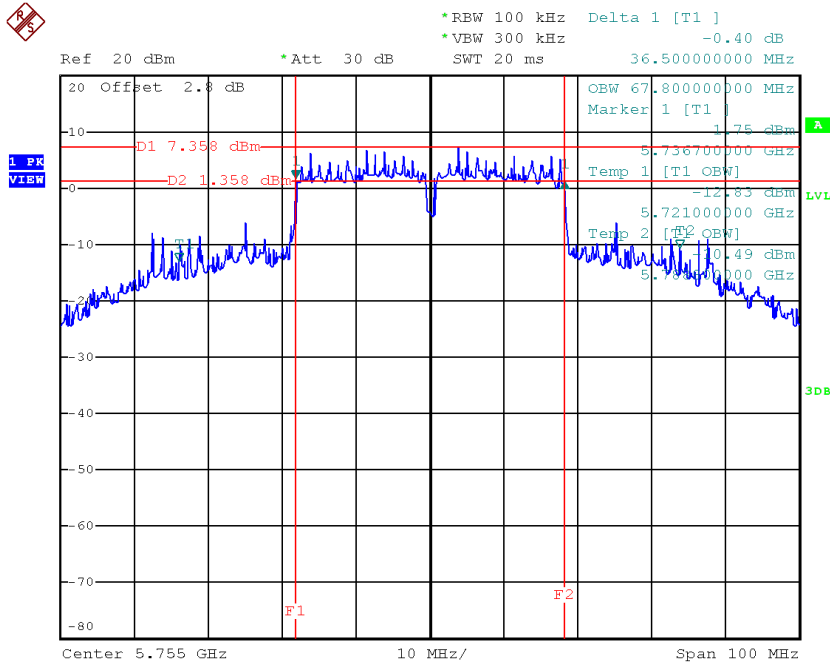

Date: 3.APR.2018 15:38:27


TX CH 159

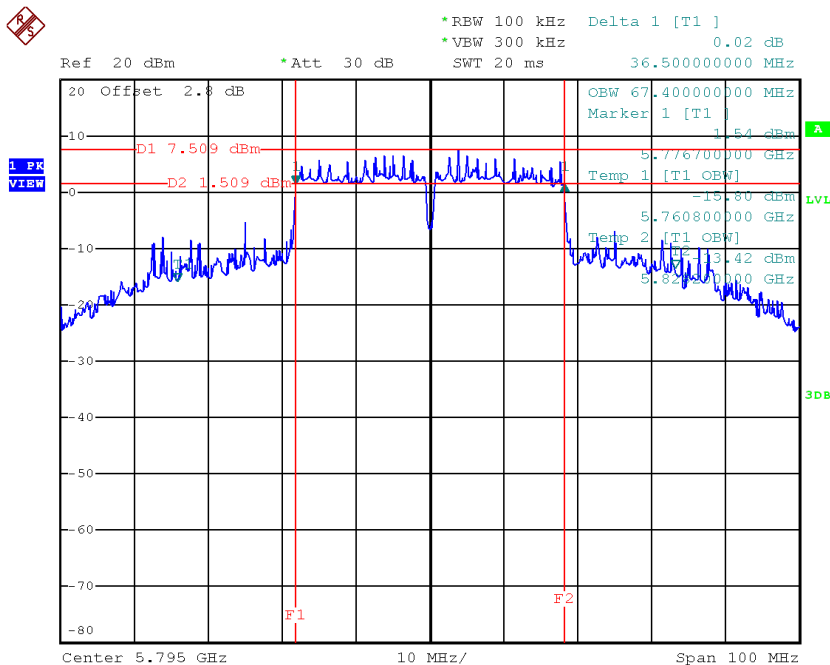

Date: 3.APR.2018 15:40:06

Test Mode: UNII-3/ TX AC80 Mode_CH155

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH155	5775	75.80	76.00	>=500

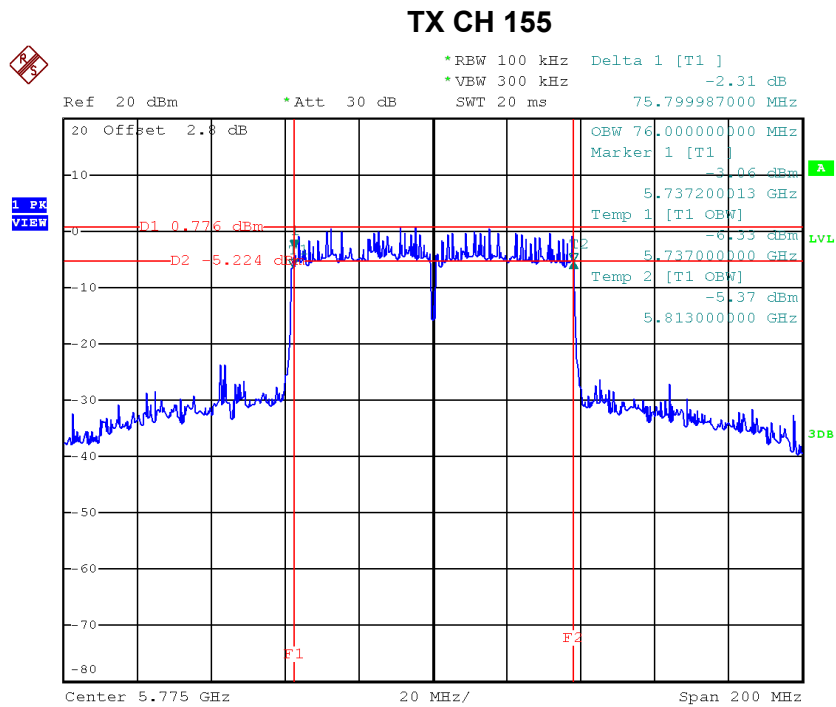

Date: 3.APR.2018 16:00:59

APPENDIX F - MAXIMUM OUTPUT POWER

Test Mode: UNII-1/TX A Mode_ANT1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	15.51	0.33	15.84	24.00	0.25
CH40	5200	19.67	0.33	20.00	24.00	0.25
CH48	5240	19.35	0.33	19.68	24.00	0.25

Test Mode: UNII-1/TX A Mode_ANT2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	15.77	0.33	16.10	24.00	0.25
CH40	5200	19.27	0.33	19.60	24.00	0.25
CH48	5240	17.98	0.33	18.31	24.00	0.25

Test Mode: UNII-1/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.09	0.33	14.42	22.51	0.18
CH40	5200	14.57	0.33	14.90	22.51	0.18
CH48	5240	14.67	0.33	15.00	22.51	0.18

Test Mode: UNII-1/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.45	0.33	14.78	22.51	0.18
CH40	5200	15.45	0.33	15.78	22.51	0.18
CH48	5240	15.76	0.33	16.09	22.51	0.18

Test Mode: UNII-1/TX N20 Mode _Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	17.61	22.51	0.18
CH40	5200	18.37	22.51	0.18
CH48	5240	18.58	22.51	0.18

Test Mode: UNII-1/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	8.21	0.84	9.05	22.51	0.18
CH46	5230	16.26	0.84	17.10	22.51	0.18

Test Mode: UNII-1/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	8.37	0.84	9.21	22.51	0.18
CH46	5230	16.86	0.84	17.70	22.51	0.18

Test Mode: UNII-1/TX N40 Mode _Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	12.14	22.51	0.18
CH46	5230	20.42	22.51	0.18

Test Mode: UNII-2A/TX A Mode_ANT1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	19.14	0.33	19.47	24.00	0.25
CH60	5300	17.19	0.33	17.52	24.00	0.25
CH64	5320	14.82	0.33	15.15	24.00	0.25

Test Mode: UNII-2A/TX A Mode_ANT2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	17.92	0.33	18.25	24.00	0.25
CH60	5300	17.44	0.33	17.77	24.00	0.25
CH64	5320	15.98	0.33	16.31	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.36	0.33	14.69	22.61	0.18
CH60	5300	14.42	0.33	14.75	22.61	0.18
CH64	5320	14.18	0.33	14.51	22.61	0.18

Test Mode: UNII-2A/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.25	0.33	15.58	22.61	0.18
CH60	5300	15.39	0.33	15.72	22.61	0.18
CH64	5320	15.12	0.33	15.45	22.61	0.18

Test Mode: UNII-2A/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	18.16	22.61	0.18
CH60	5300	18.27	22.61	0.18
CH64	5320	18.01	22.61	0.18

Test Mode: UNII-2A/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	15.53	0.84	16.37	22.61	0.18
CH62	5310	11.19	0.84	12.03	22.61	0.18

Test Mode: UNII-2A/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	15.67	0.84	16.51	22.61	0.18
CH62	5310	10.88	0.84	11.72	22.61	0.18

Test Mode: UNII-2A/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	19.45	22.61	0.18
CH62	5310	14.89	22.61	0.18

Test Mode: UNII-2C/TX A Mode_ANT1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.58	0.33	15.91	24.00	0.25
CH116	5580	19.19	0.33	19.52	24.00	0.25
CH140	5700	13.95	0.33	14.28	24.00	0.25

Test Mode: UNII-2C/TX A Mode_ANT2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.82	0.33	16.15	24.00	0.25
CH116	5580	18.42	0.33	18.75	24.00	0.25
CH140	5700	13.63	0.33	13.96	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	13.49	0.33	13.82	21.20	0.13
CH116	5580	12.96	0.33	13.29	21.20	0.13
CH140	5700	12.71	0.33	13.04	21.20	0.13

Test Mode: UNII-2C/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	13.61	0.33	13.94	21.20	0.13
CH116	5580	12.95	0.33	13.28	21.20	0.13
CH140	5700	12.15	0.33	12.48	21.20	0.13

Test Mode: UNII-2C/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	16.89	21.20	0.13
CH116	5580	16.29	21.20	0.13
CH140	5700	15.77	21.20	0.13

Test Mode: UNII-2C/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	11.62	0.84	12.46	21.20	0.13
CH110	5550	15.42	0.84	16.26	21.20	0.13
CH134	5670	13.76	0.84	14.60	21.20	0.13

Test Mode: UNII-2C/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	11.67	0.84	12.51	21.20	0.13
CH110	5550	15.19	0.84	16.03	21.20	0.13
CH134	5670	13.29	0.84	14.13	21.20	0.13

Test Mode: UNII-2C/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	15.49	21.20	0.13
CH110	5550	19.15	21.20	0.13
CH134	5670	17.38	21.20	0.13

Test Mode: UNII-3/ TX A Mode_ANT1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	19.11	0.33	19.44	30.00	1.00
CH157	5785	19.62	0.33	19.95	30.00	1.00
CH165	5825	19.52	0.33	19.85	30.00	1.00

Test Mode: UNII-3/ TX A Mode_ANT2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	18.77	0.33	19.10	30.00	1.00
CH157	5785	18.91	0.33	19.24	30.00	1.00
CH165	5825	18.59	0.33	18.92	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	18.43	0.33	18.76	26.95	0.50
CH157	5785	18.46	0.33	18.79	26.95	0.50
CH165	5825	18.07	0.33	18.40	26.95	0.50

Test Mode: UNII-3/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	18.31	0.33	18.64	26.95	0.50
CH157	5785	18.21	0.33	18.54	26.95	0.50
CH165	5825	17.97	0.33	18.30	26.95	0.50

Test Mode: UNII-3/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	21.71	26.95	0.50
CH157	5785	21.67	26.95	0.50
CH165	5825	21.36	26.95	0.50

Test Mode: UNII-3/ TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	18.73	0.84	19.57	26.95	0.50
CH159	5795	18.67	0.84	19.51	26.95	0.50

Test Mode: UNII-3/ TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	17.28	0.84	18.12	26.95	0.50
CH159	5795	17.23	0.84	18.07	26.95	0.50

Test Mode: UNII-3/ TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	21.91	26.95	0.50
CH159	5795	21.86	26.95	0.50

Test Mode: UNII-1/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	13.31	0.32	13.63	22.51	0.18
CH40	5200	14.27	0.32	14.59	22.51	0.18
CH48	5240	14.27	0.32	14.59	22.51	0.18

Test Mode: UNII-1/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.27	0.32	14.59	22.51	0.18
CH40	5200	15.48	0.32	15.80	22.51	0.18
CH48	5240	15.81	0.32	16.13	22.51	0.18

Test Mode: UNII-1/TX AC20 Mode _Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	17.15	22.51	0.18
CH40	5200	18.25	22.51	0.18
CH48	5240	18.44	22.51	0.18

Test Mode: UNII-1/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	8.18	0.80	8.98	22.51	0.18
CH46	5230	16.82	0.80	17.62	22.51	0.18

Test Mode: UNII-1/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	8.43	0.80	9.23	22.51	0.18
CH46	5230	16.93	0.80	17.73	22.51	0.18

Test Mode: UNII-1/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	12.12	22.51	0.18
CH46	5230	20.69	22.51	0.18

Test Mode: UNII-1/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	7.08	1.42	8.50	22.51	0.18

Test Mode: UNII-1/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	7.33	1.42	8.75	22.51	0.18

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	11.64	22.51	0.18

Test Mode: UNII-2A/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.03	0.32	14.35	22.61	0.18
CH60	5300	13.94	0.32	14.26	22.61	0.18
CH64	5320	13.95	0.32	14.27	22.61	0.18

Test Mode: UNII-2A/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.49	0.32	15.81	22.61	0.18
CH60	5300	15.31	0.32	15.63	22.61	0.18
CH64	5320	15.18	0.32	15.50	22.61	0.18

Test Mode: UNII-2A/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	18.16	22.61	0.18
CH60	5300	18.01	22.61	0.18
CH64	5320	17.94	22.61	0.18

Test Mode: UNII-2A/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	15.45	0.80	16.25	22.61	0.18
CH62	5310	9.86	0.80	10.66	22.61	0.18

Test Mode: UNII-2A/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	15.57	0.80	16.37	22.61	0.18
CH62	5310	10.38	0.80	11.18	22.61	0.18

Test Mode: UNII-2A/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	19.32	22.61	0.18
CH62	5310	13.94	22.61	0.18

Test Mode: UNII-2A/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	9.95	1.42	11.37	22.61	0.18

Test Mode: UNII-2A/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	6.67	1.42	8.09	22.61	0.18

Test Mode: UNII-2A/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	13.04	22.61	0.18

Test Mode: UNII-2C/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	13.03	0.32	13.35	21.20	0.13
CH116	5580	13.07	0.32	13.39	21.20	0.13
CH140	5700	12.57	0.32	12.89	21.20	0.13

Test Mode: UNII-2C/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	13.71	0.32	14.03	21.20	0.13
CH116	5580	13.07	0.32	13.39	21.20	0.13
CH140	5700	12.32	0.32	12.64	21.20	0.13

Test Mode: UNII-2C/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	16.72	21.20	0.13
CH116	5580	16.40	21.20	0.13
CH140	5700	15.78	21.20	0.13

Test Mode: UNII-2C/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	12.65	0.80	13.45	21.20	0.13
CH110	5550	14.91	0.80	15.71	21.20	0.13
CH134	5670	14.19	0.80	14.99	21.20	0.13

Test Mode: UNII-2C/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	12.41	0.80	13.21	21.20	0.13
CH110	5550	14.81	0.80	15.61	21.20	0.13
CH134	5670	13.61	0.80	14.41	21.20	0.13

Test Mode: UNII-2C/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	16.35	21.20	0.13
CH110	5550	18.67	21.20	0.13
CH134	5670	17.72	21.20	0.13

Test Mode: UNII-2C/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	9.34	1.42	10.76	21.20	0.13
CH122	5610	14.33	1.42	15.75	21.20	0.13

Test Mode: UNII-2C/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	7.42	1.42	8.84	21.20	0.13
CH122	5610	12.63	1.42	14.05	21.20	0.13

Test Mode: UNII-2C/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	12.92	21.20	0.13
CH122	5610	17.99	21.20	0.13

Test Mode: UNII-3/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	18.65	0.32	18.97	26.95	0.50
CH157	5785	18.53	0.32	18.85	26.95	0.50
CH165	5825	18.43	0.32	18.75	26.95	0.50

Test Mode: UNII-3/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	18.22	0.32	18.54	26.95	0.50
CH157	5785	18.12	0.32	18.44	26.95	0.50
CH165	5825	18.12	0.32	18.44	26.95	0.50

Test Mode: UNII-3/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	21.77	26.95	0.50
CH157	5785	21.66	26.95	0.50
CH165	5825	21.61	26.95	0.50

Test Mode: UNII-3/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	18.75	0.80	19.55	26.95	0.50
CH159	5795	18.43	0.80	19.23	26.95	0.50

Test Mode: UNII-3/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	17.08	0.80	17.88	26.95	0.50
CH159	5795	17.31	0.80	18.11	26.95	0.50

Test Mode: UNII-3/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	21.81	26.95	0.50
CH159	5795	21.72	26.95	0.50

Test Mode: UNII-3/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	12.94	1.42	14.36	26.95	0.50

Test Mode: UNII-3/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	11.78	1.42	13.20	26.95	0.50


Test Mode: UNII-3/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	16.83	26.95	0.50

APPENDIX G - POWER SPECTRAL DENSITY


Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_ANT1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	3.83	0.33	4.16	11.00
CH40	5200	4.02	0.33	4.35	11.00
CH48	5240	3.98	0.33	4.31	11.00

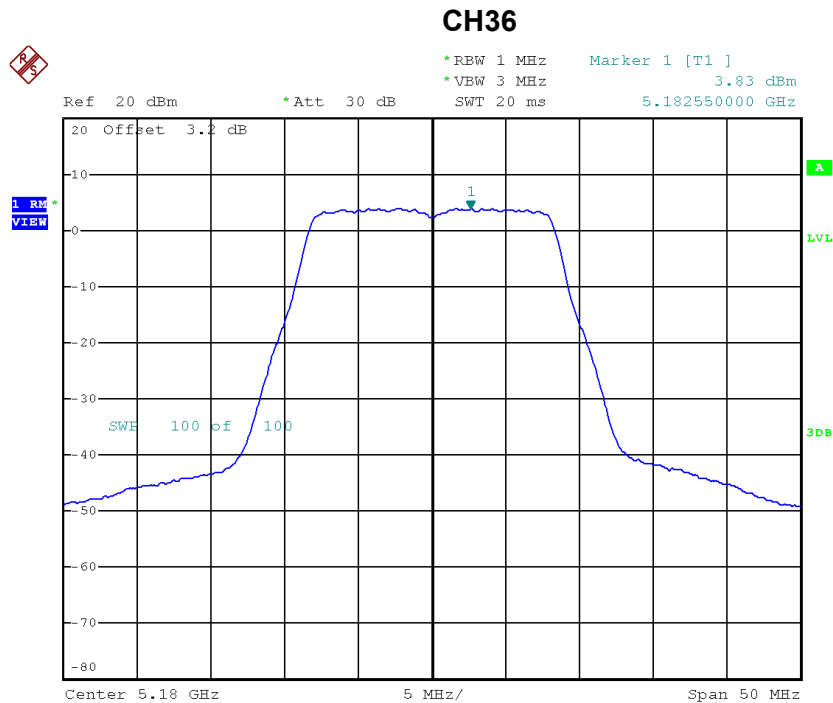


Date: 30.MAR.2018 19:02:54

CH40

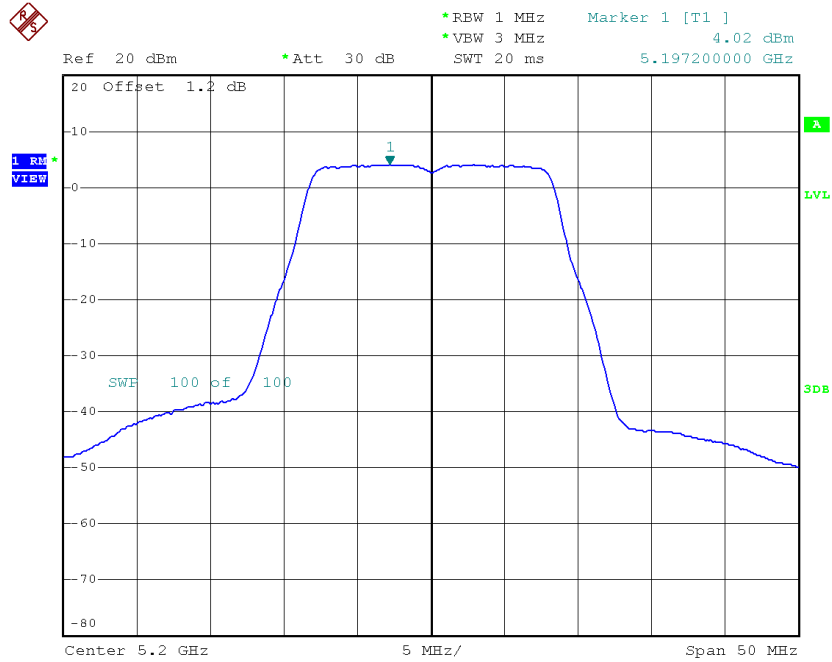

Date: 20.MAR.2019 10:06:27


CH48

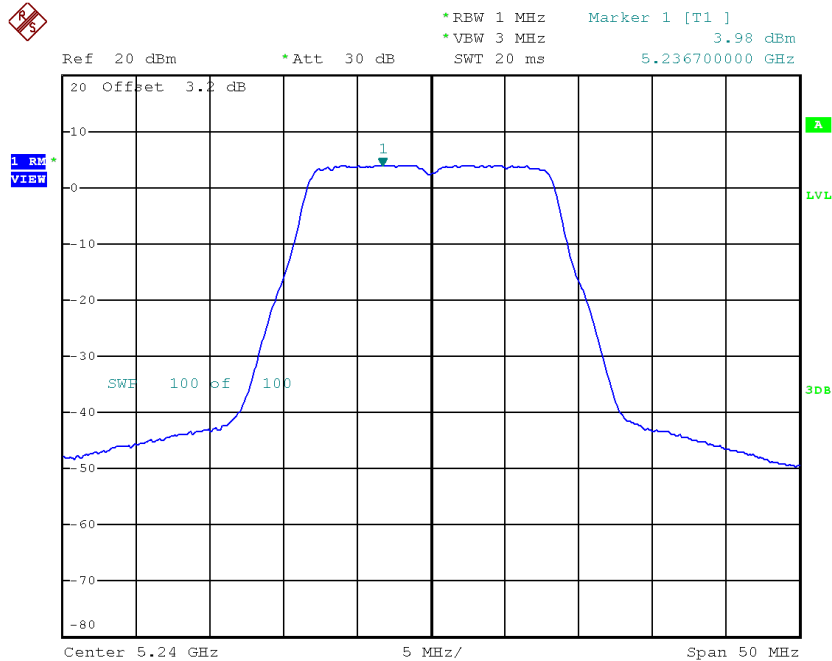

Date: 30.MAR.2018 19:55:58


Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_ANT2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	4.16	0.33	4.49	11.00
CH40	5200	4.29	0.33	4.62	11.00
CH48	5240	4.10	0.33	4.43	11.00

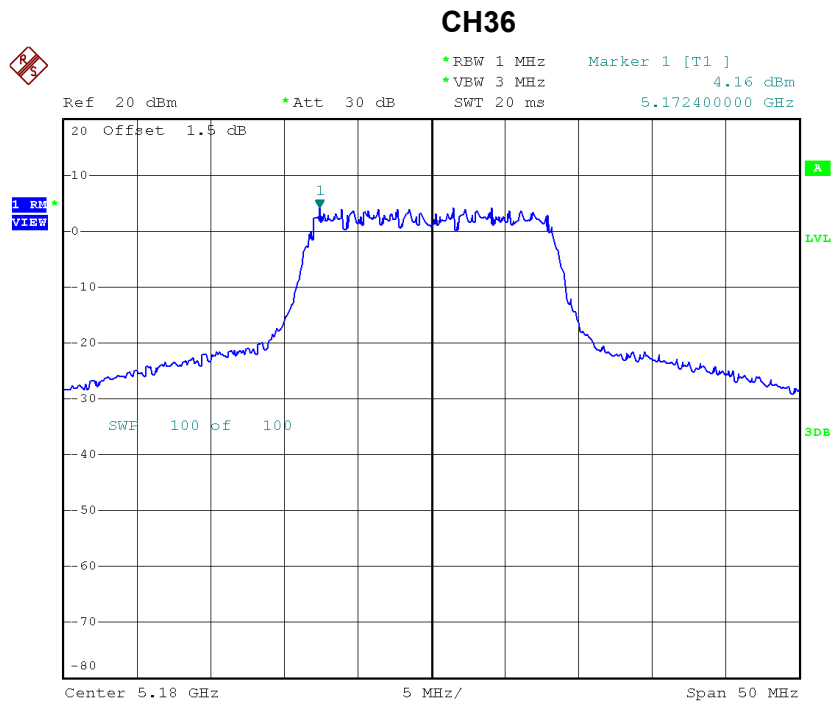


Date: 12.MAY.2016 17:24:53

CH40

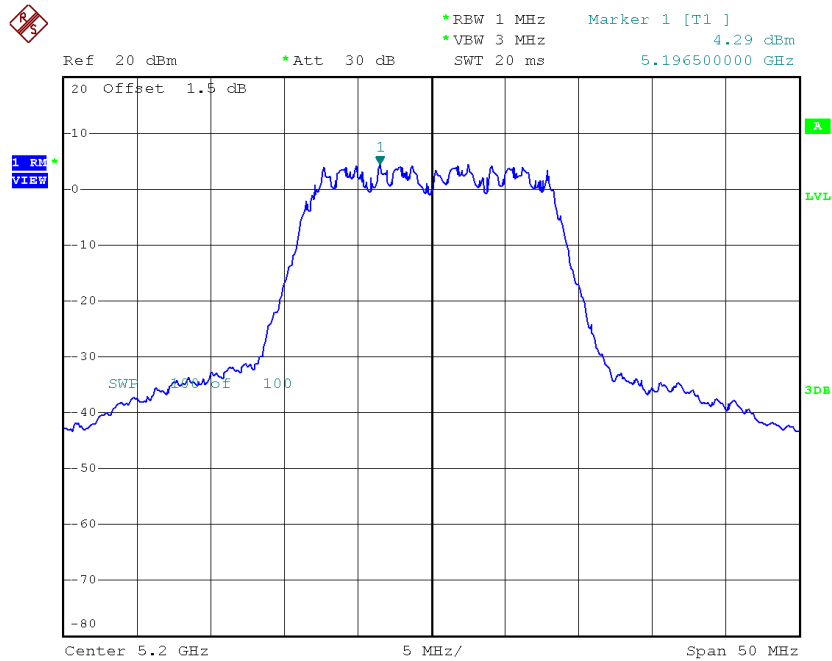

Date: 12.MAY.2016 17:26:29


CH48

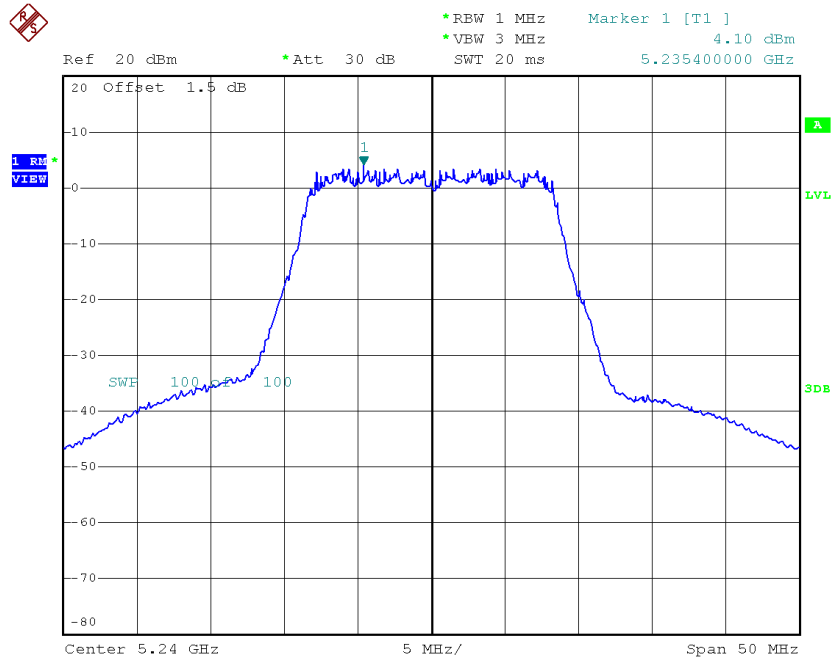

Date: 12.MAY.2016 17:28:12


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	5.46	0.33	5.79	9.51
CH40	5200	5.33	0.33	5.66	9.51
CH48	5240	5.41	0.33	5.74	9.51

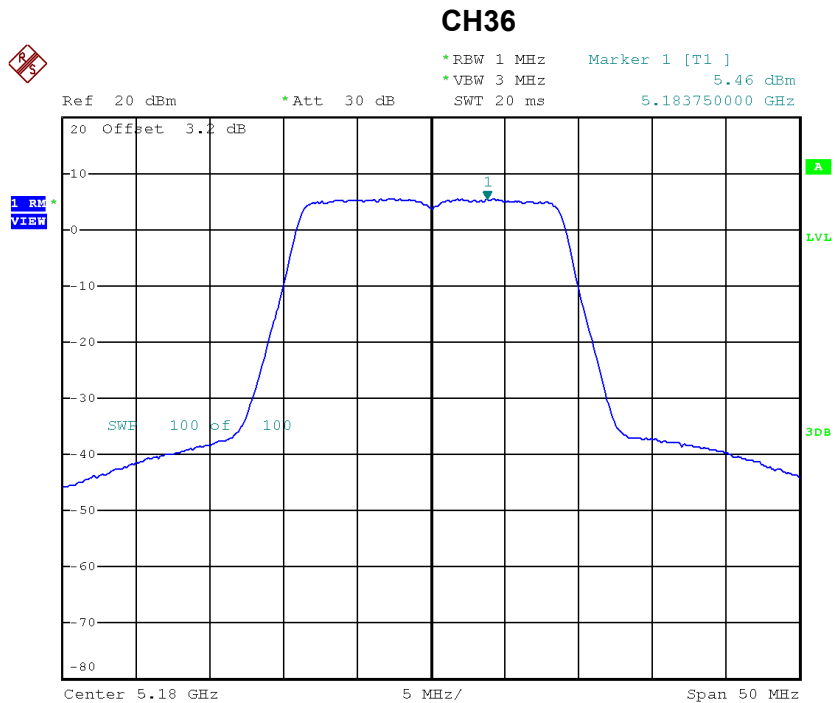


Date: 30.MAR.2018 10:47:40

CH40

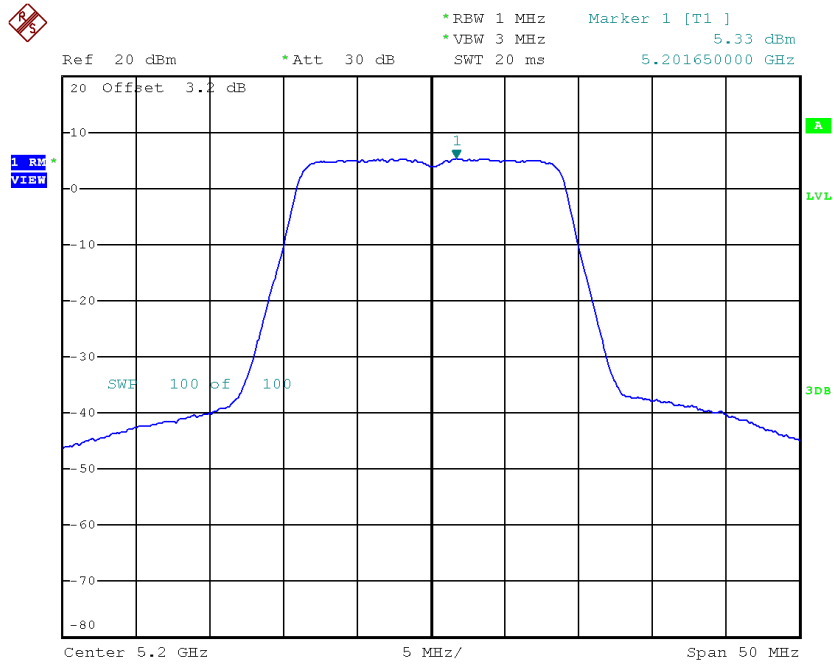

Date: 30.MAR.2018 10:50:45


CH48

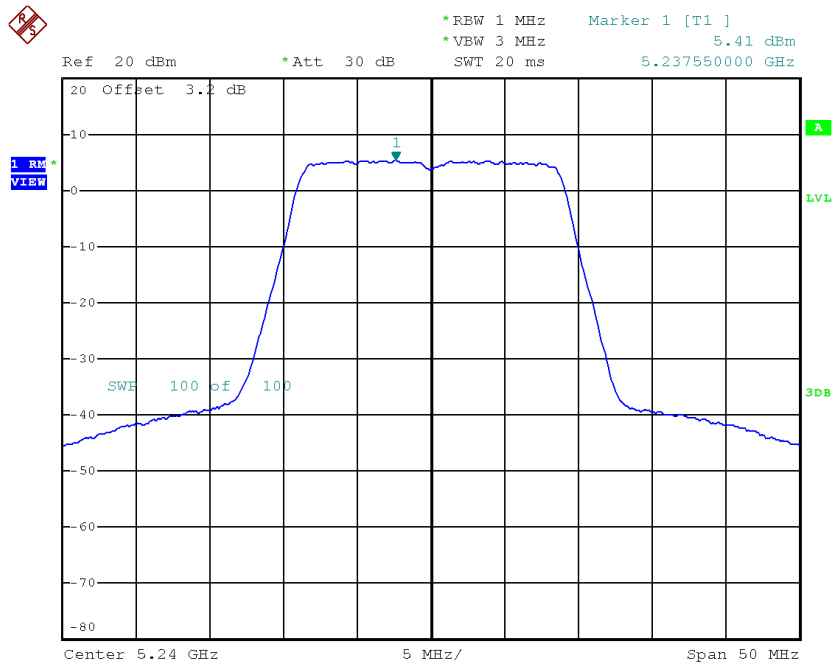

Date: 30.MAR.2018 10:52:06


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	5.09	0.33	5.42	9.51
CH40	5200	4.85	0.33	5.18	9.51
CH48	5240	4.87	0.33	5.20	9.51

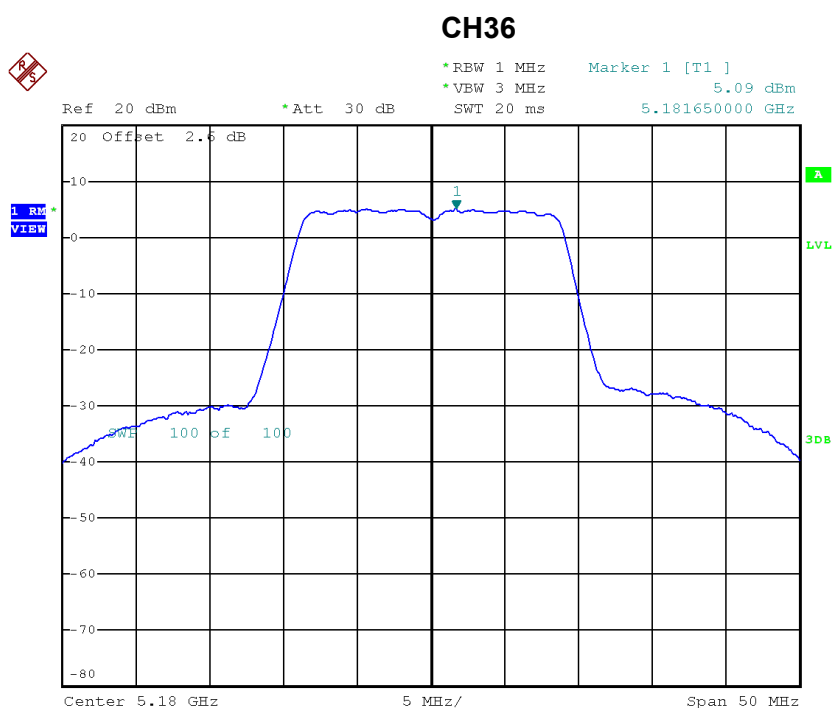


Date: 30.MAR.2018 11:46:54

CH40

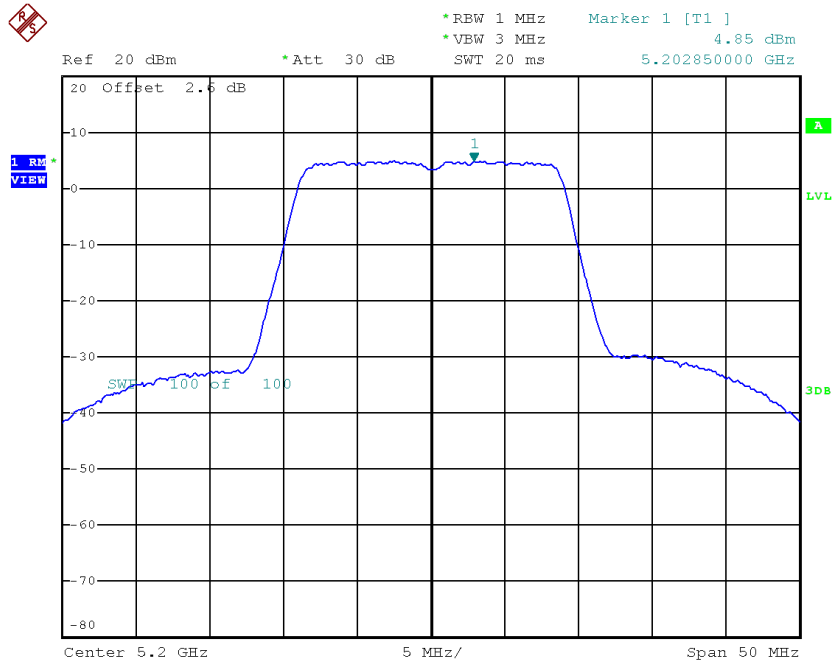

Date: 30.MAR.2018 12:06:07

CH48

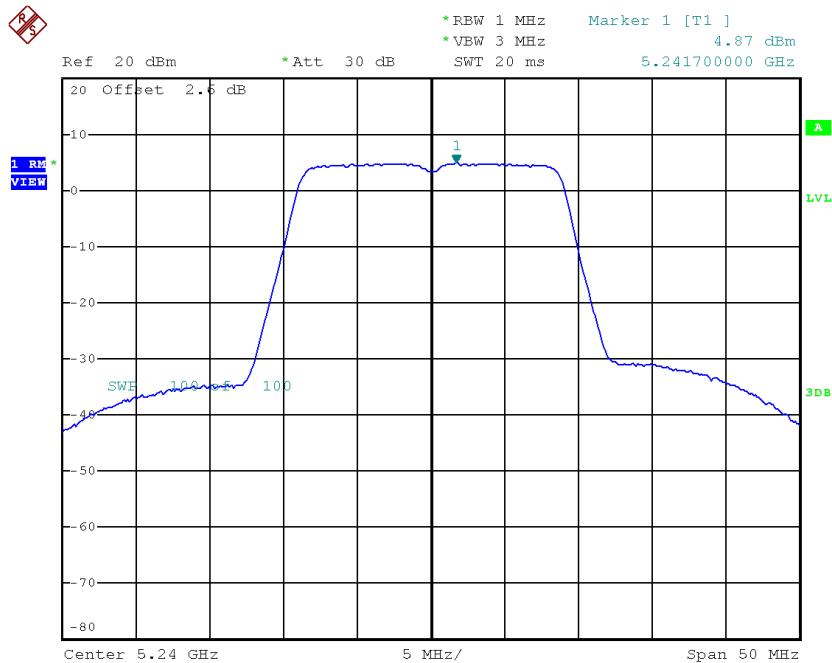

Date: 30.MAR.2018 11:50:31


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	8.61	9.51
CH40	5200	8.43	9.51
CH48	5240	8.48	9.51

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-5.11	0.84	-4.27	9.51
CH46	5230	2.58	0.84	3.42	9.51

CH38

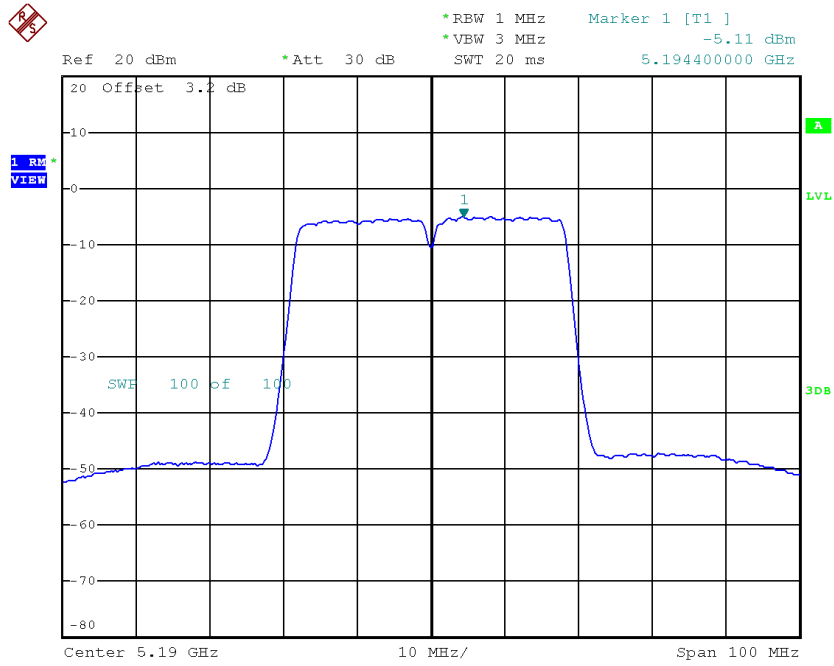

Date: 4.APR.2018 12:16:17

CH46

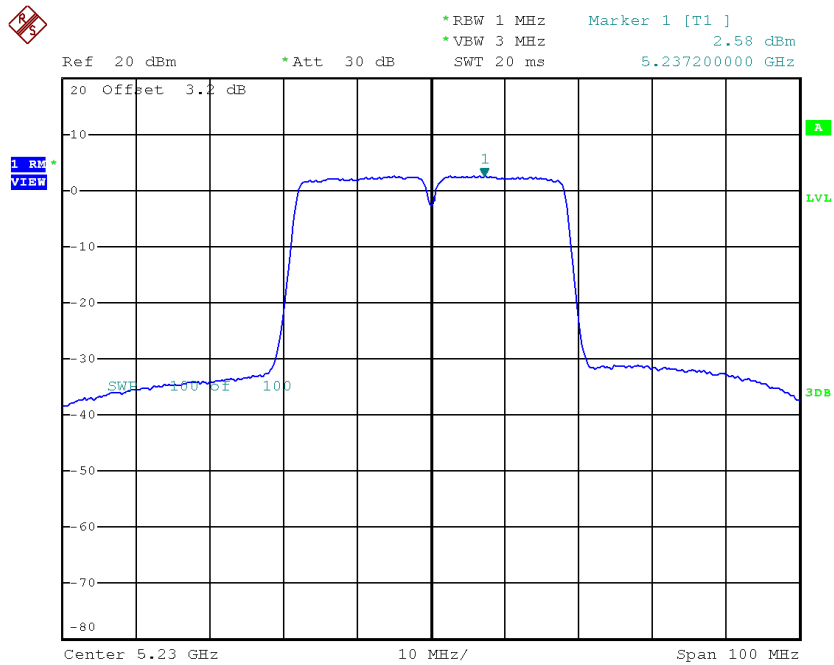


Date: 4.APR.2018 12:18:53

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-4.48	0.84	-3.64	9.51
CH46	5230	-1.26	0.84	-0.42	9.51

CH38

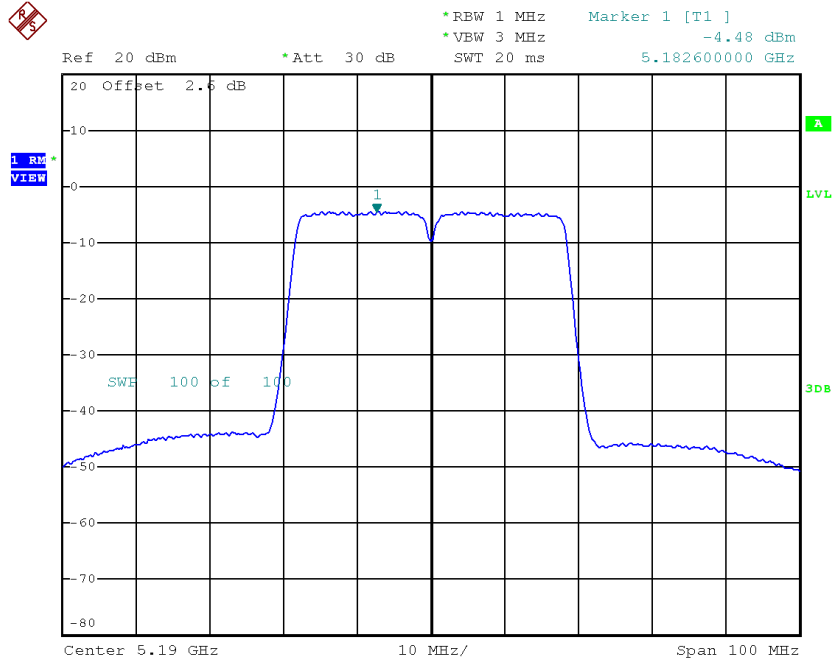

Date: 4.APR.2018 11:08:22

CH46

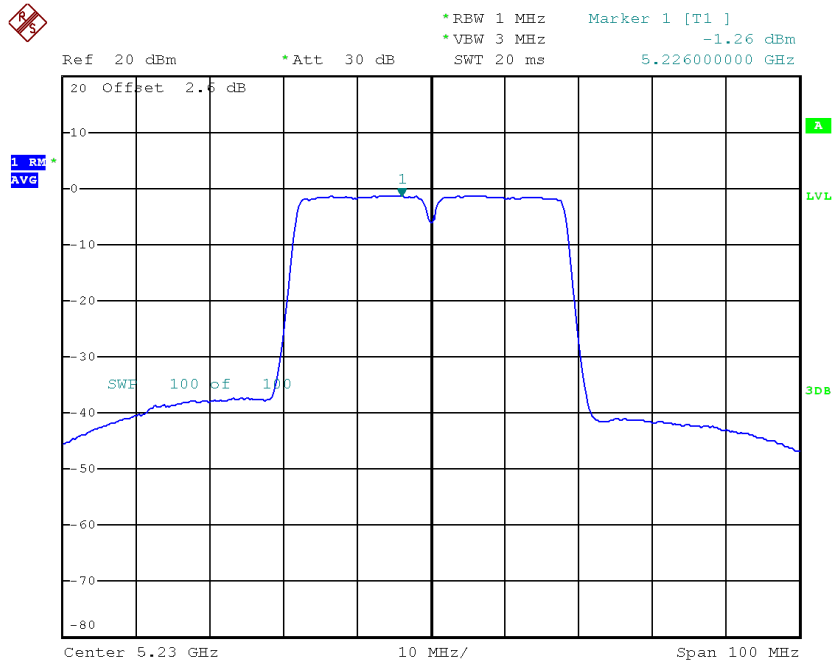


Date: 4.APR.2018 11:09:11

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-0.94	9.51
CH46	5230	4.92	9.51

Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_ANT1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	9.56	0.33	9.89	11.00
CH60	5300	9.61	0.33	9.94	11.00
CH64	5320	7.56	0.33	7.89	11.00

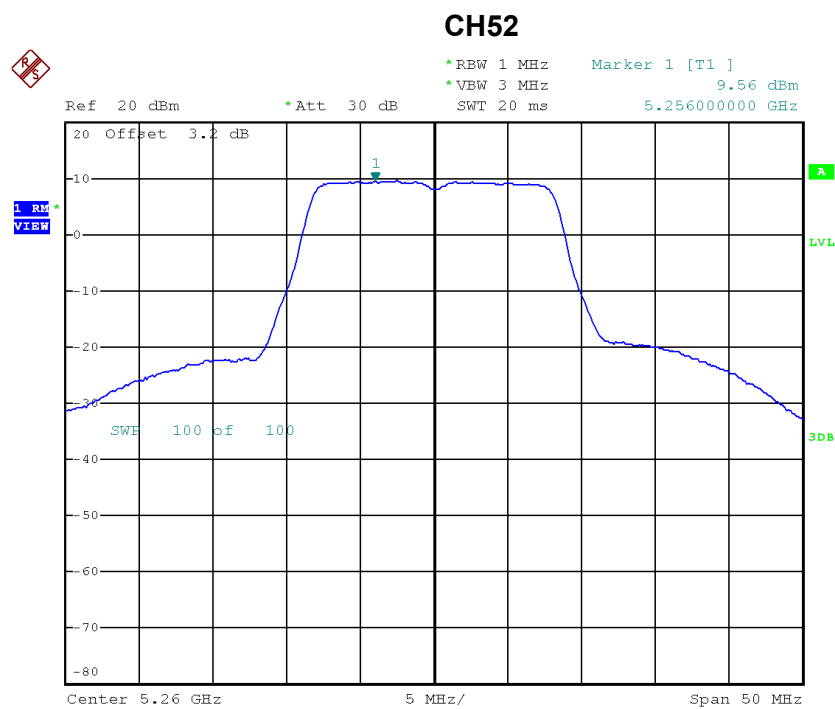


Date: 30.MAR.2018 10:26:00




Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_ANT2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	6.65	0.33	6.98	11.00
CH60	5300	5.97	0.33	6.30	11.00
CH64	5320	6.36	0.33	6.69	11.00

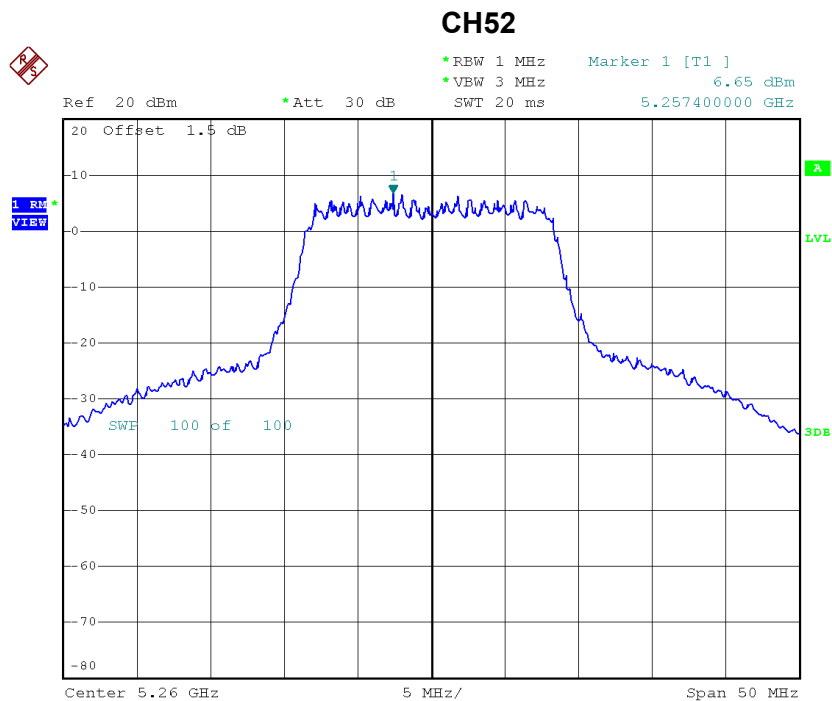


Date: 12.MAY.2016 11:58:42

CH60

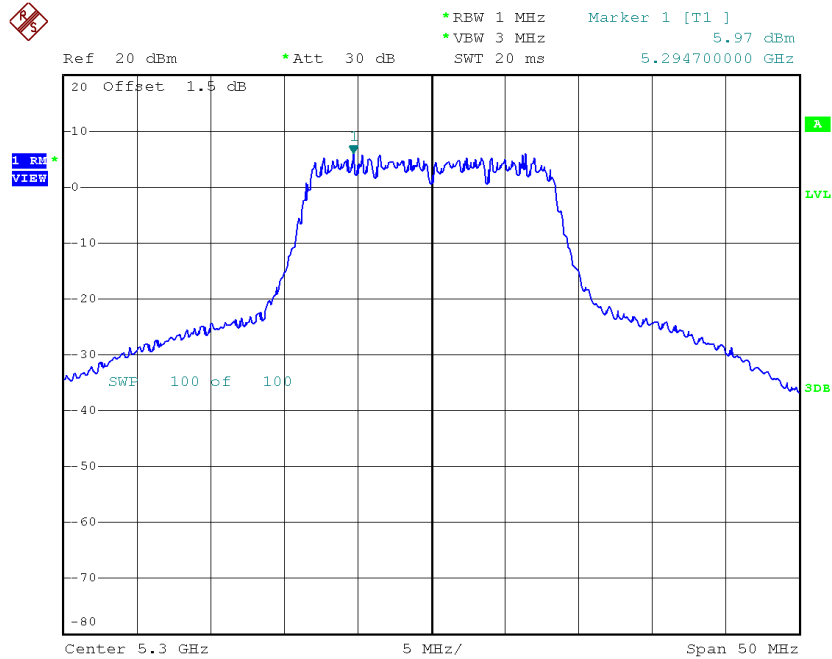

Date: 12.MAY.2016 11:59:05

CH64

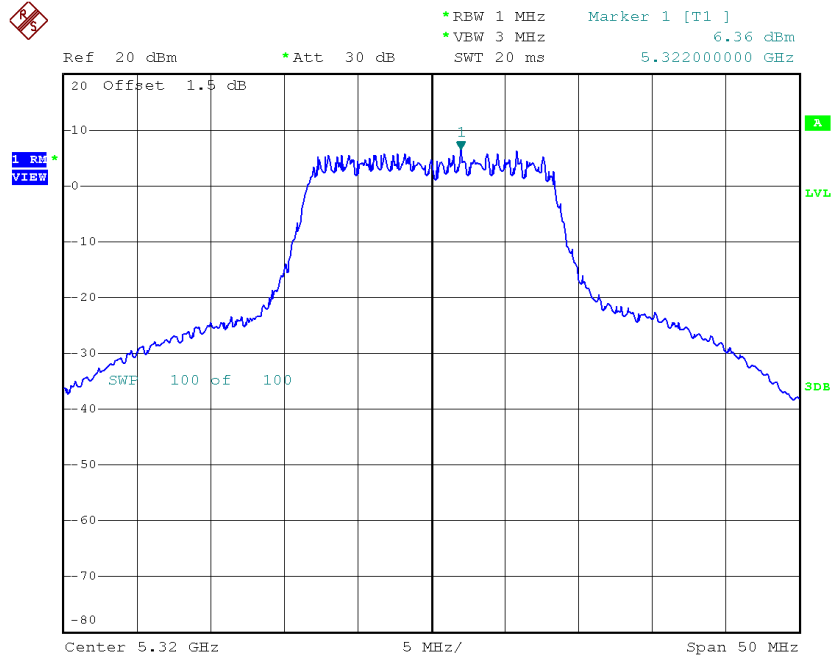


Date: 12.MAY.2016 11:59:28

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	5.46	0.33	5.79	9.61
CH60	5300	5.49	0.33	5.82	9.61
CH64	5320	5.47	0.33	5.80	9.61

CH52

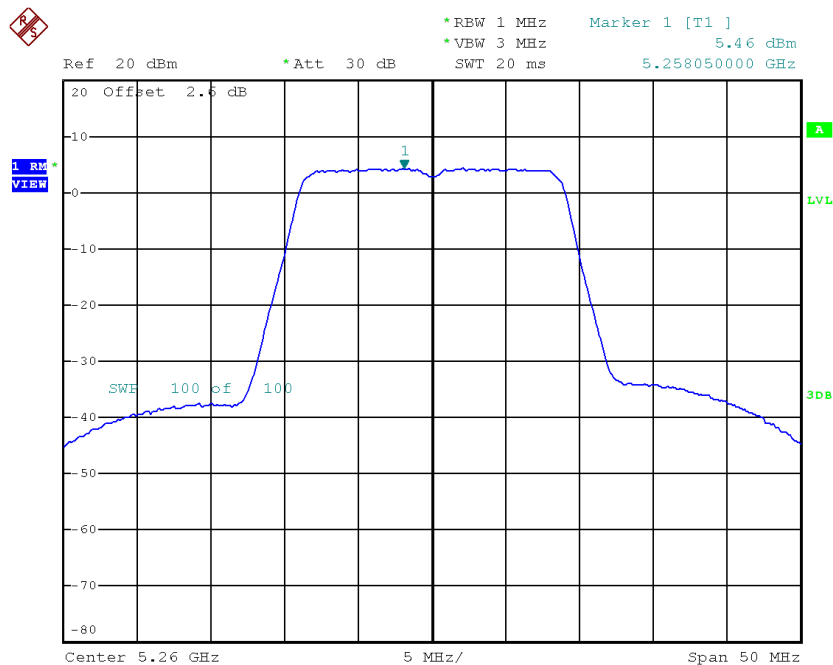


Date: 30.MAR.2018 11:52:10

CH60

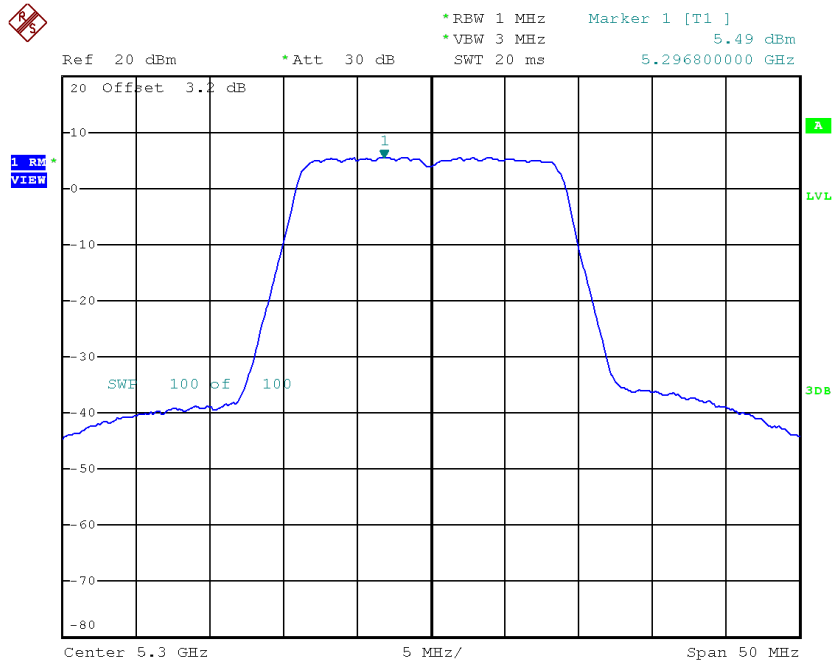

Date: 30.MAR.2018 10:55:16


CH64

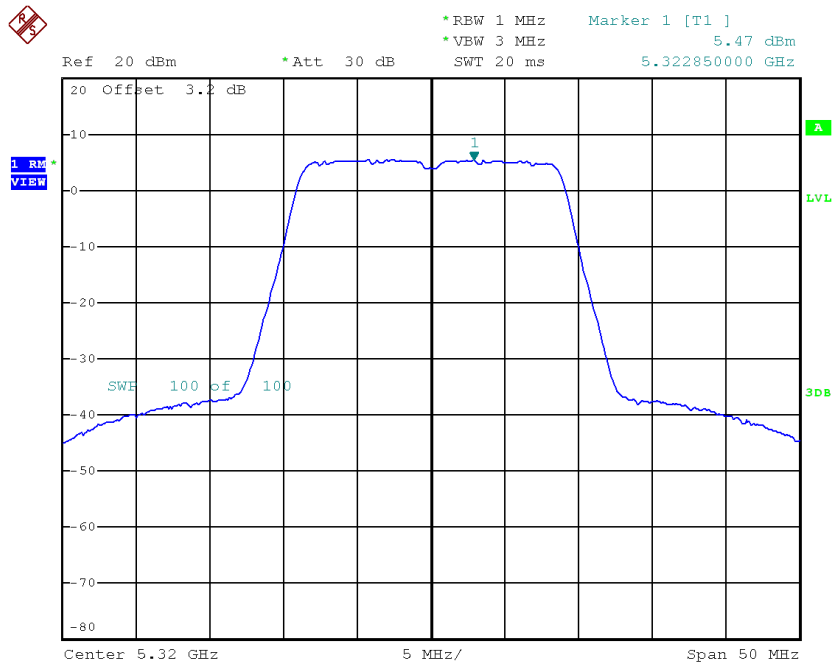


Date: 30.MAR.2018 10:58:05

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	4.36	0.33	4.69	9.61
CH60	5300	4.59	0.33	4.92	9.61
CH64	5320	4.52	0.33	4.85	9.61

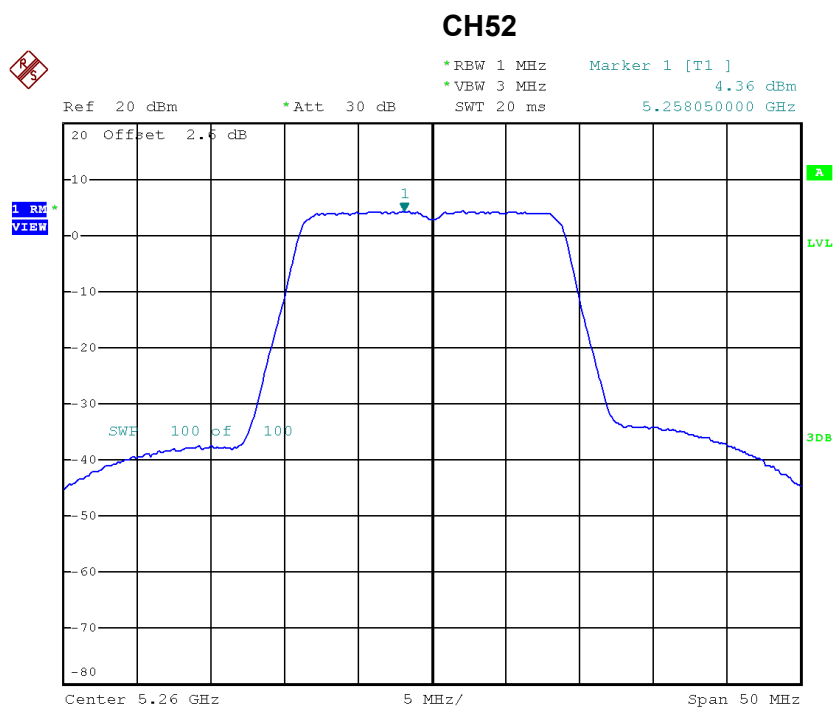

Date: 30.MAR.2018 11:52:10




Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	8.28	9.61
CH60	5300	8.40	9.61
CH64	5320	8.36	9.61

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	3.29	0.84	4.13	9.61
CH62	5310	-1.50	0.84	-0.66	9.61

CH54

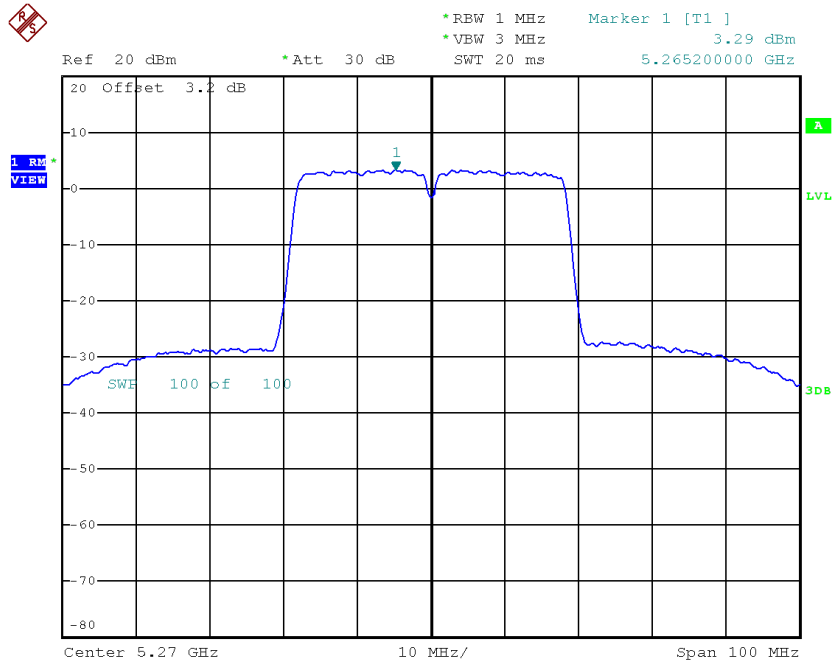

Date: 4.APR.2018 12:19:38

CH62

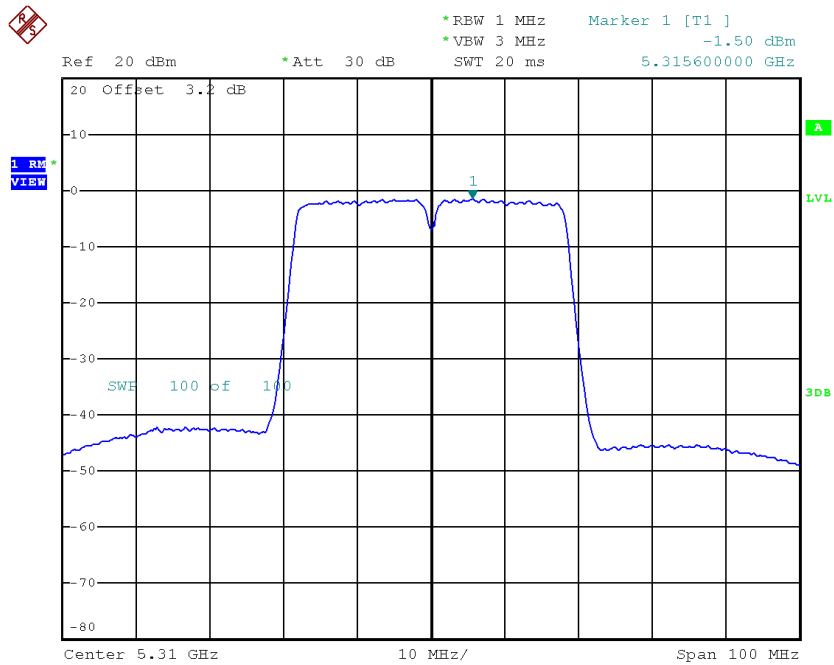


Date: 4.APR.2018 12:20:19

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	4.30	0.84	5.14	9.61
CH62	5310	-0.80	0.84	0.04	9.61

CH54

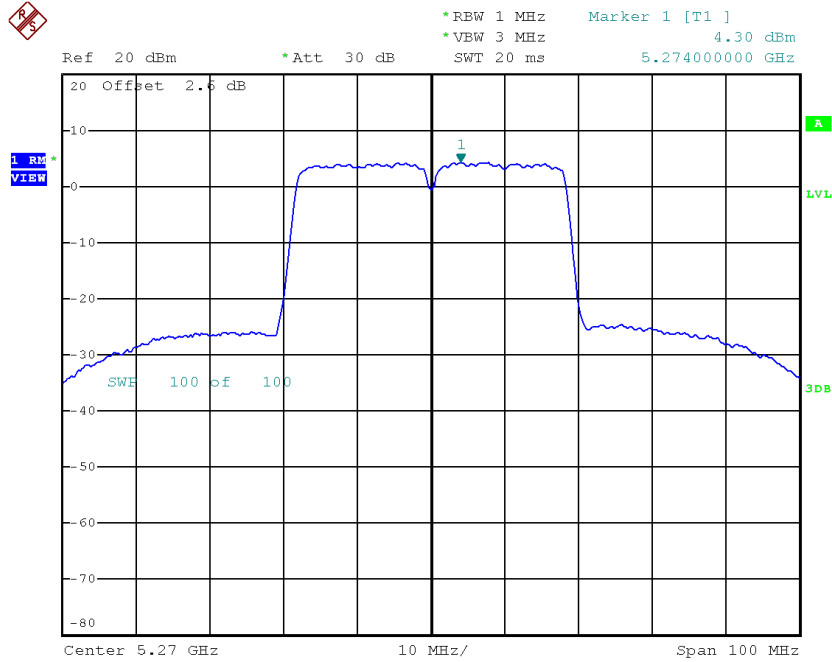

Date: 4.APR.2018 12:55:40

CH62

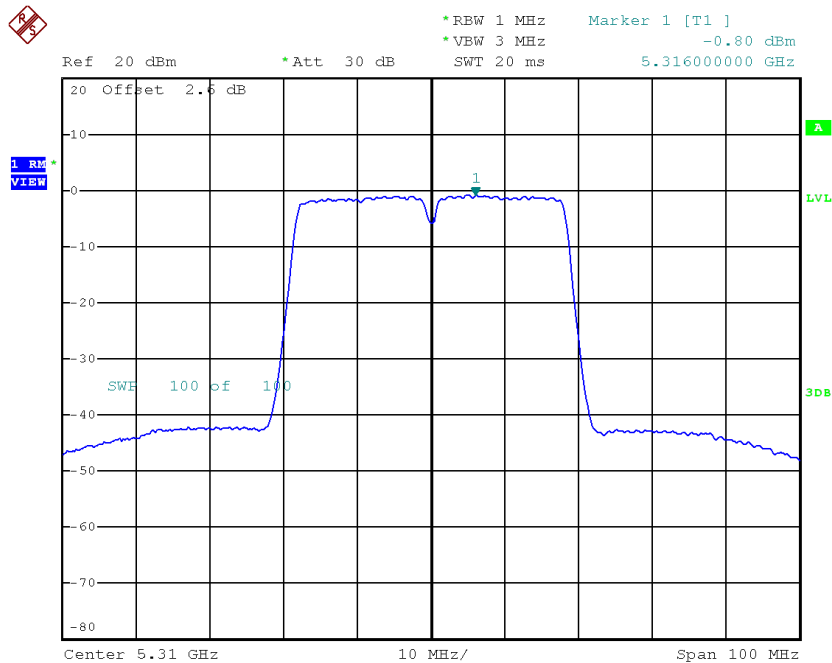


Date: 4.APR.2018 12:56:37

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	7.67	9.61
CH62	5310	2.71	9.61


Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_ANT1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	7.36	0.33	7.69	11.00
CH116	5580	9.46	0.33	9.79	11.00
CH140	5700	4.97	0.33	5.30	11.00

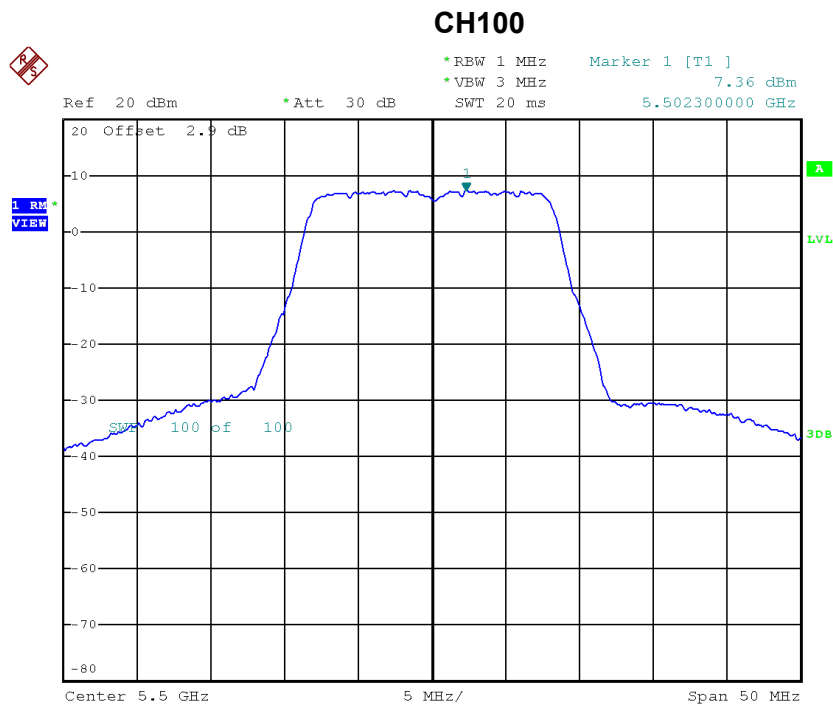


Date: 4.APR.2018 11:33:09

CH116

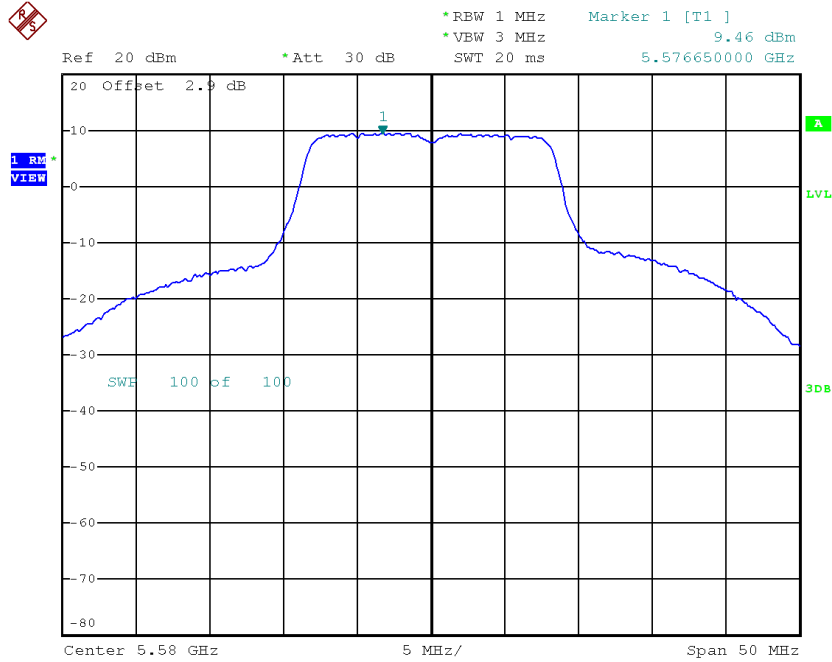

Date: 30.MAR.2018 10:36:34

CH140

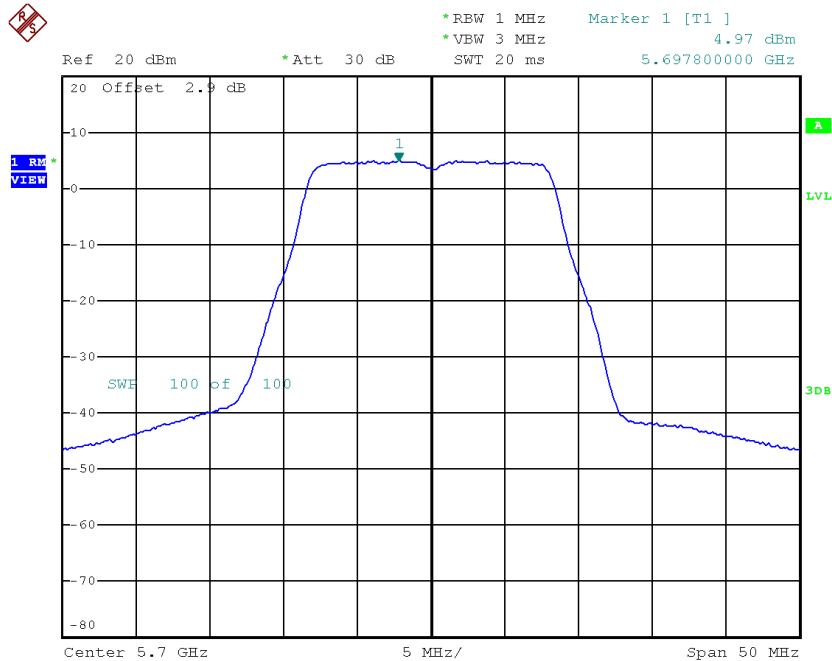


Date: 4.APR.2018 11:34:51

Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_ANT2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	6.22	0.33	6.55	11.00
CH116	5580	6.44	0.33	6.77	11.00
CH140	5700	6.45	0.33	6.78	11.00

CH100

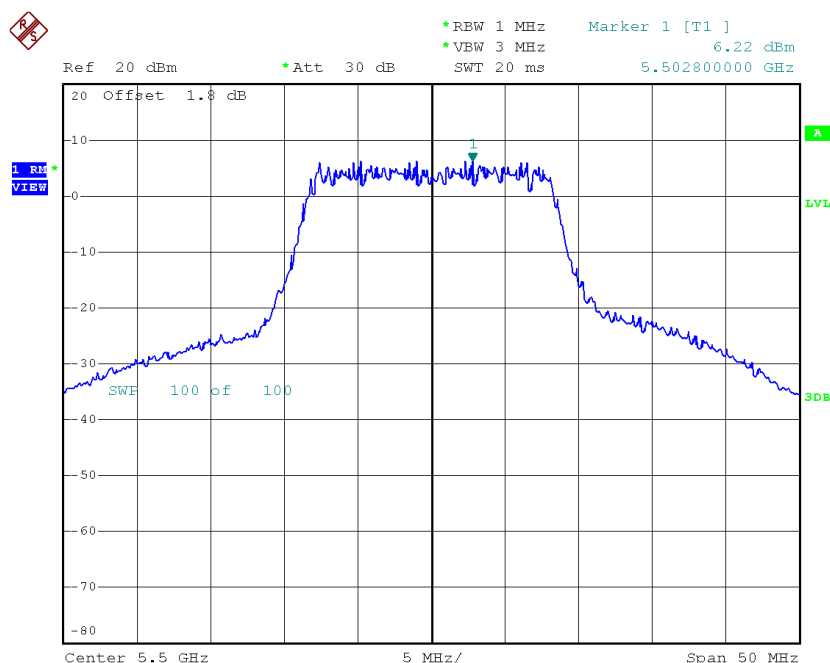


Date: 12.MAY.2016 11:59:50

CH116

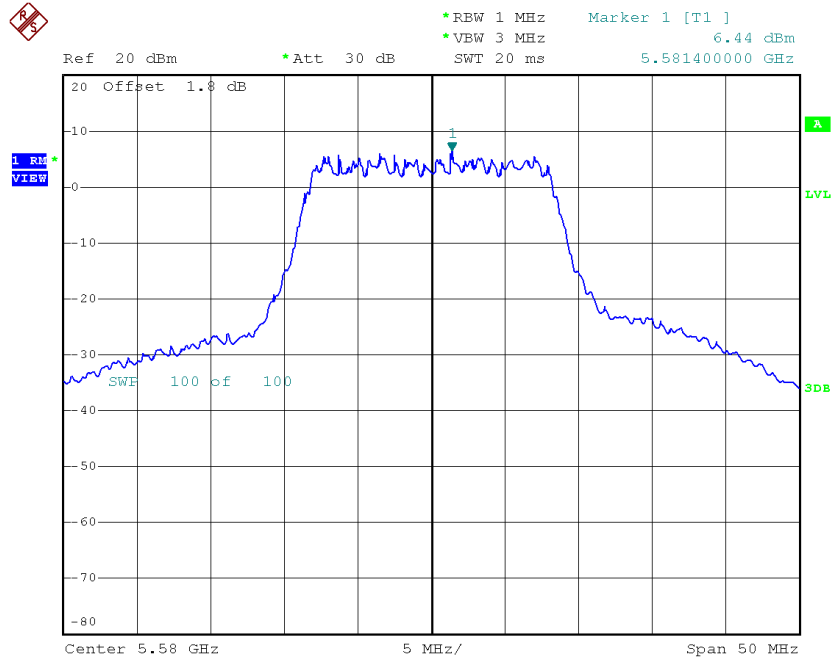

Date: 12.MAY.2016 12:00:15

CH140

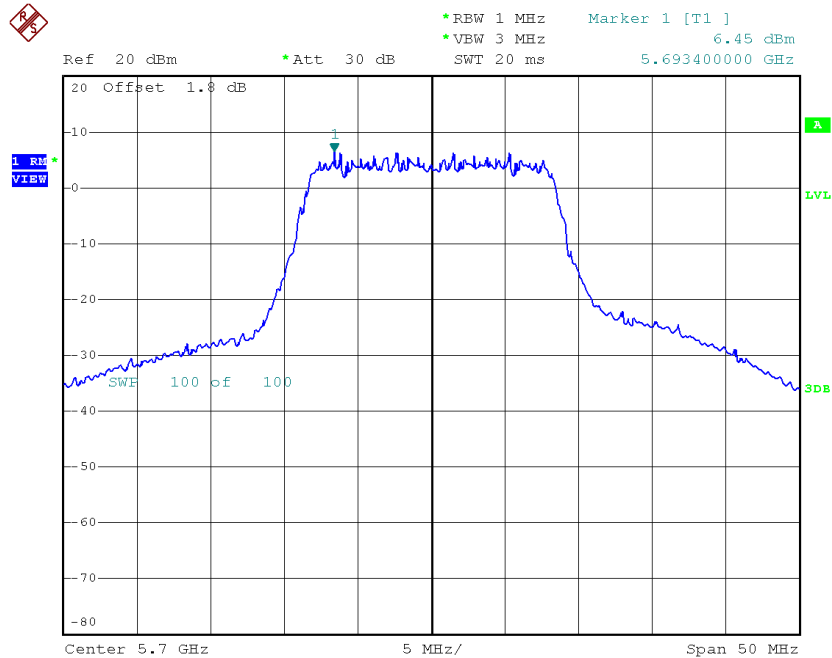


Date: 12.MAY.2016 12:00:41

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	4.17	0.33	4.50	8.20
CH116	5580	3.81	0.33	4.14	8.20
CH140	5700	3.59	0.33	3.92	8.20

CH100

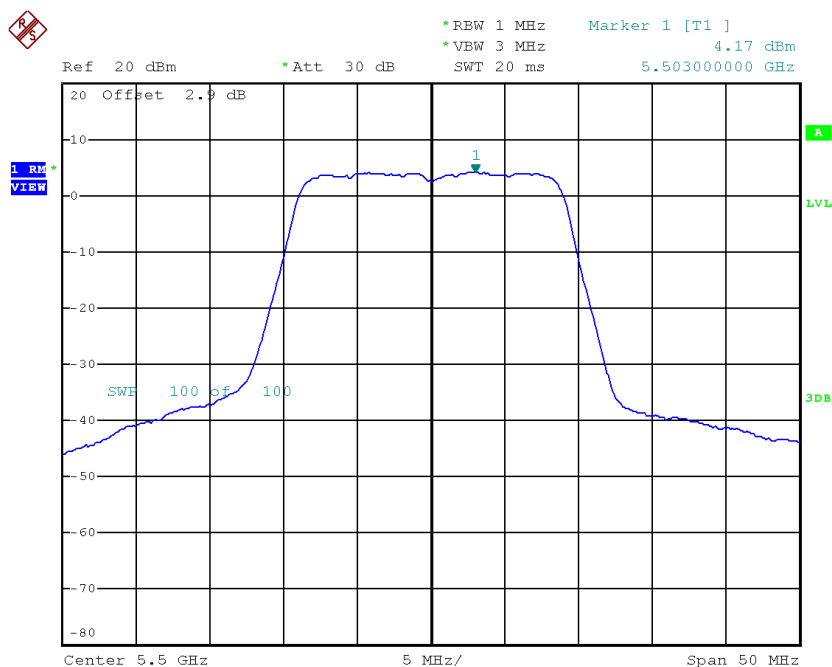


Date: 30.MAR.2018 10:59:56

CH116

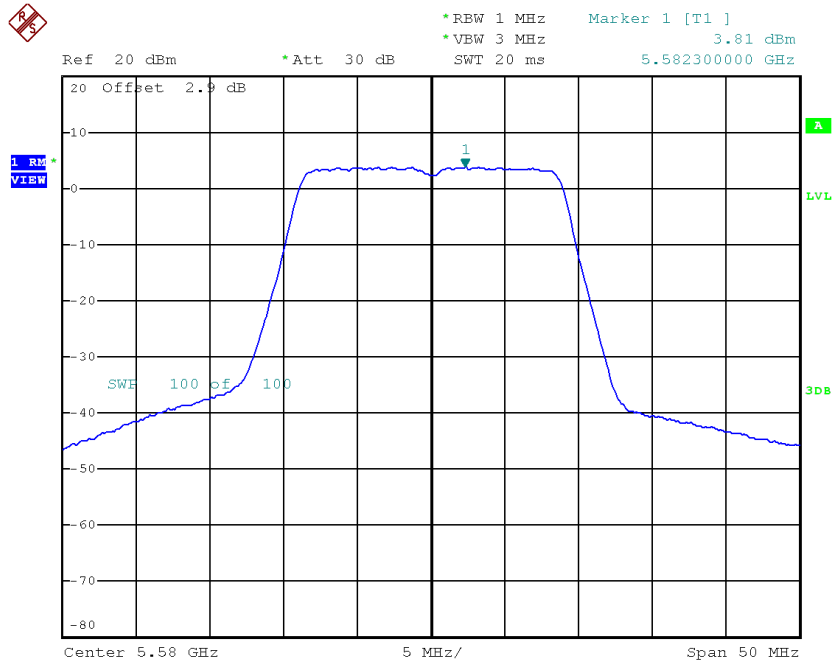

Date: 30.MAR.2018 11:02:00

CH140

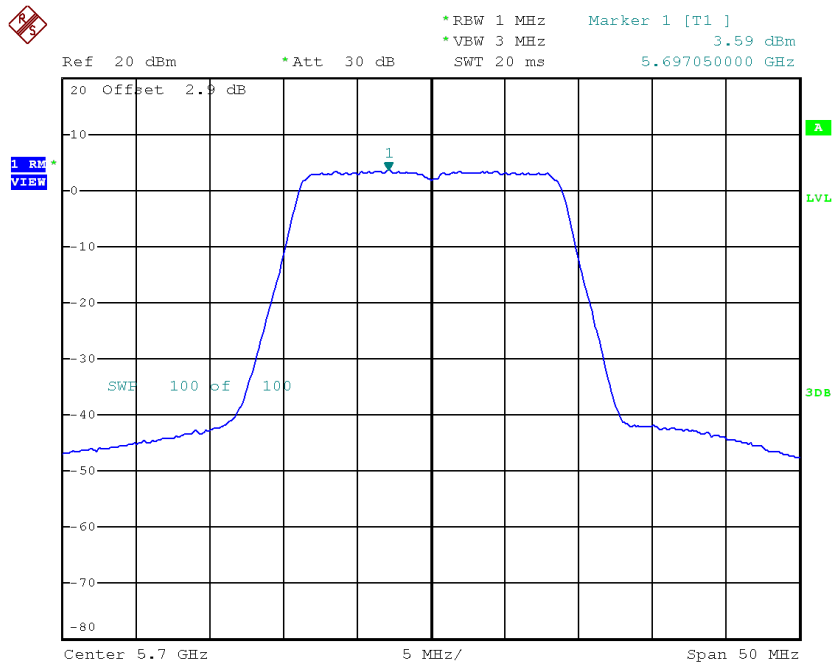


Date: 30.MAR.2018 11:05:18

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	3.49	0.33	3.82	8.20
CH116	5580	3.10	0.33	3.43	8.20
CH140	5700	1.64	0.33	1.97	8.20

CH100

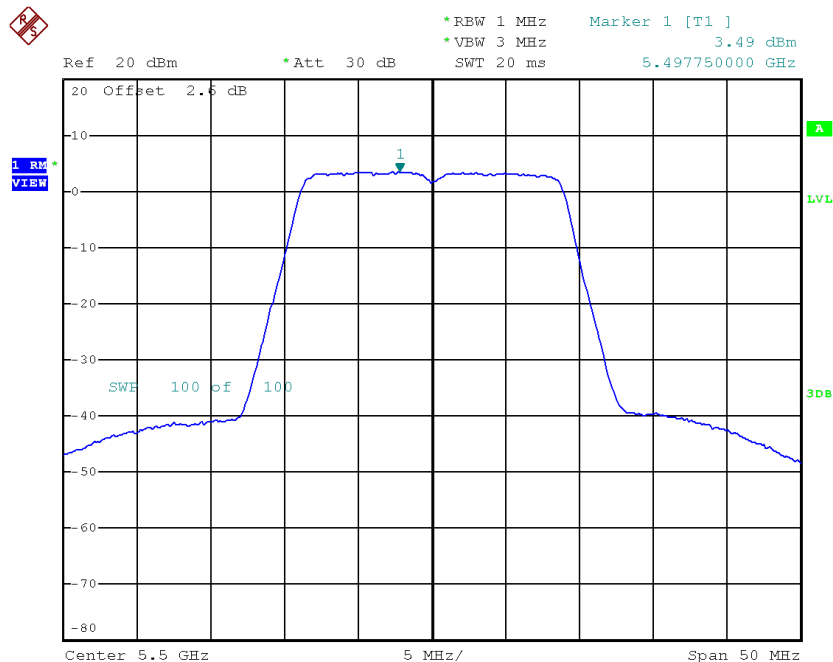


Date: 30.MAR.2018 11:57:34

CH116

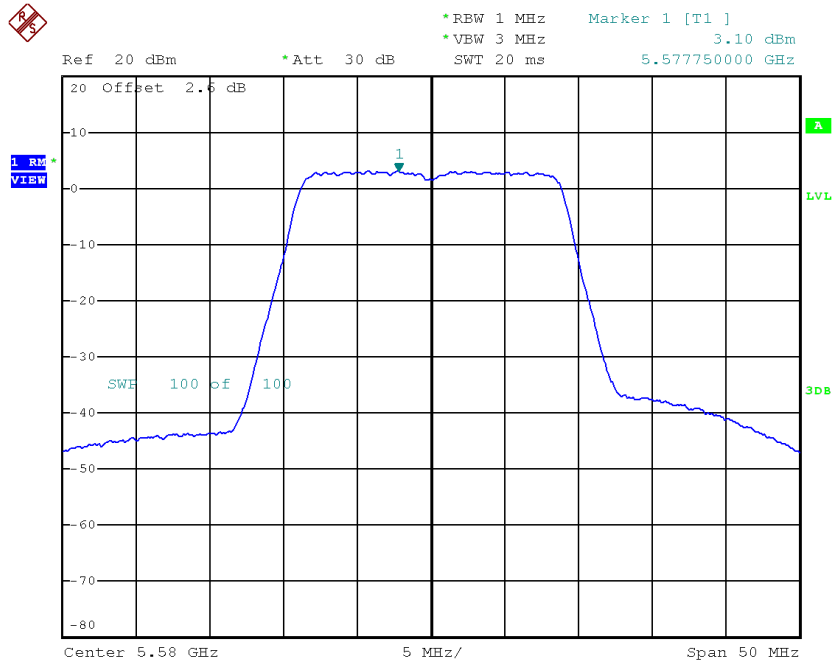

Date: 30.MAR.2018 12:00:42

CH140

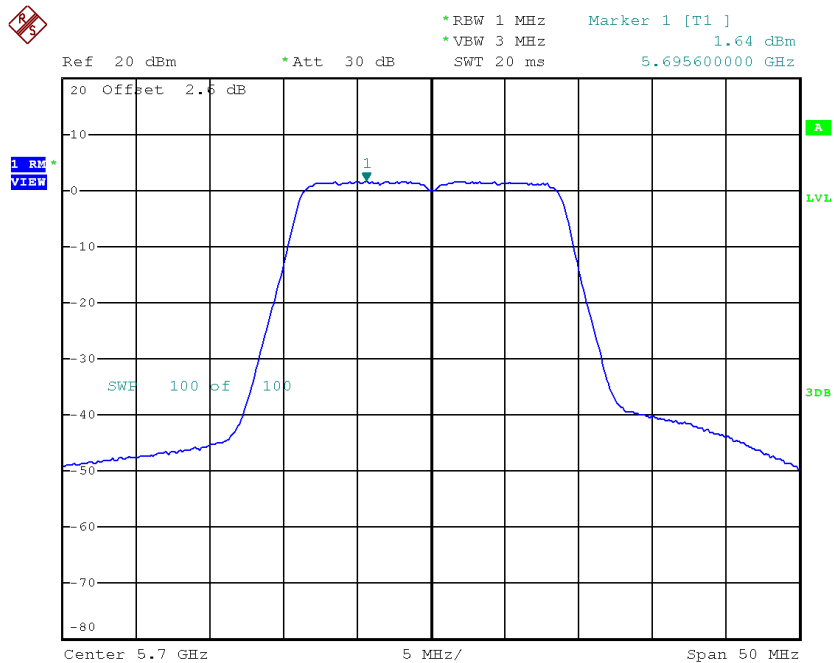

Date: 30.MAR.2018 12:04:40


Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	7.18	8.20
CH116	5580	6.81	8.20
CH140	5700	6.06	8.20

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-0.36	0.84	0.48	8.20
CH110	5550	3.39	0.84	4.23	8.20
CH134	5670	1.48	0.84	2.32	8.20

CH102

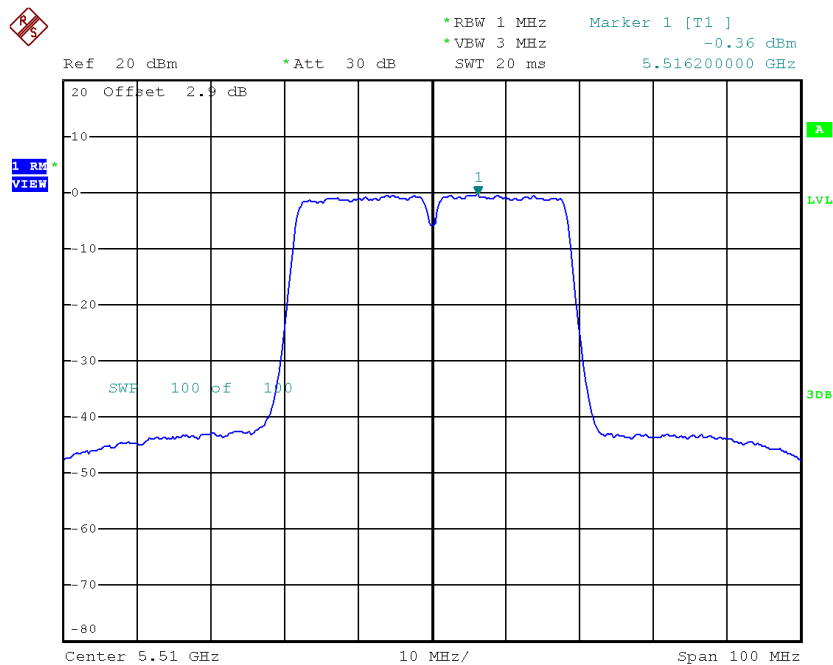


Date: 30.MAR.2018 11:09:21

CH110

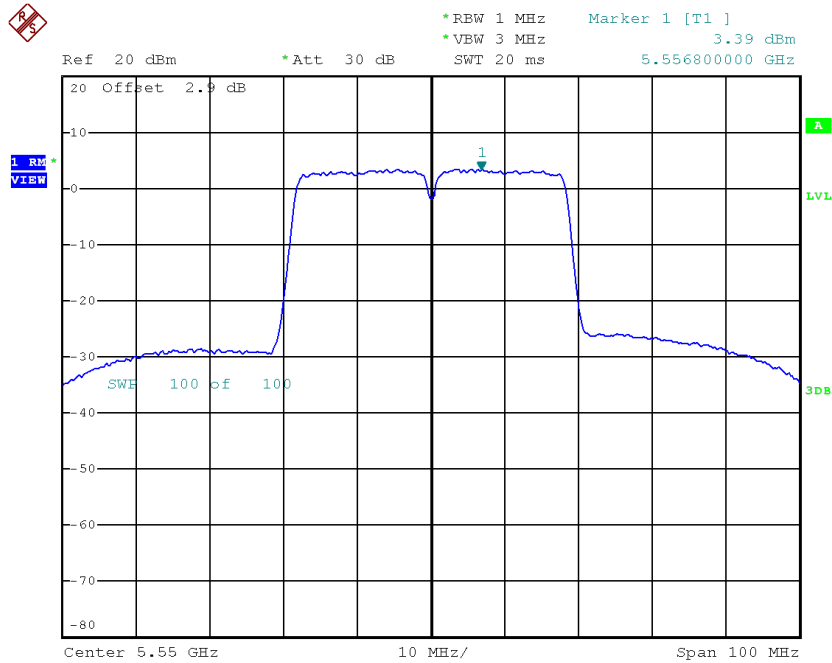

Date: 30.MAR.2018 11:10:54

CH134

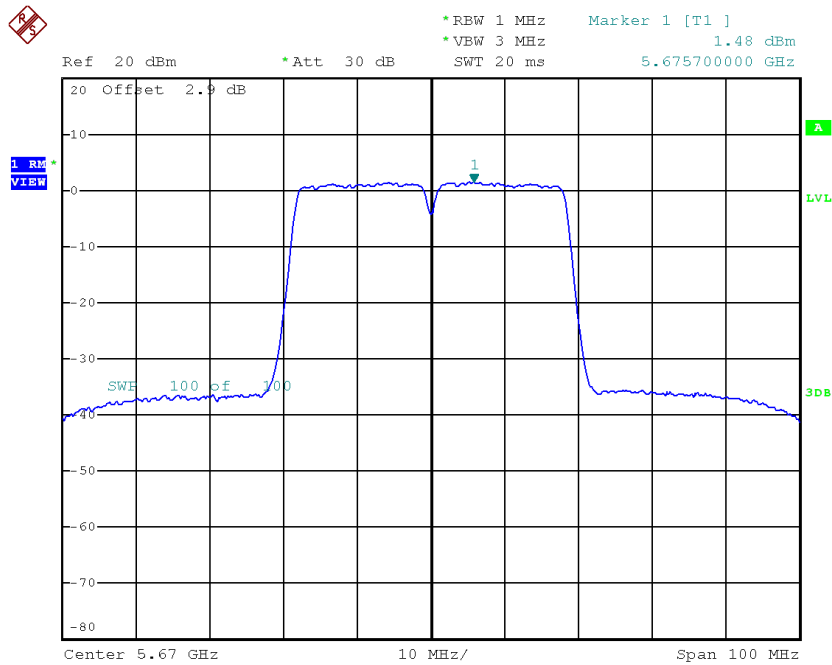


Date: 30.MAR.2018 11:17:42

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-0.26	0.84	0.58	8.20
CH110	5550	3.25	0.84	4.09	8.20
CH134	5670	1.32	0.84	2.16	8.20

CH102

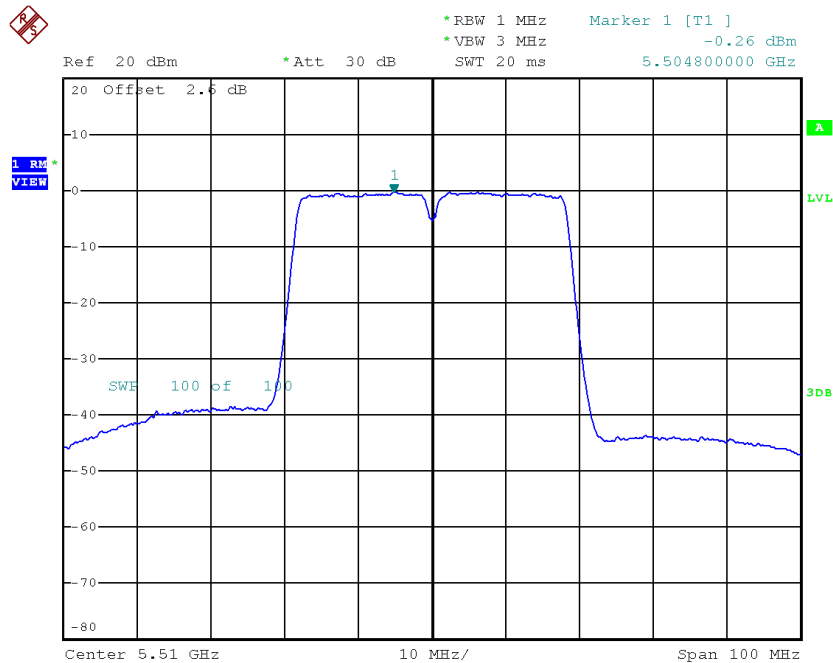


Date: 4.APR.2018 12:57:19

CH110

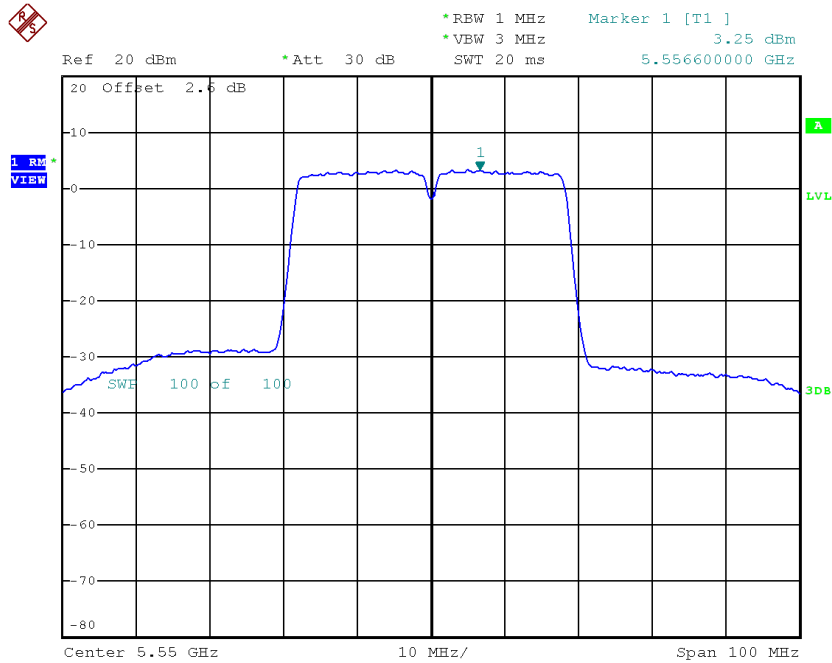

Date: 4.APR.2018 12:58:54

CH134

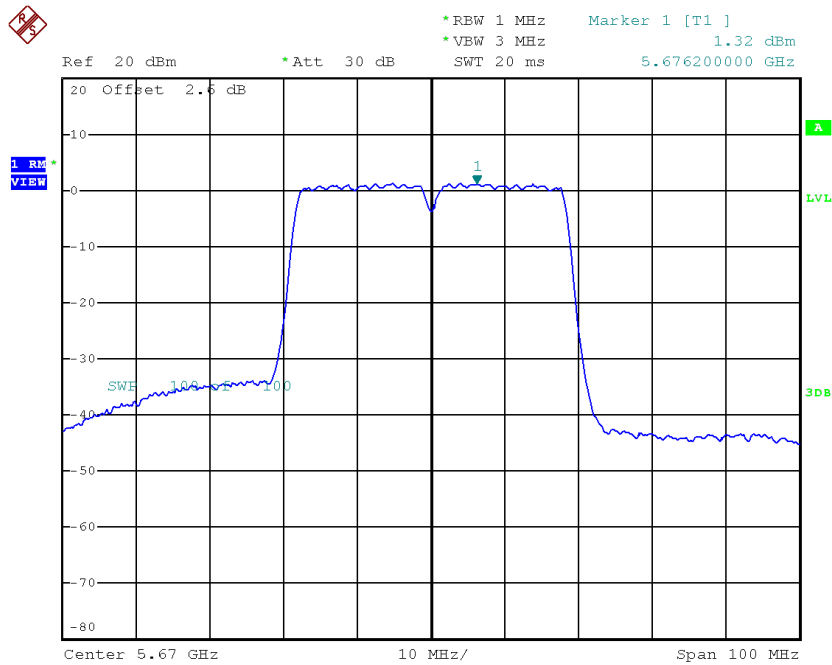


Date: 4.APR.2018 12:59:59

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	3.54	8.20
CH110	5550	7.17	8.20
CH134	5670	5.25	8.20


Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_ANT1

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	7.90	0.33	8.23	30.00
CH157	5785	7.98	0.33	8.31	30.00
CH165	5825	7.96	0.33	8.29	30.00

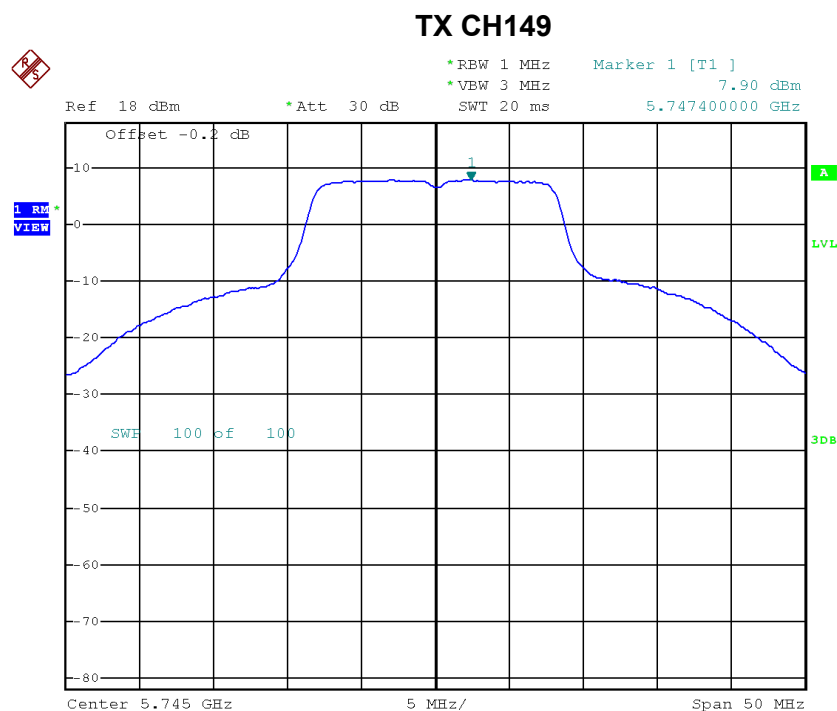


Date: 1.JAN.2003 08:04:19

TX CH157

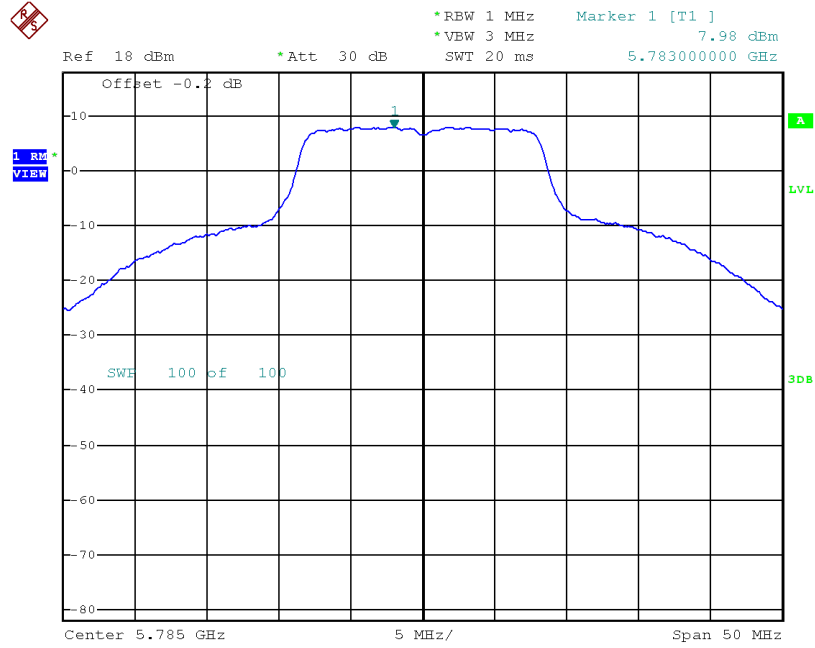

Date: 1.JAN.2003 08:05:34

TX CH165

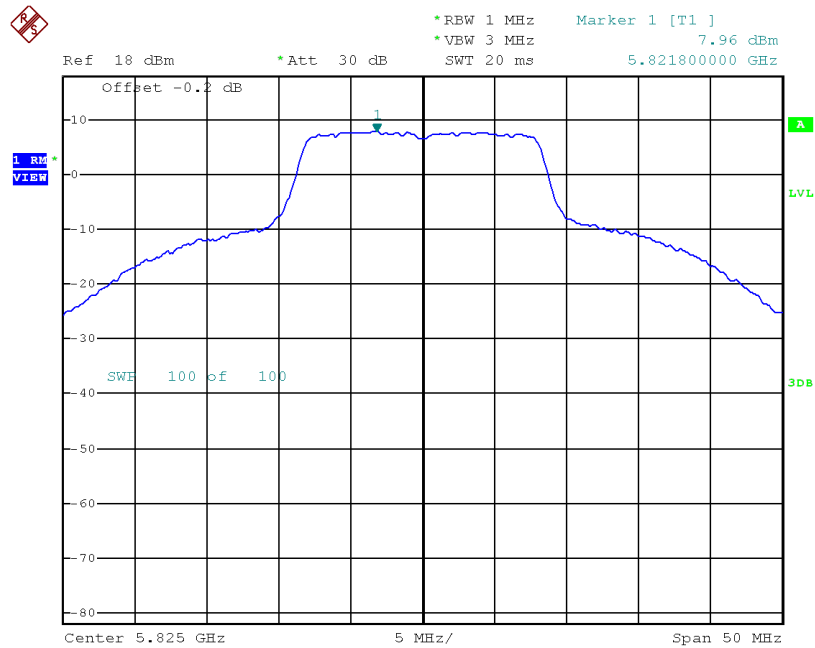


Date: 1.JAN.2003 08:05:57

Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_ANT2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	4.45	0.33	4.78	30.00
CH157	5785	4.01	0.33	4.34	30.00
CH165	5825	3.69	0.33	4.02	30.00

TX CH149

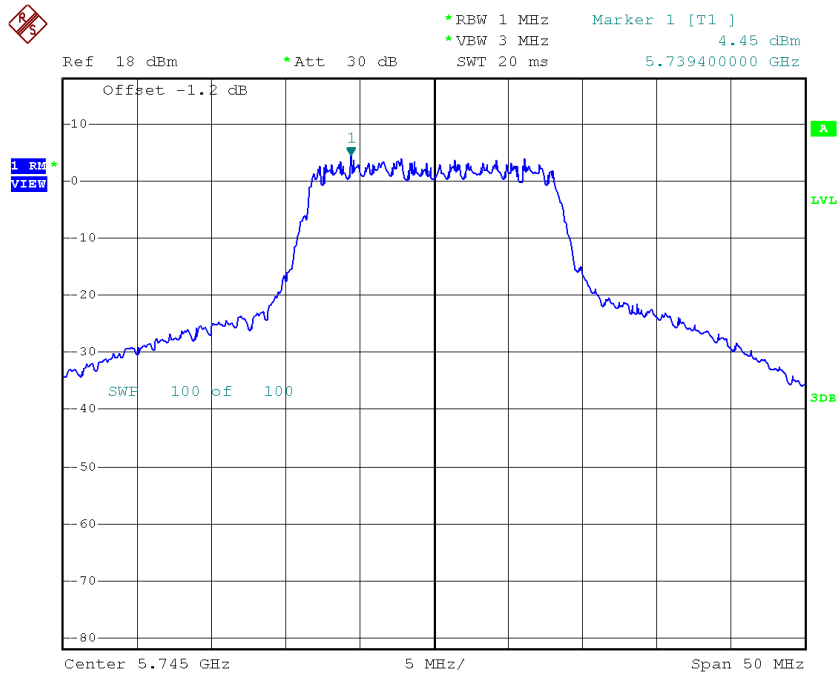


Date: 11.MAY.2016 17:13:09

TX CH157

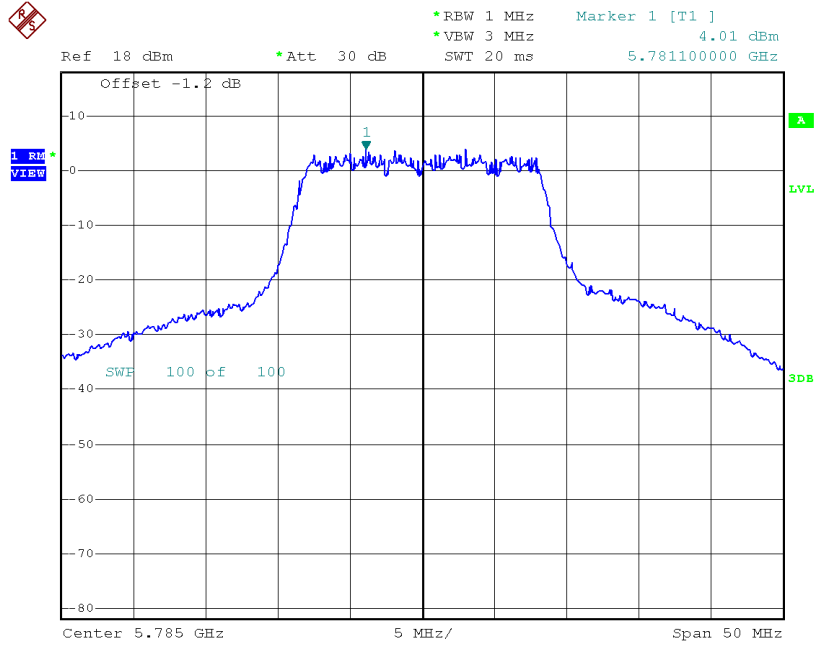

Date: 11.MAY.2016 17:13:44


TX CH165

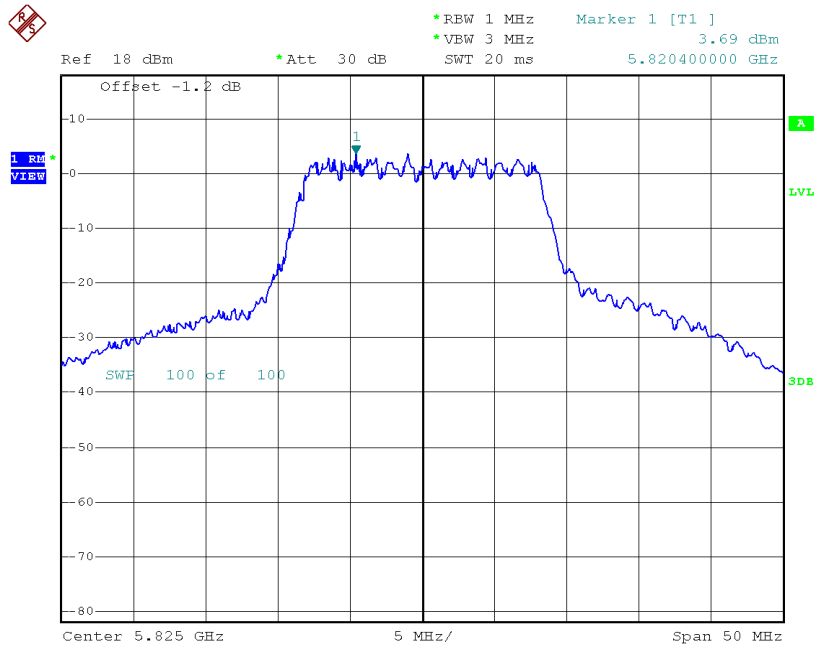

Date: 11.MAY.2016 17:14:16


Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	7.41	0.33	7.74	26.95
CH157	5785	7.17	0.33	7.50	26.95
CH165	5825	6.65	0.33	6.98	26.95

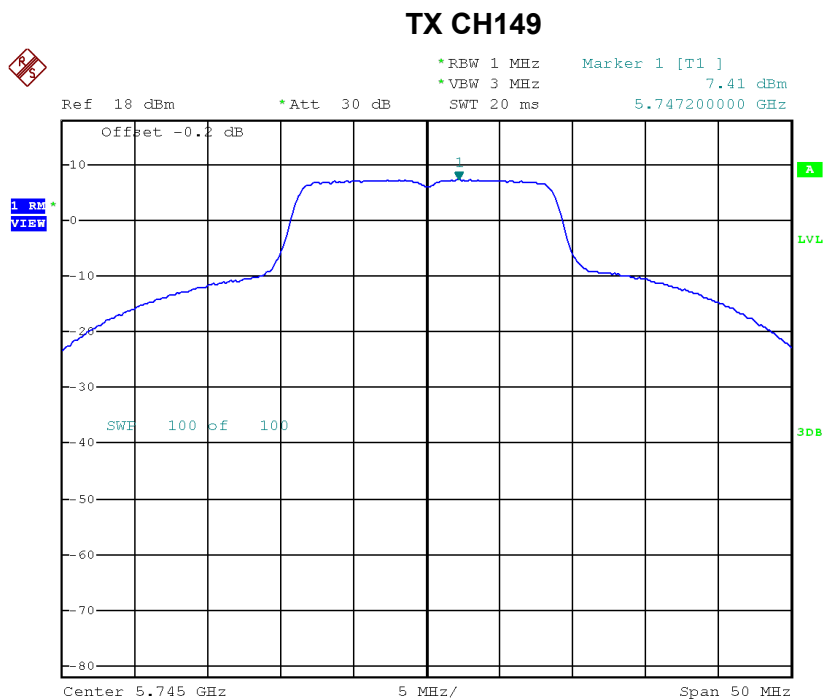


Date: 1.JAN.2003 08:07:32

TX CH157

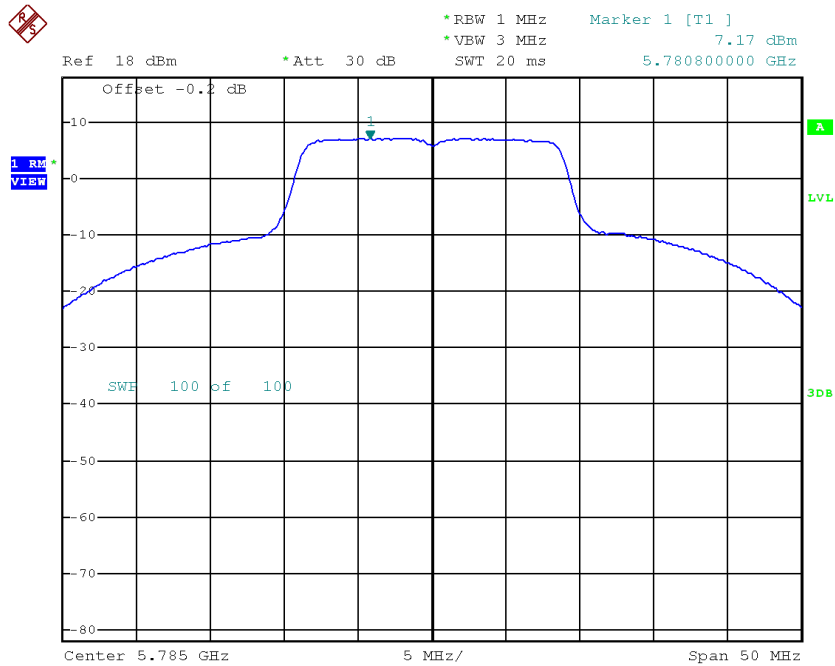

Date: 1.JAN.2003 08:07:49

TX CH165

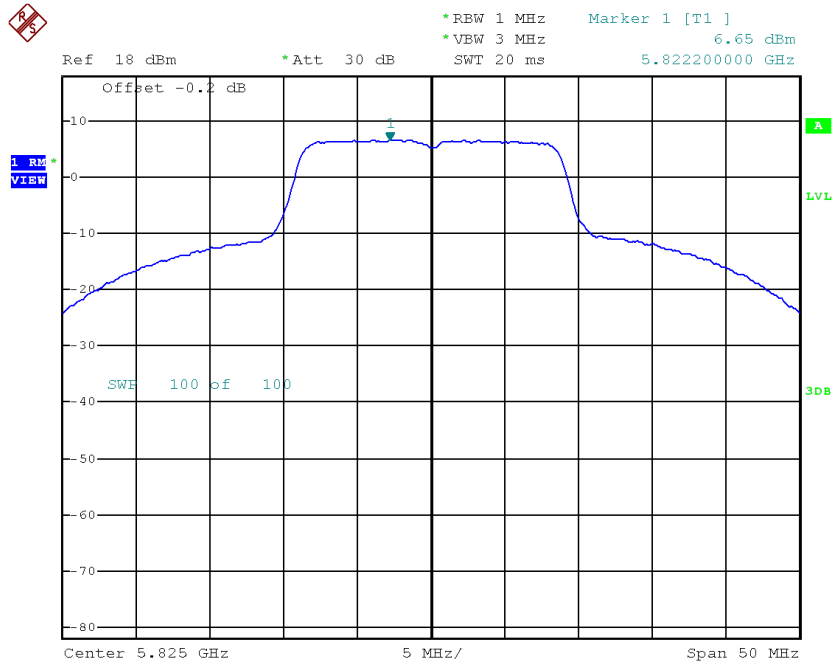


Date: 1.JAN.2003 08:08:03

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	3.44	0.33	3.77	26.95
CH157	5785	2.95	0.33	3.28	26.95
CH165	5825	2.70	0.33	3.03	26.95

TX CH149

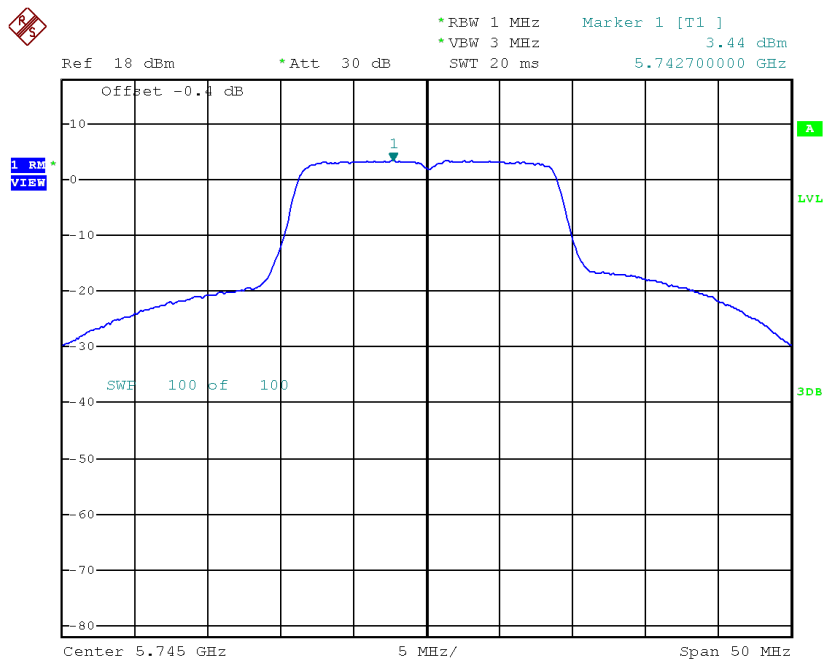


Date: 1.JAN.2003 08:23:07

TX CH157

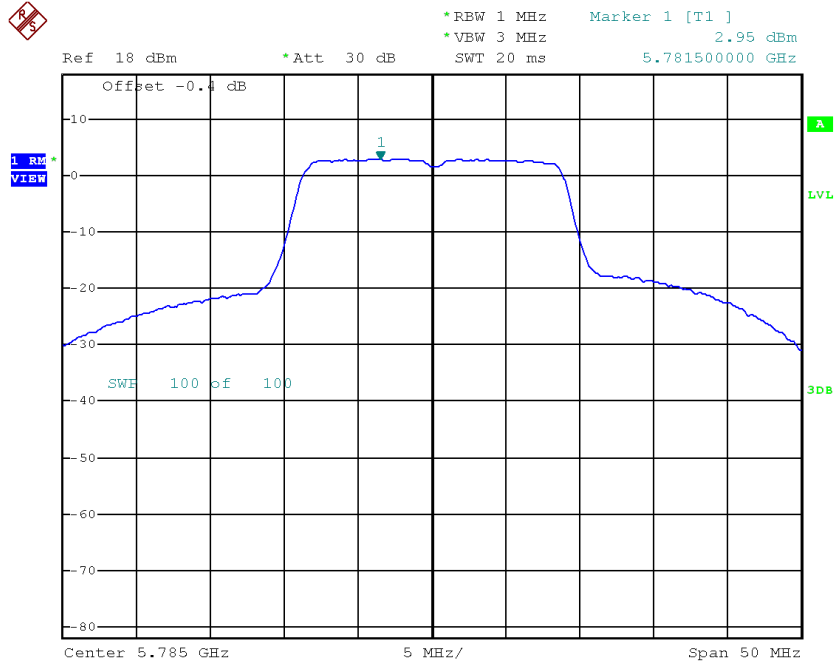

Date: 1.JAN.2003 08:24:12

TX CH165

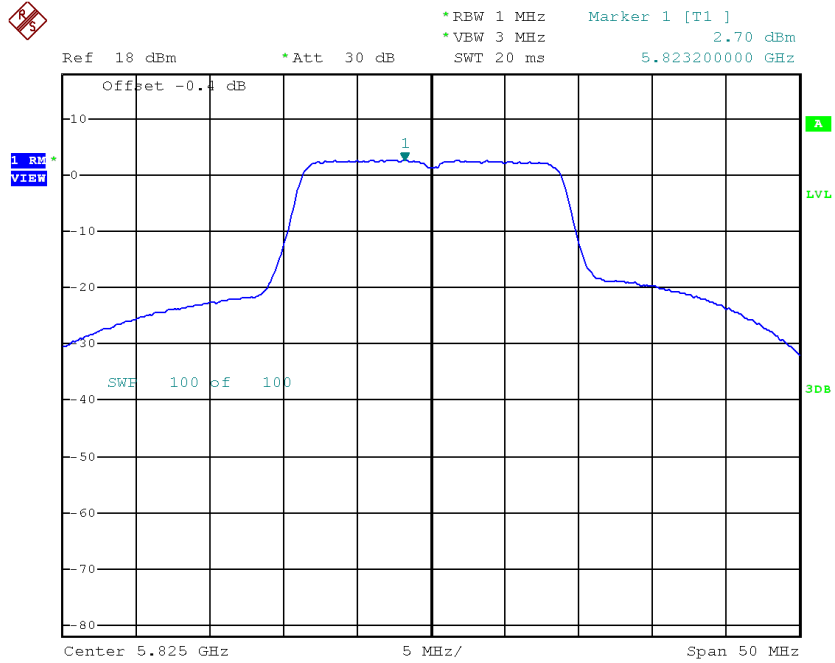

Date: 1.JAN.2003 08:25:09


Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	9.20	26.95
CH157	5785	8.89	26.95
CH165	5825	8.45	26.95

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	3.38	0.84	4.22	26.95
CH159	5795	3.16	0.84	4.00	26.95

TX CH151

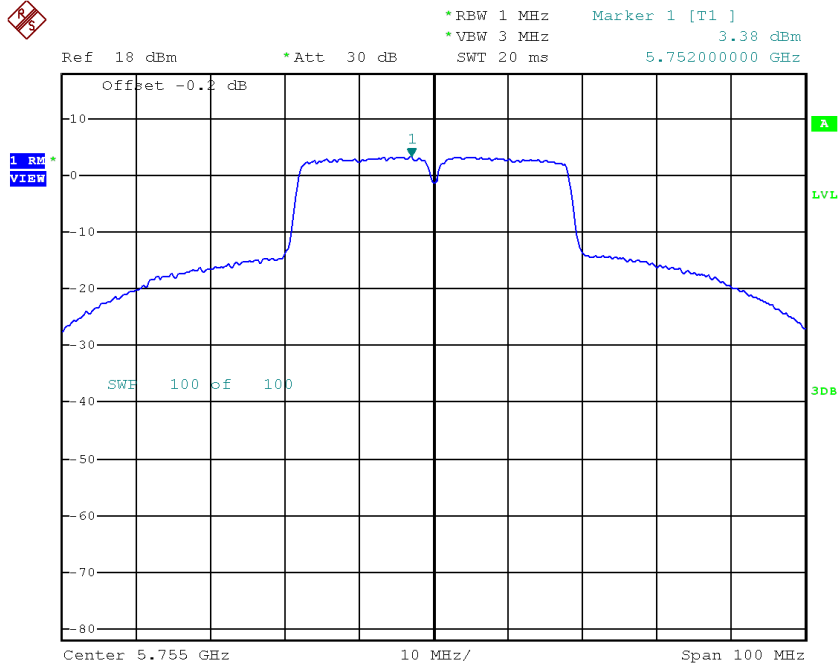

Date: 1.JAN.2003 08:11:24

TX CH159

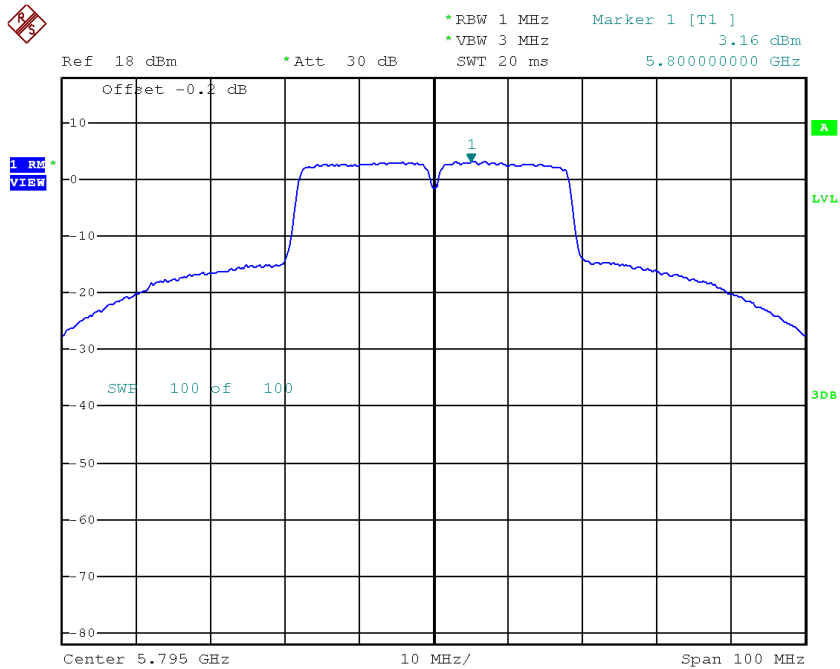


Date: 1.JAN.2003 08:11:44

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	0.59	0.84	1.43	26.95
CH159	5795	0.67	0.84	1.51	26.95

TX CH151

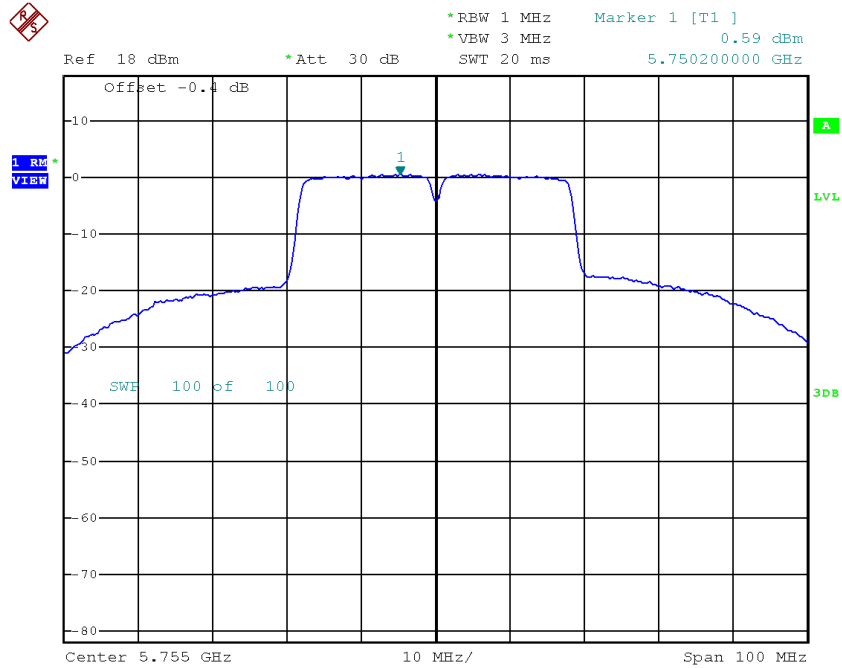

Date: 1.JAN.2003 08:27:11

TX CH159

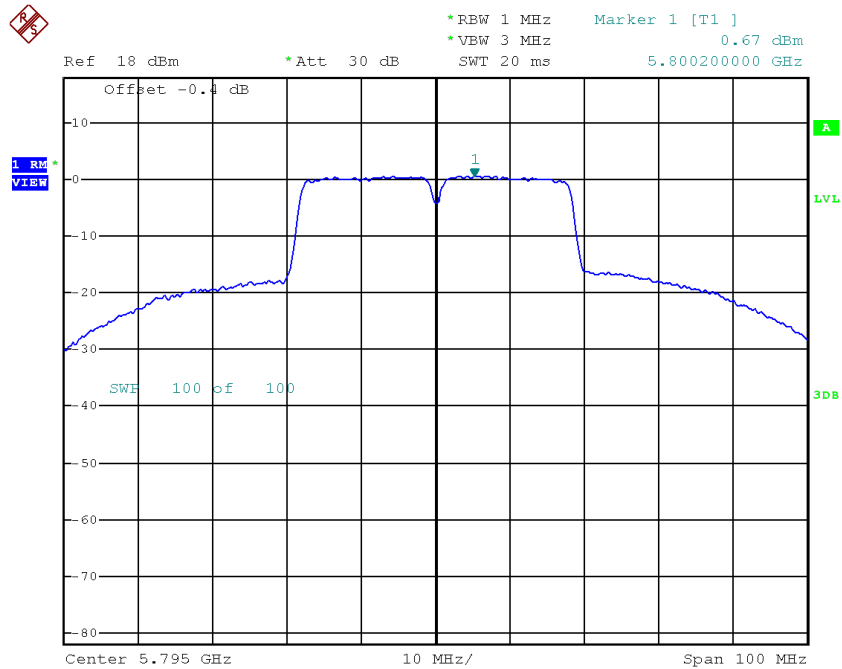


Date: 1.JAN.2003 08:27:34

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	6.05	26.95
CH159	5795	5.94	26.95


Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	5.11	0.32	5.43	9.51
CH40	5200	5.25	0.32	5.57	9.51
CH48	5240	5.26	0.32	5.58	9.51

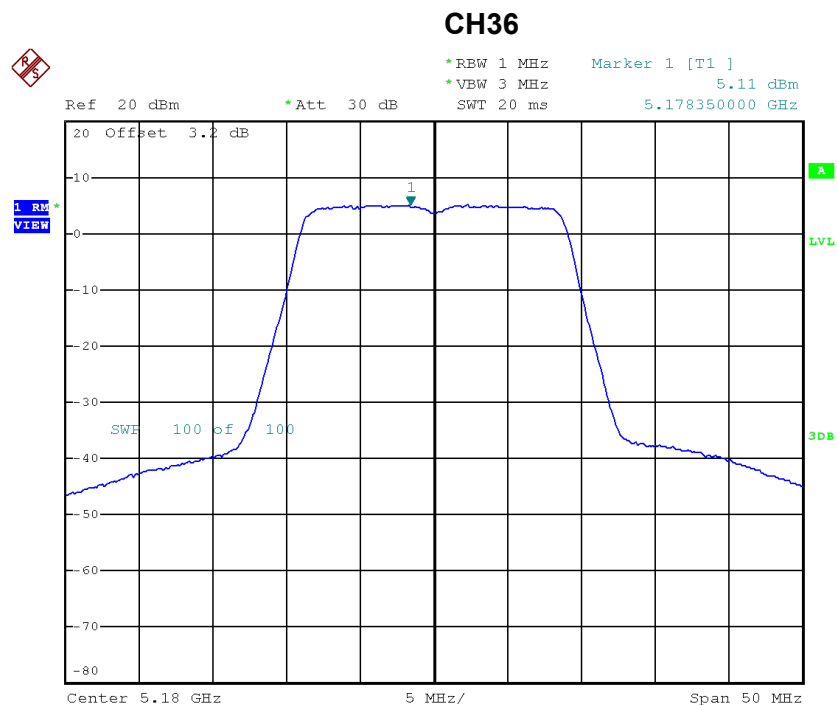


Date: 30.MAR.2018 11:30:35

CH40

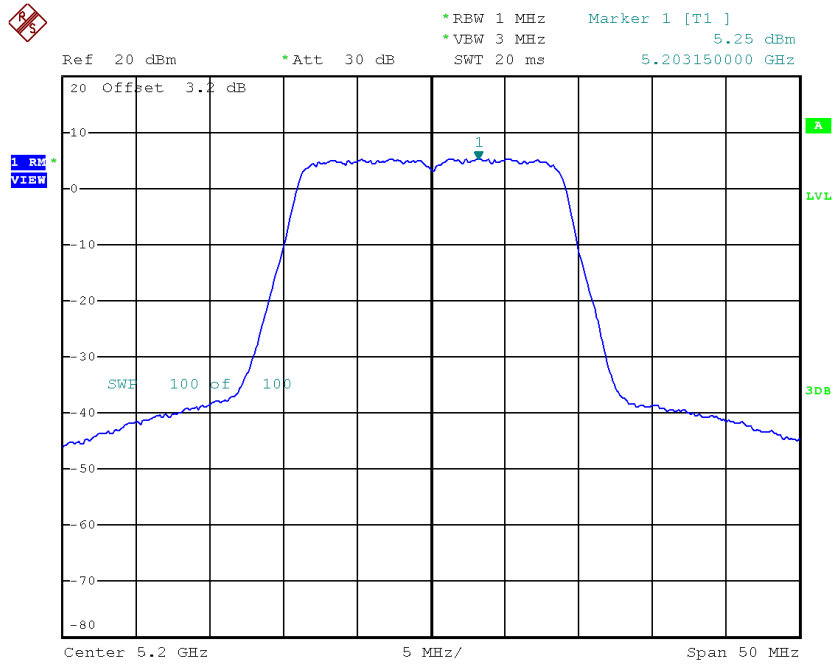

Date: 30.MAR.2018 11:32:11


CH48

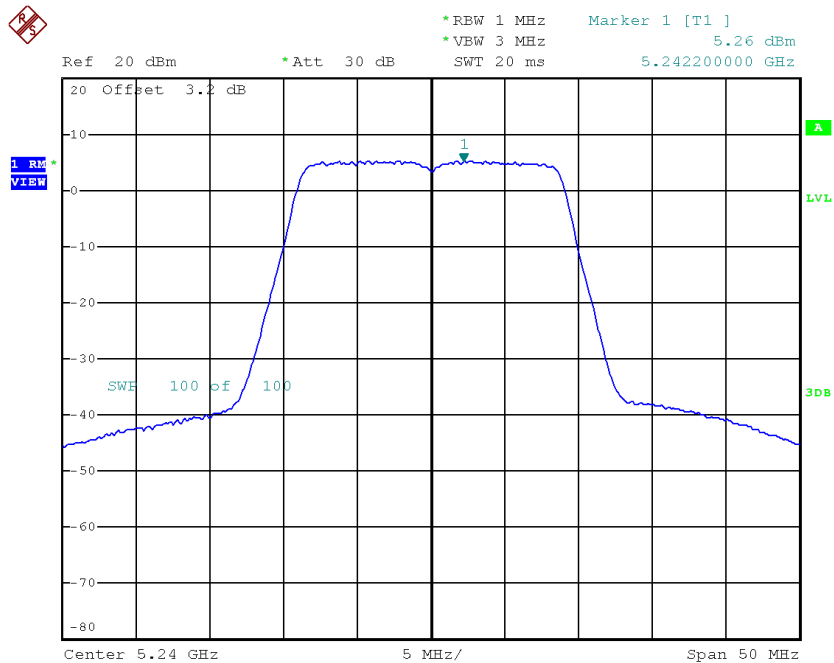

Date: 30.MAR.2018 11:33:51


Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	-1.07	0.32	-0.75	9.51
CH40	5200	-1.59	0.32	-1.27	9.51
CH48	5240	-0.74	0.32	-0.42	9.51

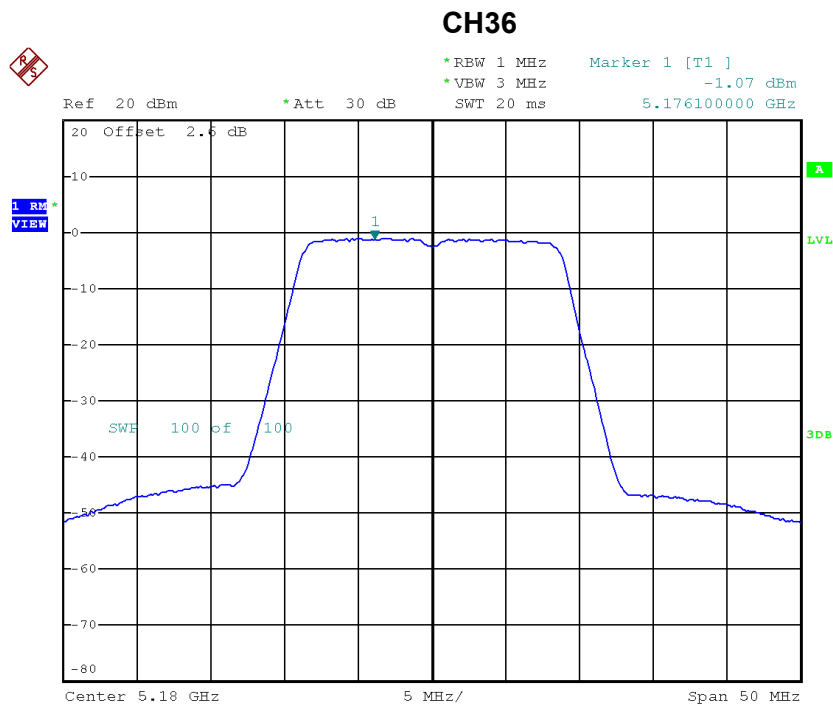


Date: 4.APR.2018 11:10:52

CH40

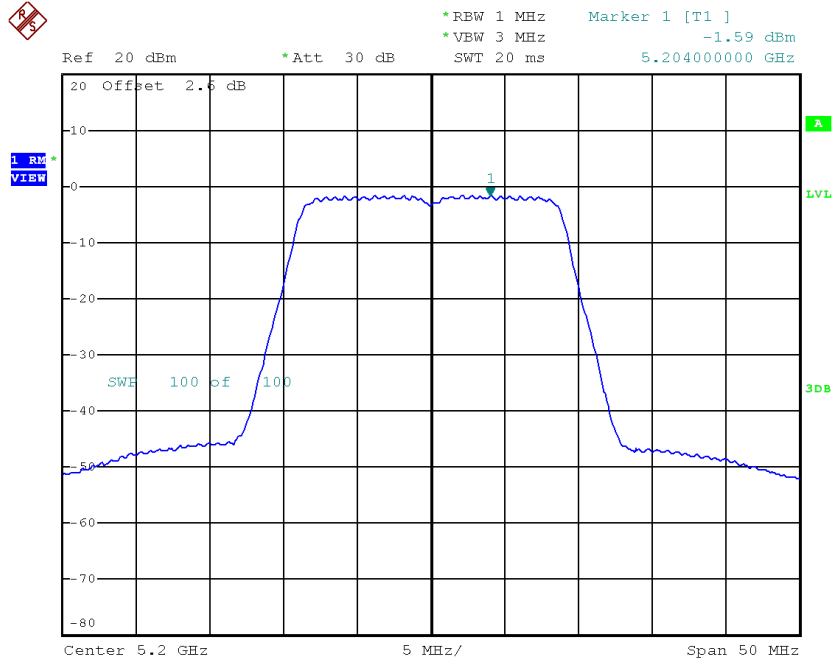

Date: 4.APR.2018 11:11:41

CH48

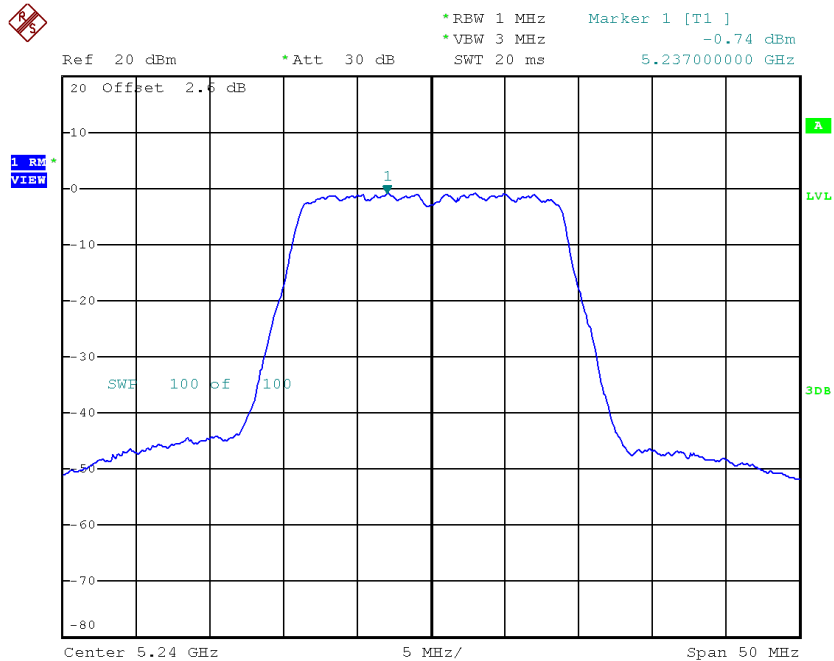

Date: 4.APR.2018 11:12:36


Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	6.37	9.51
CH40	5200	6.39	9.51
CH48	5240	6.56	9.51

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-3.63	0.80	-2.83	9.51
CH46	5230	4.75	0.80	5.55	9.51

CH38

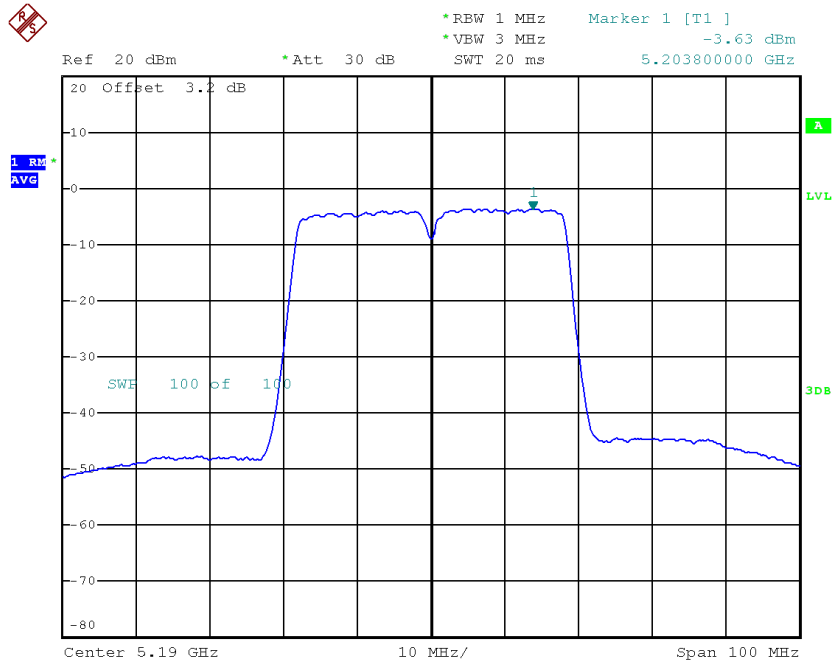

Date: 4.APR.2018 12:28:05

CH46

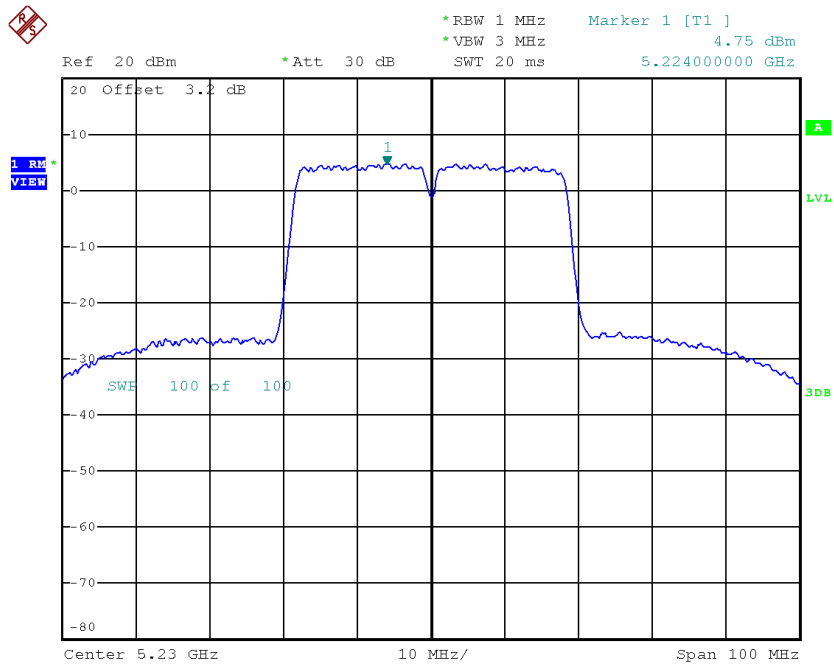


Date: 30.MAR.2018 11:21:13

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-3.19	0.80	-2.39	9.51
CH46	5230	-3.80	0.80	-3.00	9.51

CH38

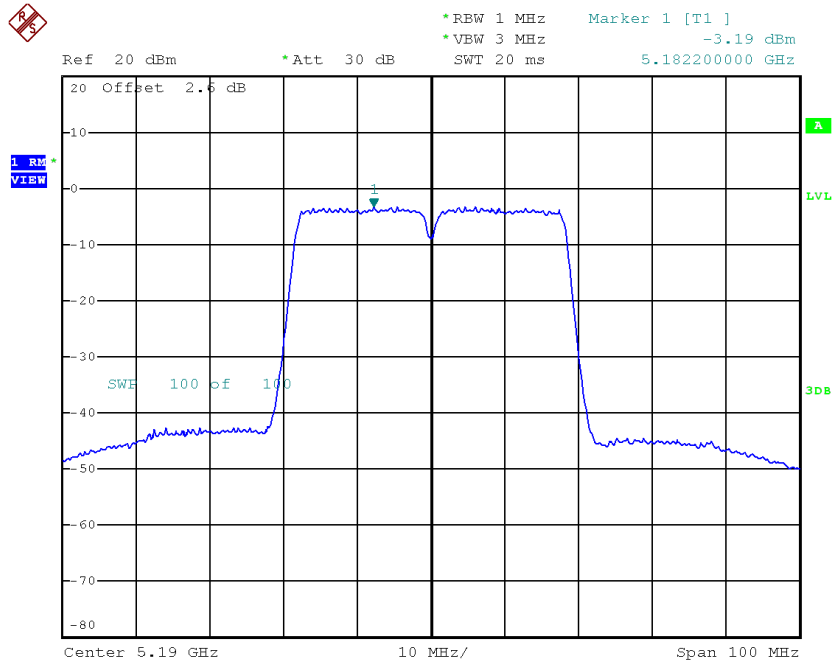

Date: 4.APR.2018 11:04:40

CH46

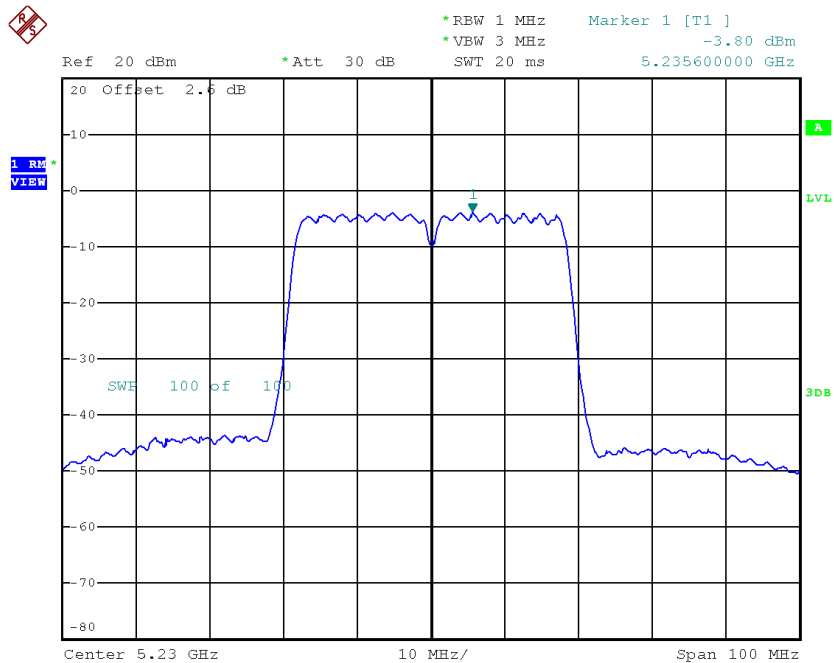


Date: 4.APR.2018 11:06:22

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	0.41	9.51
CH46	5230	6.12	9.51

Test Mode: UNII-1/TX AC80 Mode_CH42_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH42	5210	-8.46	1.42	-7.04	9.51

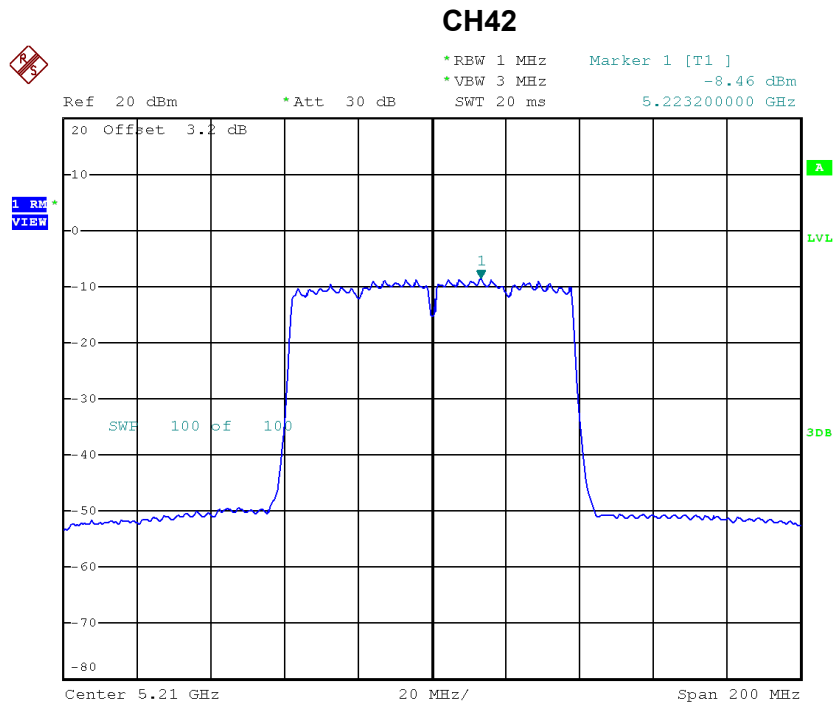

Date: 4.APR.2018 12:31:42

Test Mode: UNII-1/TX AC80 Mode_CH42_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH42	5210	-9.48	1.42	-8.06	9.51

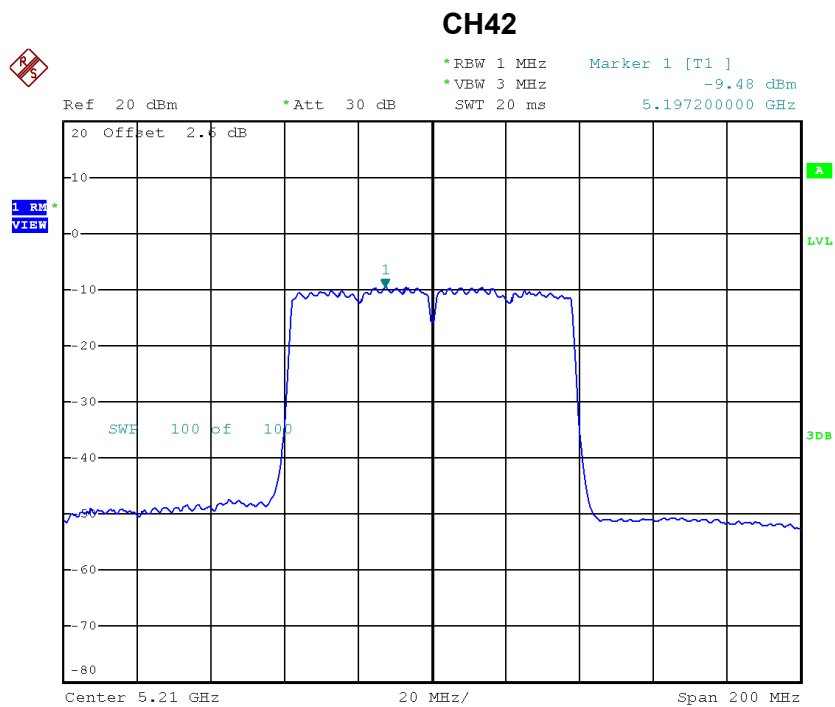


Date: 4.APR.2018 11:03:05

Test Mode: UNII-1/TX AC80 Mode_CH42_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH42	5210	-4.51	9.51


Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	4.91	0.32	5.23	9.61
CH60	5300	5.12	0.32	5.44	9.61
CH64	5320	5.22	0.32	5.54	9.61

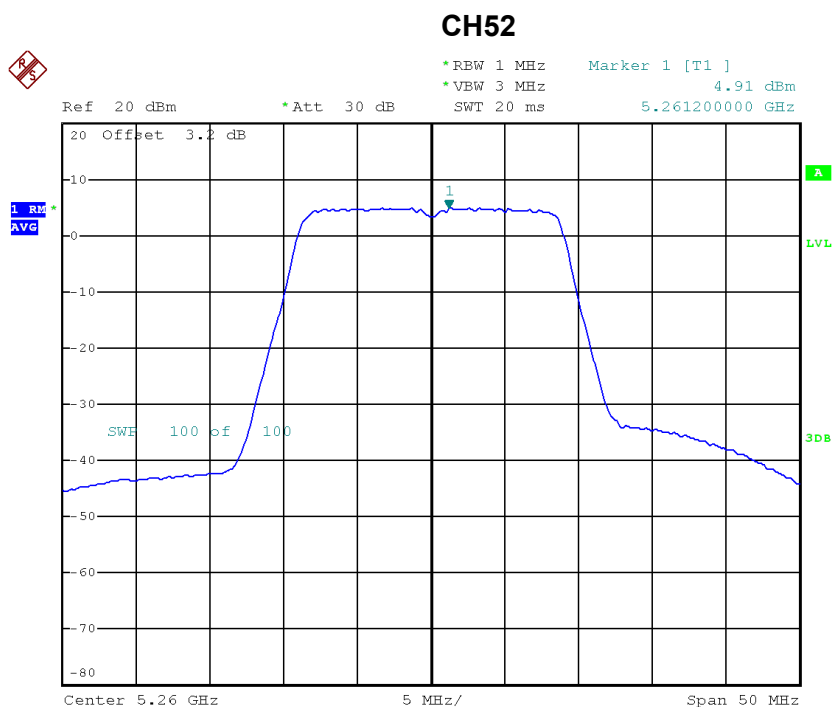


Date: 4.APR.2018 12:11:09

CH60

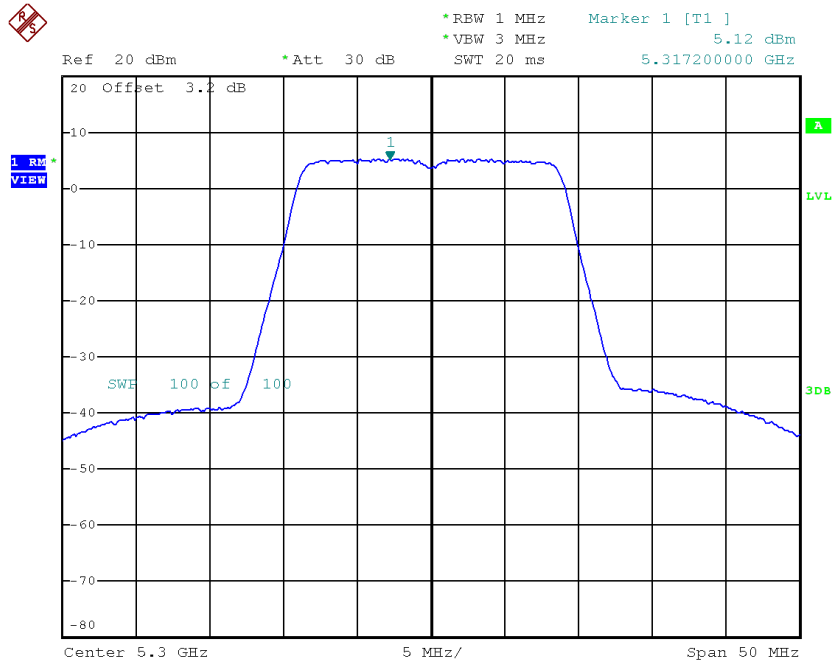

Date: 30.MAR.2018 11:35:44


CH64

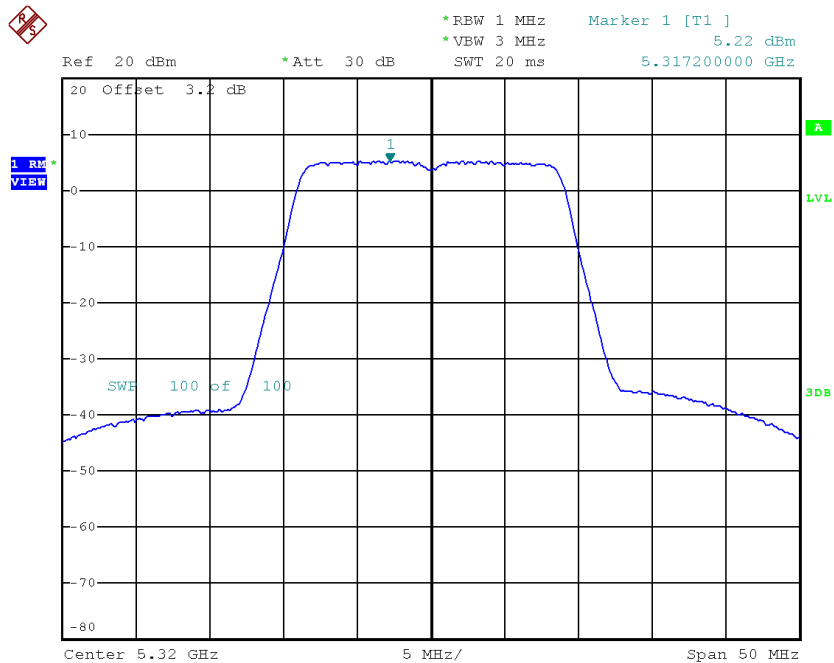

Date: 30.MAR.2018 11:35:44


Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	4.87	0.32	5.19	9.61
CH60	5300	5.19	0.32	5.51	9.61
CH64	5320	5.32	0.32	5.64	9.61

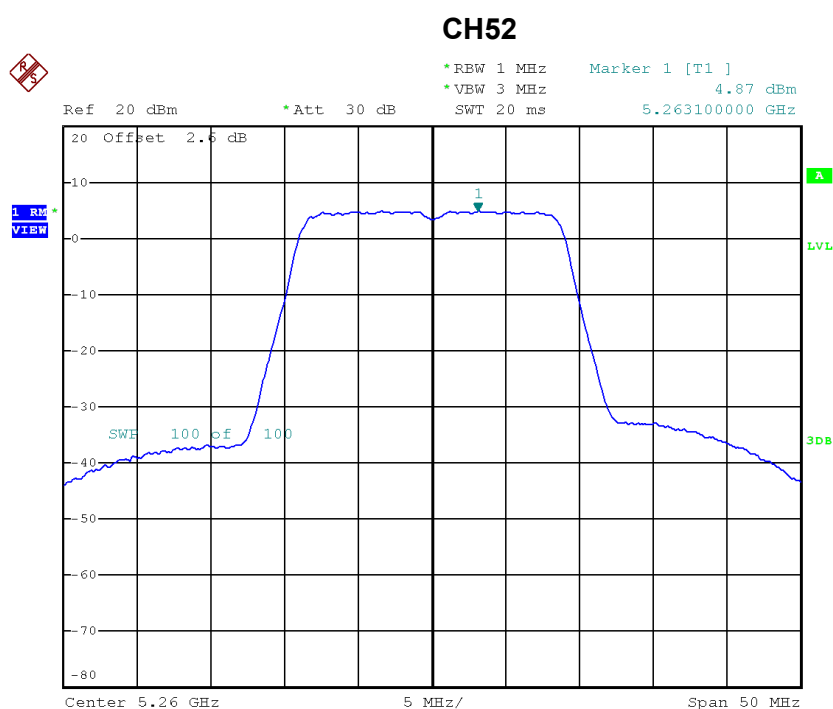


Date: 4.APR.2018 12:46:15

CH60

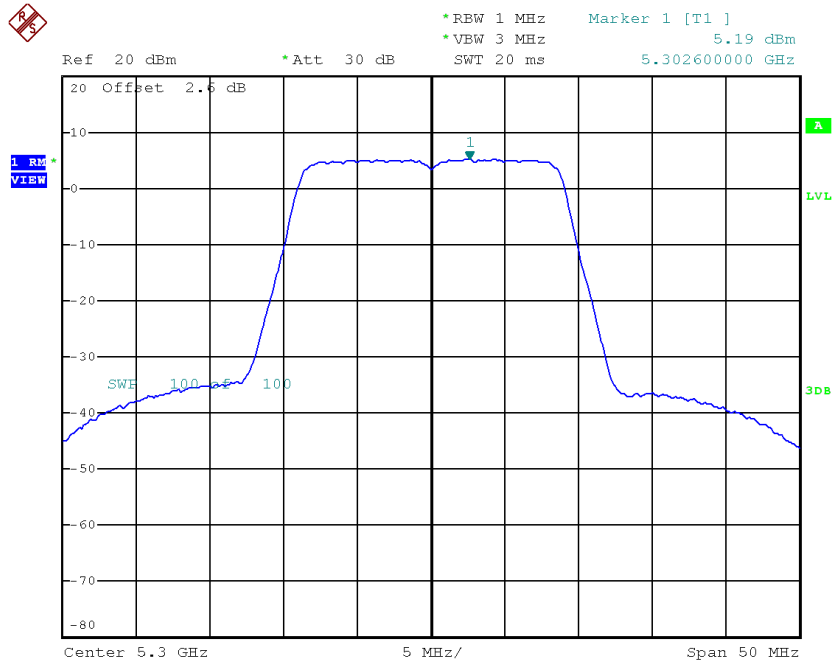

Date: 4.APR.2018 12:47:02

CH64

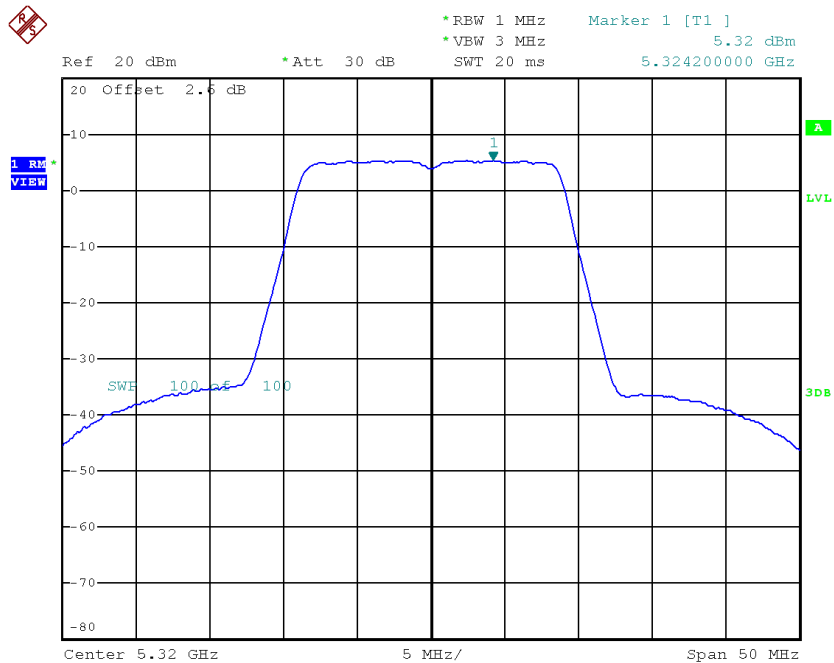

Date: 4.APR.2018 12:48:00


Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	8.22	9.61
CH60	5300	8.49	9.61
CH64	5320	8.60	9.61

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	4.96	0.80	5.76	9.61
CH62	5310	-0.39	0.80	0.41	9.61

CH54

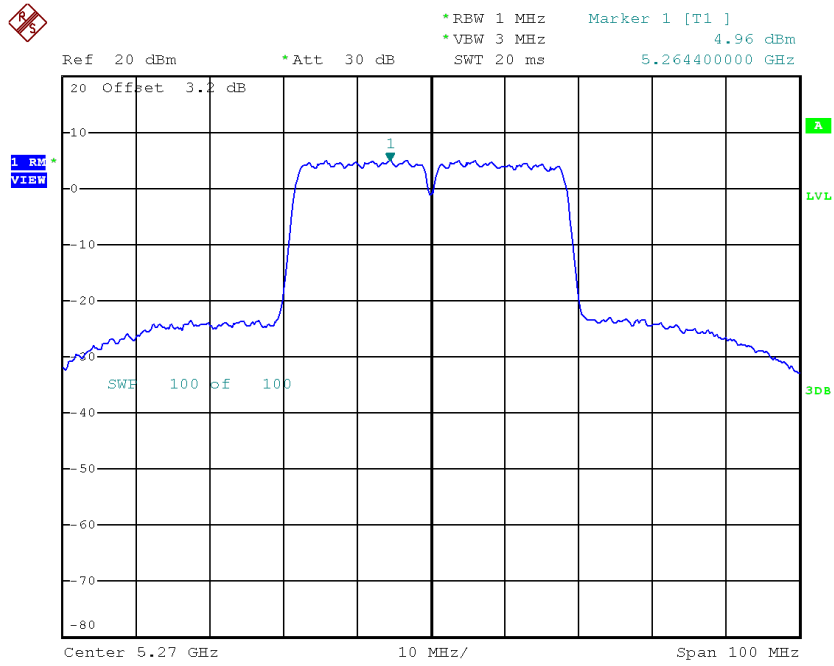

Date: 30.MAR.2018 11:23:30

CH62

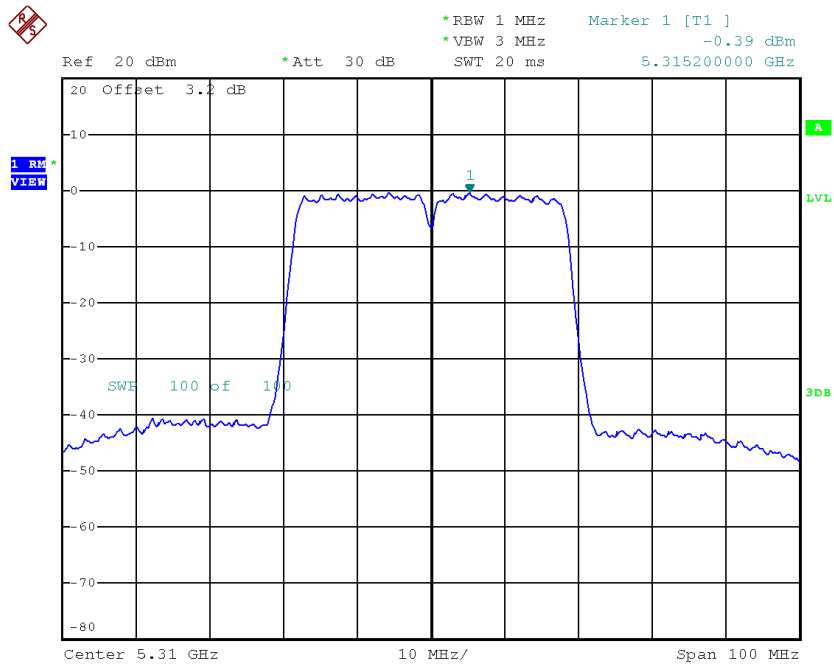


Date: 4.APR.2018 12:28:43

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	4.55	0.80	5.35	9.61
CH62	5310	0.35	0.80	1.15	9.61

CH54

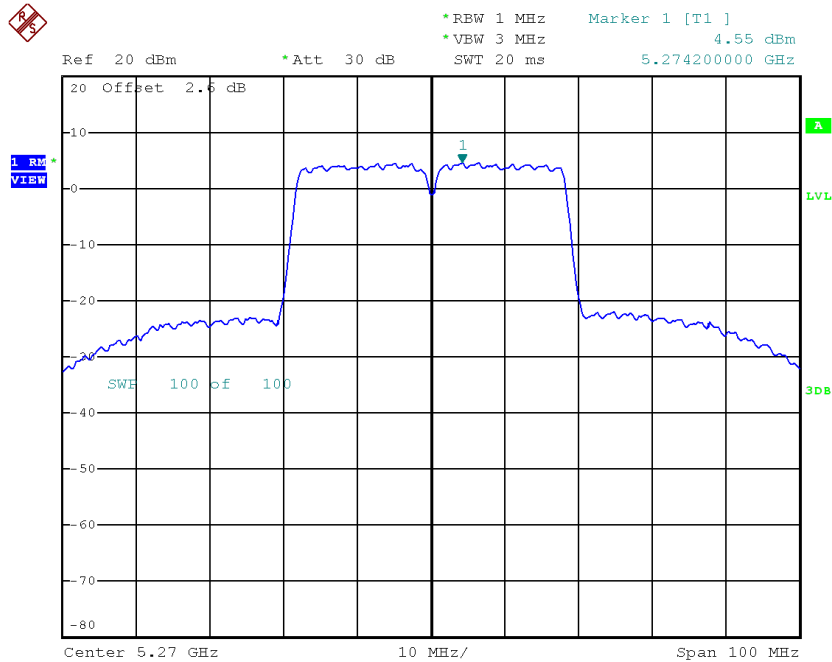

Date: 4.APR.2018 13:05:54

CH62

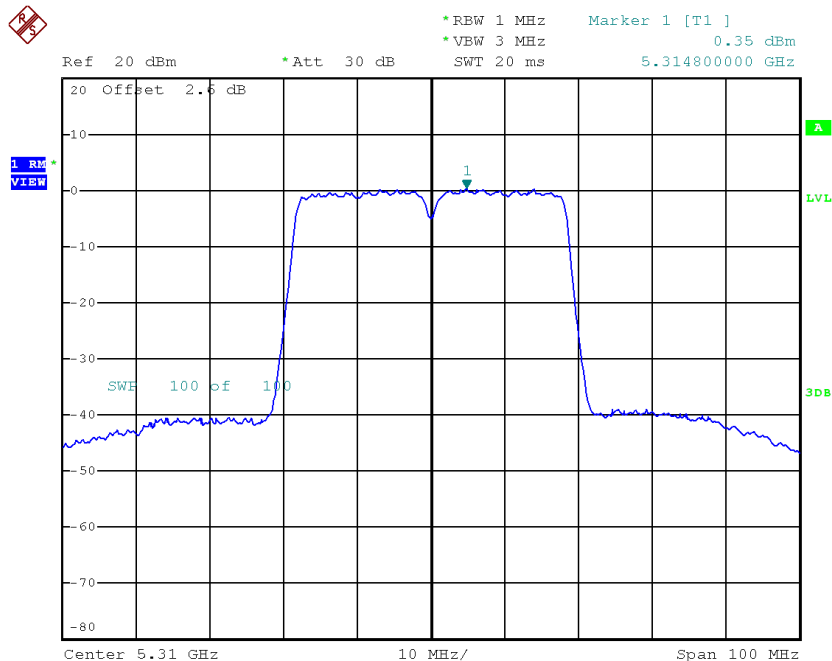


Date: 4.APR.2018 13:06:30

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	8.57	9.61
CH62	5310	3.81	9.61

Test Mode: UNII-2A/TX AC80 Mode_CH58_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-7.97	1.42	-6.55	9.61

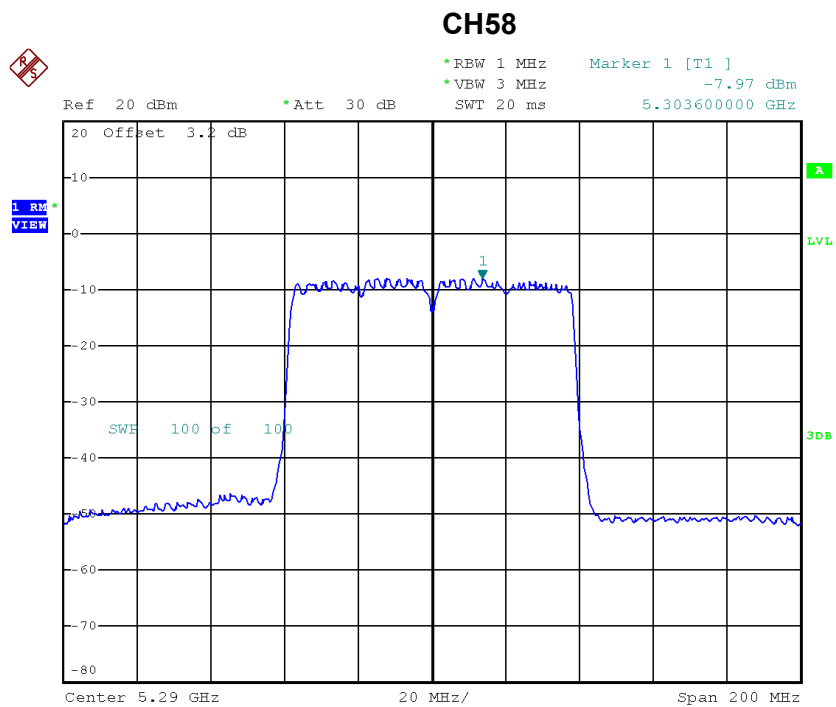

Date: 4.APR.2018 12:32:33

Test Mode: UNII-2A/TX AC80 Mode_CH58_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-6.17	1.42	-4.75	9.61

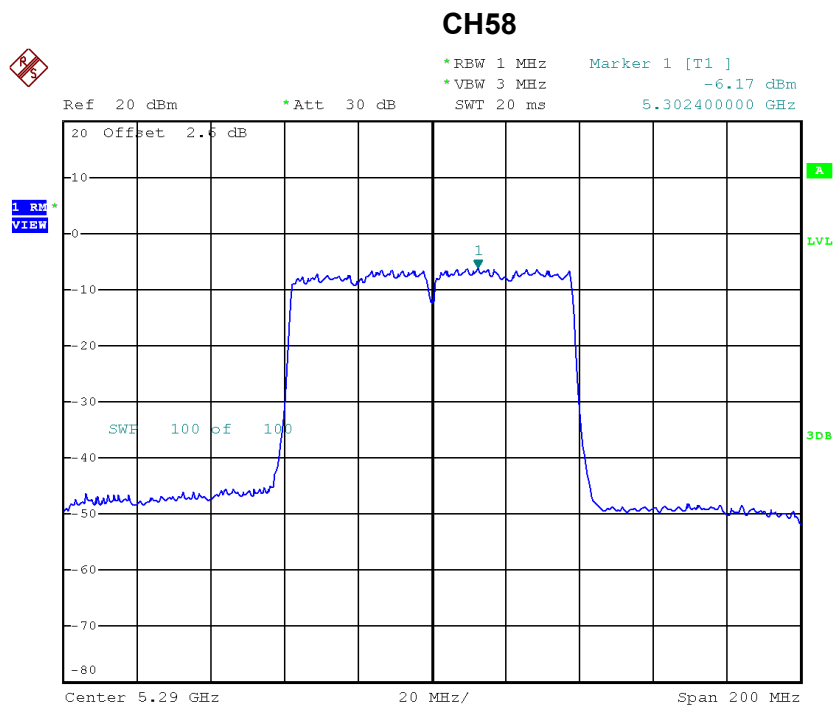

Date: 4.APR.2018 13:13:15


Test Mode: UNII-2A/TX AC80 Mode_CH58_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-2.55	9.61

Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	3.59	0.32	3.91	8.20
CH116	5580	3.66	0.32	3.98	8.20
CH140	5700	3.00	0.32	3.32	8.20

CH100

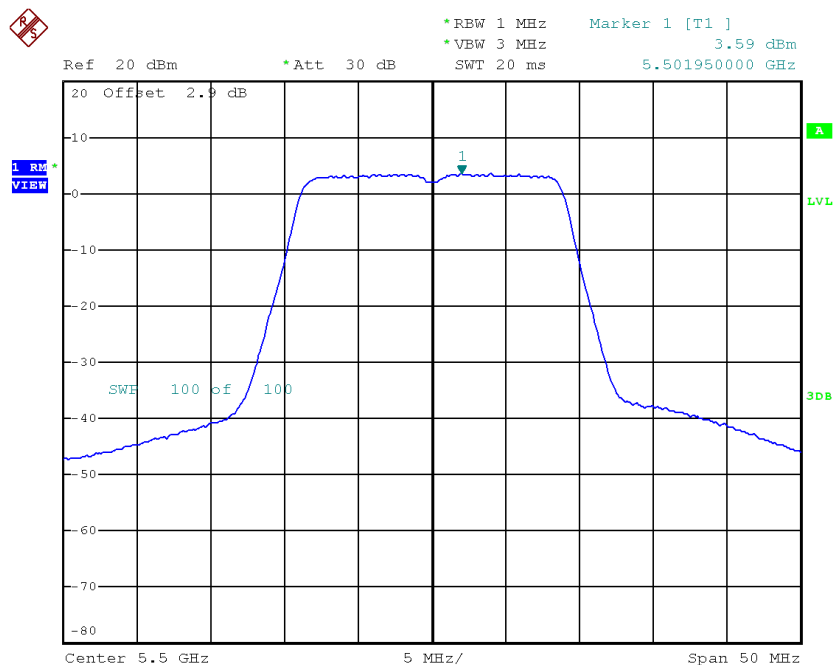


Date: 30.MAR.2018 11:40:53

CH116

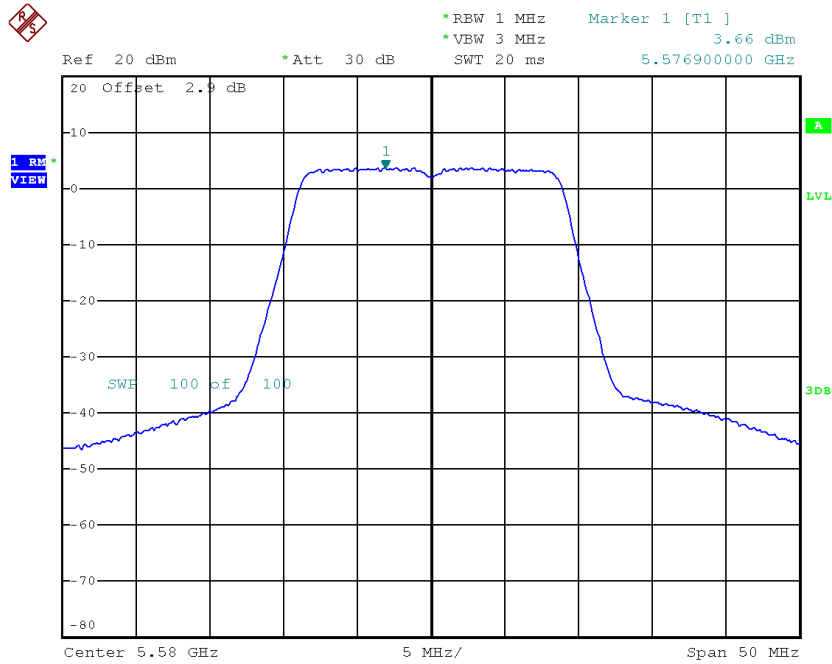

Date: 30.MAR.2018 11:41:42

CH140

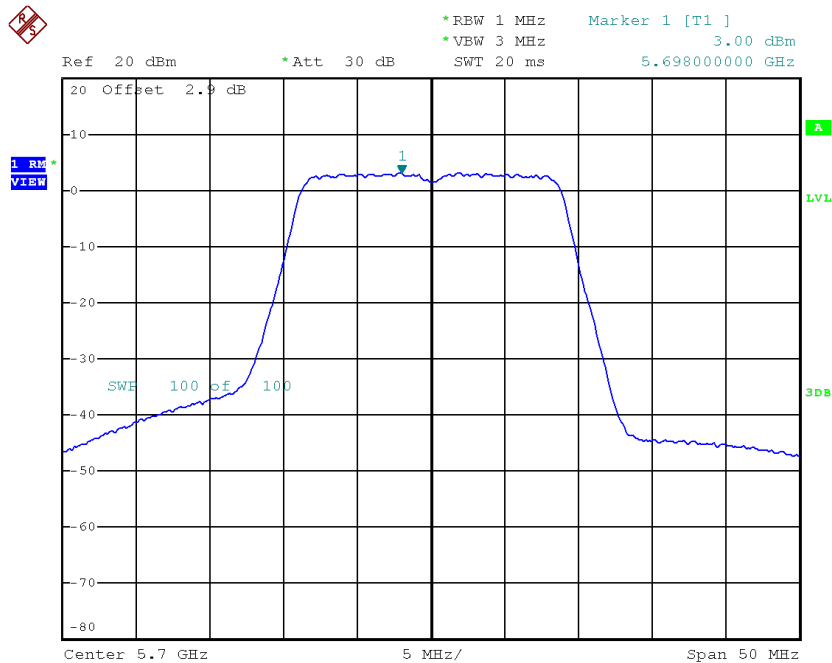


Date: 4.APR.2018 12:12:53

Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	3.54	0.32	3.86	8.20
CH116	5580	3.47	0.32	3.79	8.20
CH140	5700	2.39	0.32	2.71	8.20

CH100

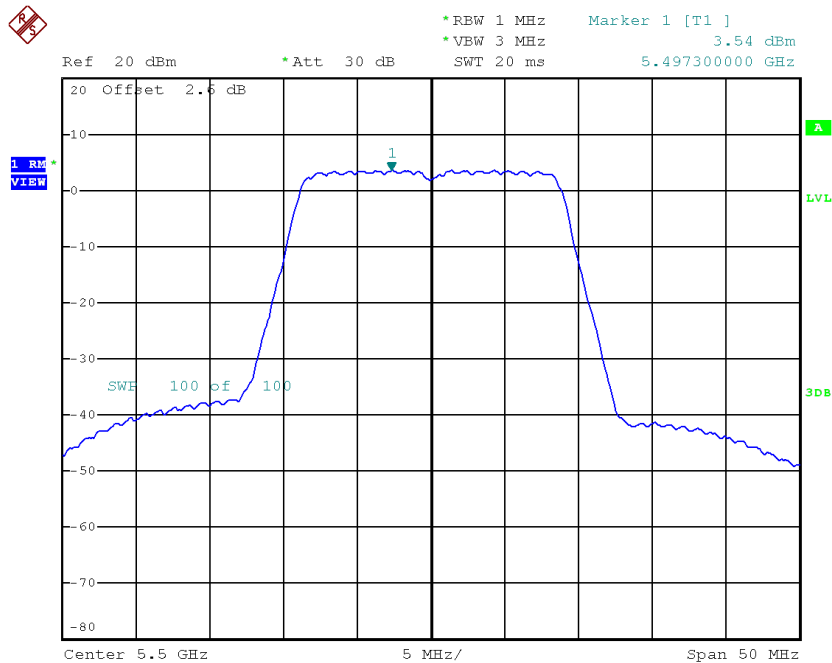


Date: 4.APR.2018 12:48:54

CH116

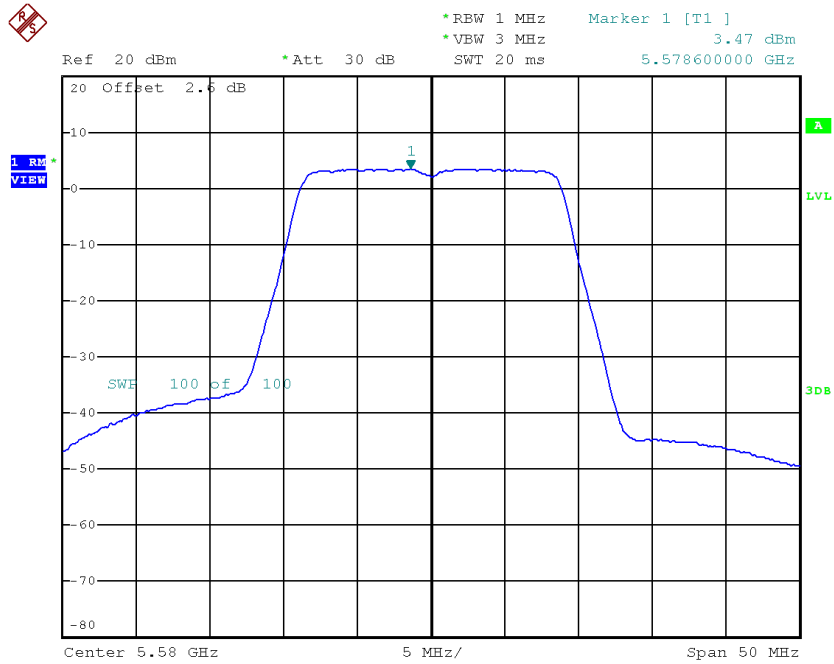

Date: 4.APR.2018 12:49:52

CH140

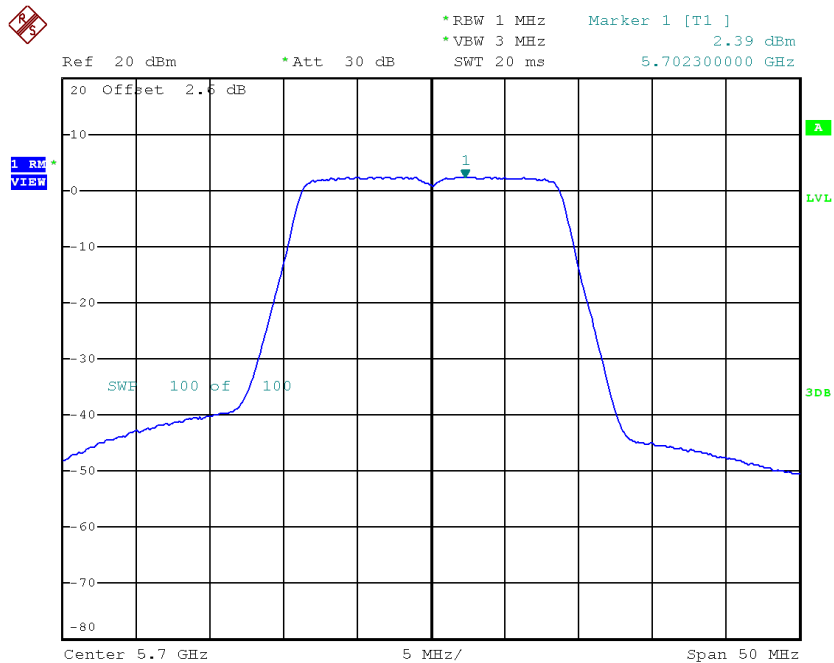

Date: 4.APR.2018 12:50:39


Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	6.90	8.20
CH116	5580	6.90	8.20
CH140	5700	6.04	8.20

Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-0.29	0.80	0.51	8.20
CH110	5550	3.55	0.80	4.35	8.20
CH134	5670	2.38	0.80	3.18	8.20

CH102

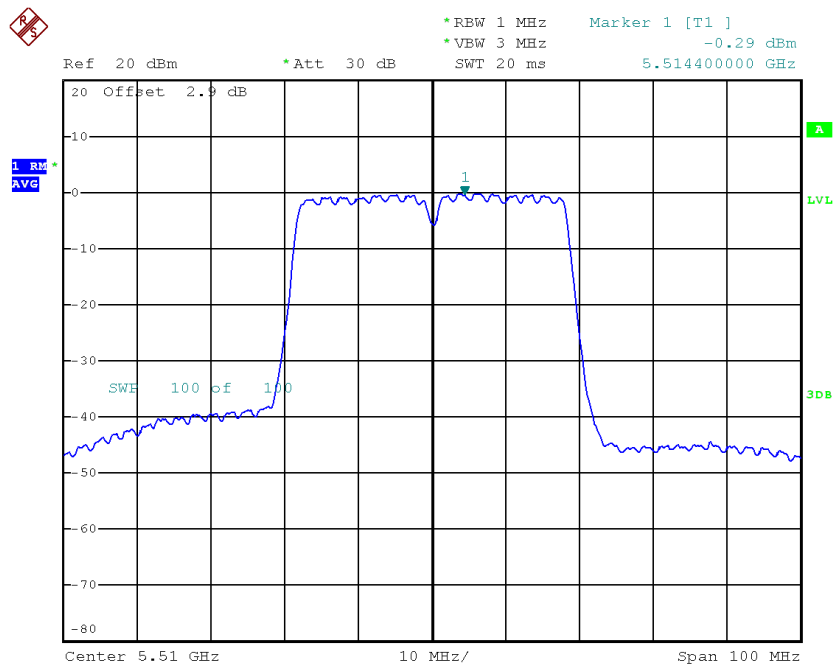


Date: 4.APR.2018 12:26:02

CH110

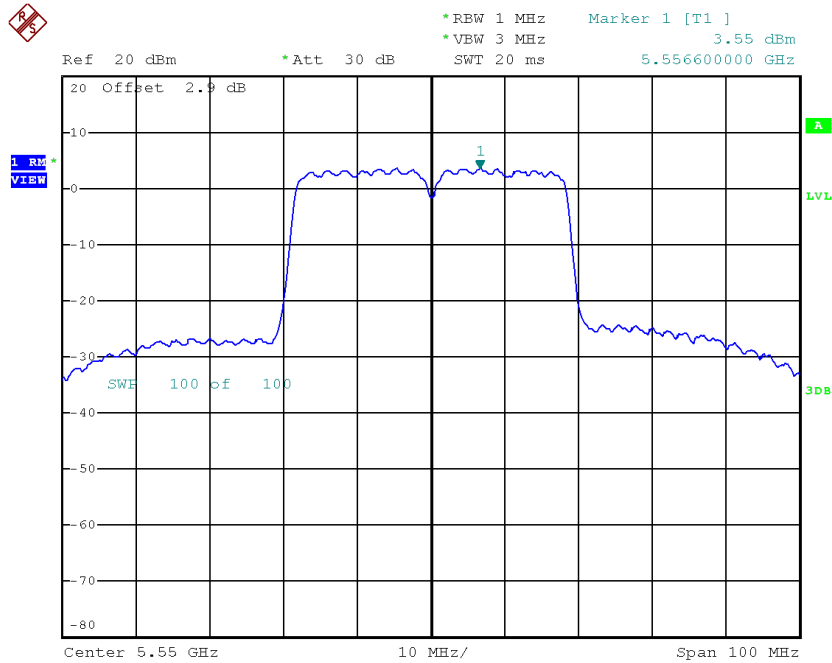

Date: 30.MAR.2018 11:26:14

CH134

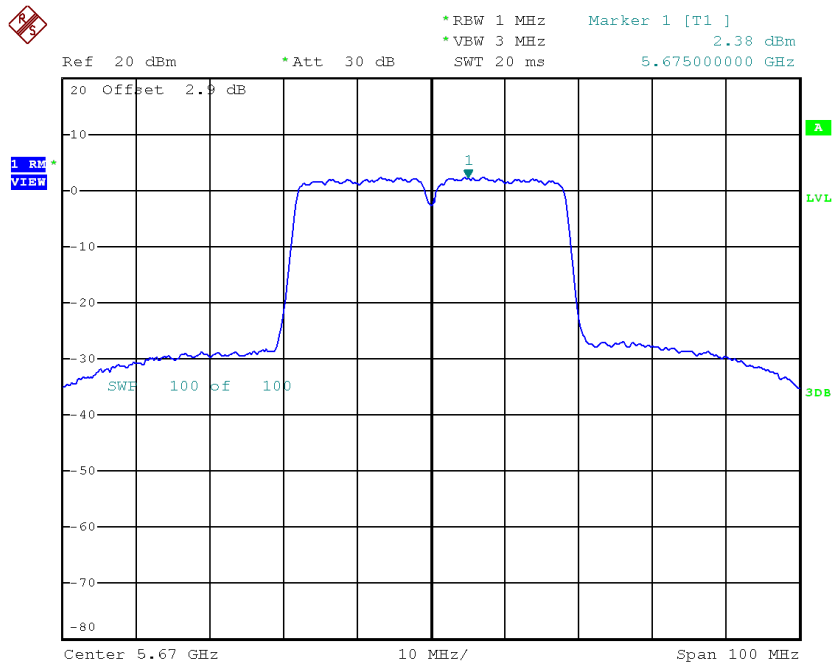


Date: 4.APR.2018 12:26:51

Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	1.33	0.80	2.13	8.20
CH110	5550	3.35	0.80	4.15	8.20
CH134	5670	1.61	0.80	2.41	8.20

CH102

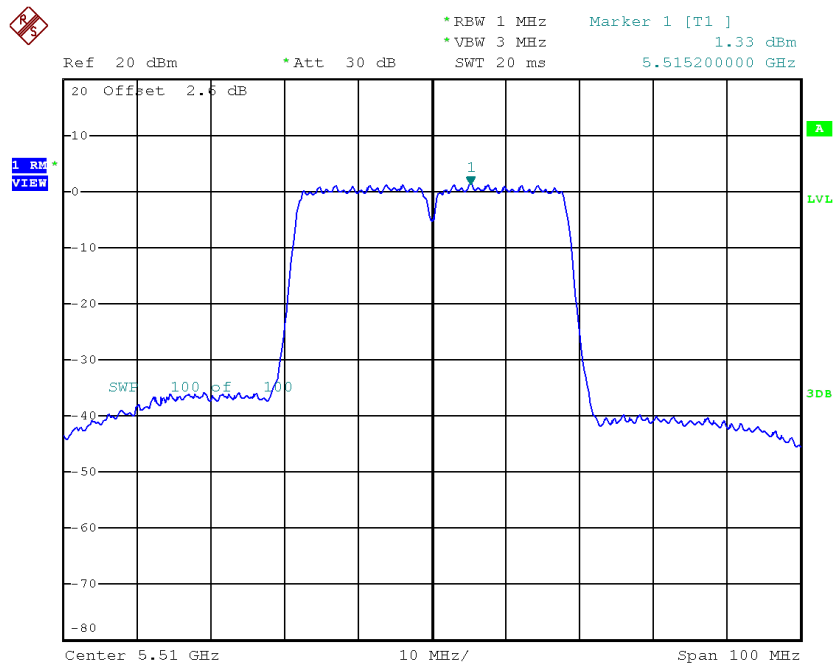


Date: 4.APR.2018 13:07:06

CH110

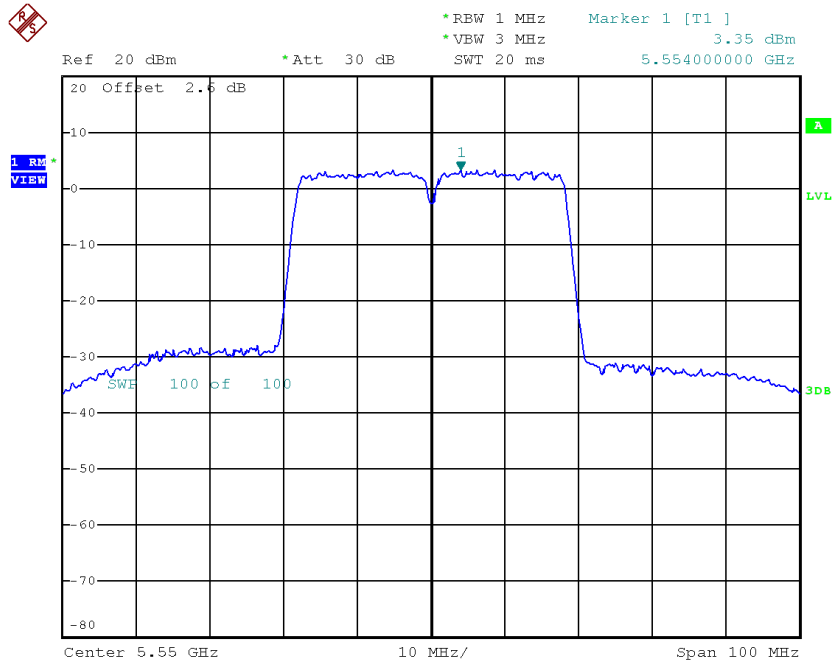

Date: 4.APR.2018 13:07:51

CH134

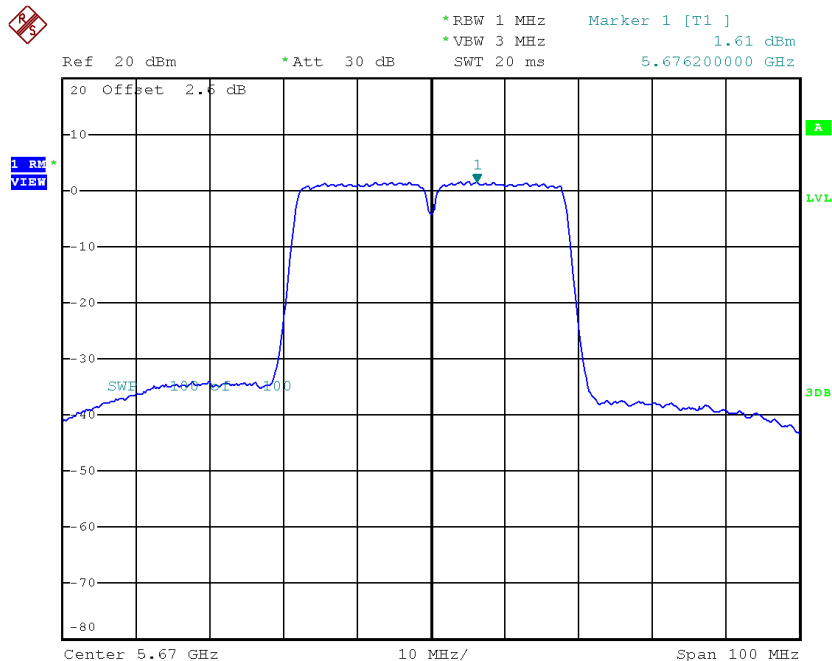

Date: 4.APR.2018 13:08:27


Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	4.41	8.20
CH110	5550	7.26	8.20
CH134	5670	5.83	8.20

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-5.42	1.42	-4.00	8.20
CH122	5610	-5.37	1.42	-3.95	8.20

CH106

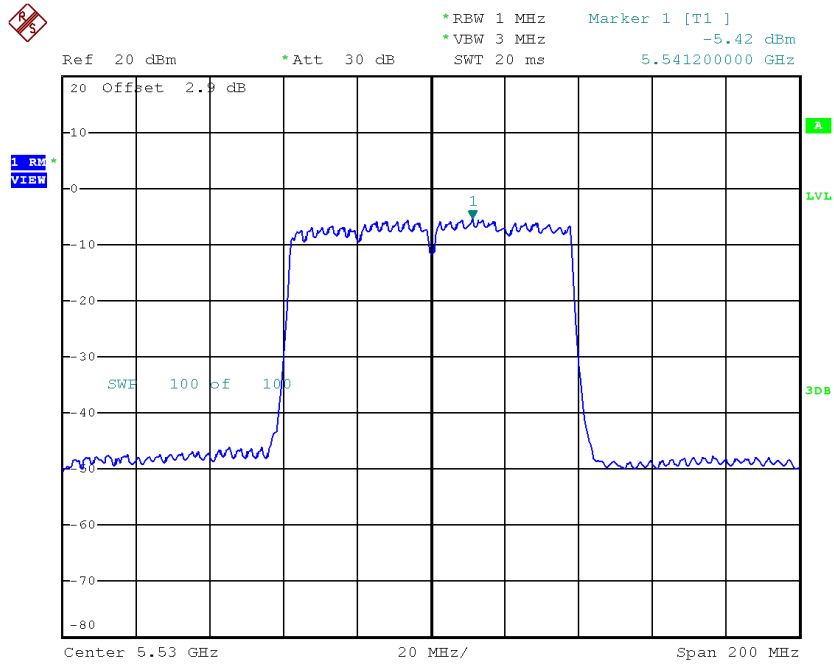

Date: 4.APR.2018 12:33:21

CH122

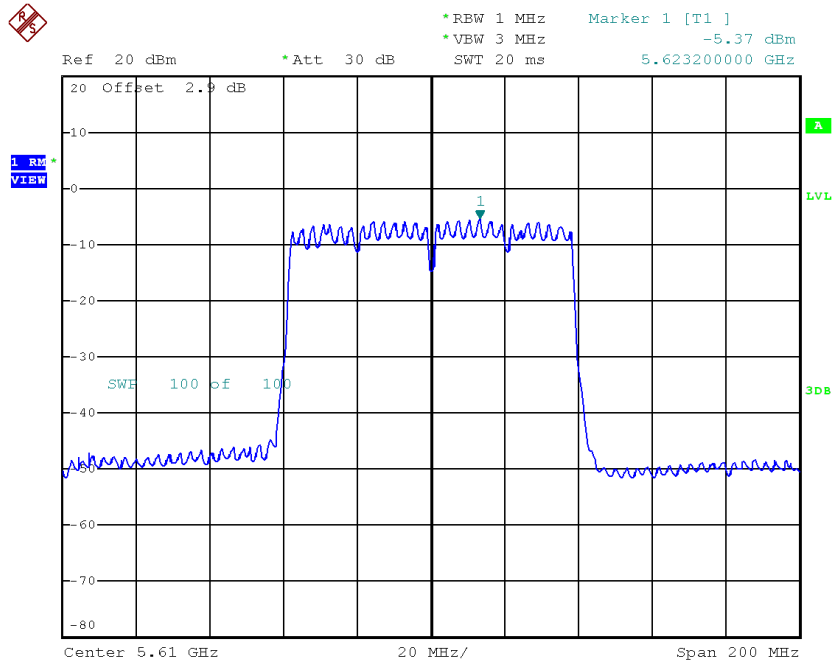


Date: 4.APR.2018 12:35:46

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-6.51	1.42	-5.09	8.20
CH122	5610	-1.35	1.42	0.07	8.20

CH106

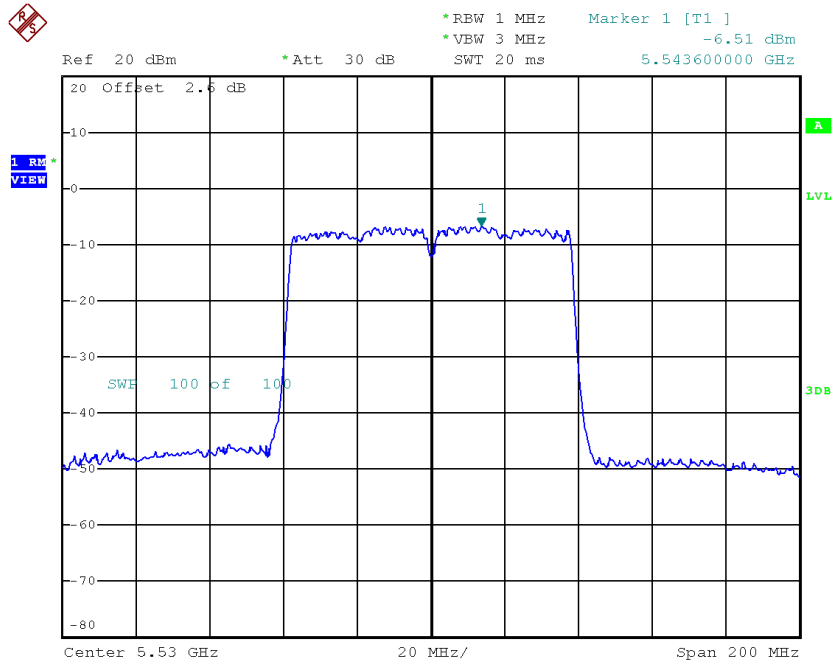

Date: 4.APR.2018 13:14:20

CH122

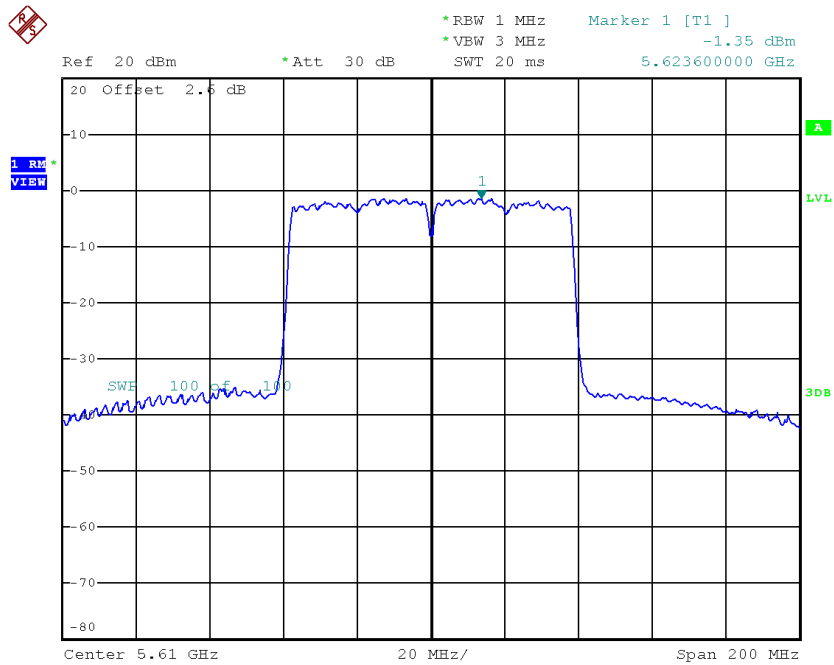


Date: 4.APR.2018 13:15:01

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-1.50	8.20
CH122	5610	1.52	8.20


Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	6.92	0.32	7.24	26.95
CH157	5785	6.49	0.32	6.81	26.95
CH165	5825	6.53	0.32	6.85	26.95

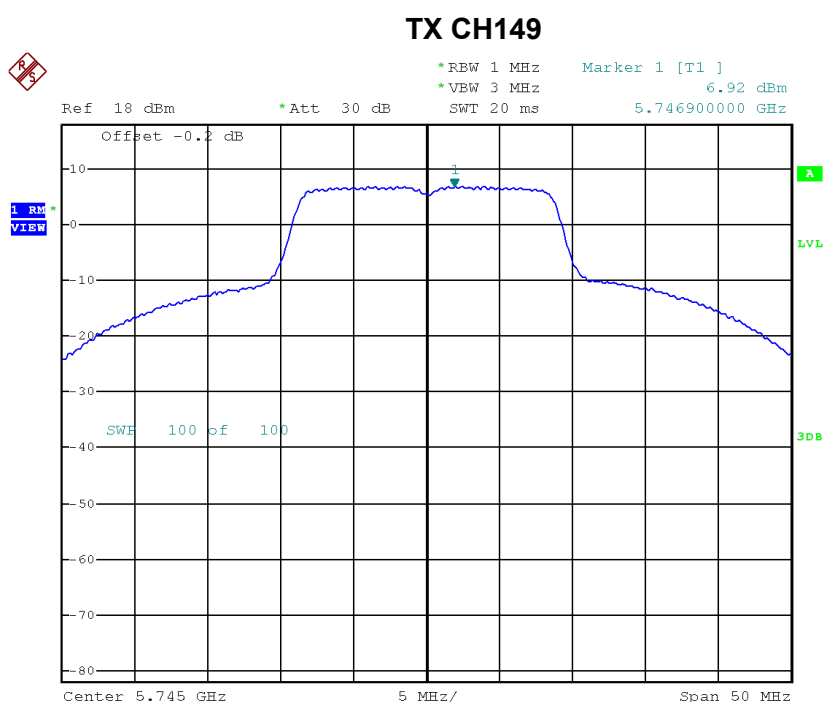


Date: 1.JAN.2003 08:09:08

TX CH157

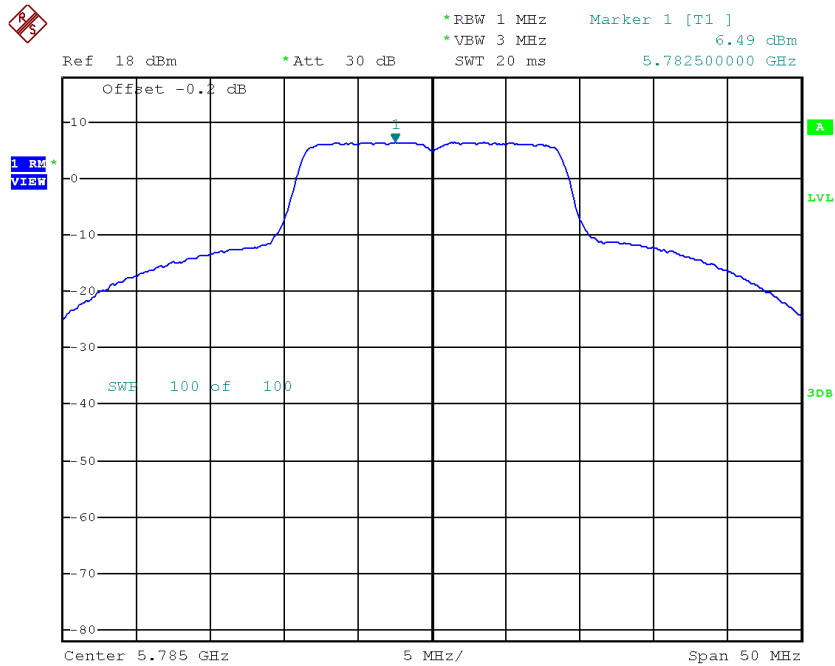

Date: 1.JAN.2003 08:09:32

TX CH165

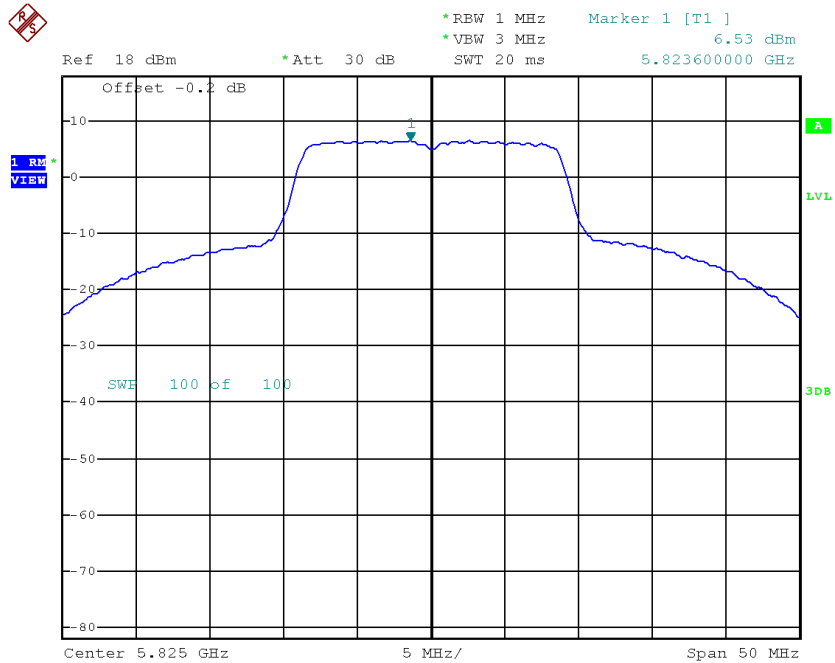


Date: 1.JAN.2003 08:09:49

Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	3.18	0.32	3.50	26.95
CH157	5785	2.98	0.32	3.30	26.95
CH165	5825	2.63	0.32	2.95	26.95

TX CH149

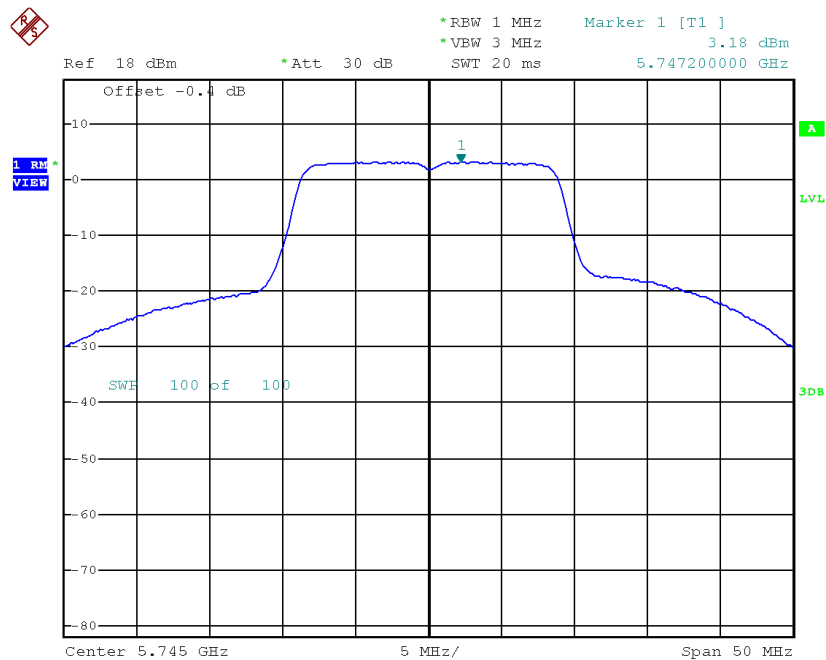


Date: 1.JAN.2003 08:25:54

TX CH157

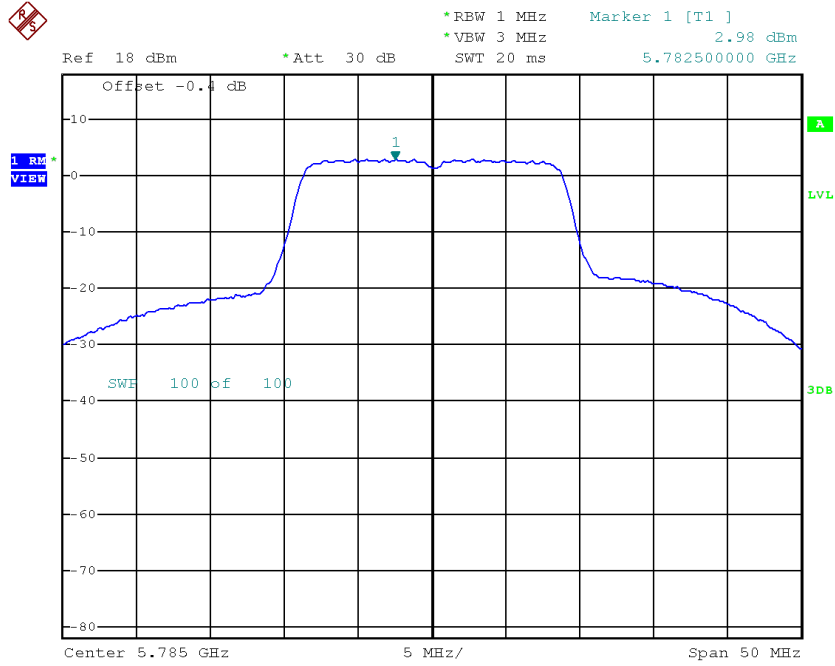

Date: 1.JAN.2003 08:26:25

TX CH165

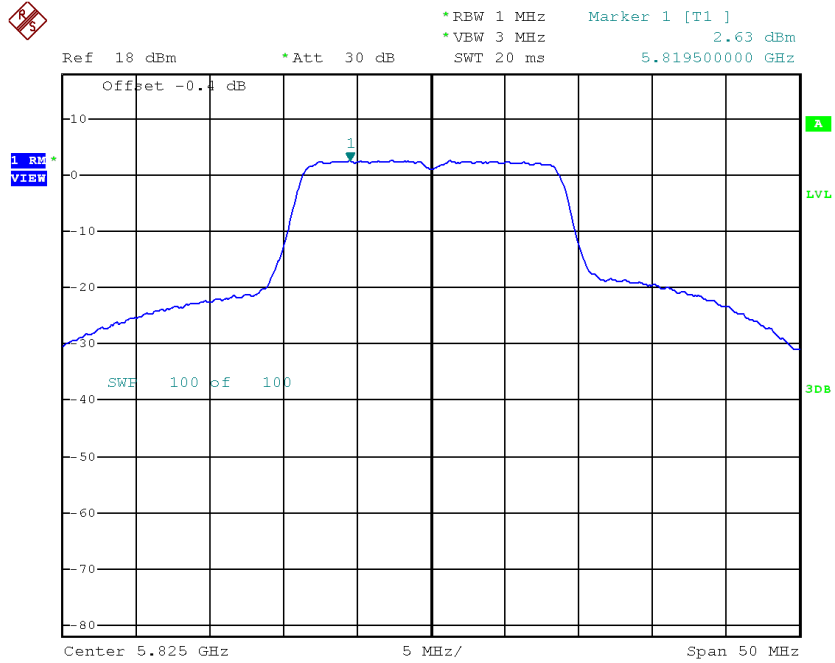

Date: 1.JAN.2003 08:26:43


Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	8.77	26.95
CH157	5785	8.41	26.95
CH165	5825	8.34	26.95

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	3.03	0.80	3.83	26.95
CH159	5795	2.81	0.80	3.61	26.95

TX CH151

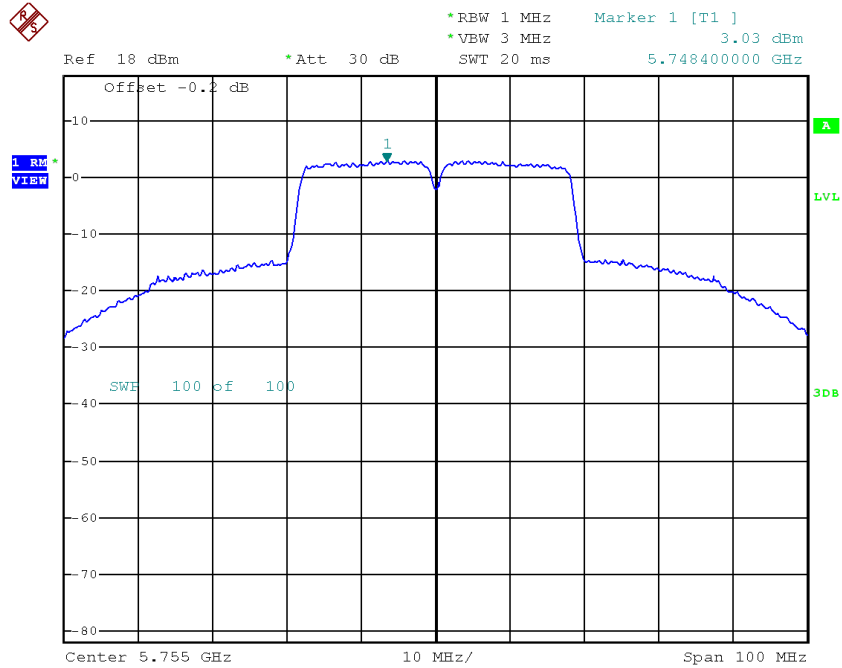

Date: 1.JAN.2003 08:13:01

TX CH159

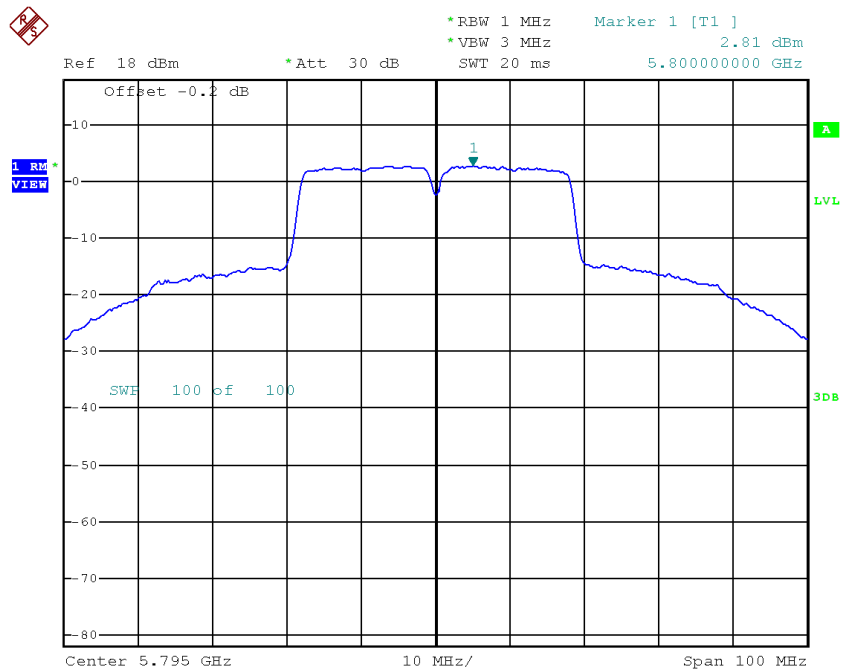


Date: 1.JAN.2003 08:13:20

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	0.76	0.80	1.56	26.95
CH159	5795	0.50	0.80	1.30	26.95

TX CH151

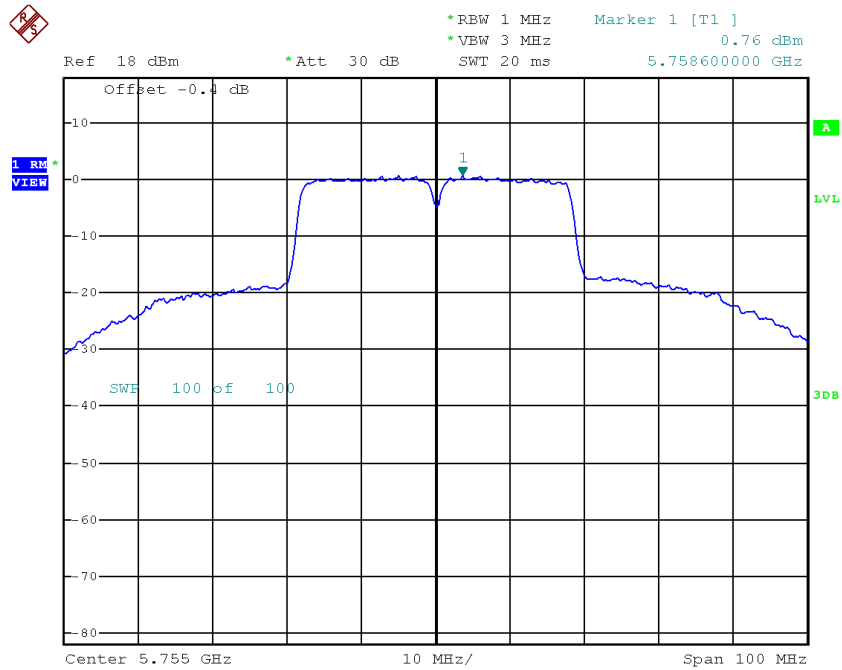

Date: 1.JAN.2003 08:27:57

TX CH159

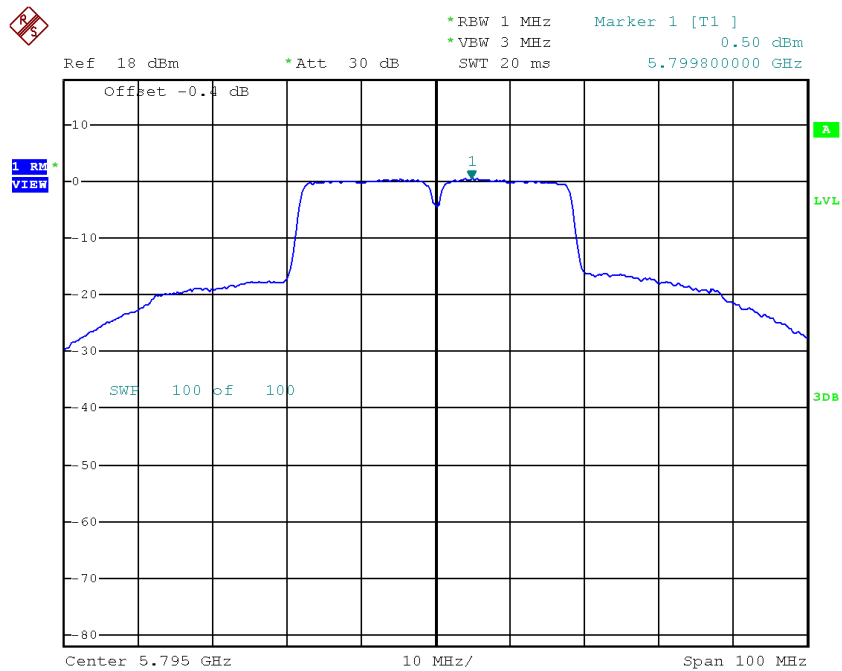

Date: 1.JAN.2003 08:28:19


Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	5.86	26.95
CH159	5795	5.62	26.95

Test Mode: UNII-3/ TX AC80 Mode_CH155_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-2.92	1.42	-1.50	26.95


TX CH155

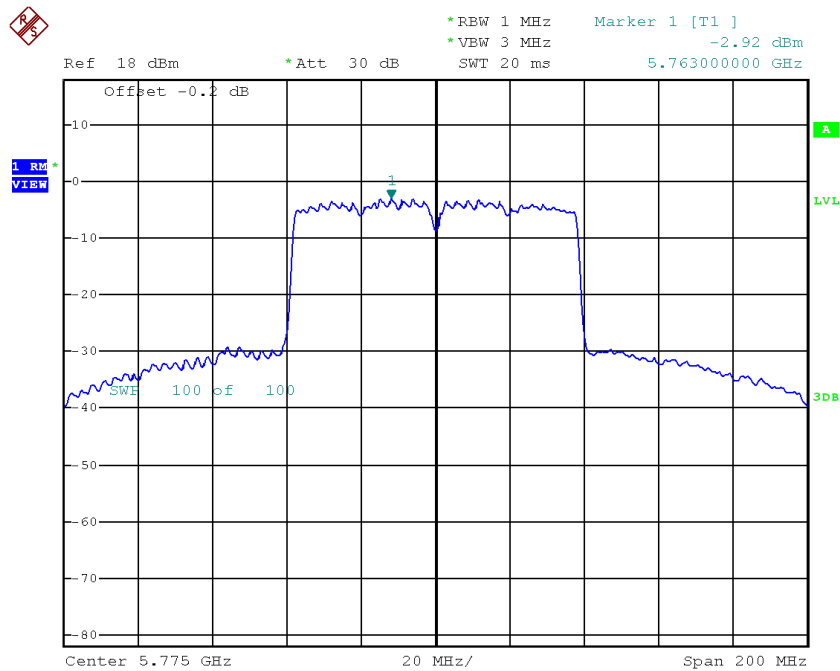

Date: 1.JAN.2003 08:13:53

Test Mode: UNII-3/ TX AC80 Mode_CH155_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-7.45	1.42	-6.03	26.95

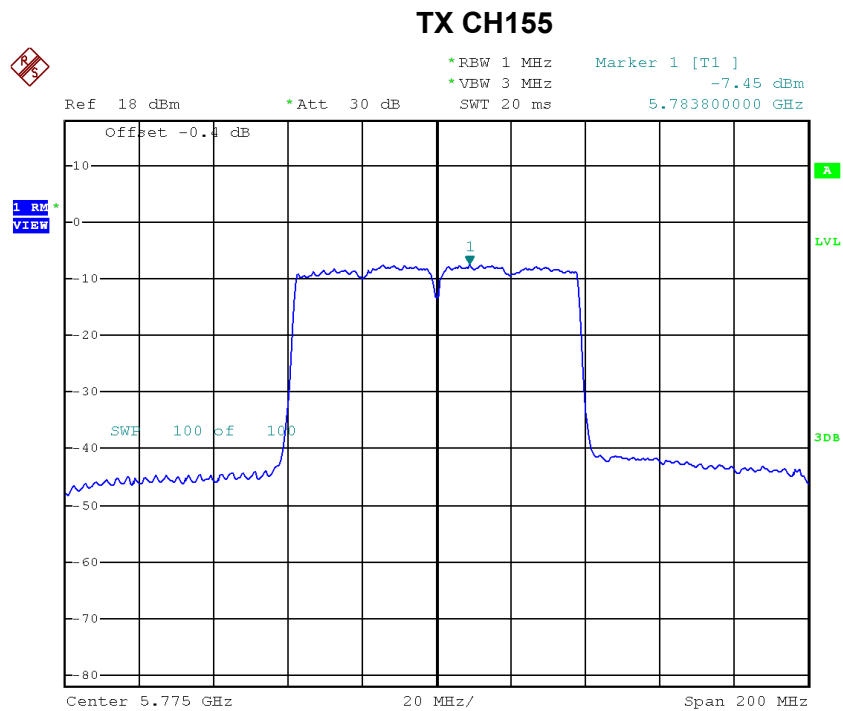

Date: 1.JAN.2003 08:28:39

Test Mode: UNII-3/ TX AC80 Mode_CH155_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-0.19	26.95

APPENDIX H - FREQUENCY STABILITY

Test Mode:	UNII-1
------------	--------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5180.0000
132	5180.0102
120	5179.9999
108	5180.0000
Max. Deviation (MHz)	0.0102
Max. Deviation (ppm)	1.9691

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5180.0000
0	5180.0000
10	5180.0150
20	5180.0000
30	5179.9999
40	5179.9999
Max. Deviation (MHz)	0.0150
Max. Deviation (ppm)	2.8958

Test Mode:	UNII-2A
------------	---------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5260.0000
132	5259.9999
120	5259.9999
108	5259.9999
Max. Deviation (MHz)	0.0001
Max. Deviation (ppm)	0.0190

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5260.0000
0	5259.9999
10	5259.9999
20	5259.9999
30	5259.9999
40	5260.0150
Max. Deviation (MHz)	0.0150
Max. Deviation (ppm)	2.8517

Test Mode:	UNII-2C
-------------------	----------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5500.0000
132	5500.0000
120	5499.9999
108	5500.0000
Max. Deviation (MHz)	0.0000
Max. Deviation (ppm)	0.0000

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5500.0000
0	5500.0000
10	5499.9999
20	5499.9999
30	5500.0000
40	5500.0000
Max. Deviation (MHz)	0.0050
Max. Deviation (ppm)	0.9091

Test Mode:	UNII-3
------------	--------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5745.0000
132	5744.9999
120	5744.9999
108	5744.9999
Max. Deviation (MHz)	0.0001
Max. Deviation (ppm)	0.0174

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5745.0000
0	5745.0150
10	5745.0150
20	5745.0150
30	5745.0150
40	5744.9999
Max. Deviation (MHz)	0.0150
Max. Deviation (ppm)	2.6110

End of Test Report