
SPK-796 Mini Bluetooth Stereo Speaker

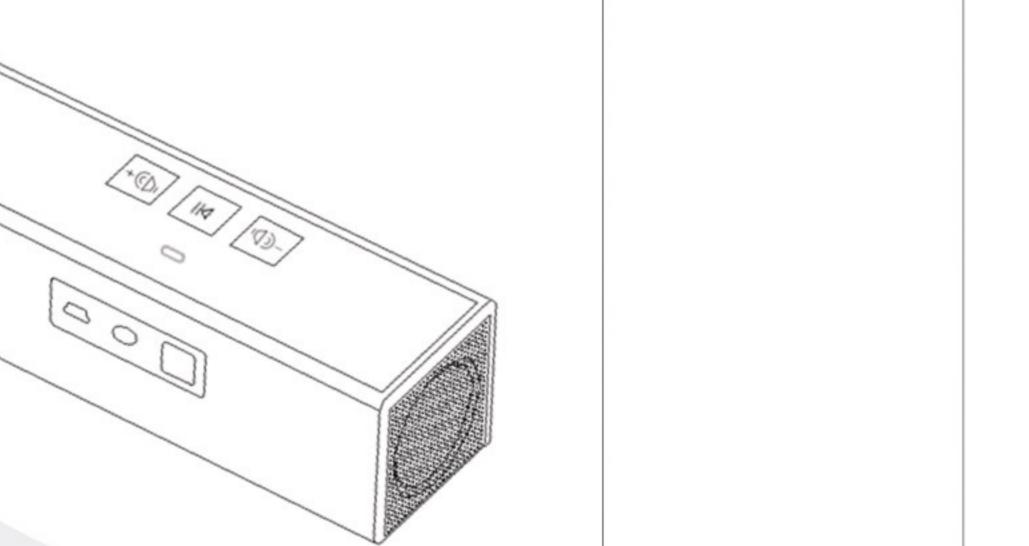

User's Manual

3

Mini Bluetooth stereo speaker SPK-796 Overview

Talk & Standby Time

Nominal Charging Time

Charging Your Speaker

Adjusting the Volume

Transferring a call

Declaration of Conformity

Care and Maintenance

Safety Information

3 Low Battery 4 Turning Your speaker On and Off _______4 Pairing Your speaker ______5 Using Your speaker ______6 Thank you for choosing the Mini Bluetooth stereo speaker SPK-796, we hope you will 6 Track forward ______6 Track reverse ______6 Pause and play ______6 Answering a Call ______6 Answering a Call when Listening to stereo Audio Ending a Call _____6 Rejecting a Call ______6 Dialing from your mobile handset ______6 Last Number Redialing from Your speaker Enjoying Stereo Audio from Your PC/Device Line in mode ______ 7 7 Troubleshooting 9 Specifications 9 9

Getting Started

Overview

Handsfree A2DP+AVRCP profile. Mini Bluetooth stereo speaker SPK-796 has 4 buttons:

> Pair your speaker with a Bluetooth-enabled mobile handset or music player or PC.

Power Switch

and in standby mode.

your speaker.

Nominal Charging Time

Charging Your Speaker


> Ensure your headset is fully charged

■ Talk, standby & Music playing Time

enjoy the convenience we are bringing to you. The Mini Bluetooth stereo speaker SPK-796 offers many functions, please read this manual before getting started.

should be fully charged for the first time to use. Connect the USB cable to your PC/laptop

available in your package. The Mini Bluetooth stereo speaker SPK-796 is a wireless stereo portable speaker based on the Remarks: Charging indication will be delayed for several seconds when the first time to use, Bluetooth technology. It complies with Bluetooth 2.0 protocol, supporting speakerphone an or, the speaker has not been used for a long time, or, the battery is drained.

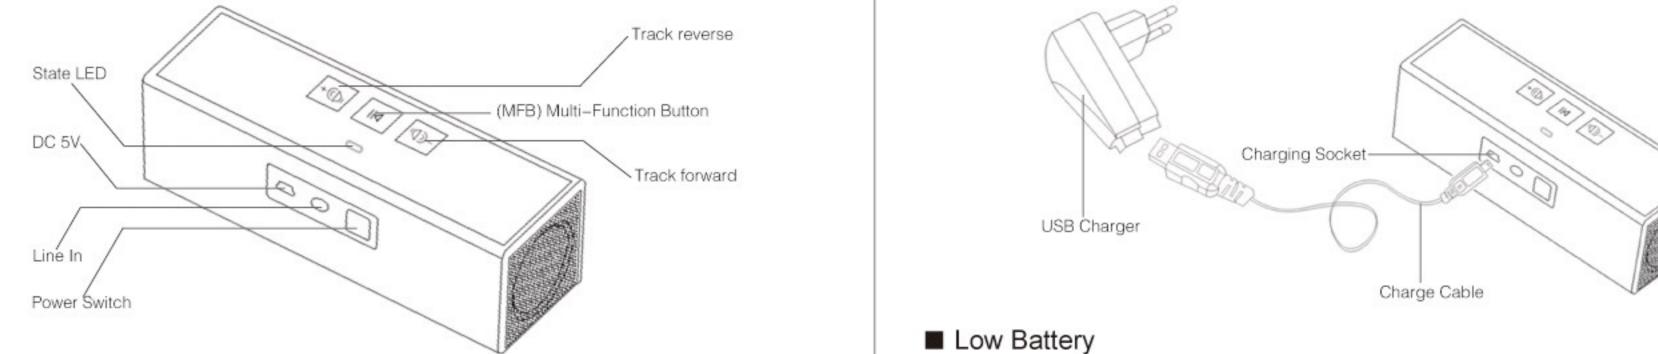

The LED will flash red when the speaker is on and the battery becomes low - at this point you

should recharge the battery. To use your Mini Bluetooth stereo speaker SPK-796, please follow the steps:

> Turning on the speaker

Turning your speaker on and off

Push down the power switch, a beep sound will be heard to indicate that the speaker is

turned on. Or touch and hold the MFB for 4 seconds until you hear a short beep. The speaker The fully charged battery offers up to 6 hours of talk time or 4 hours of music playing time, will be in pairing mode when the LED flash blue and red alternately. Or the LED will flash blue and 200 hours of standby time. When no calls are in progress, the speaker remains turned on when the speaker becomes connected with last paired devices.

Touch and hold the MFB for 4 seconds until LED flash red. Or turn off the power switch.


Remarks: To disconnect the Bluetooth connection, please firstly turn off your speaker by

Remarks: Touch the MFB again each time you turn on the speaker to reactivate pairing so

Fully charging your battery will take approximately 4 hours. The LED will turn off when the that the connection between the speaker and the mobile handset is resumed. For pairing, battery is fully charged - now disconnect the charger from AC power and turn on your please refer to "Pairing your speaker". speaker. Please refer to Turning your speaker on and off. For pairing, please refer to Pairing > Turning off the speaker

touching the MFB key.

The speaker is designed with a built -in rechargeable battery. It is recommended that battery





music player (herein called Device) as follows:

Ensure the speaker is OFF.

Remarks:

Activate your Device's Bluetooth function.

Mini Bluetooth stereo speaker SPK-796' from the list.

make a call, end a call and reject a call with touch controls.

1. Place the speaker and the Device between 1 meter range of each other without any a call for some Bluetooth phones. obstructions.

> Ending a call

Touch the MFB to end your call, or end the call via your mobile handset as normal. 3. Push down the power switch - if no last paired device is found within 10 seconds, the

> Rejecting a call

> Transferring a call

Remarks:

Using your speaker

> Track forward

> Pause and Play

> Answering a call

speaker will switch to pairing mode when the LED of speaker flashes blue and red.

To reject an incoming call, touch and hold the MFB key for 2 seconds.

> Dialing from your mobile handset 5. Set the Device to search for Bluetooth devices within 1 meter range, then select ' Make calls on your mobile handset in the normal way.

> Speaker Touch and hold the MFB key for 4 seconds to transfer the call from speaker to mobile handset. Press the MFB once again to use the speaker.

> Last number redialing from your speaker Touch and hold the Volume Up button for 2 seconds on your speaker and the last number

will be redialed.

please refer to the User Guide of your mobile handset.

speaker will turn off. Please repeat steps 2-7 to pair the speaker and the mobile handset The above functions are only applicable to mobile handsets with Bluetooth Handsfree Profile. Functionality varies depending on the mobile handset. For additional information,

Speaker pairing procedure is subject to different models of handsets and music players.

> If the pairing can not be completed within 3 minutes while pairing mode is activated, the

6. Enter the default password '0000' and press 'OK' to pair your speaker and the Device.

7. Go back to the main menu of Device, and you can enjoy stereo music via Bluetooth, or

> Adjusting the volume

Press the volume up or volume down button repeatedly to attain ideal levels of sound.

Touch the volume down button for 2 seconds to track forward while playing music.

> Track reverse

Touch the volume up button for 2 seconds to track reverse while playing music.

Touch the MFB to pause music and once again to continue playing.

When there is an incoming call you will hear ringing through the speaker, use your mobile

handset to accept a call or answer a call normally. > Answering a call while listening to stereo audio

Touch the MFB to answer a call or end a call while listening to audio, music will

automatically continue after a call.

Remarks: To play stereo audio from your mobile handset or PDA, please make sure your Line in with music player device is complied with Bluetooth A2DP profile. Music can not automatically continue after > Power on

Make sure the power is on. The speaker will transfer to line-in mode automatically when the 3.5 mm audio cable is plugged in. The speaker is ready for music playing with blue LED

The speaker will be in standby mode when the 3.5 mm cable is unplugged.

Turning your speaker off before putting it into your pocket or bag. If the MFB is

Enjoying stereo audio from your PC/Device

PC/laptop/device.

If your PC/laptop/device is Bluetooth enabled, you can enjoy stereo adudio from yo

accidentally touched, your mobile handset may make an unintended call.

- Do not expose the speaker to liquid, moisture or humidity as it is not waterproof.

indicating line-in mode.

Care and Maintenance

- Do not use abrasive cleaning solvents to clean the speaker.
 - Do not expose the speaker to extremely high or low temperatures.
 - Do not dispose of the speaker in a fire as it will result in explosion.

 - Dispose of batteries according to local regulations. Do not dispose as household waste.

Do not expose your speaker to contact with sharp objects as this will cause

If you are unable to connect your speaker and mobile handset, please try as follows:

- Make sure your speaker is turned off and is properly charged. Make sure the speaker is paired with your mobile handset.
- Make sure the Bluetooth function of your mobile handset is activated. Please refer to your
- User Guide of mobile handset for this point.

If your speaker still cannot connect to your mobile handset after the above steps, please

recharge the speaker and remove the battery of your mobile handset for a while. The Mini

Bluetooth stereo speaker SPK-796 is compliant with and adopts the Bluetooth Specification

2.0 However, interoperability between the speaker and other Bluetooth-enabled products is

not guaranteed because it depends on compatibility. For more information on the compatibility

between the speaker and other Bluetooth-enabled products, please contact the

Make sure both devices are within a 10 meter range of each other, where there are no

> Built-in Battery Do not attempt to replace the speaker's battery by yourself as it is built into the device

If you do not use the speaker for a long time, ensure you store it in a dry place,

Do not place or poke anything inside the speaker as this may damage

Do not attempt to disassemble the speaker as it does not contain

and is non-changeable. Charge the battery in accordance with the instruction from this User Guide.

free from extreme temperatures and dust.

internal components.

serviceable components.

■ Safety Information

please drive responsibly.

explosive atmospheres.

Do not disassemble the charger as it may expose you to dangerous voltages or other risks.

Only use the charger that manufacturer supplied when charging the speaker.

- Incorrect reassembly will cause an electric shock when the speaker is subsequently used.
- Do not use the charger outdoors or in damp areas where exposed to the elements.
- Only charge the speaker's built-in battery in accordance with the instructions from this User
- Avoid charging the speaker in extreme high and low temperature conditions.

Specifications

Troubleshooting

Output: 2 X 2W

corresponding device manufacturer.

Bluetooth profile supported: Speaker, Handsfree and A2DP + AVRCP

obstructions, such as walls or other electronic devices.

- Range of Frequency: 2.4 GHz Spectrum
- Dimensions: 50mm*50mm*160mm
- Nominal Charging Time: About 4 hours
- Talk Time: Up to 6 hours
- Music Playing Time: Up to 4 hours

Bluetooth Specification: Version 2.0 class 2

Remarks: Talk time or Music playing time or Standby Time may vary due to users operation

■ Declaration of Conformity

We, declare that the following product:

Product Name: Mini Bluetooth stereo speaker SPK-796

centimeters between the radiator and your body.

result on air bag deployment. Do not open or touch the built-in battery.

scratches and damage.

hazard. Adult supervision is advised at all times.

Check local laws regarding use of a mobile handset and headphone for driving. If you use

the speaker while driving, ensure 100% of your attention and focus remains on the road -

Never allow children or infants to play with the speaker – small parts may be a choking

off in designated areas. These could include hospitals, blasting areas, and potentially

Turn off your speaker before boarding an aircraft. Do not use your speaker in an aircraft.

Never mount or store your speaker over any air bag deployment area as serious injury may

Dispose of the packaging of the product in accordance with the latest provisions.

Pay attention to all signs that require an electric device or RF radio product to be switched

Standby Time: Up to 200 hours

Weight: 209grams

and mobile phone settings.

(1)This device may not cause harmful interference, and

(2)This device must accept any interference received, including interference that may cause

undesired operation.

This equipment marketed in USA is restricted by firmware to only operate on 2.4G channel 79. Is in conformity with the following essential requirements of Council Directive 1999/5/EC

(referred to as R&TTE Directive):Article 3.1a, 3.1.b and 3.2. and the product is

his equipment has been tested and found to comply with the limits for a Class B digital device,

pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable

This equipment generates, uses and can radiate radio frequency energy and if not installed

and used in accordance with the instructions, may cause harmful interference to radio

communications. However, there is no guarantee that interference will not occur in a particular

installation. If this equipment does cause harmful interference to radio or television reception,

which can be determined by turning the equipment off and on. The user is encouraged to try to

Connect the equipment into an outlet on a circuit different from that to which the receiver is

To assure continued compliance, any changes or modifications not expressly approved by the

party responsible for compliance could void the user's authority to operate this equipment.

(Example- use only shielded interface cables when connecting to computer or peripheral

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled

environment. This equipment should be installed and operated with a minimum distance of 20

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following

manufactured in accordance with Annex II of above directive.

protection against harmful interference in a residential installation.

correct the interference by one of the following measures:

Increase the separation between the equipment and receiver.

Consult the dealer or an experienced radio/TV technician for help.

Reorient or relocate the receiving antenna.

connected.

two conditions: