

http://www.jndcerti.com

FCCID: W8PGS-440TR

CONFORMANCE TEST REPORT

FOR

Subpart C Part 15.231

Report No.: JNDL-NU-13R-0002

Client: Getron System Co., Inc

Product: Transceiver
Model: GS-440TR

Manufacture/supplier: Getron System Co., Inc

Date test item received: 2013/10/21
Date test campaign completed: 2013/11/08
Date of issue: 2013/11/11

ATTESTATION STAEMENT

This equipment has been tested in accordance with the standards identified in the referenced test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report and demonstrate that the equipment complies with the appropriate standards.

All **JNDL Laboratory. CO., LTD** instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

Total number of pages of this test report : 24 pages

| Test engineer | Report reviewed by |
|---------------|--------------------|
| J45 | |
| Sang-hun kang | Kyoung-Pil, Yeom |



http://www.jndcerti.com FCCID: W8PGS-440TR

REPORT SUMMARY

| Purpose of Test: | To demonstrate the EUT in compliance with Part 15.231 Subpart C of the FCC's |
|-----------------------|--|
| Disclaimer : | The test results relate only to the items tested. |
| Applicable Standards: | Pt 15.231, Pt 15.209, ANSI 63.4:2009 |

TEST ENVIRONMENT AND TEST SETUP

| Test Facilities : | Test Firm Registration #: 748649 3m & 10m Open Site: 386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 3m semi-Anechoic chamber: B 114~115, 810 Kwanyang-Dong, dongan-Gu, Anyang-Si, Kyunggi-Do, 431-060, Korea |
|------------------------------|--|
| Laboratory Test Conditions : | Open Site: Temperature 21 °C, Humidity: 62 % 3m anechoic chamber: Temperature 25 °C, Humidity: 51 % |
| Test Exercise : | The EUT was set in continuous transmit mode of operation unless stated otherwise. |
| Modification to the EUT: | No moidification was made. |
| Supporting Accessories: | None |

REVISION HISTORY

| Revison | Date | Desriptions |
|---------|--------------|------------------|
| 0 | 2013. 11. 11 | Original release |

http://www.jndcerti.com FCCID: W8PGS-440TR

Table of Contents

| 1. General Remarks | |
|--|----|
| 2. Test Site | 4 |
| 2.1 Location | 4 |
| 2.2 List of Test equipment used for tests | 4 |
| 2.3 Test Date | 4 |
| 3. Description of the Equipment Under Test | 5 |
| 3.1 Manufacturers declarations | 5 |
| 3.2 Information about EUT | 6 |
| 4. List of Measurements | 7 |
| 5. Transmitter radiated emissions setup | 8 |
| 6. Power Line Conducted Emissions | |
| 7. Antenna Requirment | |
| 8. Periodic Operation | |
| 9. Occupied Bandwidth | |
| 10. Spurious Radiated Emissions | |
| 11. Duty Cycle Correction Factor | 23 |



http://www.jndcerti.com FCCID: W8PGS-440TR

1. General Remarks

The test results in this report apply to the particular Equipment Under Test (EUT) as declared in this report. The test results presented in this report relate only to the item tested.

2. Test Site

2.1 Location

JNDL Laboratory. CO., LTD. .(Test Firm Registration #: 748649)

3m anechoic chamber : B 114~115, 810 Kwanyang-Dong, dongan-Gu, Anyang-Si, Kyunggi-Do, Korea 3m & 10m Open site : 386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

2.2 List of Test equipment used for tests

| No. | Instrument | Model No. | Due to Calibration | Manufactor | Serial No. |
|-------------|---|-----------------------|--------------------|-------------------------|------------|
| | PSA SPECTRUM ANALYZER (3 Hz ~ 26.5 GHz) | E4440A | 2014-10-15 | Agilent Technologies | MY46185375 |
| | SIGNAL GENERATOR (10 MHz ~ 40 GHz) | MG3694B | 2014-10-15 | Anritsu Corp | 062513 |
| | POWER METER (DC ~ 67 GHz) | NRP2 | 2014-10-15 | Rohde & Schwarz | 100973 |
| \boxtimes | POWER SENSOR (50 MHz ~ 40 GHz) | NRP-Z85 | 2014-10-15 | Rohde & Schwarz | 101121 |
| \boxtimes | POWER SENSOR (9 KHz ~ 6 GHz) | NRP-Z92 | 2014-10-15 | Rohde & Schwarz | 100093 |
| | EMI TEST RECEIVER (9 KHz ~ 7 GHz) | ESCI7 | 2014-07-11 | Rohde & Schwarz | 100933 |
| \boxtimes | EMI TEST RECEIVER (20 MHz ~ 1000 MHz) | ESVS30 | 2014-10-15 | Rohde & Schwarz | 828525/005 |
| | EMI TEST RECEIVER (9 KHz ~ 2700 MHz) | ESCS30 | 2014-08-20 | Rohde & Schwarz | 845553/026 |
| | 2-LINE V-NETWORK | ENV216 | 2014-05-09 | Rohde & Schwarz | 101456 |
| \boxtimes | 2-LINE V-NETWORK | ENV216 | 2014-05-09 | Rohde & Schwarz | 101457 |
| | BILOG ANTENNA (30 MHz ~ 1000 MHz) | VULB 9168 | 2015-02-17 | Schwarzbeck | 9168-505 |
| | BILOG ANTENNA (30 MHz ~ 1000 MHz) | VULB 9168 | 2014-10-23 | Schwarzbeck | 9168-506 |
| | HORN ANTENNA (1 GHz ~ 18 GHz) | BBHA 9120D | 2014-12-12 | Schwarzbeck | 568 |
| | HORN ANTENNA (1 GHz ~ 18 GHz) | 3117 | 2014-10-24 | ETS-Lindgren | 00135889 |
| | HORN ANTENNA (18 GHz ~ 40 GHz) | BBHA 9170 | 2014-10-03 | Schwarzbeck | 9170-499 |
| | HORN ANTENNA (18 GHz ~ 40 GHz) | BBHA 9170 | 2014-10-03 | Schwarzbeck | 9170-500 |
| | Microwave Amplifier (100 MHz ~ 26.5 GHz) | NSP2650-NVG | 2014-08-27 | MITEQ | 1745668 |
| | Low Noise Amplifier (18 GHz ~ 40 GHz) | AMF-6F-18004000-37-8P | 2014-05-23 | MITEQ | 1814914 |

[→] All equipment is calibrated with traceable calibrations.

Each calibration is traceable to the national or international standards.

2.3 Test Date

Date of Application: 2013-10 - 22

Date of Test: 2013 - 10 - 22 ~ 2013 - 11 - 08



http://www.jndcerti.com FCCID: W8PGS-440TR

3. Description of the Equipment Under Test

3.1 Manufacturers declarations

| Manufacturer: | Getron System Co., Inc |
|-----------------------|---|
| Product Description : | Wireless transmission device converts the alarm signal from the electronic device to point of contact signal through relay before it is transmitted. It has a software structure which can process data without being disturbed by wireless hindrances, and it can precisely process the FSK wireless signal sent from long distances. Automatic paging is possible in areas where it is difficult for an employee to reside. |
| FCC ID : | W8PGS-440TR |
| Model Name : | GS-440TR |
| Multiple Model Name: | None |
| Operationg Frequency: | 434.0400 MHz ~ 434.7900 MHzz |
| Occupied Bandwidth: | ≤ 8.5 KHz (at 99%) |
| Operation Channel: | 32 |
| Modulation : | FSK |
| EUT Power Source : | Primary power – 12 Vdc (Via AC Mains Powered DC supply) |
| | Secondary Power – N/A |
| Test Item: | Protype |
| Type of Equipment : | Fixed wall |
| Antennas : | Dipole Antenna |
| Antenna Connector: | Reverse polarity SMA connector |

[→]All the testing were performed according to the procedures in FCC Parts 15.231 The EUT was operation in special test mode.




http://www.jndcerti.com

FCCID: W8PGS-440TR

3.2 Information about EUT

- Wireless transmission device is easy to install, and it converts the alarm signal from the electronic device to point of contact signal through relay before it is transmitted.
- The wireless transmission device can immediately deliver the alarm signal to the person in charge.
- Also, it has a software structure which can process data without being disturbed by wireless hindrances, and it can precisely process the FSK wireless signal sent from long distances. Automatic paging is possible in areas where it is difficult for an employee to reside.

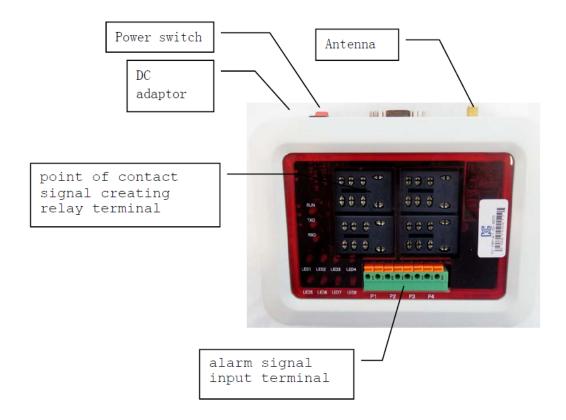



http://www.jndcerti.com

FCCID: W8PGS-440TR

4. List of Measurements

| Guide Lines | FCC Rules Part 15 | Result |
|--------------------------------|-------------------|--------|
| Power Line Conducted Emissions | 15.207 | PASS |
| Antenna Requirement | 15.203 | PASS |
| Periodic Operation | 15.231(a) | PASS |
| Occupied Bandwidth | 15.231(c) | PASS |
| Spurious Radiated Emissions | 15.231(b) | PASS |
| Duty Cycle Correction Factor | 15.231(b) | - |




http://www.jndcerti.com

FCCID: W8PGS-440TR

5. Transmitter radiated emissions setup


5.1 Test setup for 9 KHz ~ 30 MHz

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 KHz to 30 MHz Conducted emissions

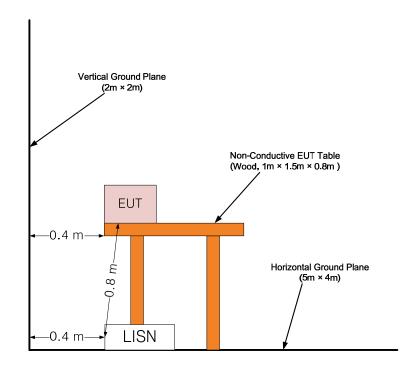

5.2 Test setup for 30 MHz ~ 1 GHz

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions

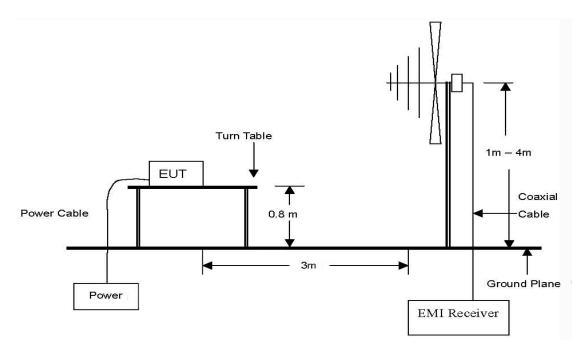




http://www.jndcerti.com

FCCID: W8PGS-440TR

5.3 Test setup for 1 GHz ~ 4.5 GHz

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 4.5 GHz emissions. As required by subpart 15.33 emissions were measured to 4.5 GHz.(10th carrier frequency)

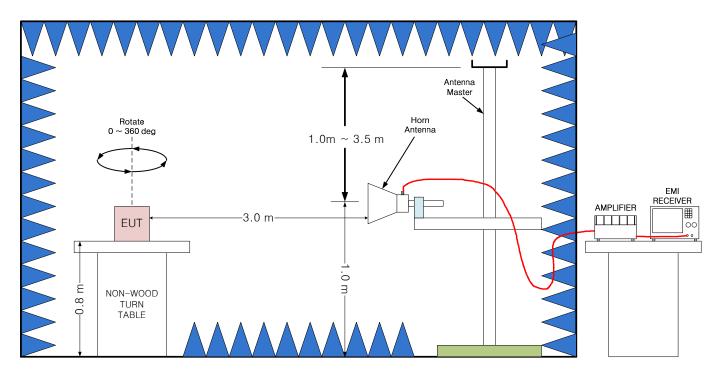



http://www.jndcerti.com

FCCID: W8PGS-440TR

6. Power Line Conducted Emissions

6.1 Definition

The EUT was evaluated to determine compliance with FCC section 15.207

6.2 Test Procedure

ANSI C63.4 sections 6 and 7 were the guiding documents for this evaluation. Conducted emissions were performed from 150kHz to 30MHz with the EMI Receiver (ESCS30) set to 9kHz. The calculation for the conducted emissions is as follows:

Corrected Reading = EMI Receiver Reading + LISN Factor + Cable Loss Margin = Corrected Reading - Applicable Limit

6.3 Test Criteria

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges

| Frequency in emission | Conducted Limit (dBµV) | | | | | |
|-----------------------|------------------------|-----------|--|--|--|--|
| (MHz) | Quasi-Peak | Average | | | | |
| $0.15 \sim 0.5$ | 66 to 56* | 56 to 46* | | | | |
| 0.5 ~ 5.0 | 56 | 46 | | | | |
| 5 ~ 30 | 60 | 50 | | | | |

^{*} Decreases with the logarithm of the frequency



http://www.jndcerti.com FCCID: W8PGS-440TR

6.4 Test Results

6.4.1 F1(434.040 MHz) conducted Emissions Line 1 & Line 2

| Г | Corr. Factor [dB] | | | Quasi-Peak | | | Average | | |
|-------------|-------------------|-------|-------|---------------|---------------|---------------|---------------|---------------|---------------|
| Freq. [MHz] | LICNI | Cabla | Phase | Limit | Level | Margin | Limit | Level | Margin |
| | LISN | Cable | | $[dB(\mu V)]$ |
| 0.201 | 9.83 | 0.01 | Н | 63.58 | 27.28 | -36.30 | 53.58 | 17.99 | -35.59 |
| 0.283 | 9.71 | 0.01 | Н | 60.73 | 20.17 | -40.56 | 50.73 | 14.07 | -36.66 |
| 0.466 | 9.91 | 0.02 | Н | 56.58 | 29.11 | -27.47 | 46.58 | 19.98 | -26.60 |
| 0.642 | 9.87 | 0.02 | Н | | 20.82 | -35.18 | | 14.20 | -31.80 |
| 1.533 | 9.71 | 0.04 | Н | 56 | 19.01 | -36.99 | 46 | 12.42 | -33.58 |
| 3.439 | 9.67 | 0.06 | Н | | 16.96 | -39.04 | | 11.53 | -34.47 |
| 11.826 | 9.72 | 0.16 | N | | 11.88 | -48.12 | | 9.74 | -40.26 |
| 25.072 | 9.75 | 0.24 | N | 60 | 12.61 | -47.39 | 50 | 9.85 | -40.15 |
| 29.494 | 9.77 | 0.27 | Н | | 31.06 | -28.94 | | 19.28 | -30.72 |

^{*} Phase : H : Hot Line, N : Neutral Line

6.4.2 F2(434.440 MHz) conducted Emissions Line 1 & Line 2

| Erog | Corr. Factor [dB] | | | Quasi-Peak | | | Average | | |
|-------------|-------------------|-------|-------|---------------|---------------|---------------|---------------|---------------|---------------|
| Freq. [MHz] | LISN | Cable | Phase | Limit | Level | Margin | Limit | Level | Margin |
| [IVIIIZ] | LISN | Cable | | $[dB(\mu V)]$ |
| 0.185 | 9.91 | 0.01 | Н | 64.25 | 26.68 | -37.57 | 54.25 | 20.02 | -34.23 |
| 0.302 | 9.75 | 0.01 | Н | 60.18 | 23.57 | -36.61 | 50.18 | 17.14 | -33.04 |
| 0.470 | 9.91 | 0.02 | Н | 56.51 | 30.29 | -26.22 | 46.51 | 22.10 | -24.41 |
| 0.627 | 9.88 | 0.02 | Н | | 25.43 | -30.57 | | 17.37 | -28.63 |
| 1.173 | 9.74 | 0.04 | Н | 56 | 19.60 | -36.40 | 46 | 12.81 | -33.19 |
| 2.498 | 9.68 | 0.05 | Н | | 18.11 | -37.89 | | 11.91 | -34.09 |
| 20.021 | 9.79 | 0.21 | Н | | 12.13 | -47.87 | | 9.90 | -40.10 |
| 25.611 | 9.75 | 0.24 | N | 60 | 12.93 | -47.07 | 50 | 9.97 | -40.03 |
| 29.494 | 9.77 | 0.27 | Н | | 30.01 | -29.99 | | 18.96 | -31.04 |

^{*} Phase : H : Hot Line, N : Neutral Line

6.4.3 F3(434.790 MHz) conducted Emissions Line 1 & Line 2

| Г | Corr. Fa | ctor [dB] | | | Quasi-Peak | | | Average | |
|-------------|----------|-----------|-------|----------------|----------------|-----------------|----------------|-------------------|-----------------|
| Freq. [MHz] | LISN | Cable | Phase | Limit [dB(µV)] | Level [dB(μV)] | Margin [dB(μV)] | Limit [dB(μV)] | Level [dB(μV)] | Margin [dB(μV)] |
| 0.185 | 9.91 | 0.01 | N | 64.25 | 25.63 | -38.62 | 54.25 | 19.10 | -35.15 |
| 0.295 | 9.74 | 0.01 | Н | 60.40 | 22.12 | -38.28 | 50.40 | 16.29 | -34.11 |
| 0.463 | 9.91 | 0.02 | Н | 56.65 | 29.05 | -27.60 | 46.65 | 20.28 | -26.37 |
| 0.634 | 9.88 | 0.02 | Н | | 25.37 | -30.63 | | 17.27 | -28.73 |
| 1.193 | 9.74 | 0.04 | Н | 56 | 19.90 | -36.10 | 46 | 13.18 | -32.82 |
| 2.064 | 9.69 | 0.05 | Н | | 19.12 | -36.88 | | 12.56 | -33.44 |
| 14.748 | 9.74 | 0.19 | Н | | 13.14 | -46.86 | | 10.35 | -39.65 |
| 24.939 | 9.78 | 0.24 | Н | 60 | 12.88 | -47.12 | 50 | 10.00 | -40.00 |
| 29.494 | 9.77 | 0.27 | Н | | 29.38 | -30.62 | | 19.04 | -30.96 |

^{*} Phase : H : Hot Line, N : Neutral Line



http://www.jndcerti.com

FCCID: W8PGS-440TR

7. Antenna Requirment

7.1 Definition


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.2 Test Criteria

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

7.3 Test Result

The antenna used a Reverse Polarity SMA Dipole antenna. It's gain is -2.0 dBi below





http://www.jndcerti.com

FCCID: W8PGS-440TR

8. Periodic Operation

8.1 Definition

The intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal. The following conditions shall be met to comply with the provisions for this periodic operation.

8.2 Test Procedure

The EUT Output is connected to the spectrum analyzer.

It measured with the spectrum analyzer set to RBW=1 MHz, VBW=3(1) MHz, Span= 0 Hz, Sweep time = 15 seconds (or 30 seconds).

8.3 Test Criteria


- (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

8.4 Test Result

(1) Transmission Time

| Carrier Frequency [MHz] | Plot # | Transmission Time (sec) | Limit (sec) | Remark |
|-------------------------|-----------|-------------------------|-------------|--------|
| 434.040 | 1 | 3.225 | ≤ 5 | PASS |
| 434.440 | 2 | 3.225 | ≤ 5 | PASS |
| 434.790 | 3 | 3.225 | ≤ 5 | PASS |


Plot #1

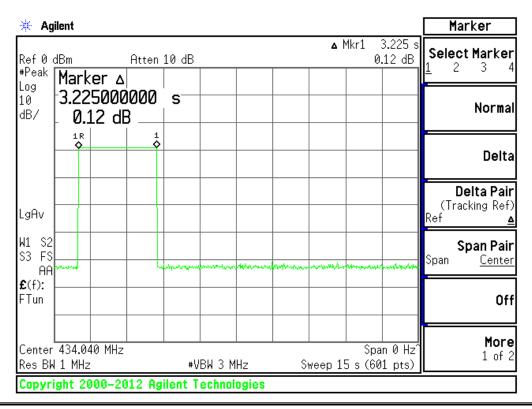




http://www.jndcerti.com FCCID: W8PGS-440TR

Plot #2

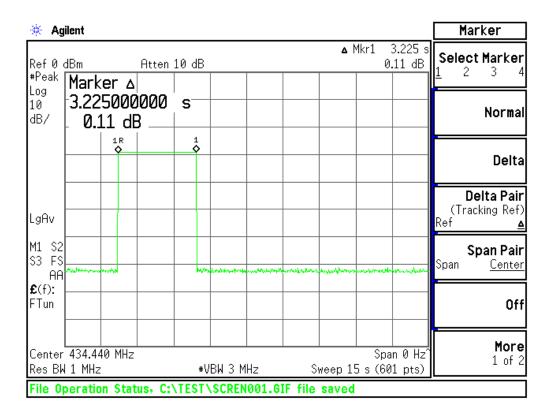

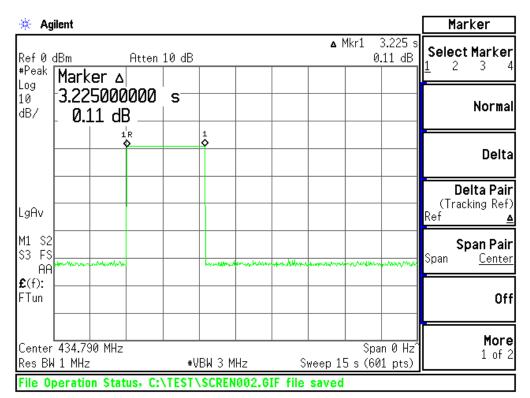




http://www.jndcerti.com

FCCID: W8PGS-440TR

(2) Release Time


| Carrier Frequency [MHz] | Plot # | Mark | Release Time (sec) | Limit (sec) | Remark |
|-------------------------|-----------|----------|--------------------|-------------|--------|
| 434.040 | 4 | ♦4 to ♦3 | 9.45 | ≥ 5 | PASS |
| 434.440 | 5 | ♦4 to ♦3 | 9.45 | ≥ 5 | PASS |
| 434.790 | 6 | ♦4 to ♦3 | 9.50 | ≥ 5 | PASS |

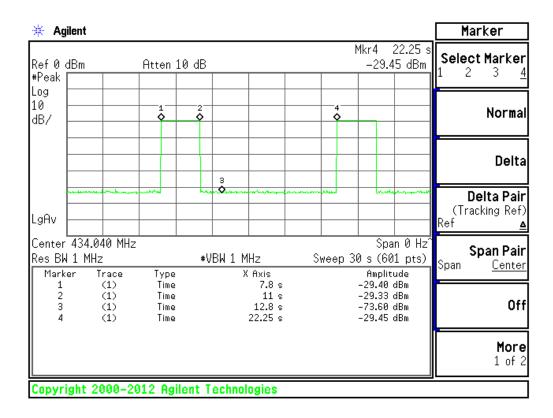




http://www.jndcerti.com FCCID: W8PGS-440TR

Plot #5

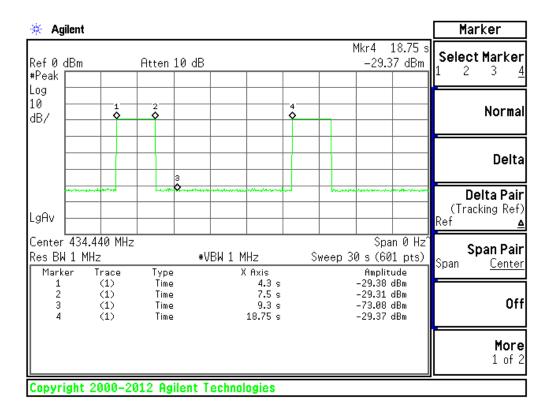

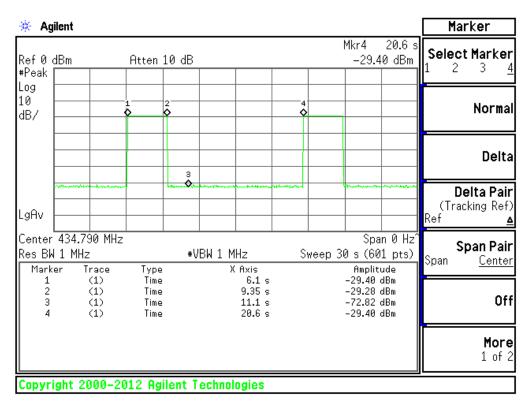



http://www.jndcerti.com

FCCID: W8PGS-440TR

9. Occupied Bandwidth

9.1 Definition

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

9.2 Test Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The span of the spectrum analyzer display was set between two times and five times the occupied bandwidth (OBW) of the emission. The RBW of the spectrum analyzer was set to approximately 1 % to 5 % of the OBW. The trace was set to max hold with a peak detector active. The Occupied Bandwidth function of the analyzer was utilized to determine the 20 dB bandwidth of the emission.

It measured with the spectrum analyzer set to RBW=1 KHz, VBW=3 KHz, Span= 150 KHz, Sweep time = auto


9.3 Test Criteria

- (1) The bandwidth of the emission shall be no wider than 0.25% of the center frequency.
- (2) Bandwidth is determined at the points 20 dB down from the modulated carrier.

9.4 Test Result

| Carrier Frequency [MHz] | Plot # | -20 dB Bandwidth (KHz) | 99% Bandwidth (KHz) | Limit (KHz) | Remark |
|-------------------------|-----------|---------------------------|------------------------|----------------|--------|
| 434.040 | 7 | 9.485 | 8.363 | 1 085.10 | PASS |
| 434.440 | 8 | 8.566 | 7.782 | 1 086.10 | PASS |
| 434.790 | 9 | 9.013 | 7.828 | 1 086.98 | PASS |


Plot #7

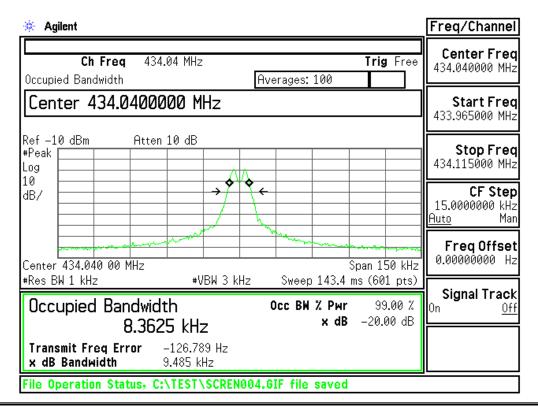




http://www.jndcerti.com FCCID: W8PGS-440TR

Plot #8

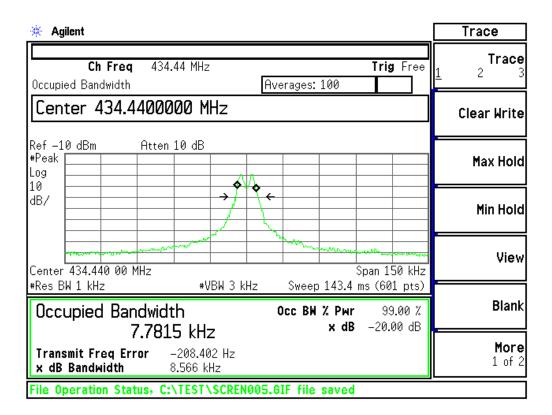

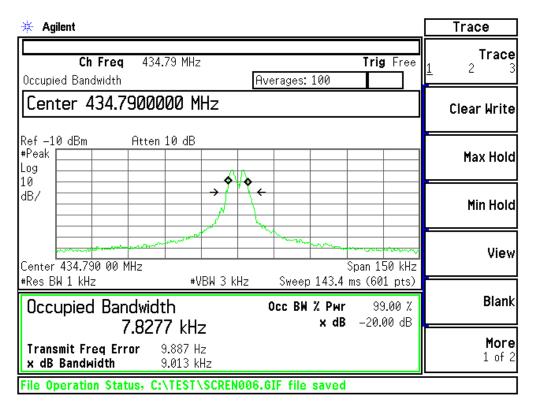



http://www.jndcerti.com

FCCID: W8PGS-440TR

10. Spurious Radiated Emissions

10.1 Definition

In addition to the provisions of §15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

| Fundamental frequency (MHz) | Field strength of fundamental (microvolts/meter) | Field strength of spurious emissions (microvolts/meter) |
|-----------------------------|--|---|
| 40.66-40.70 | 2,250 | 225 |
| 70-130 | 1,250 | 125 |
| 130-174 | ¹ 1,250 to 3,750 | ¹ 125 to 375 |
| 174-260 | 3,750 | 375 |
| 260-470 | ¹ 3,750 to 12,500 | ¹ 375 to 1,250 |
| Above 470 | 12,500 | 1,250 |

¹Linear interpolations.

10.2 Test Procedure

The EUT was placed on a non-conductive table 0.8 meters above the ground plane. The table was centered on a rotating turntable at a distance of 3 meters from the measurement antenna.

For spurious emissions below 1 GHz quasi-peak detection is used with a resolution bandwidth of 120 kHz. The emissions were maximized by rotating the EUT and raising and lowering the measurement antenna from $1\sim4$ meters(above 1 GHz, measure antenna from $1\sim3.5$ meters)

Spurious/harmonic emissions above 1 GHz peak are measured with average and peak detection with a resolution bandwidth of 1 MHz and measured at a distance of 3 meter.

Average detection is used to determine compliance of the EUT if the peak does not meet the average limit. Non-harmonic emissions must satisfy the average limit and the peak limit (20 dB above average).

Further, compliance with the provisions of 15.205 was demonstrated using the measurement instrumentation specified in that section where applicable.

Radiated emissions from the EUT were measured by EMI Receiver according to the dictates of ANSI C63.4:2009

Correction factor is a combination of cable loss (CL), microwave amplifier gain (G amp), antenna factor (AF) Example correction factor calculation: F/S(Field Strength) = Measuring Value +AF-(G amp-CL)

Both vertical and horizontal polarities were tested and the worst case presented. In all cases the vertical polarization resulted in the greatest signal.



http://www.jndcerti.com

FCCID: W8PGS-440TR

10.3 Test Criteria

10.3.1 Radiated emission limits; general requirements.

| Frequency in MHz | Field strength |
|------------------|-------------------------------|
| 0.009-0.490 | 2400/F(kHz) μV/m @ 300 meters |
| 0.490-1.705 | 24000/F(kHz) μV/m @ 30 meters |
| 1.705-30.0 | 29.54 dBµV/m @ 30 meters |
| 30 – 88 | 40.0 dBμV/m @ 3 meters |
| 88 – 216 | 43.5 dBμV/m @ 3 meters |
| 216 – 960 | 46.0 dBμV/m @ 3 meters |
| Above 960 | 54.0 dBμV/m @ 3 meters |

10.3.2 Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.

| Fundamental frequency (MHz) | Field strength of fundamental (microvolts/meter) | Field strength of spurious emissions (microvolts/meter) |
|-----------------------------|--|---|
| 40.66-40.70 | 2,250 | 225 |
| 70-130 | 1,250 | 125 |
| 130-174 | ¹ 1,250 to 3,750 | ¹ 125 to 375 |
| 174-260 | 3,750 | 375 |
| 260-470 | ¹ 3,750 to 12,500 | ¹ 375 to 1,250 |
| Above 470 | 12,500 | 1,250 |

¹Linear interpolations.

[→] Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows; for the band 260 - 470 MHz, μ V/m at 3 meters = 41.6667(F)-7083.333. Also, field strength of spurious emissions is μ V/m at 3 meters = 4.16667(F)-708.3333 (= fundamental field – 20 dB)



http://www.jndcerti.com

FCCID: W8PGS-440TR

10.4 Test Results

10.4.1 F1(434.040 MHz)

10.4.1.1 X-Y Scan

** F is Fund Freq

| r is ruliu rieq | | | | | | | | | | | | | | | |
|-----------------|--------|---------------------|------|----------|--------|--------|----------|-------------|-------|----------|----------|----------|-----------------------|-----------------------|----------|
| Eroguanav | Le | vel | EUT | Antenna | table | Mast | Cor | rection Fac | tors | Correcte | ed Level | Lin | nit | Mai | rgin |
| Frequency | pk | Qpk/Avg | SCAN | Polarity | angle | Height | AF | Amp | Cable | pk | Qpk/Avg | pk | Qpk/Avg | pk | Qpk/Avg |
| (MHz) | (dBµV) | (dB _µ V) | | (H/V) | degree | (cm) | (dB/m) | (dB) | (dB) | (dBµV/m) | (dBµV/m) | (dBµV/m) | (dB _µ V/m) | (dB _µ V/m) | (dBµV/m) |
| | | | | | | | undmant | eal Emissi | ons | | | | | | |
| 434.04 | 59.16 | 59.06 | XY | V | 233 | 100 | 16.28 | | 1.84 | 77.28 | 77.18 | 100.83 | 80.83 | -23.55 | -3.65 |
| 434.04 | 51.45 | 51.37 | XY | Н | 23 | 220 | 16.28 | | 1.84 | 69.57 | 69.49 | 100.83 | 80.83 | -31.26 | -11.34 |
| | | | | | | | Spurious | Emission | ıs | | | | | | |
| 404.55 | 15.13 | 13.81 | XY | V | 98 | 100 | 15.60 | | 1.73 | 32.46 | 31.14 | 46.02 | 46.02 | -13.56 | -14.88 |
| 1736.18 | 44.76 | 40.29 | XY | V | 230 | 170 | 25.61 | -31.84 | 4.71 | 43.24 | 38.77 | 80.83 | 60.83 ** | -37.59 | -22.06 |
| 1736.19 | 46.41 | 42.94 | XY | Н | 303 | 105 | 25.61 | -31.84 | 4.71 | 44.89 | 41.42 | 80.83 | 60.83 ** | -35.94 | -19.41 |

10.4.1.2 Y-Z Scan

** F is Fund Freq

| F | Le | vel | EUT | Antenna | table | Mast | Cor | rection Fac | tors | Correcte | ed Level | Lin | nit | Mai | rgin |
|-----------|--------|---------|------|----------|--------|--------|----------|-----------------|-------|---------------|-----------------------|----------|----------|---------------|----------|
| Frequency | pk | Qpk/Avg | SCAN | Polarity | angle | Height | AF | Amp | Cable | pk | Qpk/Avg | pk | Qpk/Avg | pk | Qpk/Avg |
| (MHz) | (dBµV) | (dBµV) | | (H/V) | degree | (cm) | (dB/m) | (dB) | (dB) | $(dB\mu V/m)$ | (dB _µ V/m) | (dBµV/m) | (dBµV/m) | $(dB\mu V/m)$ | (dBµV/m) |
| | | | | | | 1 | undmant | eal Emissi | ons | | | | | | |
| 434.04 | 51.24 | 51.23 | YZ | V | 148 | 200 | 16.28 | | 1.84 | 69.36 | 69.35 | 100.83 | 80.83 | -31.47 | -11.48 |
| 434.04 | 57.50 | 57.42 | YZ | Н | 91 | 220 | 16.28 | | 1.84 | 75.62 | 75.54 | 100.83 | 80.83 | -25.21 | -5.29 |
| | | | | | | | Spurious | Emission | IS | | | | | | |
| 69.84 | 18.13 | 12.33 | YZ | V | 183 | 100 | 10.97 | | 0.76 | 29.86 | 24.06 | 40.00 | 40.00 | -10.14 | -15.94 |
| 404.55 | 16.88 | 15.82 | YZ | Н | 90 | 100 | 15.60 | | 1.73 | 34.21 | 33.15 | 46.02 | 46.02 | -11.81 | -12.87 |
| 1736.14 | 48.64 | 45.99 | YZ | V | 196 | 125 | 25.61 | -31.84 | 4.71 | 47.12 | 44.47 | 80.83 | 60.83 ** | -33.71 | -16.36 |
| 3472.33 | 43.30 | 37.31 | YZ | V | 264 | 130 | 29.08 | -32.26 | 7.32 | 47.44 | 41.45 | 80.83 | 60.83 ** | -33.39 | -19.38 |
| 1736.16 | 51.02 | 49.17 | YZ | Н | 128 | 105 | 25.61 | -31.84 | 4.71 | 49.50 | 47.65 | 80.83 | 60.83 ** | -31.33 | -13.18 |

10.4.1.3 Z-X Scan

** F is Fund Freq

| Eroauanau | Le | vel | EUT | Antenna | table | Mast | Corr | rection Fac | tors | Correcte | ed Level | Lin | nit | Mai | rgin |
|-----------|--------|---------------------|------|----------|--------|--------|----------|-------------|-------|----------|----------|----------|----------|-----------------------|---------------|
| Frequency | pk | Qpk/Avg | SCAN | Polarity | angle | Height | AF | Amp | Cable | pk | Qpk/Avg | pk | Qpk/Avg | pk | Qpk/Avg |
| (MHz) | (dBµV) | (dB _µ V) | | (H/V) | degree | (cm) | (dB/m) | (dB) | (dB) | (dBµV/m) | (dBµV/m) | (dBµV/m) | (dBµV/m) | (dB _µ V/m) | $(dB\mu V/m)$ |
| | | | | | | | undmant | eal Emissi | ons | | | | | | |
| 434.04 | 53.13 | 52.98 | ZX | V | 301 | 150 | 16.28 | | 1.84 | 71.25 | 71.10 | 100.83 | 80.83 | -29.58 | -9.73 |
| 434.04 | 56.41 | 56.20 | ZX | Н | 337 | 200 | 16.28 | | 1.84 | 74.53 | 74.32 | 100.83 | 80.83 | -26.30 | -6.51 |
| | | | | | | | Spurious | Emission | 15 | | | | | | |
| 1736.10 | 46.59 | 43.39 | ZX | V | 50 | 105 | 25.61 | -31.84 | 4.71 | 45.07 | 41.87 | 80.83 | 60.83 ** | -35.76 | -18.96 |
| 1736.21 | 46.72 | 43.70 | ZX | Н | 47 | 170 | 25.61 | -31.84 | 4.71 | 45.20 | 42.18 | 80.83 | 60.83 ** | -35.63 | -18.65 |

10.4.2 F2(434.440 MHz)

10.4.2.1 X-Y Scan

** F is Fund Freq

| Tio Tana II | | | | | | | | | | | | | | | |
|-----------------------|--------------------|---------|------|----------|--------|--------|--------|-------------|-------|----------|----------|----------|----------|---------------|----------|
| Frequency | Le | evel | EUT | Antenna | table | Mast | Cor | rection Fac | tors | Correcte | ed Level | Lin | nit | Ma | rgin |
| rrequericy | pk | Qpk/Avg | SCAN | Polarity | angle | Height | AF | Amp | Cable | pk | Qpk/Avg | pk | Qpk/Avg | pk | Qpk/Avg |
| (MHz) | (dBµV) | (dBµV) | | (H/V) | degree | (cm) | (dB/m) | (dB) | (dB) | (dBµV/m) | (dBµV/m) | (dBµV/m) | (dBµV/m) | $(dB\mu V/m)$ | (dBµV/m) |
| Fundmanteal Emissions | | | | | | | | | | | | | | | |
| 434.44 | 58.74 | 58.62 | XY | V | 176 | 100 | 16.28 | | 1.84 | 76.86 | 76.74 | 100.84 | 80.84 | -23.98 | -4.10 |
| 434.44 | 52.16 | 51.81 | XY | Н | 221 | 200 | 16.28 | | 1.84 | 70.28 | 69.93 | 100.84 | 80.84 | -30.56 | -10.91 |
| | Spurious Emissions | | | | | | | | | | | | | | |
| 1737.79 | 44.95 | 40.64 | XY | V | 254 | 105 | 25.61 | -31.84 | 4.72 | 43.44 | 39.13 | 80.84 | 60.84 ** | -37.40 | -21.71 |
| 1737.78 | 46.56 | 43.31 | XY | Н | 278 | 105 | 25.61 | -31.84 | 4.71 | 45.04 | 41.79 | 80.84 | 60.84 ** | -35.80 | -19.05 |



http://www.jndcerti.com

FCCID: W8PGS-440TR

10.4.2.2 Y-Z Scan

** F is Fund Freq

| Frequency | Le | vel | EUT | Antenna | table | Mast | Corr | rection Fact | tors | Correcte | ed Level | Lin | nit | Mai | rgin |
|------------|--------|---------|------|----------|--------|--------|----------|--------------|-------|----------|----------|----------|----------|----------|----------|
| rrequericy | pk | Qpk/Avg | SCAN | Polarity | angle | Height | AF | Amp | Cable | pk | Qpk/Avg | pk | Qpk/Avg | pk | Qpk/Avg |
| (MHz) | (dBµV) | (dBµV) | | (H/V) | degree | (cm) | (dB/m) | (dB) | (dB) | (dBµV/m) | (dBµV/m) | (dBµV/m) | (dBµV/m) | (dBµV/m) | (dBµV/m) |
| | | | | | | | Fundmant | eal Emissi | ons | | | | | | |
| 434.44 | 50.58 | 50.45 | YZ | V | 148 | 200 | 16.28 | | 1.84 | 68.70 | 68.57 | 100.84 | 80.84 | -32.14 | -12.27 |
| 434.44 | 57.68 | 57.63 | YZ | Н | 79 | 220 | 16.28 | | 1.84 | 75.80 | 75.75 | 100.84 | 80.84 | -25.04 | -5.09 |
| | | | | | | | Spurious | Emission | IS | | | | | | |
| 404.95 | 16.83 | 15.70 | YZ | Н | 77 | 100 | 15.62 | | 1.73 | 34.18 | 33.05 | 46.02 | 46.02 | -11.84 | -12.97 |
| 1737.81 | 47.14 | 44.28 | YZ | V | 300 | 105 | 25.61 | -31.84 | 4.72 | 45.63 | 42.77 | 80.84 | 60.84 ** | -35.21 | -18.07 |
| 1737.73 | 50.68 | 48.61 | YZ | Н | 175 | 105 | 25.61 | -31.84 | 4.72 | 49.17 | 47.10 | 80.84 | 60.84 ** | -31.67 | -13.74 |

10.4.2.3 Z-X Scan

** F is Fund Freq

| T IS TAILED | | | | | | | | | | | | | a rreq | | | |
|-------------|-----------|---------------------|---------------------|------|----------|--------|--------|----------|--------------|-------|----------|----------|----------|----------|---------------|---------------|
| | Eroauonau | Le | evel | EUT | Antenna | table | Mast | Con | rection Fact | tors | Correcte | ed Level | Lin | nit | Mar | rgin |
| | Frequency | pk | Qpk/Avg | SCAN | Polarity | angle | Height | AF | Amp | Cable | pk | Qpk/Avg | pk | Qpk/Avg | pk | Qpk/Avg |
| | (MHz) | (dB _µ V) | (dB _µ V) | | (H/V) | degree | (cm) | (dB/m) | (dB) | (dB) | (dBµV/m) | (dBµV/m) | (dBµV/m) | (dBµV/m) | $(dB\mu V/m)$ | $(dB\mu V/m)$ |
| | | | | | | | | Spurious | Emission | IS | | | | | | |
| | 1737.78 | 46.04 | 42.71 | ZX | V | 314 | 105 | 25.61 | -31.84 | 4.72 | 44.53 | 41.20 | 80.84 | 60.84 ** | -36.31 | -19.64 |
| | 1737.80 | 46.90 | 43.68 | ZX | Н | 49 | 170 | 25.61 | -31.84 | 4.72 | 45.39 | 42.17 | 80.84 | 60.84 ** | -35.45 | -18.67 |
| | | | | | | | | | | | | | | | | |

10.4.3 F3(434.790 MHz)

10.4.3.1 X-Y Scan

** F is Fund Freq

| Frequency | Level | | EUT | Antenna | table | Mast | Correction Factors | | | Corrected Level | | Limit | | Margin | |
|-----------------------|--------|---------|------|----------|--------|--------|--------------------|--------|-------|-----------------|----------|----------|----------|---------------|---------------|
| | pk | Qpk/Avg | SCAN | Polarity | angle | Height | AF | Amp | Cable | pk | Qpk/Avg | pk | Qpk/Avg | pk | Qpk/Avg |
| (MHz) | (dBµV) | (dBµV) | | (H/V) | degree | (cm) | (dB/m) | (dB) | (dB) | (dBµV/m) | (dBµV/m) | (dBµV/m) | (dBµV/m) | $(dB\mu V/m)$ | $(dB\mu V/m)$ |
| Fundmanteal Emissions | | | | | | | | | | | | | | | |
| 434.79 | 58.27 | 58.17 | XY | V | 161 | 100 | 16.28 | | 1.84 | 76.39 | 76.29 | 100.85 | 80.85 | -24.46 | -4.56 |
| Spurious Emissions | | | | | | | | | | | | | | | |
| 405.31 | 14.10 | 12.76 | XY | V | 134 | 150 | 15.62 | | 1.73 | 31.45 | 30.11 | 46.02 | 46.02 | -14.57 | -15.91 |
| 1739.15 | 45.22 | 41.49 | XY | V | 241 | 145 | 25.61 | -31.84 | 4.72 | 43.71 | 39.98 | 80.85 | 60.85 ** | -37.14 | -20.87 |
| 1739.18 | 47.94 | 45.06 | XY | Н | 302 | 105 | 25.61 | -31.84 | 4.72 | 46.43 | 43.55 | 80.85 | 60.85 ** | -34.42 | -17.30 |

10.4.3.2 Y-Z Scan

** F is Fund Freq

| 1 is ruita rice | | | | | | | | | | | | | u i icq | | |
|-----------------------|---------------------|---------|------|----------|--------|--------|--------------------|--------|-----------------|----------|----------|----------|----------|----------|----------|
| Frequency | Level | | EUT | Antenna | table | Mast | Correction Factors | | Corrected Level | | Limit | | Margin | | |
| rrequericy | pk | Qpk/Avg | SCAN | Polarity | angle | Height | AF | Amp | Cable | pk | Qpk/Avg | pk | Qpk/Avg | pk | Qpk/Avg |
| (MHz) | (dB _µ V) | (dBµV) | | (H/V) | degree | (cm) | (dB/m) | (dB) | (dB) | (dBµV/m) | (dBµV/m) | (dBµV/m) | (dBµV/m) | (dBµV/m) | (dBµV/m) |
| Fundmanteal Emissions | | | | | | | | | | | | | | | |
| 434.79 | 57.94 | 57.80 | YZ | Н | 77 | 100 | 16.28 | | 1.84 | 76.06 | 75.92 | 100.85 | 80.85 | -24.79 | -4.93 |
| Spurious Emissions | | | | | | | | | | | | | | | |
| 405.31 | 17.13 | 16.03 | YZ | Н | 70 | 100 | 15.62 | | 1.73 | 34.48 | 33.38 | 46.02 | 46.02 | -11.54 | -12.64 |
| 1739.15 | 48.09 | 45.42 | YZ | V | 199 | 125 | 25.61 | -31.84 | 4.72 | 46.58 | 43.91 | 80.85 | 60.85 ** | -34.27 | -16.94 |
| 1739.11 | 50.41 | 48.29 | YZ | Н | 264 | 130 | 25.61 | -31.84 | 4.72 | 48.90 | 46.78 | 80.85 | 60.85 ** | -31.95 | -14.07 |

10.4.3.3 Z-X Scan

** F is Fund Freq

| | T is tallet tree | | | | | | | | | | | | | | | |
|-----------|--------------------|---------|--------|----------|-------|--------|--------------------|--------|-----------------|------|---------------|----------|----------|----------|----------|----------|
| Frequency | Level | | EUT | Antenna | table | Mast | Correction Factors | | Corrected Level | | Limit | | Margin | | | |
| | pk | Qpk/Avg | SCAN | Polarity | angle | Height | AF | Amp | Cable | pk | Qpk/Avg | pk | Qpk/Avg | pk | Qpk/Avg | |
| | (MHz) | (dBµV) | (dBµV) | | (H/V) | degree | (cm) | (dB/m) | (dB) | (dB) | $(dB\mu V/m)$ | (dBµV/m) | (dBµV/m) | (dBµV/m) | (dBµV/m) | (dBµV/m) |
| | Spurious Emissions | | | | | | | | | | | | | | | |
| | 1739.21 | 47.54 | 43.77 | ZX | V | 39 | 105 | 25.61 | -31.84 | 4.72 | 46.03 | 42.26 | 80.85 | 60.85 ** | -34.82 | -18.59 |
| | 1739.15 | 46.99 | 43.88 | ZX | Н | 54 | 170 | 25.61 | -31.84 | 4.72 | 45.48 | 42.37 | 80.85 | 60.85 ** | -35.37 | -18.48 |

→ Emissions not reported below the noise floor of the measurement system.



http://www.jndcerti.com

FCCID: W8PGS-440TR

11. Duty Cycle Correction Factor

11.1 Definition

For average radiated measurements, the measured level was reduced by a factor X dB to account for the duty cycle of the EUT.

11.2 Test Procedure

Remove the antenna from the EUT and then connect a phase stable low loss RF cable from the antenna port to the spectrum analyzer.

Set center frequency of spectrum analyzer = operation frequency
Set the spectrum analyzer as RBW=1 MHz, VBW=1 MHz, Span=0 Hz, Sweep Time=100 ms
Repeat above procedure all frequency measured were completed.

The worst case duty cycle was determined to be 100%.


The duty cycle correction factor is determined using the formula: $20\log (100/100) = 0$ dB.

Determination of the duty cycle correction is included in the plots and justification below.

11.3 Test Results

11.3.1 F1(434.040 MHz)

Duty cycle correction factor = 0 dB

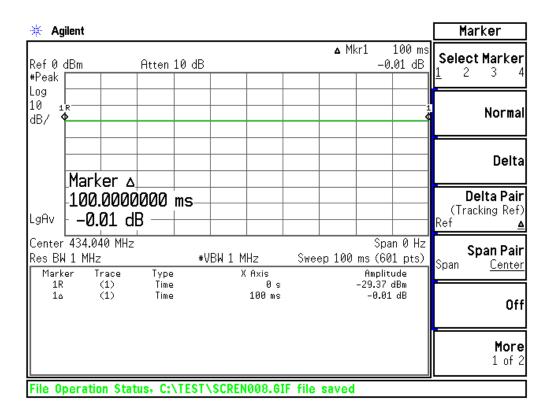




http://www.jndcerti.com

FCCID: W8PGS-440TR

11.3.2 F1(434.440 MHz)

Duty cycle correction factor = 0 dB

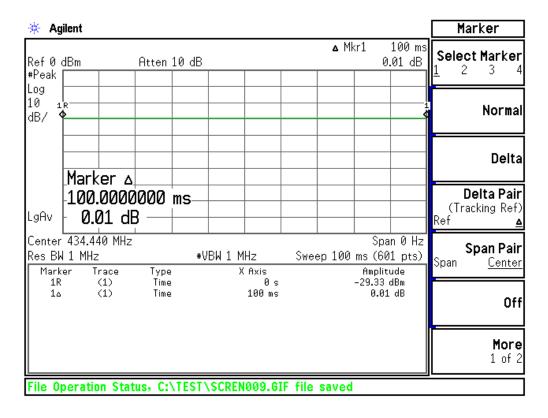

11.3.3 F3(434.790 MHz)

Duty cycle correction factor = 0 dB

