 <p>Bâtiment le Ponant Avenue de la PEROUSE 29280 PLOUZANÉ France Tél. : 02.98.05.13.34 Fax : 02.98.05.53.87</p>	SAR MEASUREMENT REPORT
	Project name :
	KS090525A01

I. INFORMATIONS ON THE TESTING

I. INFORMATIONS ON THE TESTING


I.1. Normative reference

IEEE 1528: Recommended Practice for determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques. Institute of Electrical and Electronics Engineers, INC., 2003.

I.3. Positions and test conditions of the mobile phone under test

The mobile phone antenna and battery are those specified by the manufacturer. The battery is fully charged before each measurement. The output power and frequency are controlled using a base station simulator. The mobile phone is set to transmit at its highest output peak power level.

The mobile phone is test in the “cheek” and “tilted” positions on the left and right sides of the phantom. The mobile phone is placed with the vertical centre line of the body of the mobile phone and the horizontal line crossing the centre of the earpiece in a plane parallel to the sagittal plane of the phantom.

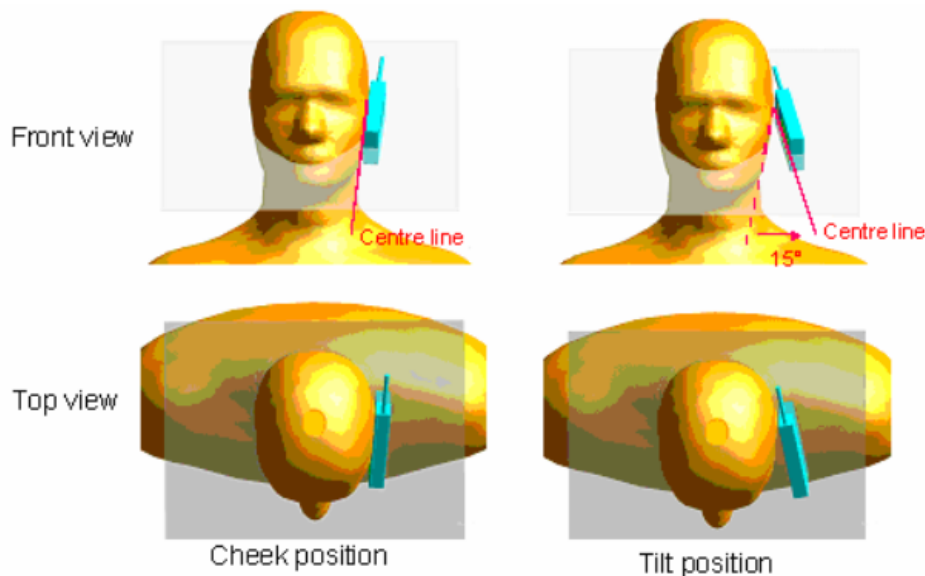



Description of the « cheek » position:

The mobile phone is well placed in the reference plane and the earpiece is in contact with the ear. Then the mobile phone is moved until any point on the front side get in contact with the cheek of the phantom or until contact with the ear is lost.

Description of the « tilted » position:

The mobile phone is well place in the “cheek” position as described above. Then the mobile phone is moved outward away from the mouth by an angle of 15 degrees or until contact with the ear lost.

II. THE MEASUREMENT SYSTEM

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



COMOSAR bench

The mobile phone under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10 g mass.

II.1. Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2 mm +/- 0,2 mm. It enables the dosimetric evaluation of left and right hand phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

II.2. Probe

For the measurements the Specific Dosimetric E-Field Probe SSE5 with following specifications is used.

- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 5 mm

- Distance between probe tip and sensor center : 2.5 mm
- Distance between sensor center and the inner phantom surface: 4 mm (repeatability better than +/- 1mm).
- Probe linearity : <0.25 dB
- Axial Isotropy : <0.25 dB
- Spherical Isotropy : <0.50 dB
- Calibration range : 835 to 2500 MHz for head & body simulating liquid
- Angle between probe axis (evaluation axis) and surface normal line : less than 30°

II.3. Measurement procedure

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors can not directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

II.4 Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

III. RESULTS

<u>TYPE</u>	<u>BAND</u>	<u>PARAMETERS</u>
<u>Noise</u>	--	--
<u>Validation</u>	--	--
<u>Phone</u>	<u>GSM1900</u>	<u>Measurement 1:</u> Right Head with Cheek device position on Low Channel in TDMA mode <u>Measurement 2:</u> Right Head with Cheek device position on Middle Channel in TDMA mode <u>Measurement 3:</u> Right Head with Cheek device position on High Channel in TDMA mode <u>Measurement 4:</u> Right Head with Tilt device position on Low Channel in TDMA mode <u>Measurement 5:</u> Right Head with Tilt device position on Middle Channel in TDMA mode <u>Measurement 6:</u> Right Head with Tilt device position on High Channel in TDMA mode <u>Measurement 7:</u> Left Head with Cheek device position on Low Channel in TDMA mode <u>Measurement 8:</u> Left Head with Cheek device position on Middle Channel in TDMA mode <u>Measurement 9:</u> Left Head with Cheek device position on High Channel in TDMA mode <u>Measurement 10:</u> Left Head with Tilt device position on Low Channel in TDMA mode <u>Measurement 11:</u> Left Head with Tilt device position on Middle Channel in TDMA mode <u>Measurement 12:</u> Left Head with Tilt device position on High Channel in TDMA mode <u>Measurement 13:</u> Validation Plane with Body device position on Low Channel in TDMA mode <u>Measurement 14:</u> Validation Plane with Body device position on Middle Channel in TDMA mode <u>Measurement 15:</u> Validation Plane with Body device position on High Channel in TDMA mode

MEASUREMENT 1

Type: Phone measurement (Complete)

Date of measurement: 2/6/2009

Measurement duration: 15 minutes 3 seconds

Mobile Phone IMEI number: --

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptative 2 max
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	Low
Signal	TDMA


B. Instrumentations.



PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)
Network Emulator	R&S (CMU200, SN:B23-03291)
Voltmeter	Keithley (2000, SN:1015843)
Synthesizer	Agilent (E8257C, SN:MY43321570)
Amplifier	Mini-Circuits (ZHL-42, SN:110405)
Power Meter	Agilent (E4416A, SN:QB41292714)
Probe	Antennessa (SN:SN 11-09 EP100)
Phantom	Antennessa (SN:SN41_05_SAM29)
Liquid	Antennessa

C. SAR Measurement Results


Frequency (MHz)	1850.400024
Relative permittivity (real part)	40.313000
Relative permittivity (imaginary part)	13.584900
Conductivity (S/m)	1.396528
Variation (%)	-1.220000

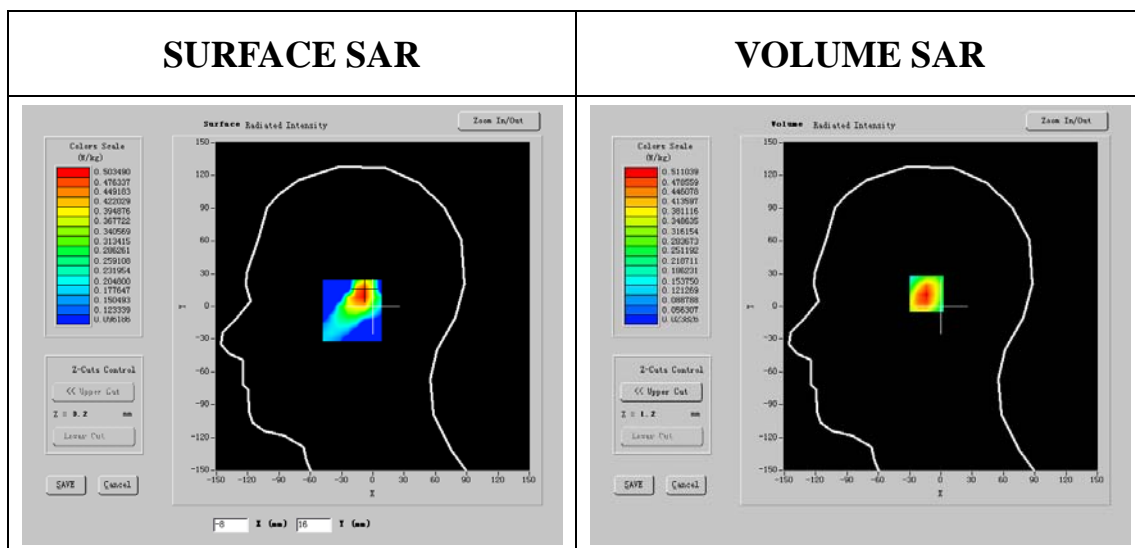

Maximum location: X=-10.00, Y=12.00

SAR 10g (W/Kg)	0.290192
SAR 1g (W/Kg)	0.486937

Z Axis Scan

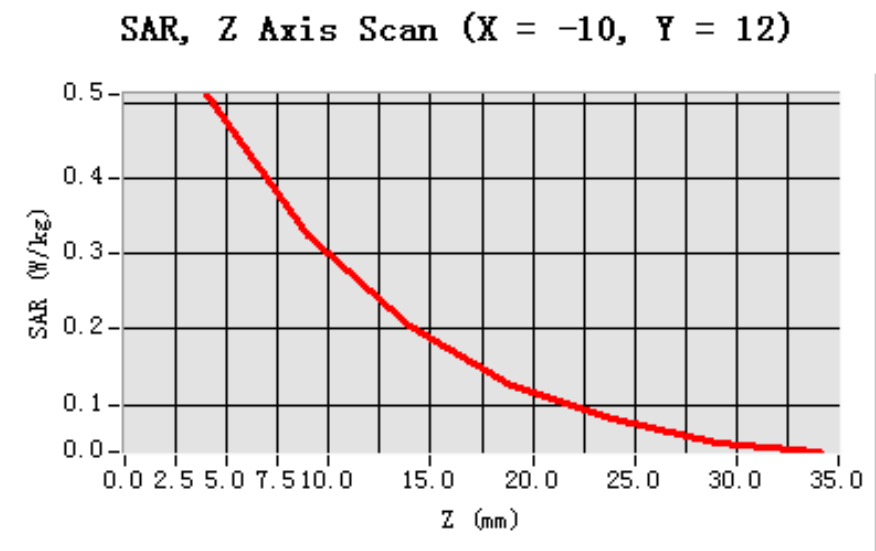

MEASUREMENT 2

Type: Phone measurement (Complete)

Date of measurement: 2/6/2009

Measurement duration: 15 minutes 3 seconds

Mobile Phone IMEI number: --

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptative 2 max
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	Middle
Signal	TDMA


B. Instrumentations.



PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)
Network Emulator	R&S (CMU200, SN:B23-03291)
Voltmeter	Keithley (2000, SN:1015843)
Synthesizer	Agilent (E8257C, SN:MY43321570)
Amplifier	Mini-Circuits (ZHL-42, SN:110405)
Power Meter	Agilent (E4416A, SN:QB41292714)
Probe	Antennessa (SN:SN 11-09 EP100)
Phantom	Antennessa (SN:SN41_05_SAM29)
Liquid	Antennessa

C. SAR Measurement Results


Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.193001
Relative permittivity (imaginary part)	13.813800
Conductivity (S/m)	1.442775
Variation (%)	-0.220000

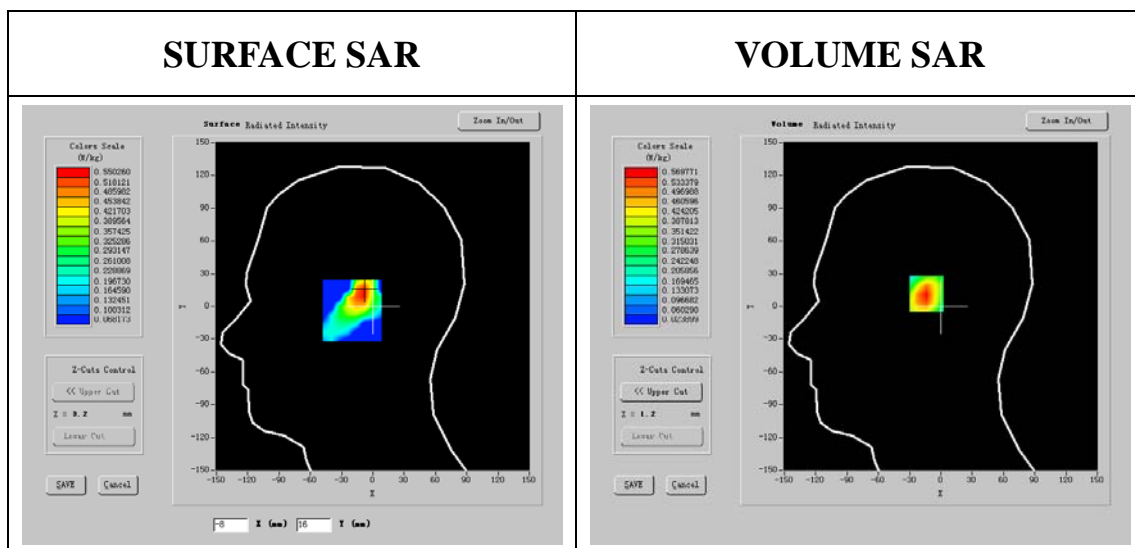

Maximum location: X=-10.00, Y=12.00

SAR 10g (W/Kg)	0.318204
SAR 1g (W/Kg)	0.540035

Z Axis Scan

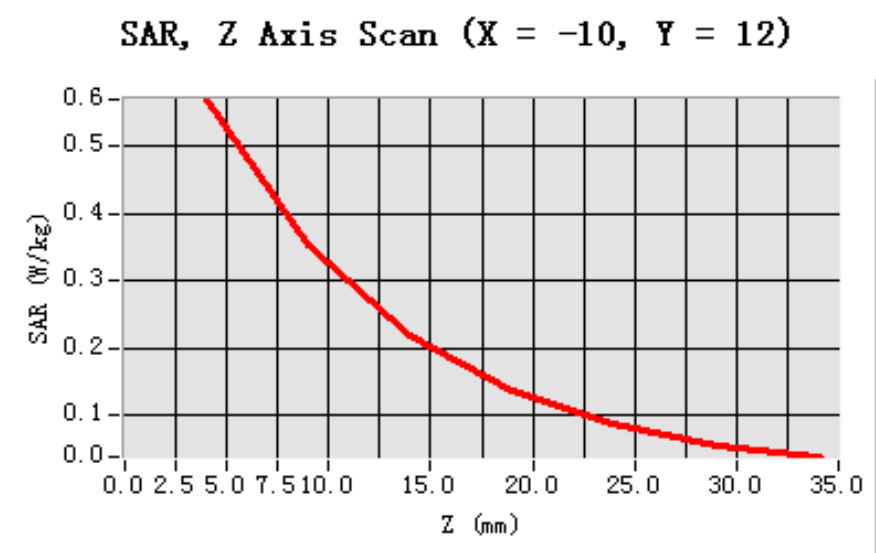

MEASUREMENT 3

Type: Phone measurement (Complete)

Date of measurement: 2/6/2009

Measurement duration: 15 minutes 3 seconds

Mobile Phone IMEI number: --

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptative 2 max
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	High
Signal	TDMA


B. Instrumentations.



PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)
Network Emulator	R&S (CMU200, SN:B23-03291)
Voltmeter	Keithley (2000, SN:1015843)
Synthesizer	Agilent (E8257C, SN:MY43321570)
Amplifier	Mini-Circuits (ZHL-42, SN:110405)
Power Meter	Agilent (E4416A, SN:QB41292714)
Probe	Antennessa (SN:SN 11-09 EP100)
Phantom	Antennessa (SN:SN41_05_SAM29)
Liquid	Antennessa

C. SAR Measurement Results


Frequency (MHz)	1909.599976
Relative permittivity (real part)	40.285999
Relative permittivity (imaginary part)	13.669900
Conductivity (S/m)	1.450225
Variation (%)	-1.030000

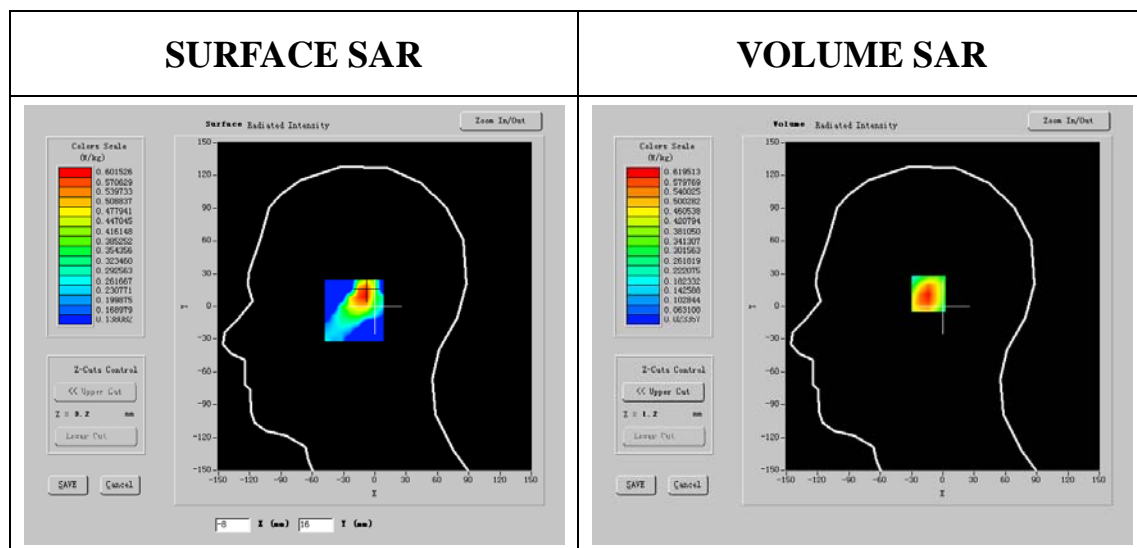

Maximum location: X=-10.00, Y=12.00

SAR 10g (W/Kg)	0.350159
SAR 1g (W/Kg)	0.588162

Z Axis Scan

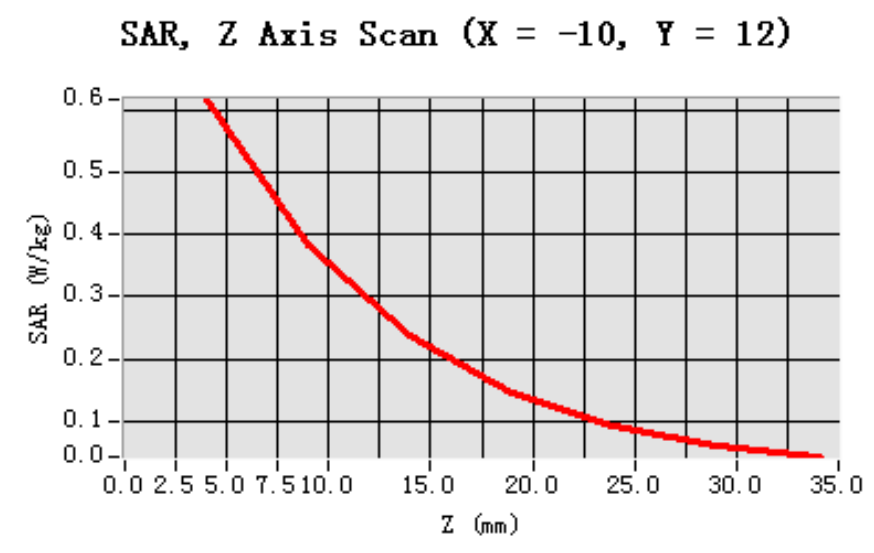

MEASUREMENT 4

Type: Phone measurement (Complete)

Date of measurement: 2/6/2009

Measurement duration: 14 minutes 27 seconds

Mobile Phone IMEI number: --

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptative 2 max
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	Low
Signal	TDMA


B. Instrumentations.



PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)
Network Emulator	R&S (CMU200, SN:B23-03291)
Voltmeter	Keithley (2000, SN:1015843)
Synthesizer	Agilent (E8257C, SN:MY43321570)
Amplifier	Mini-Circuits (ZHL-42, SN:110405)
Power Meter	Agilent (E4416A, SN:QB41292714)
Probe	Antennessa (SN:SN 11-09 EP100)
Phantom	Antennessa (SN:SN41_05_SAM29)
Liquid	Antennessa

C. SAR Measurement Results


Frequency (MHz)	1850.400024
Relative permittivity (real part)	40.313000
Relative permittivity (imaginary part)	13.584900
Conductivity (S/m)	1.396528
Variation (%)	-1.480000

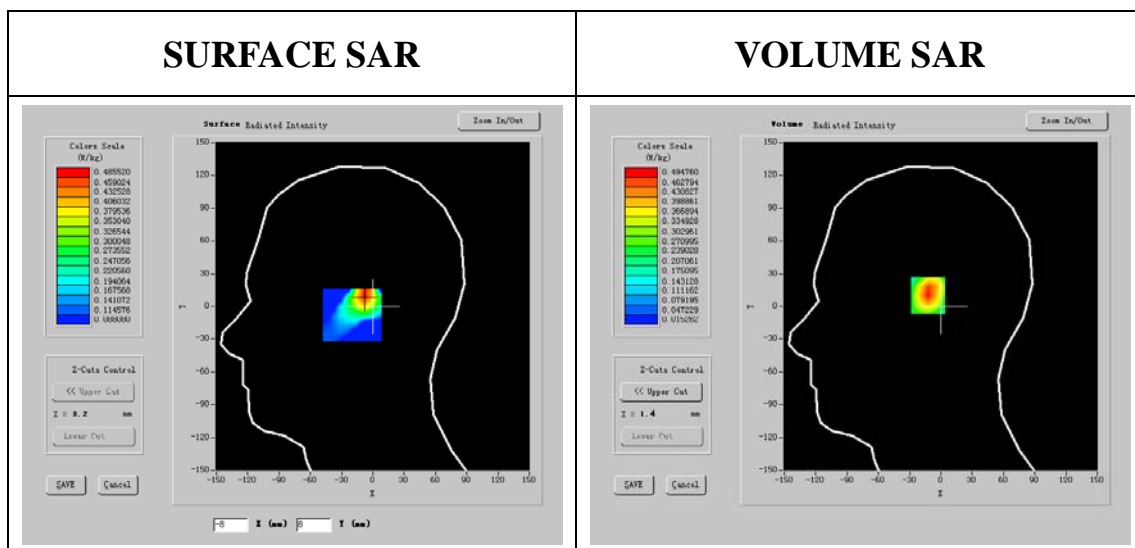

Maximum location: X=-8.00, Y=10.00

SAR 10g (W/Kg)	0.267510
SAR 1g (W/Kg)	0.464468

Z Axis Scan

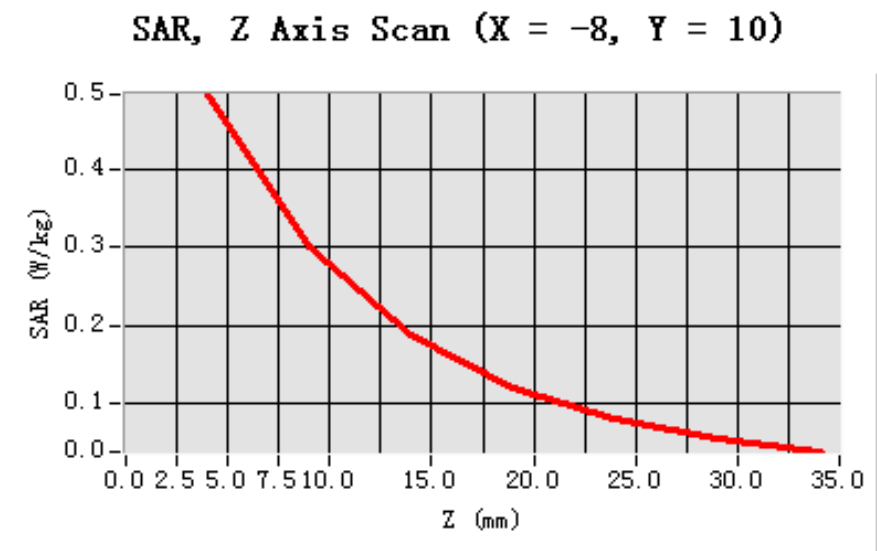

MEASUREMENT 5

Type: Phone measurement (Complete)

Date of measurement: 2/6/2009

Measurement duration: 14 minutes 27 seconds

Mobile Phone IMEI number: --

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptative 2 max
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	Middle
Signal	TDMA


B. Instrumentations.



PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)
Network Emulator	R&S (CMU200, SN:B23-03291)
Voltmeter	Keithley (2000, SN:1015843)
Synthesizer	Agilent (E8257C, SN:MY43321570)
Amplifier	Mini-Circuits (ZHL-42, SN:110405)
Power Meter	Agilent (E4416A, SN:QB41292714)
Probe	Antennessa (SN:SN 11-09 EP100)
Phantom	Antennessa (SN:SN41_05_SAM29)
Liquid	Antennessa

C. SAR Measurement Results


Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.193001
Relative permittivity (imaginary part)	13.813800
Conductivity (S/m)	1.442775
Variation (%)	-1.420000

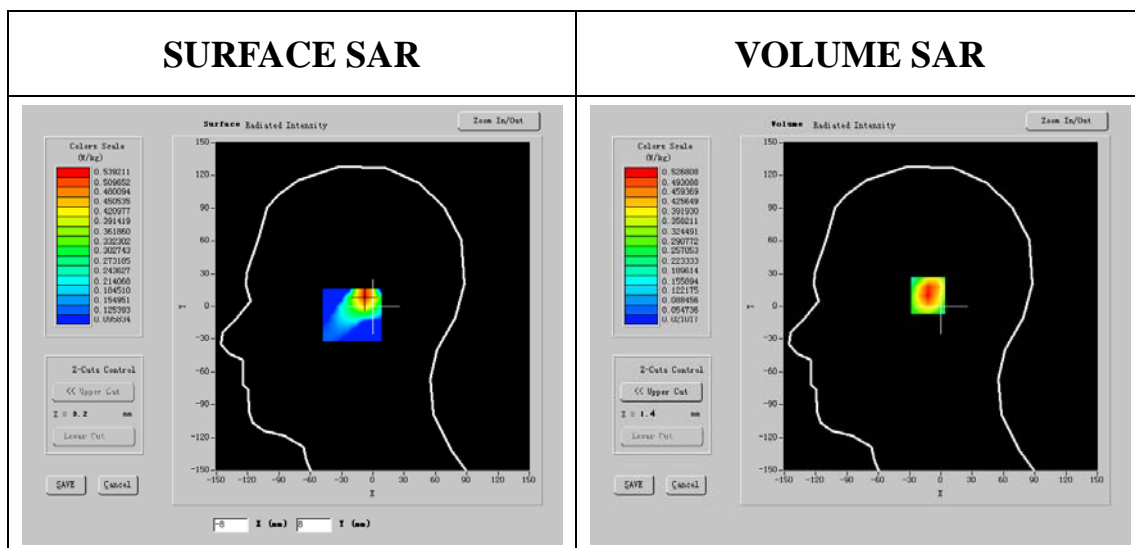

Maximum location: X=-8.00, Y=10.00

SAR 10g (W/Kg)	0.292516
SAR 1g (W/Kg)	0.499892

Z Axis Scan

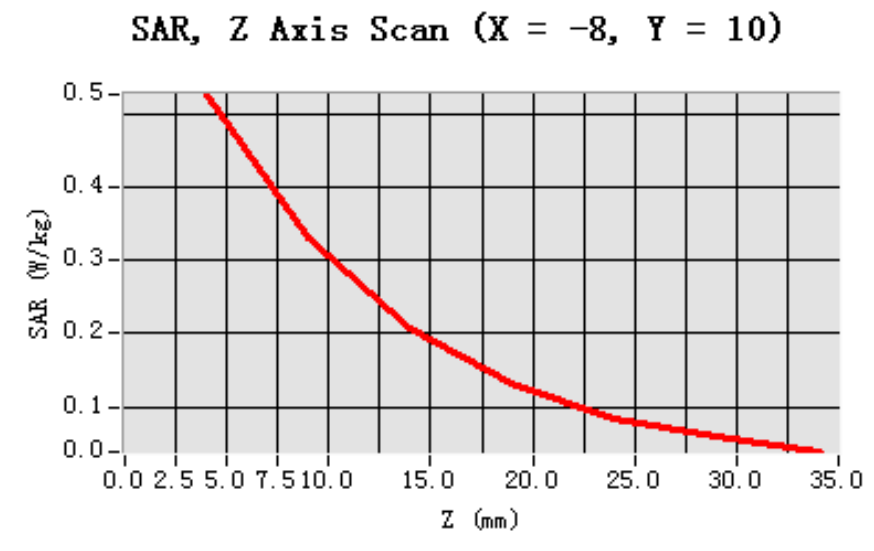

MEASUREMENT 6

Type: Phone measurement (Complete)

Date of measurement: 2/6/2009

Measurement duration: 14 minutes 27 seconds

Mobile Phone IMEI number: --

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptative 2 max
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	High
Signal	TDMA


B. Instrumentations.



PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)
Network Emulator	R&S (CMU200, SN:B23-03291)
Voltmeter	Keithley (2000, SN:1015843)
Synthesizer	Agilent (E8257C, SN:MY43321570)
Amplifier	Mini-Circuits (ZHL-42, SN:110405)
Power Meter	Agilent (E4416A, SN:QB41292714)
Probe	Antennessa (SN:SN 11-09 EP100)
Phantom	Antennessa (SN:SN41_05_SAM29)
Liquid	Antennessa

C. SAR Measurement Results


Frequency (MHz)	1909.599976
Relative permittivity (real part)	40.285999
Relative permittivity (imaginary part)	13.669900
Conductivity (S/m)	1.450225
Variation (%)	-1.500000

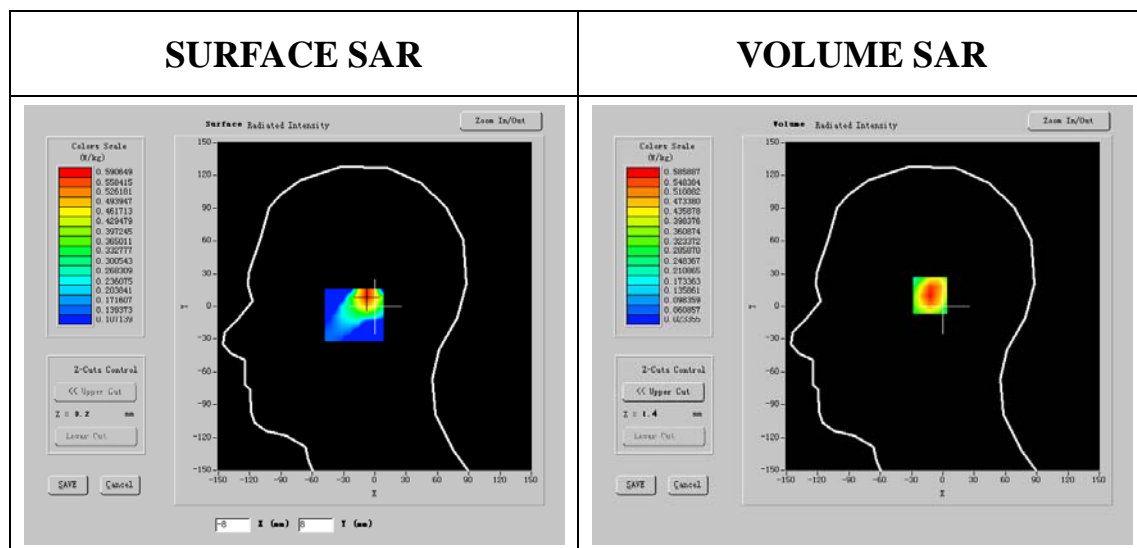

Maximum location: X=-8.00, Y=10.00

SAR 10g (W/Kg)	0.328155
SAR 1g (W/Kg)	0.557050

Z Axis Scan

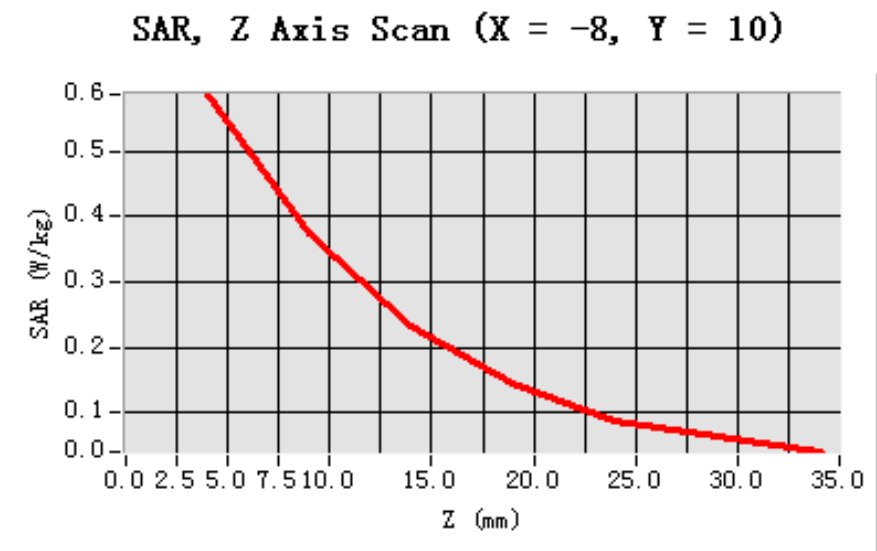

MEASUREMENT 7

Type: Phone measurement (Complete)

Date of measurement: 2/6/2009

Measurement duration: 14 minutes 27 seconds

Mobile Phone IMEI number: --

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptative 2 max
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	Low
Signal	TDMA


B. Instrumentations.



PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)
Network Emulator	R&S (CMU200, SN:B23-03291)
Voltmeter	Keithley (2000, SN:1015843)
Synthesizer	Agilent (E8257C, SN:MY43321570)
Amplifier	Mini-Circuits (ZHL-42, SN:110405)
Power Meter	Agilent (E4416A, SN:QB41292714)
Probe	Antennessa (SN:SN 11-09 EP100)
Phantom	Antennessa (SN:SN41_05_SAM29)
Liquid	Antennessa

C. SAR Measurement Results

Frequency (MHz)	1850.400024
Relative permittivity (real part)	40.313000
Relative permittivity (imaginary part)	13.584900
Conductivity (S/m)	1.396528
Variation (%)	1.410000

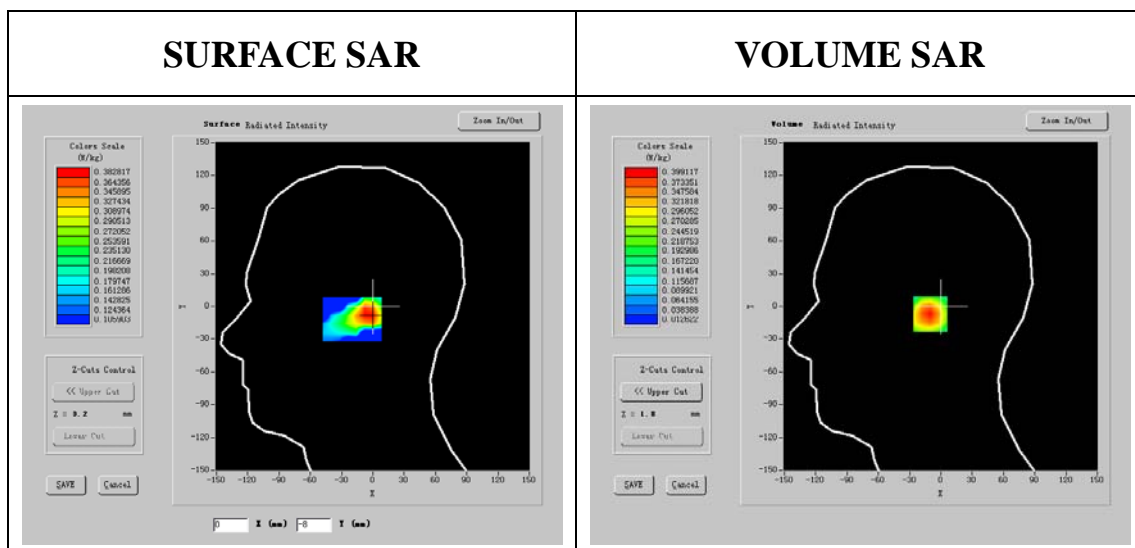




Maximum location: X=-3.00, Y=-7.00

SAR 10g (W/Kg)	0.233291
SAR 1g (W/Kg)	0.374090

Z Axis Scan

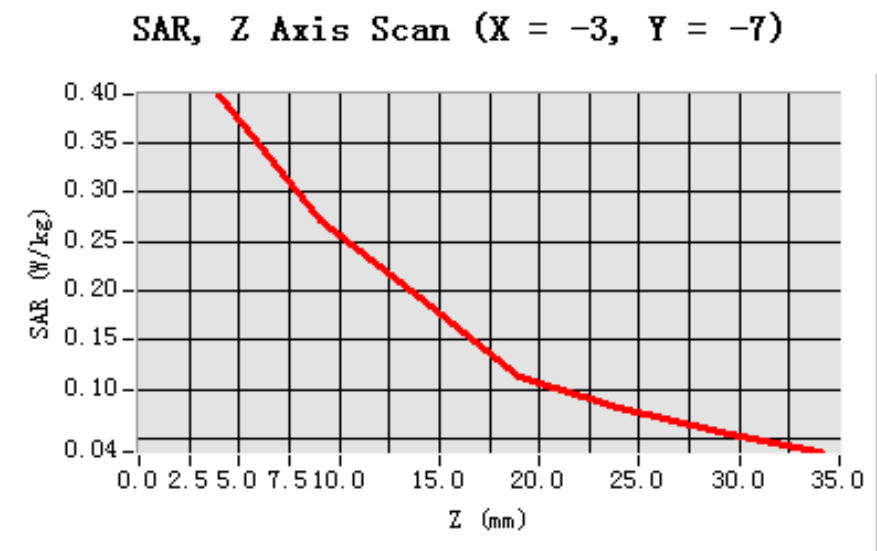

MEASUREMENT 8

Type: Phone measurement (Complete)

Date of measurement: 2/6/2009

Measurement duration: 14 minutes 27 seconds

Mobile Phone IMEI number: --

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptative 2 max
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	Middle
Signal	TDMA


B. Instrumentations.



PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)
Network Emulator	R&S (CMU200, SN:B23-03291)
Voltmeter	Keithley (2000, SN:1015843)
Synthesizer	Agilent (E8257C, SN:MY43321570)
Amplifier	Mini-Circuits (ZHL-42, SN:110405)
Power Meter	Agilent (E4416A, SN:QB41292714)
Probe	Antennessa (SN:SN 11-09 EP100)
Phantom	Antennessa (SN:SN41_05_SAM29)
Liquid	Antennessa

C. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.193001
Relative permittivity (imaginary part)	13.813800
Conductivity (S/m)	1.442775
Variation (%)	1.200000

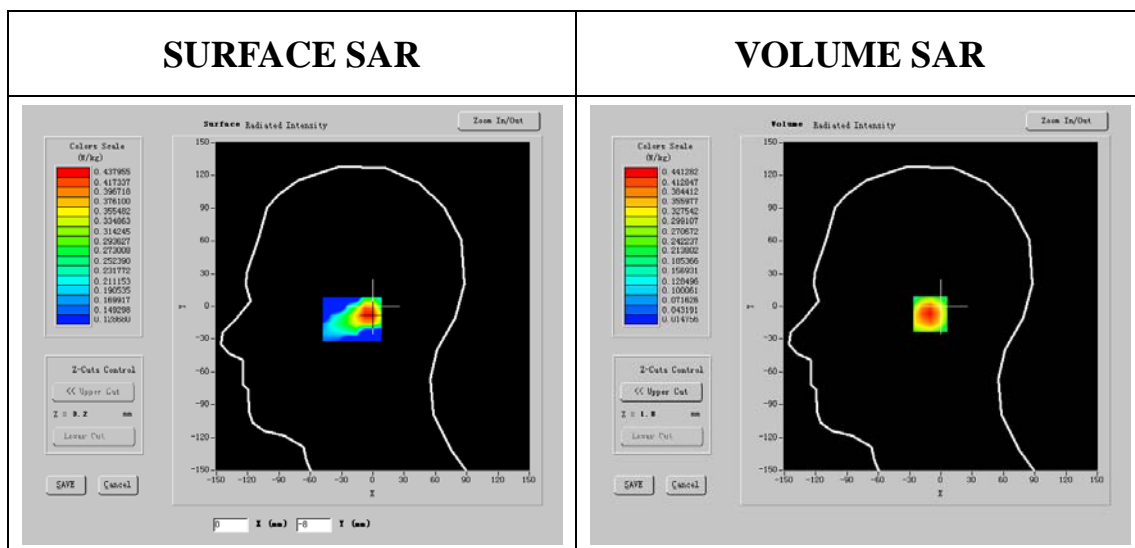




Maximum location: X=-3.00, Y=-7.00

SAR 10g (W/Kg)	0.255047
SAR 1g (W/Kg)	0.416173

Z Axis Scan

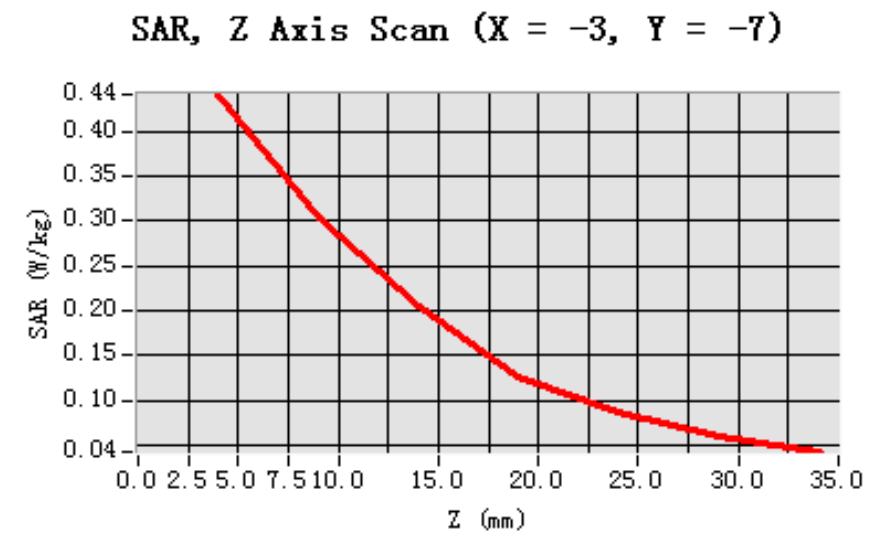

MEASUREMENT 9

Type: Phone measurement (Complete)

Date of measurement: 2/6/2009

Measurement duration: 14 minutes 27 seconds

Mobile Phone IMEI number: --

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptative 2 max
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	High
Signal	TDMA


B. Instrumentations.



PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)
Network Emulator	R&S (CMU200, SN:B23-03291)
Voltmeter	Keithley (2000, SN:1015843)
Synthesizer	Agilent (E8257C, SN:MY43321570)
Amplifier	Mini-Circuits (ZHL-42, SN:110405)
Power Meter	Agilent (E4416A, SN:QB41292714)
Probe	Antennessa (SN:SN 11-09 EP100)
Phantom	Antennessa (SN:SN41_05_SAM29)
Liquid	Antennessa

C. SAR Measurement Results


Frequency (MHz)	1909.599976
Relative permittivity (real part)	40.285999
Relative permittivity (imaginary part)	13.669900
Conductivity (S/m)	1.450225
Variation (%)	0.470000

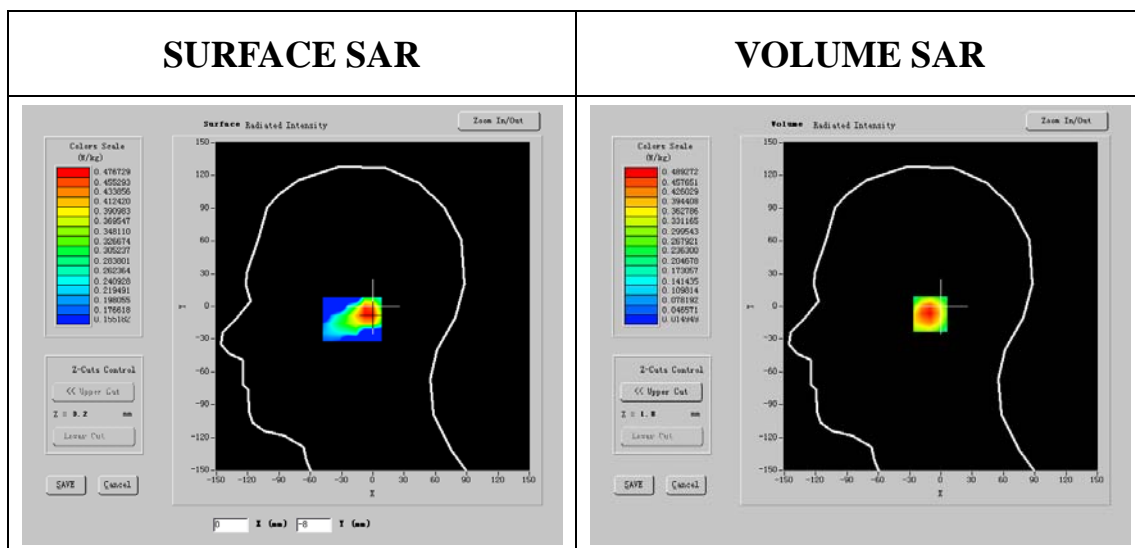

Maximum location: X=-3.00, Y=-7.00

SAR 10g (W/Kg)	0.280929
SAR 1g (W/Kg)	0.465731

Z Axis Scan

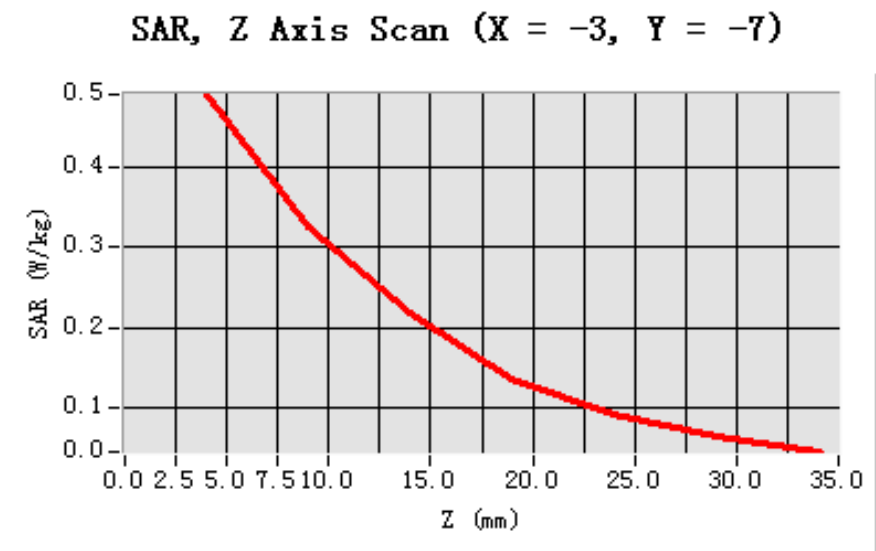

MEASUREMENT 10

Type: Phone measurement (Complete)

Date of measurement: 2/6/2009

Measurement duration: 14 minutes 19 seconds

Mobile Phone IMEI number: --

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptative 2 max
Phantom	Left head
Device Position	Tilt
Band	GSM1900
Channels	Low
Signal	TDMA


B. Instrumentations.



PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)
Network Emulator	R&S (CMU200, SN:B23-03291)
Voltmeter	Keithley (2000, SN:1015843)
Synthesizer	Agilent (E8257C, SN:MY43321570)
Amplifier	Mini-Circuits (ZHL-42, SN:110405)
Power Meter	Agilent (E4416A, SN:QB41292714)
Probe	Antennessa (SN:SN 11-09 EP100)
Phantom	Antennessa (SN:SN41_05_SAM29)
Liquid	Antennessa

C. SAR Measurement Results


Frequency (MHz)	1850.400024
Relative permittivity (real part)	40.313000
Relative permittivity (imaginary part)	13.584900
Conductivity (S/m)	1.396528
Variation (%)	-0.780000

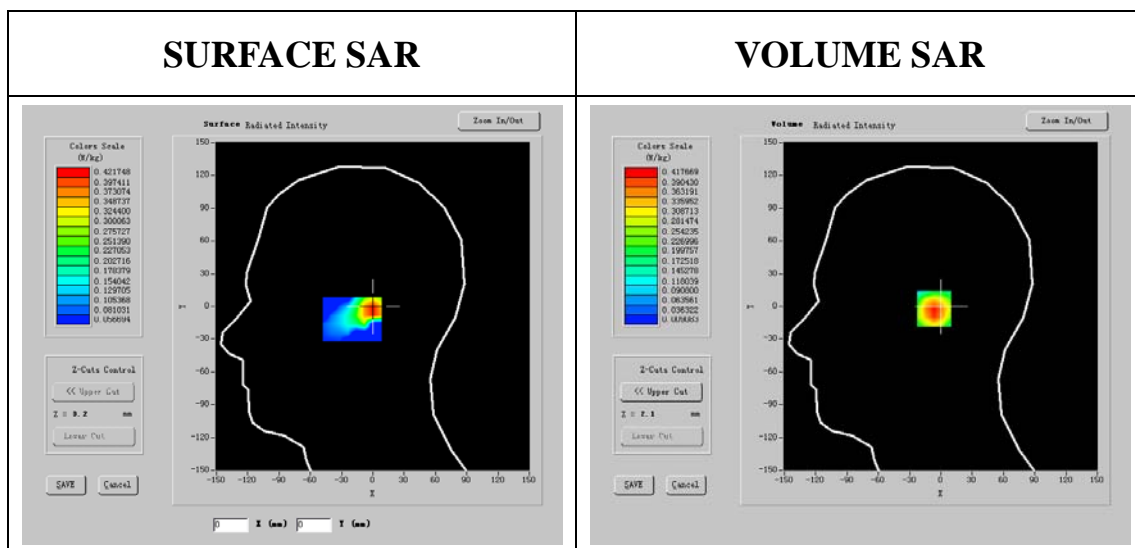

Maximum location: X=0.00, Y=-2.00

SAR 10g (W/Kg)	0.243128
SAR 1g (W/Kg)	0.400859

Z Axis Scan

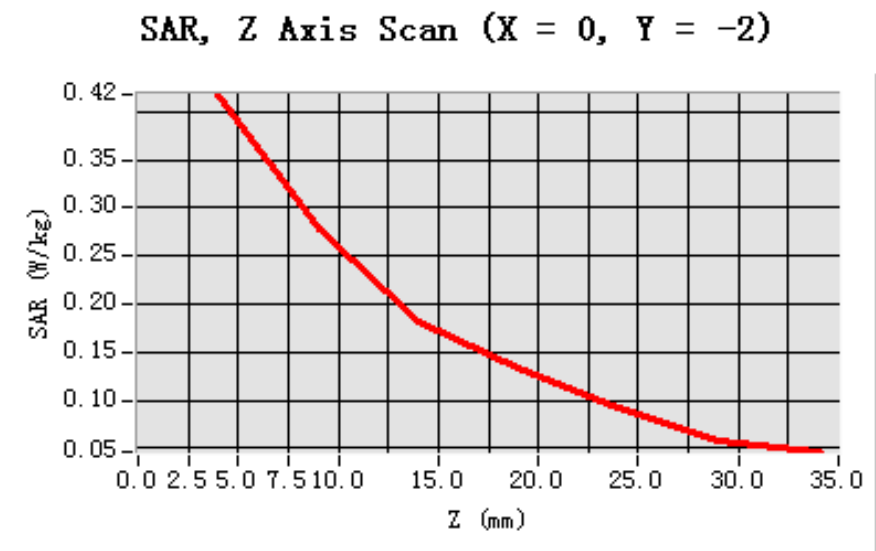

MEASUREMENT 11

Type: Phone measurement (Complete)

Date of measurement: 2/6/2009

Measurement duration: 14 minutes 19 seconds

Mobile Phone IMEI number: --

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptative 2 max
Phantom	Left head
Device Position	Tilt
Band	GSM1900
Channels	Middle
Signal	TDMA


B. Instrumentations.



PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)
Network Emulator	R&S (CMU200, SN:B23-03291)
Voltmeter	Keithley (2000, SN:1015843)
Synthesizer	Agilent (E8257C, SN:MY43321570)
Amplifier	Mini-Circuits (ZHL-42, SN:110405)
Power Meter	Agilent (E4416A, SN:QB41292714)
Probe	Antennessa (SN:SN 11-09 EP100)
Phantom	Antennessa (SN:SN41_05_SAM29)
Liquid	Antennessa

C. SAR Measurement Results


Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.193001
Relative permittivity (imaginary part)	13.813800
Conductivity (S/m)	1.442775
Variation (%)	-1.110000

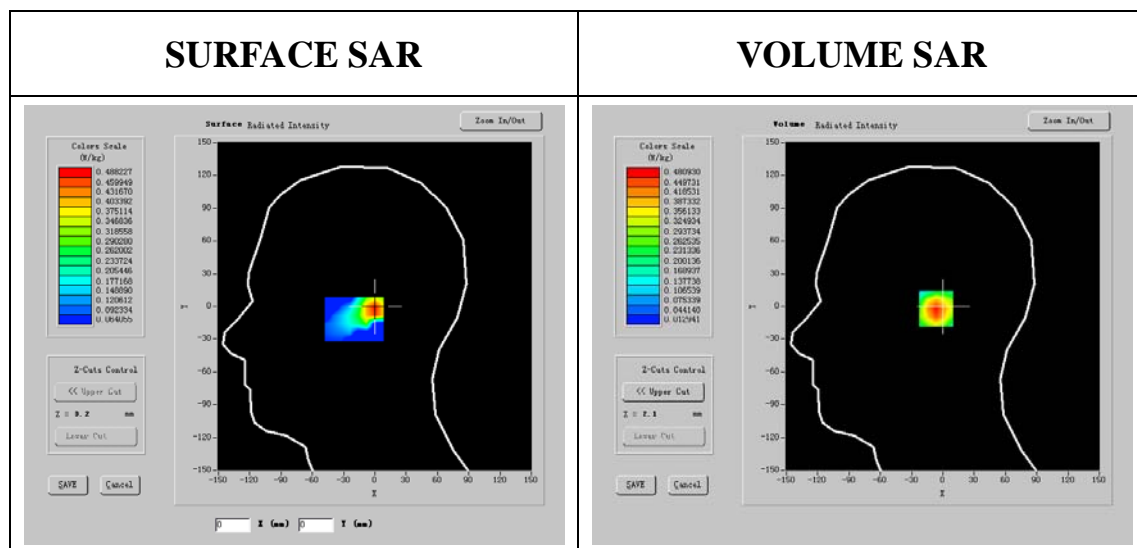

Maximum location: X=0.00, Y=-2.00

SAR 10g (W/Kg)	0.271592
SAR 1g (W/Kg)	0.455985

Z Axis Scan

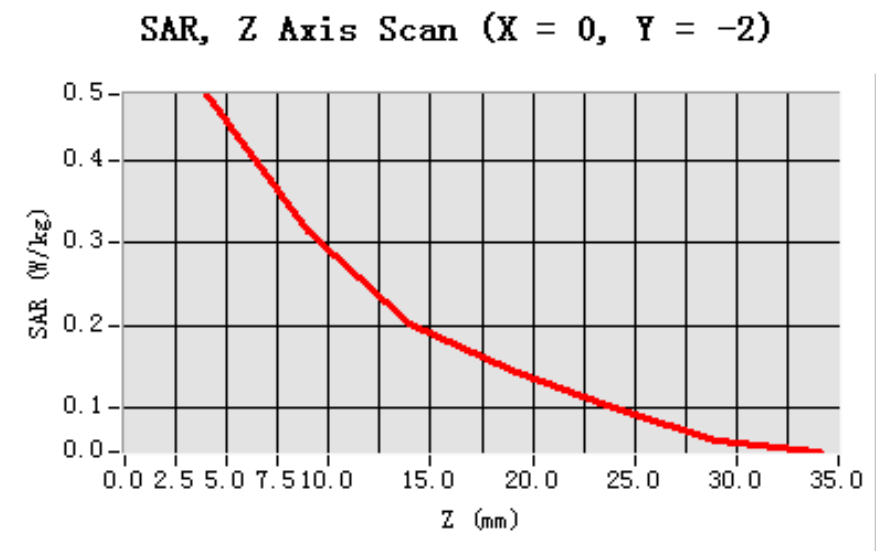

MEASUREMENT 12

Type: Phone measurement (Complete)

Date of measurement: 2/6/2009

Measurement duration: 14 minutes 19 seconds

Mobile Phone IMEI number: --

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptative 2 max
Phantom	Left head
Device Position	Tilt
Band	GSM1900
Channels	High
Signal	TDMA


B. Instrumentations.



PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)
Network Emulator	R&S (CMU200, SN:B23-03291)
Voltmeter	Keithley (2000, SN:1015843)
Synthesizer	Agilent (E8257C, SN:MY43321570)
Amplifier	Mini-Circuits (ZHL-42, SN:110405)
Power Meter	Agilent (E4416A, SN:QB41292714)
Probe	Antennessa (SN:SN 11-09 EP100)
Phantom	Antennessa (SN:SN41_05_SAM29)
Liquid	Antennessa

C. SAR Measurement Results


Frequency (MHz)	1909.599976
Relative permittivity (real part)	40.285999
Relative permittivity (imaginary part)	13.669900
Conductivity (S/m)	1.450225
Variation (%)	-1.130000

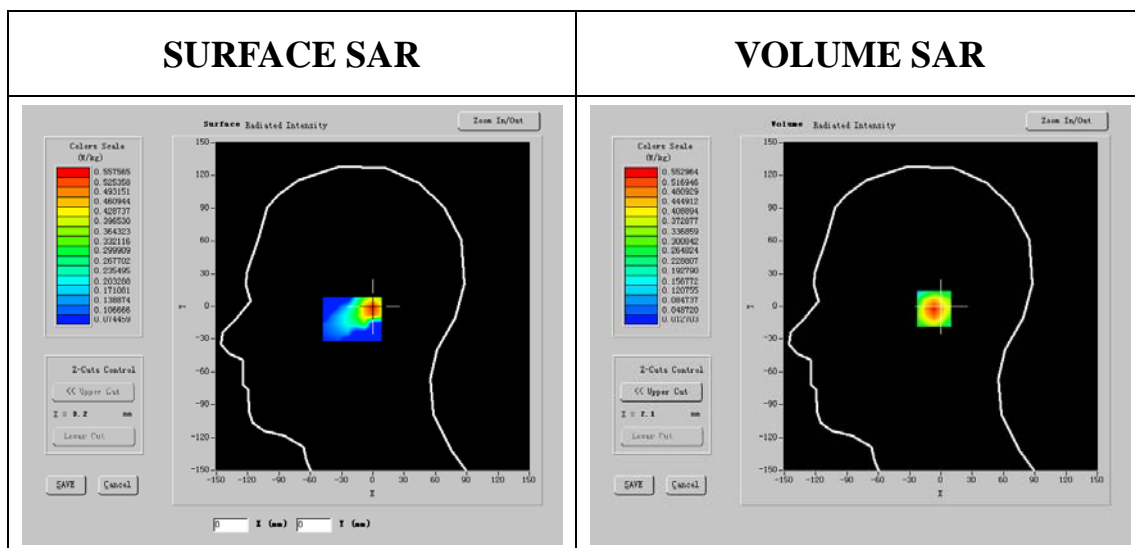

Maximum location: X=0.00, Y=-2.00

SAR 10g (W/Kg)	0.305245
SAR 1g (W/Kg)	0.519639

Z Axis Scan

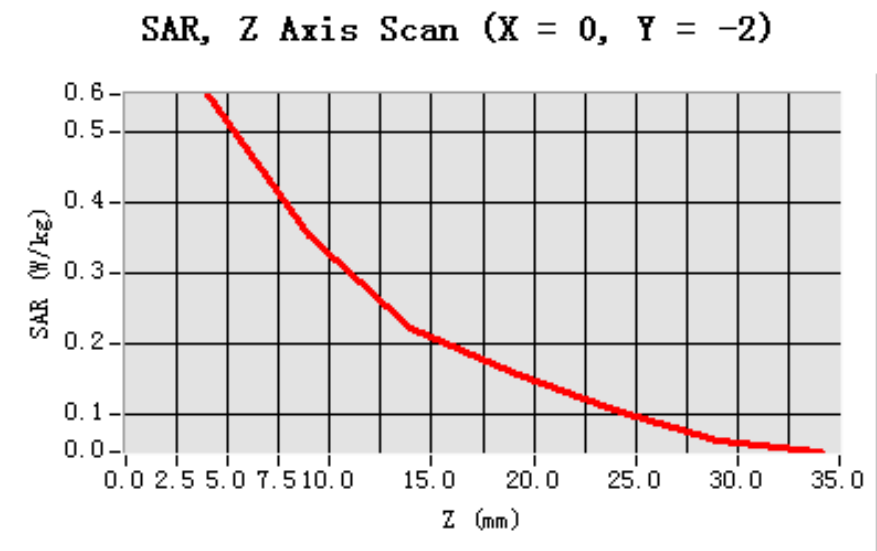

MEASUREMENT 13

Type: Phone measurement (Complete)

Date of measurement: 2/6/2009

Measurement duration: 14 minutes 44 seconds

Mobile Phone IMEI number: --

A. Experimental conditions.

Phantom File	surf_sam_plan.txt, Adaptative 2 max
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Low
Signal	TDMA


B. Instrumentations.



PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)
Network Emulator	R&S (CMU200, SN:B23-03291)
Voltmeter	Keithley (2000, SN:1015843)
Synthesizer	Agilent (E8257C, SN:MY43321570)
Amplifier	Mini-Circuits (ZHL-42, SN:110405)
Power Meter	Agilent (E4416A, SN:QB41292714)
Probe	Antennessa (SN:SN 11-09 EP100)
Phantom	Antennessa (SN:SN41_05_SAM29)
Liquid	Antennessa

C. SAR Measurement Results

Frequency (MHz)	1850.400024
Relative permittivity (real part)	40.313000
Relative permittivity (imaginary part)	13.584900
Conductivity (S/m)	1.396528
Variation (%)	-0.130000

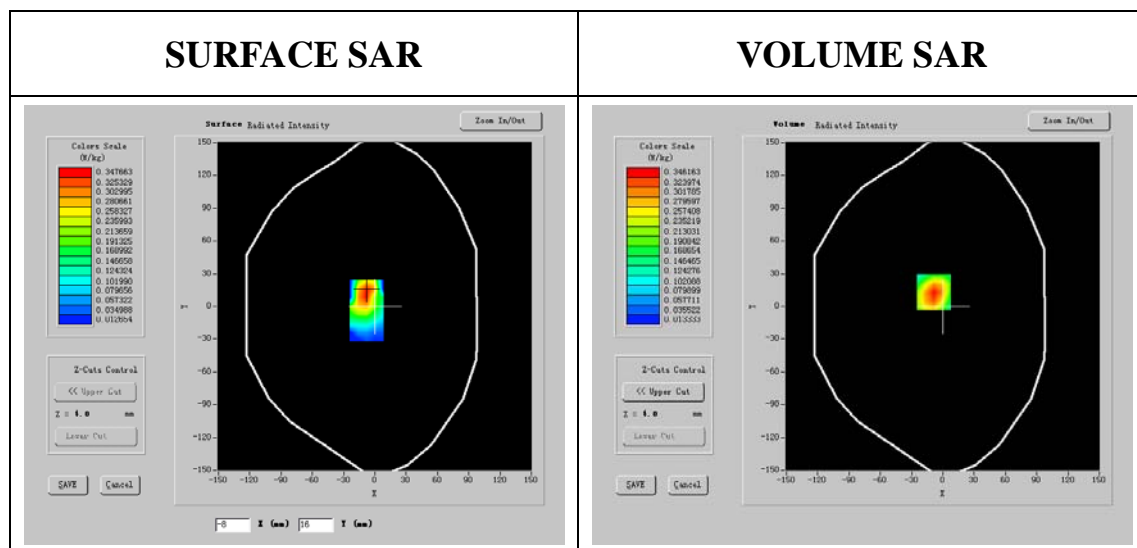




Maximum location: X=-9.00, Y=13.00

SAR 10g (W/Kg)	0.201879
SAR 1g (W/Kg)	0.327518

Z Axis Scan

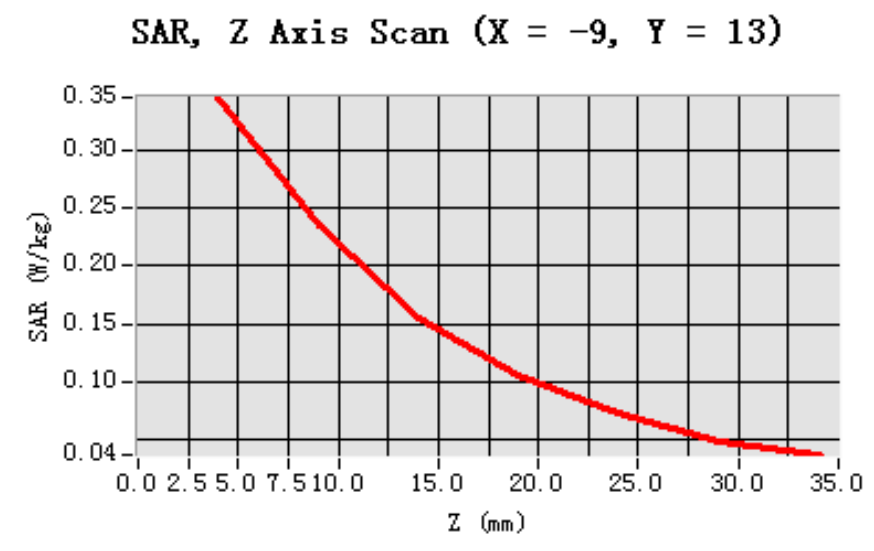

MEASUREMENT 14

Type: Phone measurement (Complete)

Date of measurement: 2/6/2009

Measurement duration: 14 minutes 44 seconds

Mobile Phone IMEI number: --

A. Experimental conditions.

Phantom File	surf_sam_plan.txt, Adaptative 2 max
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	TDMA


B. Instrumentations.



PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)
Network Emulator	R&S (CMU200, SN:B23-03291)
Voltmeter	Keithley (2000, SN:1015843)
Synthesizer	Agilent (E8257C, SN:MY43321570)
Amplifier	Mini-Circuits (ZHL-42, SN:110405)
Power Meter	Agilent (E4416A, SN:QB41292714)
Probe	Antennessa (SN:SN 11-09 EP100)
Phantom	Antennessa (SN:SN41_05_SAM29)
Liquid	Antennessa

C. SAR Measurement Results


Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.193001
Relative permittivity (imaginary part)	13.813800
Conductivity (S/m)	1.442775
Variation (%)	-0.780000

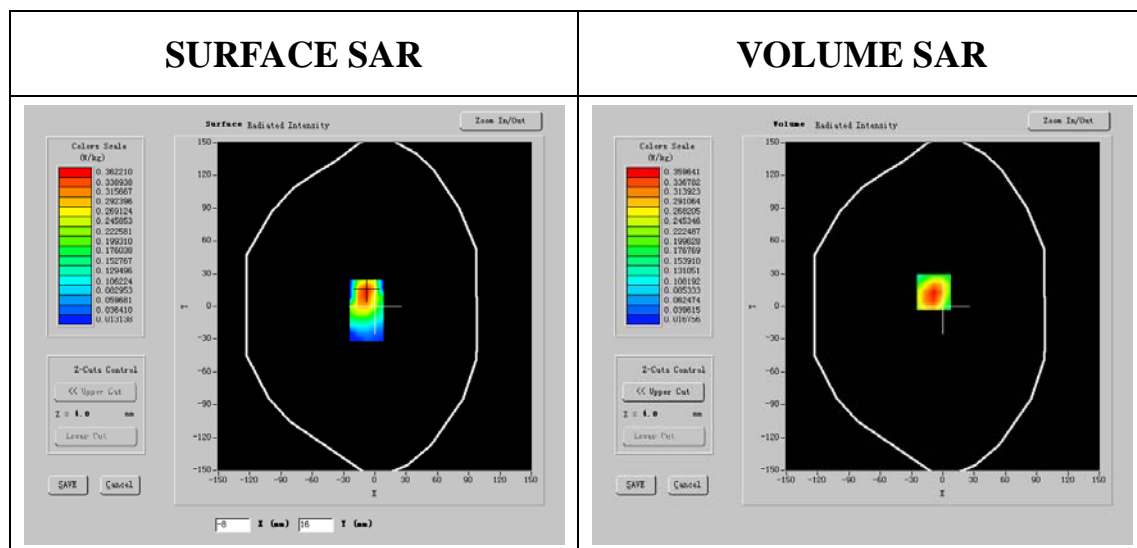

Maximum location: X=-9.00, Y=13.00

SAR 10g (W/Kg)	0.211131
SAR 1g (W/Kg)	0.339803

Z Axis Scan

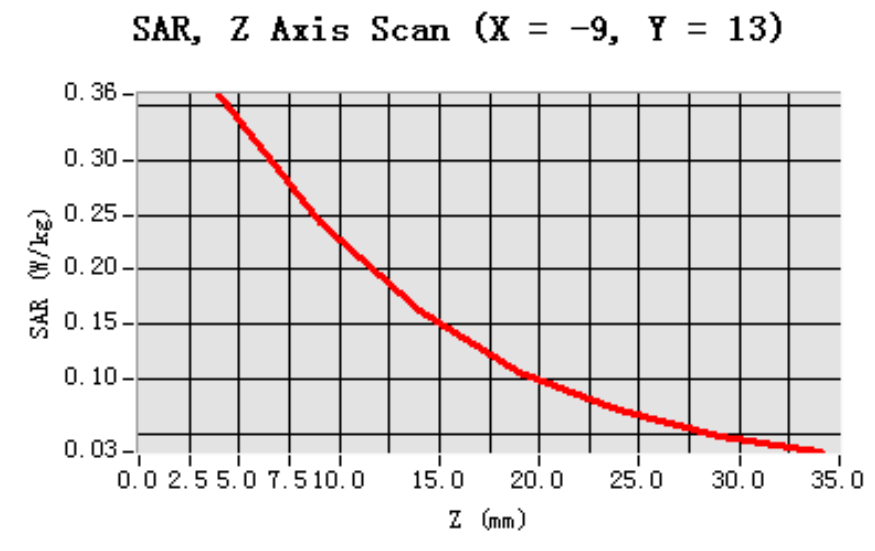

MEASUREMENT 15

Type: Phone measurement (Complete)

Date of measurement: 2/6/2009

Measurement duration: 14 minutes 44 seconds

Mobile Phone IMEI number: --

A. Experimental conditions.

Phantom File	surf_sam_plan.txt, Adaptative 2 max
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	High
Signal	TDMA


B. Instrumentations.



PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)
Network Emulator	R&S (CMU200, SN:B23-03291)
Voltmeter	Keithley (2000, SN:1015843)
Synthesizer	Agilent (E8257C, SN:MY43321570)
Amplifier	Mini-Circuits (ZHL-42, SN:110405)
Power Meter	Agilent (E4416A, SN:QB41292714)
Probe	Antennessa (SN:SN 11-09 EP100)
Phantom	Antennessa (SN:SN41_05_SAM29)
Liquid	Antennessa

C. SAR Measurement Results

Frequency (MHz)	1909.599976
Relative permittivity (real part)	40.285999
Relative permittivity (imaginary part)	13.669900
Conductivity (S/m)	1.450225
Variation (%)	-0.690000

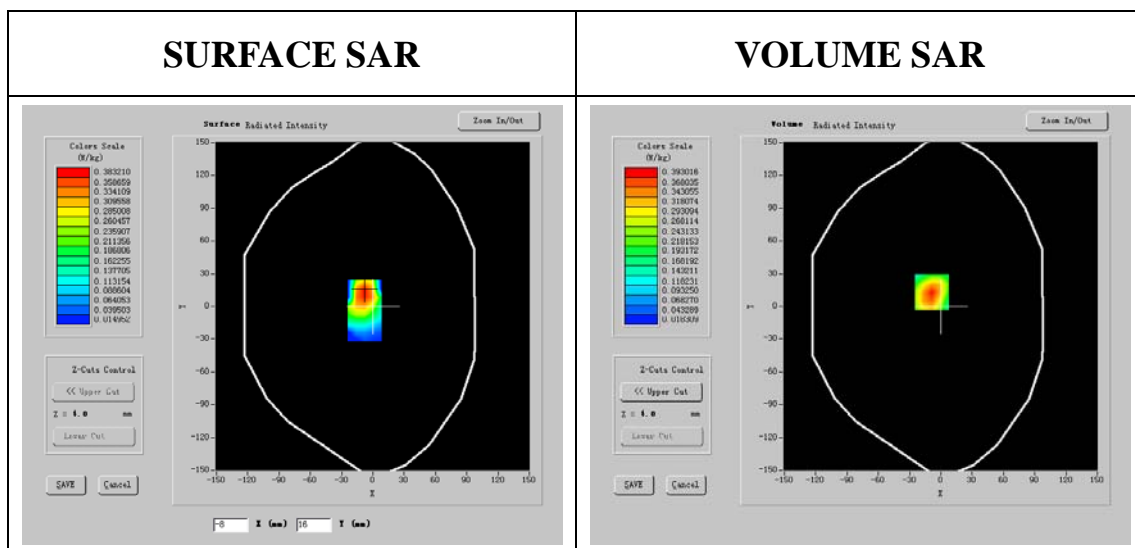

Maximum location: X=-9.00, Y=13.00

SAR 10g (W/Kg)	0.225323
SAR 1g (W/Kg)	0.367521

Z Axis Scan

SAR, Z Axis Scan (X = -9, Y = 13)

