

## Test Report

Report Number: 3183595MPK-001A

Project Number: 3183595

February 25, 2010

Testing performed on the  
Quantum 1000 Base Station  
Model Number: QUANTUM 1000  
FCC ID: XN3-QUANTUM1000

to

FCC Part 90 Subpart Z

for

PUREWAVE NETWORKS

**Test Performed by:**

Intertek Testing Services NA, Inc  
1365 Adams Court  
Menlo Park, CA 94025

**Test Authorized by:**

PUREWAVE NETWORKS  
2660-C Marine Way  
Mountain View, CA 94043 USA

Prepared by:

  
Krishna Vemuri, Senior EMC Engineer

Date: February 25, 2010

Reviewed by:

  
Ollie Moyrong, Engineering Manager


Date: February 25, 2010


*This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.*

## Report No. 3183595MPK-001A

<b>Equipment Under Test:</b>	Quantum 1000 Base Station
<b>Trade Name:</b>	PUREWAVE NETWORKS
<b>Model No.:</b>	QUANTUM 1000
<b>Serial No.:</b>	EMCProto1
<b>FCC ID:</b>	XN3-QUANTUM1000
<b>Applicant:</b>	PUREWAVE NETWORKS
<b>Contact:</b>	Mr. Jas Dhaliwal
<b>Address:</b>	2660-C Marine Way Mountain View, CA 94043
<b>Country</b>	USA
<b>Tel. number:</b>	650-528-5200
<b>Fax number:</b>	650-528-5222
<b>Applicable Regulation:</b>	FCC Part 90 Subpart Z
<b>Test Site Location:</b>	1365 Adams Court Menlo Park, CA 94025
<b>Date of Test:</b>	February 22 – 24, 2010

*We attest to the accuracy of this report:*

  
\_\_\_\_\_  
Krishna Vemuri  
Senior EMC Engineer

  
\_\_\_\_\_  
Ollie Moyrong  
Engineering Manager

## TABLE OF CONTENTS

<b>1.0</b>	<b>Introduction .....</b>	<b>5</b>
1.1	Product Description.....	5
1.2	Summary of Test Results .....	7
1.3	Test Configuration .....	8
1.3.1	Support Equipment .....	8
1.3.2	Block diagram of Test Setup.....	8
1.4	Antenna Specifications.....	9
<b>2.0</b>	<b>RF Power Output and Antenna Limits.....</b>	<b>10</b>
2.1	Test Procedure.....	10
2.2	Test Equipment .....	10
2.3	Test Results .....	11
<b>3.0</b>	<b>Occupied Bandwidth .....</b>	<b>49</b>
3.1	Test Procedure.....	49
3.2	Test Equipment .....	49
3.3	Test Results .....	49
<b>4.0</b>	<b>Spurious Emissions at Antenna Terminals .....</b>	<b>68</b>
4.1	Requirement.....	68
4.3	Test Equipment .....	68
4.4	Test Results .....	68
<b>5.0</b>	<b>Spurious Radiation .....</b>	<b>91</b>
5.1	Requirement.....	91
5.2	Test Procedure.....	91
5.3	Test Equipment .....	91
5.4	Test Results .....	92
<b>6.0</b>	<b>Frequency Stability vs Temperature and Voltage .....</b>	<b>98</b>
6.1	Requirement.....	98
6.2	Test Procedure.....	98
6.3	Test Equipment .....	98
6.4	Test Results .....	99
<b>7.0</b>	<b>RF Exposure evaluation .....</b>	<b>100</b>
<b>8.0</b>	<b>Emissions from Digital Parts, Receiver and Transmitter spurious from 30 MHz - 1GHz .....</b>	<b>101</b>
8.1	Radiated emissions.....	101
8.1.1	Test Limit.....	101
8.1.2	Test Procedure .....	101
8.1.3	Test Results.....	103



<b>9.0</b>	<b>List of Test Equipment .....</b>	<b>107</b>
<b>10.0</b>	<b>Document History .....</b>	<b>108</b>

## 1.0 Introduction

### 1.1 Product Description

The Quantum 1000 employs an extremely flexible and versatile hardware architecture. The heart of the base station is a sophisticated and highly integrated ASIC that combines 6 DSP and general purpose processor cores along with specialized DSP hardware. A Linux based subsystem supports applications, SNMP and other management functions. Finally, the Quantum 1000 includes 2 RF transmitters and associated PAs, and 4 RF receivers.

Important characteristics of the Quantum 1000 Base Station Sector are:

- Board-to-board communications for scaling up to 6 antennas.
- 10 MHz profile
- WiMAX OFDMA compliance
- All layers implemented in software.
- 2.3 – 2.7 GHz and 3.3 – 3.8 GHz operations.

PureWave has implemented a scalable architecture that lets service providers upgrade their Base Stations by:

- Adding more Base Station Sector to a location
- Adding antennas (and corresponding RF module sets) within a sector
- Adding processing capability in order to process traffic within additional spectrum
- Upgrading software to allow for changes in features and standards.

Specification of the EUT	
Maximum Measured RF Output Power	25.7 dBm for 5 MHz, (0.37 W) 25.3 dBm for 10 MHz, 0.34W)
Frequency Ranges, MHz	3652.5 – 3672.5 for 5 MHz 3655 – 3670 for 10 MHz
Type of Modulation	QPSK, 16QAM, 64QAM
Channel Bandwidth	5 MHz, 10 MHz
Antenna Gain	Varies <sup>1,2</sup> , refer to Report Section 1.4 for antenna details
Emission Designator	4M63W7D for 5 MHz 9M26W7D for 10 MHz
Operating Temperature	From –30 <sup>0</sup> C to +50 <sup>0</sup> C

<sup>1</sup> Peak EIRP Power allowed is 10W/10MHz for 10 MHz Channel Spacing. The RF Output Power will be varied depending on the antenna system assembly gain employed to ensure the total Peak EIRP is less than 40.0 dBm.

<sup>2</sup> Peak EIRP Power allowed is 5W/5MHz for 5 MHz Channel Spacing. The RF Output Power will be varied depending on the antenna system assembly gain employed to ensure the total Peak EIRP is less than 37.0 dBm.

**EUT receive date:** February 22, 2010

**EUT receive condition:** The prototype version of the EUT was received in good condition with no apparent damage. As declared by the Applicant it is identical to the production units.

**Test start date:** February 22, 2010

**Test completion date:** February 24, 2010

## 1.2 Summary of Test Results


FCC Rule	Description of Test	Result
2.1046, 90.1321	RF Power Output and Antenna Limits	Complies
2.1049	Occupied Bandwidth	Complies
2.1051, 90.1323	Out of Band Emissions at Antenna Terminals	Complies
2.1053, 90.1323	Spurious Radiation	Complies
2.1055	Frequency Stability vs. Temperature and Voltage	Complies
15.109, 15.111	Emissions from Digital Parts, Receiver and Transmitter Spurious from 30 MHz to 1 GHz	Complies

## 1.3 Test Configuration

### 1.3.1 Support Equipment

Item #	Description	Model No.	S/N
1	Dell Personal Computer	Optiplex 320	9B32KC1
2	Agilent DC Power Supply	6644A	MY40001367
3	Dell Personal Computer	Optiplex 320	3RND5J1
4	Phihong DC Power Supply	PSUI6U-480	P72809868A1
5	Gemtek CPE	WIXS-177	002682124972

### 1.3.2 Block diagram of Test Setup

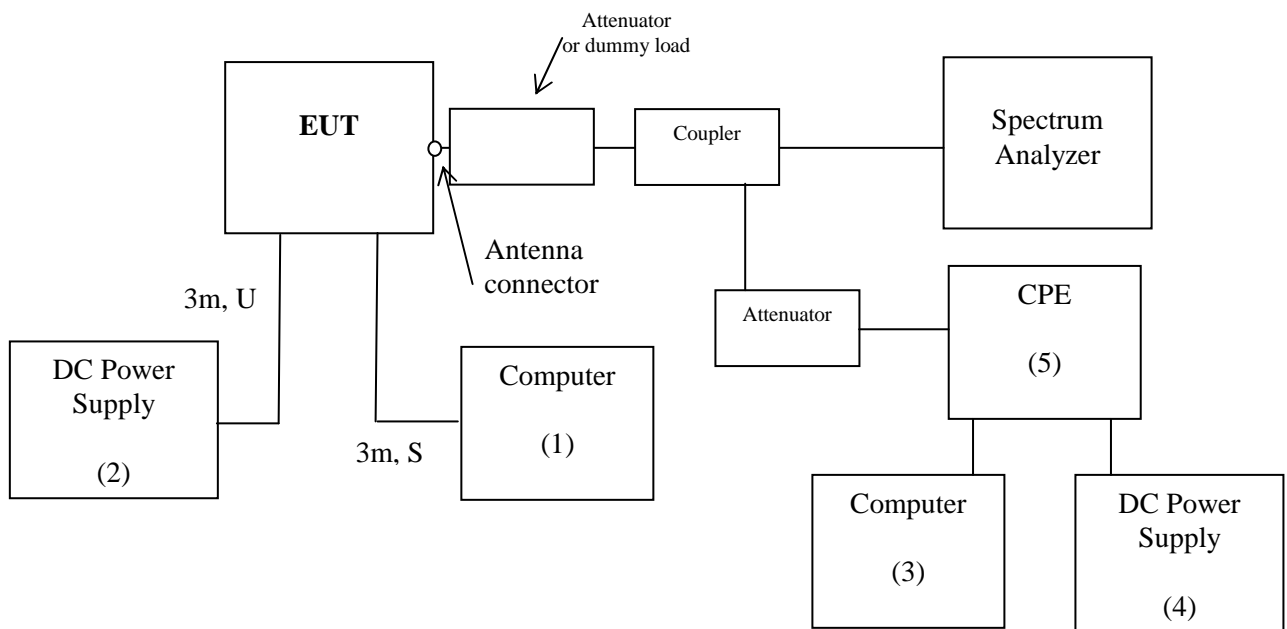

**S** = Shielded  
**U** = Unshielded

**F** = With Ferrite  
**m** = Length in Meters



#### 1.4 Antenna Specifications

The Quantum 1000 3.65 GHz product line can be used with antennas supplied by PureWave Networks or any commercially available antenna. The table below lists antenna products that provide a representative sample of the range of antennas that may be used.

<b>Description</b>	<b>Gain dBi</b>	<b>Az BW degrees</b>	<b>Manufacturer</b>	<b>Manufacturer P/N</b>
4 element, vertical linear polarized array	14.5	120	Mars Antenna	MA-WE36-15PW4
4 element, vertical linear polarized array	15.5	90	Mars Antenna	MA-WD36-16PW4
2 element, dual polarized, +/- 45 degree slant	15	90	Mars Antenna	MA-WD35-DS15
2 element, dual polarized, +/- 45 degree slant	16.5	65	Mars Antenna	MA-WC35-DS17
Omni, vertical polarized	11	360	L-com	HG3511U-PRO
Omni, vertical polarized	8	360	Air802 LLC	ANOM3508
Omni, vertical polarized	12	360	Air802 LLC	ANOM3512

## **2.0 RF Power Output and Antenna Limits**

FCC 2.1046, 90.1321

Base and fixed stations are limited to 25 watts/25 MHz equivalent isotropically radiated power (EIRP). In any event, the peak EIRP power density shall not exceed 1 Watt in any one-megahertz slice of spectrum.

Power Limit for 5 MHz Channel Spacing = 37 dBm

Power Limit for 10 MHz Channel Spacing = 40 dBm

### **2.1 Test Procedure**

The EUT RF output was connected as shown on the diagram in report section 1.3.2. The EUT was setup to transmit continuously the maximum power.

The spectrum analyzer was setup to measure a peak power using the Channel Power Function. The attenuation and cable loss were added to the spectrum analyzer reading by using OFFSET function.

The EUT was set to transmit at maximum power. Measurements were performed at three frequencies (low, middle, and high channels).

### **2.2 Test Equipment**

Rohde & Schwarz FSP40 Spectrum Analyzer

## 2.3 Test Results

### Peak EIRP Power

Frequency (GHz)	Channel Spacing (MHz)	Measured Power (dBm)	Antenna Gain (dBi)	Calculated Max EIRP (dBm)	EIRP Limit (dBm)	Graph
Modulation: QPSK						
3.6525	5	25.16	*	37	37	2.1
3.6625	5	25.46	*	37	37	2.2
3.6725	5	25.27	*	37	37	2.3
Modulation: 16 QAM						
3.6525	5	25.27	*	37	37	2.4
3.6625	5	25.16	*	37	37	2.5
3.6725	5	25.7	*	37	37	2.6
Modulation: 64 QAM						
3.6525	5	25.09	*	37	37	2.7
3.6625	5	25.67	*	37	37	2.8
3.6725	5	25.74	*	37	37	2.9

Notes: Peak EIRP Power allowed is 5W/5MHz for 5 MHz Channel Spacing.

\*The RF Output Power will be varied depending on the antenna system assembly gain employed to ensure the total Peak EIRP is less than 37.0 dBm

### Peak EIRP Power

Frequency (GHz)	Channel Spacing (MHz)	Measured Power (dBm)	Antenna Gain (dBi)	Calculated Max EIRP (dBm)	EIRP Limit (dBm)	Graph
Modulation: QPSK						
3.655	10	25.04	*	40	40	2.10
3.6625	10	24.93	*	40	40	2.11
3.67	10	25.09	*	40	40	2.12
Modulation: 16 QAM						
3.655	10	24.93	*	40	40	2.13
3.6625	10	25.3	*	40	40	2.14
3.67	10	25.27	*	40	40	2.15
Modulation: 64 QAM						
3.655	10	24.96	*	40	40	2.16
3.6625	10	25.01	*	40	40	2.17
3.67	10	25.04	*	40	40	2.18

Notes: Peak EIRP Power allowed is 10W/10MHz for 10 MHz Channel Spacing.

\*The RF Output Power will be varied depending on the antenna system assembly gain employed to ensure the total Peak EIRP is less than 40.0 dBm

#### EIRP Power Density

Frequency (MHz)	Channel Spacing (MHz)	Measured Power (dBm)	Antenna Gain (dBi)	Calculated Max EIRP (dBm)	EIRP Limit (dBm/MHz)	Graph
Modulation: QPSK						
3.6525	5	21.68	*	30	30	2.19
3.6625	5	22.01	*	30	30	2.20
3.6725	5	22.46	*	30	30	2.21
Modulation: 16 QAM						
3.6525	5	21.99	*	30	30	2.22
3.6625	5	22.09	*	30	30	2.23
3.6725	5	22.53	*	30	30	2.24
Modulation: 64 QAM						
3.6525	5	22.04	*	30	30	2.25
3.6625	5	22.59	*	30	30	2.26
3.6725	5	22.88	*	30	30	2.27

Notes: \*The RF Output Power will be varied depending on the antenna system assembly gain employed to ensure the total EIRP Power Density is less than 30.0 dBm


#### EIRP Power Density

Frequency (MHz)	Channel Spacing (MHz)	Measured Power (dBm)	Antenna Gain (dBi)	Calculated Max EIRP (dBm)	EIRP Limit (dBm/MHz)	Graph
Modulation: QPSK						
3.655	10	18.65	*	30	30	2.28
3.6625	10	19.06	*	30	30	2.29
3.67	10	18.51	*	30	30	2.30
Modulation: 16 QAM						
3.655	10	18.8	*	30	30	2.31
3.6625	10	18.72	*	30	30	2.32
3.67	10	19.12	*	30	30	2.33
Modulation: 64 QAM						
3.655	10	18.59	*	30	30	2.34
3.6625	10	19.11	*	30	30	2.35
3.67	10	18.68	*	30	30	2.36

Notes: \*The RF Output Power will be varied depending on the antenna system assembly gain employed to ensure the total EIRP Power Density is less than 30.0 dBm


For more details refer to the attached Graphs.

Output Power  
Graph 2.1

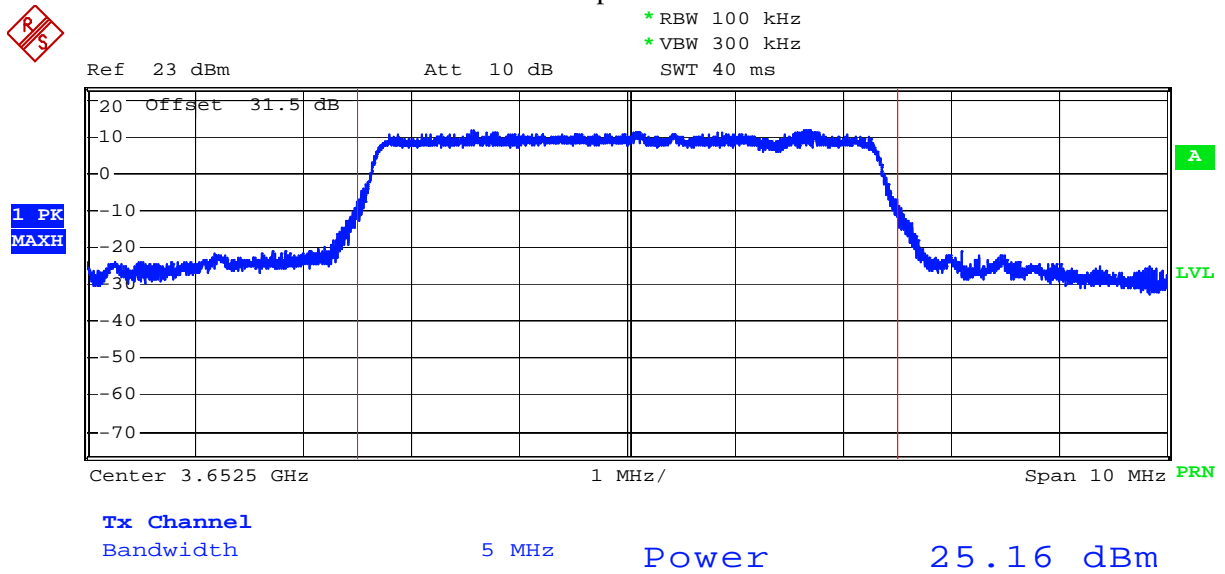


Comment: QPSK, LOW CHANNEL  
Date: 23.FEB.2010 11:23:49

## Output Power Graph 2.2

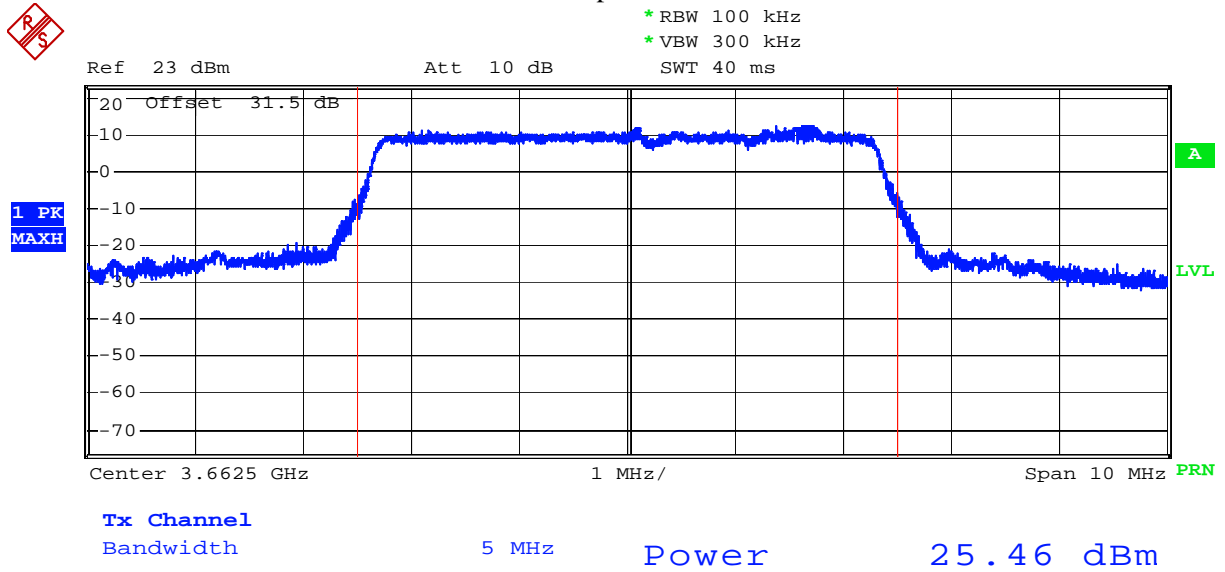


Comment: QPSK, MID CHANNEL  
 Date: 23.FEB.2010 11:26:23

Output Power  
Graph 2.3

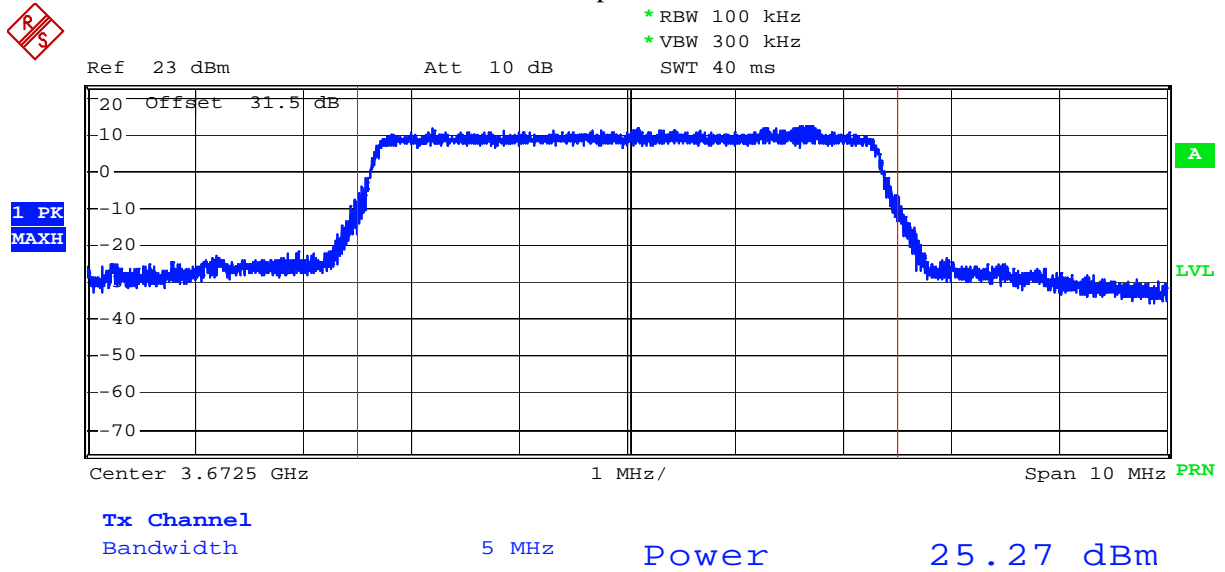

Comment: QPSK, HIGH CHANNEL  
Date: 23.FEB.2010 11:27:47


Output Power  
Graph 2.4

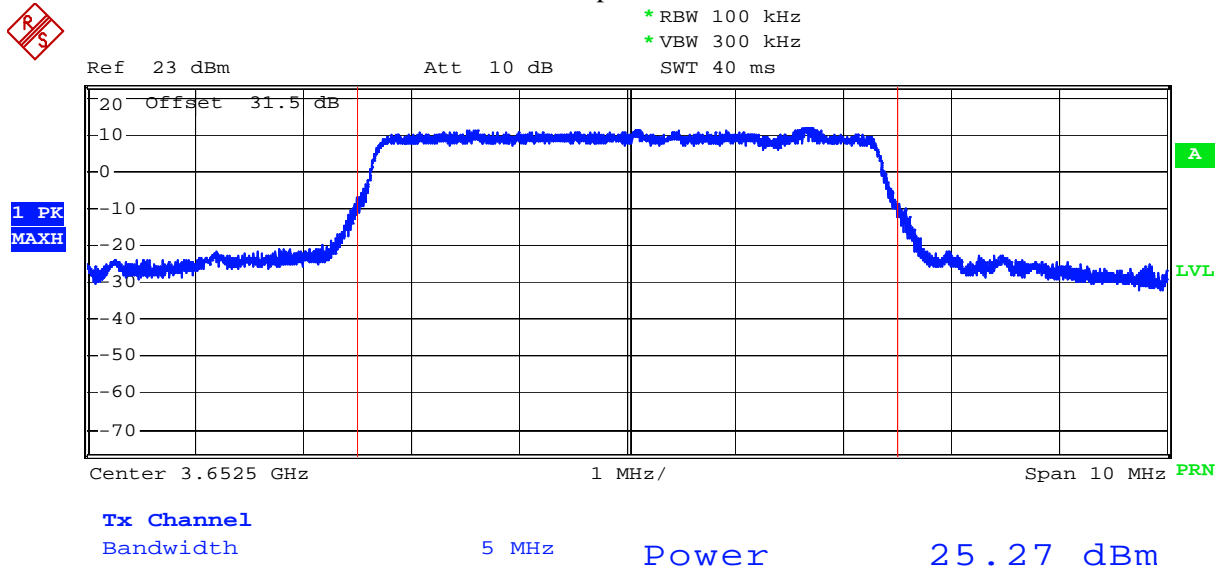

Comment: 16QAM, LOW CHANNEL  
Date: 23.FEB.2010 11:21:46




## Output Power Graph 2.5

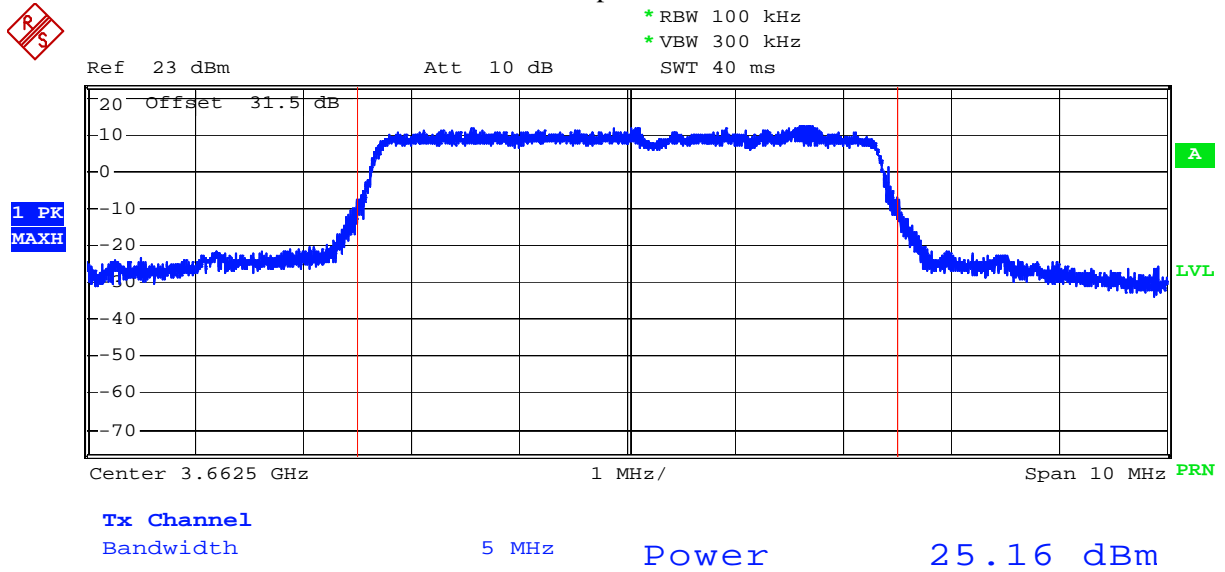


Comment: 16QAM, MID CHANNEL  
Date: 23.FEB.2010 11:18:37

Output Power  
Graph 2.6

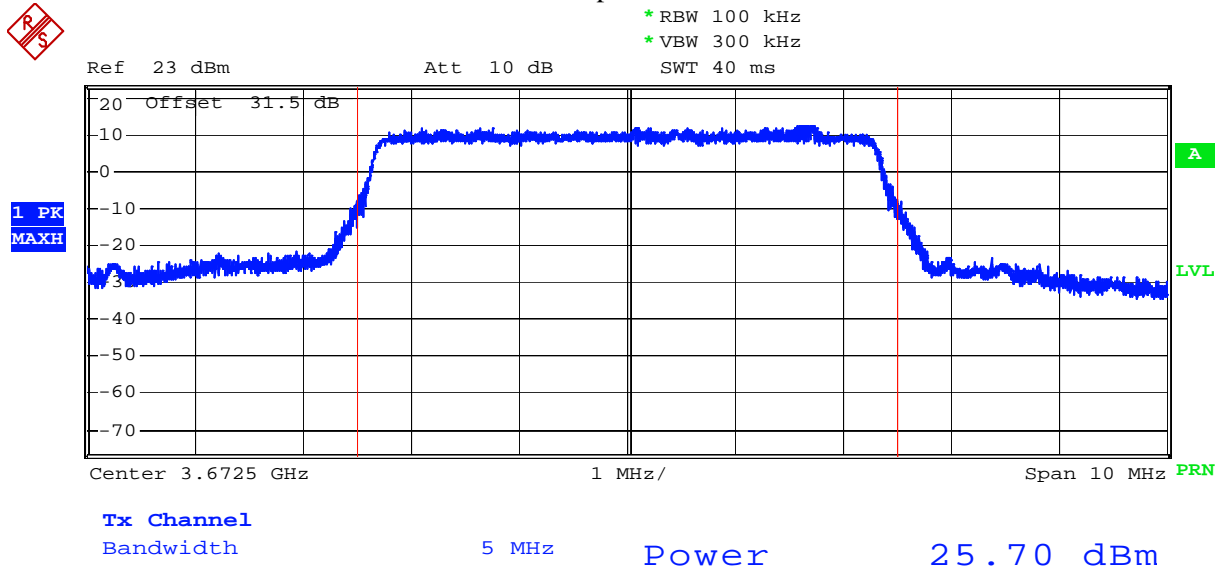


Comment: 16QAM, HIGH CHANNEL  
Date: 23.FEB.2010 11:16:31

## Output Power Graph 2.7

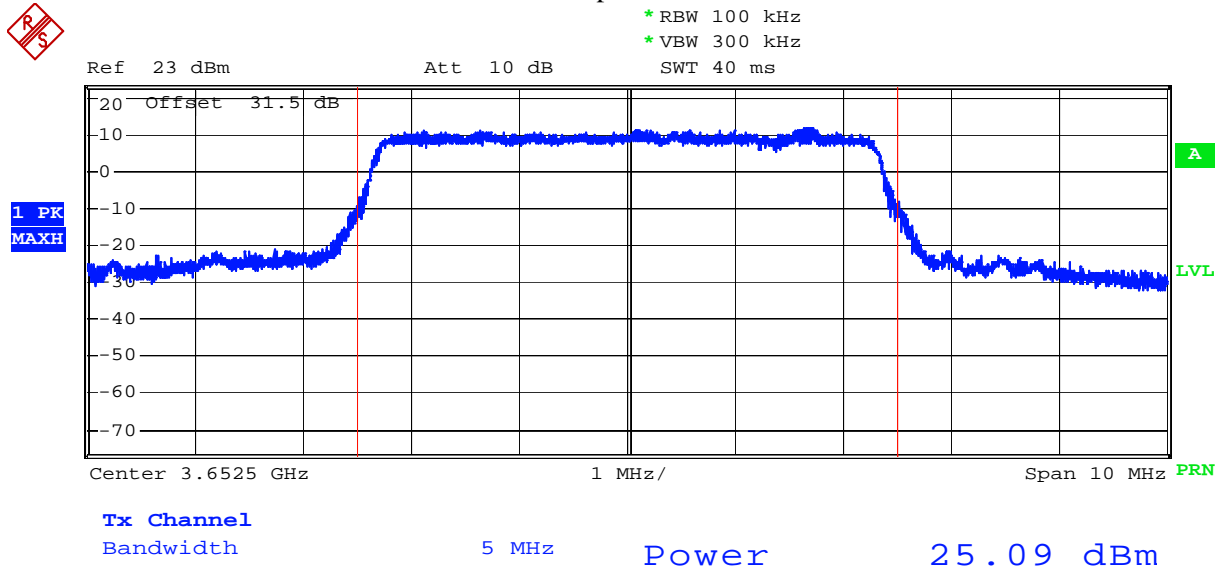


Comment: 64QAM, LOW CHANNEL  
Date: 23.FEB.2010 11:09:28

## Output Power Graph 2.8

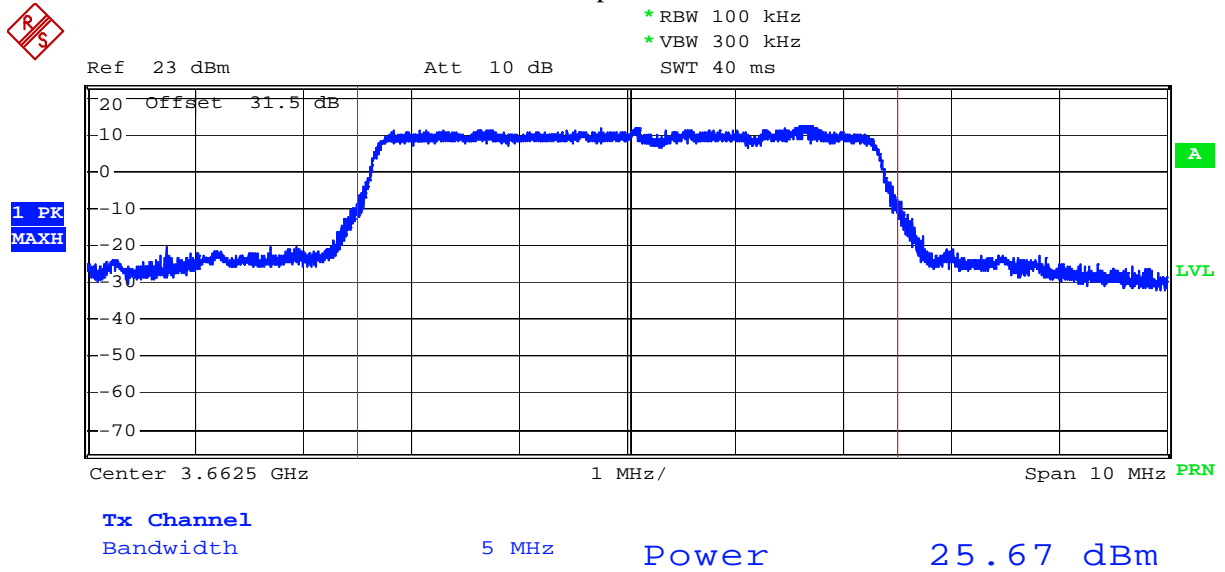


Comment: 64QAM, MID CHANNEL  
Date: 23.FEB.2010 11:12:18

## Output Power Graph 2.9

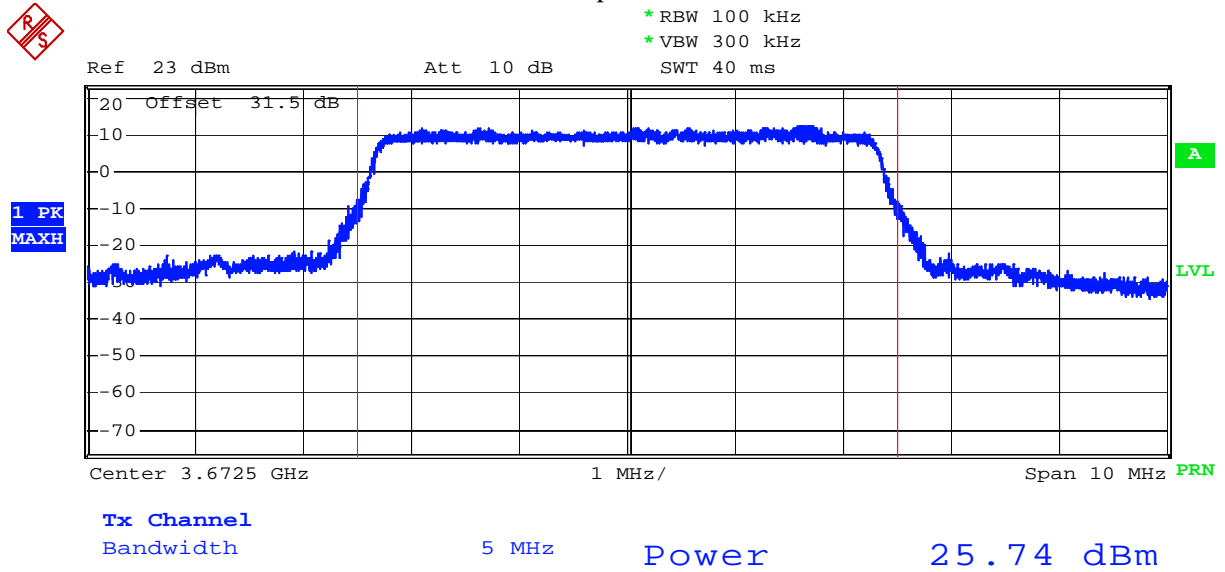


Comment: 64QAM, HIGH CHANNEL  
 Date: 23.FEB.2010 11:14:12

## Output Power Graph 2.10

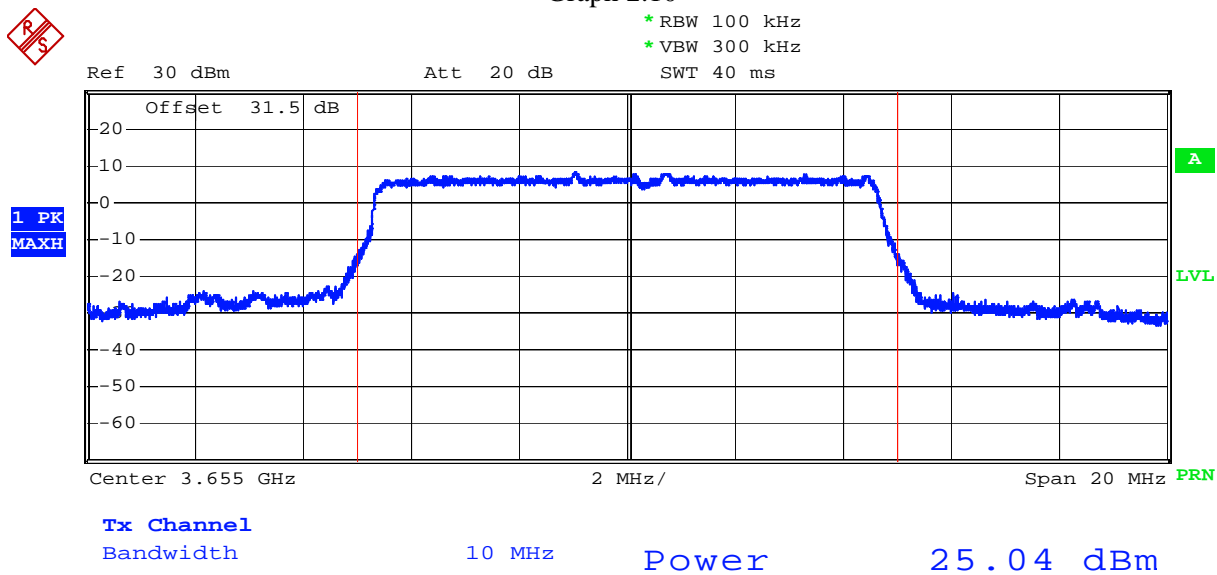


Comment: QPSK, LOW CHANNEL  
Date: 24.FEB.2010 10:08:24

## Output Power Graph 2.11

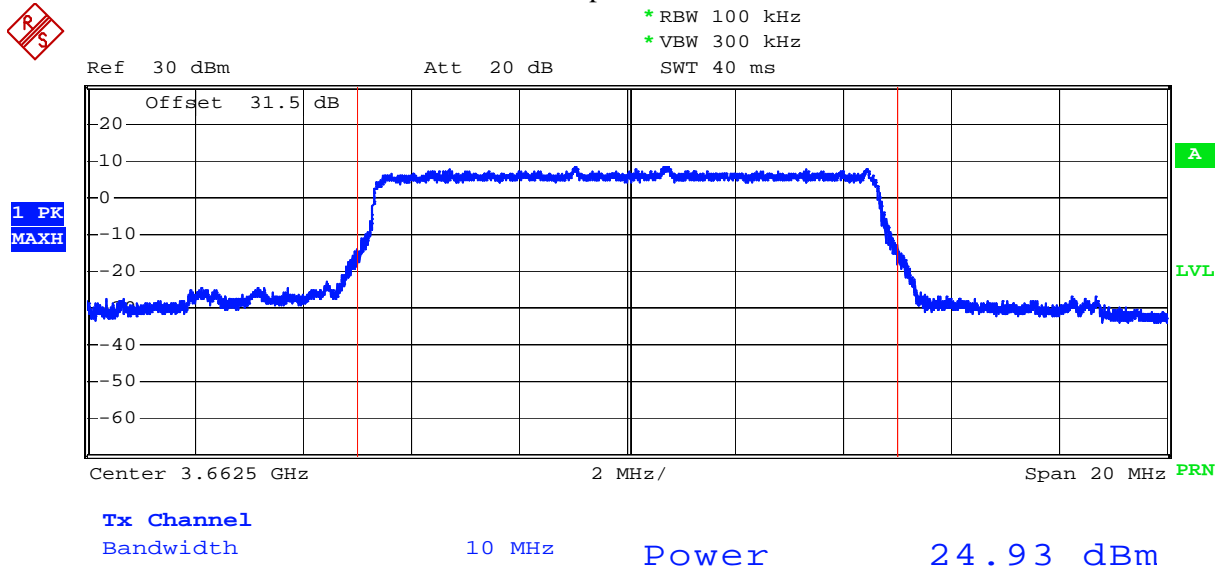

Comment: QPSK, MID CHANNEL  
Date: 24.FEB.2010 09:59:05


## Output Power Graph 2.12

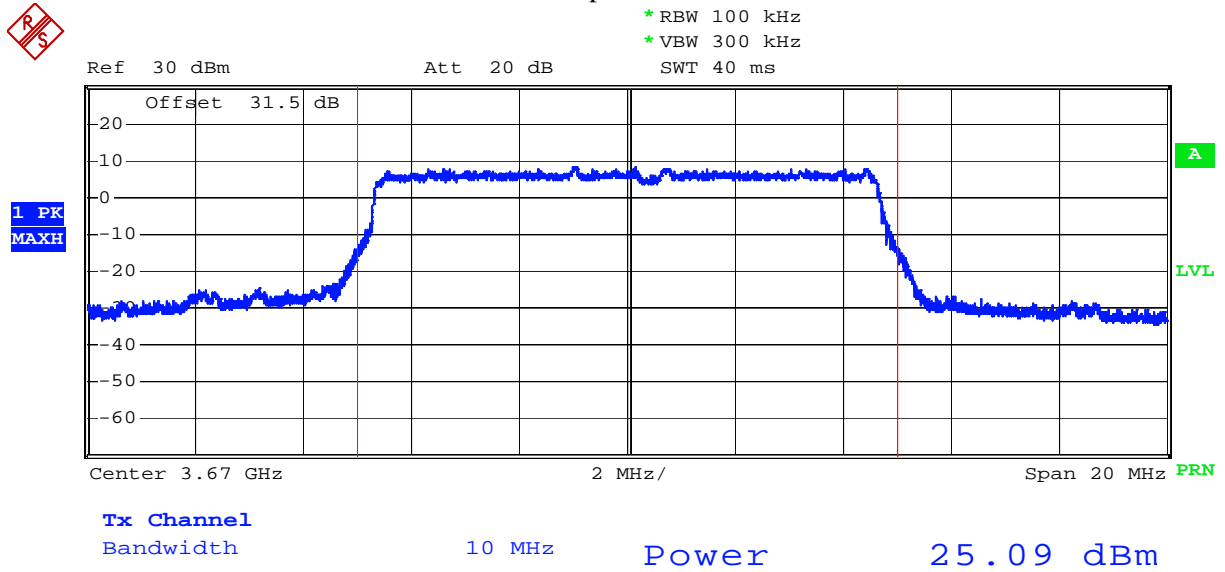

Comment: QPSK, HIGH CHANNEL  
Date: 24.FEB.2010 09:54:28




## Output Power Graph 2.13

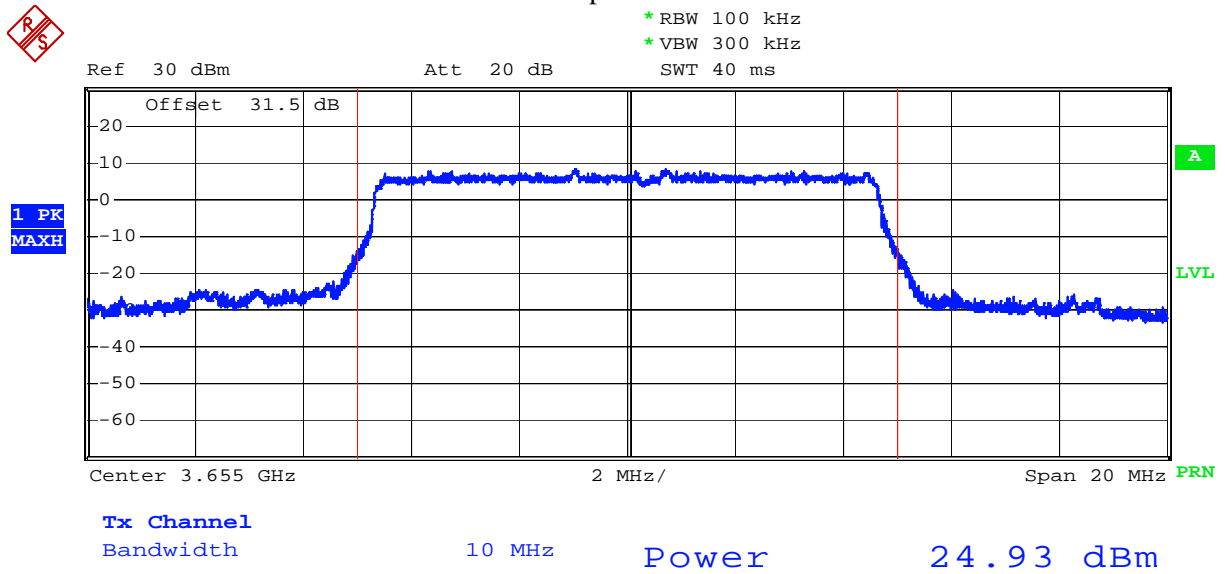


Comment: 16QAM, LOW CHANNEL  
Date: 24.FEB.2010 10:14:18

Output Power  
Graph 2.14

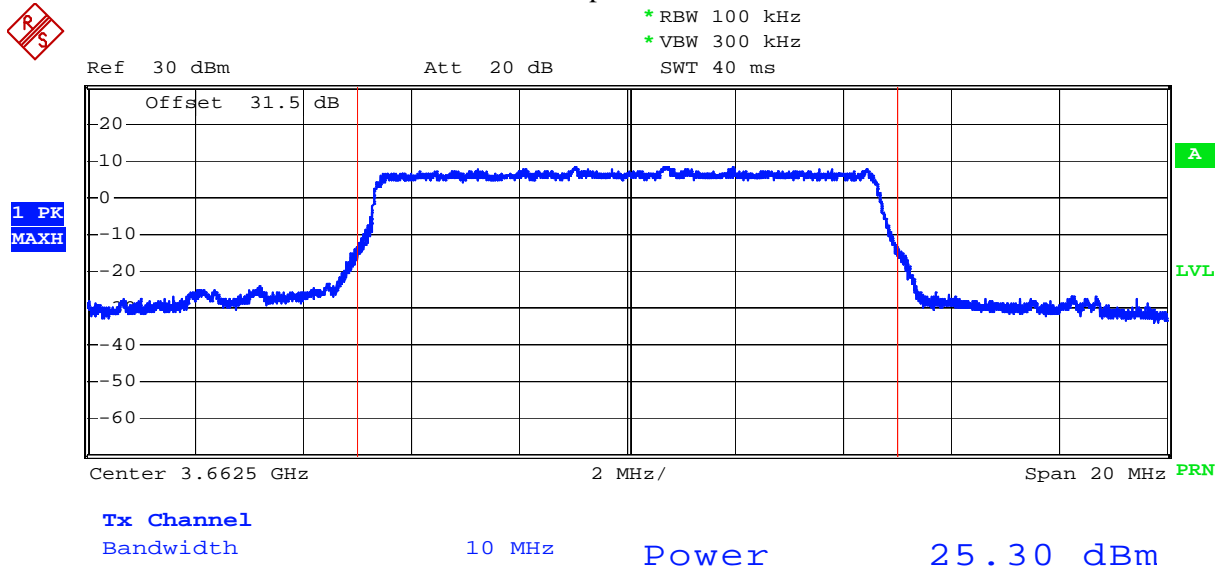


Comment: 16QAM, MID CHANNEL  
Date: 24.FEB.2010 10:23:09

## Output Power Graph 2.15

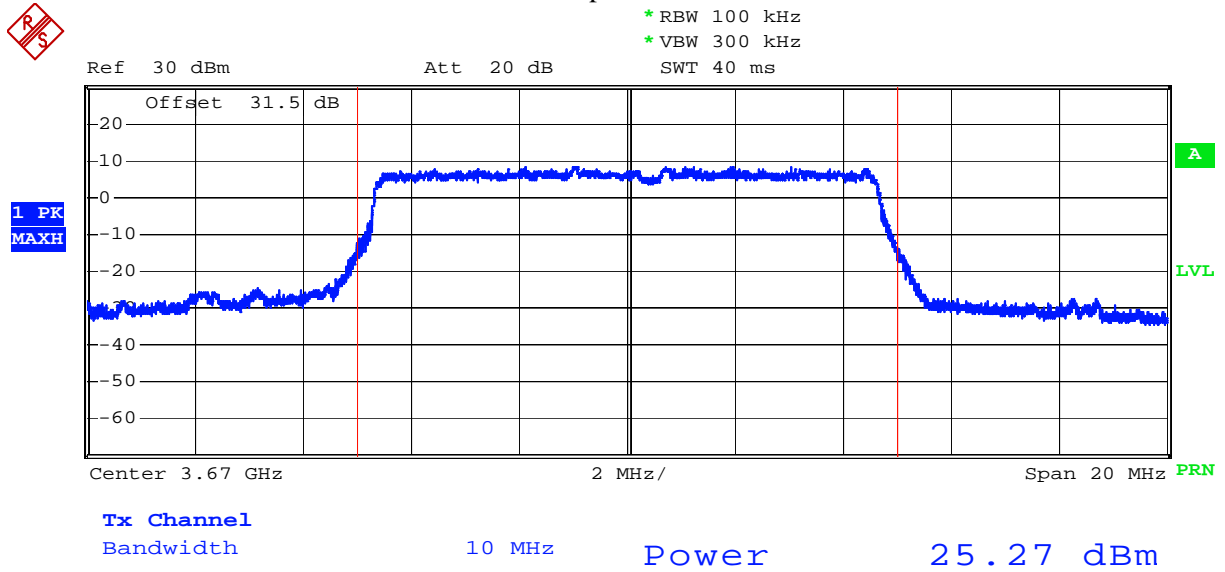


Comment: 16QAM, HIGH CHANNEL  
Date: 24.FEB.2010 10:33:58

## Output Power Graph 2.16

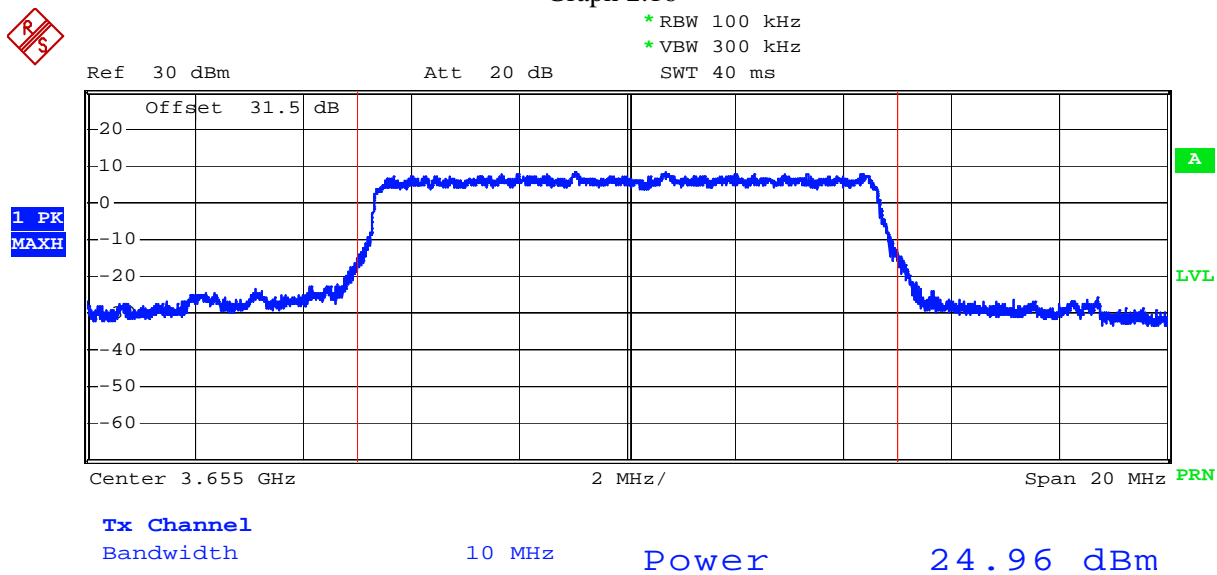


Comment: 64QAM, LOW CHANNEL  
Date: 24.FEB.2010 11:04:32

## Output Power Graph 2.17

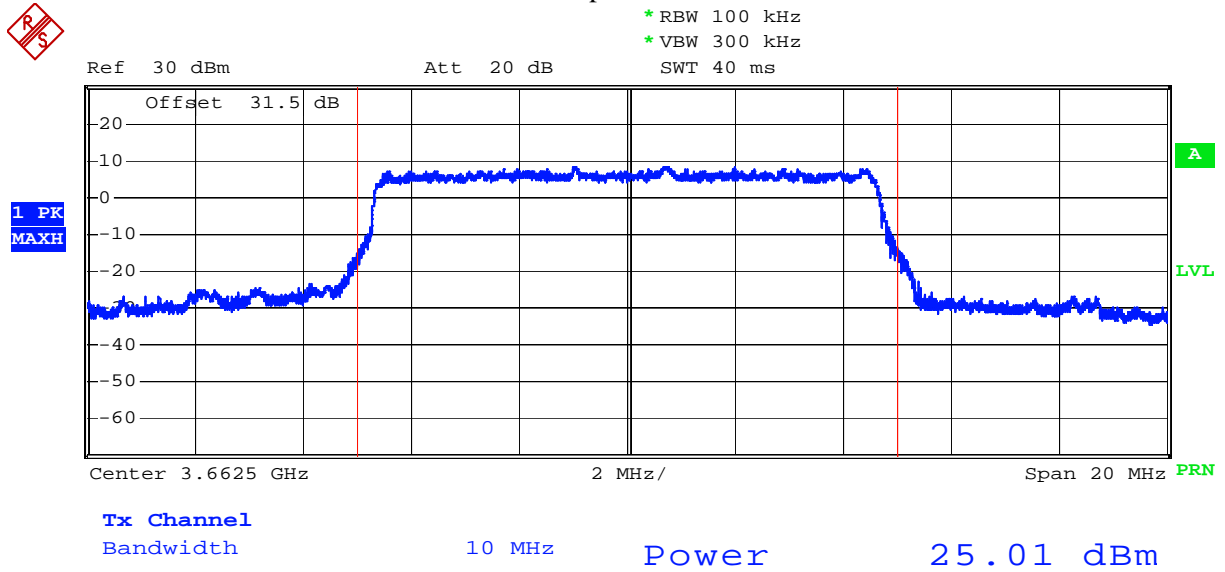

Comment: 64QAM, MID CHANNEL  
Date: 24.FEB.2010 10:54:08

# Output Power Graph 2.18

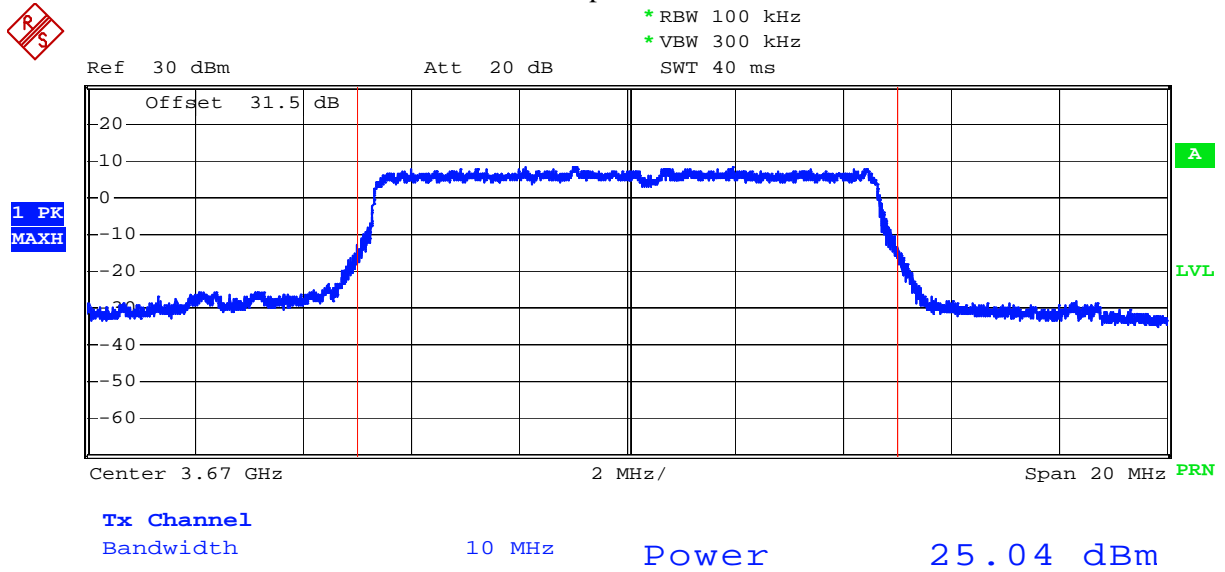


Comment: 64QAM, HIGH CHANNEL  
Date: 24.FEB.2010 10:45:39

## EIRP Power Density Graph 2.19



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      21.68 dBm  
SWT 40 ms      3.653163750 GHz

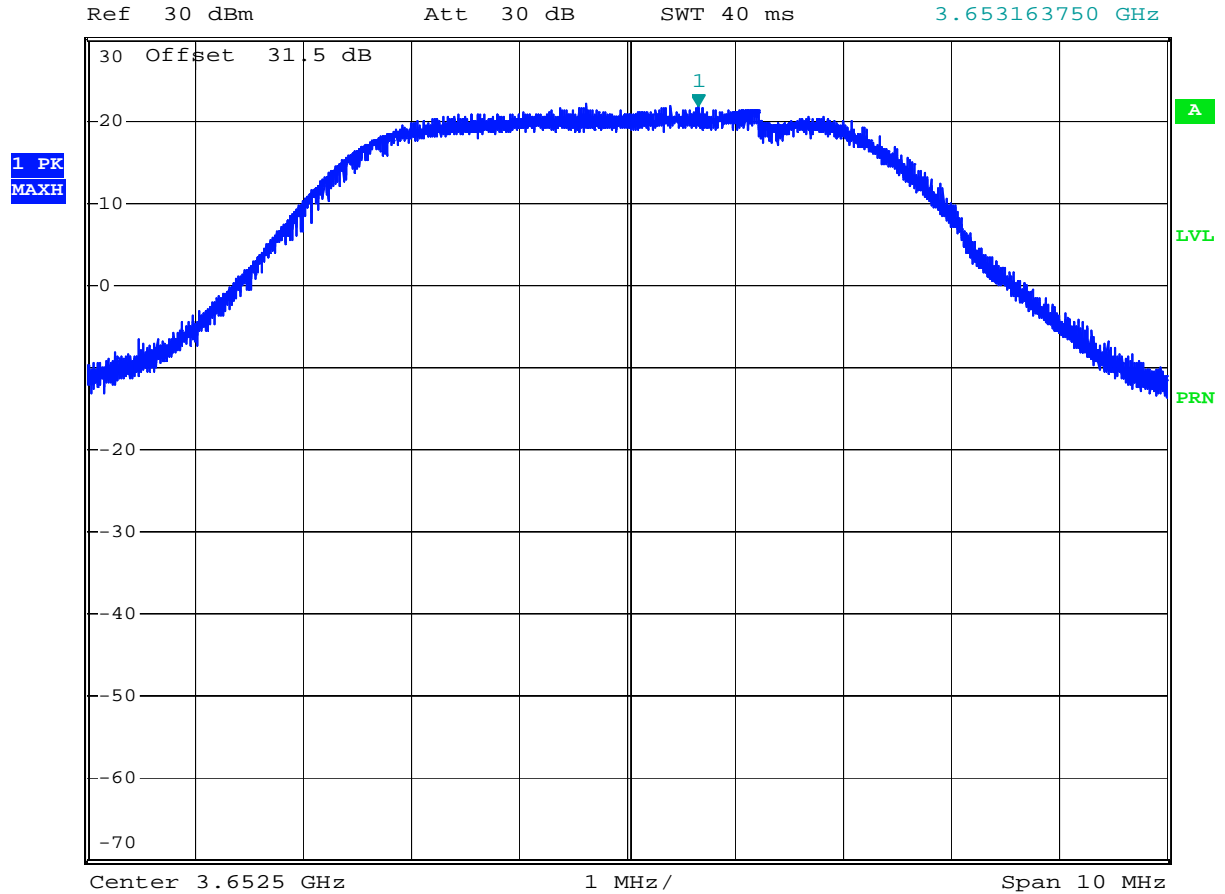


Comment: QPSK, LOW CHANNEL  
Date: 23.FEB.2010 11:33:39

## EIRP Power Density Graph 2.20



\*RBW 1 MHz  
\*VBW 3 MHz  
SWT 40 ms

Marker 1 [T1 ]  
22.01 dBm  
3.663220000 GHz

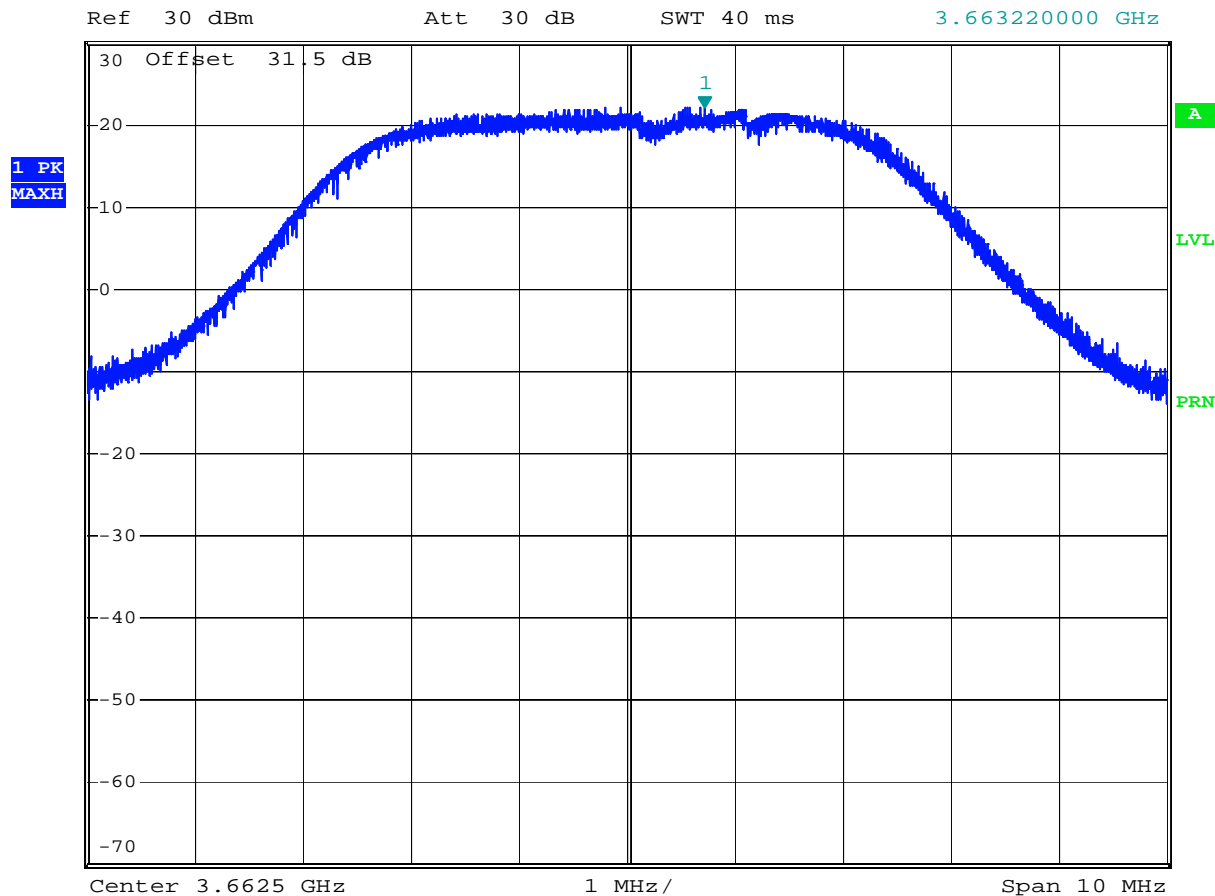

Comment: QPSK, MID CHANNEL


Date: 23.FEB.2010 11:36:11



## EIRP Power Density Graph 2.21



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      22.46 dBm  
SWT 40 ms      3.673537500 GHz

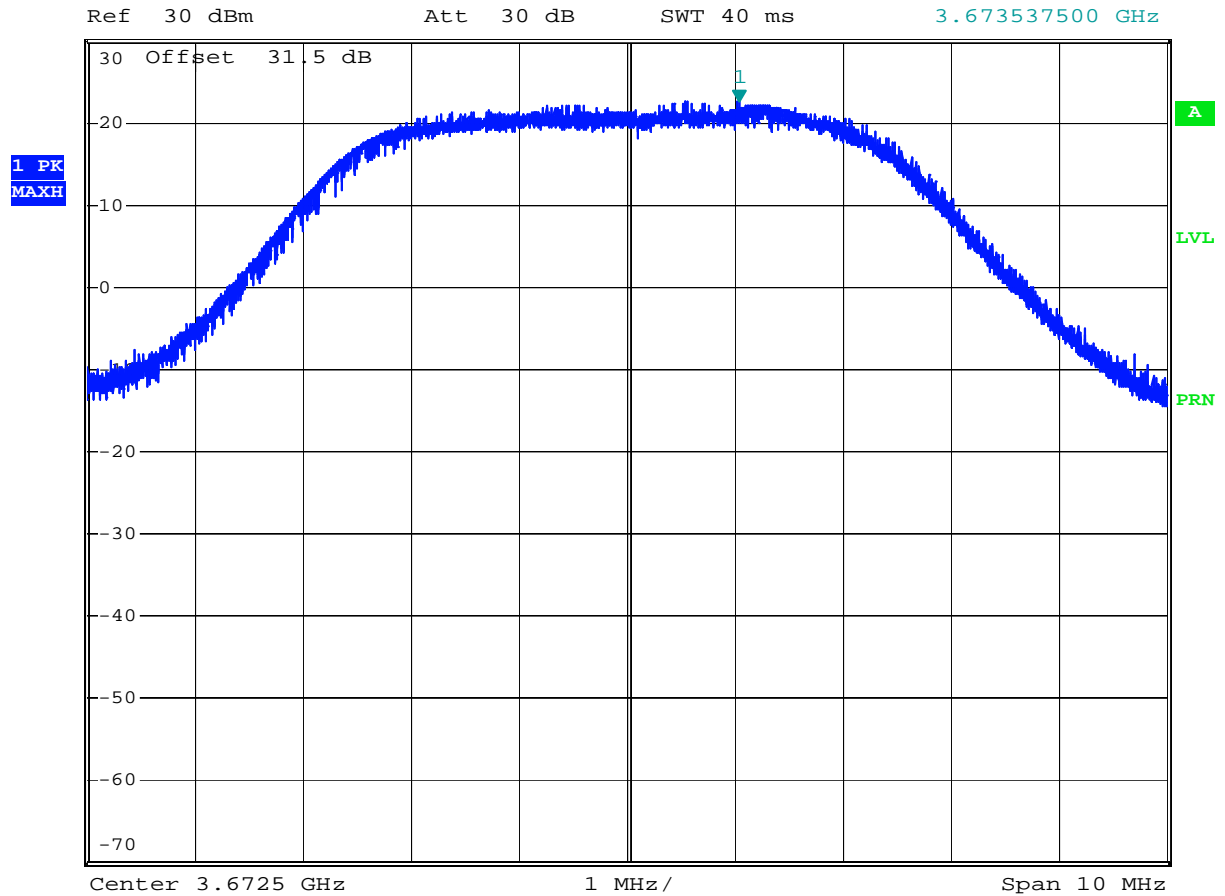


Comment: QPSK, HIGH CHANNEL  
Date: 23.FEB.2010 11:37:59

## EIRP Power Density Graph 2.22



\*RBW 1 MHz  
\*VBW 3 MHz  
SWT 40 ms

Marker 1 [T1 ]  
21.99 dBm  
3.651318750 GHz

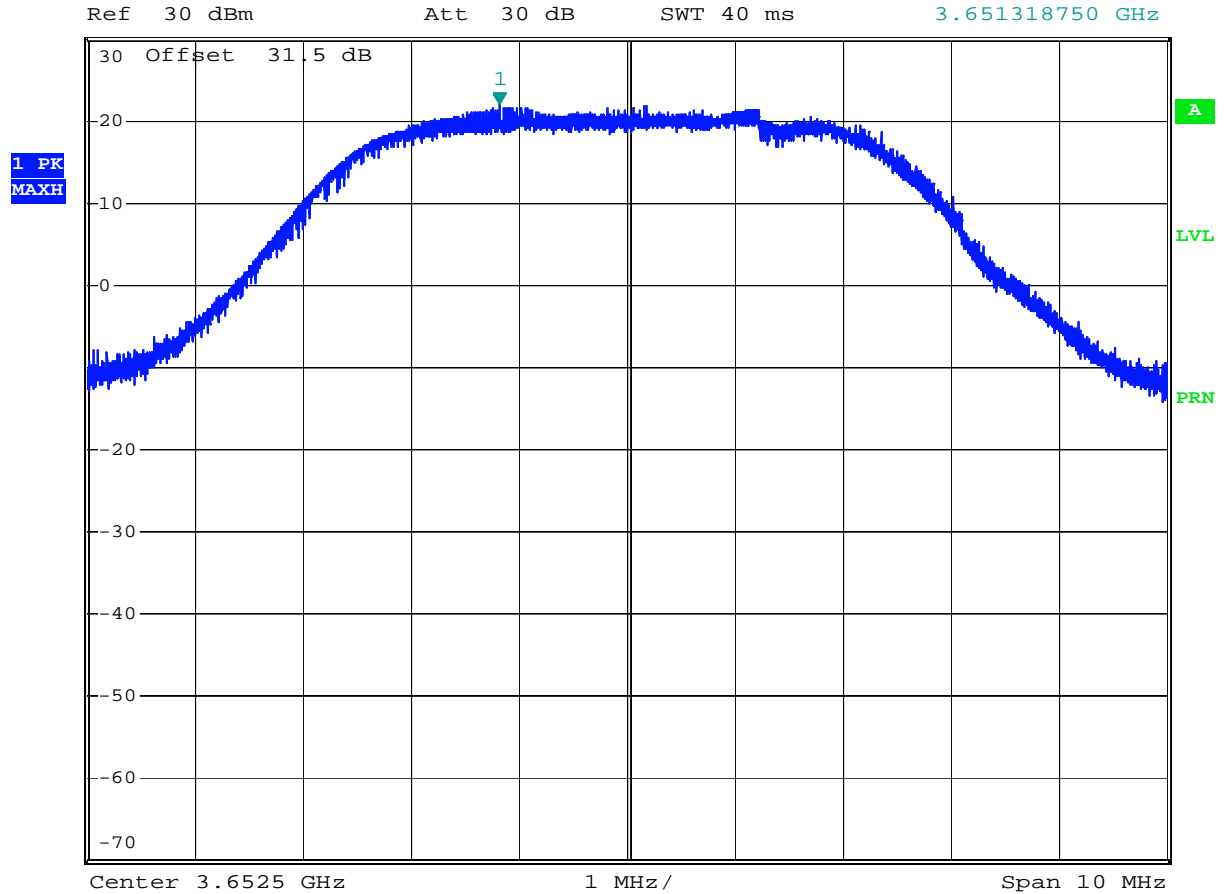


Comment: 16QAM, LOW CHANNEL  
Date: 23.FEB.2010 11:47:34

## EIRP Power Density Graph 2.23



\*RBW 1 MHz      Marker 1 [T1 ]  
 \*VBW 3 MHz      22.09 dBm  
 SWT 40 ms      3.661393750 GHz

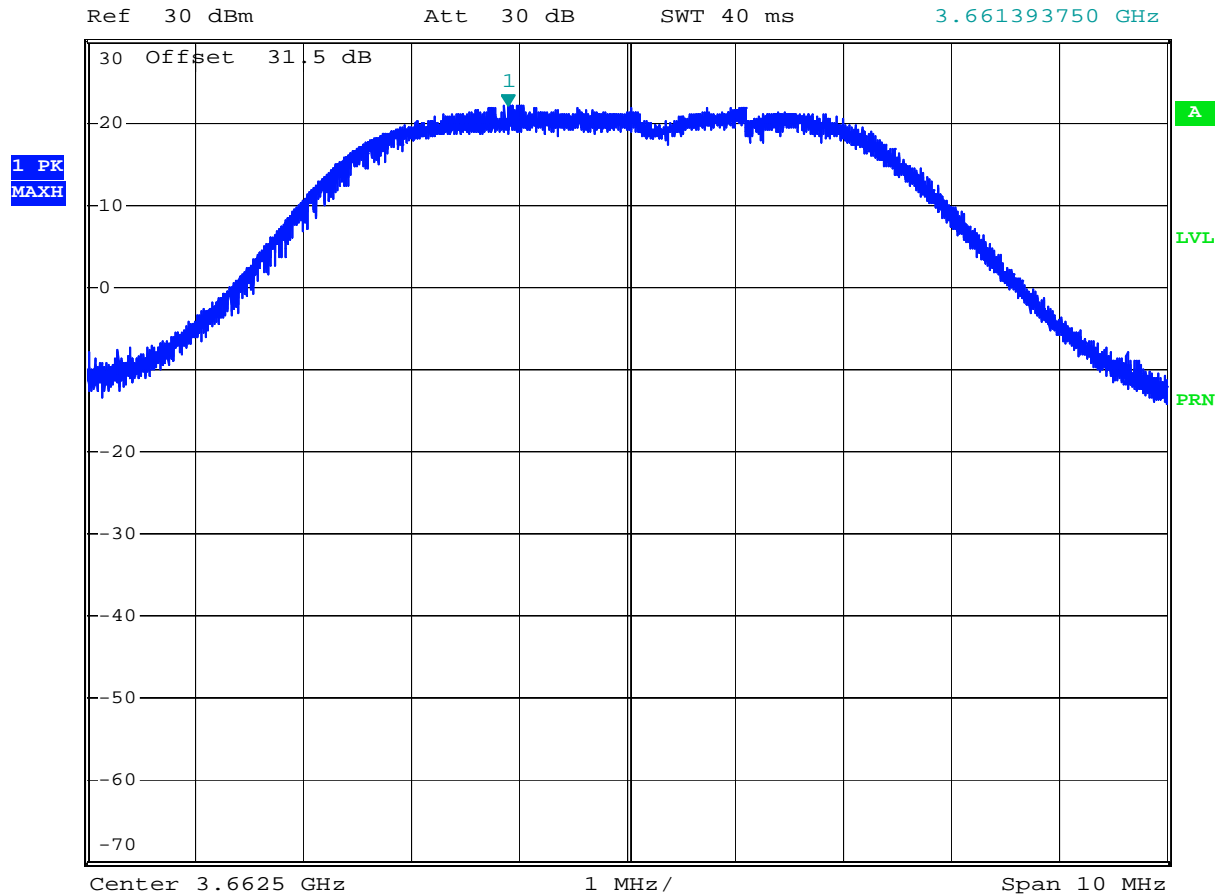


Comment: 16QAM, MID CHANNEL  
 Date: 23.FEB.2010 11:44:52

## EIRP Power Density Graph 2.24



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      22.53 dBm  
SWT 40 ms      3.672586250 GHz

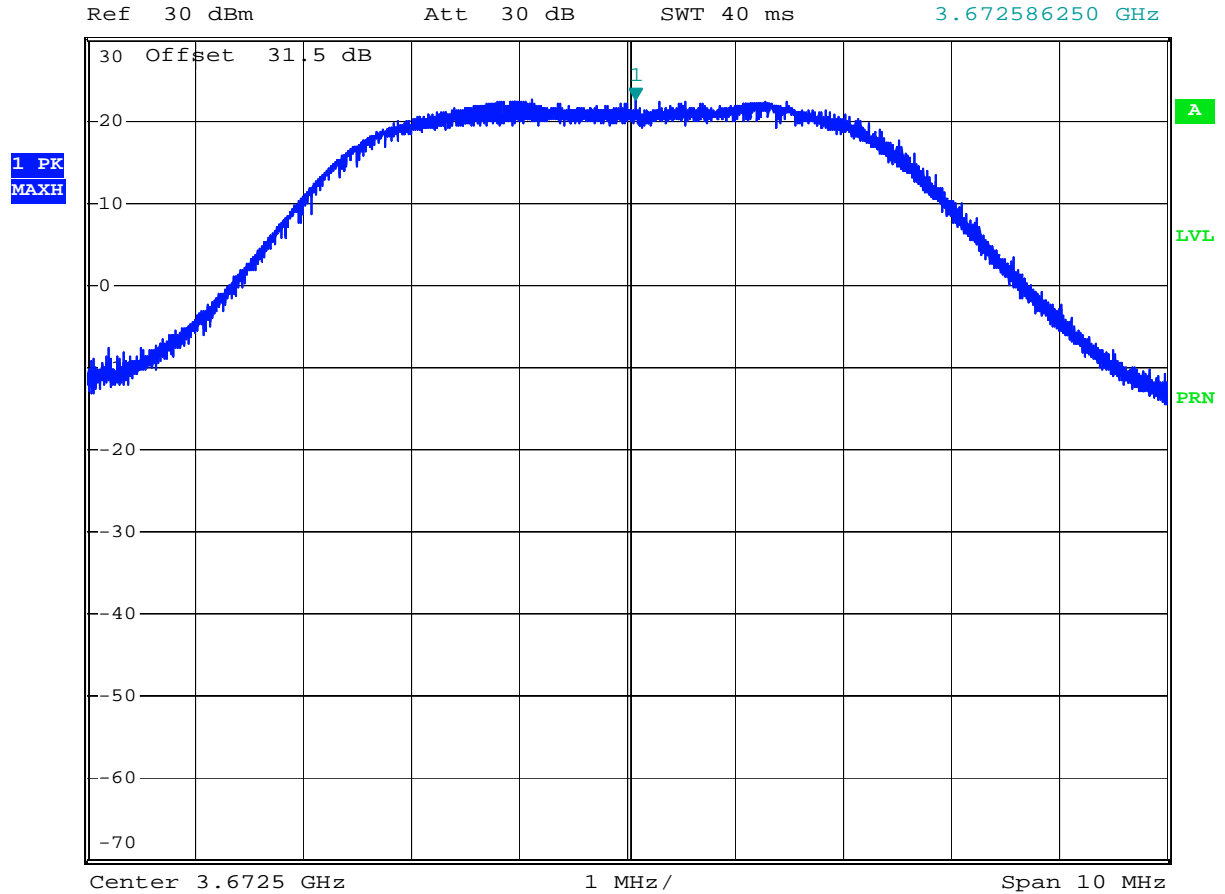


Comment: 16QAM, HIGH CHANNEL  
Date: 23.FEB.2010 11:40:43

## EIRP Power Density Graph 2.25



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      22.04 dBm  
SWT 40 ms      3.652990000 GHz

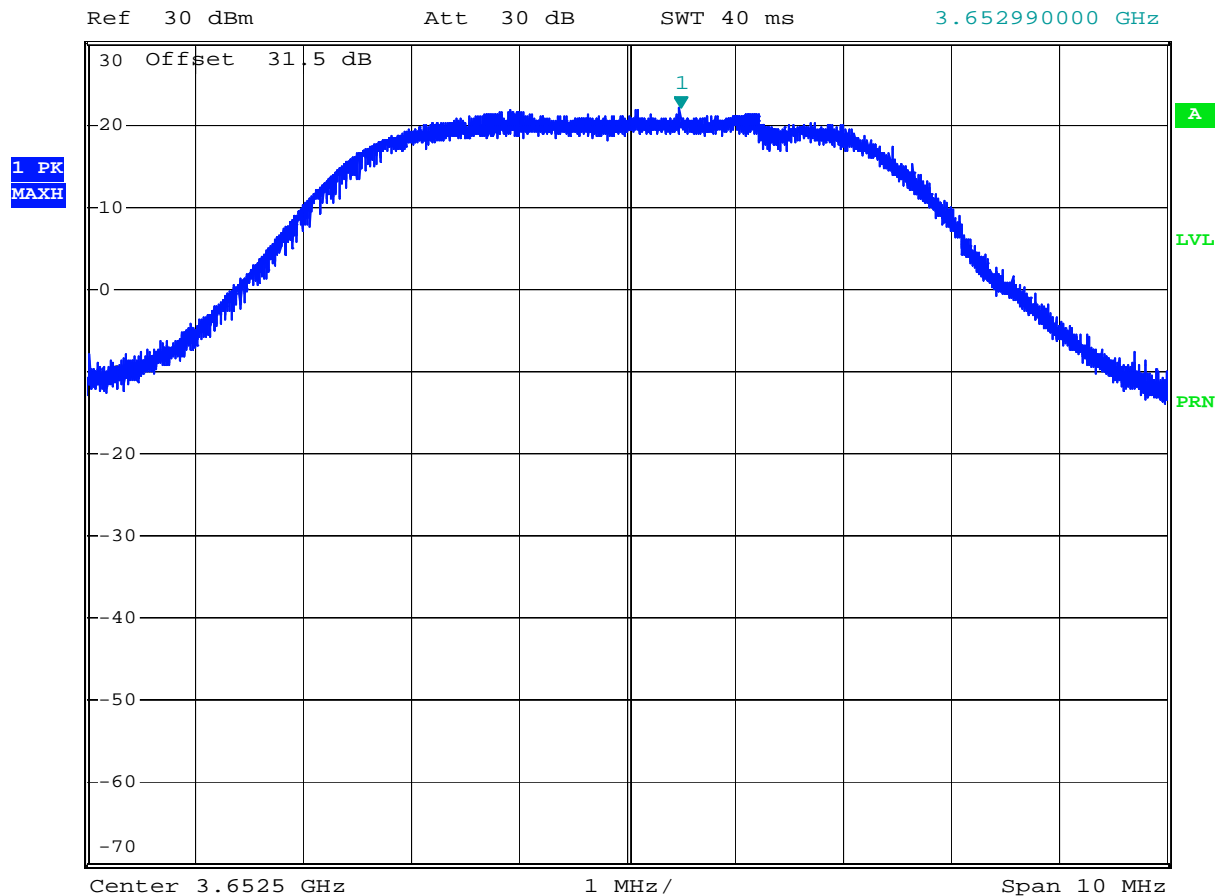


Comment: 64QAM, LOW CHANNEL  
Date: 23.FEB.2010 11:49:45

## EIRP Power Density Graph 2.26



\*RBW 1 MHz  
\*VBW 3 MHz  
SWT 40 ms

Marker 1 [T1 ]  
22.59 dBm  
3.662108750 GHz

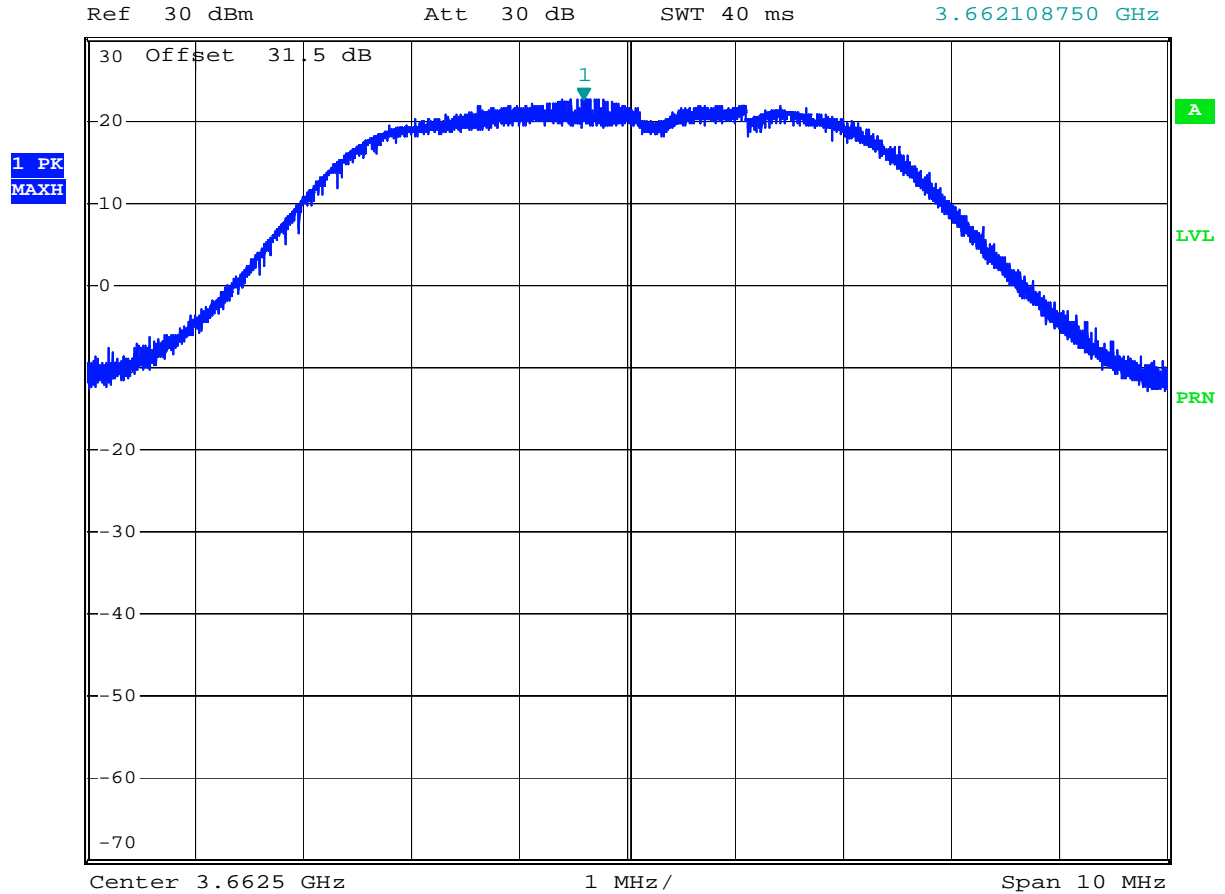


Comment: 64QAM, MID CHANNEL  
Date: 23.FEB.2010 11:52:55

## EIRP Power Density Graph 2.27



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      22.88 dBm  
SWT 40 ms      3.672181250 GHz

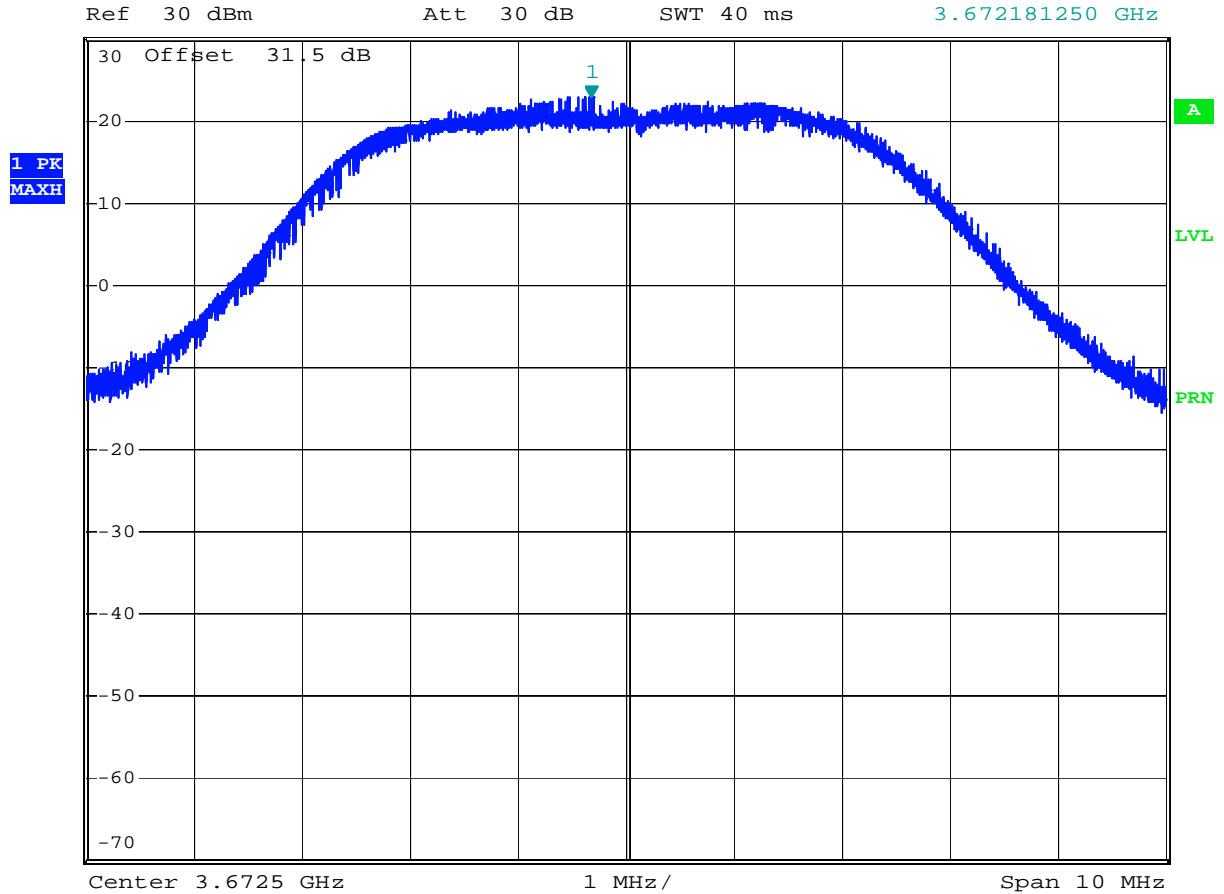


Comment: 64QAM, HIGH CHANNEL  
Date: 23.FEB.2010 11:55:14

## EIRP Power Density Graph 2.28



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      18.65 dBm  
SWT 40 ms      3.654065000 GHz

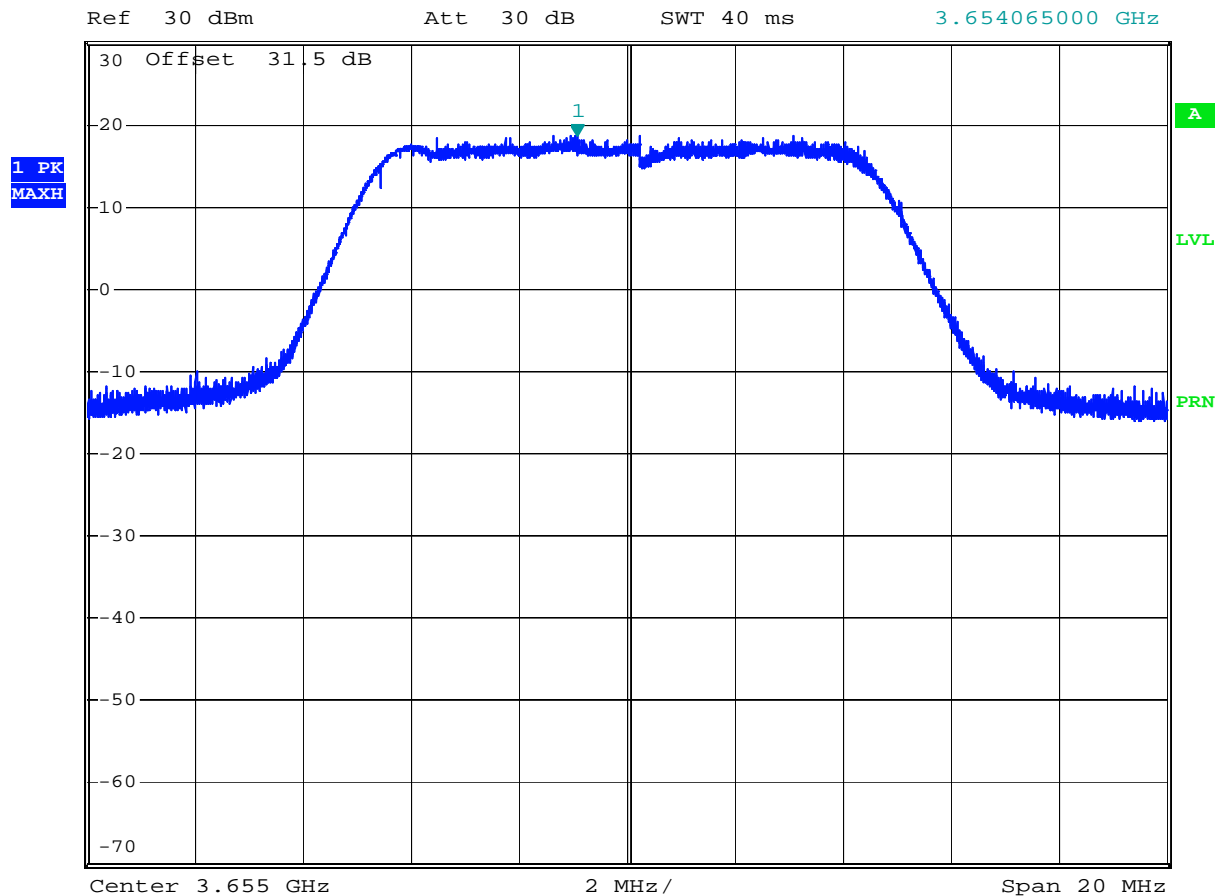

Comment: QPSK, LOW CHANNEL


Date: 24.FEB.2010 09:43:47



## EIRP Power Density Graph 2.29



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      19.06 dBm  
SWT 40 ms      3.662575000 GHz

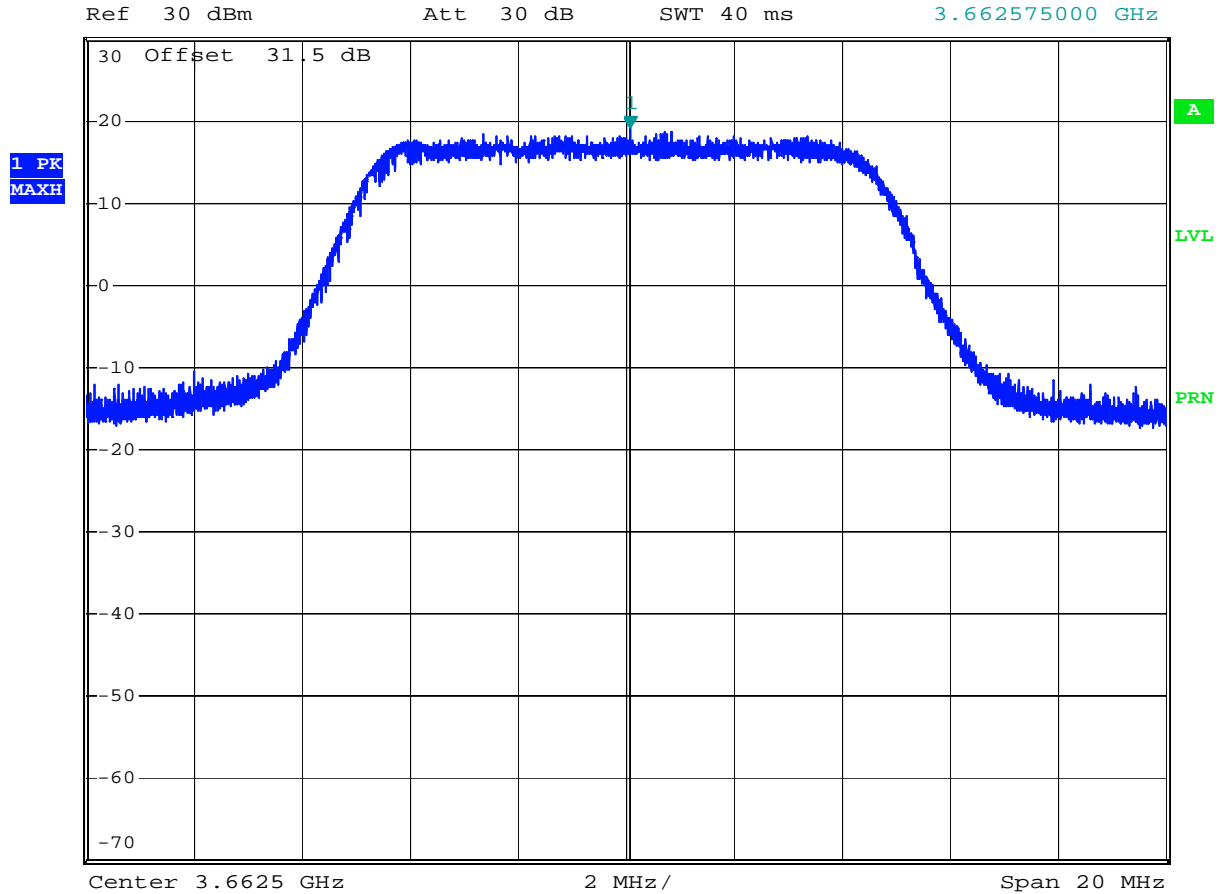


Comment: QPSK, MID CHANNEL

Date: 24.FEB.2010 09:45:46

## EIRP Power Density Graph 2.30



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      18.51 dBm  
SWT 40 ms      3.673297500 GHz

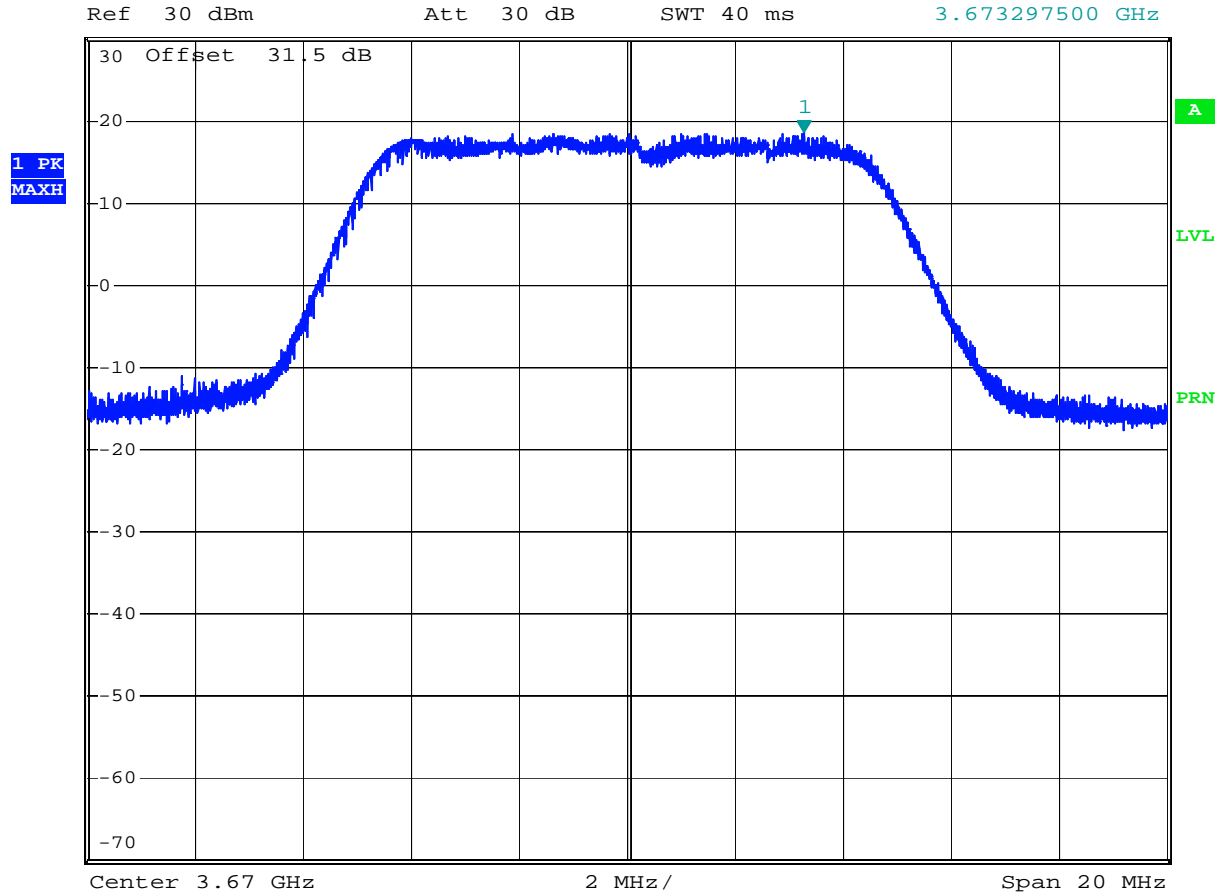


Comment: QPSK, HIGH CHANNEL  
Date: 24.FEB.2010 09:48:12

## EIRP Power Density Graph 2.31



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      18.80 dBm  
SWT 40 ms      3.653825000 GHz

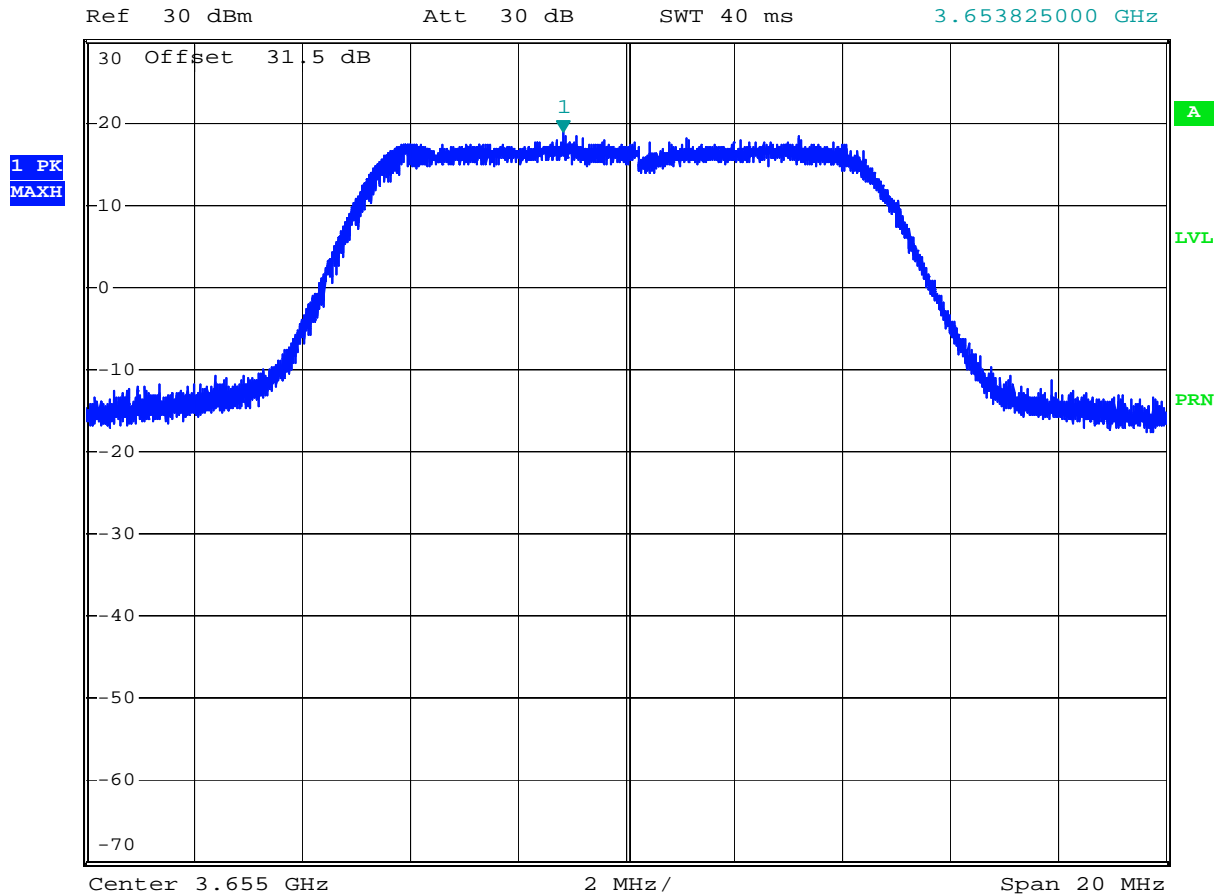


Comment: 16QAM, LOW CHANNEL  
Date: 24.FEB.2010 09:38:11

## EIRP Power Density Graph 2.32



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      18.72 dBm  
SWT 40 ms      3.661845000 GHz

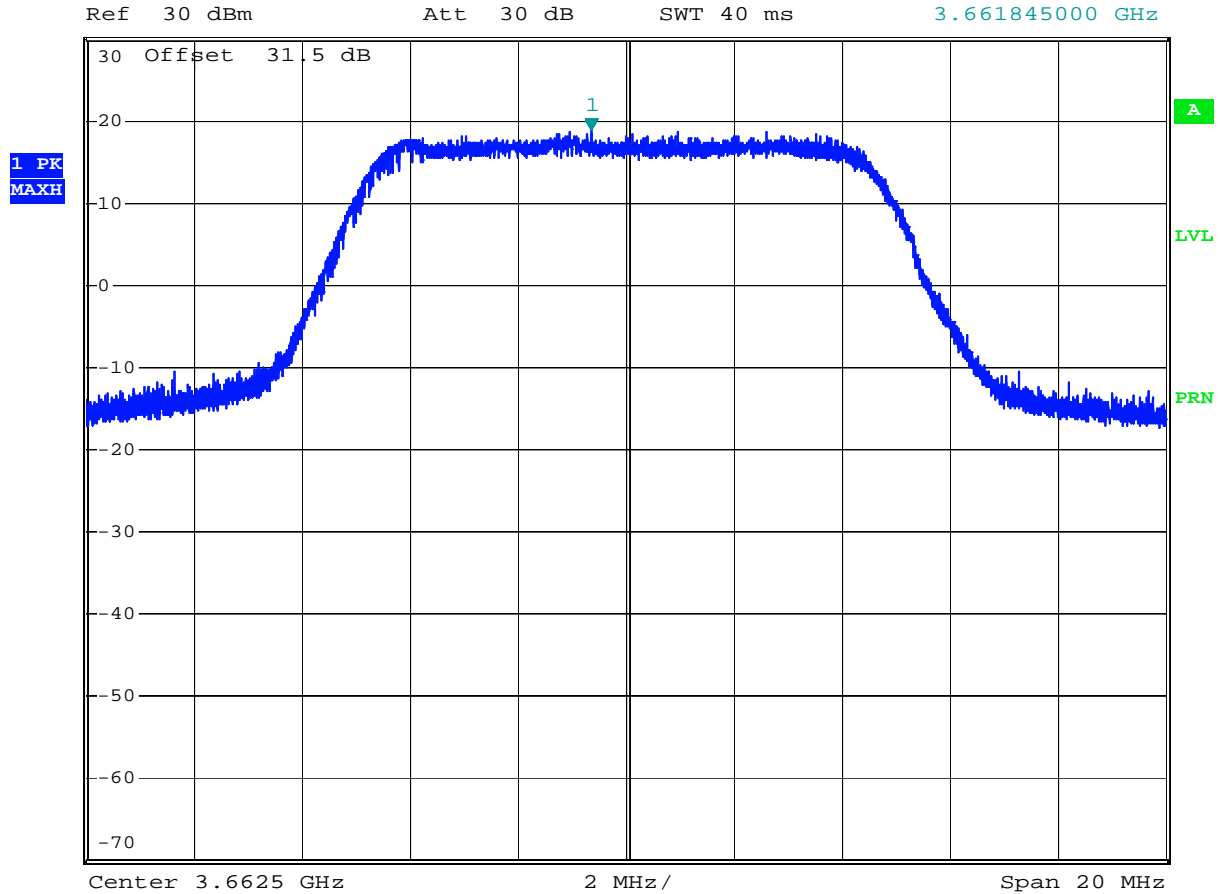


Comment: 16QAM, MID CHANNEL

Date: 24.FEB.2010 09:35:48

## EIRP Power Density Graph 2.33



\*RBW 1 MHz      Marker 1 [T1 ]  
 \*VBW 3 MHz      19.12 dBm  
 SWT 40 ms      3.671782500 GHz

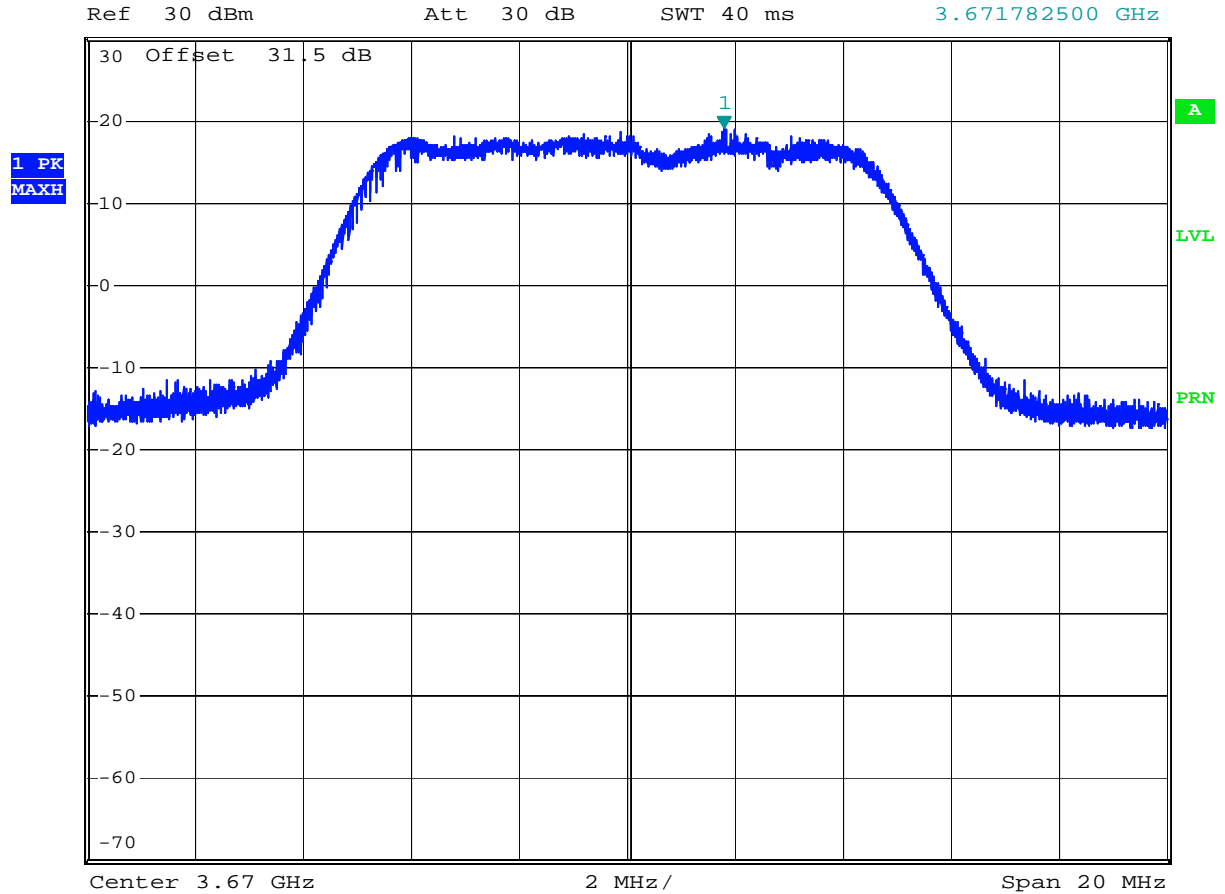


Comment: 16QAM, HIGH CHANNEL  
 Date: 24.FEB.2010 09:33:45

## EIRP Power Density Graph 2.34



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      18.59 dBm  
SWT 40 ms      3.656610000 GHz

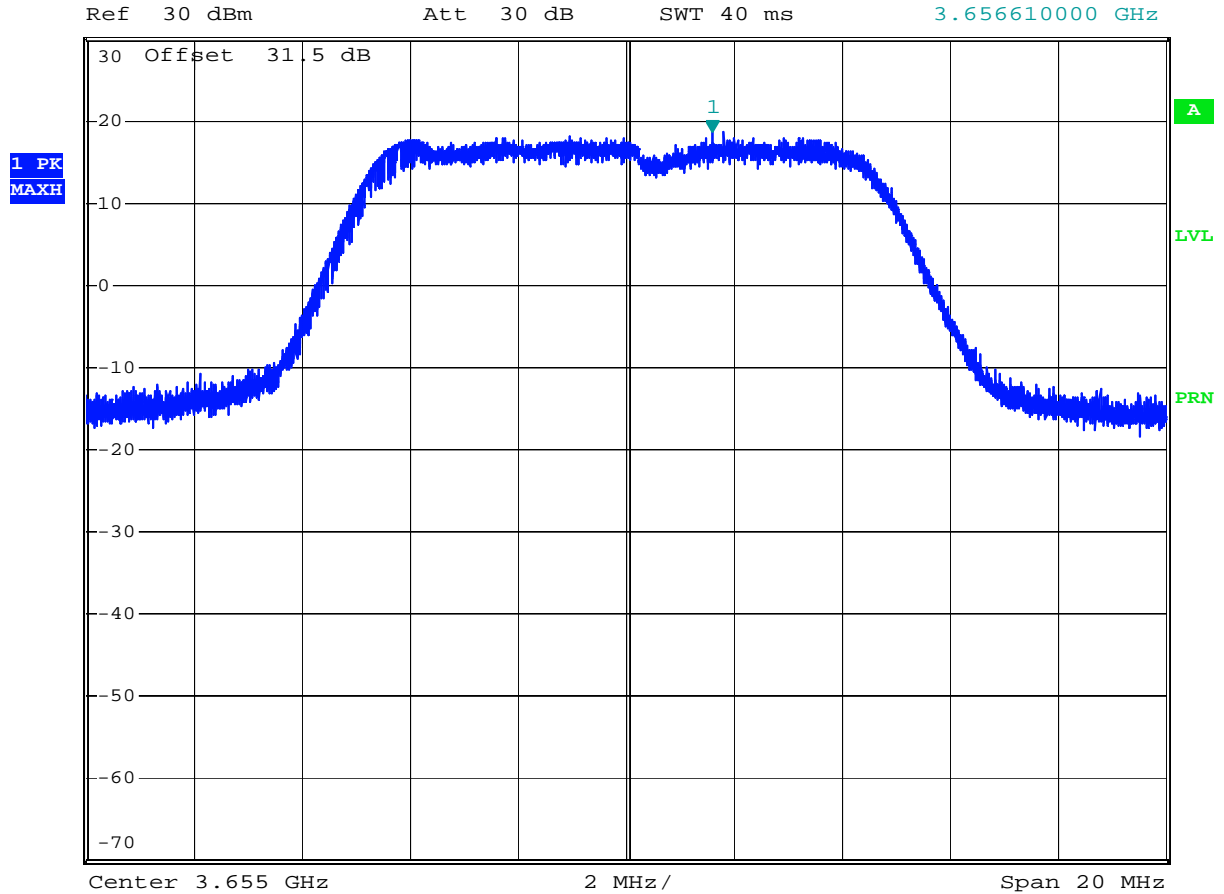

Comment: 64QAM, LOW CHANNEL


Date: 24.FEB.2010 09:29:34

## EIRP Power Density Graph 2.35



\*RBW 1 MHz  
\*VBW 3 MHz  
SWT 40 ms

Marker 1 [T1 ]  
19.11 dBm  
3.664260000 GHz

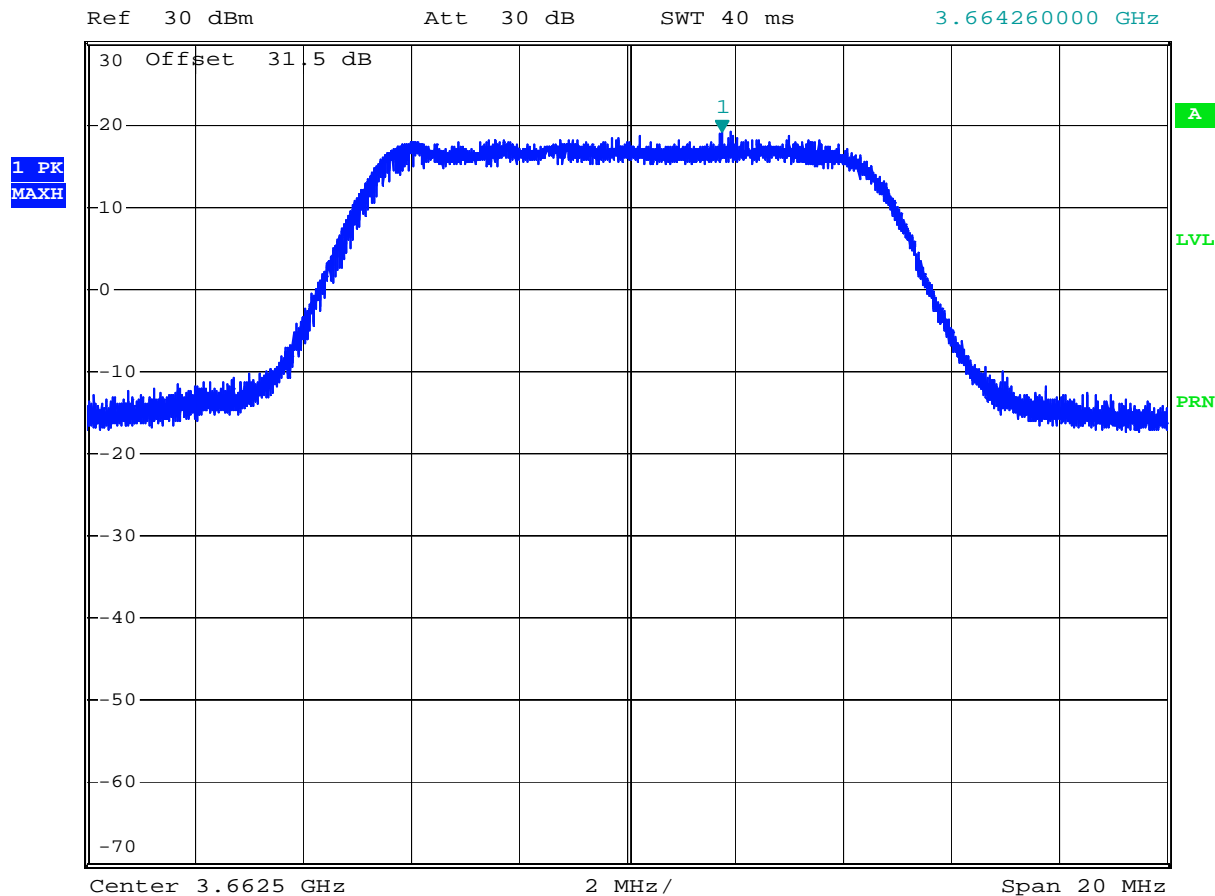


Comment: 64QAM, MID CHANNEL  
Date: 24.FEB.2010 09:21:01

## EIRP Power Density Graph 2.36



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      18.68 dBm  
SWT 40 ms      3.671955000 GHz

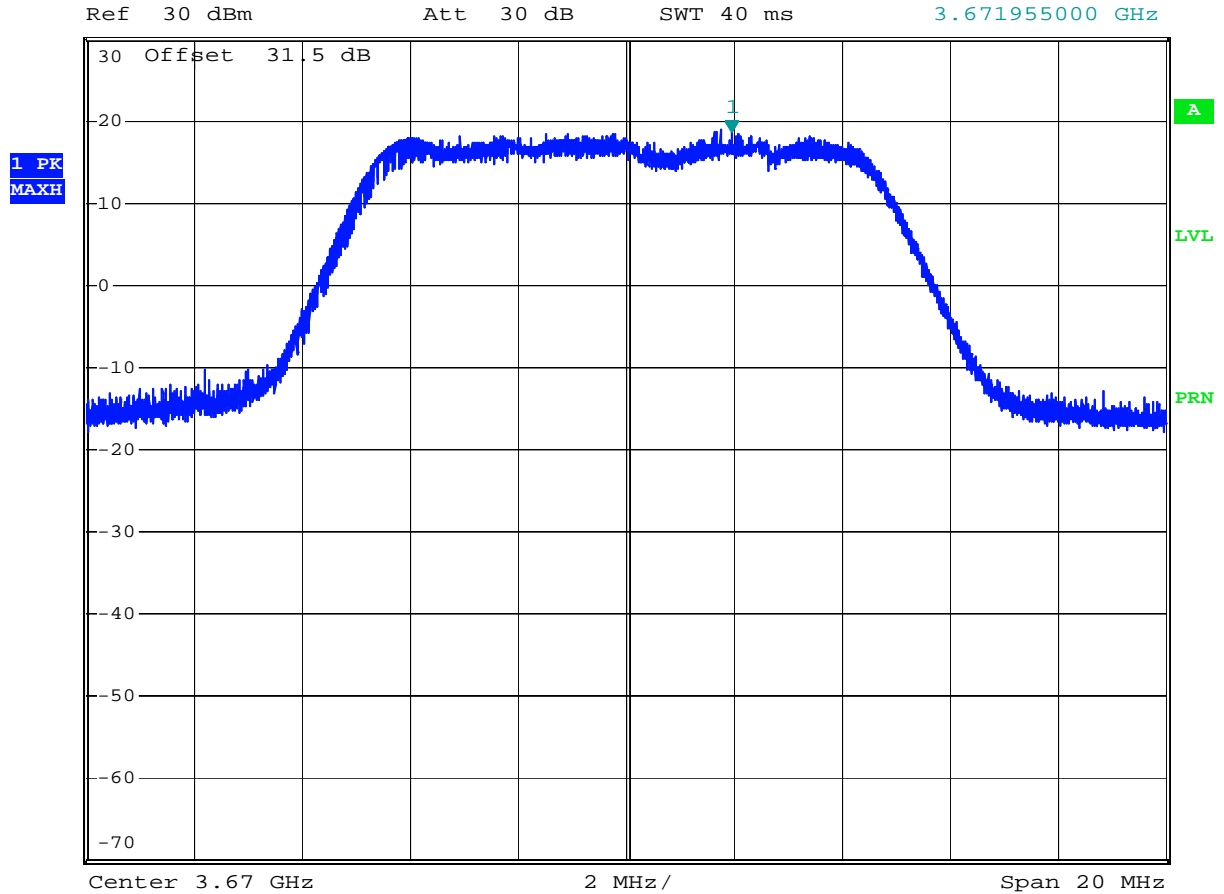

Comment: 64QAM, HIGH CHANNEL  
Date: 24.FEB.2010 09:31:36