



2DH5 Operation Frequency Range of 20dB Bandwidth within Hopping Mode

Channel 00 (2402MHz)

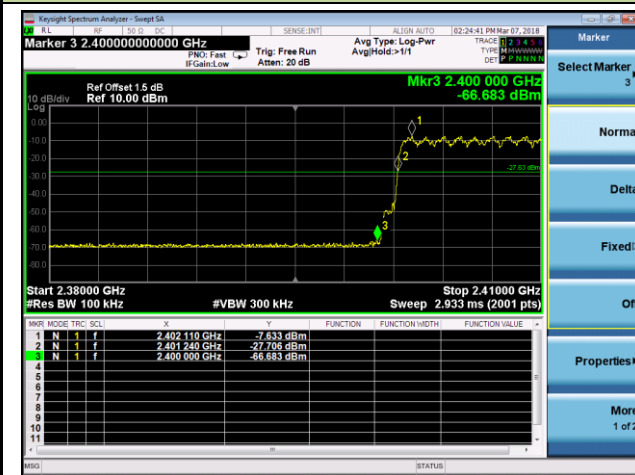


Channel 78 (2480MHz)

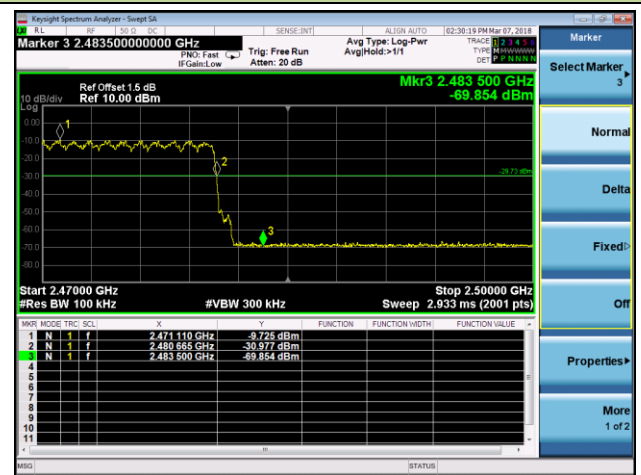


3DH5 Operation Frequency Range of 20dB Bandwidth within Hopping Mode

Channel 00 (2402MHz)

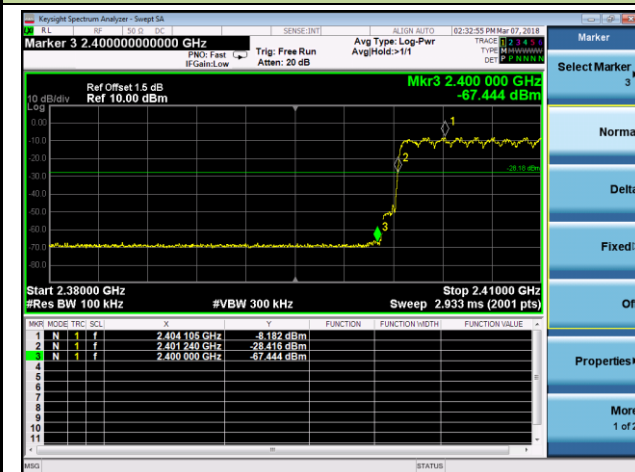

Channel 78 (2480MHz)

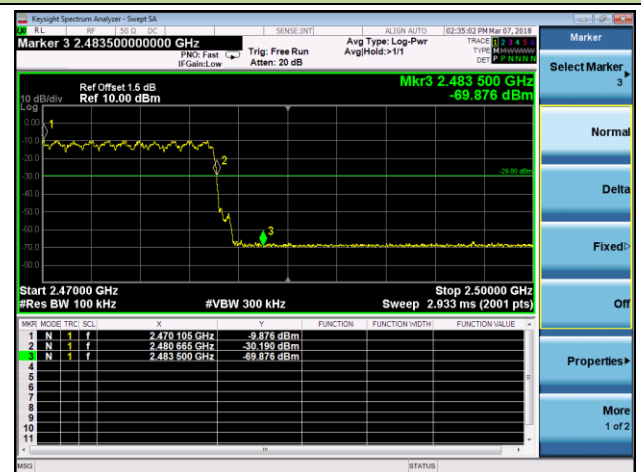

7.8. Conducted Spurious Emissions Measurement

7.8.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


7.8.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.8

7.8.3. Test Setting

1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.
Typically, several plots are required to cover this entire span.
2. RBW = 100 KHz
3. VBW \geq RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize
8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.


7.8.4.Test Setup

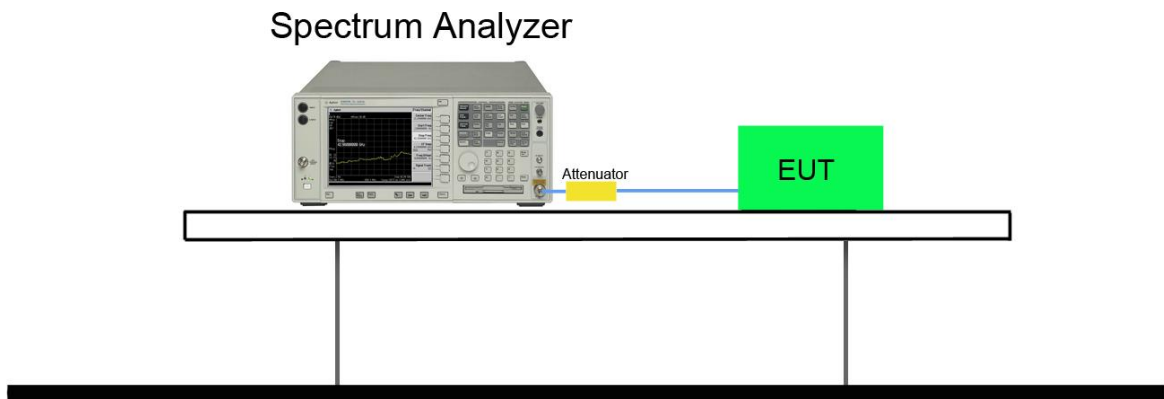


7.8.5. Test Result

Product	E-reader	Temperature	25°C
Test Engineer	Amy Zhang	Relative Humidity	52%
Test Site	TR3	Test Date	2018/03/07

Test Mode	Channel No.	Frequency (MHz)	Limit (MHz)	Result
DH5	00	2402	20dBc	Pass
DH5	39	2441	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	39	2441	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	39	2441	20dBc	Pass
3DH5	78	2480	20dBc	Pass

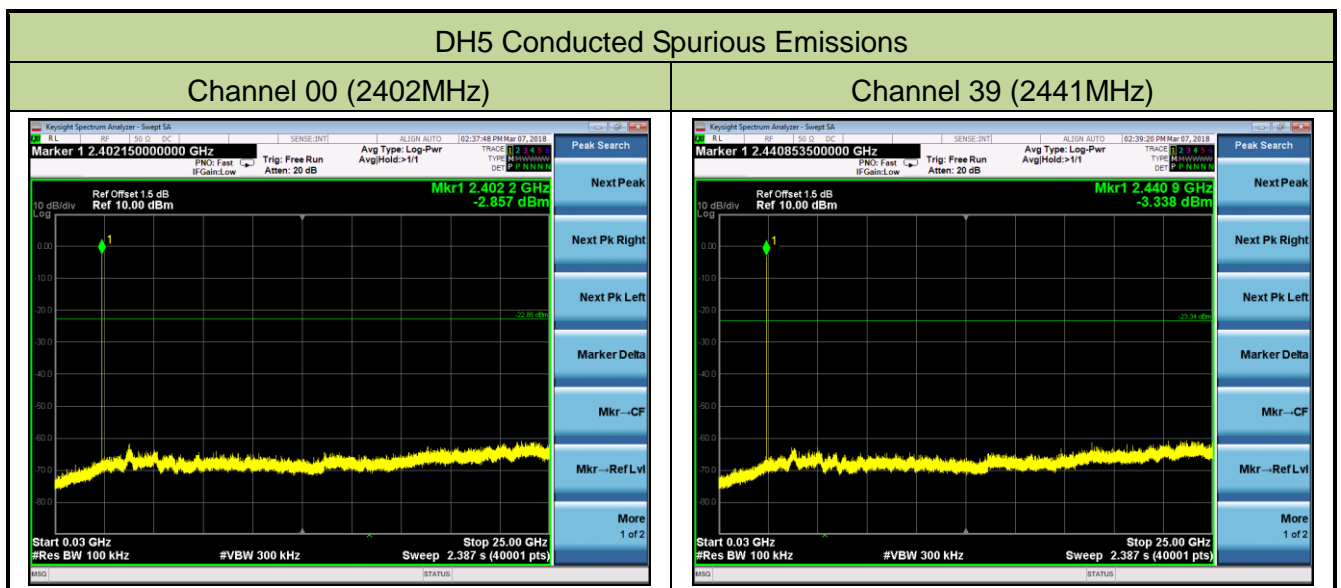


Channel 78 (2480MHz)

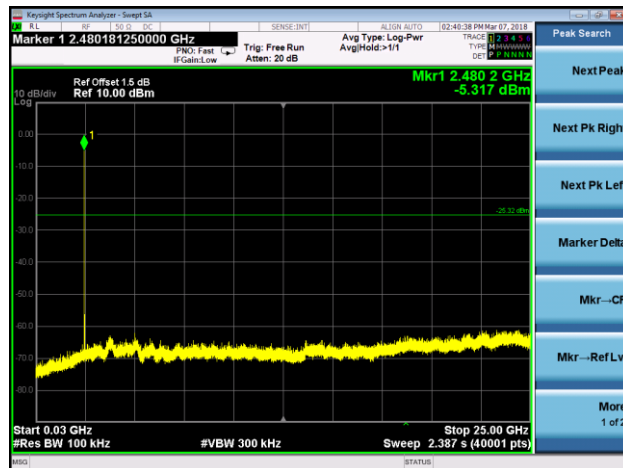


2DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

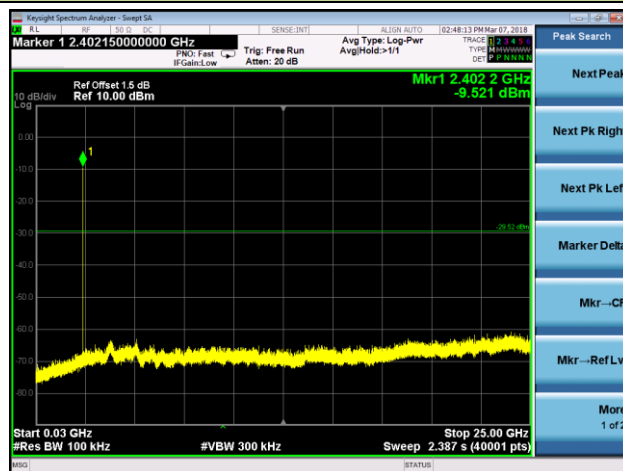

Channel 39 (2441MHz)

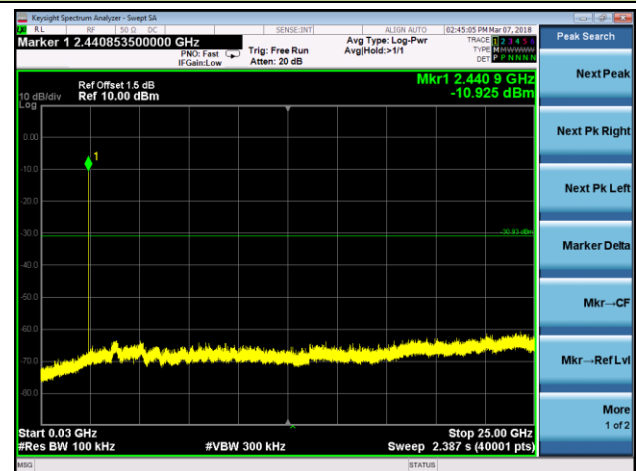


Channel 78 (2480MHz)

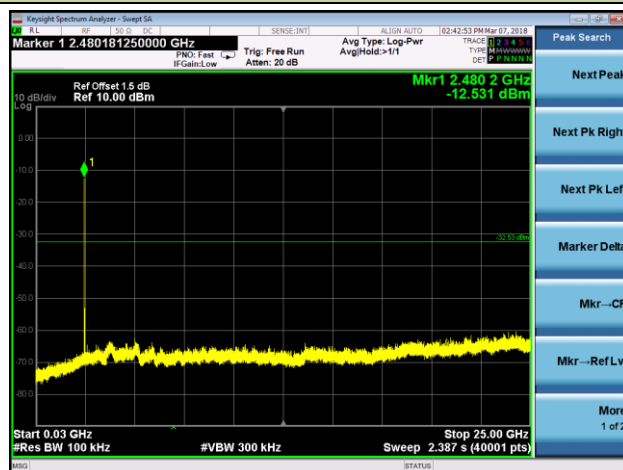


3DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

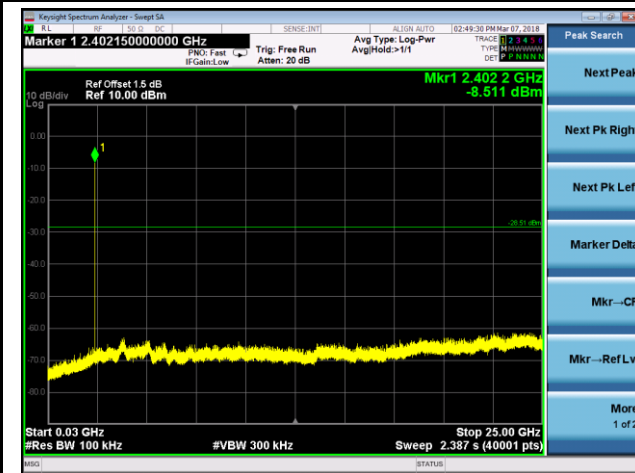

Channel 39 (2441MHz)

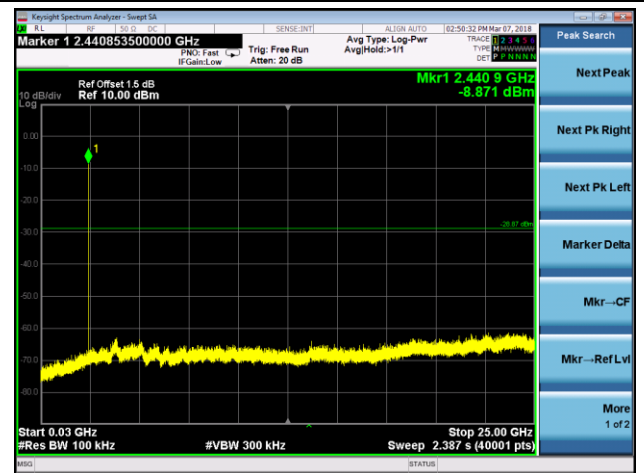

Channel 78 (2480MHz)

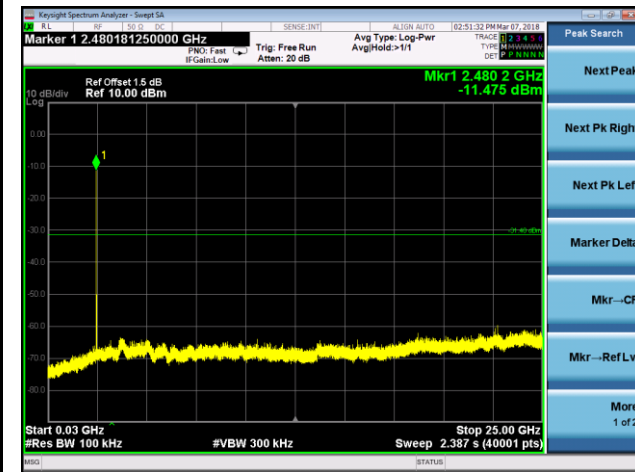

7.9. Radiated Spurious Emission Measurement

7.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

7.9.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.12.1

7.9.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 * RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.9.4. Test Setup


9kHz ~ 30MHz Test Setup:

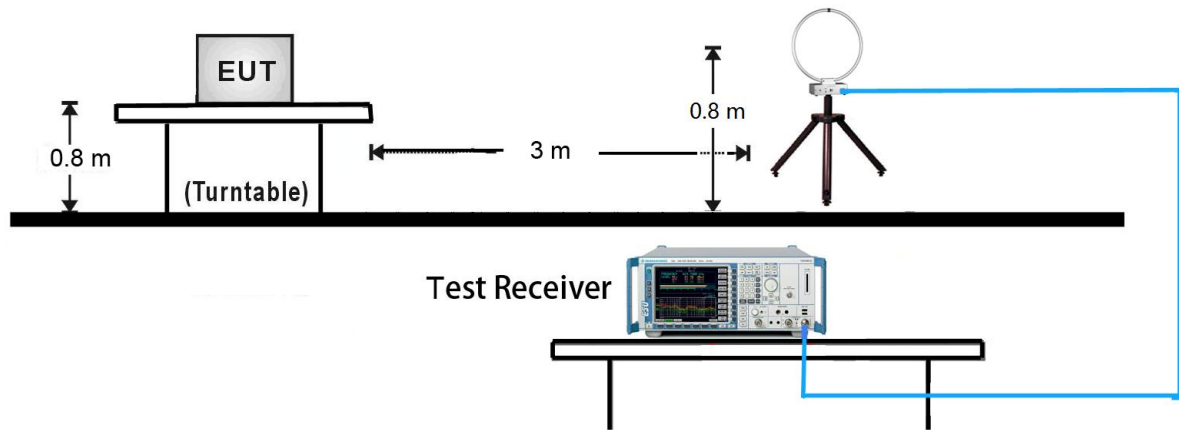

30MHz ~ 1GHz Test Setup:

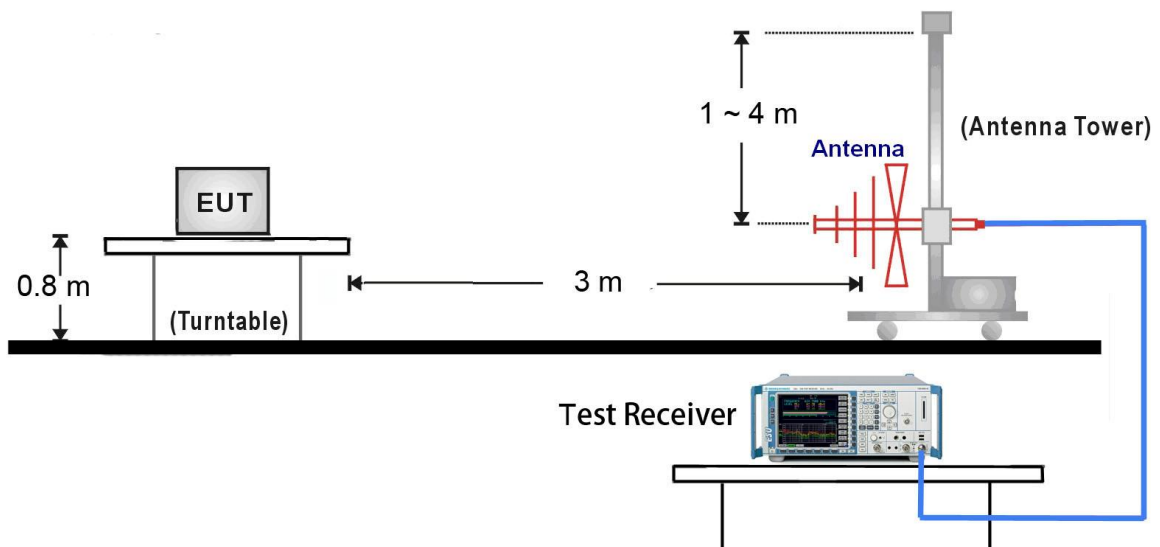

1GHz ~ 25GHz Test Setup:

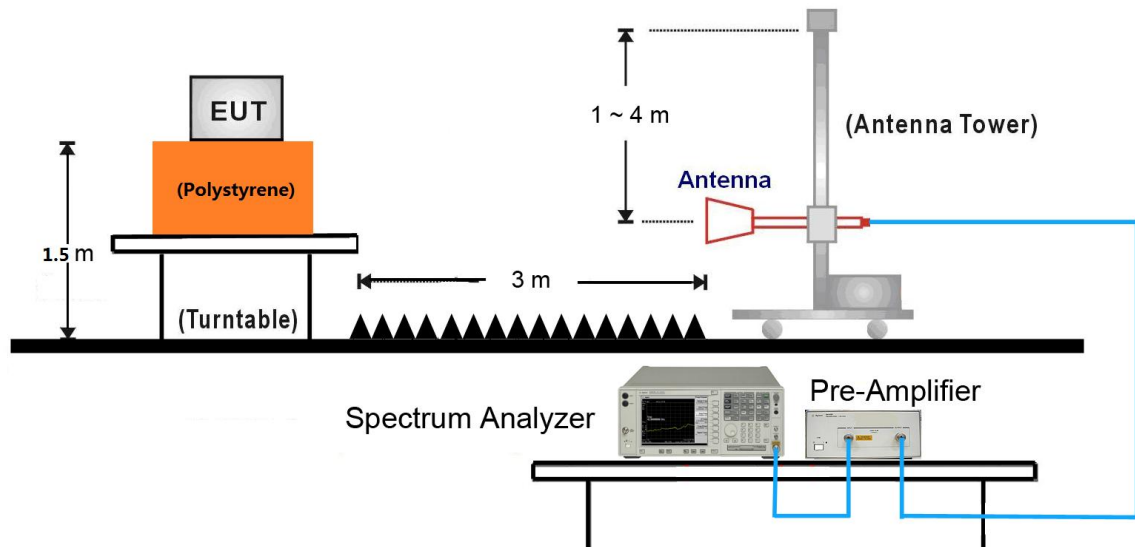

7.9.5. Test Result

Test Mode:	DH5	Test Site:	AC1
Test Channel:	00	Test Engineer:	Dandy Li
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4051.5	39.6	3.5	43.1	74.0	-30.9	Peak	Horizontal
*	6814.0	34.2	10.4	44.6	74.0	-29.4	Peak	Horizontal
	7417.5	36.6	12.7	49.3	74.0	-24.7	Peak	Horizontal
*	7910.5	35.1	13.4	48.5	74.0	-25.5	Peak	Horizontal
	4986.5	39.4	6.2	45.6	74.0	-28.4	Peak	Vertical
*	6397.5	36.3	9.2	45.5	74.0	-28.5	Peak	Vertical
	7477.0	36.0	12.9	48.9	74.0	-25.1	Peak	Vertical
*	8701.0	35.6	13.0	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (93.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	DH5	Test Site:	AC1
Test channel:	39	Test Engineer:	Dandy Li
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	5012.0	36.7	6.3	43.0	74.0	-31.0	Peak	Horizontal
*	5734.5	36.5	7.4	43.9	74.1	-30.2	Peak	Horizontal
	7553.5	36.3	13.0	49.3	74.0	-24.7	Peak	Horizontal
*	8633.0	36.2	12.9	49.1	74.1	-25.0	Peak	Horizontal
	4986.5	39.5	6.2	45.7	74.0	-28.3	Peak	Vertical
*	5862.0	35.0	7.8	42.8	74.1	-31.3	Peak	Vertical
	7587.5	34.7	12.8	47.5	74.0	-26.5	Peak	Vertical
*	8658.5	34.9	13.0	47.9	74.1	-26.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (94.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	DH5	Test Site:	AC1
Test channel:	78	Test Engineer:	Dandy Li
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4689.0	37.3	5.4	42.7	74.0	-31.3	Peak	Horizontal
*	5267.0	35.4	6.3	41.7	74.4	-32.7	Peak	Horizontal
	7366.5	35.0	12.7	47.7	74.0	-26.3	Peak	Horizontal
*	7910.5	34.4	13.4	47.8	74.4	-26.6	Peak	Horizontal
	4629.5	38.4	5.3	43.7	74.0	-30.3	Peak	Vertical
*	5836.5	35.6	7.7	43.3	74.4	-31.1	Peak	Vertical
	7400.5	35.4	12.6	48.0	74.0	-26.0	Peak	Vertical
*	7961.5	36.3	13.5	49.8	74.4	-24.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (94.4dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	2DH5	Test Site:	AC1
Test channel:	00	Test Engineer:	Dandy Li
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	5029.0	37.4	6.4	43.8	74.0	-30.2	Peak	Horizontal
*	6338.0	37.3	9.0	46.3	74.0	-27.7	Peak	Horizontal
	7536.5	35.1	12.9	48.0	74.0	-26.0	Peak	Horizontal
*	8709.5	36.5	13.0	49.5	74.0	-24.5	Peak	Horizontal
	4213.0	37.8	4.0	41.8	74.0	-32.2	Peak	Vertical
*	5573.0	36.9	6.9	43.8	74.0	-30.2	Peak	Vertical
	7400.5	35.9	12.6	48.5	74.0	-25.5	Peak	Vertical
*	8854.0	35.3	13.4	48.7	74.0	-25.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (90.5dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	2DH5	Test Site:	AC1
Test channel:	39	Test Engineer:	Dandy Li
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4825.0	37.5	5.9	43.4	74.0	-30.6	Peak	Horizontal
*	5853.5	36.1	7.8	43.9	74.0	-30.1	Peak	Horizontal
	7375.0	36.6	12.6	49.2	74.0	-24.8	Peak	Horizontal
*	8743.5	36.1	13.1	49.2	74.0	-24.8	Peak	Horizontal
	4986.5	39.7	6.2	45.9	74.0	-28.1	Peak	Vertical
*	6236.0	36.9	8.6	45.5	74.0	-28.5	Peak	Vertical
	7596.0	36.3	12.8	49.1	74.0	-24.9	Peak	Vertical
*	7919.0	35.3	13.4	48.7	74.0	-25.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (90.3dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	2DH5	Test Site:	AC1
Test channel:	78	Test Engineer:	Dandy Li
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4842.0	36.4	5.9	42.3	74.0	-31.7	Peak	Horizontal
*	6023.5	36.0	7.9	43.9	74.0	-30.1	Peak	Horizontal
	7468.5	35.8	12.9	48.7	74.0	-25.3	Peak	Horizontal
*	8845.5	35.9	13.3	49.2	74.0	-24.8	Peak	Horizontal
	4995.0	38.0	6.3	44.3	74.0	-29.7	Peak	Vertical
*	6023.5	35.5	7.9	43.4	74.0	-30.6	Peak	Vertical
	7468.5	35.3	12.9	48.2	74.0	-25.8	Peak	Vertical
*	9729.5	32.7	15.8	48.5	74.0	-25.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (91.0dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	3DH5	Test Site:	AC1
Test channel:	00	Test Engineer:	Dandy Li
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4850.5	36.8	5.9	42.7	74.0	-31.3	Peak	Horizontal
*	6550.5	35.8	10.2	46.0	74.0	-28.0	Peak	Horizontal
	7494.0	35.8	12.7	48.5	74.0	-25.5	Peak	Horizontal
*	8777.5	35.2	13.2	48.4	74.0	-25.6	Peak	Horizontal
	5003.5	38.2	6.3	44.5	74.0	-29.5	Peak	Vertical
*	5819.5	36.3	7.6	43.9	74.0	-30.1	Peak	Vertical
	7366.5	36.0	12.7	48.7	74.0	-25.3	Peak	Vertical
*	9891.0	32.9	16.6	49.5	74.0	-24.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (90.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	3DH5	Test Site:	AC1
Test channel:	39	Test Engineer:	Dandy Li
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4808.0	36.8	5.9	42.7	74.0	-31.3	Peak	Horizontal
*	5989.5	36.3	7.9	44.2	74.0	-29.8	Peak	Horizontal
	8191.0	36.8	13.1	49.9	74.0	-24.1	Peak	Horizontal
*	9814.5	33.6	16.4	50.0	74.0	-24.0	Peak	Horizontal
	4995.0	38.9	6.3	45.2	74.0	-28.8	Peak	Vertical
*	5743.0	36.1	7.4	43.5	74.0	-30.5	Peak	Vertical
	7468.5	34.8	12.9	47.7	74.0	-26.3	Peak	Vertical
*	8692.5	34.8	13.0	47.8	74.0	-26.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (91.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	3DH5	Test Site:	AC1
Test channel:	78	Test Engineer:	Dandy Li
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4833.5	36.5	5.9	42.4	74.0	-31.6	Peak	Horizontal
*	5879.0	35.6	7.8	43.4	74.0	-30.6	Peak	Horizontal
	7468.5	34.7	12.9	47.6	74.0	-26.4	Peak	Horizontal
*	7876.5	35.7	13.3	49.0	74.0	-25.0	Peak	Horizontal
	4995.0	38.9	6.3	45.2	74.0	-28.8	Peak	Vertical
*	6593.0	36.1	10.2	46.3	74.0	-27.7	Peak	Vertical
	7477.0	36.3	12.9	49.2	74.0	-24.8	Peak	Vertical
*	9899.5	33.2	16.6	49.8	74.0	-24.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (91.4dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/03/12 - 11:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: VULB 9168 _20-2000MHz	Polarity: Horizontal
EUT: E-reader	Power: AC 120V/60Hz
Worst Case Mode: Transmit at Channel 2480MHz by 3DH5	

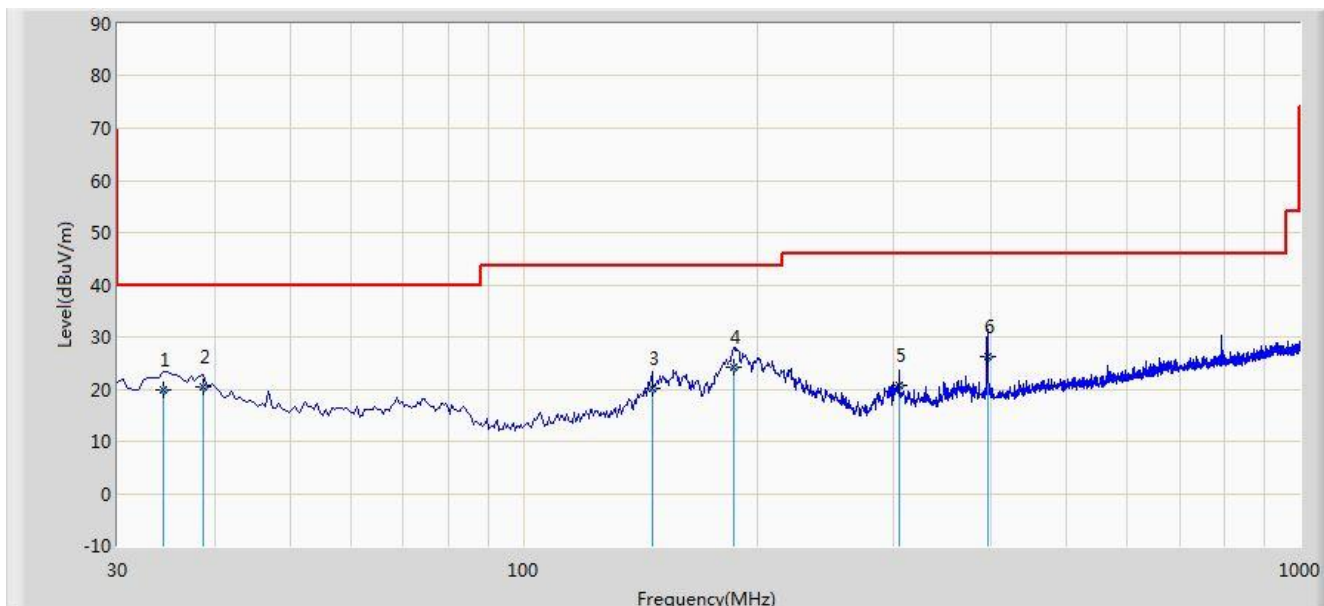


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		34.365	19.935	6.004	-20.065	40.000	13.931	QP
2		38.730	20.474	5.995	-19.526	40.000	14.479	QP
3		146.400	20.257	5.223	-23.243	43.500	15.034	QP
4	*	186.655	24.133	12.006	-19.367	43.500	12.127	QP
5		304.995	20.648	6.113	-25.352	46.000	14.535	QP
6		396.175	26.283	9.776	-19.717	46.000	16.507	QP

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Site: AC1	Time: 2018/03/12 - 11:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: VULB 9168 _20-2000MHz	Polarity: Vertical
EUT: E-reader	Power: AC 120V/60Hz
Worst Case Mode: Transmit at Channel 2480MHz by 3DH5	

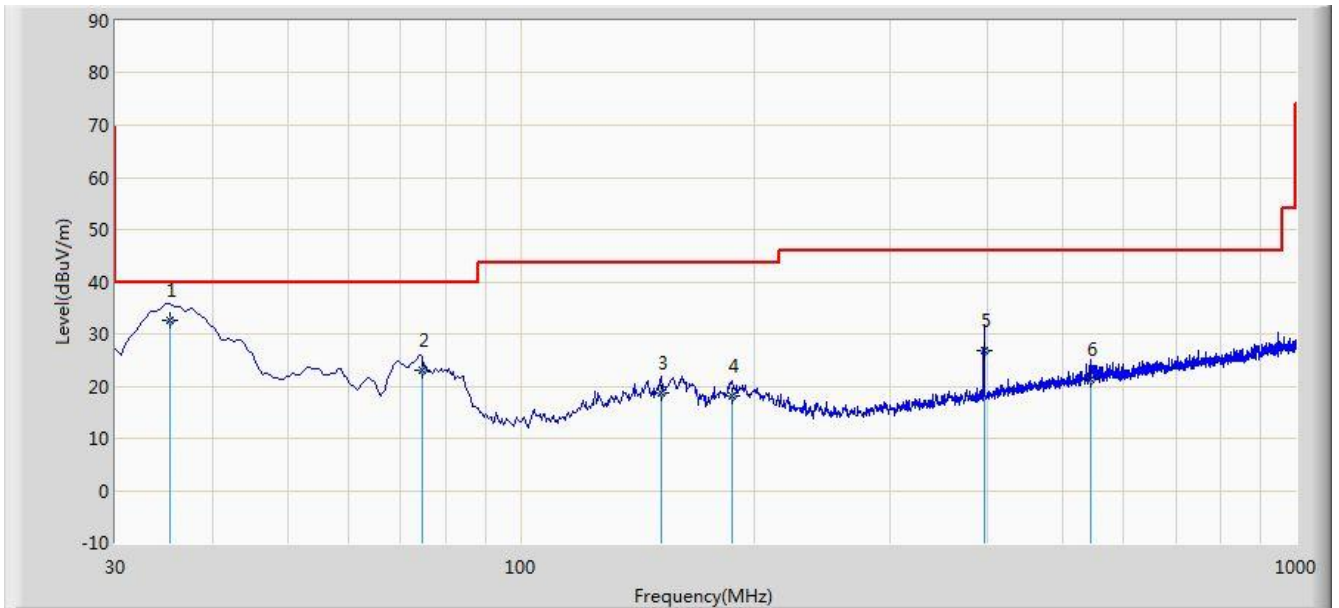

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	35.335	32.678	18.665	-7.322	40.000	14.013	QP
2		74.620	22.904	11.998	-17.096	40.000	10.905	QP
3		151.735	18.614	3.327	-24.886	43.500	15.287	QP
4		187.625	18.018	6.003	-25.482	43.500	12.015	QP
5		396.175	26.844	10.337	-19.156	46.000	16.507	QP
6		544.585	21.337	1.887	-24.663	46.000	19.450	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

7.10. Radiated Restricted Band Edge Measurement

7.10.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.10.2.Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.10.3.Test Setting

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces


7.10.4.Test Setup

1GHz ~ 18GHz Test Setup:

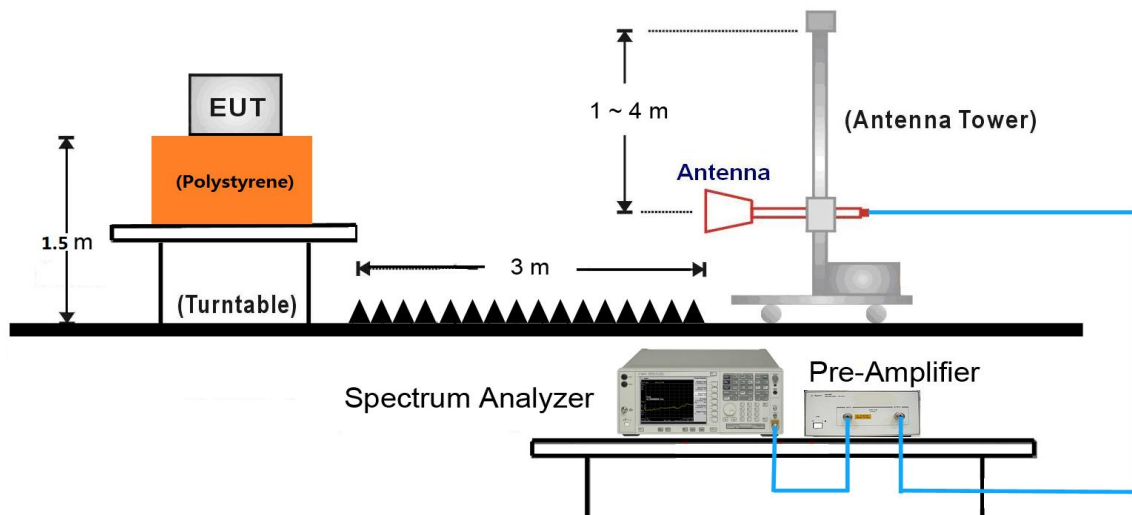

7.10.5.Test Result

Site: AC1	Time: 2018/03/09 - 02:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: E-reader	Power: By Battery
Test Mode: Transmit by DH5 at channel 2402MHz	

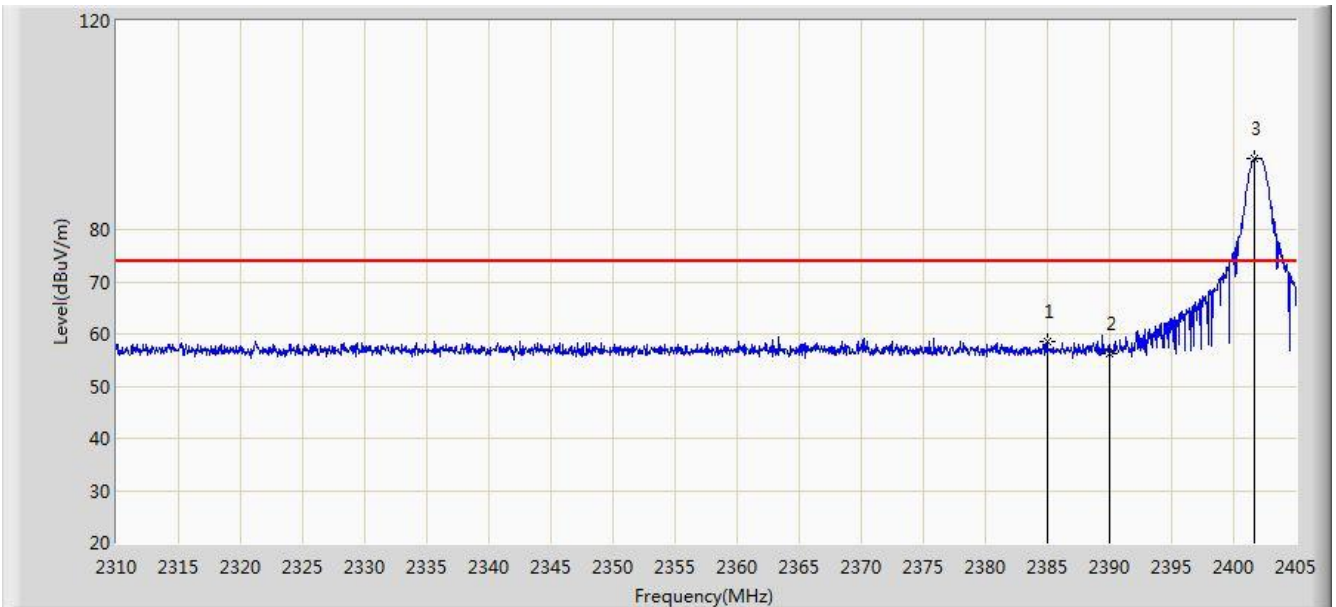


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.002	58.409	26.075	-15.591	74.000	32.334	PK
2			2390.000	56.240	23.913	-17.760	74.000	32.327	PK
3		*	2401.675	93.558	61.253	N/A	N/A	32.305	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/09 - 02:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: E-reader	Power: By Battery
Test Mode: Transmit by DH5 at channel 2402MHz	

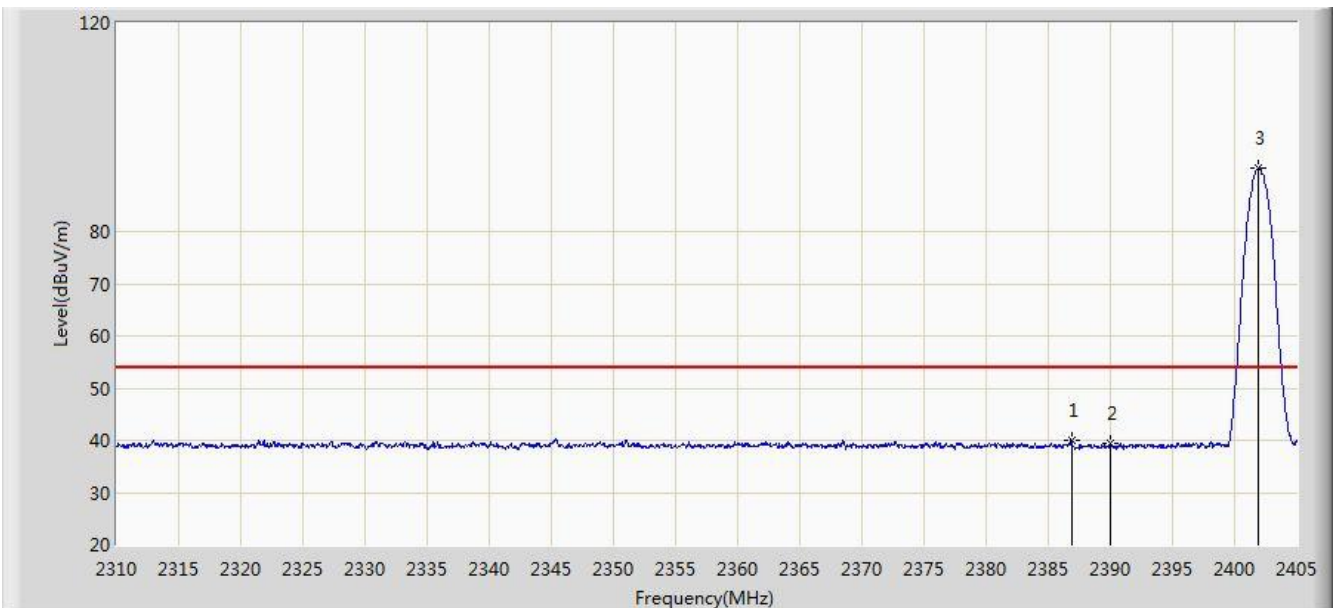


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.855	40.098	7.767	-13.902	54.000	32.331	AV
2			2390.000	39.422	7.095	-14.578	54.000	32.327	AV
3		*	2401.865	92.263	59.958	N/A	N/A	32.305	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/09 - 02:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: E-reader	Power: By Battery
Test Mode: Transmit by DH5 at channel 2402MHz	

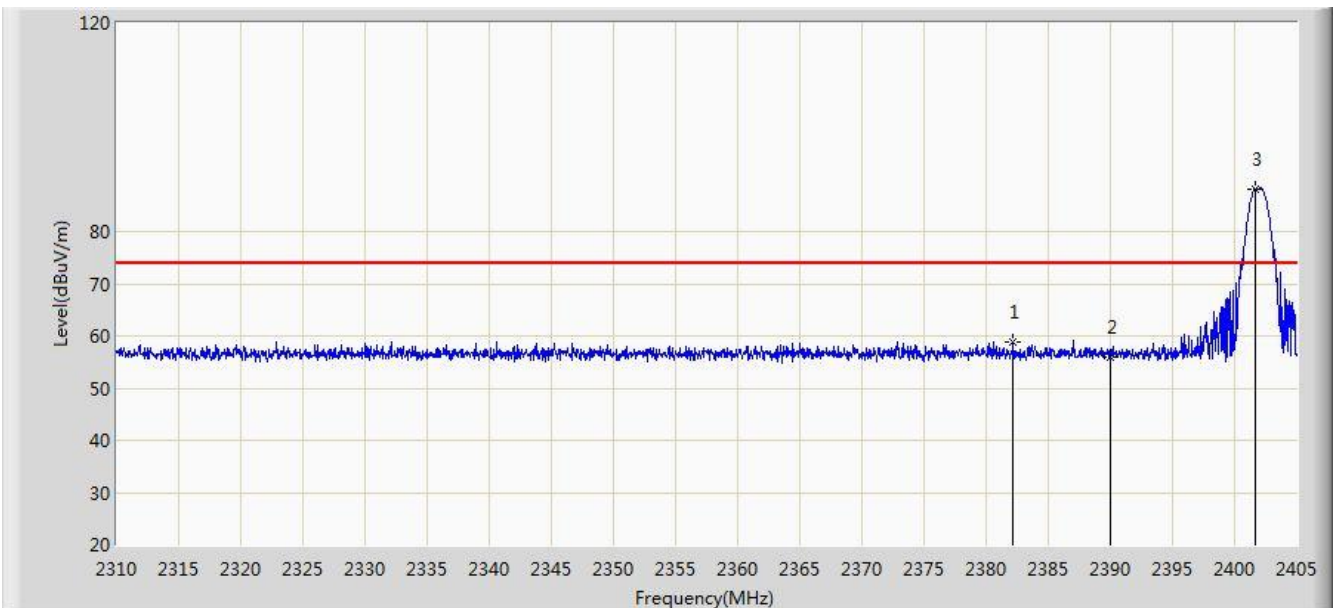


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2382.200	58.887	26.550	-15.113	74.000	32.337	PK
2			2390.000	55.861	23.534	-18.139	74.000	32.327	PK
3		*	2401.675	88.200	55.895	N/A	N/A	32.305	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/09 - 02:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: E-reader	Power: By Battery
Test Mode: Transmit by DH5 at channel 2402MHz	

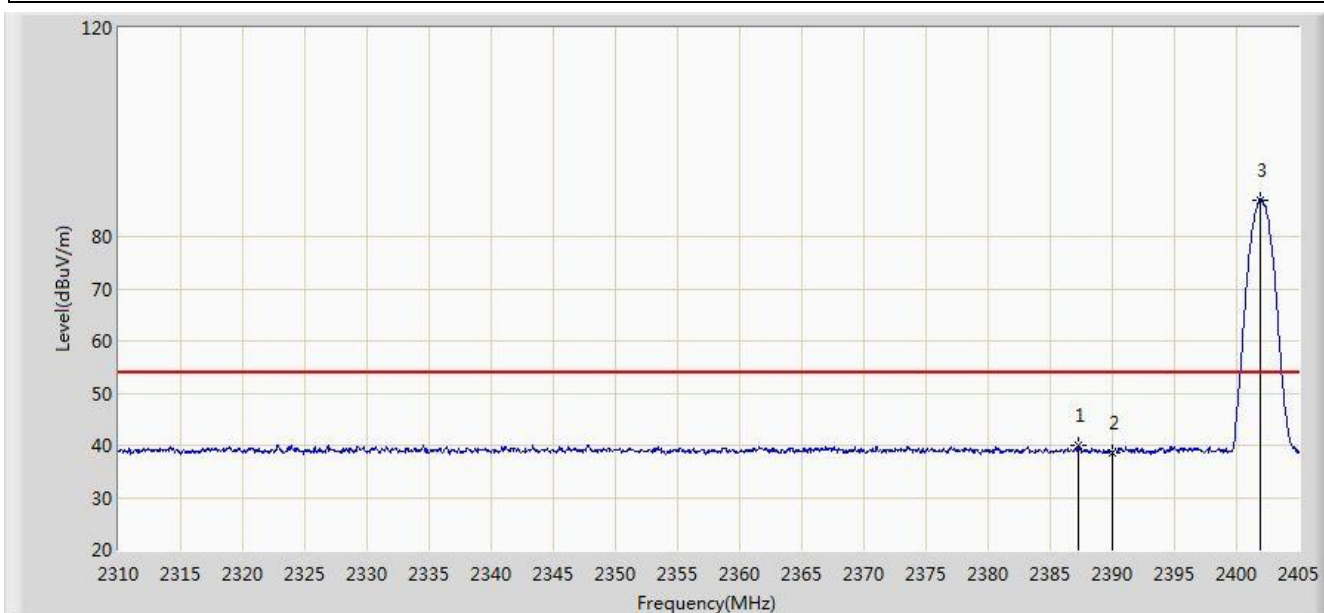


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.235	39.882	7.551	-14.118	54.000	32.331	AV
2			2390.000	38.618	6.291	-15.382	54.000	32.327	AV
3		*	2401.865	87.056	54.751	N/A	N/A	32.305	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/09 - 02:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: E-reader	Power: By Battery
Test Mode: Transmit by DH5 at channel 2480MHz	

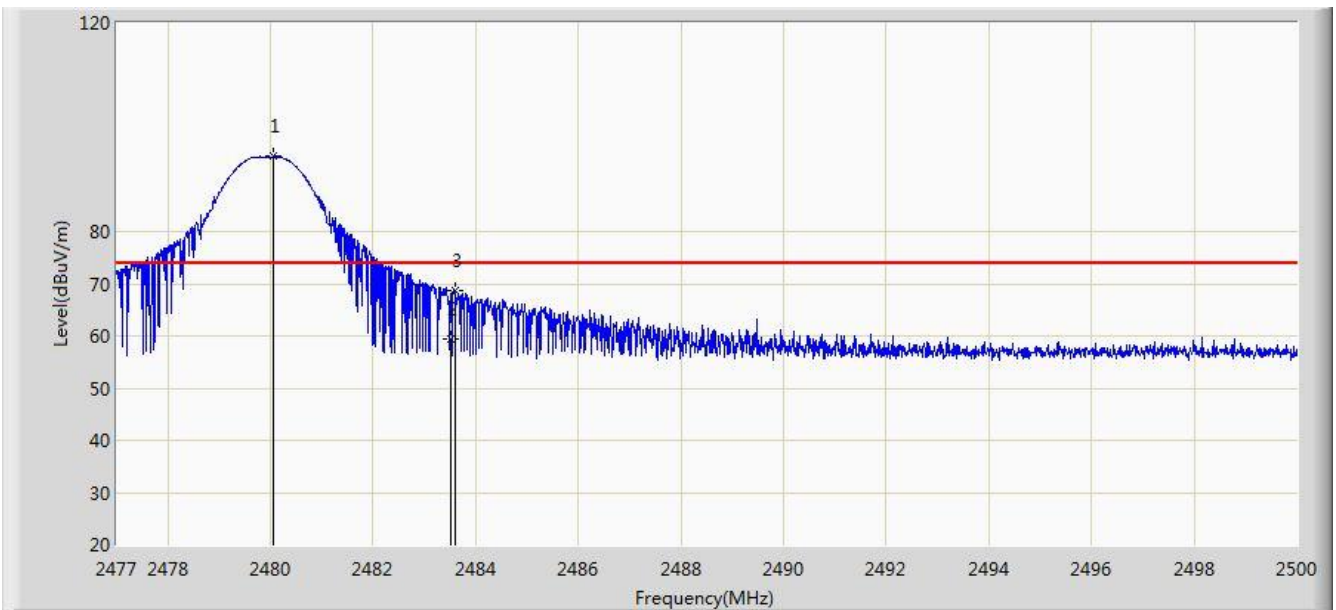


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.059	94.350	62.024	N/A	N/A	32.325	PK
2			2483.500	59.519	27.180	-14.481	74.000	32.340	PK
3			2483.601	68.781	36.441	-5.219	74.000	32.340	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/09 - 02:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: E-reader	Power: By Battery
Test Mode: Transmit by DH5 at channel 2480MHz	

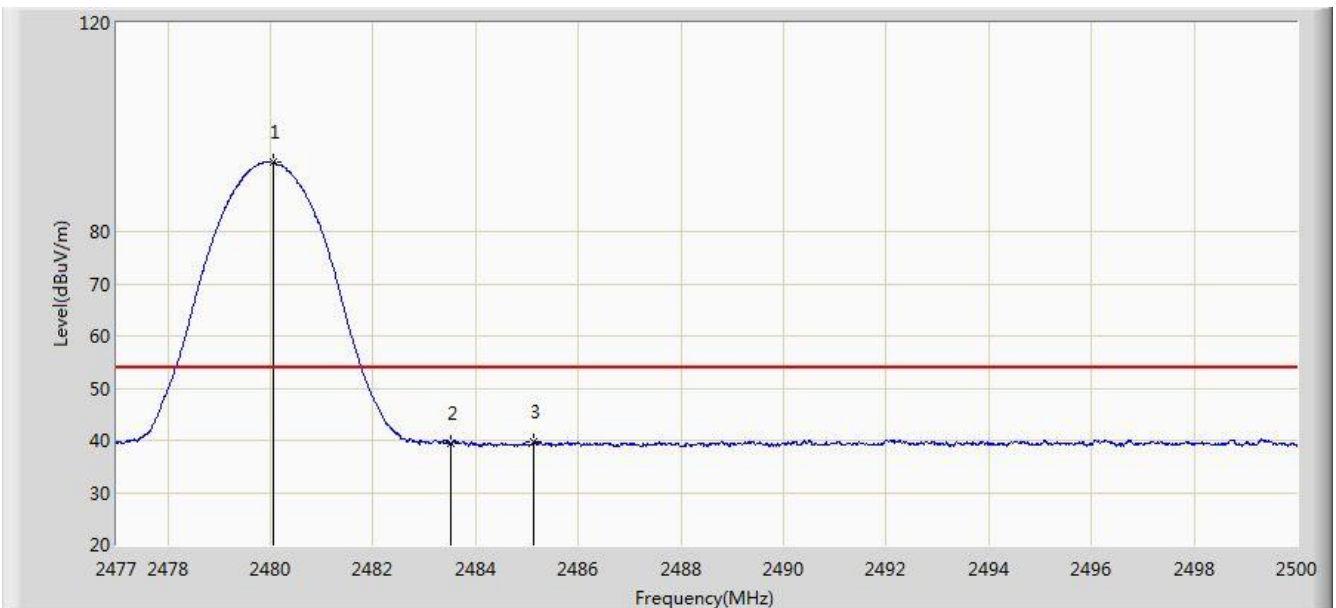


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.059	93.216	60.890	N/A	N/A	32.325	AV
2			2483.500	39.414	7.075	-14.586	54.000	32.340	AV
3			2485.119	39.830	7.484	-14.170	54.000	32.346	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/09 - 02:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: E-reader	Power: By Battery
Test Mode: Transmit by DH5 at channel 2480MHz	

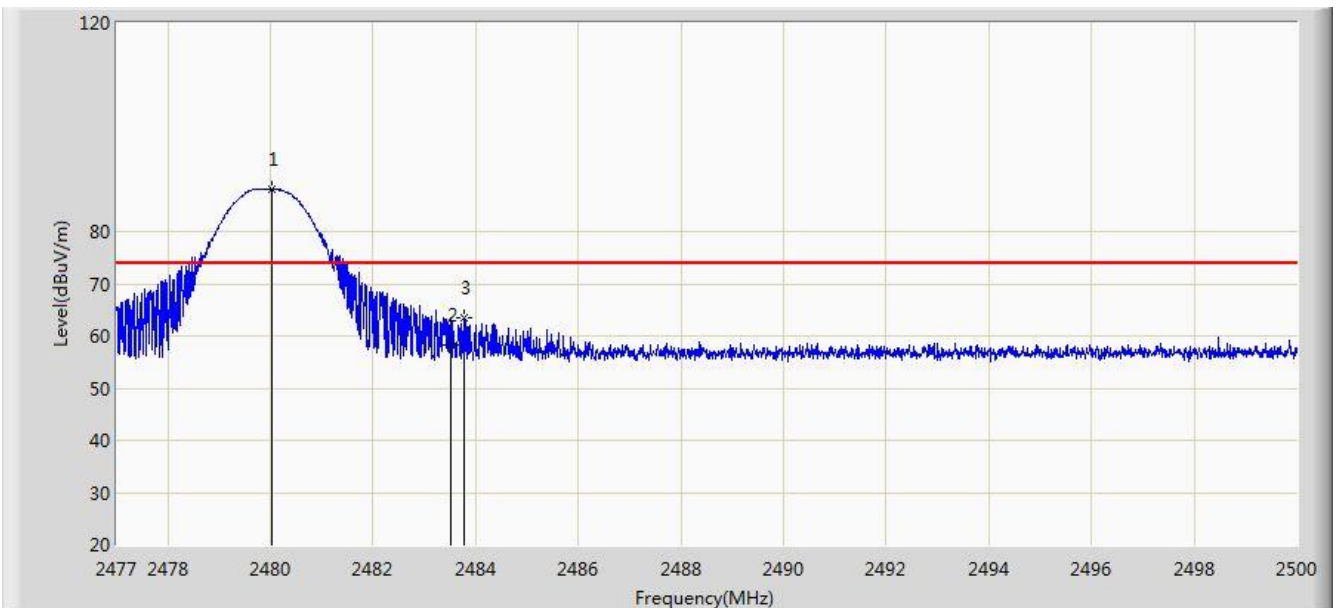


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.013	88.184	55.859	N/A	N/A	32.325	PK
2			2483.500	58.403	26.064	-15.597	74.000	32.340	PK
3			2483.785	63.503	31.163	-10.497	74.000	32.340	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/09 - 02:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: E-reader	Power: By Battery
Test Mode: Transmit by DH5 at channel 2480MHz	

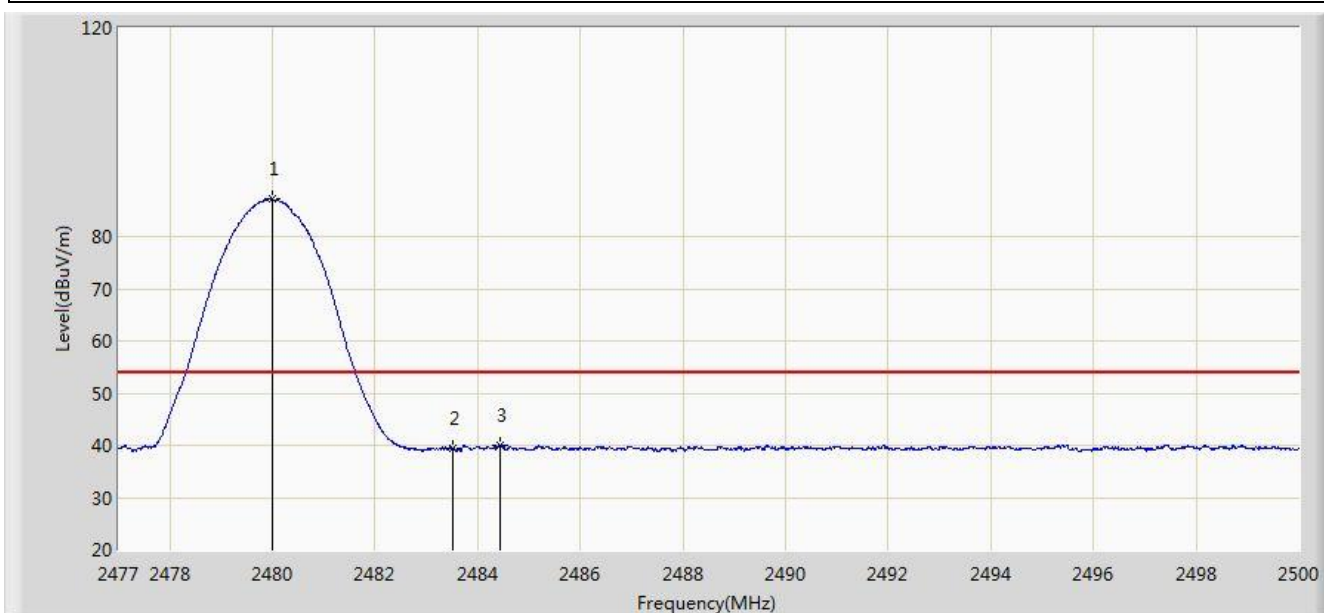


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.990	87.126	54.801	N/A	N/A	32.325	AV
2			2483.500	39.451	7.112	-14.549	54.000	32.340	AV
3			2484.440	40.129	7.786	-13.871	54.000	32.343	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/09 - 02:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: E-reader	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2402MHz	

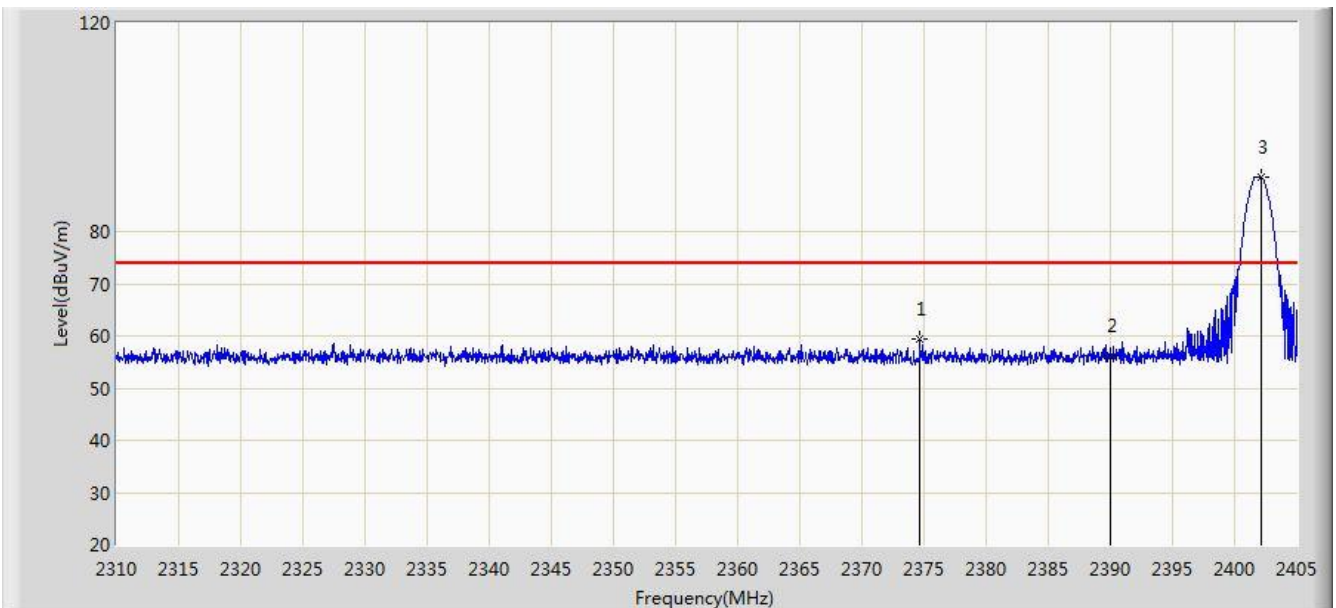


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2374.647	59.292	26.943	-14.708	74.000	32.349	PK
2			2390.000	56.147	23.820	-17.853	74.000	32.327	PK
3		*	2402.150	90.524	58.220	N/A	N/A	32.304	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/09 - 02:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: E-reader	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2402MHz	

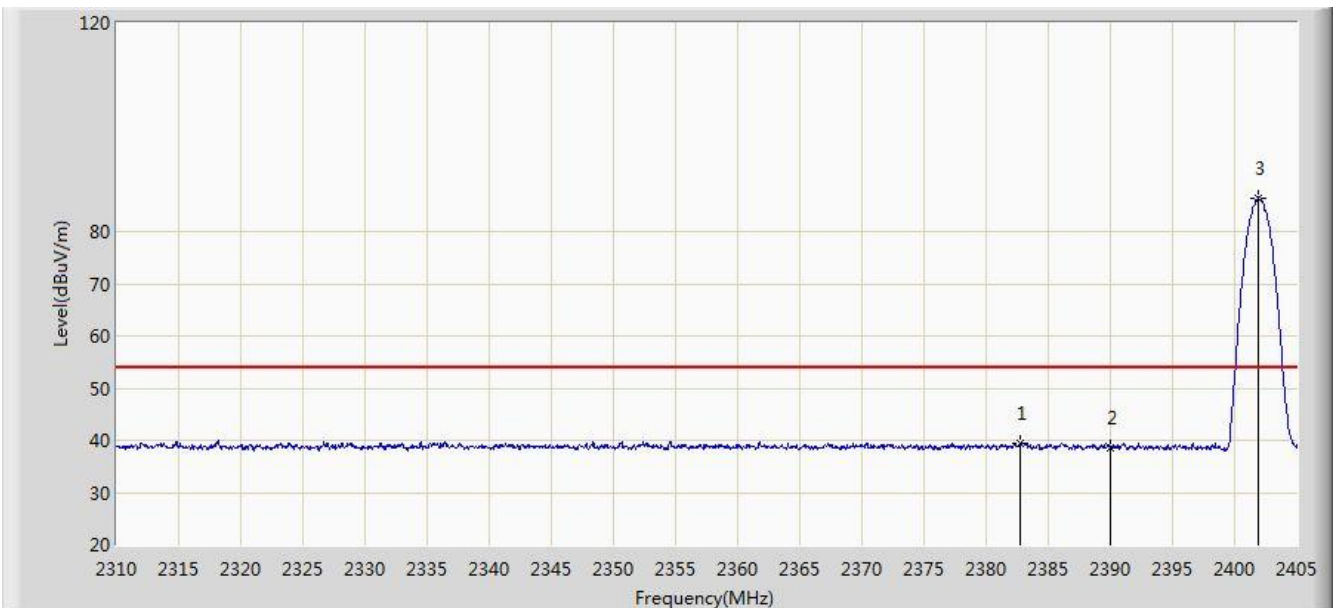


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2382.770	39.411	7.074	-14.589	54.000	32.337	AV
2			2390.000	38.676	6.349	-15.324	54.000	32.327	AV
3		*	2401.865	86.378	54.073	N/A	N/A	32.305	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/09 - 02:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: E-reader	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2402MHz	

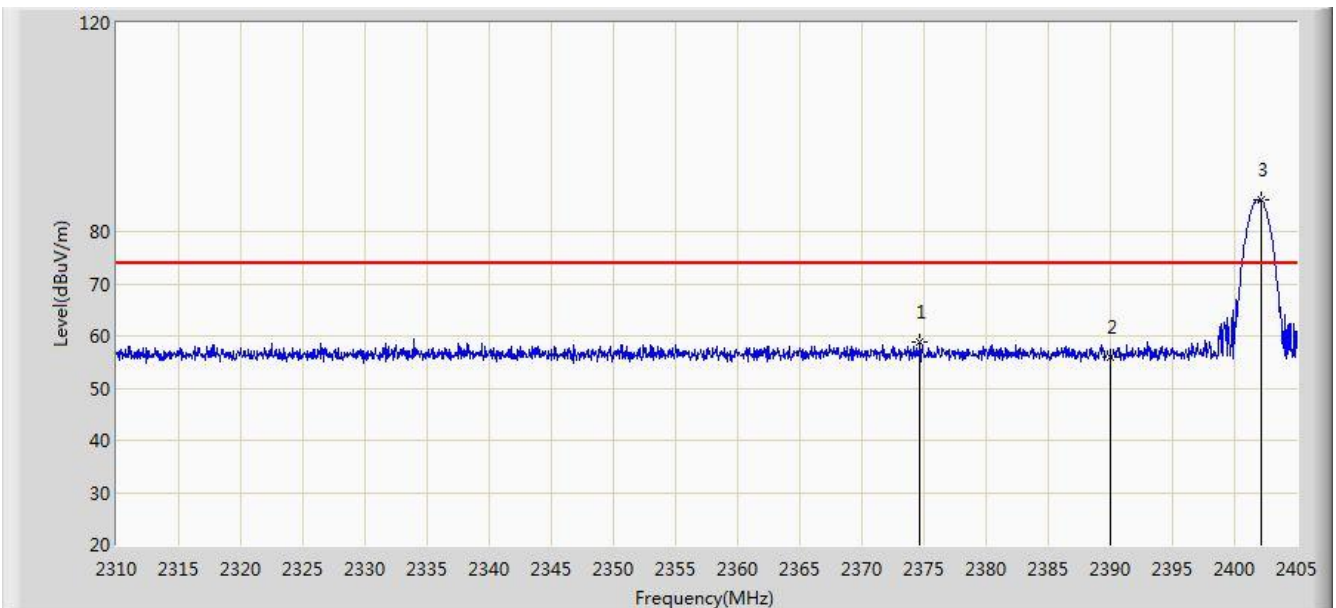


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2374.695	58.981	26.632	-15.019	74.000	32.349	PK
2			2390.000	55.983	23.656	-18.017	74.000	32.327	PK
3		*	2402.150	86.046	53.742	N/A	N/A	32.304	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/09 - 02:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: E-reader	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2402MHz	

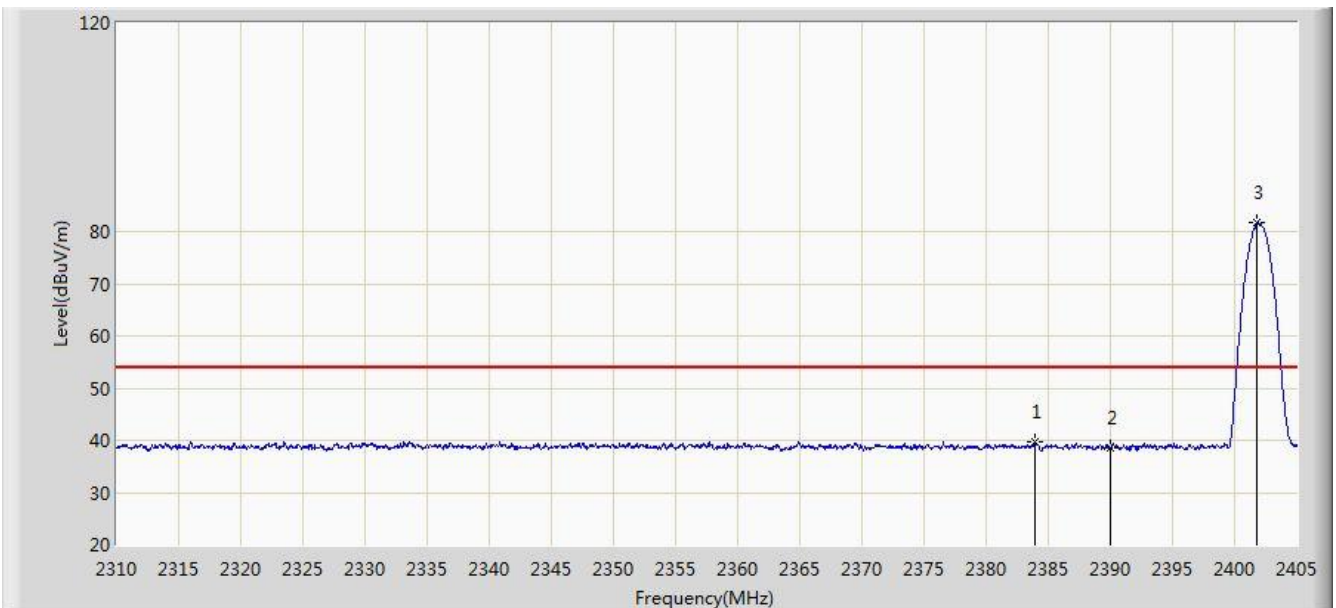


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2383.910	39.780	7.445	-14.220	54.000	32.336	AV
2			2390.000	38.642	6.315	-15.358	54.000	32.327	AV
3		*	2401.817	81.682	49.377	N/A	N/A	32.305	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/09 - 02:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: E-reader	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2480MHz	

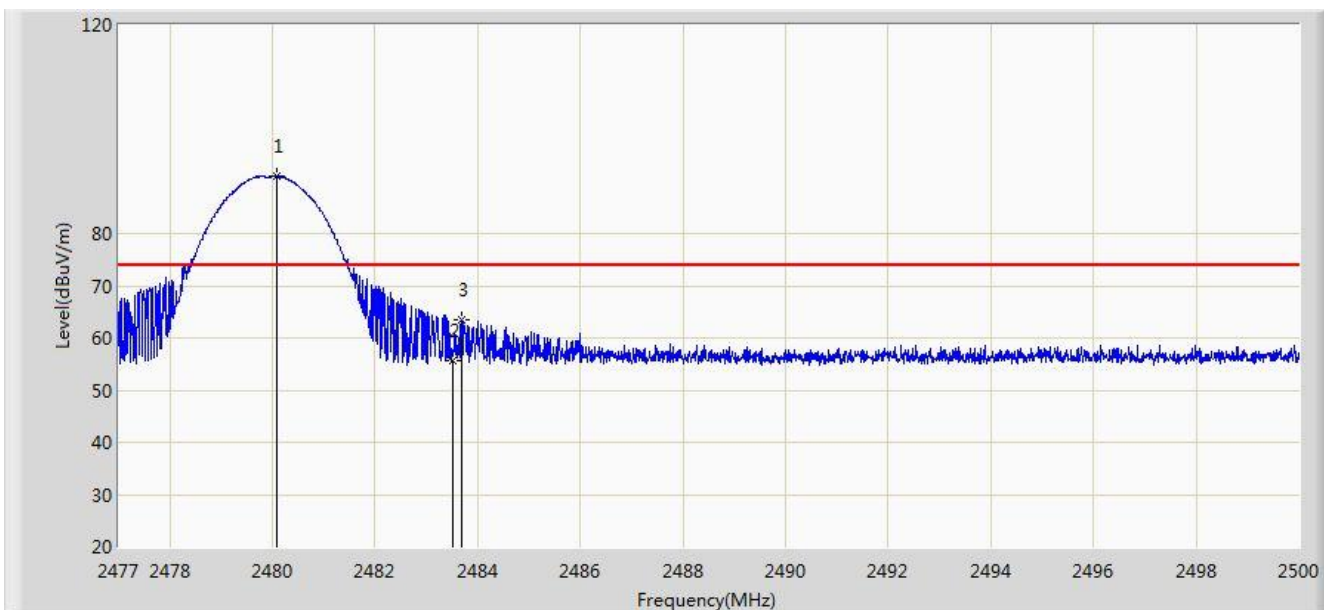


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.071	91.005	58.679	N/A	N/A	32.325	PK
2			2483.500	55.742	23.403	-18.258	74.000	32.340	PK
3			2483.693	63.513	31.173	-10.487	74.000	32.340	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/09 - 02:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: E-reader	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2480MHz	

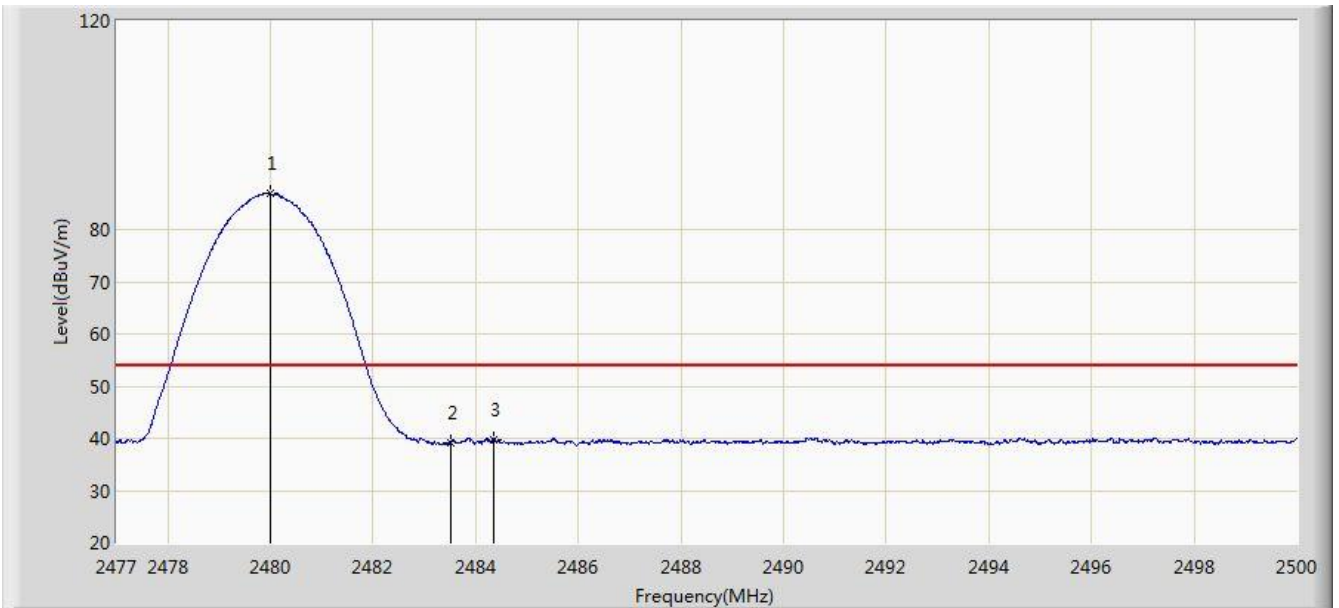


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.990	86.932	54.607	N/A	N/A	32.325	AV
2			2483.500	39.207	6.868	-14.793	54.000	32.340	AV
3			2484.360	39.752	7.409	-14.248	54.000	32.342	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/09 - 02:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: E-reader	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2480MHz	

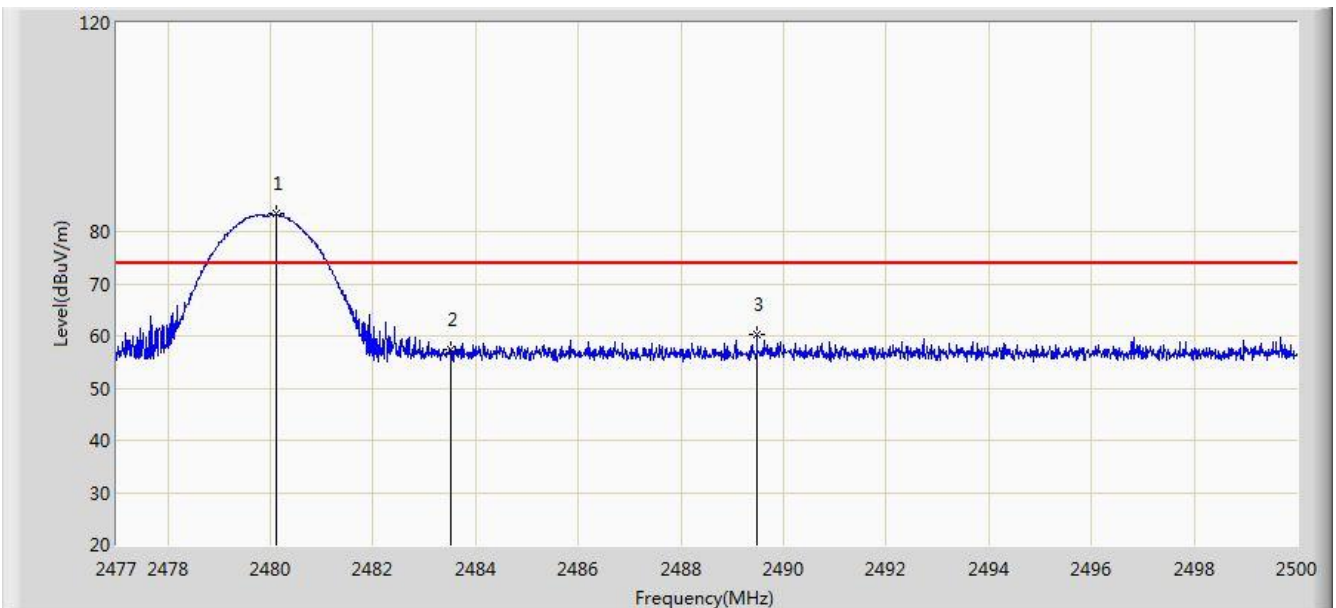


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.116	83.385	51.059	N/A	N/A	32.325	PK
2			2483.500	57.267	24.928	-16.733	74.000	32.340	PK
3			2489.478	60.330	27.967	-13.670	74.000	32.362	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/09 - 02:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: E-reader	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2480MHz	

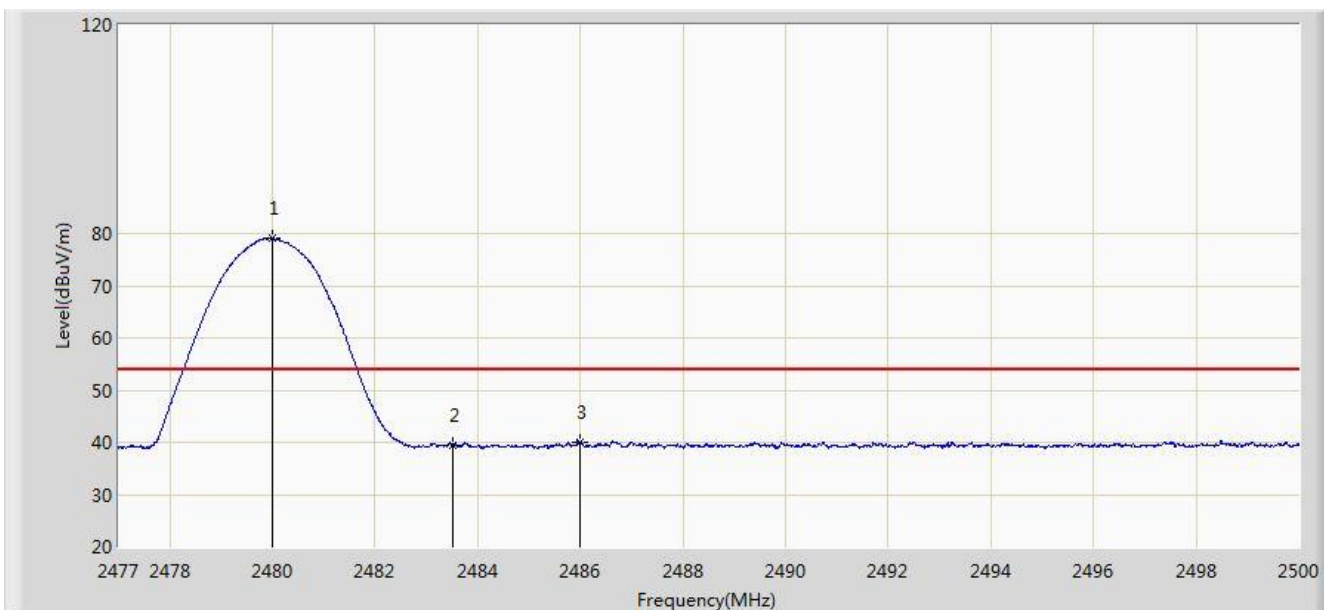


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.990	79.132	46.807	N/A	N/A	32.325	AV
2			2483.500	39.555	7.216	-14.445	54.000	32.340	AV
3			2485.993	40.111	7.762	-13.889	54.000	32.349	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/09 - 02:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: E-reader	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2402MHz	

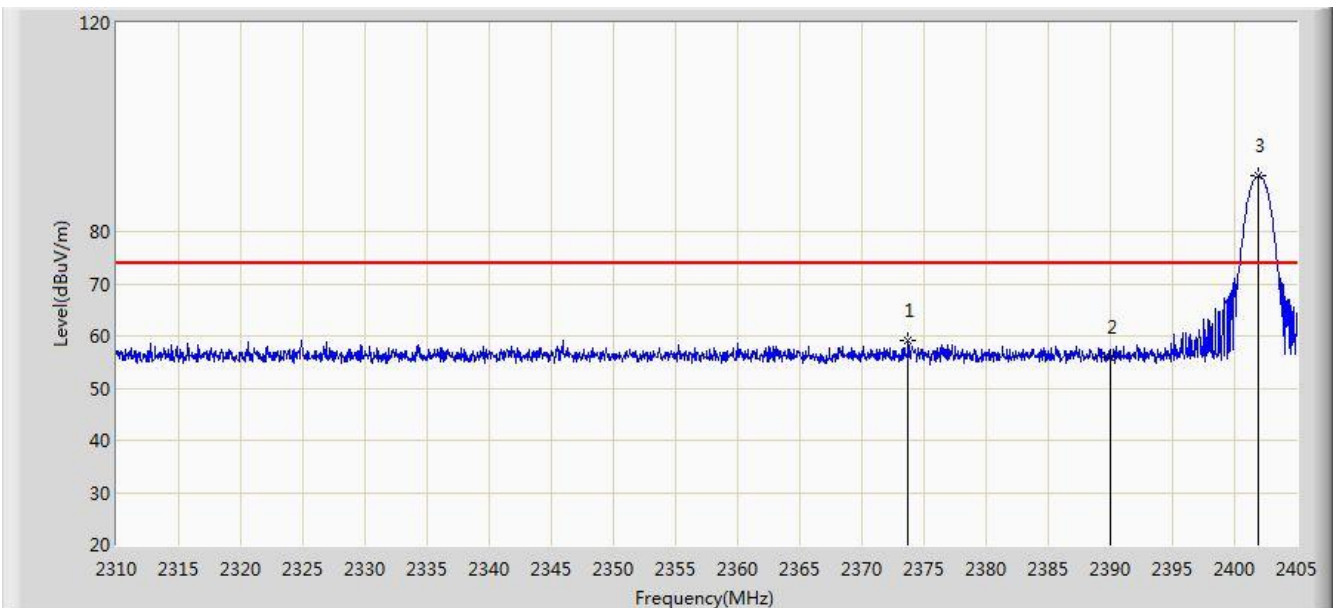


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2373.745	59.063	26.712	-14.937	74.000	32.351	PK
2			2390.000	55.908	23.581	-18.092	74.000	32.327	PK
3		*	2401.865	90.828	58.523	N/A	N/A	32.305	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/09 - 02:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: E-reader	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2402MHz	

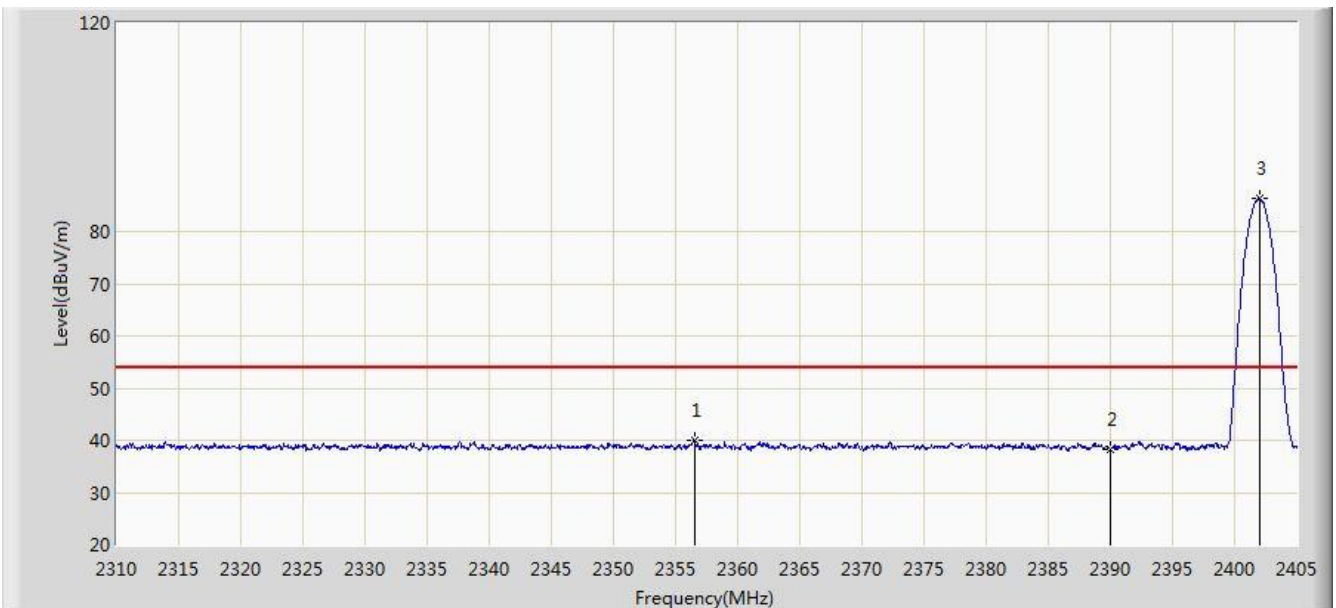


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2356.502	40.060	7.677	-13.940	54.000	32.383	AV
2			2390.000	38.347	6.020	-15.653	54.000	32.327	AV
3		*	2402.008	86.364	54.060	N/A	N/A	32.305	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/09 - 02:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: E-reader	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2402MHz	

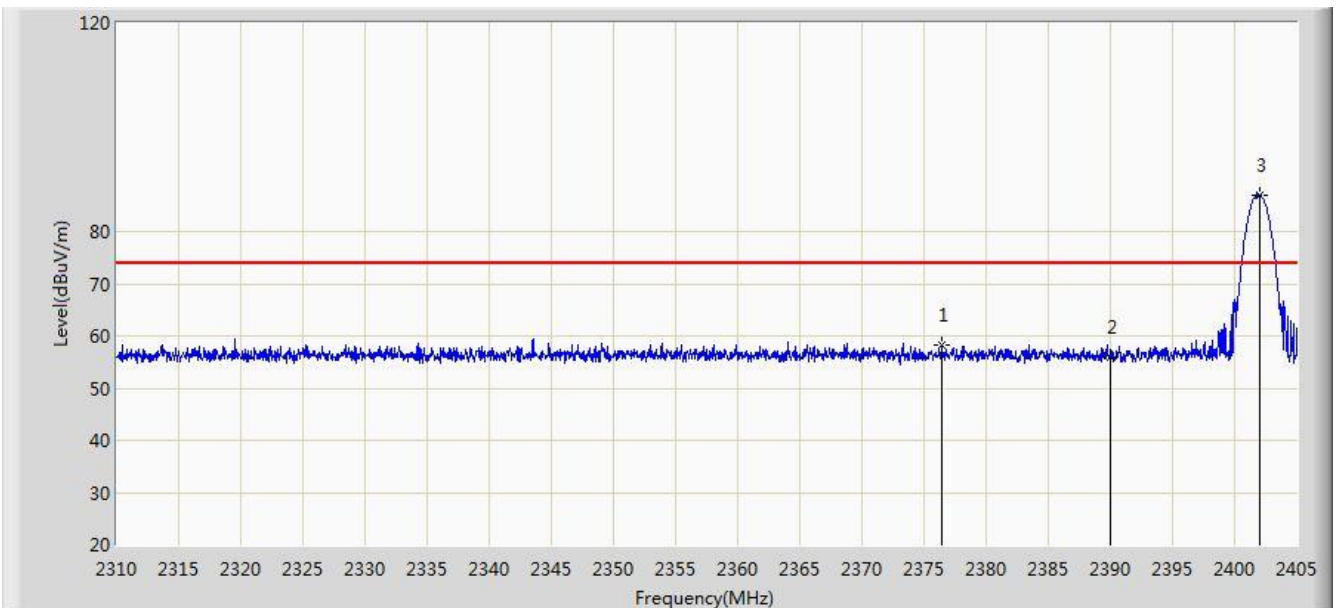


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2376.405	58.135	25.789	-15.865	74.000	32.346	PK
2			2390.000	55.934	23.607	-18.066	74.000	32.327	PK
3		*	2402.008	87.070	54.766	N/A	N/A	32.305	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/09 - 02:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: E-reader	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2402MHz	

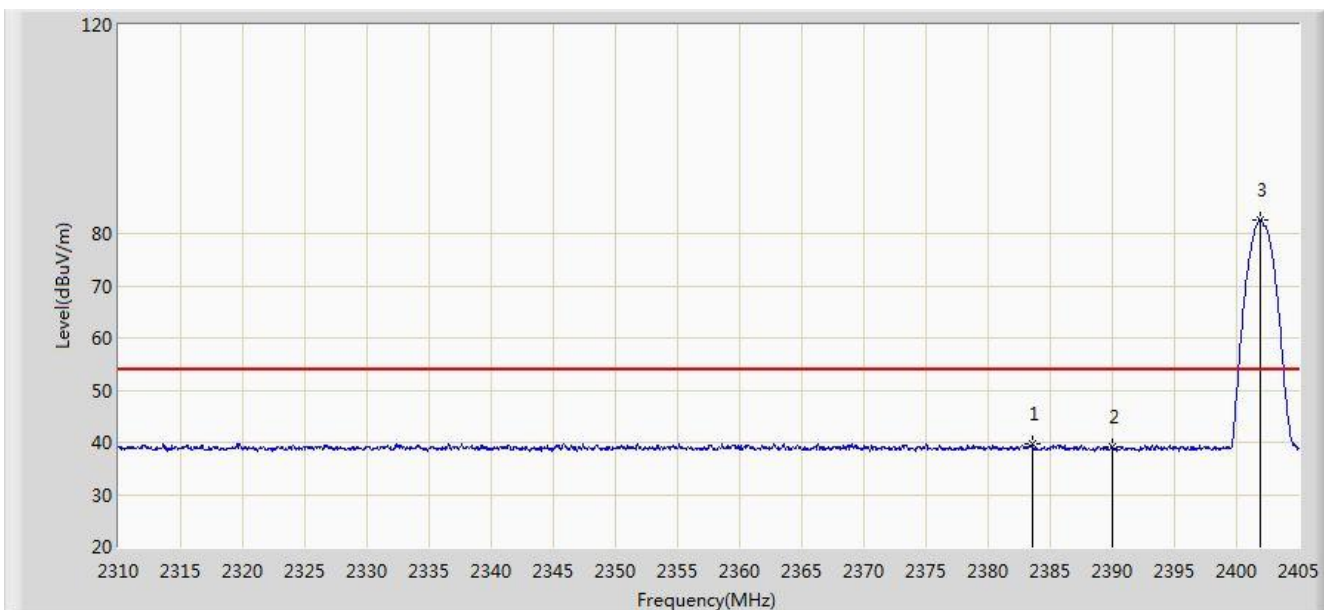


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2383.530	39.574	7.238	-14.426	54.000	32.336	AV
2			2390.000	39.091	6.764	-14.909	54.000	32.327	AV
3		*	2401.913	82.597	50.292	N/A	N/A	32.305	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/09 - 02:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: E-reader	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2480MHz	

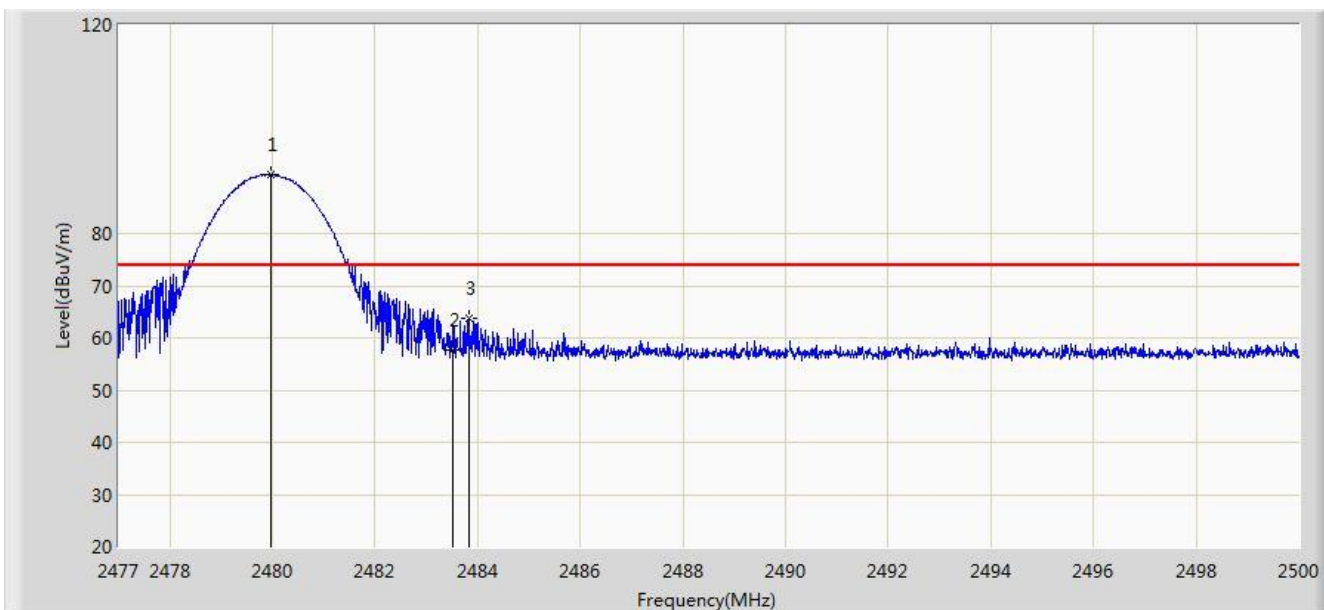


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.956	91.360	59.035	N/A	N/A	32.325	PK
2			2483.500	57.622	25.283	-16.378	74.000	32.340	PK
3			2483.831	63.778	31.438	-10.222	74.000	32.340	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/09 - 02:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: E-reader	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2480MHz	

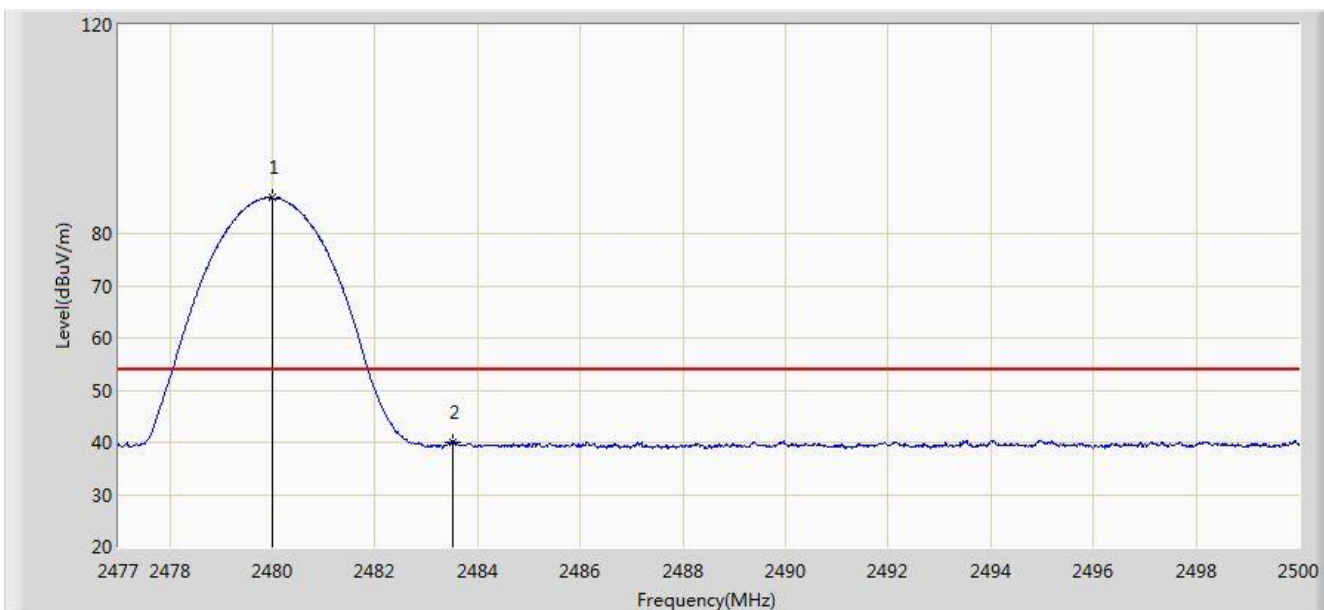


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.001	86.895	54.570	N/A	N/A	32.325	AV
2			2483.500	40.088	7.749	-13.912	54.000	32.340	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/09 - 02:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: E-reader	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2480MHz	

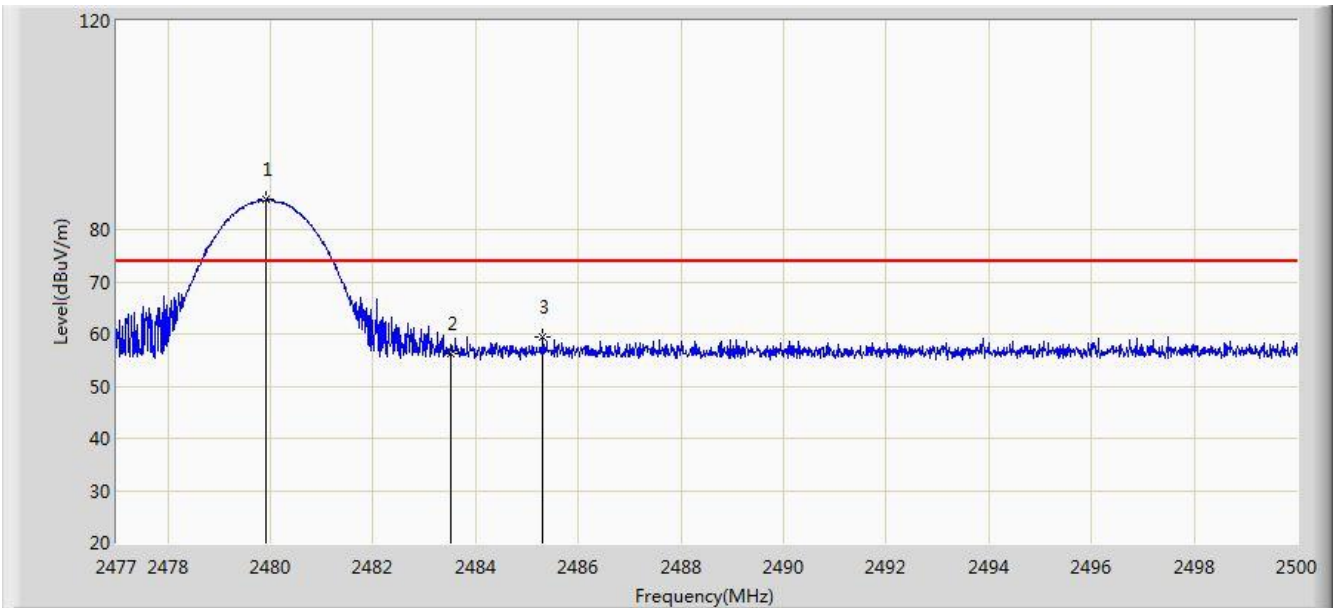


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.921	85.697	53.372	N/A	N/A	32.325	PK
2			2483.500	56.336	23.997	-17.664	74.000	32.340	PK
3			2485.314	59.510	27.164	-14.490	74.000	32.346	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/09 - 02:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: E-reader	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2480MHz	

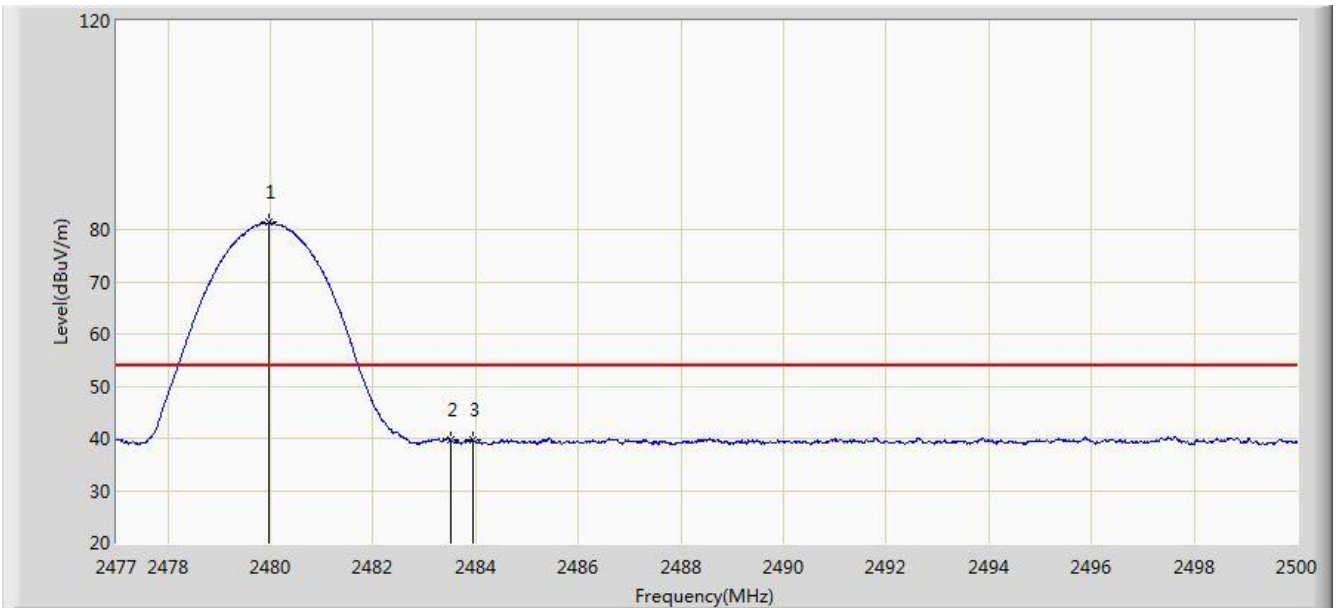

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.979	81.324	48.999	N/A	N/A	32.325	AV
2			2483.500	39.603	7.264	-14.397	54.000	32.340	AV
3			2483.935	39.853	7.512	-14.147	54.000	32.340	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.11. AC Conducted Emissions Measurement


7.11.1. Test Limit

FCC 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.11.2. Test Setup

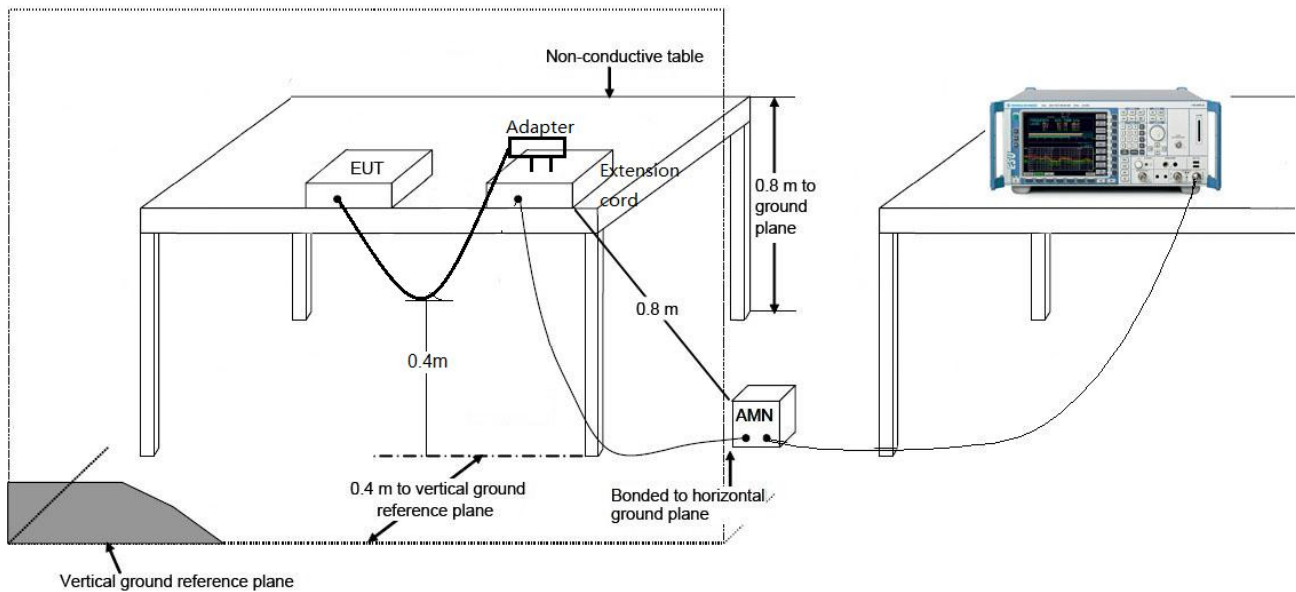

7.11.3.Test Result

Site: SR2	Time: 2018/03/11 - 16:14
Limit: FCC_Part15.207_CE_AC Power	Engineer: Andy Zhu
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: E-reader	Power: AC 120V/60Hz
Worst Case Mode: Transmit at Channel 2402MHz By 2DH5	

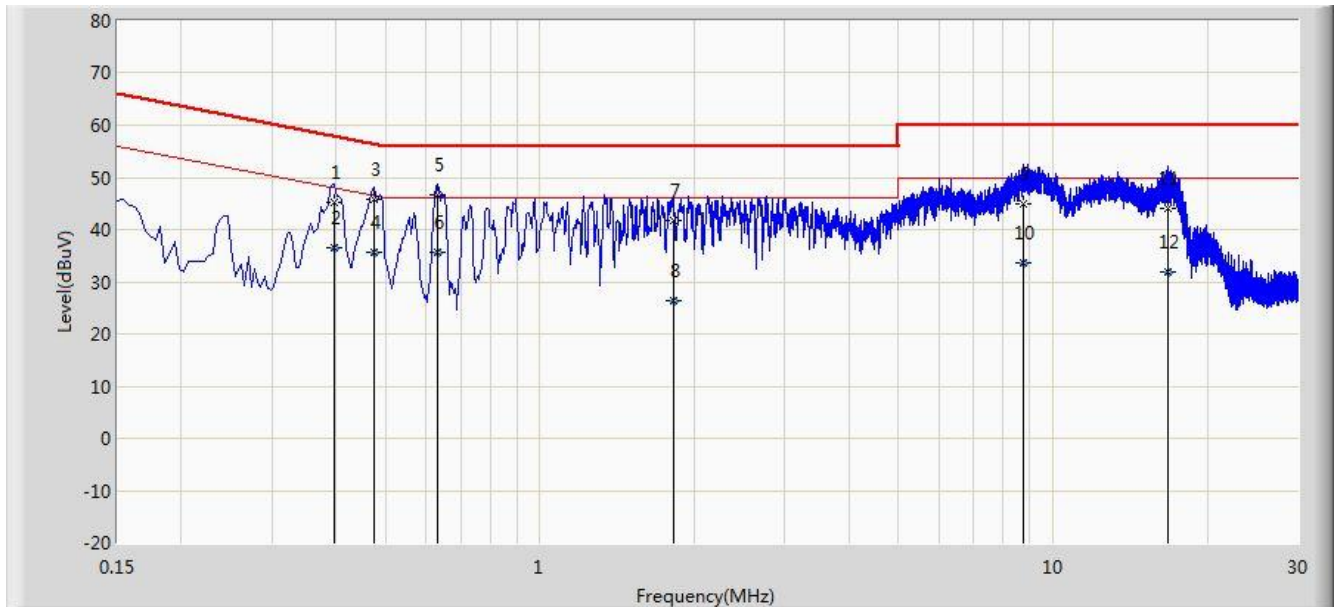


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.398	45.317	35.206	-12.578	57.895	10.111	QP
2			0.398	36.592	26.482	-11.303	47.895	10.111	AV
3			0.474	45.856	35.689	-10.587	56.444	10.167	QP
4			0.474	35.560	25.393	-10.883	46.444	10.167	AV
5		*	0.630	46.615	36.500	-9.385	56.000	10.115	QP
6			0.630	35.757	25.643	-10.243	46.000	10.115	AV
7			1.818	41.612	31.733	-14.388	56.000	9.879	QP
8			1.818	26.521	16.641	-19.479	46.000	9.879	AV
9			8.778	44.955	34.772	-15.045	60.000	10.182	QP
10			8.778	33.666	23.483	-16.334	50.000	10.182	AV
11			16.710	44.060	33.946	-15.940	60.000	10.114	QP
12			16.710	31.993	21.878	-18.007	50.000	10.114	AV

Note: Measure Level (dBuV) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SR2	Time: 2018/03/11 - 16:18
Limit: FCC_Part15.207_CE_AC Power	Engineer: Andy Zhu
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: E-reader	Power: AC 120V/60Hz
Worst Case Mode: Transmit at Channel 2402MHz By 2DH5	

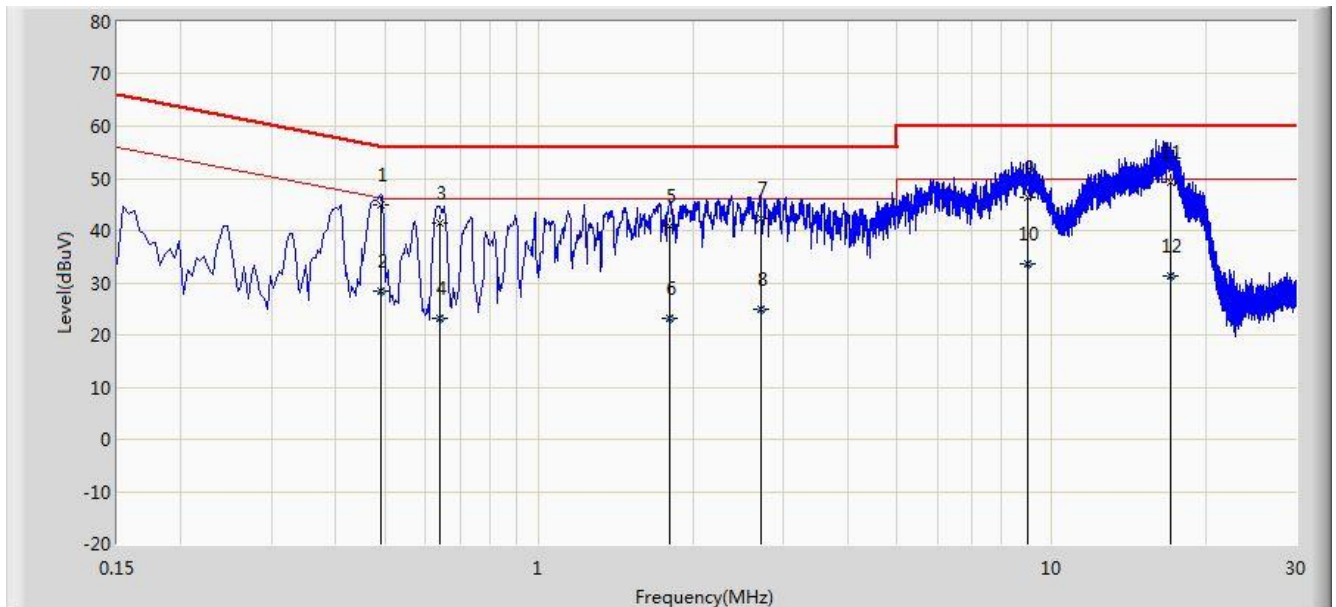

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.490	45.055	34.897	-11.112	56.168	10.158	QP
2			0.490	28.348	18.190	-17.820	46.168	10.158	AV
3			0.638	41.375	31.280	-14.625	56.000	10.095	QP
4			0.638	23.148	13.053	-22.852	46.000	10.095	AV
5			1.798	40.872	30.994	-15.128	56.000	9.878	QP
6			1.798	23.165	13.287	-22.835	46.000	9.878	AV
7			2.702	42.399	32.549	-13.601	56.000	9.850	QP
8			2.702	24.834	14.983	-21.166	46.000	9.850	AV
9			9.014	46.474	36.320	-13.526	60.000	10.154	QP
10			9.014	33.538	23.384	-16.462	50.000	10.154	AV
11		*	17.074	49.136	39.052	-10.864	60.000	10.084	QP
12			17.074	31.394	21.310	-18.606	50.000	10.084	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **E-reader** is in compliance with Part 15C of the FCC Rules.

The End