

# Radio modules deRFarm7

## 25A00|25C00

### Datasheet

- The pluggable radio module deRFarm7-25A00 features an AT91SAM7X512 microcontroller and a 2.4 GHz transceiver AT86RF231. The module complies with IEEE 802.15.4 and can be used for ZigBee / 6LoWPAN / RF4CE or proprietary applications.
- The 25A00 module has two 23 pin male connectors (1.27 mm pitch) which give access to most functions of the AT91SAM7X512. The 25C00 is a solderable variant.
- The chip ceramic antenna provides a transmitting power of +2.5 dBm ERP. Distances of more than 200 m can be reached for line of sight conditions. The integrated transceiver obtains a receiver sensitivity of -101 dBm. A hardware 128-Bit AES encryption engine is part of the transceiver.
- The power supply range is from 3.0 VDC to 3.6 VDC with transmit and receive currents of approx. 45 mA @ 12MHz CPU clock. A current consumption of less then 250 µA can be achieved in sleep mode.
- Special features of the deRFarm7 module family are the integrated Ethernet MAC (EMAC) and the integrated USB device port (UDP)




#### Technical Data

<b>Dimensions</b>	30 x 22.7 x 8.2 mm (25A00) 30 x 20.4 x 4.1 mm (25C00)
<b>Operating temperature</b>	-40 to +85°C
<b>Control and display elements</b>	no
<b>Power supply</b>	3.0 – 3.6 VDC
<b>Power consumption</b>	Active: 45 mA @ 12MHz    Sleep: < 250 µA
<b>Connections</b>	2 x 23 pins
<b>Antenna</b>	Chip ceramic
<b>Antenna gain</b>	+1.3 dBi (Peak), -0.5 dBi (Average)
<b>Antenna diversity</b>	no
<b>Range</b>	> 200 m (line of sight)
<b>Frequency range</b>	2.4 GHz
<b>Transmitting power</b>	+2.1 dBm ERP
<b>Receiver sensitivity</b>	-101 dBm
<b>IEEE Standard</b>	802.15.4
<b>Data rate (brutto)</b>	250 kbit/s, 500 kbit/s, 1 Mbit/s, 2 Mbit/s
<b>Microcontroller</b>	AT91SAM7X512
<b>Transceiver</b>	AT86RF231
<b>Interfaces</b>	JTAG, DBGU, I2C, SPI, UART, USB, RMII, GPIO, ADC
<b>Certification</b>	CE, ETSI, FCC


#### Technical Data

### Pin configuration

1:	VCC	13:	PA18	24:	VCC	36:	PB28
2:	DGND	14:	PA3	25:	DGND	37:	PB5
3:	ADVREF	15:	PA17	26:	PA27	38:	TCK
4:	USBDM	16:	PB0	27:	PA0	39:	PB7
5:	RSTN	17:	PA16	28:	PA28	40:	TMS
6:	PB3	18:	PB8	29:	PA4	41:	PB1
7:	PA11	19:	PB6	30:	PB9	42:	TDO
8:	PB26	20:	PB18	31:	PB21	43:	JTAGSEL
9:	PA10	21:	PB15	32:	USBDP	44:	TDI
10:	PA1	22:	DGND	33:	PB19	45:	DGND
11:	PB25	23:	DGND	34:	PB27	46:	DGND
12:	PB2			35:	PA14		

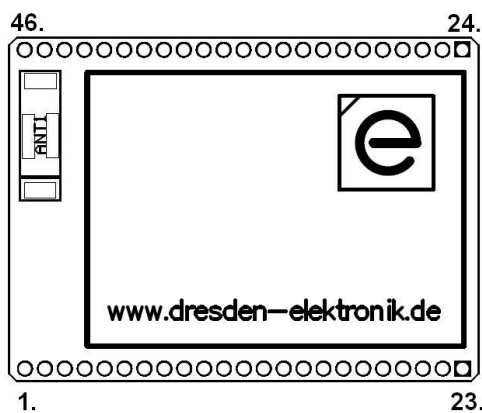

Top View deRFarm7-25A00

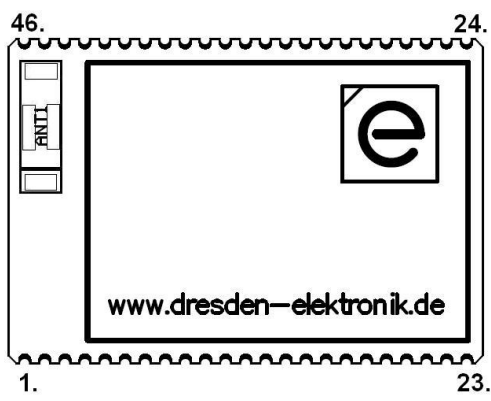

Top View deRFarm7-25C00

### Scope of delivery

Radio Module deRFarm7-25A00  
Radio Module deRFarm7-25C00

### Order No.

BN-027264  
coming soon

### Board variants

Radio Module deRFarm7-15A00  
Radio Module deRFarm7-15C00  
Radio Module deRFarm7-25A02  
Radio Module deRFarm7-25C02  
Radio Module deRFarm7-15A02  
Radio Module deRFarm7-15C02

coming soon  
coming soon  
BN-027265  
coming soon  
BN-030974  
coming soon

More information about the variants are described in detail in the user manual.

Order online: <http://www.dresden-elektronik.de/shop/cat4.html>

## Connections

## Order Information

## Variants

dresden elektronik ingenieurtechnik gmbh  
Enno-Heidebroek-Str. 12  
01237 Dresden | Germany

[www.dresden-elektronik.de](http://www.dresden-elektronik.de)  
E-Mail: [wireless@dresden-elektronik.de](mailto:wireless@dresden-elektronik.de)  
Phone: +49 351 – 31 85 0-0 Fax: -10

## Contact