



FCC PART 15B, CLASS B
MEASUREMENT AND TEST REPORT

For

Shenzhen CE and IT Limited

113 Zhenxing Road, Xinxin Building, Tower B, Suite 501, Futian District, Shenzhen, China

FCC ID: YG5STEALTH-10

Report Type: Original Report	Product Type: Tablets
Test Engineer: Kyle Xu 	
Report Number: RSZ130514007-00A	
Report Date: 2013-06-07	
Reviewed By: Sula Huang  RF Engineer	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S)	3
TEST FACILITY	3
SYSTEM TEST CONFIGURATION.....	4
DESCRIPTION OF TEST CONFIGURATION	4
EUT EXERCISE SOFTWARE	4
EQUIPMENT MODIFICATIONS	4
SUPPORT EQUIPMENT LIST AND DETAILS	4
EXTERNAL I/O CABLE.....	4
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS	6
FCC §15.107 – AC LINE CONDUCTED EMISSIONS.....	7
APPLICABLE STANDARD	7
MEASUREMENT UNCERTAINTY	7
EUT SETUP	7
EMI TEST RECEIVER SETUP.....	8
TEST PROCEDURE	8
TEST EQUIPMENT LIST AND DETAILS.....	8
CORRECTED FACTOR & MARGIN CALCULATION	9
TEST RESULTS SUMMARY	9
TEST DATA	9
FCC §15.109 - RADIATED EMISSIONS	12
APPLICABLE STANDARD	12
MEASUREMENT UNCERTAINTY	12
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
TEST EQUIPMENT LIST AND DETAILS.....	13
CORRECTED AMPLITUDE & MARGIN CALCULATION	13
TEST RESULTS SUMMARY	14
TEST DATA	14

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Shenzhen CE and IT Limited's* product, model number: *Trio Stealth - 10 (FCC ID: YG5STEALTH-10)* or the "EUT" as referred to in this report was named *Tablets* by applicant, which was measured approximately: 262.6 mm(L) x 159.8 mm (W) x 12.0 mm (H), rated with input voltage: DC 3.7V rechargeable Li-ion battery and DC 5V charging from adapter. The highest operating frequency is 1.5 GHz.

Adapter information

Model: AW018WR-0500250UH

Input: 100-240V~ 50/60Hz 0.5A

Output: DC 5.0V 2.5A

** All measurement and test data in this report was gathered from production sample serial number: 1305061 (Assigned by the BACL, Shenzhen). The EUT supplied by the applicant was received on 2013-05-14.*

Objective

This report is prepared on behalf of *Shenzhen CE and IT Limited* in accordance with Part 2-Subpart J, Part 15- Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15B, Class B.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS submission with FCC ID: YG5STEALTH-10.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical mode which is provided by manufacture.

EUT operation mode: Downloading

EUT Exercise Software

“winthrax” exercise software was used for downloading mode testing.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	PC	VOSTRO 220S	127BP2X
DELL	Keyboard	L100	CNORH656658907BL04TY
DELL	Mouse	MOC5UO	G1B0096D
DELL	LCD Monitor	E178WFPC	CN-OWY564-64180-7C4-2SQH
SAST	Modem	AEM-2100	0293

External I/O Cable

Cable Description	Length (m)	From/Port	To
Shielded Detachable K/B Cable	1.5	Host PC	Keyboard
Shielded Detachable Mouse Cable	1.5	Host PC	Mouse
Shielded Detachable Serial Cable	1.2	Host PC	Modem
Shielded Detachable VGA Cable	1.5	Host PC	Monitor
Shielded Detachable USB Cable	1.0	Host PC	EUT

Block Diagram of Test Setup

For AC line conducted emissions

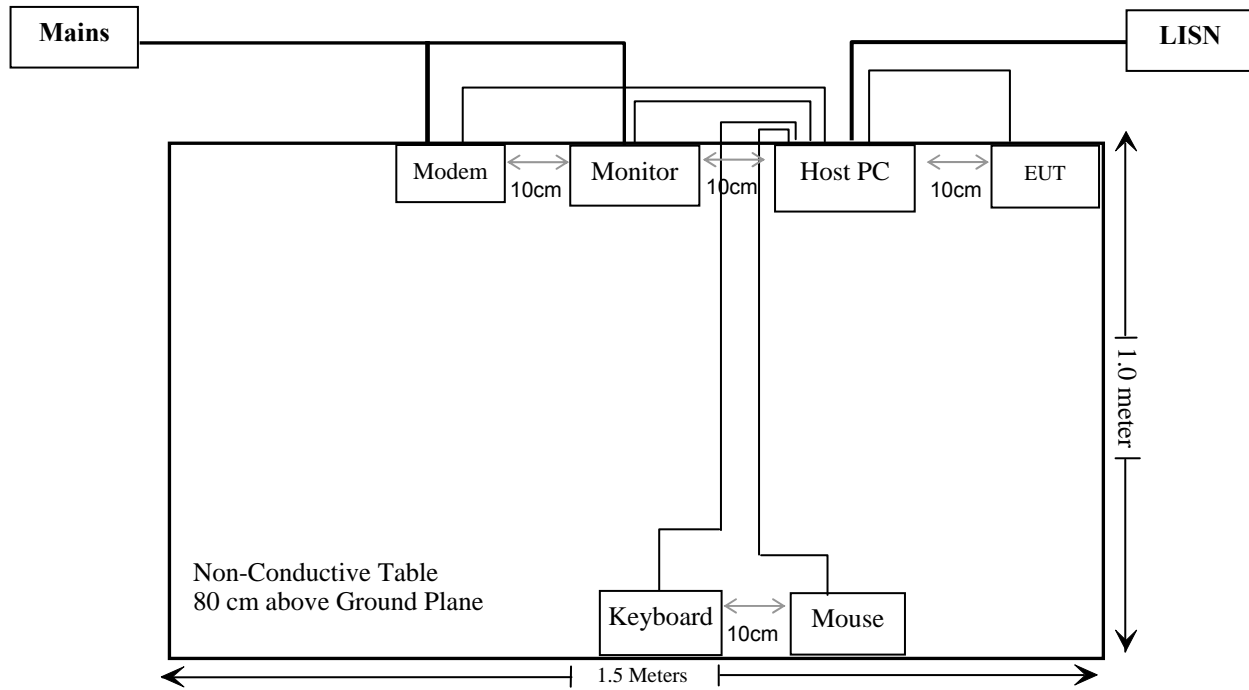

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Emissions	Compliance

FCC §15.107 – AC LINE CONDUCTED EMISSIONS

Applicable Standard


According to FCC §15.107

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR 16-4-2, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 2.4 dB.(k=2, 95% level of confidence), and the uncertainty will not be taken into consideration for the test data recorded in the report.

EUT Setup

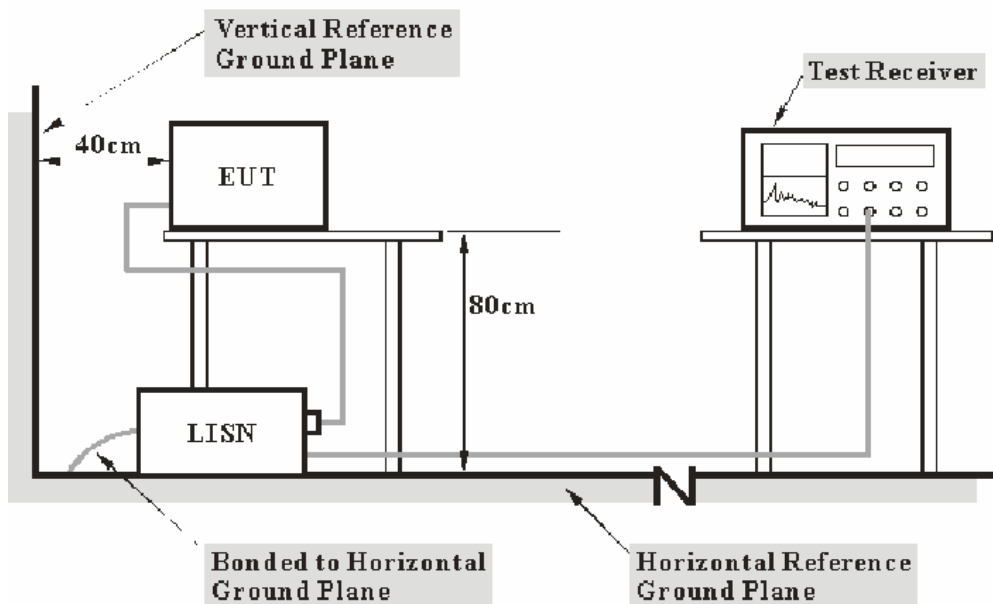

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2009. The related limit was specified in FCC Part 15.107 Class B.

The spacing between the peripherals was 10 cm.

The host PC was connected to an AC 120V/60 Hz power source

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emissions, the host PC was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-08
Rohde & Schwarz	First LISN	ESH2-Z5	892107/021	2012-08-22	2013-08-21
COM-POWER	2 nd LISN	LI-200	12208	NCR	NCR
BACL	CE Test software	BACL-CE	V1.0	-	-

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.107, with the worst margin reading of:

8.0 dB at 1.073756 MHz in the **Line** conducted mode for downloading mode

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa

The testing was performed by Kyle Xu on 2013-05-18.

EUT operation mode: Downloading

AC 120V/60 Hz, Line


EMI Auto Test L

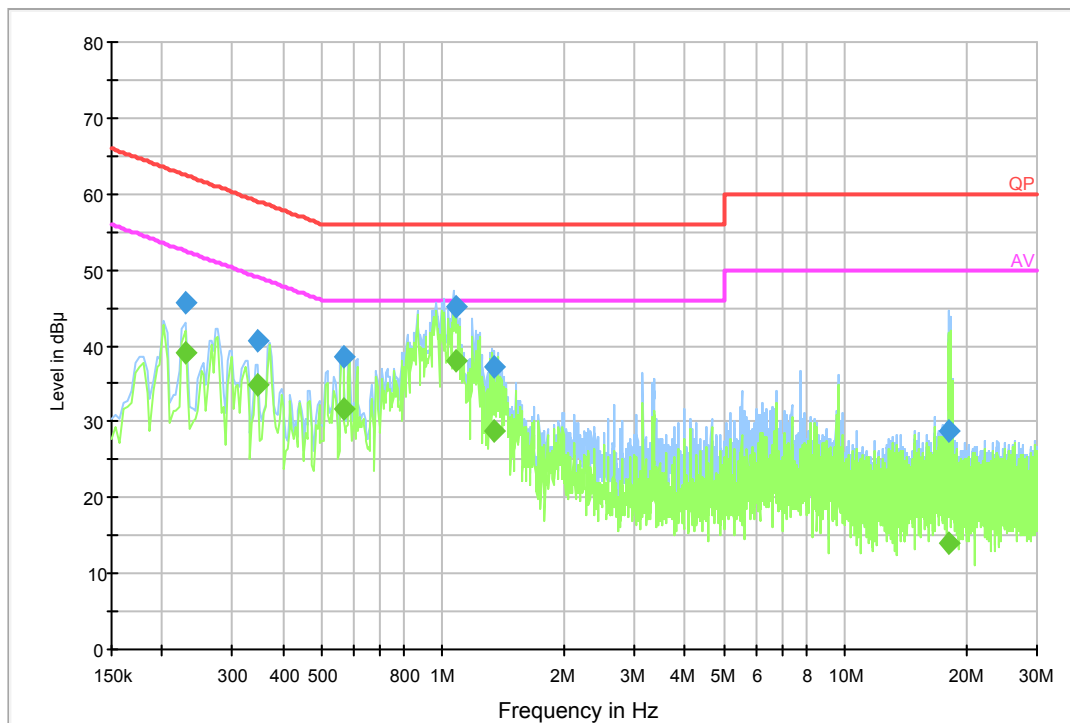

Frequency (MHz)	Corrected Amplitude (dBμV)	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Remark (PK/ QP/Ave)
1.073756	38.0	0.4	46.0	8.0	Ave.
1.073756	45.0	0.4	56.0	11.0	QP
0.228384	39.0	0.3	52.5	13.5	Ave.
0.348060	34.7	0.4	49.0	14.3	Ave.
0.564972	31.7	0.4	46.0	14.3	Ave.
0.228384	45.6	0.3	62.5	16.9	QP
1.344261	28.7	0.4	46.0	17.3	Ave.
0.564972	38.5	0.4	56.0	17.5	QP
0.348060	40.8	0.4	59.0	18.2	QP
1.344261	37.1	0.4	56.0	18.9	QP
18.154045	28.8	0.8	60.0	31.2	QP
18.154045	13.9	0.8	50.0	36.1	Ave.

AC 120V/60 Hz, Neutral

EMI Auto Test N

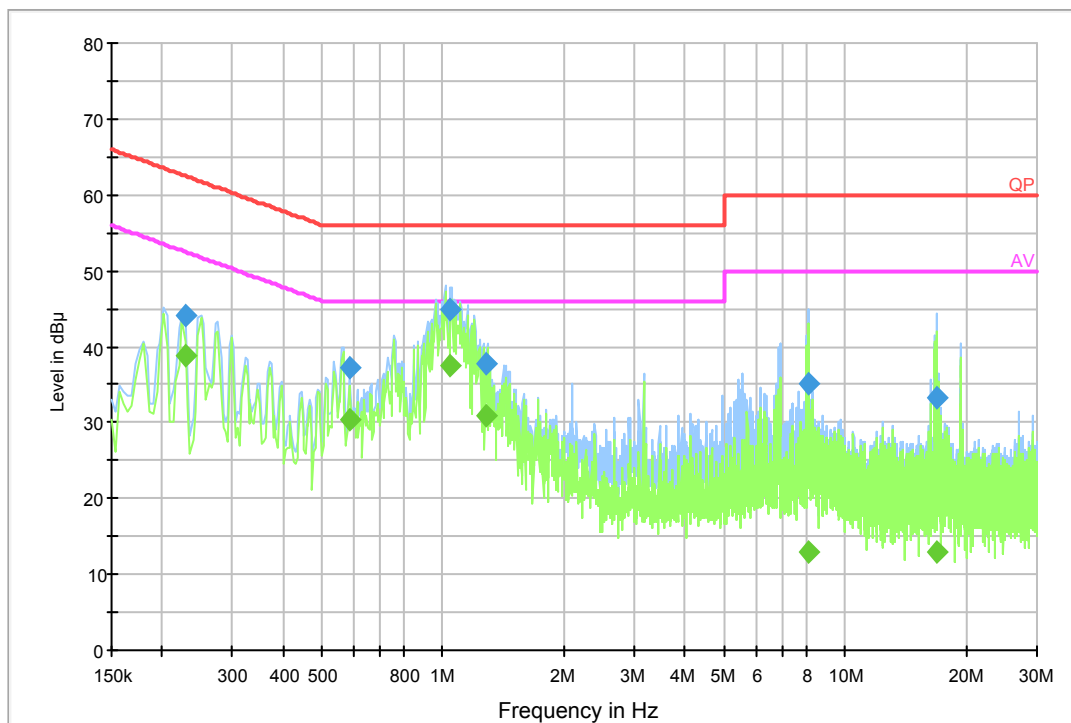

Frequency (MHz)	Corrected Amplitude (dBμV)	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Remark (PK/ QP/Ave)
1.036716	37.4	0.4	46.0	8.6	Ave.
1.036716	44.8	0.4	56.0	11.2	QP
0.228244	38.8	0.3	52.5	13.7	Ave.
1.285806	30.9	0.4	46.0	15.1	Ave.
0.586056	30.4	0.4	46.0	15.6	Ave.
1.285806	37.9	0.4	56.0	18.1	QP
0.228244	44.2	0.3	62.5	18.4	QP
0.586056	37.2	0.4	56.0	18.8	QP
8.102619	35.1	0.5	60.0	24.9	QP
16.856410	33.4	0.8	60.0	26.6	QP
8.102619	12.9	0.5	50.0	37.1	Ave.
16.856410	12.9	0.8	50.0	37.1	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss
The corrected factor has been input into the transducer of the test software.
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.109 - RADIATED EMISSIONS

Applicable Standard


According to FCC §15.109

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB. ($k=2$, 95% level of confidence), and the uncertainty will not be taken into consideration for the test data recorded in the report.

EUT Setup

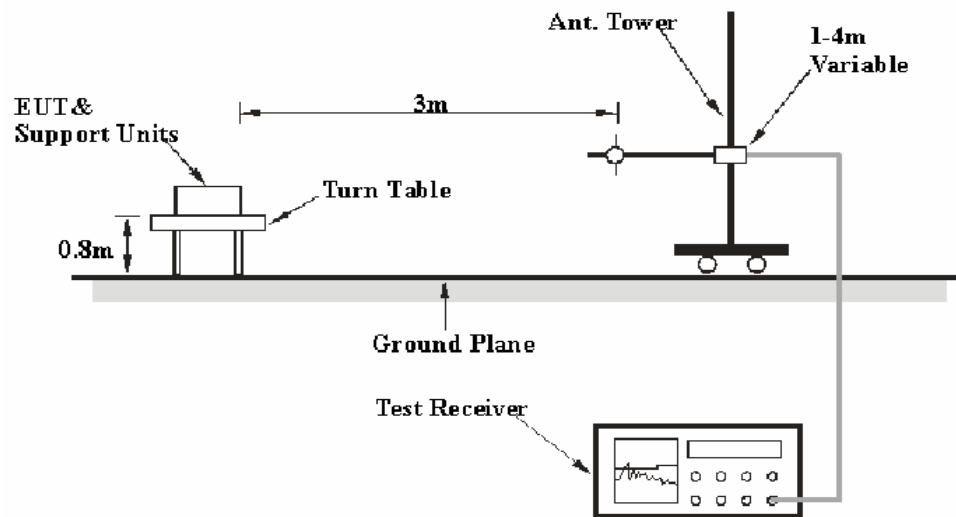

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The host PC was connected to an AC 120V/60 Hz power source

EMI Test Receiver Setup

The system was investigated from 30 MHz to 7500 MHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

During the radiated emissions, the host PC, the monitor and modem were connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode from 30 MHz to 1 GHz, Peak and average detection mode above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2012-11-24	2013-11-23
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2012-11-24	2013-11-24
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
Super Ultra	Amplifier	ZVA-213+	N/A	2012-11-24	2013-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2014-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23
R&S	Auto test Software	EMC32	V6.30	-	-

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Correction Factor} = \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.109, with the worst margin reading of:

2.6 dB at 833.412150 MHz in the Horizontal polarization for downloading mode

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa

The testing was performed by Kyle Xu on 2013-05-18.

EUT operation mode: Downloading Mode

1) 30 MHz~1000 MHz

Auto Test(FCC part 15 Class B)

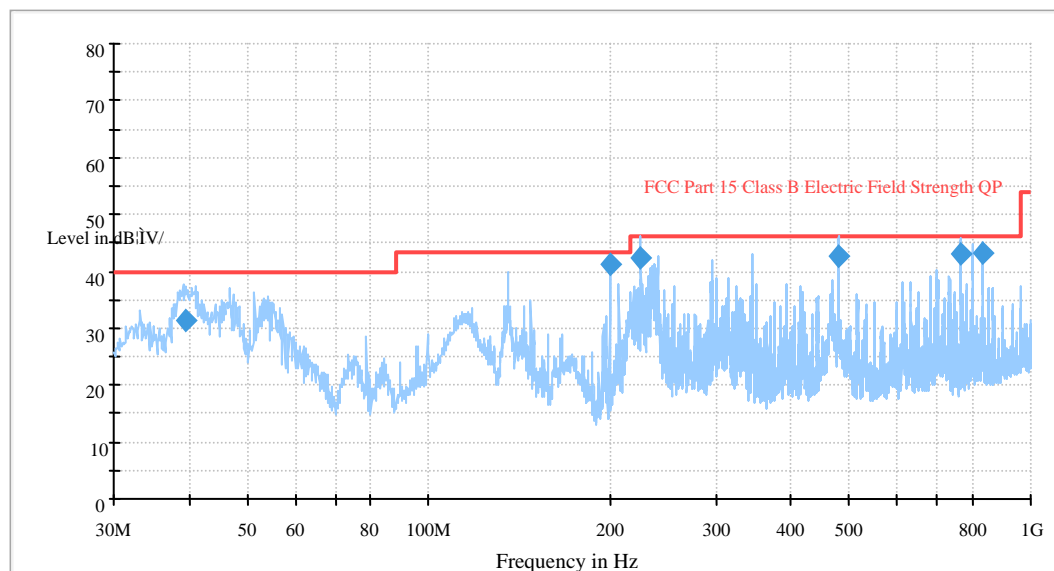

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Ant. Polarity (H/V)	Turntable Position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
833.412150	43.4	104.0	V	231.0	-4.9	46.0	2.6
767.135850	43.2	220.0	H	254.0	-6.2	46.0	2.8
479.978250	42.3	234.0	H	24.0	-10.1	46.0	3.7
199.583550	39.8	105.0	H	277.0	-15.1	43.5	3.7
225.139850	42.1	106.0	H	330.0	-16.3	46.0	3.9
39.466800	29.8	106.0	V	114.0	-14.0	40.0	10.2

2) 1-7.5 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dB μ V/m)	FCC Part 15.109	
	Reading (dB μ V)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
1268.9	57.22	PK	58	1.2	V	0.16	57.38	74	16.62
1268.9	34.03	Ave.	58	1.2	V	0.16	34.19	54	19.81
1169.2	51.63	PK	113	1.0	H	0.13	51.76	74	22.24
1169.2	26.96	Ave.	113	1.0	H	0.13	27.09	54	26.91

Note:

- 1) Corrected Amplitude = Corrected Factor + Reading
- 2) Corrected Factor=Antenna factor (RX) + Cable loss – Amplifier factor
- 3) Margin = Limit - Corrected Amplitude

*****END OF REPORT*****