


<b>FCC TEST REPORT</b> <b>FCC 47 CFR Part 15C</b> <b>ISED RSS-210</b> <b>License exempt radio equipment</b>	
<b>Report Reference No.</b> .....	G0M-1611-6094-TFC209LP-P-V01
<b>Testing Laboratory</b> .....	Eurofins Product Service GmbH
<b>Address</b> .....	Storkower Str. 38c 15526 Reichenwalde Germany
<b>Accreditation</b> .....	  A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Filed Test Laboratory, Reg.-No.: 96970 IC OATS Filing assigned code: 3470A
<b>Applicant's name</b> .....	Fabmatics GmbH
<b>Address</b> .....	Zur Steinhöhe 1 01099 Dresden GERMANY
<b>Test specification:</b>	
<b>Standard</b> .....	47 CFR Part 15C RSS-210, Issue 9, 2016-08
<b>Test scope</b> .....	complete Radio compliance test
<b>Equipment under test (EUT):</b>	
Product description	LF RFID reader
Model No.	LF-134-SER-P-V4.0
Additional Model(s)	None
Brand Name(s)	None
Hardware version	4.0
Firmware / Software version	3.0.0
	FCC-ID: YTV-LF-134-SER-4    IC: None
<b>Test result</b>	<b>Passed</b>

**Possible test case verdicts:**

- neither assessed nor tested ..... : N/N
- required by standard but not appl. to test object ..... : N/A
- required by standard but not tested ..... : N/T
- not required by standard for the test object ..... : N/R
- test object does meet the requirement ..... : P (Pass)
- test object does not meet the requirement ..... : F (Fail)

**Testing:**

Test Lab Temperature ..... : 20 – 23 °C

Test Lab Humidity ..... : 32 – 38 %

Date of receipt of test item ..... : 2016-12-12

Date (s) of performance of tests ..... : 2016-12-22 - 2016-12-23


Compiled by ..... : Toralf Jahn


Tested by (+ signature) ..... : Toralf Jahn  
(Responsible for Test)

Approved by (+ signature) ..... : Christian Weber  
(Head of Lab)

Date of issue ..... : 2017-02-20

Total number of pages ..... : 22





**General remarks:**

**The test results presented in this report relate only to the object tested.**

**The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.**

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

**Additional comments:**

---

## Version History

Version	Issue Date	Remarks	Revised by
01	2017-02-20	Initial Release	

## REPORT INDEX

<b>1</b>	<b>EQUIPMENT (TEST ITEM) DESCRIPTION</b>	<b>5</b>
1.1	Photos – Equipment External	6
1.2	Photos – Equipment internal	10
1.3	Photos – Test setup	11
1.4	Supporting Equipment Used During Testing	12
1.5	Test Modes	13
1.6	Test Equipment Used During Testing	14
1.7	Sample emission level calculation	15
<b>2</b>	<b>RESULT SUMMARY</b>	<b>16</b>
<b>3</b>	<b>TEST CONDITIONS AND RESULTS</b>	<b>17</b>
3.1	Test Conditions and Results – Occupied Bandwidth	17
3.2	Test Conditions and Results – Fundamental field strength emissions	19
ANNEX A	Transmitter Field Strength Emissions	21



## 1 Equipment (Test item) Description

Description	LF RFID reader	
Model	LF-134-SER-P-V4.0	
Additional Model(s)	None	
Brand Name(s)	None	
Serial number	105-01001	
Hardware version	4.0	
Software / Firmware version	3.0.0	
PMN	N/A	
HVIN	N/A	
FVIN	N/A	
HMN	N/A	
FCC-ID	N/A	
IC	None	
Equipment type	End product	
Radio type	Transceiver	
Radio technology	RFID	
Operating frequency range	134.2 kHz	
Frequency range	$F_{\text{MID}}$	134.2 kHz
Modulations	FSK	
Number of channels	1	
Channel spacing	None	
Number of antennas	1	
Antenna	Type	external dedicated
	Model	inductive loop coil antenna ANT-08-65EM B/BF-2000
	Manufacturer	Fabmatics GmbH
	Gain	unspecified
Manufacturer	Fabmatics GmbH Zur Steinhöhe 1 01099 Dresden GERMANY	
Power supply	$V_{\text{NOM}}$	24.0 VDC (AC/DC adapter)
	$V_{\text{MIN}}$	N/A
	$V_{\text{MIN}}$	N/A
AC/DC-Adaptor	Model	SYS1308-2424-W2E
	Vendor	Sunny
	Input	100-240VAC
	Output	24VDC

Test Report No.: G0M-1611-6094-TFC209LP-P-V01


Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany

## 1.1 Photos – Equipment External

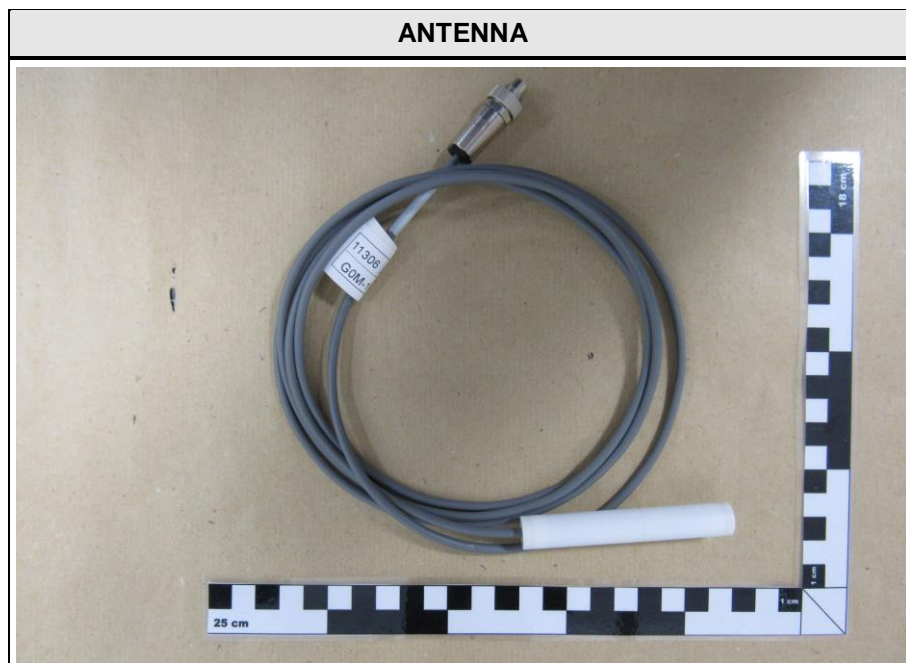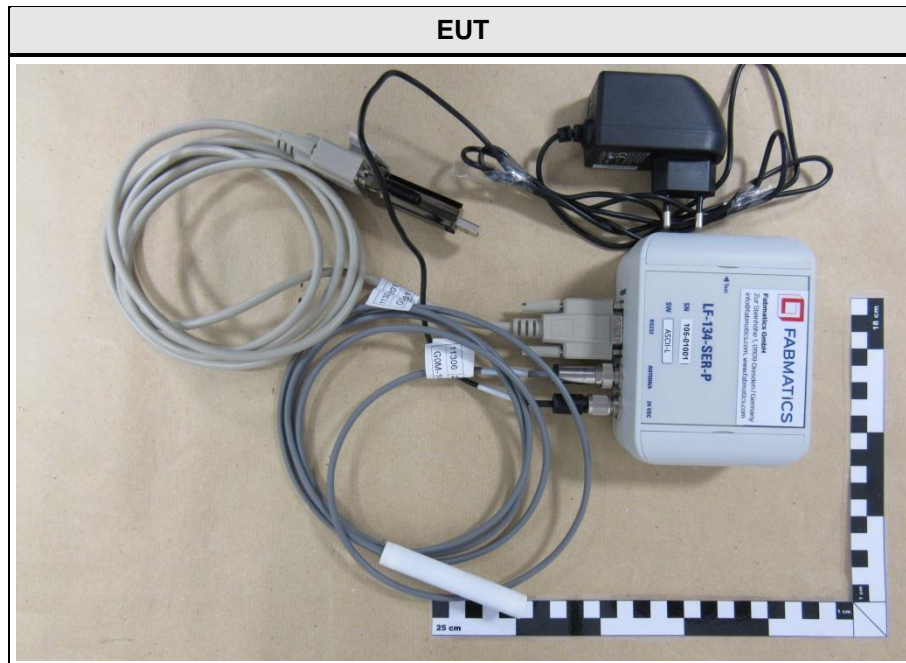



AC/DC ADAPTOR

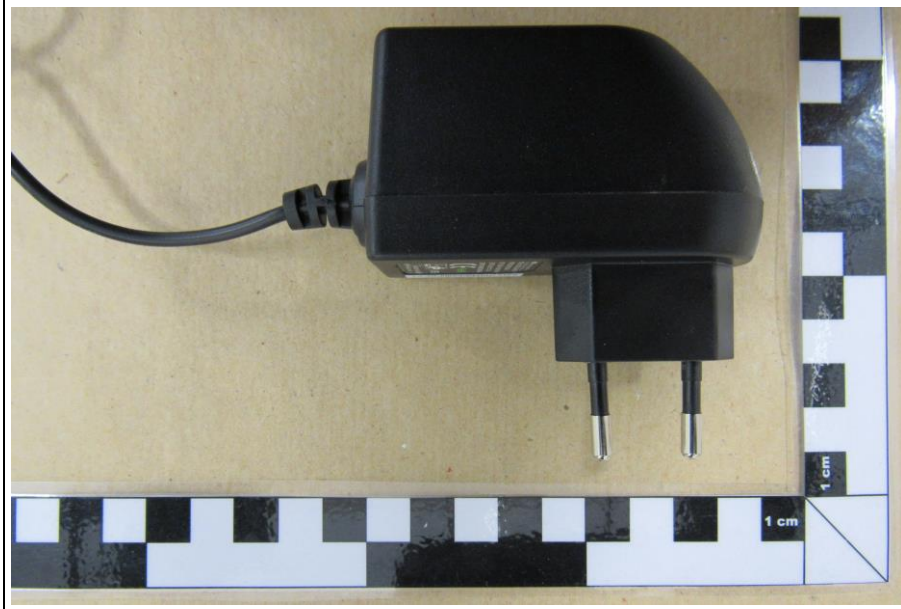

AC/DC ADAPTOR












## 1.2 Photos – Equipment internal

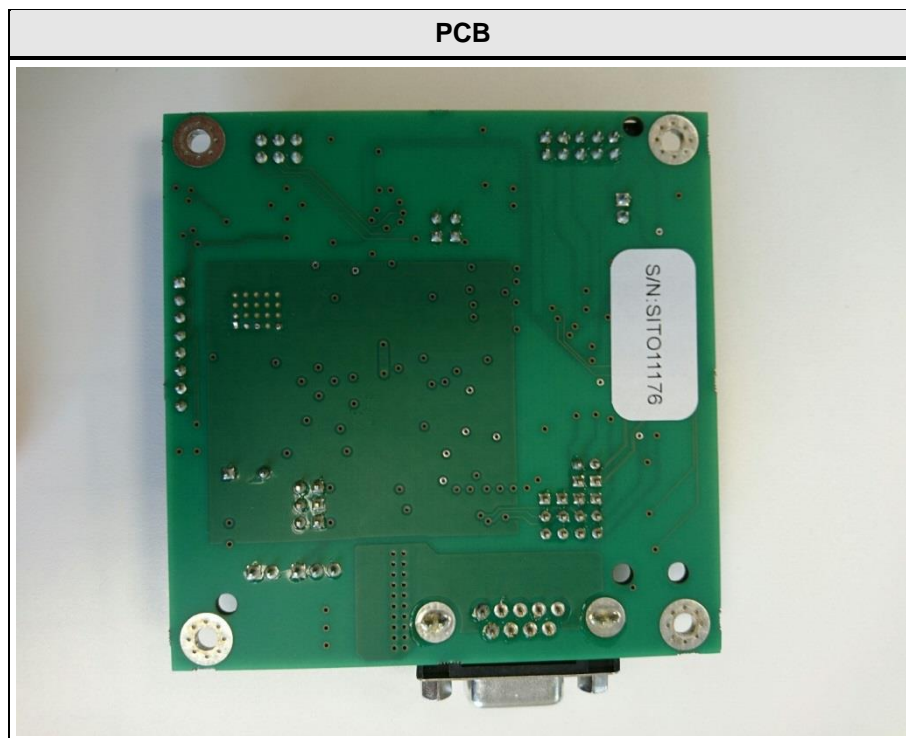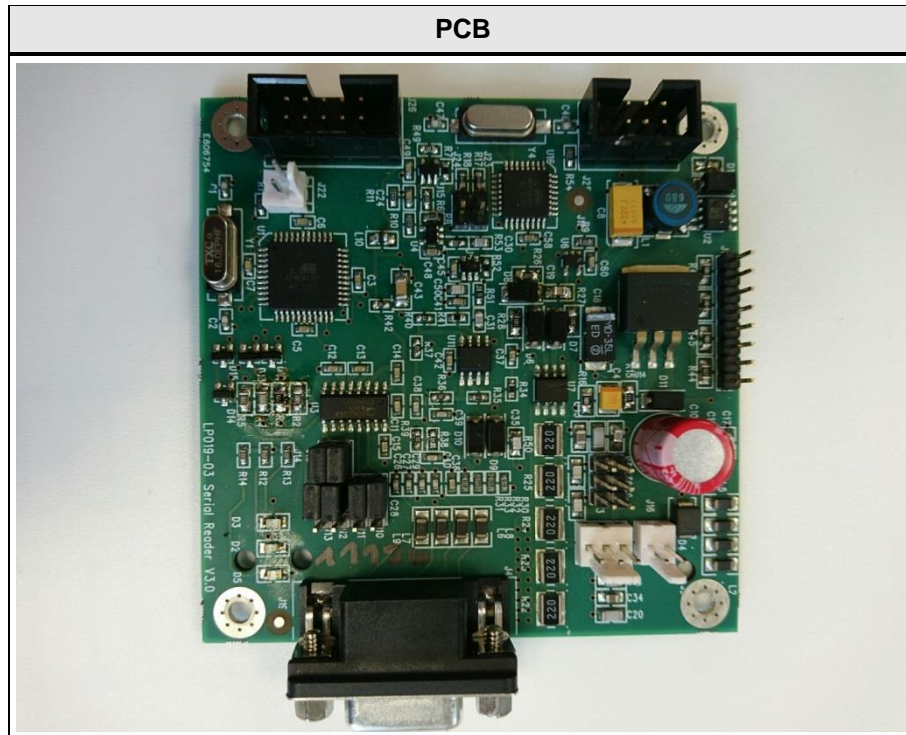

### 1.3 Photos – Test setup

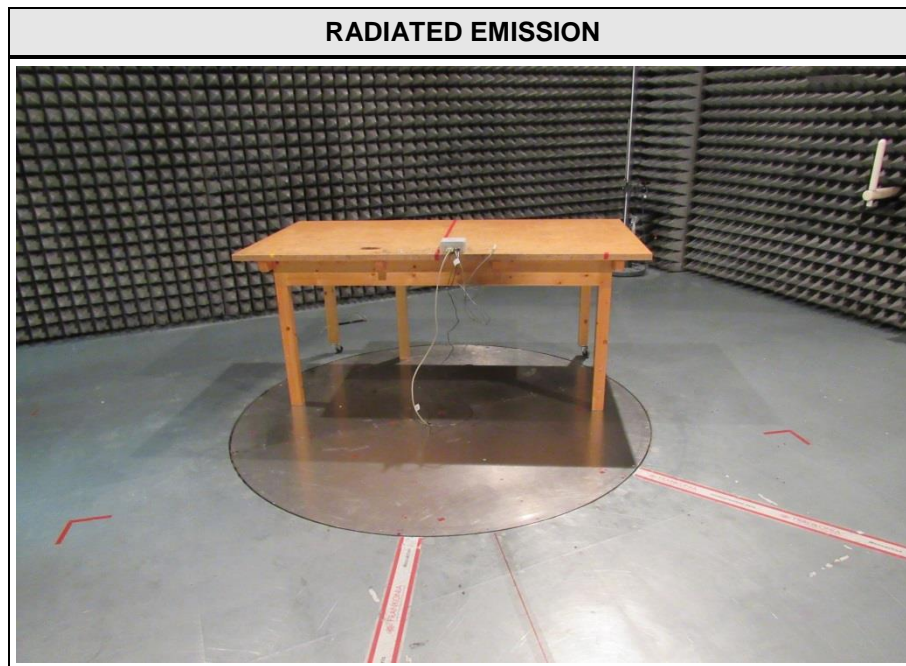

#### 1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
AE	Laptop	Dell	E6430	with test software
<p><b>*Note:</b> Use the following abbreviations:</p> <p>AE : Auxiliary/Associated Equipment, or</p> <p>SIM : Simulator (Not Subjected to Test)</p> <p>CABL : Connecting cables</p>				

## 1.5 Test Modes

Mode #	Description	
MOD AC/DC	General conditions:	EUT powered by AC/DC adaptor
	Radio conditions:	Mode = standalone transmit Spreading = None Modulation = On Power level = Maximum

## 1.6 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2015.2.4

Occupied Bandwidth					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum analyzer	R&S	FSW43	EF00896	2016-05	2016-12

Field strength emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic chamber	Frankonia	AC 2	EF00196	-	-
Spectrum Analyzer	R&S	FSU3	EF00241	2016-04	2018-04
Loop Antenna	R&S	HFH2-Z2	EF00184	2016-12	2018-12



## 1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBμV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBμV/m). The FCC limits are given in units of μV/m. The following formula is used to convert the units of μV/m to dBμV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{rclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

## 2 Result Summary

FCC 47 CFR Part 15C, ISED RSS-210				
Product Specific Standard Section	Requirement – Test	Reference Method	Result	Remarks
RSS-Gen 6.6	Occupied Bandwidth	RSS-Gen 6.6	N/R	Informational only
FCC 15.209 ISED RSS-210 4.3, 4.4	Field strength emissions	ANSI C63.10	PASS	
ISED RSS-210 3.1 ISED RSS-Gen 7.1	Receiver radiated spurious emissions	ANSI C63.10	PASS	
<b>Remarks:</b>				

### 3 Test Conditions and Results


#### 3.1 Test Conditions and Results – Occupied Bandwidth

Occupied Bandwidth acc. to ISED RSS-Gen			Verdict: PASS
Test according to measurement reference	Reference Method		
	RSS-Gen 6.6		
Test frequency range	Tested frequencies		
	F <sub>MID</sub>		
EUT test mode	MOD AC/DC		
Limits			
None (Informational only)			
Test setup			
<div><div>Spectrum Analyzer</div><div>EUT</div></div>			
Test procedure			
<div>1. EUT set to test mode (Communication tester is used if needed)</div> <div>2. Span set to at least twice the emission spectrum</div> <div>3. Resolution bandwidth set to 1% to 5% of Occupied Bandwidth</div> <div>4. Occupied Bandwidth (99 %) measurement with spectrum analyzer built in measurement function</div>			
Test results			
Channel	Frequency [kHz]	Occupied Bandwidth [kHz]	
F <sub>MID</sub>	134.2	8.0	
Comments: Measurement is applicable to all variants			

# Occupied Bandwidth - $F_{MID}$

## Occupied Bandwidth according to RSS-Gen

Project Number: G0M-1611-6094  
 Applicant: Fabmatics GmbH  
 Model Description: LF RFID reader  
 Model: LF-134-SER-P-V4.0  
 Test Sample ID: SN 105-01001  
 Operator: T. Jahn  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2016-12-23

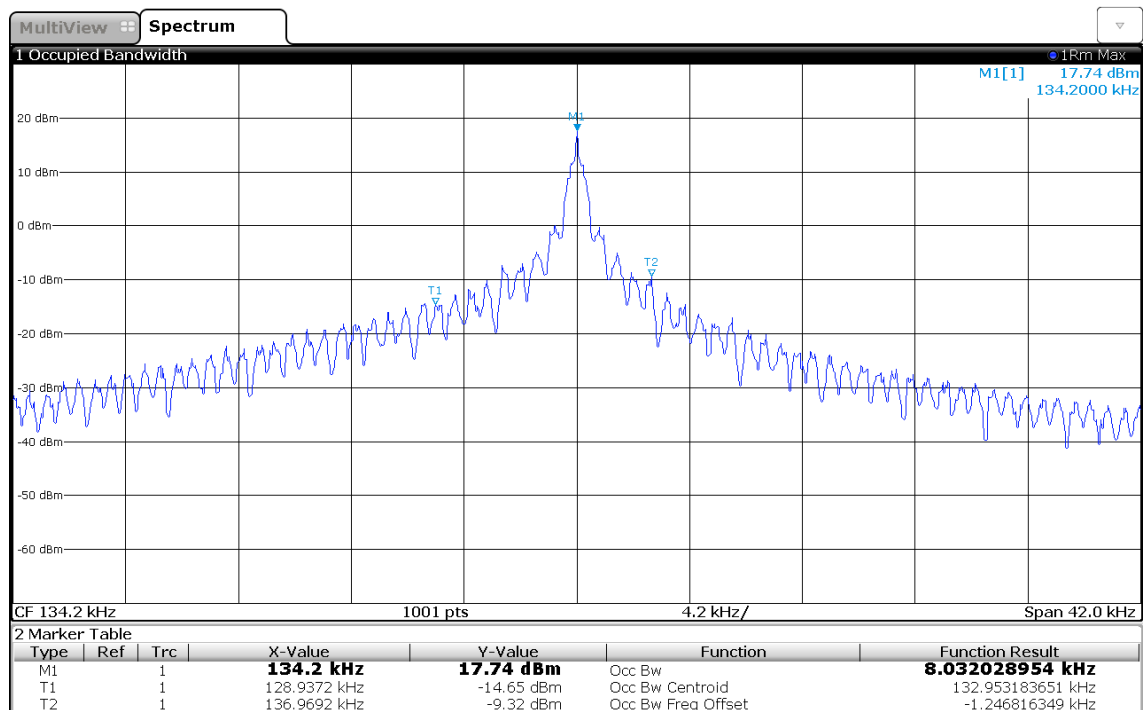


11:24:36 23.12.2016

Test Report No.: G0M-1611-6094-TFC209LP-P-V01

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

### 3.2 Test Conditions and Results – Fundamental field strength emissions

Field strength emissions acc. to FCC 47 CFR 15.209 / ISED RSS-210				Verdict: PASS
Test according referenced standards		Reference Method		
		FCC 15.209 / ISED RSS-210 4.3, 4.4		
Test according to measurement reference		Reference Method		
		ANSI C63.10		
Test frequency range		Tested frequencies		
		9 kHz – 10 <sup>th</sup> Harmonic		
EUT test mode		MOD AC/DC		
Limits				
Frequency range [MHz]	Detector	Limit [µV/m]	Limit [dBµV/m]	Limit Distance [m]
0.009 – 0.490	Quasi-Peak	2400/F[kHz]	48.5 – 13.8	300
0.490 – 1.705	Quasi-Peak	2400/F[kHz]	13.8 – 1.4	30
1.705 – 30	Quasi-Peak	30	29.5	30
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
> 1000	Average	500	54	3
The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.				

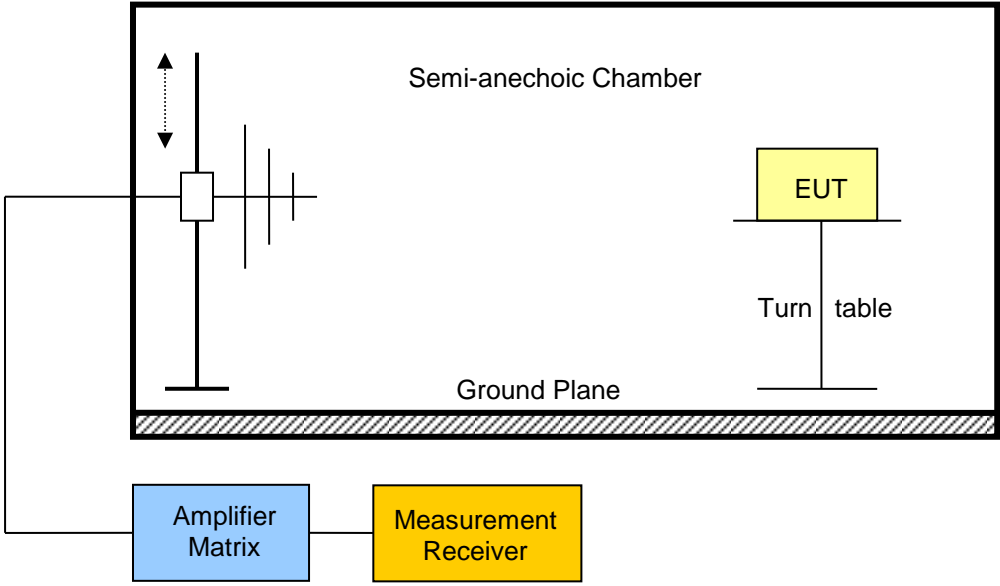Test setup							
							
Test procedure							
<ol style="list-style-type: none"> <li>1. EUT set to test mode</li> <li>2. Span it set according to measurement range</li> <li>3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz</li> <li>4. Markers are set to maximum emission levels</li> </ol>							
Test results							
Channel	Nominal Frequency [kHz]	Emission [kHz]	Level [dB $\mu$ V/m]	Detector	Limit [dB $\mu$ V/m]	Measurement distance [m]*	Margin [dB]
F <sub>MID</sub>	134.2	133.104	-1	pk	25.1	3	-26.1
Comments: * Physical distance between EUT and measurement antenna.							




## ANNEX A Transmitter Field Strength Emissions

### Spurious emissions according to FCC 15.209

Project number: G0M-1611-6094

Applicant: Fabmatics GmbH  
EUT Name: RFID Reader  
Model: LF-134-SER-P-V4.0  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Jahn  
Test Conditions: Tnom: 20°C, Vnom: 24VDC  
Antenna: Rohde & Schwarz HFH 2-Z2  
Measurement distance: 3 m converted to 300 m  
Mode: TX; Tx  
Test Date: 2016-12-22  
Note: LF-134-SER-P-V4.0

Index 5

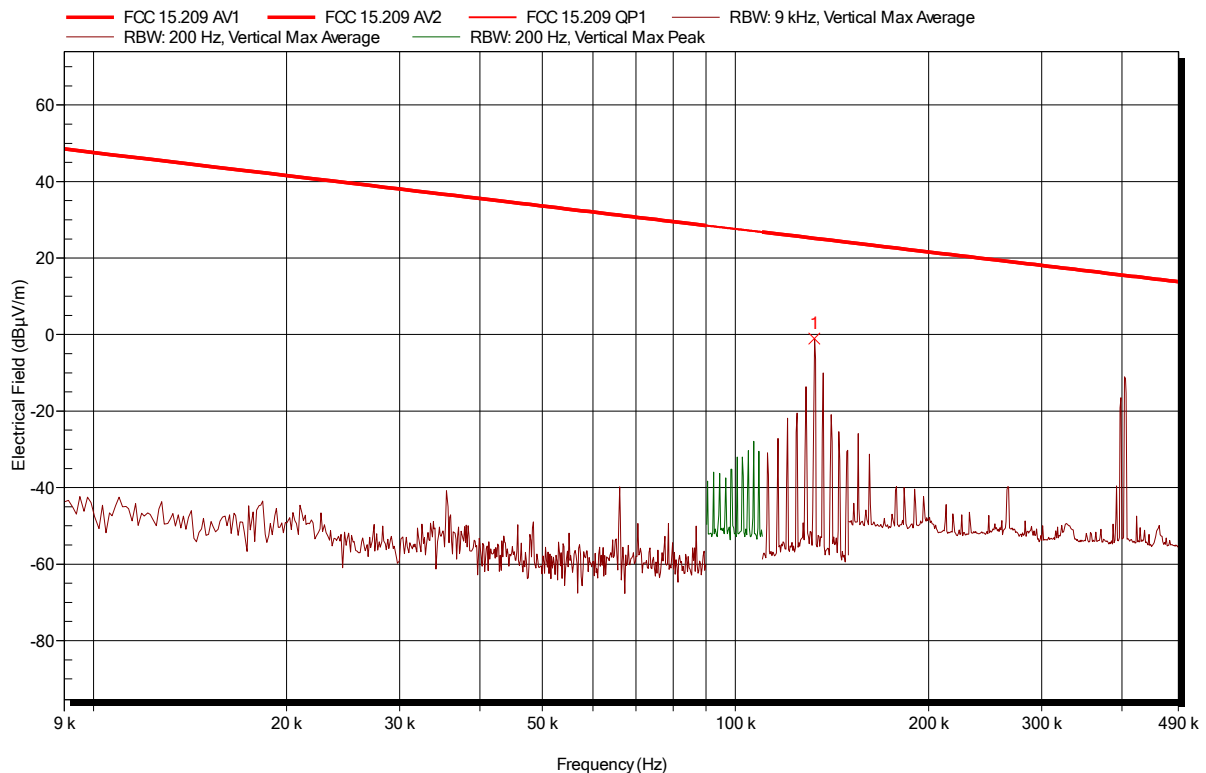

Frequency	Average	Average Limit	Average Difference	Average Status
132.656 kHz	-1 dBµV/m	25.2 dBµV/m	-26.22 dB	Pass

Test Report No.: G0M-1611-6094-TFC209LP-P-V01

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany

## Spurious emissions according to FCC 15.209

Project number: G0M-1611-6094

Applicant:	Fabmatics GmbH
EUT Name:	RFID Reader
Model:	LF-134-SER-P-V4.0
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Jahn
Test Conditions:	Tnom: 20°C, Vnom: 24VDC
Antenna:	Rohde & Schwarz HFH 2-Z2
Measurement distance:	3 m converted to 30 m
Mode:	TX; Tx
Test Date:	2016-12-22
Note:	LF-134-SER-P-V4.0

Index 6

