

FCC Part 15E

Measurement and Test Report

For

ShenZhen Foscam Intelligent Technology Co., Limited

9/F, Block F5, TCL International E City, No.1001 ZhongShanyuan Rd.,

NanShan District, Shenzhen, China,

FCC ID: ZDEFI9926P

FCC Rule(s): FCC Part 15.407

Product Description: Optical Zoom PTZ IP Camera

Tested Model: FI9926P

Report No.: STRD1809012I-1

Sample Receipt Date: 2018-09-12

Tested Date: 2018-09-13 to 2018-10-16

Issued Date: 2018-10-17

Tested By: Mike Shi/ Engineer

Mike Shi

Reviewed By: Silin Chen / EMC Manager

Silin Chen

Approved & Authorized By: Jandy So / PSQ Manager

Jandy So

Prepared By:

Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,

Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

| | |
|---|-----------|
| 1. GENERAL INFORMATION..... | 3 |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 3 |
| 1.2 TEST STANDARDS..... | 4 |
| 1.3 TEST METHODOLOGY..... | 4 |
| 1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING | 4 |
| 1.5 EUT OPERATING DURING TEST | 5 |
| 1.6 TEST FACILITY | 5 |
| 1.7 EUT SETUP AND TEST MODE..... | 6 |
| 1.8 MEASUREMENT UNCERTAINTY | 7 |
| 1.9 TEST EQUIPMENT LIST AND DETAILS | 8 |
| 2. SUMMARY OF TEST RESULTS | 9 |
| 3. RF EXPOSURE | 10 |
| 3.1 STANDARD APPLICABLE..... | 10 |
| 3.2 TEST RESULT..... | 10 |
| 4. ANTENNA REQUIREMENT | 11 |
| 4.1 STANDARD APPLICABLE..... | 11 |
| 4.2 EVALUATION INFORMATION | 11 |
| 5. CONDUCTED EMISSIONS | 12 |
| 5.1 TEST PROCEDURE..... | 12 |
| 5.2 BASIC TEST SETUP BLOCK DIAGRAM..... | 12 |
| 5.3 TEST RECEIVER SETUP | 12 |
| 5.4 SUMMARY OF TEST RESULTS/PLOTS | 12 |
| 6. POWER SPECTRAL DENSITY | 15 |
| 6.1 STANDARD APPLICABLE..... | 15 |
| 6.2 TEST PROCEDURE..... | 15 |
| 6.3 SUMMARY OF TEST RESULTS/PLOTS | 16 |
| 7. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH..... | 25 |
| 7.1 STANDARD APPLICABLE..... | 25 |
| 7.2 TEST PROCEDURE..... | 25 |
| 7.3 SUMMARY OF TEST RESULTS/PLOTS | 27 |
| 8. MAXIMUM CONDUCTED OUTPUT POWER..... | 36 |
| 8.1 STANDARD APPLICABLE..... | 36 |
| 8.2 TEST PROCEDURE..... | 36 |
| 8.3 SUMMARY OF TEST RESULTS/PLOTS | 37 |
| 9. RADIATED SPURIOUS EMISSIONS..... | 46 |
| 9.1 STANDARD APPLICABLE..... | 46 |
| 9.2 TEST PROCEDURE..... | 46 |
| 9.3 TEST RECEIVER SETUP | 47 |
| 9.4 CORRECTED AMPLITUDE & MARGIN CALCULATION..... | 47 |
| 9.5 SUMMARY OF TEST RESULTS/PLOTS | 47 |
| 10. FREQUENCY STABILITY | 64 |
| 10.1 STANDARD APPLICABLE..... | 64 |
| 10.2 TEST PROCEDURE..... | 64 |
| 10.3 SUMMARY OF TEST RESULTS/PLOTS | 64 |

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: ShenZhen Foscam Intelligent Technology Co., Limited
Address of applicant: 9/F, Block F5, TCL International E City, No.1001
ZhongShanyuan Rd., NanShan District, Shenzhen, China,

Manufacturer: ShenZhen Foscam Intelligent Technology Co., Limited
Address of manufacturer: 9/F, Block F5, TCL International E City, No.1001
ZhongShanyuan Rd., NanShan District, Shenzhen, China,

| General Description of EUT | |
|---|--|
| Product Name: | Optical Zoom PTZ IP Camera |
| Brand Name: | FOSCAM |
| Model No.: | FI9926P |
| Adding Model(s): | R2 Plus、R2 Plus VX、Z2、Z2 VX、FI9926P、FI9926P VX、R2P、R2P VX、R4 Plus、R4 Plus VX、R4P、R4P VX (Note “VX” represent the software version ,which “X” can be from 0 to 9) |
| Rated Voltage: | DC5V |
| Battery Capacity: | / |
| Power Adapter: | Model:SAW12F-050-2000U INPUT:AC110~240V AC 50/60Hz 0.5A OUTPUT:DC5V,2A |
| Software Version: | 1.11.1.13-2.71.1.64 |
| Hardware Version: | FI9926P_MAIN_1V2 |
| <i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model FI9926P, but the circuit and the electronic construction do not change, declared by the manufacturer.</i> | |

| Technical Characteristics of EUT | |
|----------------------------------|--|
| Support Standards: | 802.11a, 802.11n(HT20) , 802.11n-HT40, 802.11ac-VH80 |
| Frequency Range: | 5150-5250MHz, 5725-5850MHz |
| RF Output Power: | 9.80dBm (Conducted) |
| Type of Modulation: | QPSK, 16QAM, 64QAM |
| Data Rate: | 6-54Mbps, up to 200Mbps |
| Quantity of Channels: | 15 |
| Type of Antenna: | External Antenna |
| Antenna Gain: | 2dBi |

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01:GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPART E

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Enter “3646631+=” into the calculator to enter the engineer mode, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

| Mode | Test Frequency (MHz) | | | | | | | | | | | | |
|----------------------------|----------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| | NCB: 20MHz | | | | | | | | | | | | |
| | 5180 | 5200 | 5240 | 5260 | 5300 | 5320 | 5500 | 5580 | 5700 | 5720 | 5745 | 5785 | 5825 |
| 802.11a 6Mbps | 10 | 10 | 10 | | | | | | | | 10 | 10 | 10 |
| 802.11n-HT20 MCS0 | 10 | 10 | 10 | | | | | | | | 10 | 10 | 10 |
| Mode | NCB: 40MHz | | | | | | | | | | | | |
| | 5190 | 5230 | 5270 | 5310 | 5510 | 5550 | 5670 | 5710 | 5755 | 5795 | | | |
| 802.11n-HT40 MCS0 | 10 | 10 | | | | | | | | | 10 | 10 | |
| Mode | NCB: 80MHz | | | | | | | | | | | | |
| | 5210 | | 5290 | | 5530 | | 5610 | | 5690 | | 5775 | | |
| 802.11ac-VH80 MCS0/Nss2 | 10 | | | | | | | | | | 10 | | |

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM. Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

| Test Mode List | | |
|--|---------------|--|
| Test Mode | Description | Remark |
| TM1 | 802.11a | 5180MHz,5200MHz, 5240MHz, 5745MHz, 5785MHz,5825MHz |
| TM2 | 802.11n-HT20 | 5180MHz,5200MHz, 5240MHz, 5745MHz, 5785MHz,5825MHz |
| TM3 | 802.11n-HT40 | 5190MHz,5230MHz, 5755MHz,5795MHz |
| TM4 | 802.11ac-VH80 | 5210MHz, 5775 MHz |
| Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report. | | |

| Test Conditions | |
|-------------------|-----------|
| Temperature: | 22~25 °C |
| Relative humidity | 50~55 %. |
| ATM Pressure: | 1019 mbar |

| EUT Cable List and Details | | | |
|----------------------------|------------|---------------------|------------------------|
| Cable Description | Length (m) | Shielded/Unshielded | With / Without Ferrite |
| Network Cable | 1.2 | Unshielded | Without Core |
| DC Cable | 1.5 | Unshielded | Without Core |

| Special Cable List and Details | | | |
|--------------------------------|------------|---------------------|------------------------|
| Cable Description | Length (m) | Shielded/Unshielded | With / Without Ferrite |
| Network Cable | 4.5 | Unshielded | Without Core |

| Auxiliary Equipment List and Details | | | |
|--------------------------------------|--------------|--------------------|---------------|
| Description | Manufacturer | Model | Serial Number |
| Notebook | Lenovo | ThinkPad Edge E445 | / |

1.8 Measurement Uncertainty

| Measurement uncertainty | | |
|--------------------------------|------------|--------------------------------|
| Parameter | Conditions | Uncertainty |
| RF Output Power | Conducted | $\pm 0.42\text{dB}$ |
| Occupied Bandwidth | Conducted | $\pm 1.5\%$ |
| Power Spectral Density | Conducted | $\pm 1.8\text{dB}$ |
| Conducted Spurious Emission | Conducted | $\pm 2.17\text{dB}$ |
| Conducted Emissions | Conducted | 9-150kHz $\pm 3.74\text{dB}$ |
| | | 0.15-30MHz $\pm 3.34\text{dB}$ |
| Transmitter Spurious Emissions | Radiated | 30-200MHz $\pm 4.52\text{dB}$ |
| | | 0.2-1GHz $\pm 5.56\text{dB}$ |
| | | 1-6GHz $\pm 3.84\text{dB}$ |
| | | 6-18GHz $\pm 3.92\text{dB}$ |

1.9 Test Equipment List and Details

| No. | Description | Manufacturer | Model | Serial No. | Cal Date | Due Date |
|-----------|-------------------|------------------------|-----------------------|-------------|------------|------------|
| SEMT-1072 | Spectrum Analyzer | Agilent | E4407B | MY41440400 | 2018-05-22 | 2019-05-21 |
| SEMT-1031 | Spectrum Analyzer | Rohde & Schwarz | FSP30 | 836079/035 | 2018-05-22 | 2019-05-21 |
| SEMT-1007 | EMI Test Receiver | Rohde & Schwarz | ESVB | 825471/005 | 2018-05-22 | 2019-05-21 |
| SEMT-1008 | Amplifier | Agilent | 8447F | 3113A06717 | 2018-05-22 | 2019-05-21 |
| SEMT-1043 | Amplifier | C&D | PAP-1G18 | 2002 | 2018-05-22 | 2019-05-21 |
| SEMT-1011 | Broadband Antenna | Schwarz beck | VULB9163 | 9163-333 | 2017-06-08 | 2020-06-07 |
| SEMT-1042 | Horn Antenna | ETS | 3117 | 00086197 | 2017-06-08 | 2020-06-07 |
| SEMT-1121 | Horn Antenna | Schwarzbeck | BBHA 9170 | BBHA9170582 | 2017-06-08 | 2020-06-07 |
| SEMT-1069 | Loop Antenna | Schwarz beck | FMZB 1516 | 9773 | 2017-06-08 | 2020-06-07 |
| SEMT-1001 | EMI Test Receiver | Rohde & Schwarz | ESPI | 101611 | 2018-05-22 | 2019-05-21 |
| SEMT-1003 | L.I.S.N | Schwarz beck | NSLK8126 | 8126-224 | 2018-05-22 | 2019-05-21 |
| SEMT-1002 | Pulse Limiter | Rohde & Schwarz | ESH3-Z2 | 100911 | 2018-05-22 | 2019-05-21 |
| SEMT-1168 | Pre-amplifier | Direction Systems Inc. | PAP-0126 | 14141-12838 | 2018-05-22 | 2019-05-21 |
| SEMT-1169 | Pre-amplifier | Direction Systems Inc. | PAP-2640 | 14145-14153 | 2018-05-22 | 2019-05-21 |
| SEMT-1163 | Spectrum Analyzer | Rohde & Schwarz | FSP40 | 100612 | 2018-05-22 | 2019-05-21 |
| SEMT-1170 | DRG Horn Antenna | A.H. SYSTEMS | SAS-574 | 571 | 2018-05-22 | 2019-05-21 |
| SEMT-1166 | Power Limiter | Agilent | N9356B | MY45450376 | 2018-05-22 | 2019-05-21 |
| SEMT-1048 | RF Limiter | ATTEN | AT-BSF-2400~2500 | / | 2018-05-22 | 2019-05-21 |
| SEMT-1076 | RF Switcher | Top Precision | RCS03-A2 | / | 2018-05-22 | 2019-05-21 |
| SEMT-C001 | Cable | Zheng DI | LL142-07-07-10M(A) | / | 2018-03-19 | 2019-03-18 |
| SEMT-C002 | Cable | Zheng DI | ZT40-2.92J-2.92J-6M | / | 2018-03-19 | 2019-03-18 |
| SEMT-C003 | Cable | Zheng DI | ZT40-2.92J-2.92J-2.5M | / | 2018-03-19 | 2019-03-18 |
| SEMT-C004 | Cable | Zheng DI | 2M0RFC | / | 2018-03-19 | 2019-03-18 |
| SEMT-C005 | Cable | Zheng DI | 1M0RFC | / | 2018-03-19 | 2019-03-18 |
| SEMT-C006 | Cable | Zheng DI | 1M0RFC | / | 2018-03-19 | 2019-03-18 |

2. SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test Item | Result |
|----------------------------------|---|-----------|
| § 15.203; § 15.405 | Antenna Requirement | Compliant |
| § 15.207; § 15.407(b)(6) | Conducted Emission | Compliant |
| § 15.407(a)(1),(2) | Power Spectral Density | Compliant |
| § 15.407(e) | Emission Bandwidth and Occupied Bandwidth | Compliant |
| § 15.407(a)(1),(2) | Maximum Conducted Output Power | Compliant |
| § 15.407(b)(1),(2),(3) | Conducted Spurious Emission | Compliant |
| § 15.205; § 15.407(b)(1),(2),(3) | Radiated Emission | Compliant |
| § 15.407(g) | Frequency Stability | Compliant |
| § 15.407(h) | Dynamic Frequency Selection (DFS) | N/A |

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the MPE Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has a reverse rotation detachable antenna, fulfill the requirement of this section.

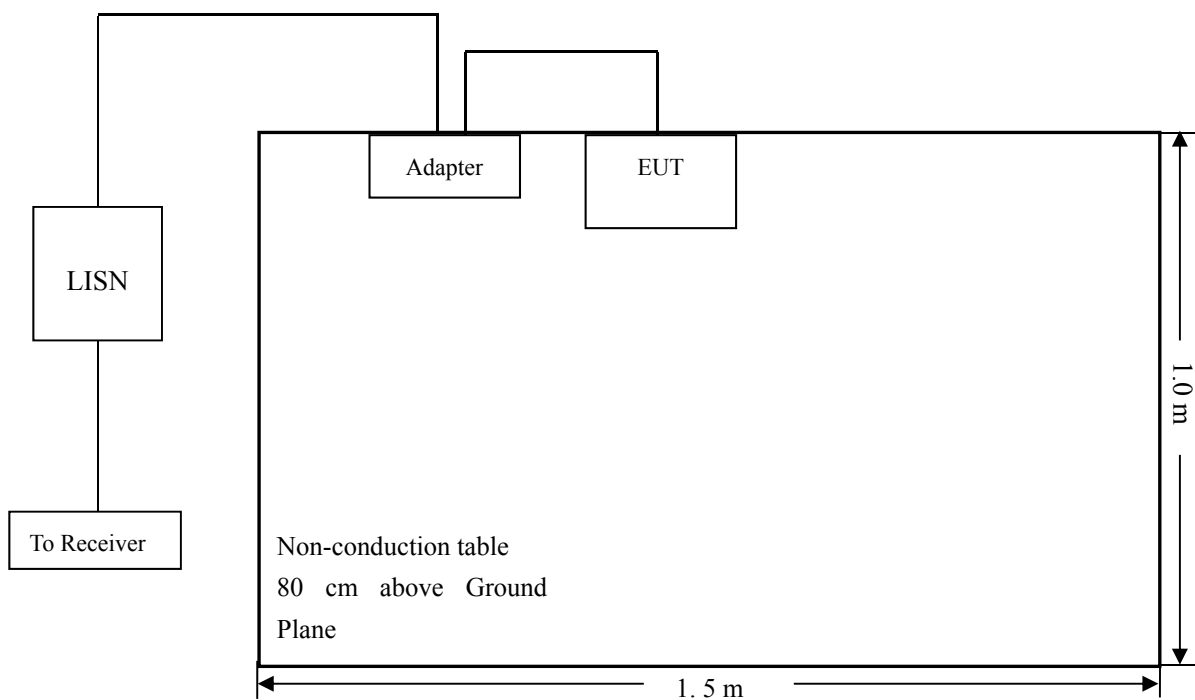
5. Conducted Emissions

5.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

5.2 Basic Test Setup Block Diagram




5.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

| | |
|------------------------------------|---------|
| Start Frequency | 150 kHz |
| Stop Frequency | 30 MHz |
| Sweep Speed | Auto |
| IF Bandwidth..... | 10 kHz |
| Quasi-Peak Adapter Bandwidth | 9 kHz |
| Quasi-Peak Adapter Mode | Normal |


5.4 Summary of Test Results/Plots

| | | | | |
|-----------|---------------|-------------|-----------|---------|
| Test Mode | Communication | AC120V 60Hz | Polarity: | Neutral |
|-----------|---------------|-------------|-----------|---------|

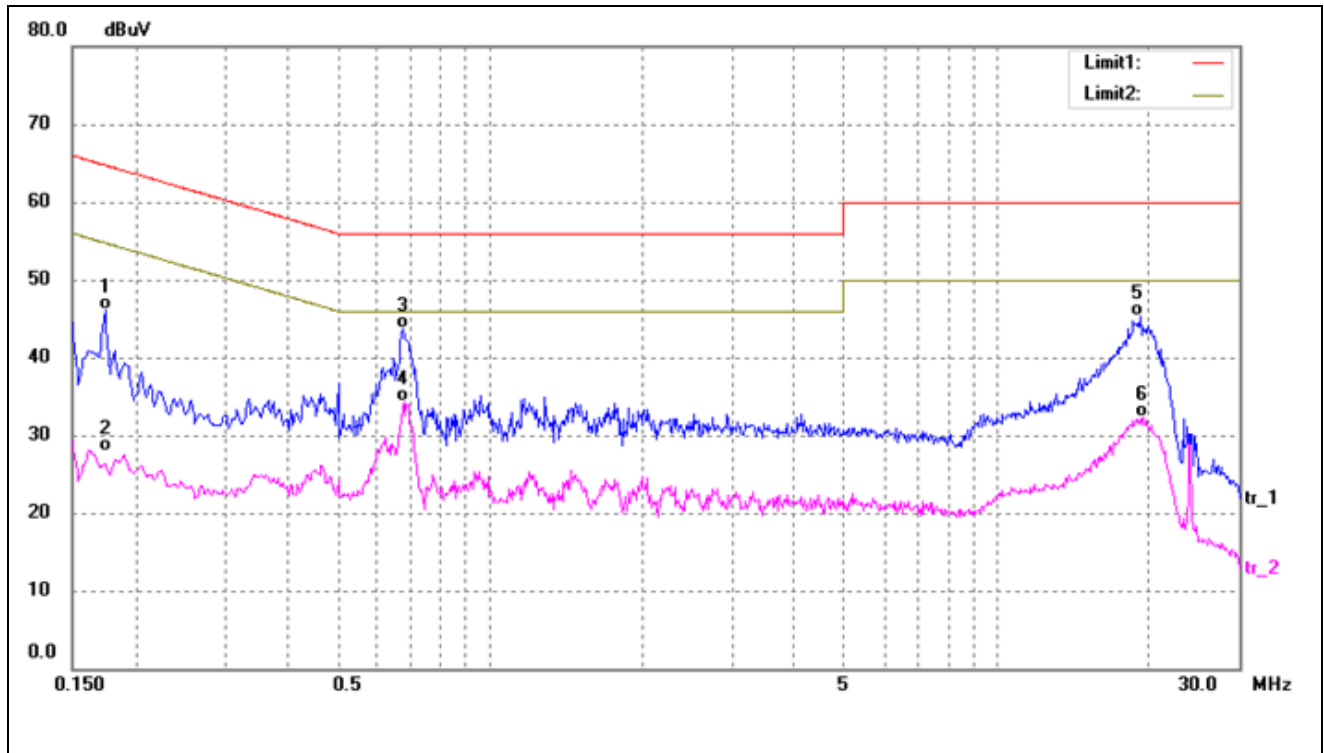

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|----------|
| 1 | 0.1740 | 35.98 | 10.11 | 46.09 | 64.76 | -18.67 | QP |
| 2 | 0.1740 | 17.84 | 10.11 | 27.95 | 54.76 | -26.81 | AVG |
| 3 | 0.6740 | 33.32 | 10.38 | 43.70 | 56.00 | -12.30 | QP |
| 4* | 0.6780 | 24.02 | 10.38 | 34.40 | 46.00 | -11.60 | AVG |
| 5 | 19.1419 | 34.14 | 11.15 | 45.29 | 60.00 | -14.71 | QP |
| 6 | 19.5059 | 21.06 | 11.16 | 32.22 | 50.00 | -17.78 | AVG |

| | | | | |
|-----------|---------------|-------------|-----------|------|
| Test Mode | Communication | AC120V 60Hz | Polarity: | Line |
|-----------|---------------|-------------|-----------|------|

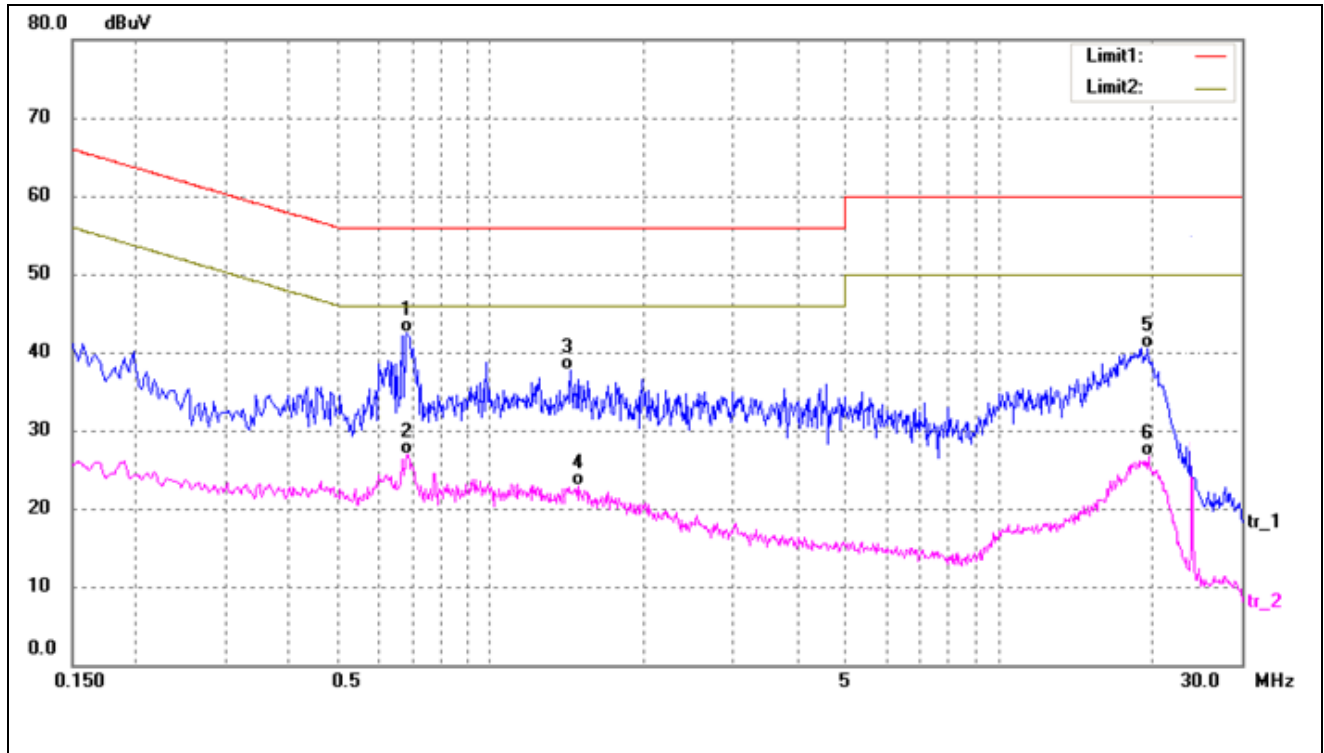

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|----------|
| 1* | 0.6860 | 32.08 | 10.39 | 42.47 | 56.00 | -13.53 | QP |
| 2 | 0.6860 | 16.61 | 10.39 | 27.00 | 46.00 | -19.00 | AVG |
| 3 | 1.4380 | 27.13 | 10.55 | 37.68 | 56.00 | -18.32 | QP |
| 4 | 1.4860 | 12.40 | 10.56 | 22.96 | 46.00 | -23.04 | AVG |
| 5 | 19.5940 | 29.36 | 11.16 | 40.52 | 60.00 | -19.48 | QP |
| 6 | 19.7220 | 15.51 | 11.16 | 26.67 | 50.00 | -23.33 | AVG |

6. Power Spectral Density

6.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

6.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth ($< 1 \text{ MHz}$, or $< 500 \text{ kHz}$) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.1.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.




Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ kHz}$ is available on nearly all spectrum analyzers.




6.3 Summary of Test Results/Plots



| U-NII-1:5150-5250MHz | | | |
|----------------------|--------------|-----------------------------------|--------------------|
| Operating mode | Test Channel | Power Spectral Density dBm/MHz | Limit (dBm/MHz) |
| 802.11a | 5180 | 6.566 | 11 |
| | 5200 | 6.232 | 11 |
| | 5240 | 5.844 | 11 |
| 802.11n-HT20 | 5180 | 5.726 | 11 |
| | 5200 | 7.010 | 11 |
| | 5240 | 5.811 | 11 |
| 802.11n-HT40 | 5190 | 4.274 | 11 |
| | 5230 | 3.214 | 11 |
| 802.11ac-HT80 | 5210 | -0.907 | 11 |


| U-NII-3: 5725-5850MHz | | | | | |
|--|--------------|--------------------------------------|--------|---------------------------------------|---------------------|
| Operating mode | Test Channel | Power Spectral Density dBm/300kHz | Factor | Power Spectral Density* dBm/500kHz | Limit dBm/500kHz |
| 802.11a | 5745 | 2.118 | 2.22 | 4.338 | 30 |
| | 5785 | 1.390 | 2.22 | 3.610 | 30 |
| | 5825 | 1.919 | 2.22 | 4.139 | 30 |
| 802.11n-HT20 | 5745 | 1.842 | 2.22 | 4.062 | 30 |
| | 5785 | 1.507 | 2.22 | 3.727 | 30 |
| | 5825 | 2.18 | 2.22 | 4.400 | 30 |
| 802.11n HT40 | 5755 | -0.541 | 2.22 | 1.679 | 30 |
| | 5795 | -1.060 | 2.22 | 1.160 | 30 |
| 802.11ac VH80 | 5775 | -4.827 | 2.22 | -2.607 | 30 |
| *Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22 | | | | | |

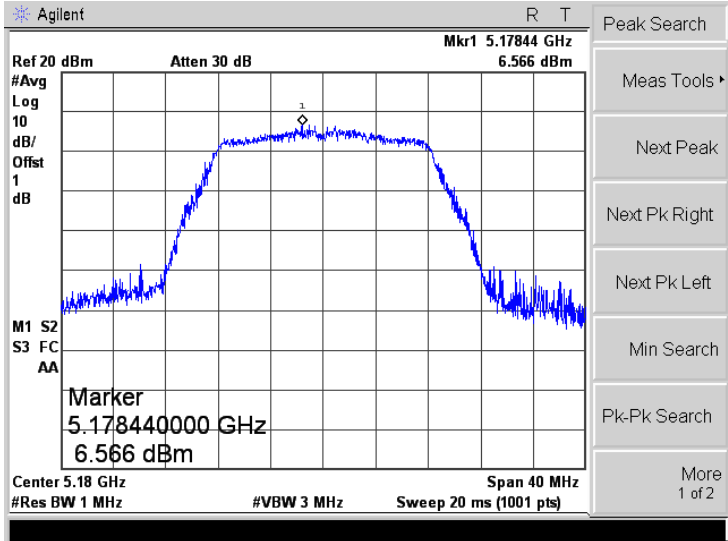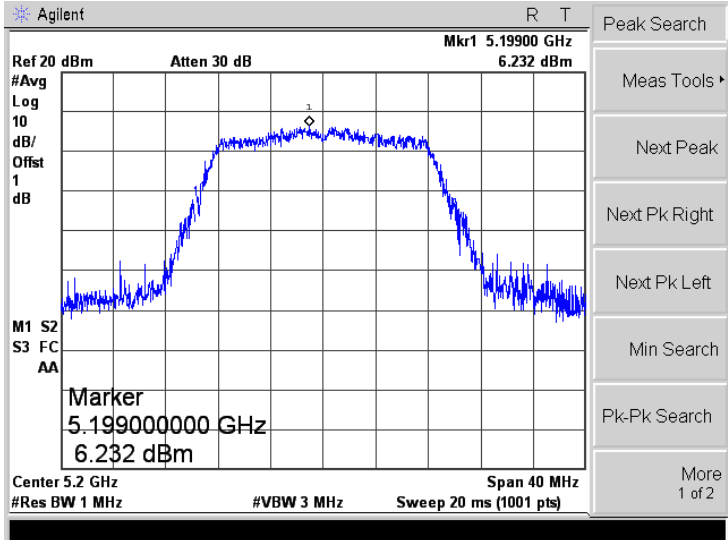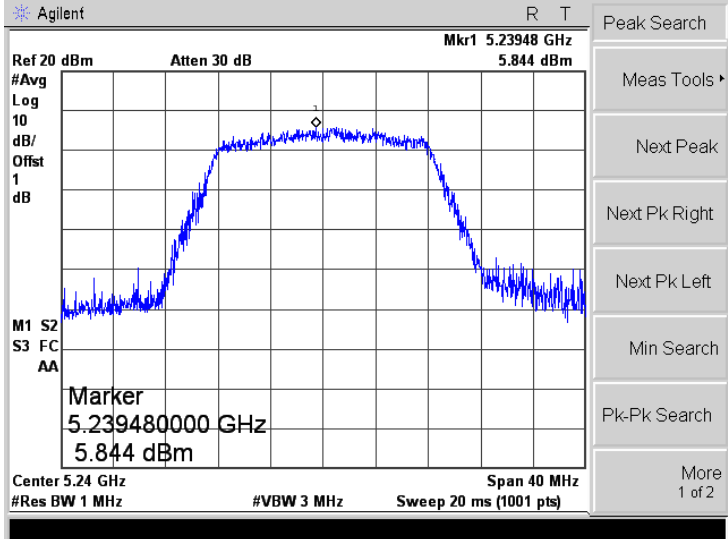➤ 5150-5250MHz




| Mode: | 802.11a |
|---------|--|
| 5180MHz |  |
| 5200MHz |  |
| 5240MHz |  |

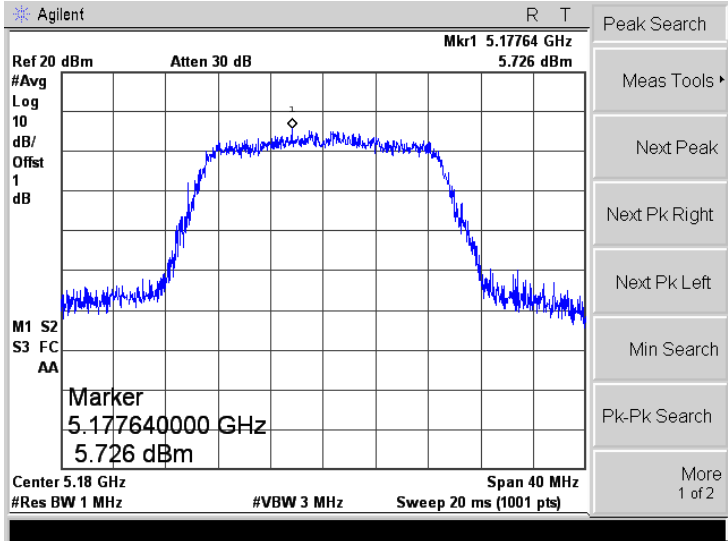
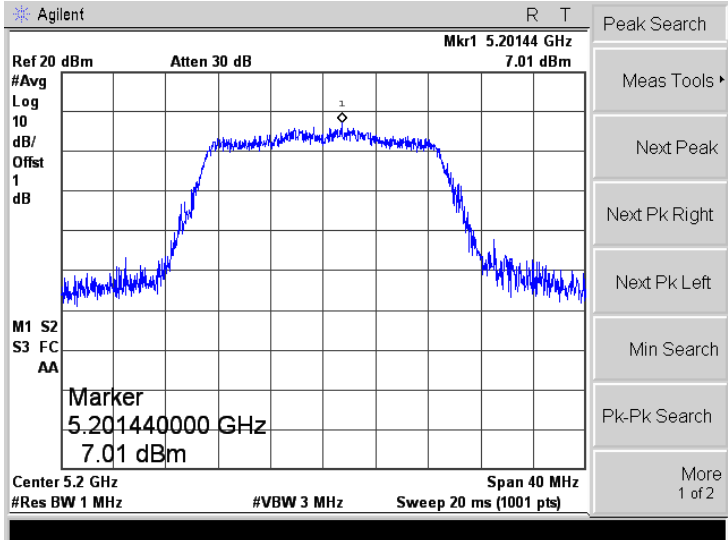
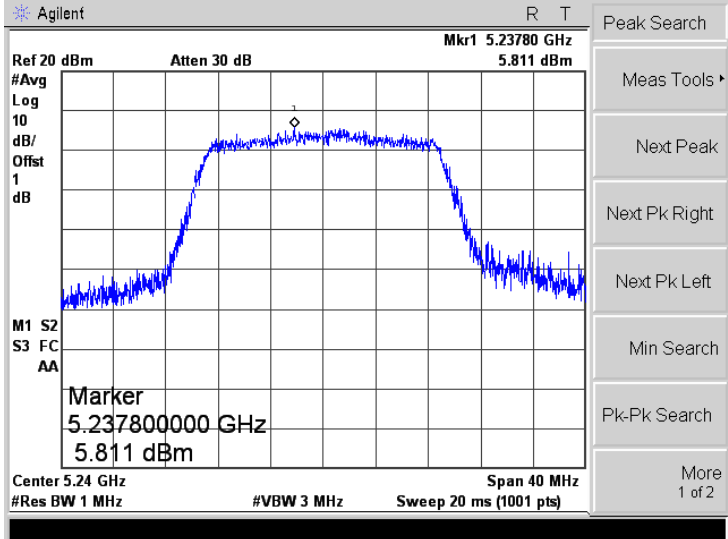
| Mode: | 802.11n-HT20 |
|---------|--|
| 5180MHz |  |
| 5200MHz |  |
| 5240MHz |  |

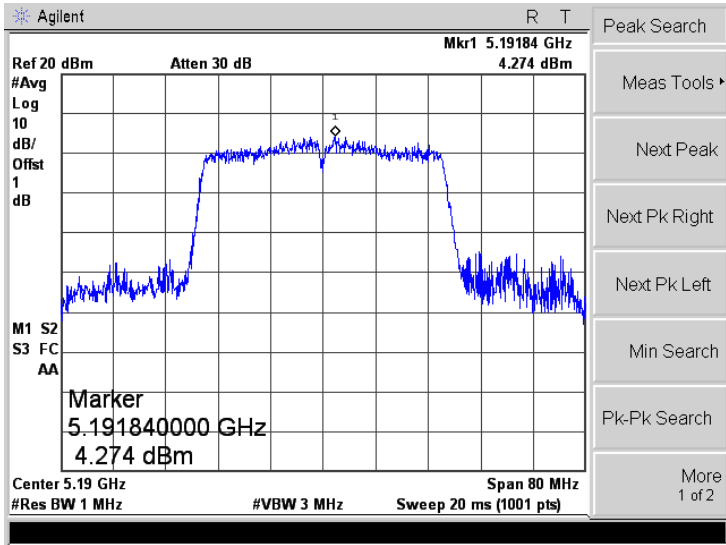
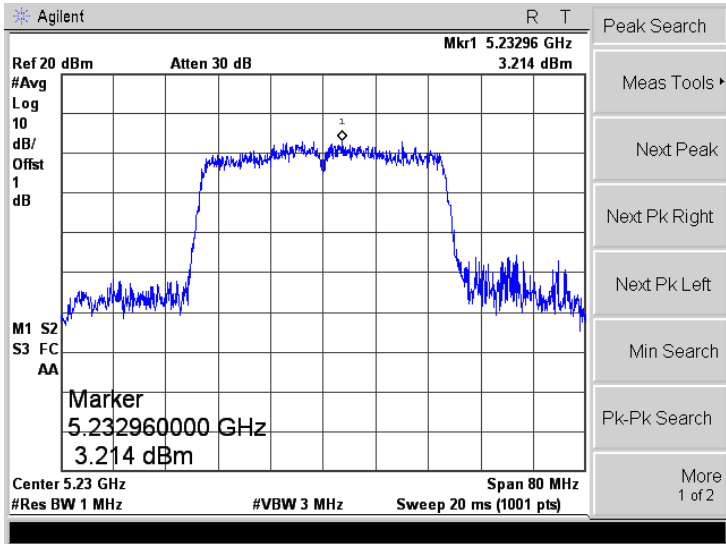
| | |
|----------|---|
| Mode: | 802.11n-HT40 |
| 5190 MHz |  |
| 5230 MHz |  |

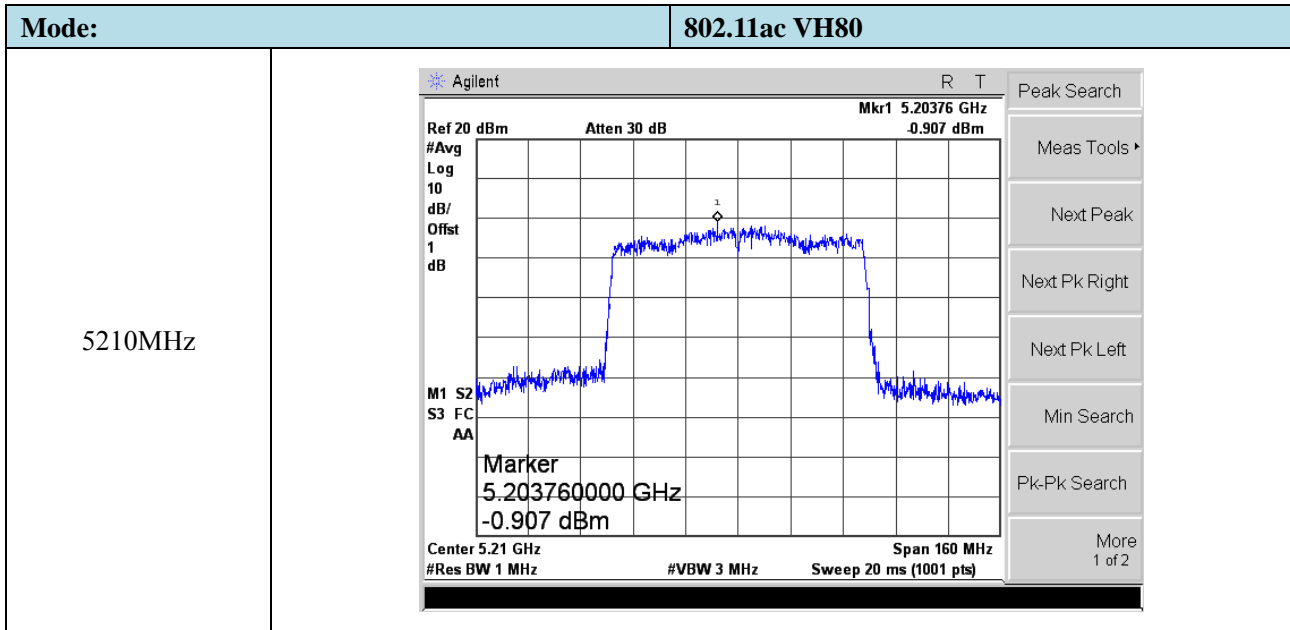


➤ 5725-5850MHz
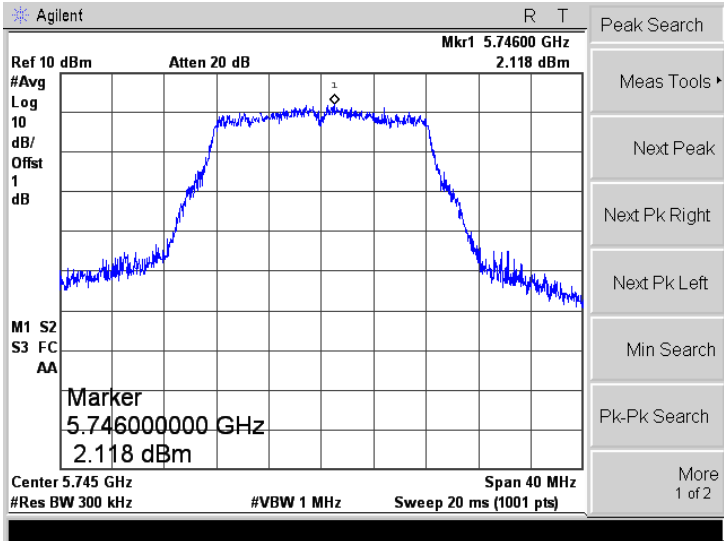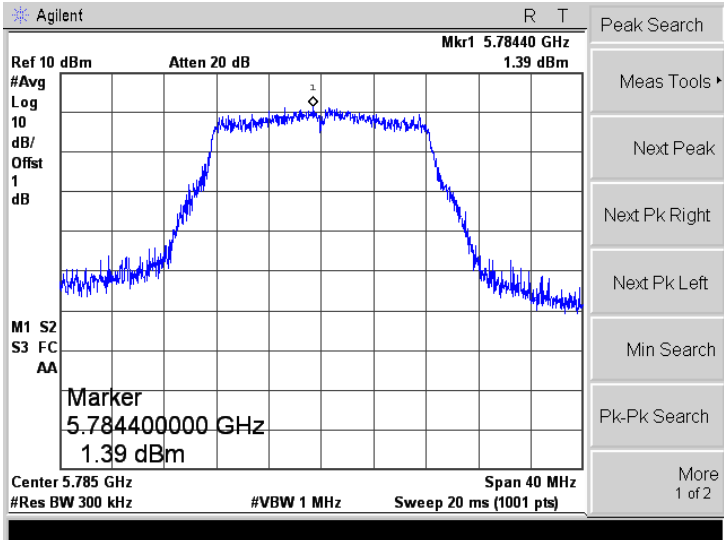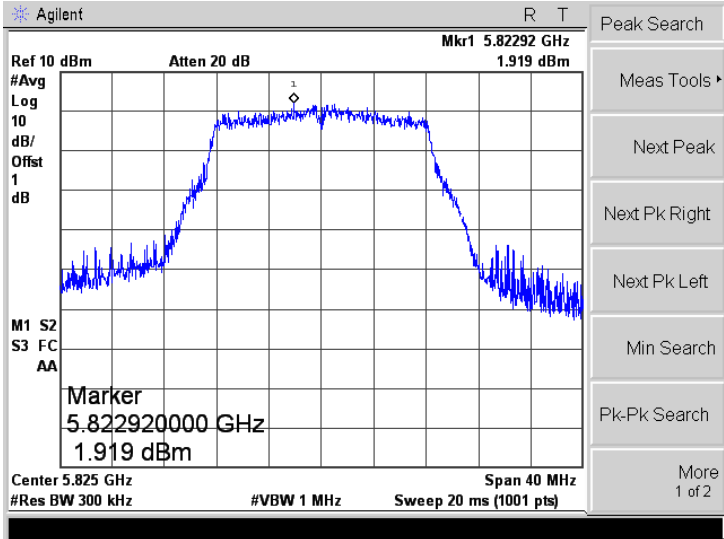
| Mode: | 802.11a |
|---------|--|
| 5745MHz |  |
| 5785MHz |  |
| 5825MHz |  |
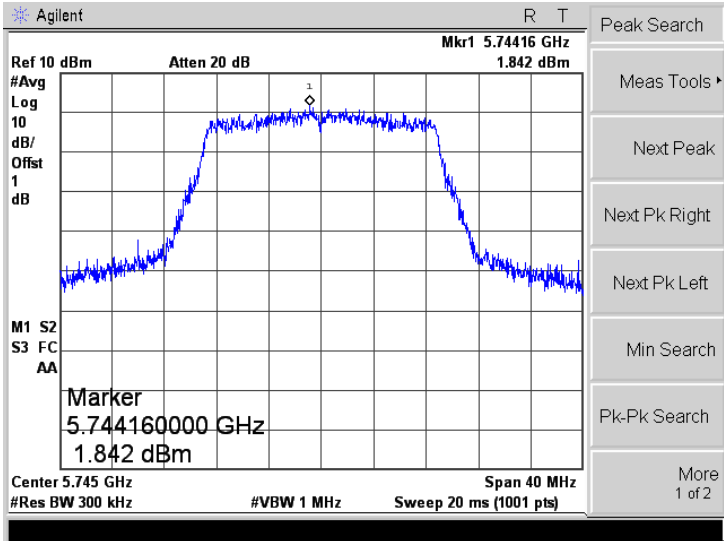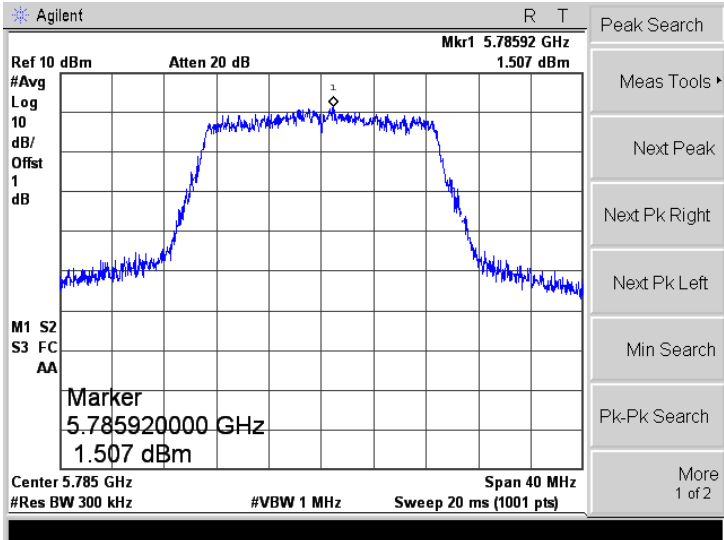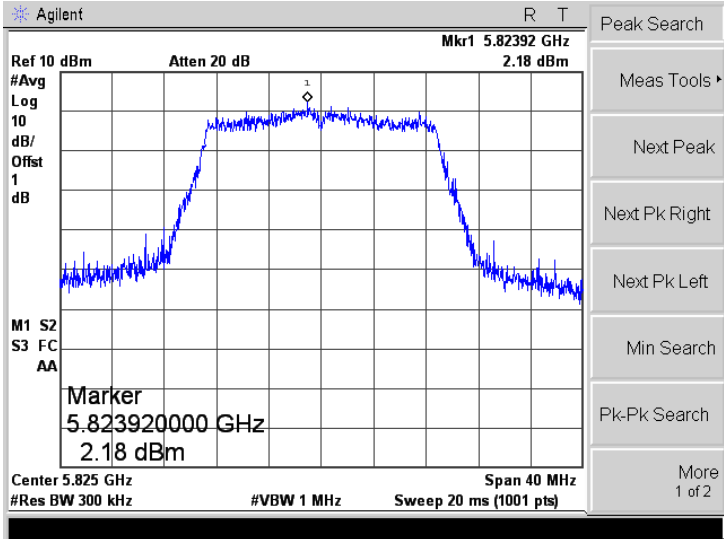
| Mode: | 802.11n-HT20 |
|---------|--|
| 5745MHz |  |
| 5785MHz |  |
| 5825MHz |  |
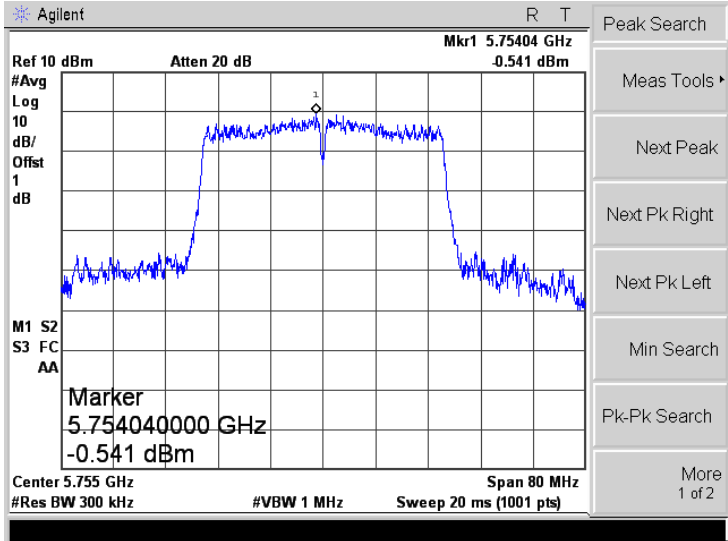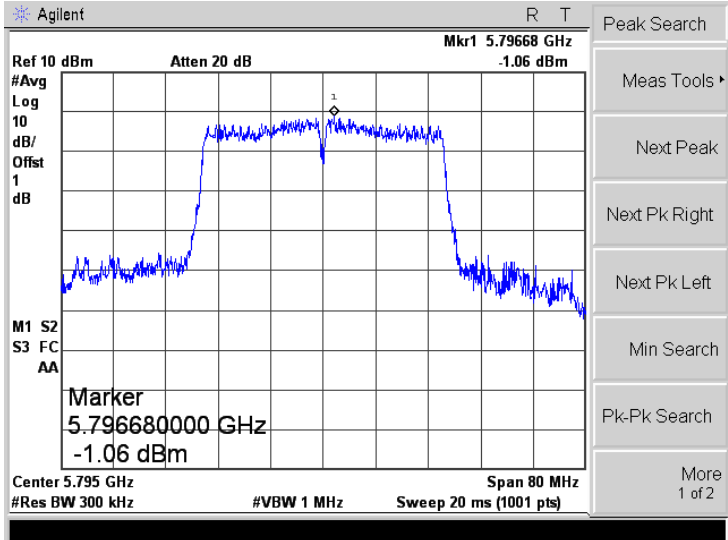
| Mode: | 802.11n-HT40 |
|----------|---|
| 5755 MHz |  <p>Agilent R T</p> <p>Ref 10 dBm Atten 20 dB Mkr1 5.75404 GHz -0.541 dBm</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.754040000 GHz -0.541 dBm</p> <p>Center 5.755 GHz Span 80 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Peak Search Meas Tools ▾ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p> |
| 5795 MHz |  <p>Agilent R T</p> <p>Ref 10 dBm Atten 20 dB Mkr1 5.79668 GHz -1.06 dBm</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.796680000 GHz -1.06 dBm</p> <p>Center 5.795 GHz Span 80 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Peak Search Meas Tools ▾ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p> |

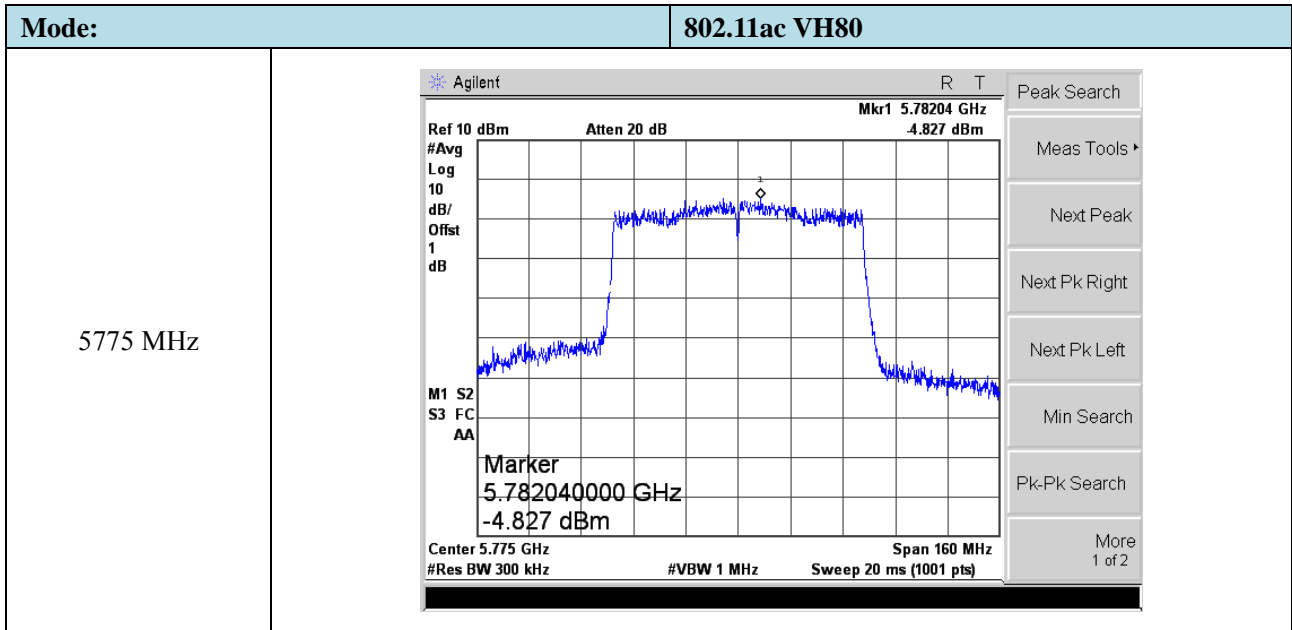

7. Emission Bandwidth and Occupied Bandwidth

7.1 Standard Applicable

According to 15.407 (a) and (e)

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

7.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

a) Set RBW = approximately 1% of the emission bandwidth.

b) Set the VBW > RBW.

c) Detector = Peak.

d) Trace mode = max hold.

e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare

this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:




1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 * \text{RBW}$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.




7.3 Summary of Test Results/Plots



| U-NII-1:5150-5250MHz | | | | |
|----------------------|------------------|---------------------|-------------------|-----------|
| Test Mode | Test Channel MHz | 26 dB Bandwidth MHz | 99% Bandwidth MHz | Limit MHz |
| 802.11a | 5180 | 21.541 | 16.9537 | Pass |
| | 5200 | 21.318 | 16.9329 | Pass |
| | 5240 | 21.314 | 16.9474 | Pass |
| 802.11n-HT20 | 5180 | 21.617 | 18.0328 | Pass |
| | 5200 | 21.614 | 18.0683 | Pass |
| | 5240 | 21.630 | 18.0404 | Pass |
| 802.11n-HT40 | 5190 | 38.958 | 36.1683 | Pass |
| | 5230 | 38.906 | 36.1869 | Pass |
| 802.11ac-HT80 | 5210 | 79.652 | 75.4377 | Pass |


| U-NII-3: 5725-5850MHz | | | | |
|-----------------------|------------------|--------------------|-------------------|------------|
| Test Mode | Test Channel MHz | 6 dB Bandwidth MHz | 99% Bandwidth MHz | Limit MHz |
| 802.11a | 5745 | 16.273 | 16.9729 | ≥ 500 |
| | 5785 | 16.164 | 16.9801 | ≥ 500 |
| | 5825 | 16.222 | 16.9882 | ≥ 500 |
| 802.11n-HT20 | 5745 | 17.424 | 18.0311 | ≥ 500 |
| | 5785 | 17.536 | 18.0533 | ≥ 500 |
| | 5825 | 17.389 | 18.0852 | ≥ 500 |
| 802.11n-HT40 | 5755 | 36.498 | 36.5914 | ≥ 500 |
| | 5795 | 36.301 | 36.5512 | ≥ 500 |
| 802.11ac VH80 | 5775 | 74.573 | 75.4933 | ≥ 500 |

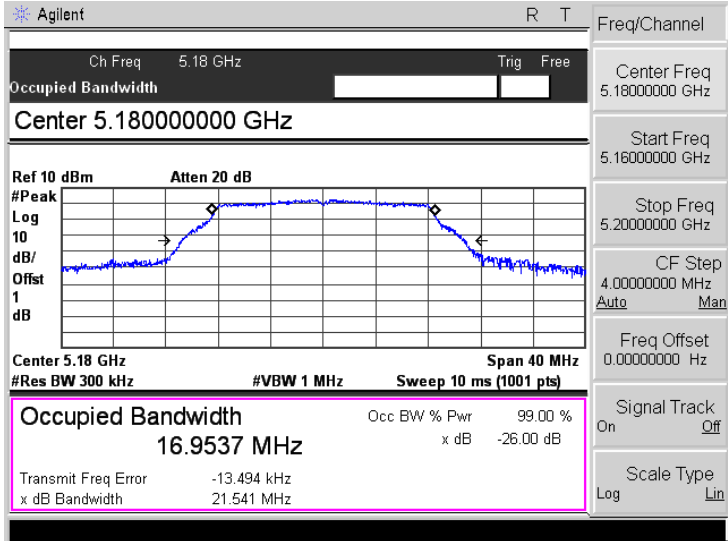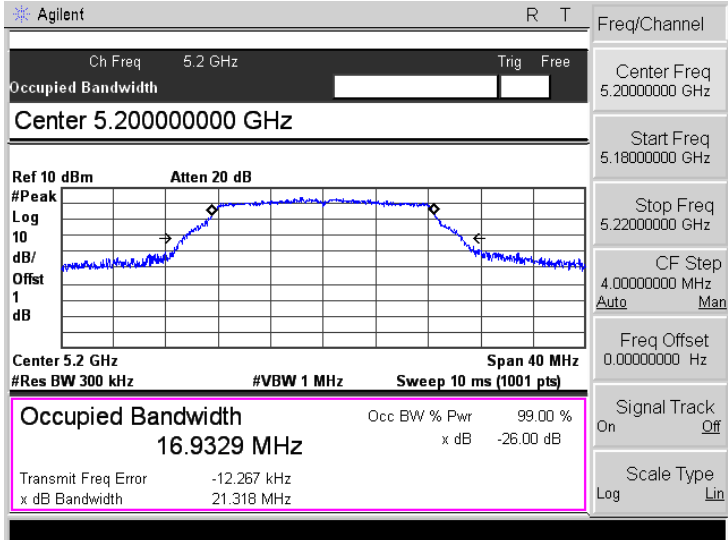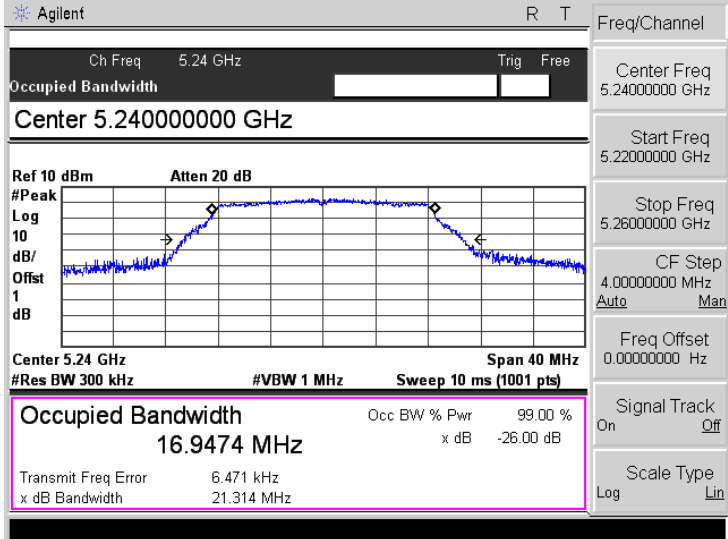➤ 5150-5250MHz




| Mode: | 802.11a |
|---------|--|
| 5180MHz |  |
| 5200MHz |  |
| 5240MHz |  |

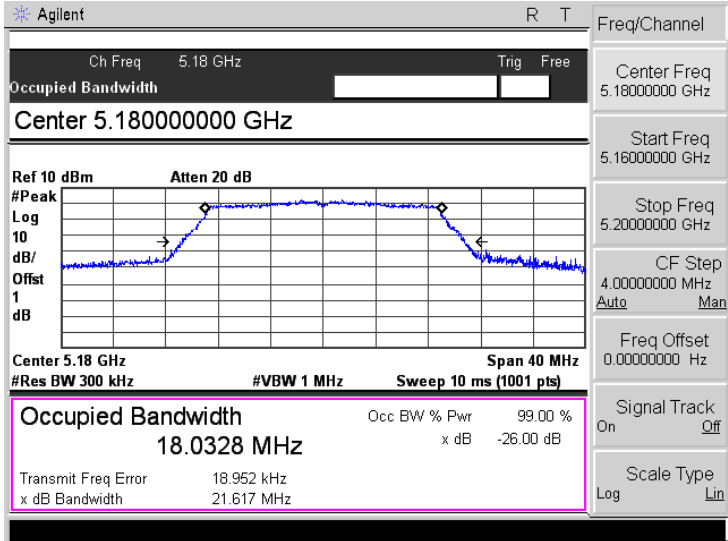
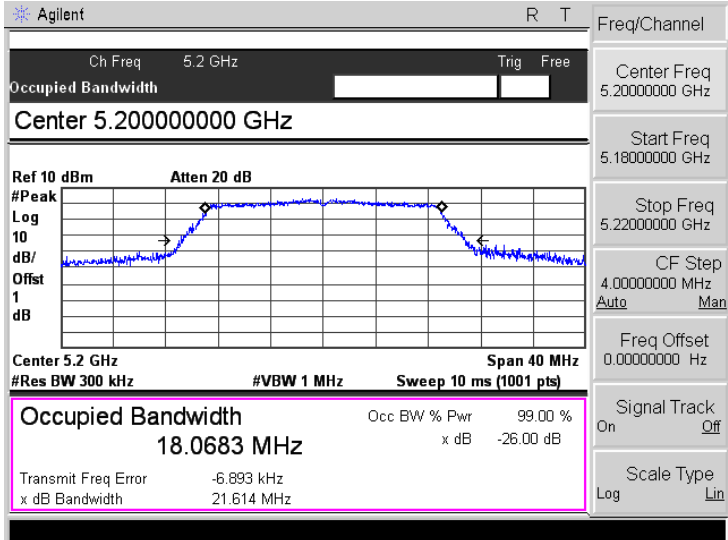
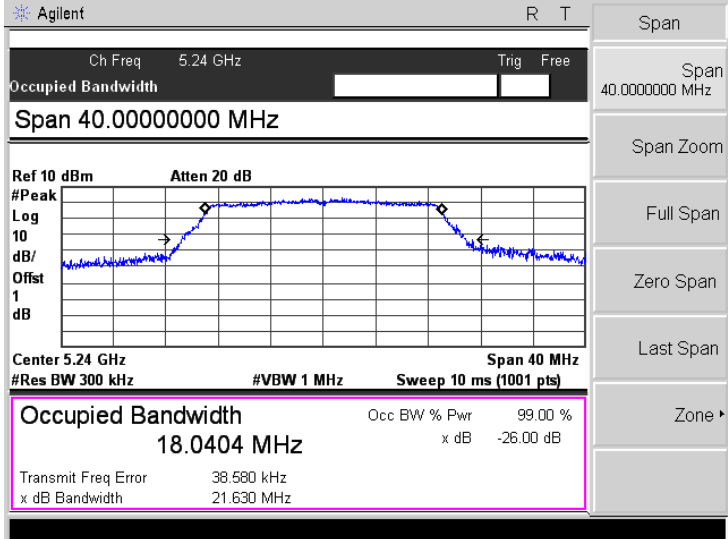
| Mode: | 802.11n-HT20 |
|---------|---|
| 5180MHz |  <p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.18000000 GHz</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 18.0328 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 18.952 kHz</p> <p>x dB Bandwidth 21.617 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.18000000 GHz</p> <p>Start Freq 5.16000000 GHz</p> <p>Stop Freq 5.20000000 GHz</p> <p>CF Step 4.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p> |
| 5200MHz |  <p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.20000000 GHz</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 18.0683 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error -6.893 kHz</p> <p>x dB Bandwidth 21.614 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.20000000 GHz</p> <p>Start Freq 5.18000000 GHz</p> <p>Stop Freq 5.22000000 GHz</p> <p>CF Step 4.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p> |
| 5240MHz |  <p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Span 40.00000000 MHz</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 18.0404 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 38.580 kHz</p> <p>x dB Bandwidth 21.630 MHz</p> <p>Span</p> <p>Span 40.00000000 MHz</p> <p>Span Zoom</p> <p>Full Span</p> <p>Zero Span</p> <p>Last Span</p> <p>Zone</p> |

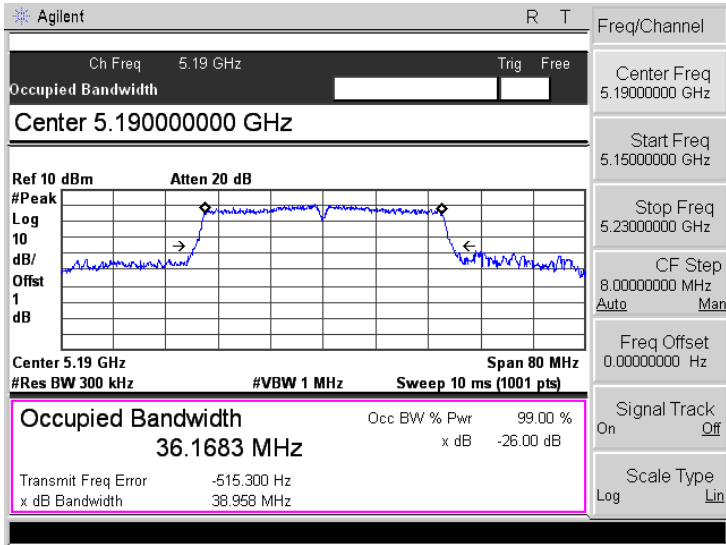
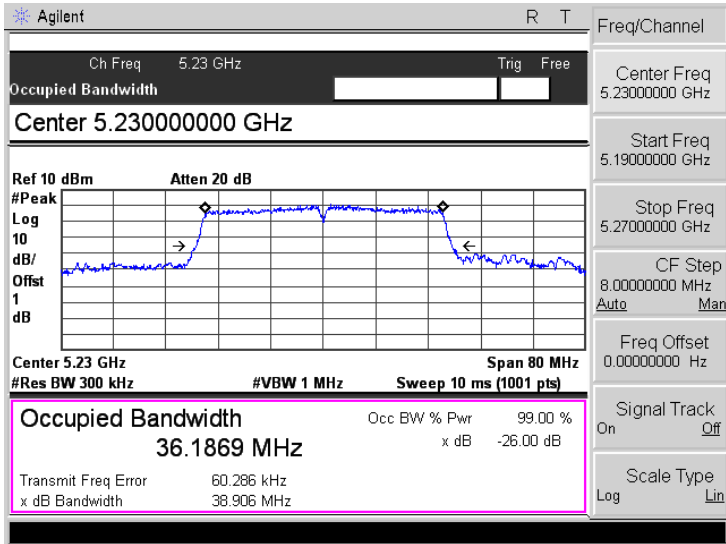
| | |
|----------|---|
| Mode: | 802.11n-HT40 |
| 5190 MHz |  <p>Agilent R T</p> <p>Ch Freq 5.19 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.190000000 GHz</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 5.19 GHz Span 80 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 36.1683 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error -515.300 Hz</p> <p>x dB Bandwidth 38.958 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.19000000 GHz</p> <p>Start Freq 5.15000000 GHz</p> <p>Stop Freq 5.23000000 GHz</p> <p>CF Step 8.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p> |
| 5230 MHz |  <p>Agilent R T</p> <p>Ch Freq 5.23 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.230000000 GHz</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 5.23 GHz Span 80 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 36.1869 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 60.286 kHz</p> <p>x dB Bandwidth 38.906 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.23000000 GHz</p> <p>Start Freq 5.19000000 GHz</p> <p>Stop Freq 5.27000000 GHz</p> <p>CF Step 8.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p> |

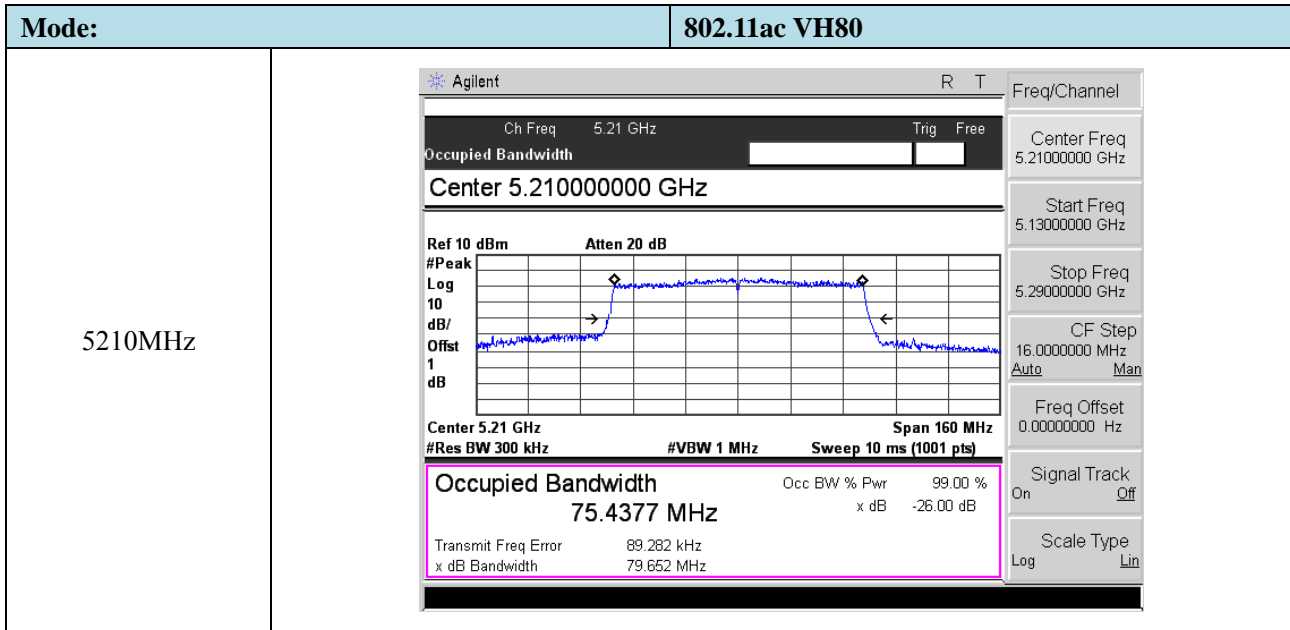


➤ 5725-5850MHz
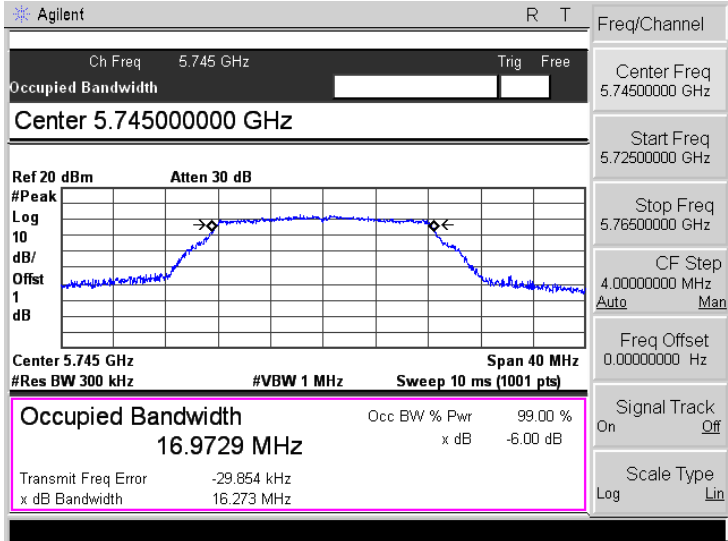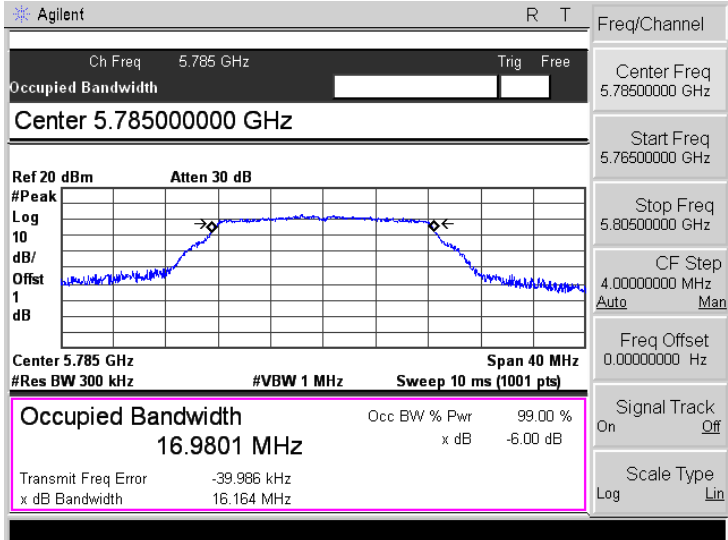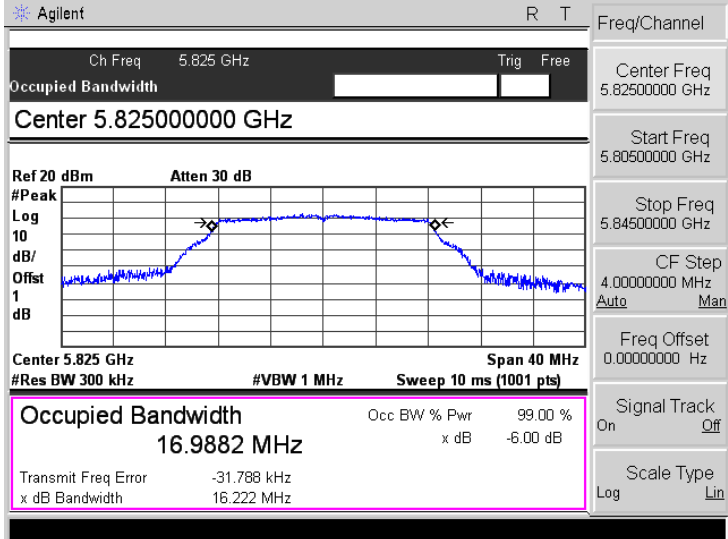
| Mode: | 802.11a |
|---------|---|
| 5745MHz |  <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.74500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.9729 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -29.854 kHz</p> <p>x dB Bandwidth 16.273 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.72500000 GHz</p> <p>Stop Freq 5.76500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p> |
| 5785MHz |  <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.9801 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -39.986 kHz</p> <p>x dB Bandwidth 16.164 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p> |
| 5825MHz |  <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.82500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.9882 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -31.788 kHz</p> <p>x dB Bandwidth 16.222 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.80500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p> |
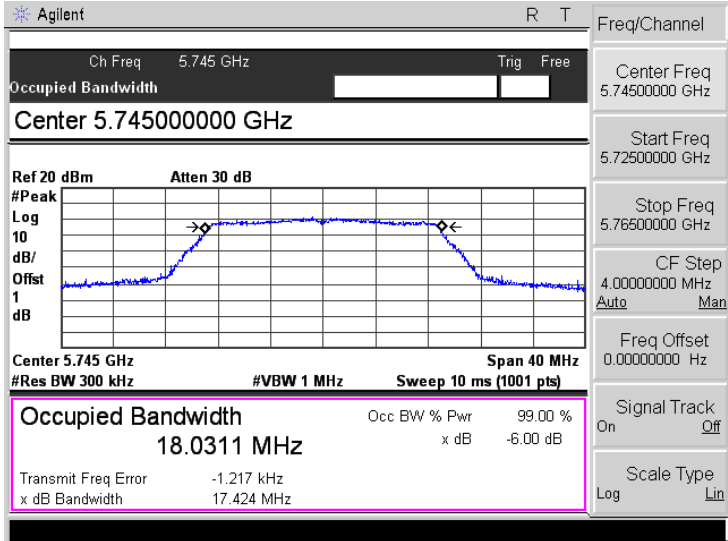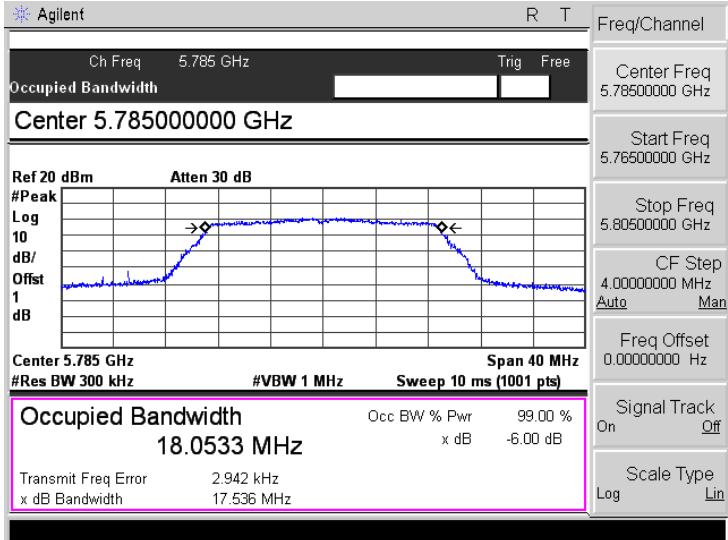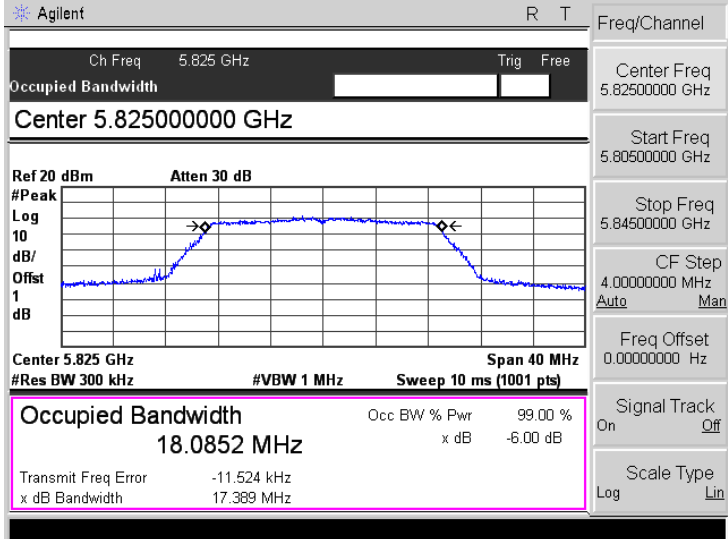
| Mode: | 802.11n-HT20 |
|---------|---|
| 5745MHz |  <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.74500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 18.0311 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -1.217 kHz</p> <p>x dB Bandwidth 17.424 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.72500000 GHz</p> <p>Stop Freq 5.76500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p> |
| 5785MHz |  <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 18.0533 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 2.942 kHz</p> <p>x dB Bandwidth 17.536 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p> |
| 5825MHz |  <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.82500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 18.0852 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -11.524 kHz</p> <p>x dB Bandwidth 17.369 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.80500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p> |
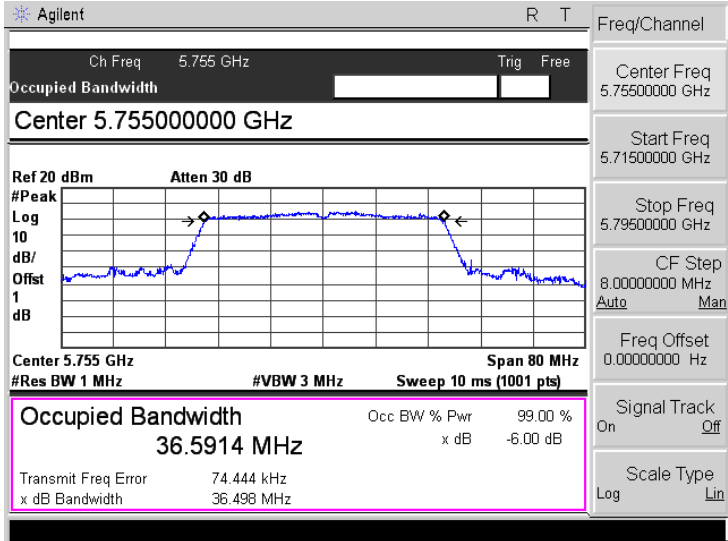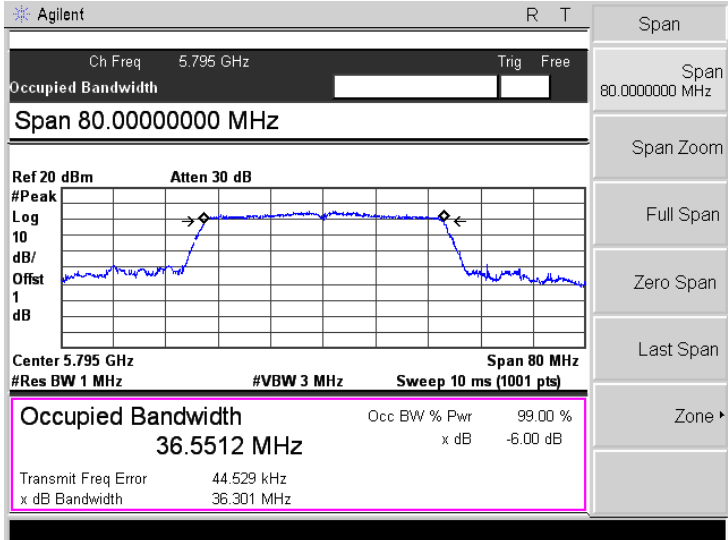
| Mode: | 802.11n-HT40 |
|----------|---|
| 5755 MHz |  |
| 5795 MHz |  |

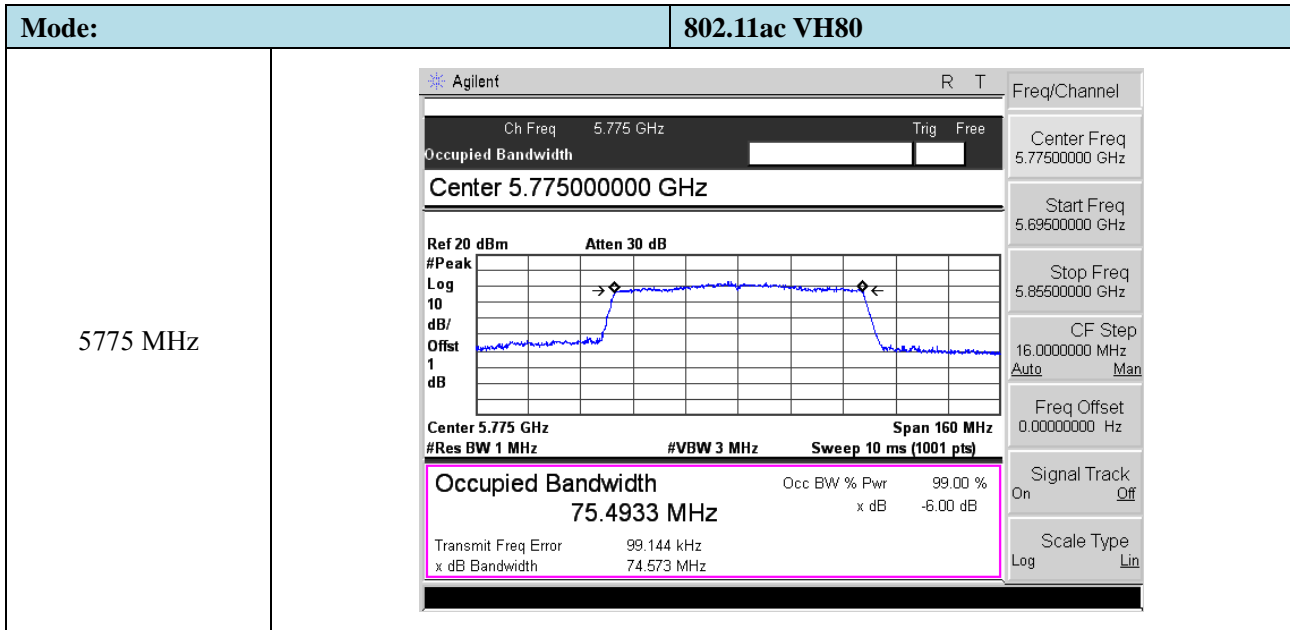

8. Maximum Conducted Output Power

8.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

8.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW ≥ 3 MHz.
- (iv) Number of points in sweep $\geq 2 \text{ Span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.




- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle \geq 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.




8.3 Summary of Test Results/Plots



| U-NII-1:5150-5250MHz | | | | |
|-----------------------------|---------------|------------------|-----------------|----------|
| Test mode | Frequency MHz | Output Power dBm | Output Power mW | Limit mW |
| 802.11a | 5180 | 9.34 | 8.59 | 250 |
| | 5200 | 9.80 | 9.55 | 250 |
| | 5240 | 9.59 | 9.10 | 250 |
| 802.11n-HT20 | 5180 | 9.02 | 7.98 | 250 |
| | 5200 | 9.59 | 9.10 | 250 |
| | 5240 | 8.98 | 7.91 | 250 |
| 802.11n-HT40 | 5190 | 8.45 | 7.00 | 250 |
| | 5230 | 8.14 | 6.52 | 250 |
| 802.11ac VH80 | 5210 | 5.50 | 3.55 | 250 |


| U-NII-3: 5725-5850MHz | | | | |
|------------------------------|---------------|------------------|-----------------|----------|
| Test mode | Frequency MHz | Output Power dBm | Output Power mW | Limit mW |
| 802.11a | 5745 | 9.14 | 8.20 | 1000 |
| | 5785 | 9.40 | 8.71 | 1000 |
| | 5825 | 9.28 | 8.47 | 1000 |
| 802.11n-HT20 | 5745 | 8.71 | 7.43 | 1000 |
| | 5785 | 8.92 | 7.80 | 1000 |
| | 5825 | 8.39 | 6.90 | 1000 |
| 802.11n-HT40 | 5755 | 8.15 | 6.53 | 1000 |
| | 5795 | 7.96 | 6.25 | 1000 |
| 802.11ac VH80 | 5775 | 6.66 | 4.63 | 1000 |

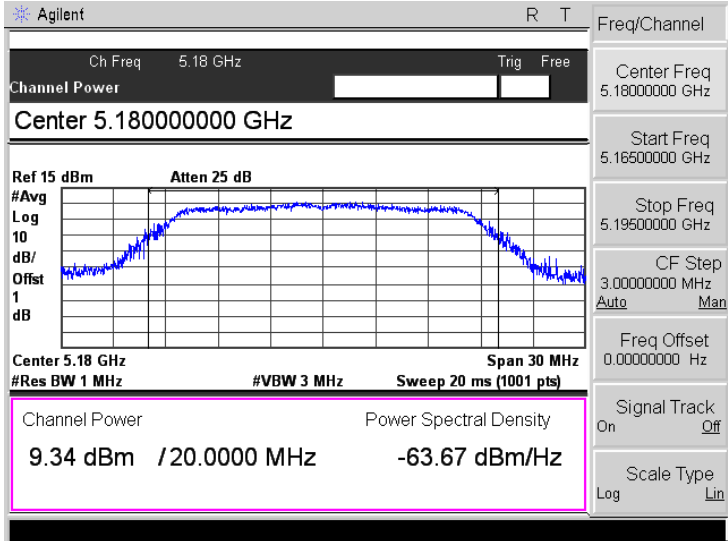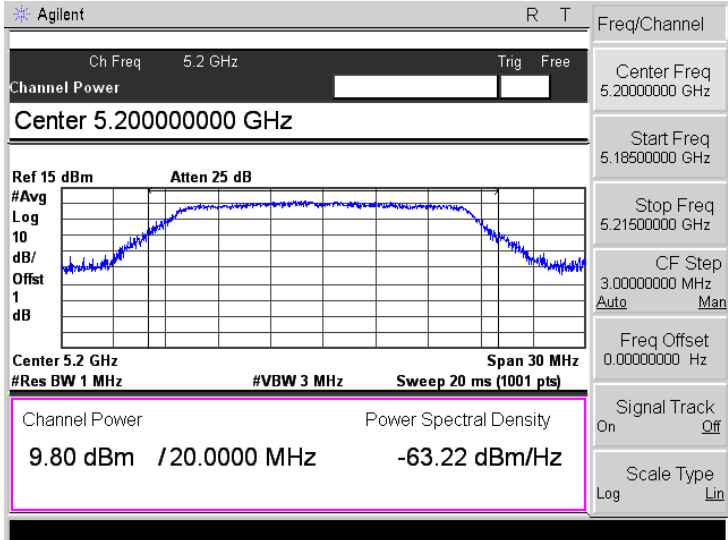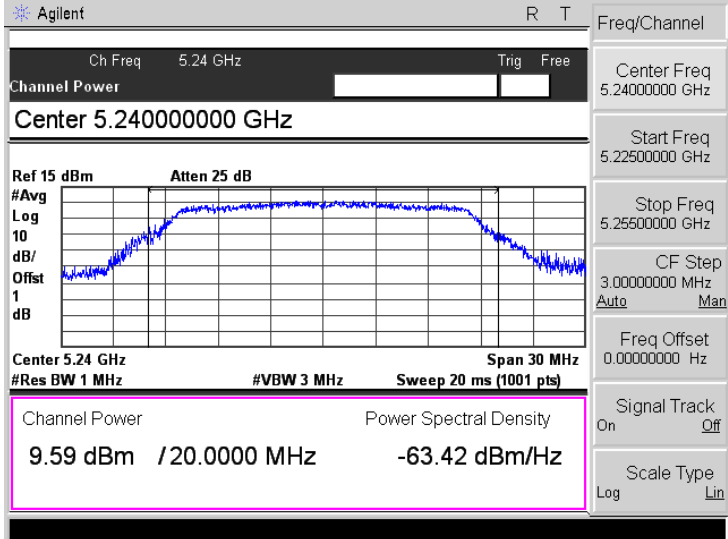➤ 5150-5250MHz




| Mode: | 802.11a |
|---------|--|
| 5180MHz |  |
| 5200MHz |  |
| 5240MHz |  |

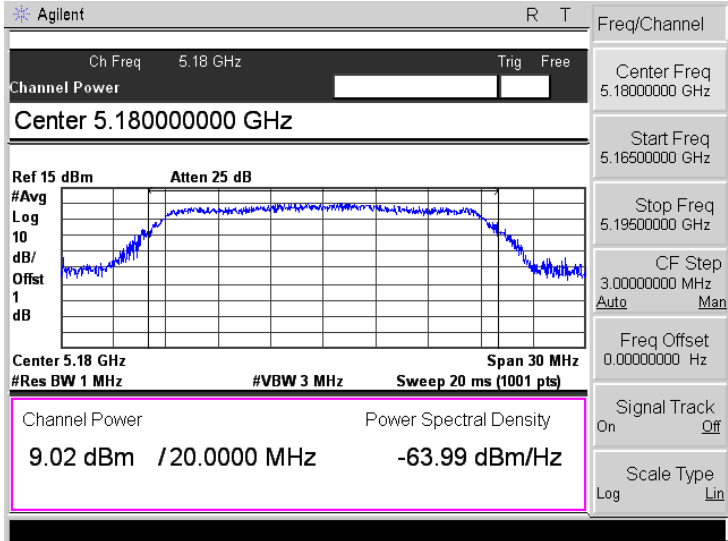
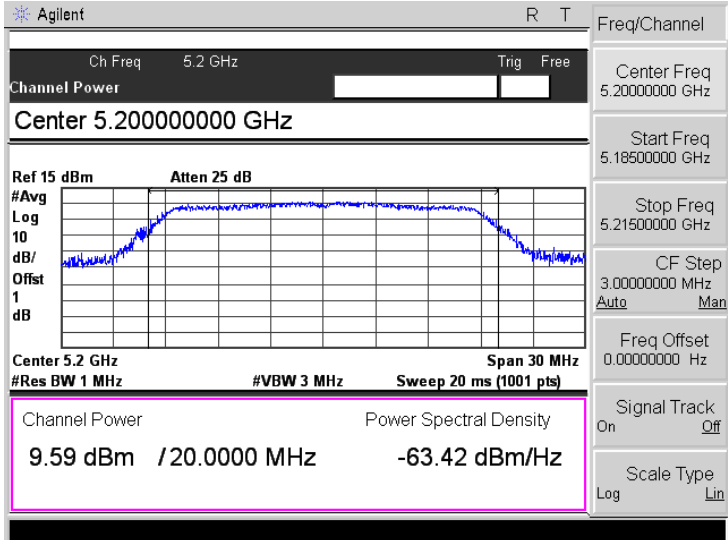
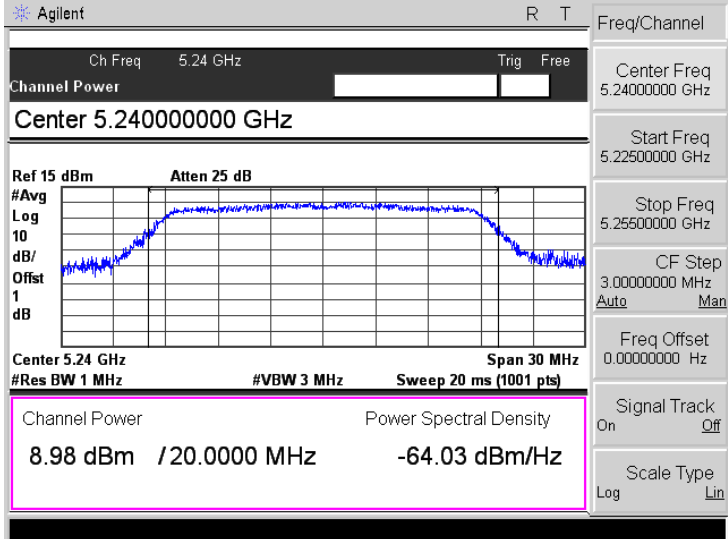
| Mode: | 802.11n-HT20 |
|---------|--|
| 5180MHz |  |
| 5200MHz |  |
| 5240MHz |  |

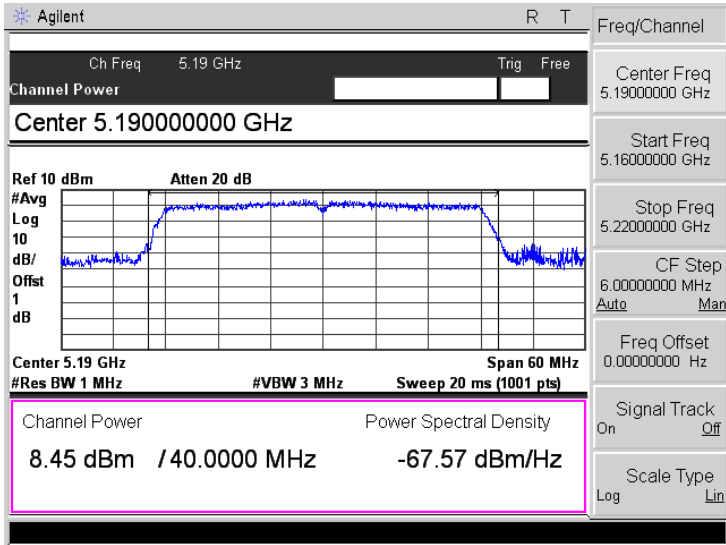
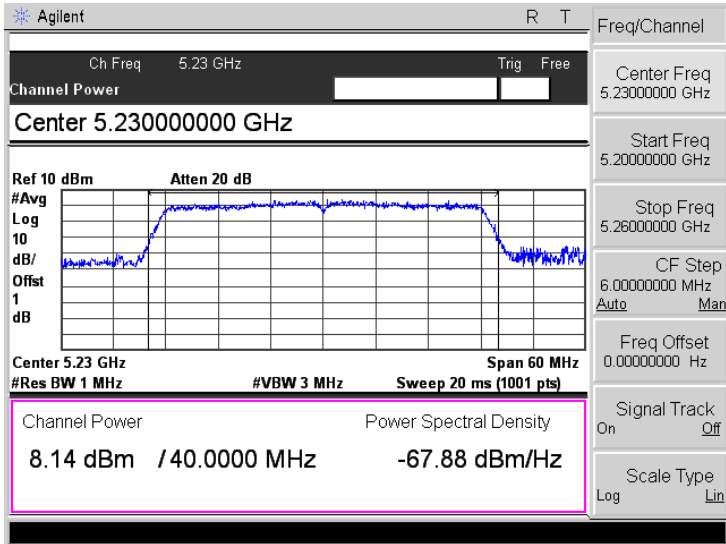
| | |
|----------|---|
| Mode: | 802.11n-HT40 |
| 5190 MHz |  |
| 5230 MHz |  |

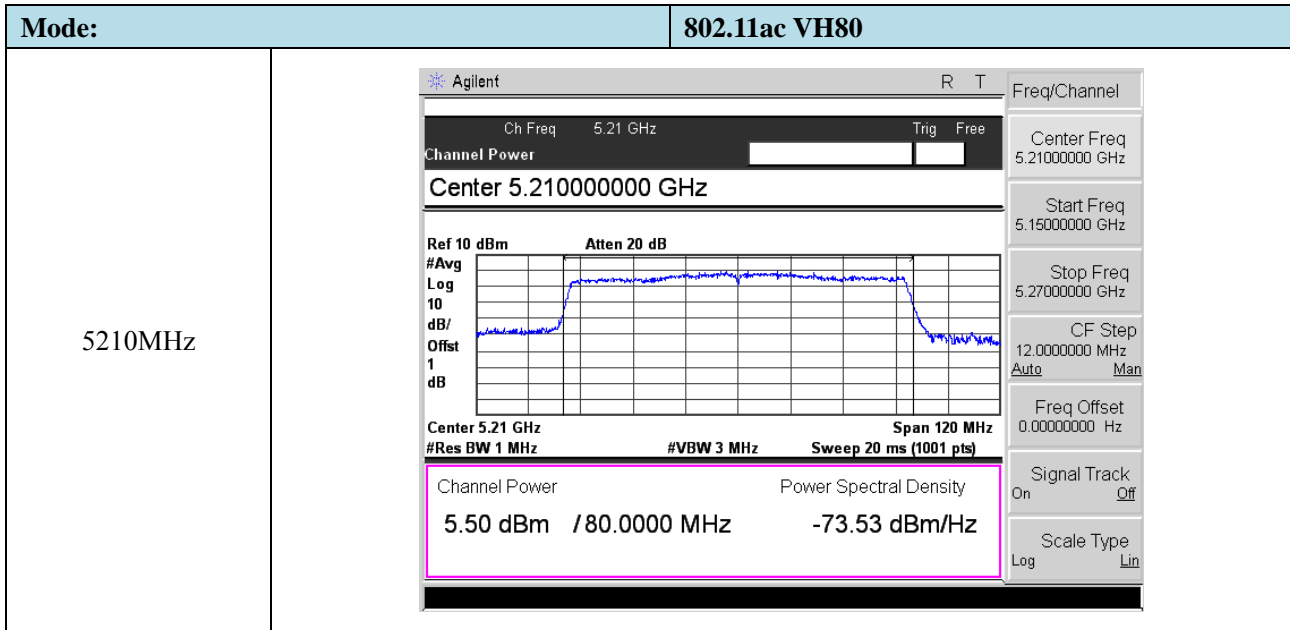


➤ 5725-5850MHz
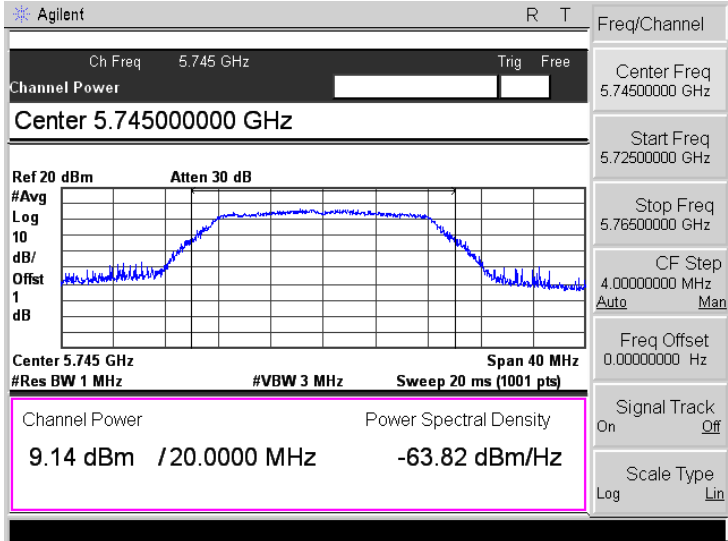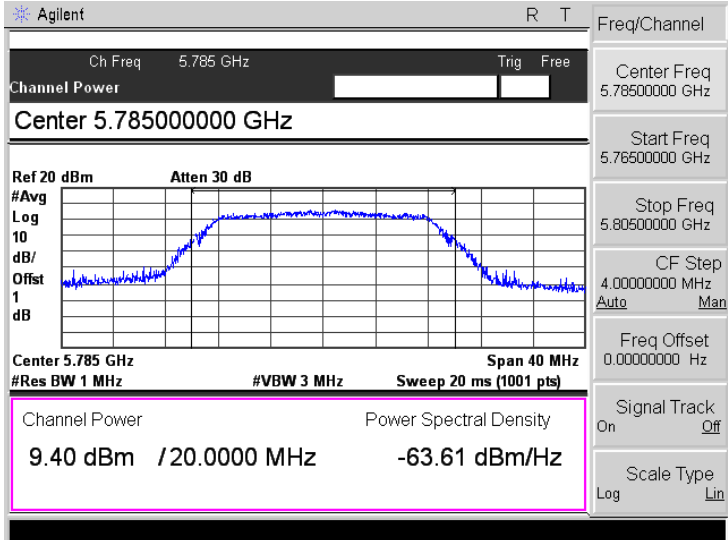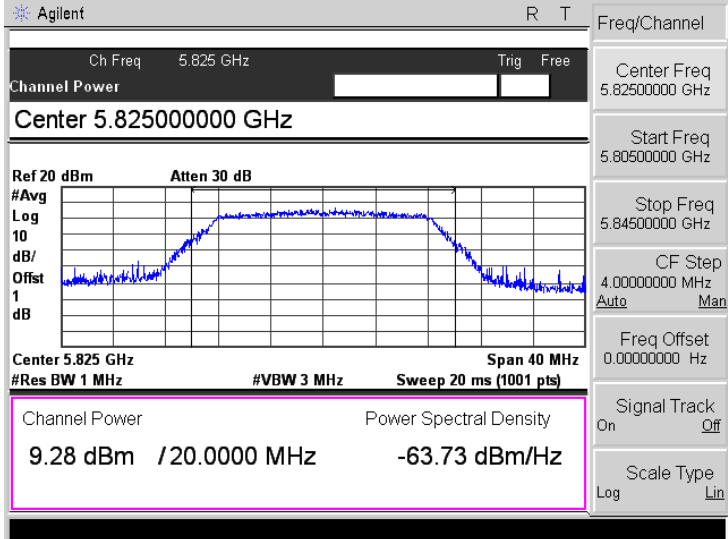
| Mode: | 802.11a |
|---------|--|
| 5745MHz |  |
| 5785MHz |  |
| 5825MHz |  |
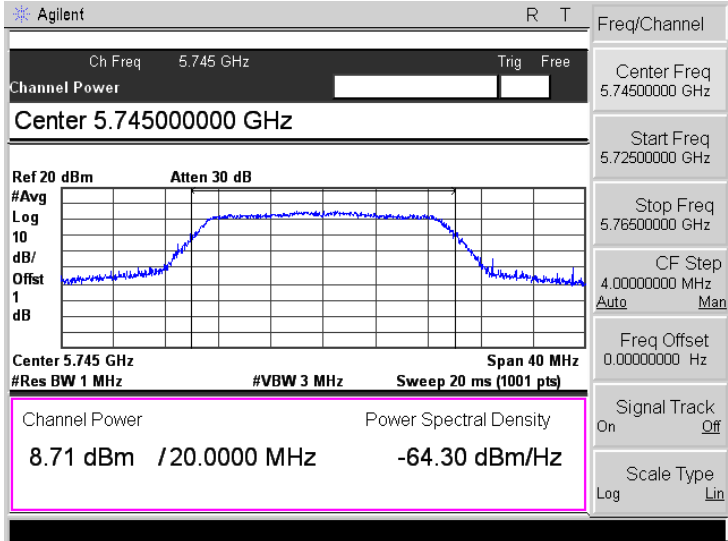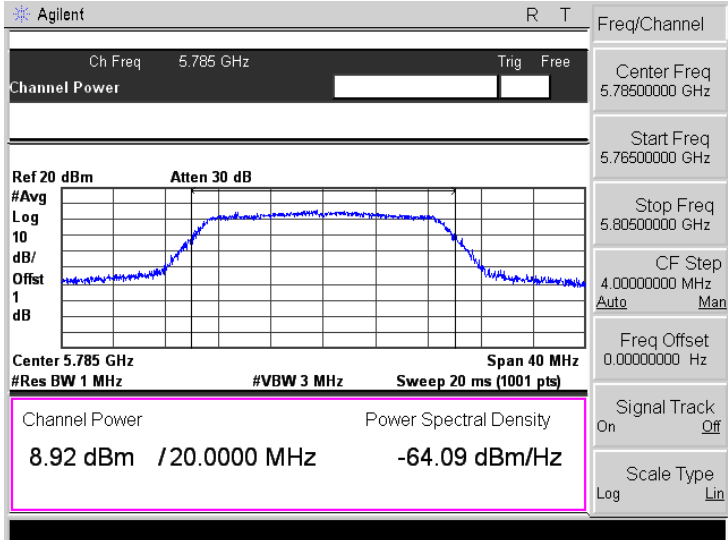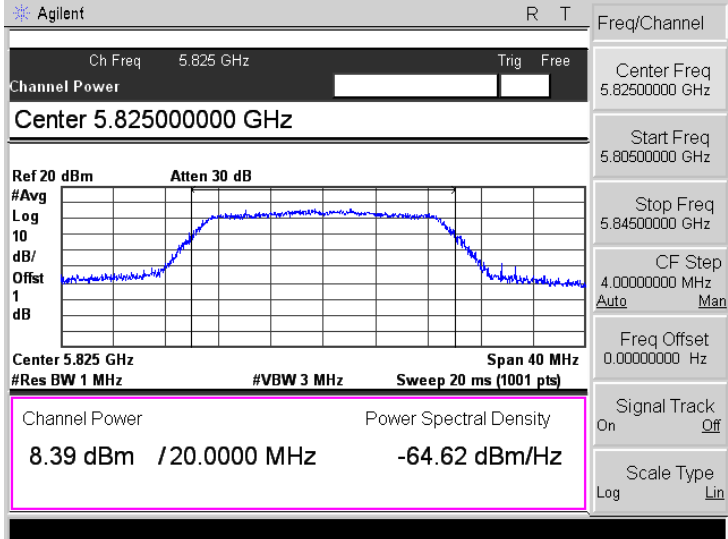
| Mode: | 802.11n-HT20 |
|---------|--|
| 5745MHz |  |
| 5785MHz |  |
| 5825MHz |  |
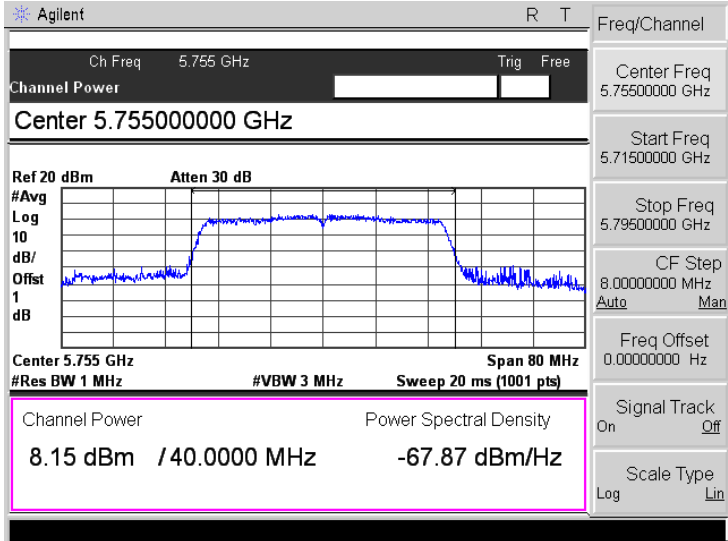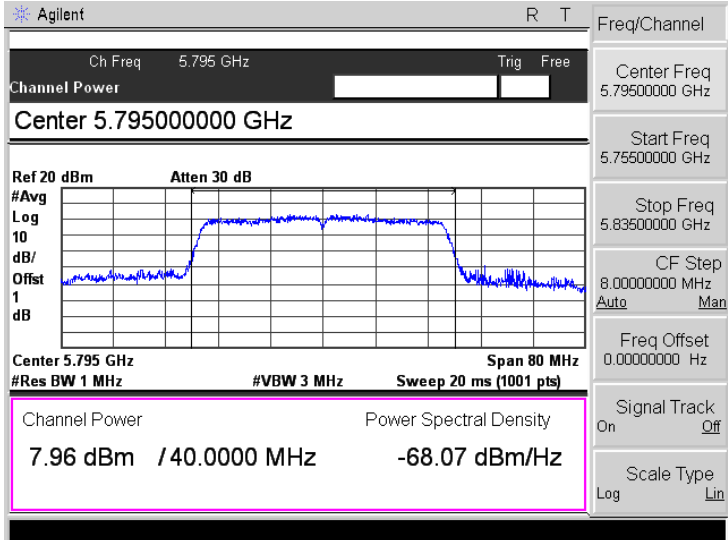
| Mode: | 802.11n-HT40 |
|----------|---|
| 5755 MHz |  |
| 5795 MHz |  |

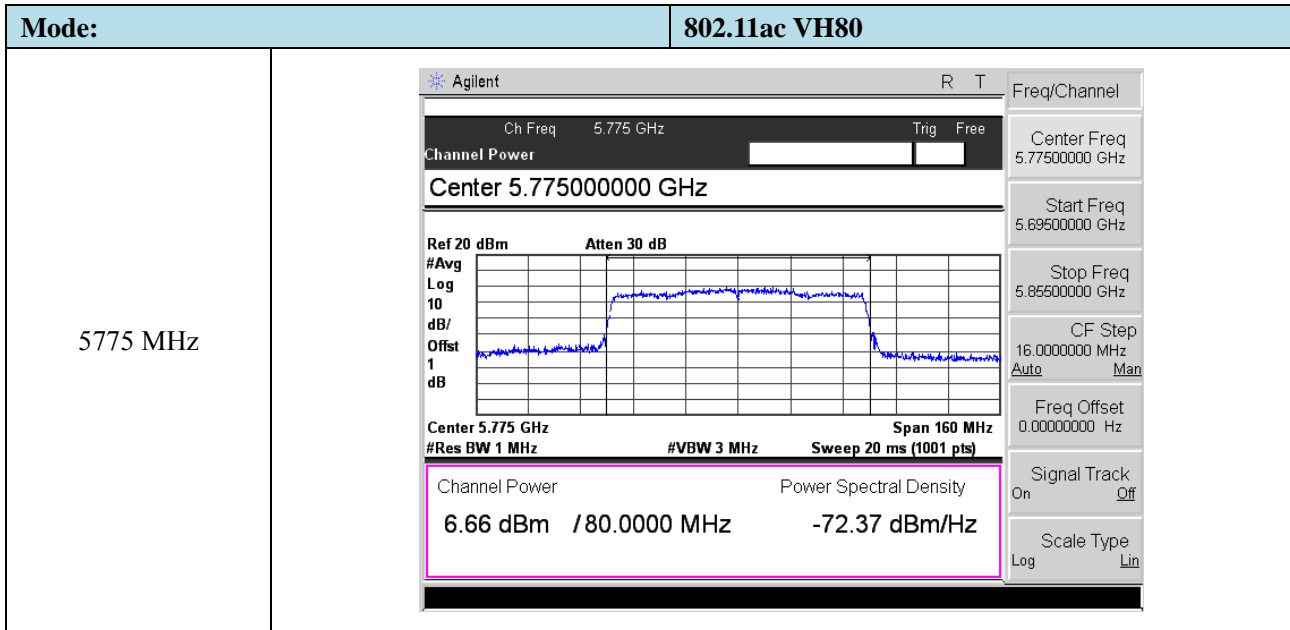

9. Radiated Spurious Emissions

9.1 Standard Applicable

According to §15.407(b)(6), Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.

According to §15.407(b)(7), The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

789033 D02 v02r01 General UNII Test Procedures New Rules v02

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E \cdot d)^2) / 30$$

where:

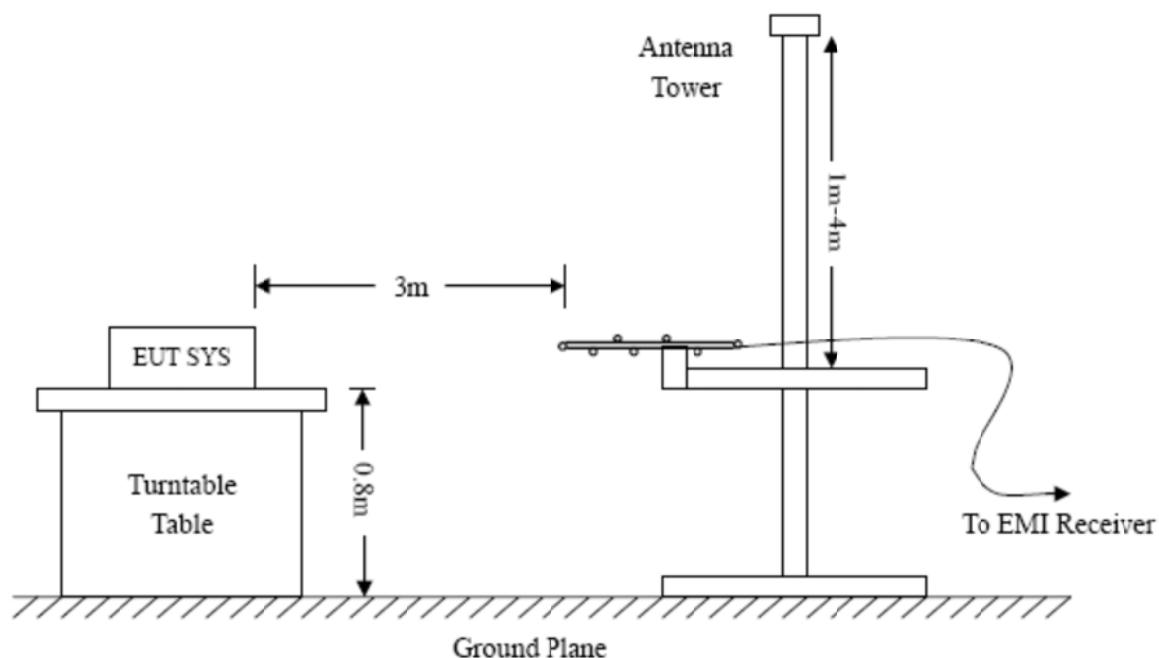
- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

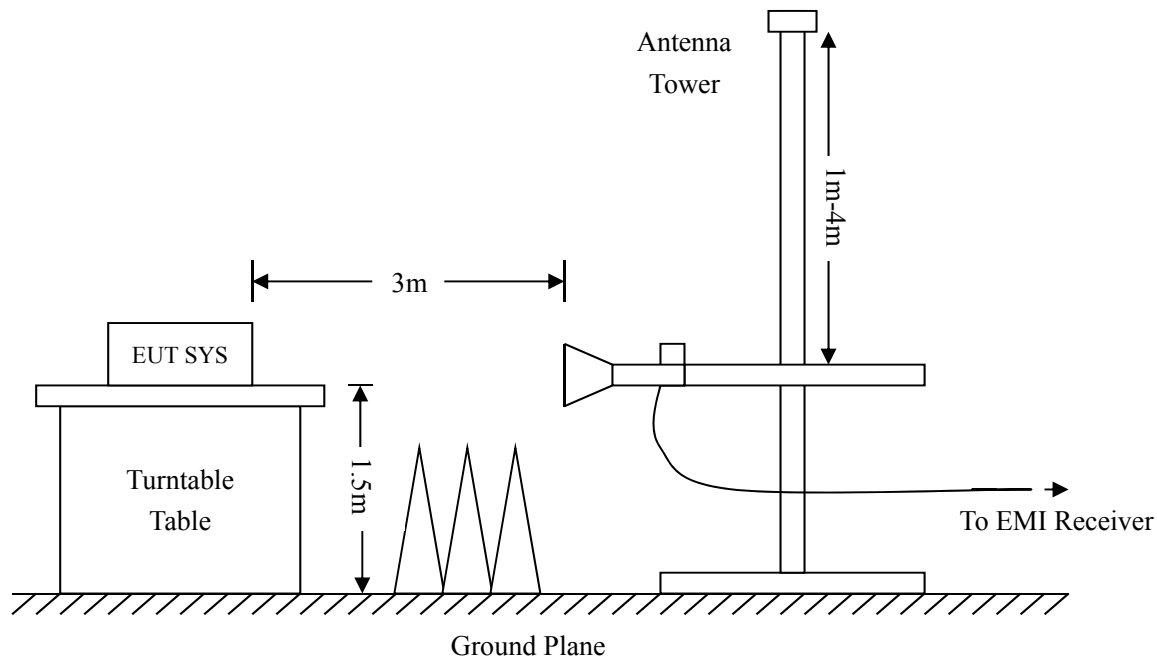
9.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.





9.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

9.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


9.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

- Spurious Emission From 30 MHz to 1 GHz
- 5150-5250MHz


802.11a(Worst case)

| | | | |
|--------------|---------|-----------|------------|
| Test Channel | 5180MHz | Polarity: | Horizontal |
|--------------|---------|-----------|------------|

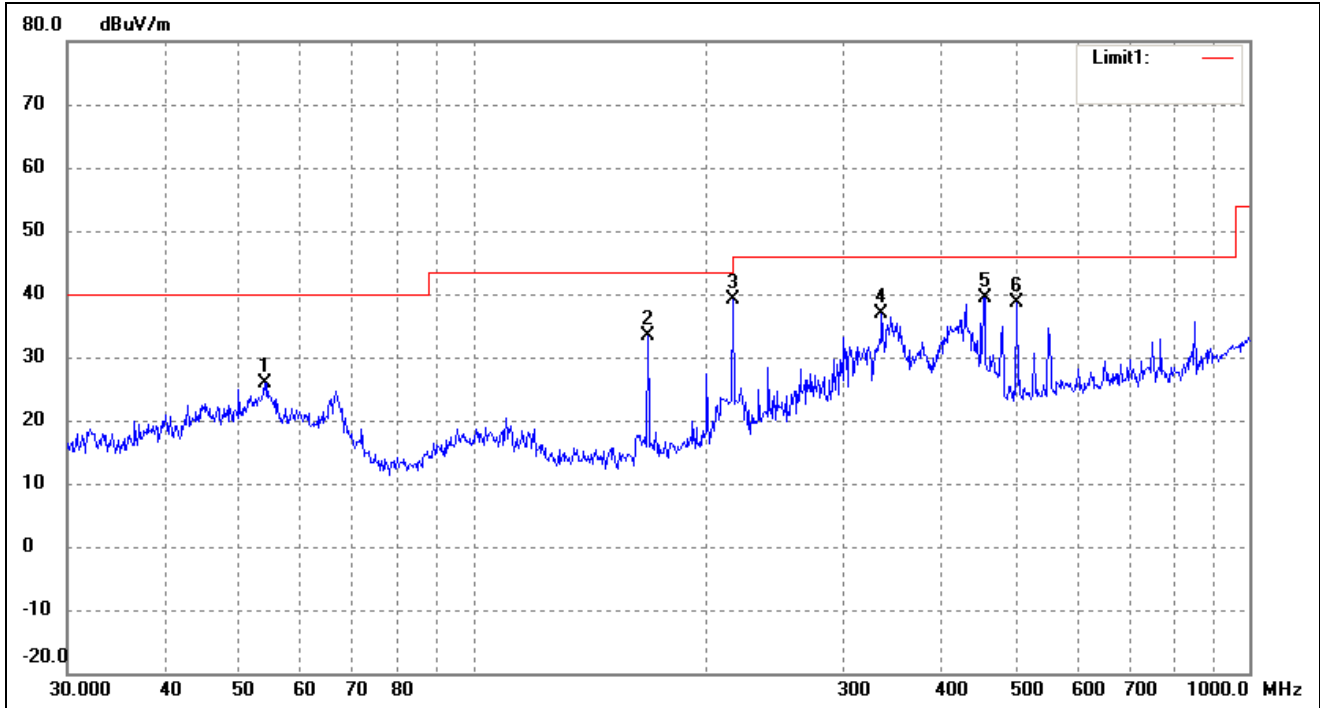


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1 | 53.8818 | 38.92 | -12.97 | 25.95 | 40.00 | -14.05 | 220 | 100 | peak |
| 2 | 167.8243 | 48.84 | -15.48 | 33.36 | 43.50 | -10.14 | 90 | 100 | peak |
| 3 | 216.0240 | 50.95 | -11.73 | 39.22 | 46.00 | -6.78 | 149 | 100 | peak |
| 4 | 336.0352 | 43.40 | -6.62 | 36.78 | 46.00 | -9.22 | 118 | 100 | peak |
| 5 | 455.9058 | 45.84 | -6.37 | 39.47 | 46.00 | -6.53 | 84 | 100 | peak |
| 6 | 501.1790 | 44.49 | -5.98 | 38.51 | 46.00 | -7.49 | 303 | 100 | peak |

| | | | |
|--------------|---------|-----------|----------|
| 802.11a | | | |
| Test Channel | 5180MHz | Polarity: | Vertical |

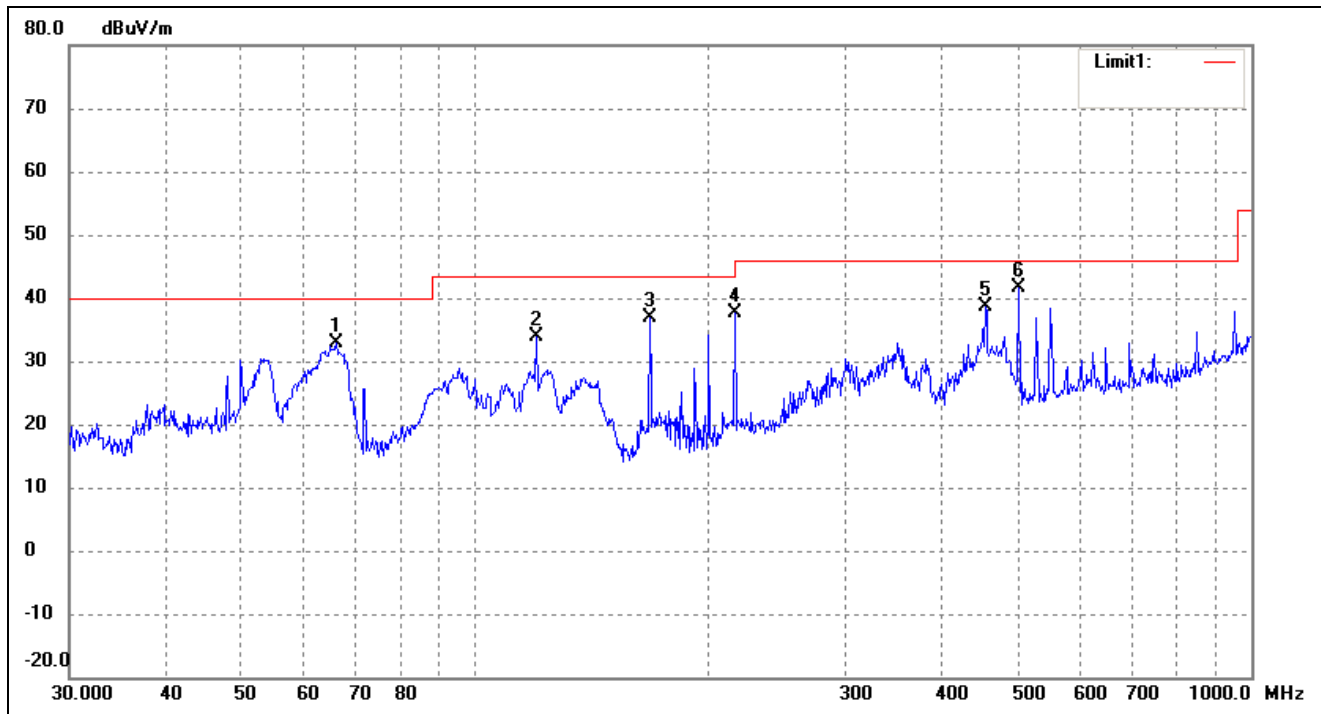

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1 | 66.2662 | 48.58 | -15.73 | 32.85 | 40.00 | -7.15 | 64 | 100 | peak |
| 2 | 119.8556 | 49.40 | -15.44 | 33.96 | 43.50 | -9.54 | 314 | 100 | peak |
| 3 | 167.8243 | 52.44 | -15.48 | 36.96 | 43.50 | -6.54 | 69 | 100 | peak |
| 4 | 216.0240 | 49.43 | -11.73 | 37.70 | 46.00 | -8.30 | 287 | 100 | peak |
| 5 | 454.3100 | 45.07 | -6.40 | 38.67 | 46.00 | -7.33 | 183 | 100 | peak |
| 6 | 501.1790 | 47.67 | -5.98 | 41.69 | 46.00 | -4.31 | 198 | 100 | peak |

| | | | |
|---------------------|---------|-----------|------------|
| 802.11a(Worst case) | | | |
| Test Channel | 5200MHz | Polarity: | Horizontal |

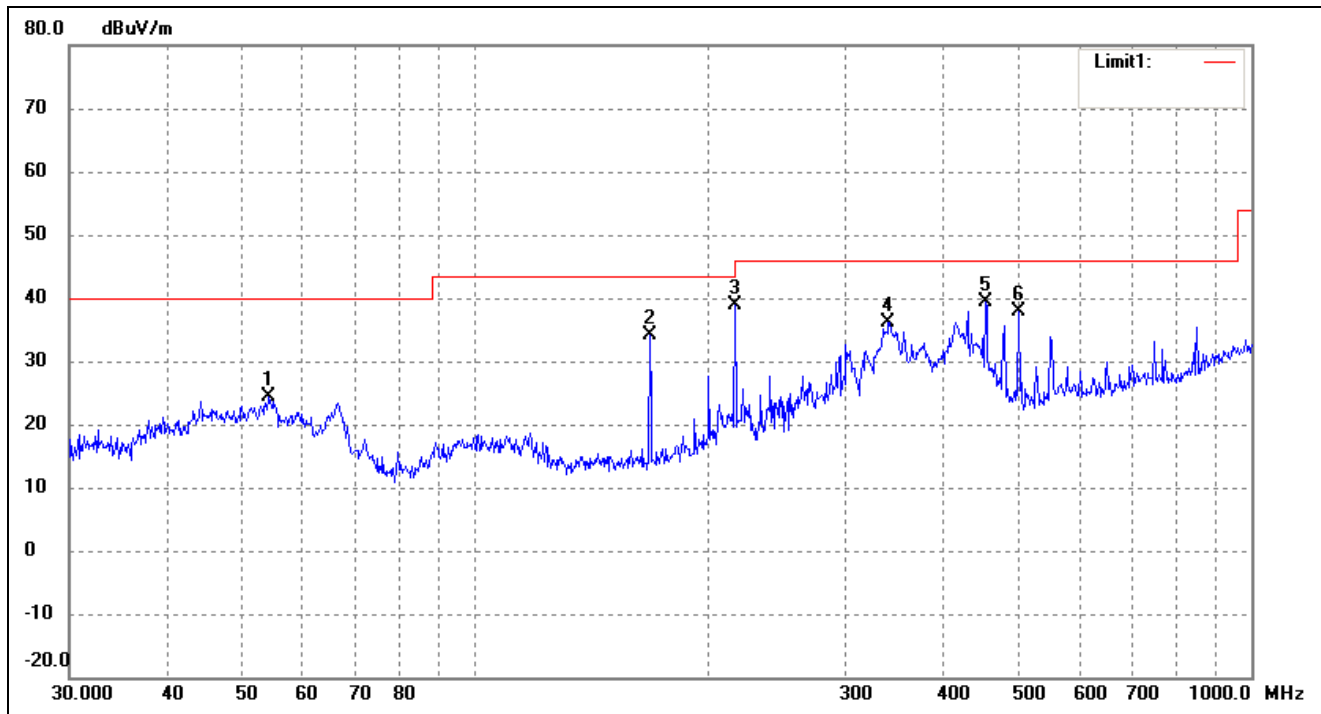

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1 | 54.2610 | 37.35 | -13.05 | 24.30 | 40.00 | -15.70 | 60 | 100 | peak |
| 2 | 167.8243 | 49.58 | -15.48 | 34.10 | 43.50 | -9.40 | 153 | 100 | peak |
| 3 | 216.0240 | 50.49 | -11.73 | 38.76 | 46.00 | -7.24 | 76 | 100 | peak |
| 4 | 340.7817 | 42.74 | -6.51 | 36.23 | 46.00 | -9.77 | 106 | 100 | peak |
| 5 | 454.3100 | 45.78 | -6.40 | 39.38 | 46.00 | -6.62 | 76 | 100 | peak |
| 6 | 501.1790 | 43.80 | -5.98 | 37.82 | 46.00 | -8.18 | 287 | 100 | peak |

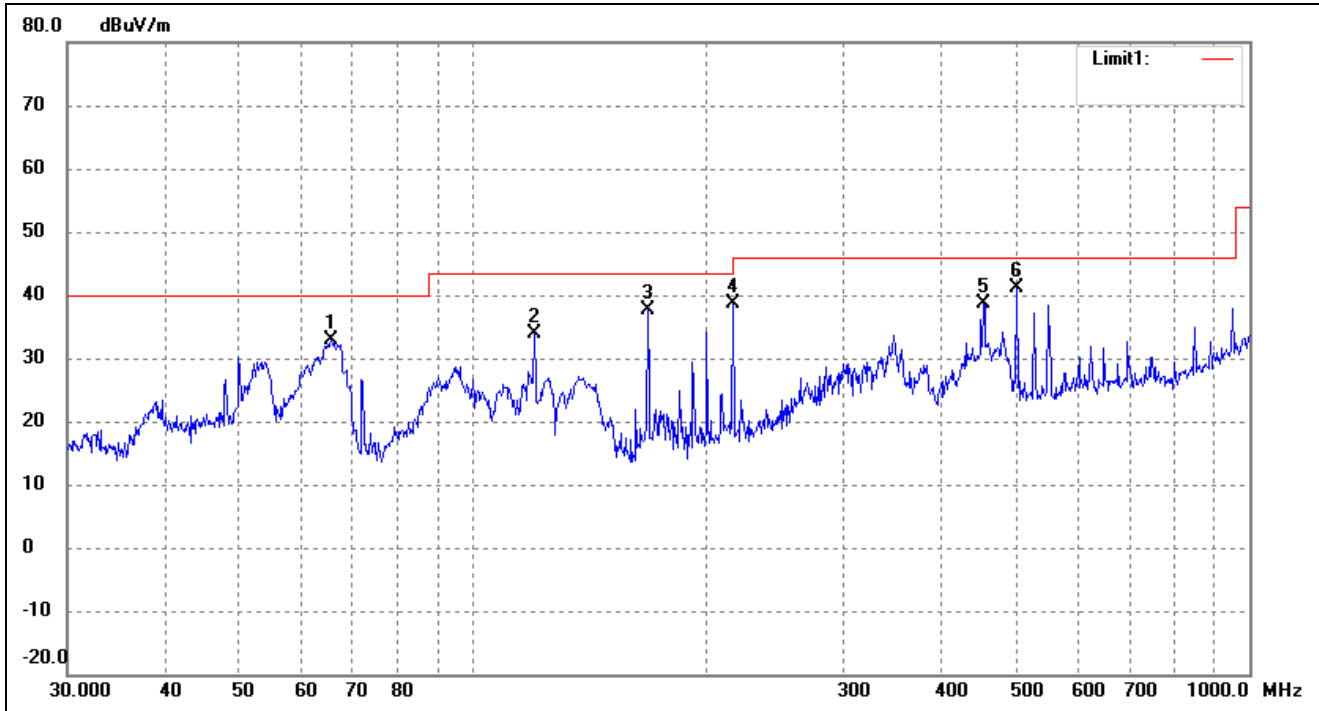
802.11a(Worst case)

Test Channel

5200MHz

Polarity:

Vertical



| No. | Frequency (MHz) | Reading (dBuV/m) | Correct dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1 | 65.5727 | 48.36 | -15.45 | 32.91 | 40.00 | -7.09 | 356 | 100 | peak |
| 2 | 119.8556 | 49.41 | -15.44 | 33.97 | 43.50 | -9.53 | 96 | 100 | peak |
| 3 | 167.8243 | 53.23 | -15.48 | 37.75 | 43.50 | -5.75 | 67 | 100 | peak |
| 4 | 216.0240 | 50.34 | -11.73 | 38.61 | 46.00 | -7.39 | 95 | 100 | peak |
| 5 | 454.3100 | 45.06 | -6.40 | 38.66 | 46.00 | -7.34 | 281 | 100 | peak |
| 6 | 501.1790 | 47.14 | -5.98 | 41.16 | 46.00 | -4.84 | 245 | 100 | peak |

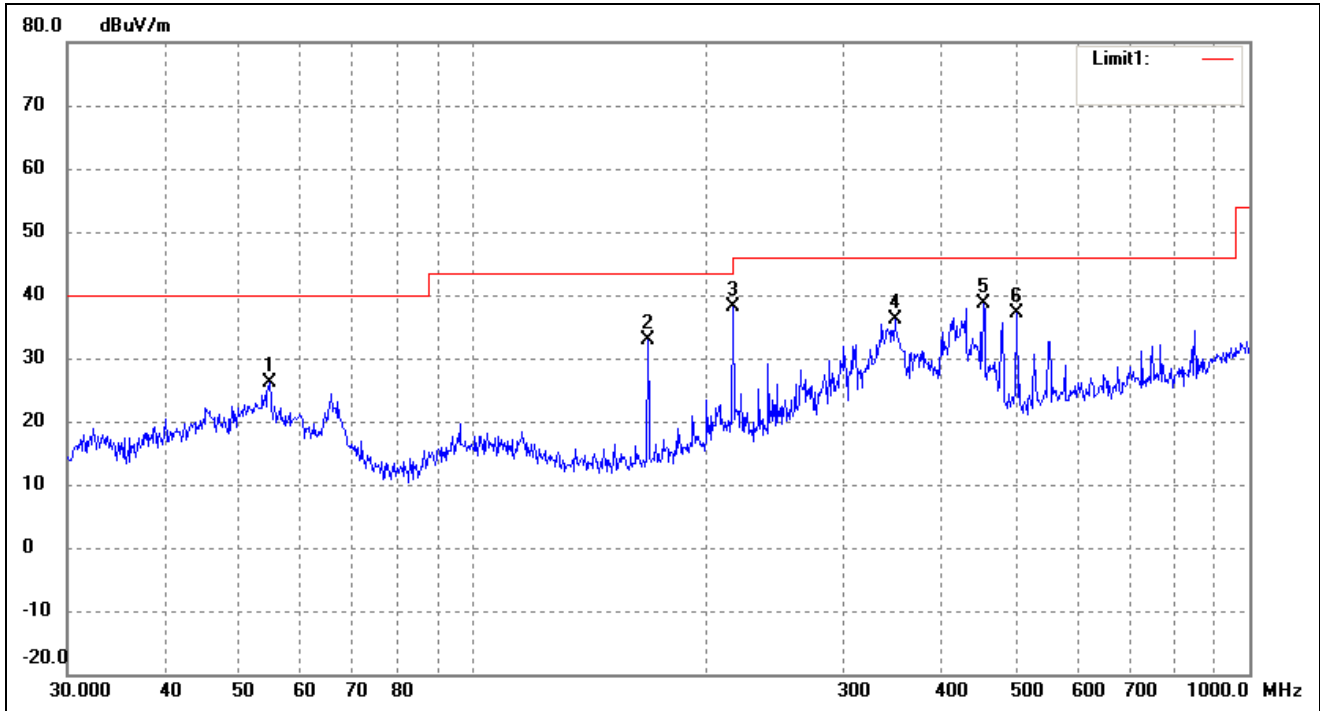
802.11a(Worst case)

Test Channel

5240MHz

Polarity:

Horizontal



| No. | Frequency (MHz) | Reading (dBuV/m) | Correct dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1 | 54.6429 | 39.36 | -13.12 | 26.24 | 40.00 | -13.76 | 159 | 100 | peak |
| 2 | 167.8243 | 48.30 | -15.48 | 32.82 | 43.50 | -10.68 | 139 | 100 | peak |
| 3 | 216.0240 | 49.95 | -11.73 | 38.22 | 46.00 | -7.78 | 92 | 100 | peak |
| 4 | 349.2500 | 42.49 | -6.48 | 36.01 | 46.00 | -9.99 | 140 | 100 | peak |
| 5 | 454.3100 | 45.11 | -6.40 | 38.71 | 46.00 | -7.29 | 312 | 100 | peak |
| 6 | 501.1790 | 43.20 | -5.98 | 37.22 | 46.00 | -8.78 | 114 | 100 | peak |

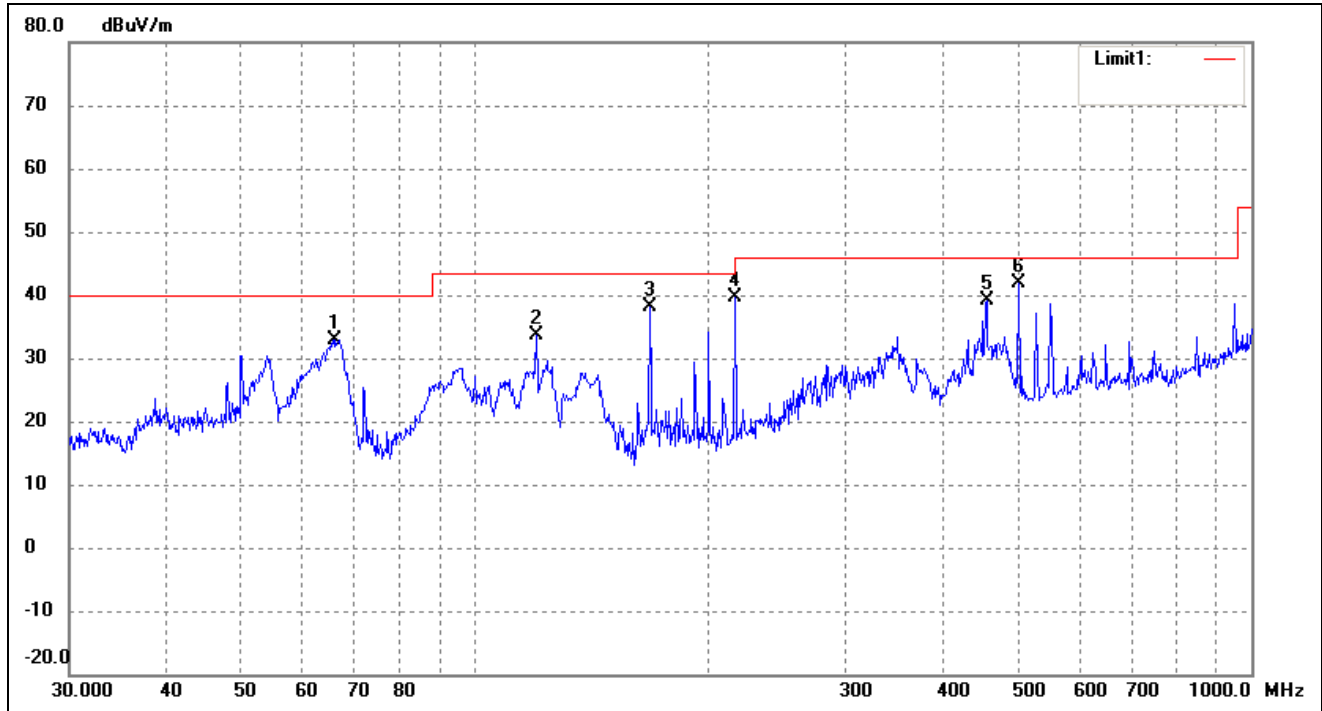
802.11a(Worst case)

Test Channel

5240MHz

Polarity:

Vertical




| No. | Frequency (MHz) | Reading (dBuV/m) | Correct dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1 | 66.0342 | 48.61 | -15.63 | 32.98 | 40.00 | -7.02 | 86 | 100 | peak |
| 2 | 119.8556 | 49.12 | -15.44 | 33.68 | 43.50 | -9.82 | 111 | 100 | peak |
| 3 | 167.8243 | 53.71 | -15.48 | 38.23 | 43.50 | -5.27 | 99 | 100 | peak |
| 4 | 216.0240 | 51.31 | -11.73 | 39.58 | 46.00 | -6.42 | 119 | 100 | peak |
| 5 | 455.9058 | 45.47 | -6.37 | 39.10 | 46.00 | -6.90 | 94 | 100 | peak |
| 6 | 501.1790 | 47.93 | -5.98 | 41.95 | 46.00 | -4.05 | 203 | 100 | peak |

➤ 5725-5850MHz

802.11a(worst case)

| | | | |
|--------------|---------|-----------|------------|
| Test Channel | 5745MHz | Polarity: | Horizontal |
|--------------|---------|-----------|------------|

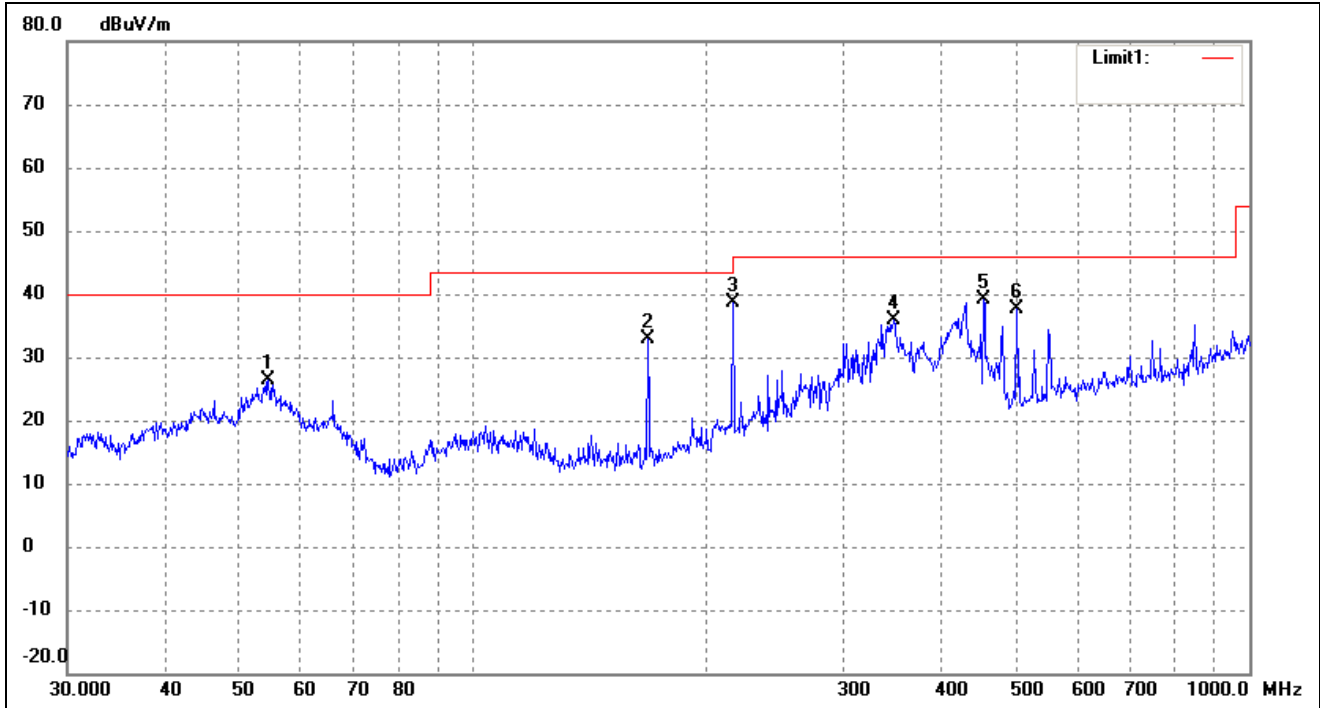

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1 | 54.4516 | 39.37 | -13.09 | 26.28 | 40.00 | -13.72 | 238 | 100 | peak |
| 2 | 167.8243 | 48.42 | -15.48 | 32.94 | 43.50 | -10.56 | 99 | 100 | peak |
| 3 | 216.0240 | 50.42 | -11.73 | 38.69 | 46.00 | -7.31 | 113 | 100 | peak |
| 4 | 348.0274 | 42.44 | -6.48 | 35.96 | 46.00 | -10.04 | 119 | 100 | peak |
| 5 | 454.3100 | 45.60 | -6.40 | 39.20 | 46.00 | -6.80 | 255 | 100 | peak |
| 6 | 501.1790 | 43.73 | -5.98 | 37.75 | 46.00 | -8.25 | 225 | 100 | peak |

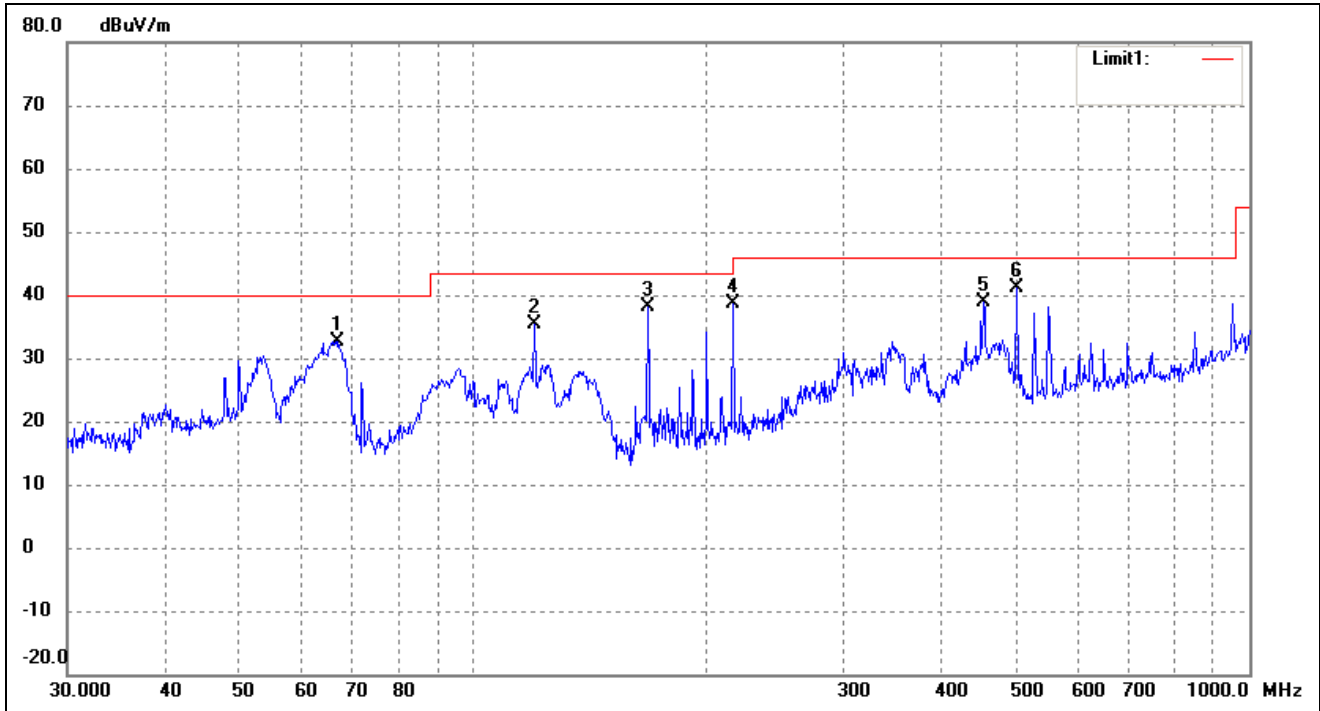
802.11a(worst case)

Test Channel

5745MHz

Polarity:

Vertical



| No. | Frequency (MHz) | Reading (dBuV/m) | Correct dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1 | 66.9669 | 48.71 | -15.99 | 32.72 | 40.00 | -7.28 | 274 | 100 | peak |
| 2 | 119.8556 | 50.90 | -15.44 | 35.46 | 43.50 | -8.04 | 90 | 100 | peak |
| 3 | 167.8243 | 53.65 | -15.48 | 38.17 | 43.50 | -5.33 | 326 | 100 | peak |
| 4 | 216.0240 | 50.39 | -11.73 | 38.66 | 46.00 | -7.34 | 101 | 100 | peak |
| 5 | 454.3100 | 45.40 | -6.40 | 39.00 | 46.00 | -7.00 | 173 | 100 | peak |
| 6 | 501.1790 | 47.09 | -5.98 | 41.11 | 46.00 | -4.89 | 276 | 100 | peak |

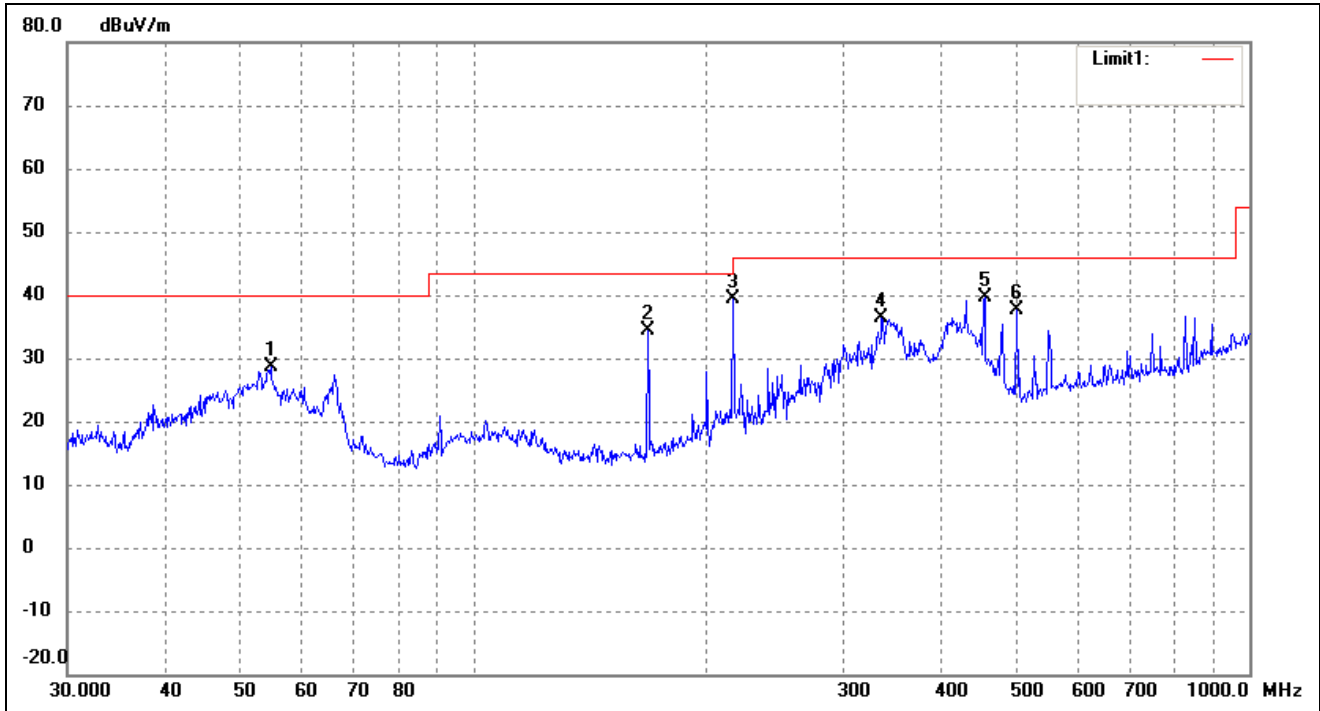
802.11a(worst case)

Test Channel

5785MHz

Polarity:

Horizontal



| No. | Frequency (MHz) | Reading (dBuV/m) | Correct dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1 | 54.8348 | 41.69 | -13.17 | 28.52 | 40.00 | -11.48 | 337 | 100 | peak |
| 2 | 167.8243 | 49.97 | -15.48 | 34.49 | 43.50 | -9.01 | 199 | 100 | peak |
| 3 | 216.0240 | 51.07 | -11.73 | 39.34 | 46.00 | -6.66 | 68 | 100 | peak |
| 4 | 336.0352 | 42.99 | -6.62 | 36.37 | 46.00 | -9.63 | 92 | 100 | peak |
| 5 | 455.9058 | 45.95 | -6.37 | 39.58 | 46.00 | -6.42 | 131 | 100 | peak |
| 6 | 501.1790 | 43.71 | -5.98 | 37.73 | 46.00 | -8.27 | 302 | 100 | peak |

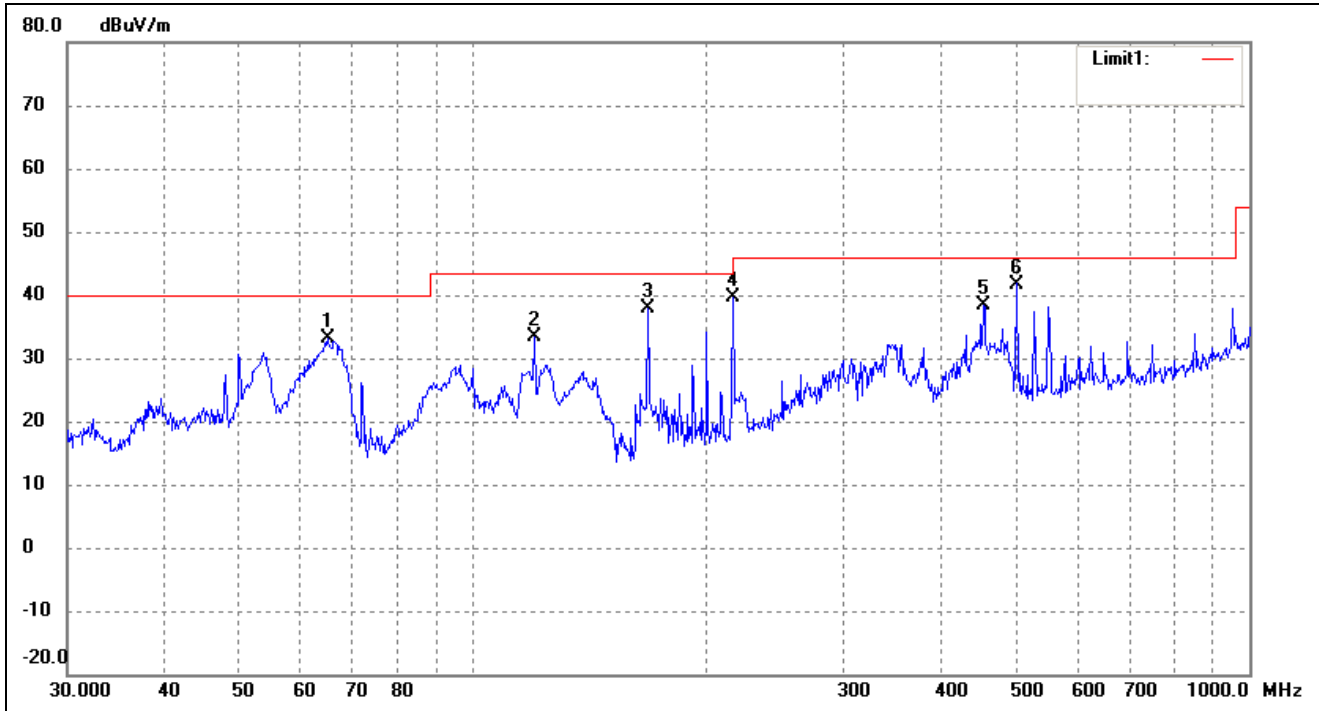
802.11a(worst case)

Test Channel

5785MHz

Polarity:


Vertical



| No. | Frequency (MHz) | Reading (dBuV/m) | Correct dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1 | 64.8865 | 48.35 | -15.21 | 33.14 | 40.00 | -6.86 | 98 | 100 | peak |
| 2 | 119.8556 | 48.93 | -15.44 | 33.49 | 43.50 | -10.01 | 105 | 100 | peak |
| 3 | 167.8243 | 53.26 | -15.48 | 37.78 | 43.50 | -5.72 | 114 | 100 | peak |
| 4 | 216.0240 | 51.33 | -11.73 | 39.60 | 46.00 | -6.40 | 128 | 100 | peak |
| 5 | 454.3100 | 44.83 | -6.40 | 38.43 | 46.00 | -7.57 | 261 | 100 | peak |
| 6 | 501.1790 | 47.73 | -5.98 | 41.75 | 46.00 | -4.25 | 282 | 100 | peak |

802.11a(worst case)

| | | | |
|--------------|---------|-----------|------------|
| Test Channel | 5825MHz | Polarity: | Horizontal |
|--------------|---------|-----------|------------|

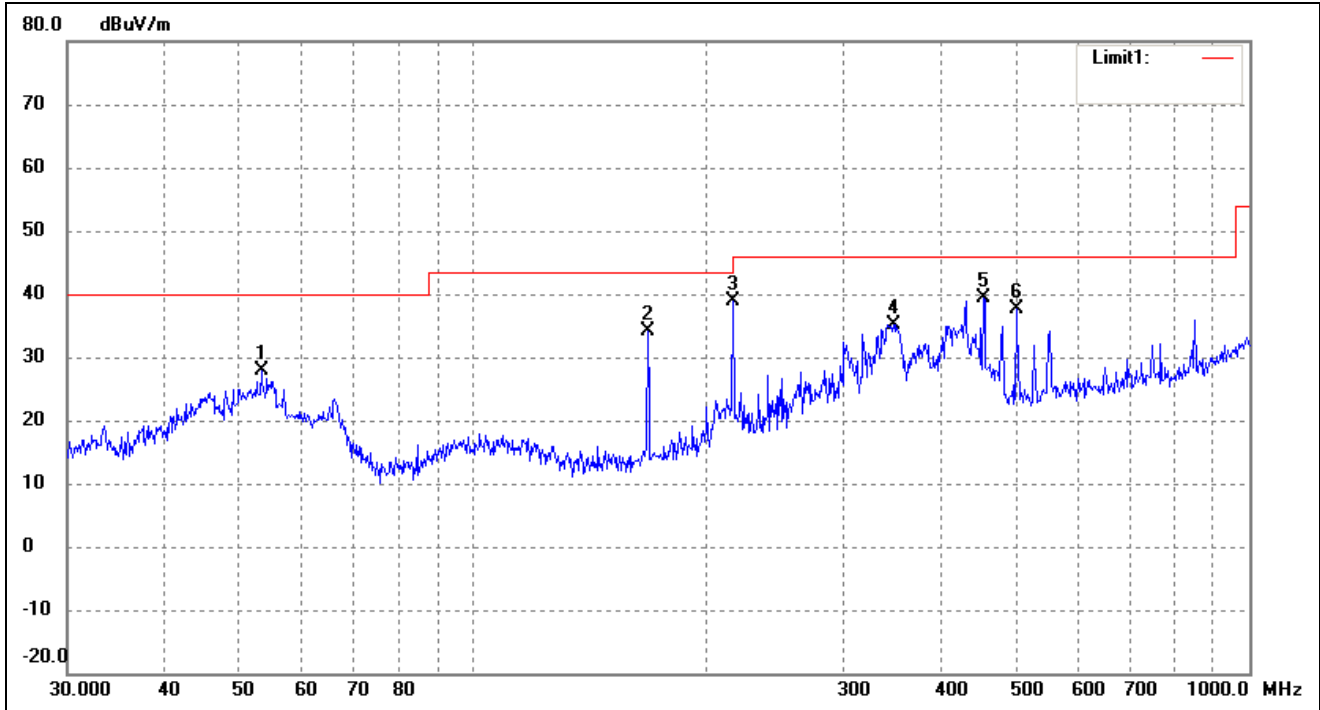

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1 | 53.3179 | 40.68 | -12.92 | 27.76 | 40.00 | -12.24 | 272 | 100 | peak |
| 2 | 167.8243 | 49.60 | -15.48 | 34.12 | 43.50 | -9.38 | 123 | 100 | peak |
| 3 | 216.0240 | 50.72 | -11.73 | 38.99 | 46.00 | -7.01 | 52 | 100 | peak |
| 4 | 348.0274 | 41.71 | -6.48 | 35.23 | 46.00 | -10.77 | 147 | 100 | peak |
| 5 | 454.3100 | 45.87 | -6.40 | 39.47 | 46.00 | -6.53 | 192 | 100 | peak |
| 6 | 501.1790 | 43.49 | -5.98 | 37.51 | 46.00 | -8.49 | 124 | 100 | peak |

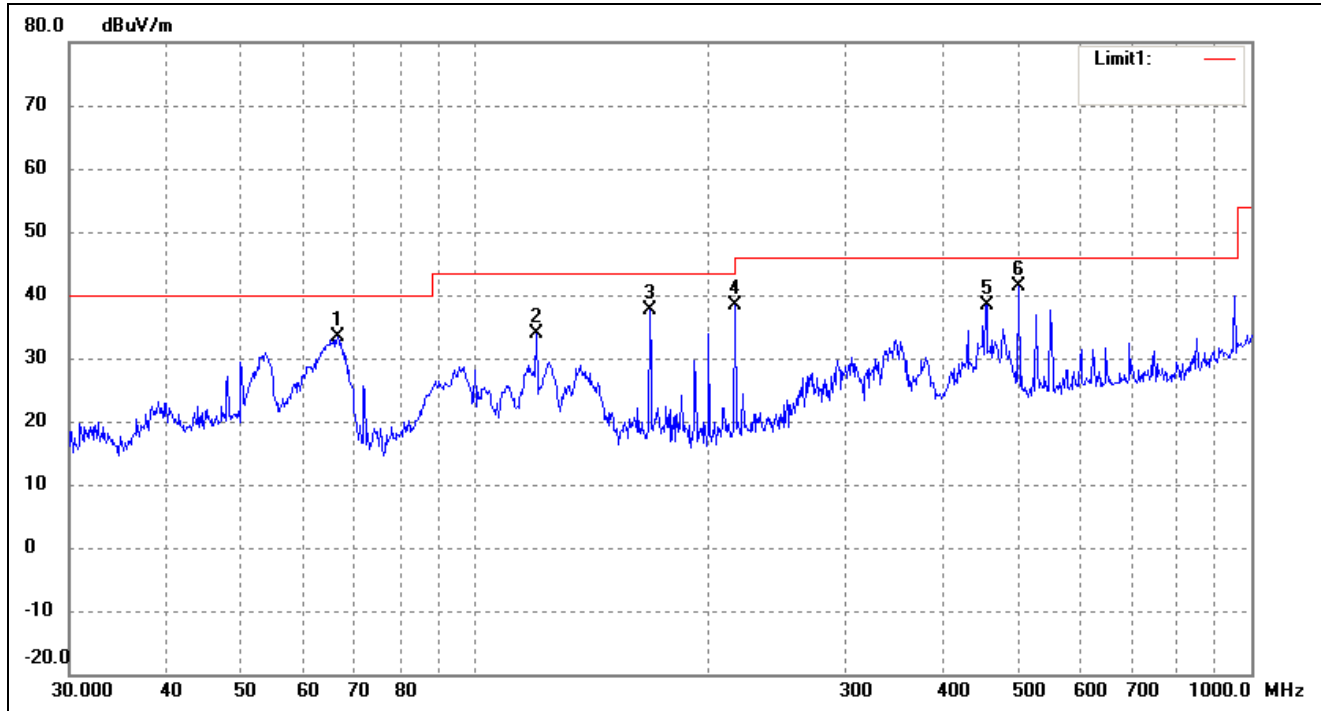
802.11a(worst case)

Test Channel

5825MHz

Polarity:

Vertical




| No. | Frequency (MHz) | Reading (dBuV/m) | Correct dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1 | 66.4989 | 49.18 | -15.82 | 33.36 | 40.00 | -6.64 | 55 | 100 | peak |
| 2 | 119.8556 | 49.43 | -15.44 | 33.99 | 43.50 | -9.51 | 189 | 100 | peak |
| 3 | 167.8243 | 53.07 | -15.48 | 37.59 | 43.50 | -5.91 | 110 | 100 | peak |
| 4 | 216.0240 | 50.13 | -11.73 | 38.40 | 46.00 | -7.60 | 114 | 100 | peak |
| 5 | 455.9058 | 44.78 | -6.37 | 38.41 | 46.00 | -7.59 | 162 | 100 | peak |
| 6 | 501.1790 | 47.28 | -5.98 | 41.30 | 46.00 | -4.70 | 125 | 100 | peak |

➤ Spurious Emission above 1GHz

802.11a- Restricted Bandedge (worst case)


| | | | |
|--------------|-------------------|-----------|----------------------|
| Test Channel | band 5.15-5.25GHz | Polarity: | Vertical(worst case) |
|--------------|-------------------|-----------|----------------------|

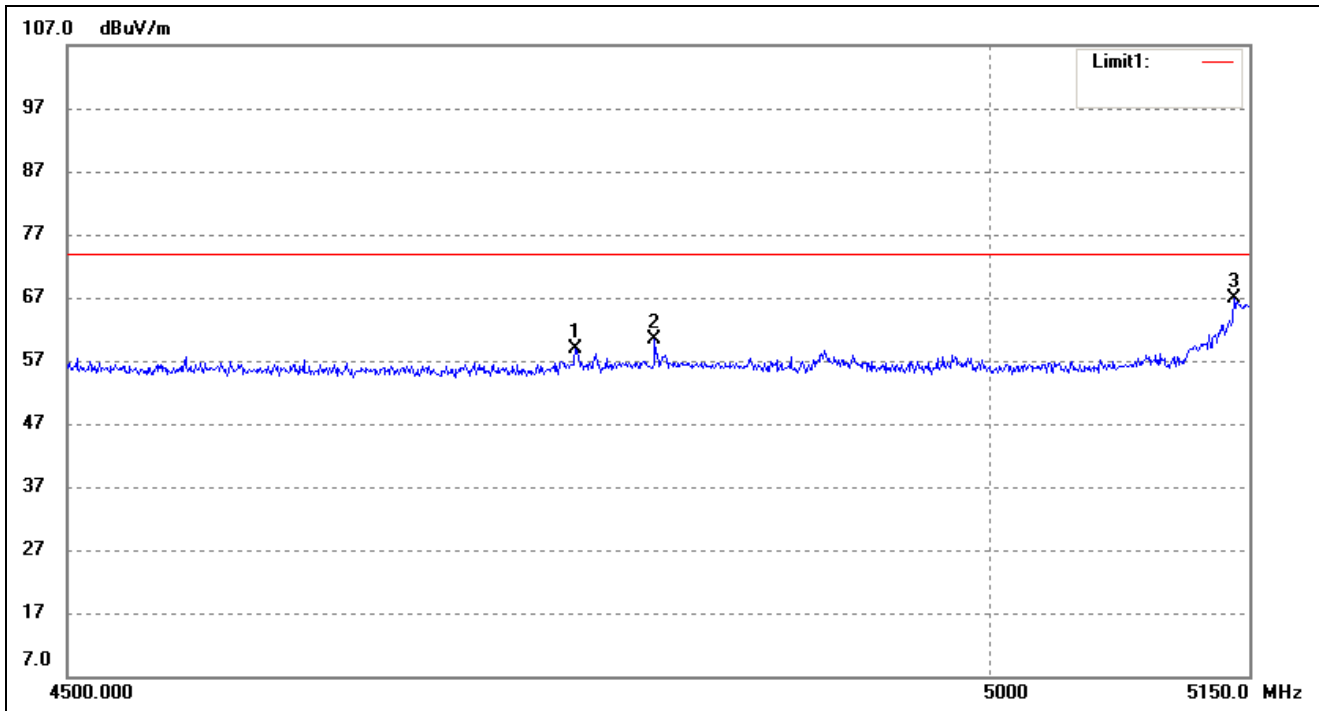

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1 | 4768.791 | 65.13 | -6.24 | 58.89 | 74.00 | -15.11 | 123 | 100 | peak |
| 2 | 4812.094 | 66.59 | -6.11 | 60.48 | 74.00 | -13.52 | 52 | 100 | peak |
| 3 | 5140.975 | 72.18 | -5.24 | 66.94 | 74.00 | -7.06 | 147 | 100 | peak |

802.11a- Restricted Bandedge (worst case)

| | | | |
|--------------|-------------------|-----------|----------------------|
| Test Channel | band 5.15-5.25GHz | Polarity: | Vertical(worst case) |
|--------------|-------------------|-----------|----------------------|

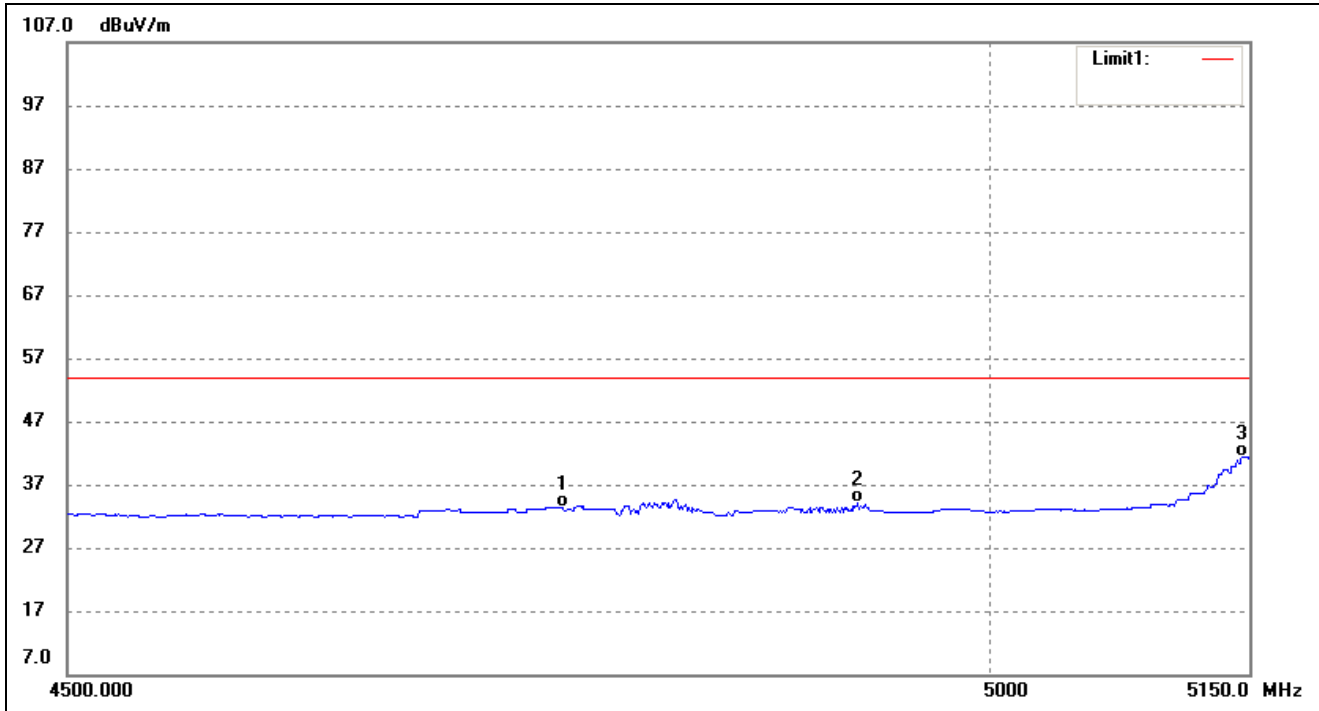

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1 | 4761.718 | 39.66 | -6.25 | 33.41 | 54.00 | -20.59 | 55 | 100 | AVG |
| 2 | 4925.070 | 40.05 | -5.80 | 34.25 | 54.00 | -19.75 | 189 | 100 | AVG |
| 3 | 5145.833 | 46.63 | -5.22 | 41.41 | 54.00 | -12.59 | 110 | 100 | AVG |

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11a) (worst case)
- Harmonics And Spurious Emissions

| Frequency MHz | Detector | Meter Reading dBuV | Direction Degree | Polar H / V | Antenna Loss dB | Cable loss dB | Amplifier dB | Correction Amplitude dBuV/m | Limit dBuV/m | Margin dB |
|------------------------|----------|--------------------------|---------------------|----------------|-----------------------|------------------|-----------------|-----------------------------------|-----------------|--------------|
| Low Channel (5180MHz) | | | | | | | | | | |
| 10360 | PK | 51.15 | 360 | V | 40.7 | 10.9 | 39.6 | 63.15 | 74 | -10.85 |
| 10360 | PK | 49.61 | 360 | H | 40.7 | 10.9 | 39.6 | 61.61 | 74 | -10.85 |
| 10360 | AV | 36.10 | 360 | V | 40.7 | 10.9 | 39.6 | 48.10 | 54 | 9.15 |
| 10360 | AV | 35.01 | 360 | H | 40.7 | 10.9 | 39.6 | 47.01 | 54 | 9.15 |
| High Channel (5240MHz) | | | | | | | | | | |
| 10480 | PK | 51.86 | 360 | V | 40.7 | 10.9 | 39.6 | 63.86 | 74 | -10.14 |
| 10480 | PK | 50.90 | 360 | H | 40.7 | 10.9 | 39.6 | 62.90 | 74 | -11.10 |
| 10480 | AV | 35.71 | 360 | V | 40.7 | 10.9 | 39.6 | 47.71 | 54 | -6.29 |
| 10480 | AV | 34.92 | 360 | H | 40.7 | 10.9 | 39.6 | 46.92 | 54 | -7.08 |
| Low Channel (5745MHz) | | | | | | | | | | |
| 11490 | PK | 55.8 | 360 | V | 38.9 | 9.8 | 40.1 | 63.2 | 74 | -10.8 |
| 11490 | PK | 58.0 | 360 | H | 38.9 | 9.8 | 40.1 | 65.5 | 74 | -8.5 |
| 11490 | AV | 35.4 | 360 | V | 38.9 | 9.8 | 40.1 | 42.6 | 54 | -11.4 |
| 11490 | AV | 38.2 | 360 | H | 38.9 | 9.8 | 40.1 | 47.7 | 54 | -6.3 |
| High Channel (5825MHz) | | | | | | | | | | |
| 11610 | PK | 56.2 | 360 | V | 38.9 | 9.8 | 40.1 | 65.6 | 74 | -8.4 |
| 11610 | PK | 56.0 | 360 | H | 38.9 | 9.8 | 40.1 | 64.8 | 74 | -9.2 |
| 11610 | AV | 38.2 | 360 | V | 38.9 | 9.8 | 40.1 | 46.0 | 54 | -8.0 |
| 11610 | AV | 37.6 | 360 | H | 38.9 | 9.8 | 40.1 | 47.6 | 54 | -6.4 |

- Out of Band edge for 5150-5250MHz

| Test CH. | Test Segment | Result | Limit |
|----------|--------------|---------|---------|
| | MHz | dBm/MHz | dBm/MHz |
| Lowest | Below 5150 | -43.87 | -27 |
| Highest | Above 5350 | -44.72 | -27 |

Note: the data just list the worst cases

- Out of Band edge for 5725-5850MHz

| Test CH. | Test Segment | Result | Limit |
|----------|--------------|---------|---------|
| | MHz | dBm/MHz | dBm/MHz |
| Lowest | Below 5715 | -38.24 | -27 |
| | 5715 to 5725 | -28.60 | -17 |
| Highest | 5850 to 5860 | -30.87 | -17 |
| | Above 5860 | -35.88 | -27 |

Note: the data just list the worst cases

Note: this EUT was tested in the low, high channel and the worst case position data was reported.

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

10. Frequency Stability

10.1 Standard Applicable

According to §15.407(g), Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

10.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

10.3 Summary of Test Results/Plots

| U-NII-1:5150-5250MHz worst case at 802.11a middle channel | | | | |
|---|------------|----------|--------------|-----------|
| Voltage(%) | Power(VDC) | TEMP(°C) | Freq.Dev(Hz) | Deviation |
| 100% | 5.0 | -30 | 30 | 0.0057 |
| 100% | | -20 | 54 | 0.0103 |
| 100% | | -10 | 74 | 0.0141 |
| 100% | | 0 | 32 | 0.0060 |
| 100% | | +10 | 51 | 0.0096 |
| 100% | | +20 | 53 | 0.0102 |
| 100% | | +30 | 45 | 0.0086 |
| 100% | | +40 | 76 | 0.0145 |
| 100% | | +50 | 61 | 0.0117 |
| Low Battery power | 5.50 | +20 | 60 | 0.0115 |
| High Battery power | 4.50 | +20 | 67 | 0.0129 |

| U-NII-1:5725-5850MHz worst case at 802.11a middle channel | | | | |
|---|------------|----------|--------------|-----------|
| Voltage(%) | Power(VDC) | TEMP(°C) | Freq.Dev(Hz) | Deviation |
| 100% | 5.0 | -30 | 62 | 0.0108 |
| 100% | | -20 | 80 | 0.0138 |
| 100% | | -10 | 32 | 0.0055 |
| 100% | | 0 | 54 | 0.0093 |
| 100% | | +10 | 59 | 0.0101 |
| 100% | | +20 | 57 | 0.0098 |
| 100% | | +30 | 38 | 0.0065 |
| 100% | | +40 | 50 | 0.0087 |
| 100% | | +50 | 60 | 0.0104 |
| Low Battery power | 5.50 | +20 | 49 | 0.0085 |
| High Battery power | 4.50 | +20 | 69 | 0.0119 |

***** END OF REPORT *****