

Shenzhen Certification Technology Service Co., Ltd. 2F, Building B, East Area of Nanchang Second Industrial Zone, Gushu 2<sup>nd</sup> Road, Bao'an District, Shenzhen 518126, P.R. China.

# TEST REPORT

FCC ID: ZYF-QS800

Applicant : 3M Cogent, Inc

Address : 639 N. Rosemead Blvd. Pasadena, CA 91107, USA

#### **Equipment under Test (EUT):**

Name : Document Reader

Model : QS800

**Standards**: FCC PART 15, SUBPART C: 2011 (Section 15.225)

 Report No.
 : STE120428457

 Date of Test
 : June 5-14, 2012

**Date of Issue**: June 15, 2012

Test Result : PASS \*

**Authorized Signature** 

(Mark Zhu) General Manager

The manufacture should ensure that all the products in series production are in conformity with the product sample detailed in this report.

If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of Shenzhen Certification Technology Service Co., Ltd. Or test done by Shenzhen Certification Technology Service Co., Ltd. Approvals in connection with, distribution or use of the product described in this report must be approved by Shenzhen Certification Technology Service Co., Ltd. Approvals in writing.

FCCID: ZYF-QS800 Page 1 of 37

<sup>\*</sup> In the configuration tested, the EUT complied with the standards specified above

### TABLE OF CONTENT

Des	Scription Page				
1 G	ener	al Information	3		
	1.1	Description of Device (EUT)	3		
	1.2	Description of Test Facility	4		
		Equipment List			
3 T		rocedure			
4	Sum	nmary of Measurement	6		
	4.1	Summary of test result	6		
	4.2	Test mode			
5	Spu	rious Emission	7		
	5.1	Radiation Emission	7		
	5.2	Field strength	13		
6	POV	WER LINE CONDUCTED EMISSION			
	6.1	Conducted Emission Limits(15.209)	15		
	6.2	Test Setup			
	6.3	Test Procedure			
	6.4	Test Results	16		
7	Free	quency stability			
	7.1	Test limit	_		
	7.2	Test Procedure			
	7.3	Test Setup	19		
	7.4	Test Results	19		
8	Ban	dwidth Test			
	8.1	Limit for Bandwidth			
	8.2	Method of measurement			
	8.3	Test Setup	21		
	8.4	Test Results			
9	Anto	enna Requirement			
	9.1	Standard Requirement			
	9.2	Antenna Connected Construction			
	9.3	Result			
10		tographs of Test Setup			
11	Pho	tographs of EUT	25		

### 1 General Information

### 1.1 Description of Device (EUT)

Trade Name : 3M

EUT : Document Reader

Model No. : QS800

Type of Antenna : Integral Antenna

Antenna Specification : 0dBi

Operation Frequency : 13.56MHz

This report is only test the Card Reader transmitter, the

Notes : other transmitter please see the report STE120327317. the

Card Reader transmitting Antenna is marked, see page 34

of this report.

Channel number : 1

Modulation type : ASK

Power Supply : DC 5V From PC

special accessories : N/A

Applicant : 3M Cogent, Inc

Address : 639 N. Rosemead Blvd. Pasadena, CA 91107, USA

Manufacturer : Cogent Systems (Shenzhen), Inc

Address : 10/F, Tinwe Industrial Park Phase 2, Liufang Road No.6,

Area No.67, Baoan District, ShenZhen

FCCID: ZYF-QS800 Page 3 of 37

# 1.2 Description of Test Facility

Shenzhen Certification Technology Service Co., Ltd. 2F, Building B, East Area of Nanchang Second Industrial Zone, Gushu 2<sup>nd</sup> Road, Bao'an District, Shenzhen 518126, P.R. China FCC Registered No.: 197647

# 2 EMC Equipment List

Equipment	Manufacturer	Model No.	Serial No.	Last cal.	Cal Interval
3m Semi-Anechoi	ETS-LINDGRE N	N/A	SEL0017	06/04/2012	1 Year
Spectrum analyzer	Agilent	E4443A	MY46185649	06/04/2012	1Year
Receiver	R&S	ESCI	100492	06/04/2012	1Year
Receiver	R&S	ESCI	101202	06/04/2012	1Year
Loop Antenna	R&S	FMZB1516	1516131	06/04/2012	1Year
Bilog Antenna	Sunol	JB3	A121206	06/04/2012	1Year
Horn Antenna	EMCO	3115	640201028-06	06/04/2012	1Year
Power Meter	Anritsu	ML2487A	6K00001491	02/23/2012	1Year
ETS Horn Antenna	ETS	3160	SEL0076	08/12/2011	1Year
Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	06/04/2012	1Year
Cable	Resenberger	N/A	No.1	06/04/2012	1Year
Cable	SCHWARZBEC K	N/A	No.2	06/04/2012	1Year
Cable	SCHWARZBEC K	N/A	No.3	06/04/2012	1Year
Pre-amplifier	R&S	AFS42-00101 800-25-S-42	SEL0081	06/04/2012	1Year
Pre-amplifier	R&S	AFS33-18002 650-30-8P-44	SEL0080	06/04/2012	1Year

FCCID: ZYF-QS800 Page 4 of 37

#### 3 Test Procedure

**POWER LINE CONDUCTED INTERFERENCE:** The test procedure used was ANSI Standard C63.4-2003 using a 50 u H LISN. Both Lines were observed. The bandwidth of the receiver was 10kHz with an appropriate sweep speed. The ambient temperature of the EUT was 25°C with a humidity of 58%.

**RADIATION INTERFERENCE:** The test procedure used was ANSI Standard C63.4-2003 using a ANRITSU spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a micro volt at the output of the antenna. The resolution bandwidth was 100kHz and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3MHz above 1 GHz. The ambient temperature of the EUT was 25°C with a humidity of 58%.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer and cable loss. The antenna correction factors and cable loss are stated in terms of dB. The gain of the Pre-selector was accounted for in the Spectrum Analyzer Meter Reading. Example:

ANSI STANDARD C63.4-2003 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSI Standard C63.4-2003 10.1.7 with the EUT 40 cm from the vertical ground wall.

FCCID: ZYF-QS800 Page 5 of 37

# 4 Summary of Measurement

# 4.1 Summary of test result

Test Item	Test Requirement	Stanadard Paragraph	Result
Spurious Emission	FCC PART 15: 2011	Section 15.225&15.209	Compliance
Conduction Emission	FCC PART 15: 2011	Section 15.207	Not applicable
Frequency stability	FCC PART 15: 2011	Section 15.225	Compliance
Bandwidth Requirement	FCC PART 15: 2011	Section 15.215	Compliance
Antenna Requirement	FCC PART 15: 2011	Section 15.203	Compliance

Note: EUT can by powered Supply by Notebook, according to exploratory test, so all the final test were performed using a Notebook.

### 4.2 Test mode

Tested mode, channel, and data rate information						
Mode Channel Data rate(Kbps) Frequency						
(MHz)						
1	CH1	848	13.56			
Note: According exploratory test, EUT will have maximum output power in						
those data rate. so the	ose data rate were u	sed for all test.				

FCCID: ZYF-QS800 Page 6 of 37

# 5 Spurious Emission

### 5.1 Radiation Emission

### 5.1.1 Radiation Emission Limits(15.209)

Frequency (MHZ)	Field Strength Limits at 3 metres (watts,e.i.r.p.)					
	uV/m	dB uV/m	Measurement distance(m)			
0.009-0.490	2400/F(kHz)	XX	300			
0.490-1.705	24000/F(kHz)	XX	30			
1.705-30	30	29.5	30			
30~88	100(3nW)	40	3			
88~216	150(6.8nW)	43.5	3			
216~960	200(12nW)	46	3			
Above960	500(75nW)	54	3			
Carrier frequency	15.848	104(AV)	3			
Carrier frequency		124(PK)	3			


#### NOTE:

- a) The tighter limit applies at the band edges.
- b) Emission Level(dB uV/m)=20log Emission Level(Uv/m)


### 5.1.2 Test Setup

See the next page

FCCID: ZYF-QS800 Page 7 of 37

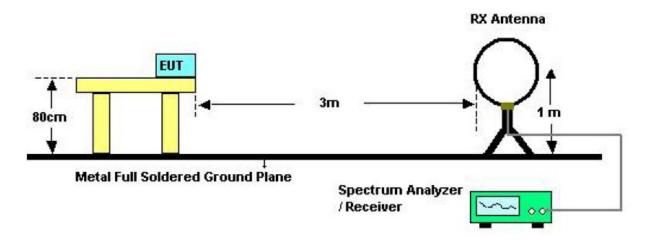


Below 30MHZ Test Setup

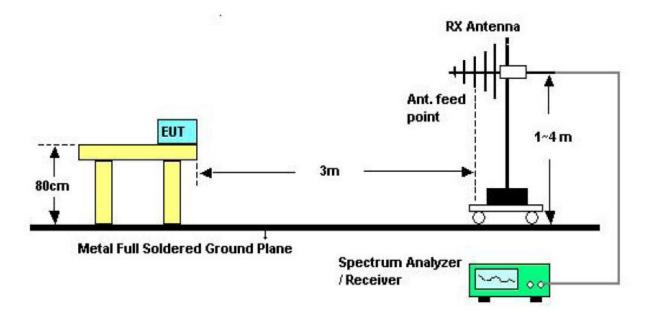

Above 30MHZ Test Setup

FCCID: ZYF-QS800 Page 8 of 37

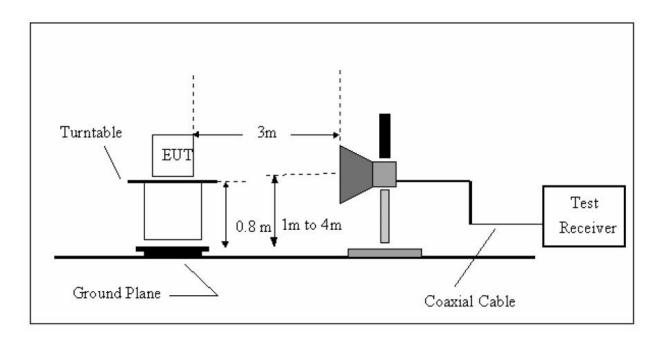

Above 1GHZ Test Setup

#### 5.1.3 Test Procedure

- a) The measureing distance of 3m shall be used for measurements at frequency up to 1GHz and above 1GHz, The EUT was placed on a rotating 0.8 m high above ground, The table was rotated 360 degrees to determine the position of the highest radiation
- b) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set of make measurement.
- c) The initial step in collecting conducted emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significent Peaks are then marked. and then Qusia Peak Detector mode remeasured
- d) If Peak value comply with QP limit Below 1GHz. The EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz.
- e) For the actual test configuration, please see the test setup photo.

FCCID: ZYF-QS800 Page 9 of 37

# 5.1.4 Test Equipment Setting For emission test.est Result

9KHZ~150KHZ	<b>RBW 200HZ</b>	VBW1KHZ
150KHZ~30MHZ	RBW 9KHZ	VBW 30KHZ
30MHZ~1GHZ	RBW 120KHZ	VBW 300KHZ
Above 1GHZ	<b>RBW 1MHZ</b>	VBW 3MHZ

### 5.1.5 Test Condition

Continual Transmitting in maximum power.

### 5.1.6 Test Result

Detailed information please see the following page.

FCCID: ZYF-QS800 Page 10 of 37

EUT	Document Reader	Model Name	QS800
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V
Test Mode	TX		

Freq. (MHz)	Ant.Pol . H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limits 3m (dBuV/m)	$\mathcal{E}$
143.49	V	Peak	43.32	-12.16	31.16	43.50	-12.34
239.52	V	Peak	50.06	-14.03	36.03	46.00	-9.97
364.65	V	Peak	47.77	-10.91	36.86	46.00	-9.14
480.08	V	Peak	45.82	-8.42	37.40	46.00	-8.60
600.36	V	Peak	44.47	-6.30	38.17	46.00	-7.83
907.85	V	Peak	41.52	-2.08	39.44	46.00	-6.56

EUT	Document Reader	Model Name	QS800
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From PC
Test Mode	TX		

Freq. (MHz)	Ant.Pol . H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limits 3m (dBuV/m)	Margin (dBuV/m)
143.49	Н	Peak	43.89	-12.16	31.73	43.50	-11.77
191.99	Н	Peak	47.99	-15.23	32.76	43.50	-10.74
241.46	Н	Peak	53.06	-14.00	39.06	46.00	-6.94
407.33	Н	Peak	50.02	-10.00	40.02	46.00	-5.98
480.08	Н	Peak	47.79	-8.42	39.37	46.00	-6.63
744.89	Н	Peak	43.39	-4.00	39.39	46.00	-6.61

Notes: Above is Below 1GHz test data

FCCID: ZYF-QS800 Page 11 of 37

### Report No.:STE120428457

### Radiated Emissions Result of Inside band (13.56MHZ)

EUT	Document Reader	Model Name	QS800
Temperature	26°C	Relative Humidity	58%
Pressure	960hPa	Test voltage	DC 5V
Test Mode	TX	Antenna polarization	H/V
Distance	3m		

	Channel (13.56MHZ)									
Fre.	Position X/Y/Z	Reading dBuV	Antenna Factor dB	Cable Loss dB	Amplifier Gain dB	Correct Factor dB	Measure Result dBuV/m	Limit dBuV/m	Margin dB	
13.56	X	124.78 (PK)	10.5	0.32	24.64	-13.93	110.87	124	-13.13	
13.56	X	105.14 (AV)	10.5	0.32	24.64	-13.93	91.23	104	-12.77	
	X	1			1	-				
13.56	Y	119.35(PK)	10.5	0.32	24.64	-13.93	105.44	124	-18.56	
13.56	Y	104.77 (AV)	10.5	0.32	24.64	-13.93	90.86	104	-13.14	
	Y									
13.56	Z	115.21(PK)	10.5	0.32	24.64	-13.93	101.3	124	-22.70	
13.56	Z	103.27 (AV)	10.5	0.32	24.64	-13.93	89.36	104	-14.64	
	Z				-					

**Notes:** --Means other frequency and mode comply with standard requirements and at least have 20dB margin.

Correct Factor=Cable Loss+ Antenna Factor- Amplifier Gain

Measurement Result=Reading + Correct Factor

Margin=Measurement Result-Limit

- --Spectrum setting:
  - a. Peak setting RBW=120KHz, VBW=300KHz.
  - b. AV setting RBW=1MHz, VBW=10Hz.

FCCID: ZYF-QS800 Page 12 of 37

### 5.2 Field strength

### 5.2.1 Limit

Please see the section 15.225(b) and 15.225(c)

15.225(b): Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter (50.5dBuV/m)at 30 meters

15.225(c): Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter (40.5dBuV/m) at 30 meters

Note: 30m to 3m correction factor calculation: 40\*Log(30m/3m)=40

#### 5.2.2 Test Result:

EUT	Document Reader	Model Name	QS800
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V
<b>Test Mode</b>	TX	Distance	3m

Freq. (MHz)	Position X/Y/Z	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limits 3m (dBuV/m)	υ
13.238	X	Peak	46.45	-13.94	32.51	80.50	-47.99
13.435	X	Peak	45.37	-13.94	31.43	90.50	-59.07
13.495	X	Peak	44.35	-13.94	30.41	90.50	-60.09
13.607	X	Peak	57.49	-13.93	43.56	90.50	-46.94
13.814	X	Peak	46.21	-13.93	32.28	80.50	-48.22
13.937	X	Peak	45.58	-13.93	31.65	80.50	-48.85

FCCID: ZYF-QS800 Page 13 of 37

### Report No.:STE120428457

Freq. (MHz)	Position X/Y/Z	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limits 3m (dBuV/m)	Margin (dBuV/m)
13.138	Y	Peak	43.12	-13.94	29.18	80.50	-51.32
13.347	Y	Peak	47.24	-13.94	33.30	80.50	-47.20
13.435	Y	Peak	44.38	-13.94	30.44	90.50	-60.06
13.511	Y	Peak	46.46	-13.94	32.52	90.50	-57.98
13.652	Y	Peak	43.75	-13.93	29.82	90.50	-60.68
13.821	Y	Peak	45.19	-13.93	31.26	80.50	-49.24

Freq. (MHz)	Position X/Y/Z	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limits 3m (dBuV/m)	Margin (dBuV/m)
13.225	Z	Peak	43.57	-13.94	29.63	80.50	-50.87
13.369	Z	Peak	45.12	-13.94	31.18	80.50	-49.32
13.452	Z	Peak	44.44	-13.94	30.50	90.50	-60.00
13.547	Z	Peak	47.26	-13.93	33.33	90.50	-57.17
13.732	Z	Peak	42.52	-13.93	28.59	80.50	-51.91
13.868	Z	Peak	46.33	-13.93	32.40	80.50	-48.10

FCCID: ZYF-QS800 Page 14 of 37

### 6 POWER LINE CONDUCTED EMISSION


### 6.1 Conducted Emission Limits(15.209)

Frequency	Limits $dB(\mu V)$					
MHz	Quasi-peak Level	Average Level				
0.15 -0.50	66 -56*	56 - 46*				
0.50 -5.00	56	46				
5.00 -30.00	60	50				

Notes: 1. \*Decreasing linearly with logarithm of frequency.

- 2. The lower limit shall apply at the transition frequencies.
- 3. The limit decreases in line with the logarithm of the frequency in the rang of 0.15 to 0.50 MHz.

### 6.2 Test Setup

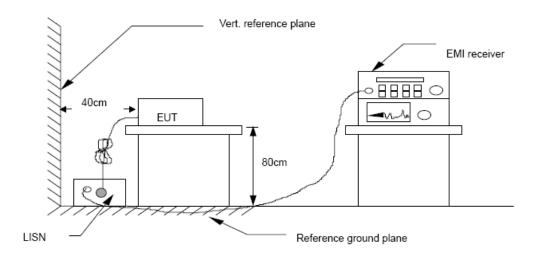

FCCID: ZYF-QS800 Page 15 of 37

#### 6.3 Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4-2003 on Conducted Emission Measurement. The bandwidth of test receiver (R & S ESCS30) is set at 9 kHz.

### 6.4 Test Results


#### **PASS**

Detailed information please see the following page.

FCCID: ZYF-QS800 Page 16 of 37



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 Fax: +86-755-26736857
Website: http://www.cessz.com/Email:Service@cessz.com/

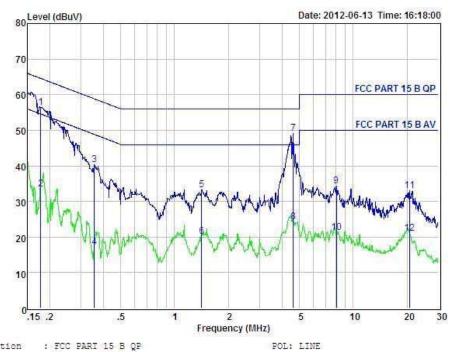

Condition : FCC PART 15 B QP EUT : Document Reader


Model No. : QS800
Test Mode : Normal
Power : DC 5V
Test Engineer: Store
Remark :

Item	Freq	Read	LISN Factor	Preamp Factor	Cable Lose	Level	Limit	Margin	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
		500000000000000000000000000000000000000		M. (					
1	0.179	46.58	0.03	-9.72	0.10	56.43	64.55	-8.12	QP
2	0,179	23.58	0.03	-9.72	0.10	33,43	54.55	-21.12	Average
3	0.356	30.38	0.03	-9.72	0.10	40.23	58.83	-18.60	QP
4	0.356	7.38	0.03	-9.72	0.10	17.23	48.83	-31.60	Average
5	1.418	23.41	0.05	-9.71	0.10	33.27	56.00	-22.73	QP
6	1.418	10.41	0.05	-9.71	0.10	20.27	46.00	-25.73	Average
7	4.622	39.25	0.09	-9.68	0.12	49.14	56.00	-6.86	QP
8	4.622	14.25	0.09	-9.68	0.12	24.14	46.00	-21.86	Average
9	8.062	24.51	0.14	-9.47	0.16	34.28	60.00	-25.72	QP
10	8.062	11.51	0.14	-9.47	0.16	21.28	50.00	-28.72	Average
11	20.704	22.90	0.34	-9.50	0.36	33.10	60.00	-26.90	QP
12	20.704	10.90	0.34	-9.50	0.36	21 10	50.00	-28 90	Average

FCCID: ZYF-QS800 Page 17 of 37



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 Fax: +86-755-26736857
Website: http://www.cessz.com/Email:Service@cessz.com/

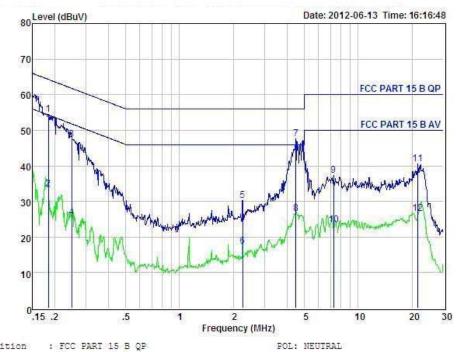

Condition : FCC PART 15 B QP EUT : Document Reader

Model No. : QS800
Test Mode : Normal
Power : DC 5V
Test Engineer: Store
Remark :

Item	Freq	Read	LISN Factor	Preamp Factor	Cable Lose	Level	Limit	Margin	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
								45555	
1	0.184	44.53	0.03	-9.72	0.10	54.38	64.28	-9.90	QP
2	0.184	23.53	0.03	-9,72	0.10	33.38	54.28	-20.90	Average
3	0.249	37.64	0.03	-9.72	0.10	47.49	61.78	-14.29	QP
4	0.249	15.64	0.03	-9.72	0.10	25.49	51.78	-26.29	Average
5	2.261	20.44	0.06	-9.70	0.11	30.31	56.00	-25.69	QP
6	2.261	7.44	0.06	-9.70	0.11	17.31	46.00	-28.69	Average
7	4.478	37.69	0.09	-9.68	0.12	47.58	56.00	-8.42	QF
8	4.478	16.69	0.09	-9,68	0.12	26.58	46.00	-19.42	Average
9	7.290	27.48	0.13	-9.52	0.15	37.28	60.00	-22.72	QP
10	7.290	13,48	0,13	-9,52	0.15	23,28	50.00	-26.72	Average
11	21.600	30.37	0.37	-9.52	0.38	40.64	60.00	-19.36	QP
12	21.600	16.37	0.37	-9.52	0.38	26.64	50.00	-23.36	Average

FCCID: ZYF-QS800 Page 18 of 37

## 7 Frequency stability

#### 7.1 Test limit


Please refer section 15.225e.

Regulation 15.225(e) The frequency tolerance of the carrier signal shall be maintained within  $\pm -0.01\%(\pm 100 \text{ ppm})$  of the operating frequency over a temperature variation of  $\pm -20$  degrees to  $\pm 50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### 7.2 Test Procedure

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 7.3 Test Setup



#### 7.4 Test Results

### **PASS**

Detailed information please see the following page.

FCCID: ZYF-QS800 Page 19 of 37

	Assigned Frequency(MHz): 13.56MHz Voltage: DC 5V									
Voltage	Temperature	Limit								
Low 4.25V	+20°C	13.56066	0.00066							
	-20℃	13.56075	0.00075							
	-10℃	13.55928	-0.00072	-						
	0℃	13.56042	0.00042	1						
Normal	+10°C	13.55983	-0.00017	±100 ppm ±0.001356MHz						
5V	+20°C	13.56041	0.00041	1						
	+30°C	13.56086	0.00086	1						
	+40°C	13.55985	-0.00015	-						
	+50°C	13.55954	-0.00046	•						
High 5.75V	+20°C	13.56077	0.00077							

FCCID: ZYF-QS800 Page 20 of 37

### 8 Bandwidth Test

#### 8.1 Limit for Bandwidth

Please see the section 15.215.


#### 8.2 Method of measurement

- a) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.
- b) The test receiver RBW set 10KHZ, VBW set 30KHZ

### 8.3 Test Setup



#### 8.4 Test Results

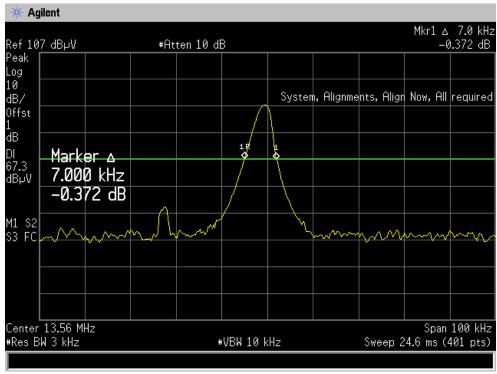

13.56HZ bandwidth test plot

FCCID: ZYF-QS800 Page 21 of 37

# 9 Antenna Requirement

#### 9.1 Standard Requirement

Standard: FCC PART 15, SUBPART C: 2011 (Section 15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### 9.2 Antenna Connected Construction


The directional gains of antenna used for transmitting is 0 dBi, and the antenna connector is de-signed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

#### 9.3 Result

The EUT antenna is integral Antenna. It comply with the standard requirement.


FCCID: ZYF-QS800 Page 22 of 37

10 Photographs of Test Setup Photos of Radiated Emission Test Setup in Chamber

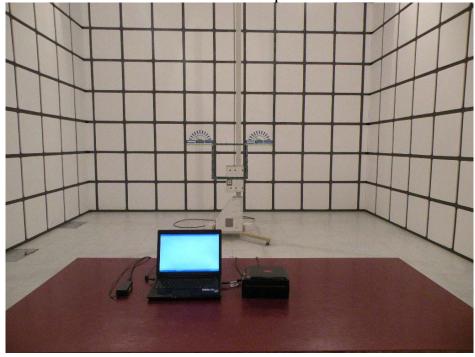



FCCID: ZYF-QS800 Page 23 of 37 Photos of conducted emission Test Setup

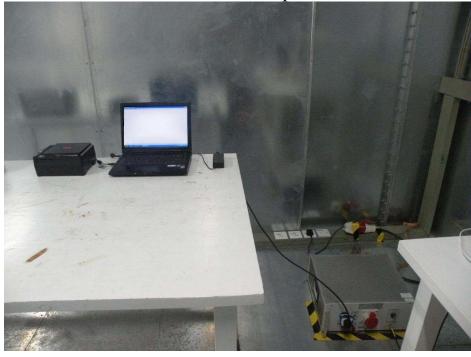


FCCID: ZYF-QS800 Page 24 of 37


# 11 Photographs of EUT





FCCID: ZYF-QS800 Page 25 of 37

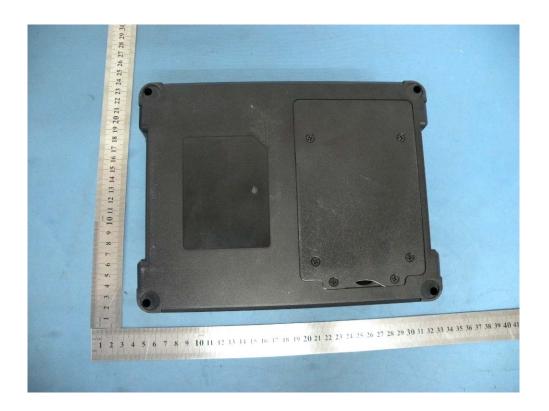

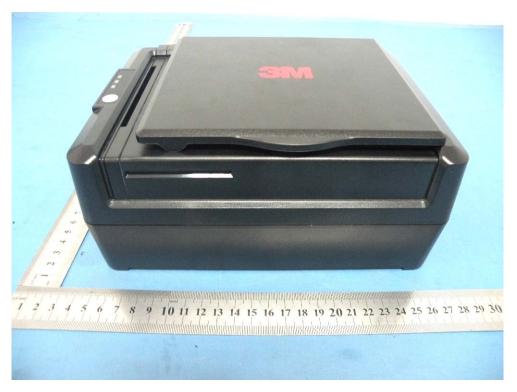


FCCID: ZYF-QS800 Page 26 of 37






FCCID: ZYF-QS800 Page 27 of 37



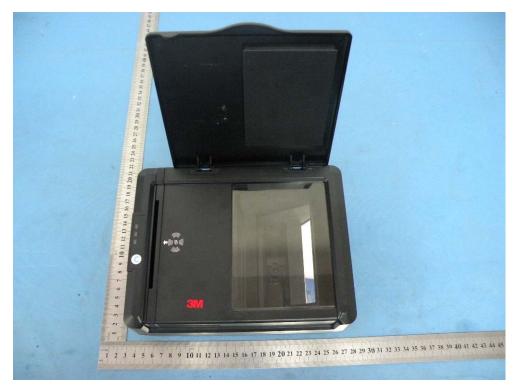



FCCID: ZYF-QS800 Page 28 of 37



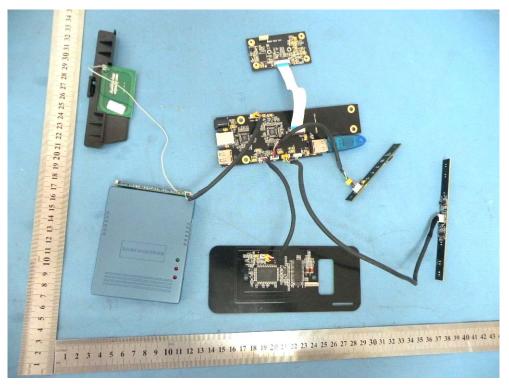



FCCID: ZYF-QS800 Page 29 of 37

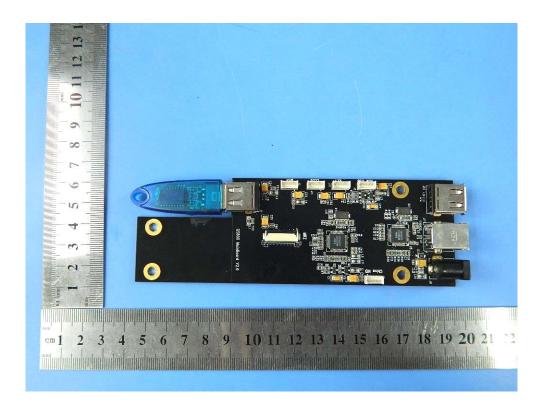

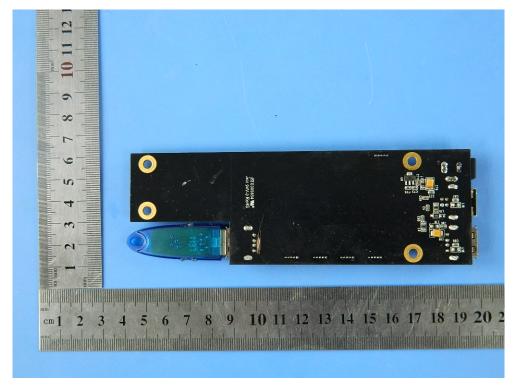



FCCID: ZYF-QS800 Page 30 of 37

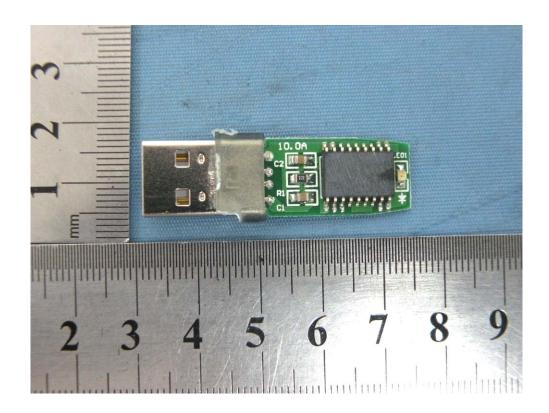

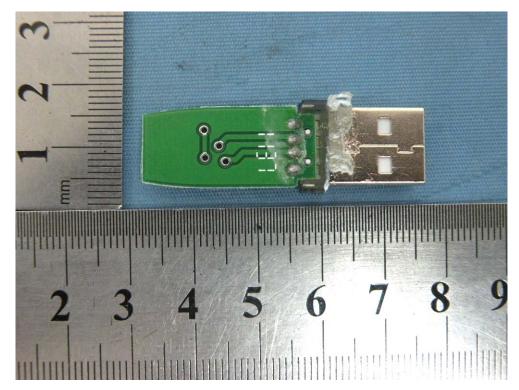



FCCID: ZYF-QS800 Page 31 of 37

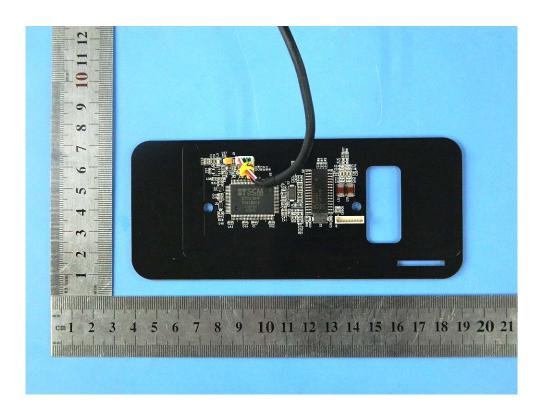

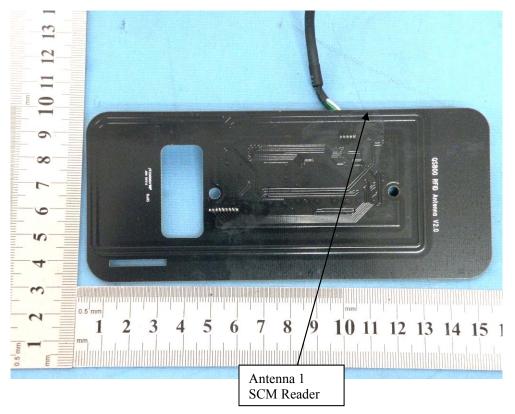


FCCID: ZYF-QS800 Page 32 of 37

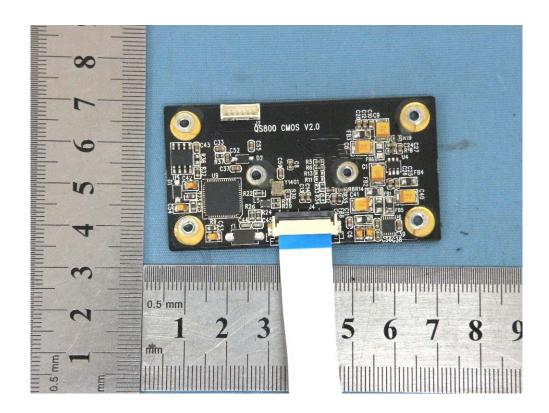


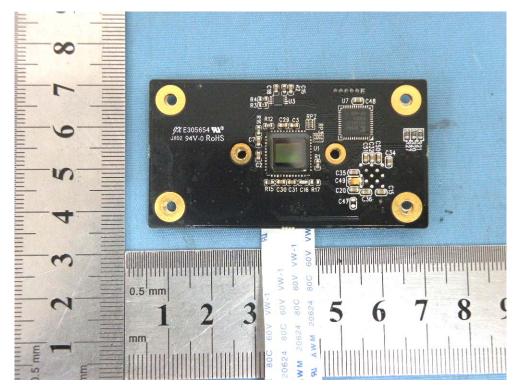


FCCID: ZYF-QS800 Page 33 of 37

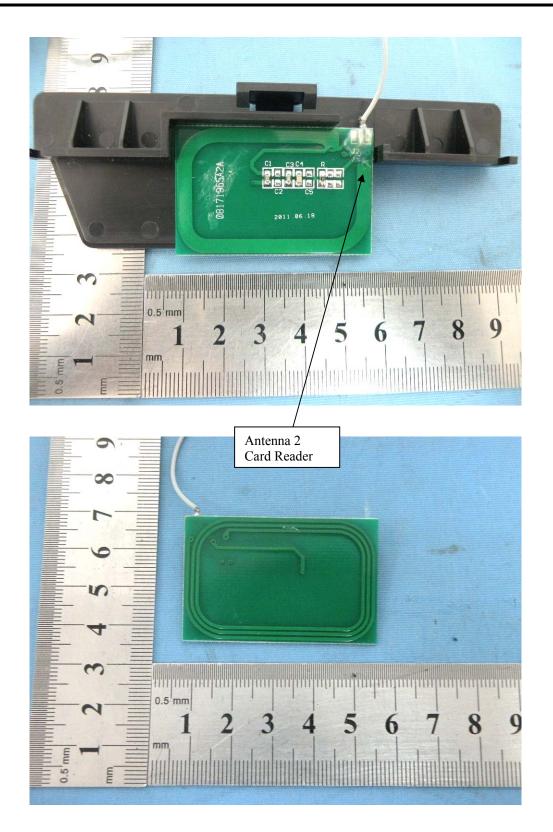


FCCID: ZYF-QS800 Page 34 of 37

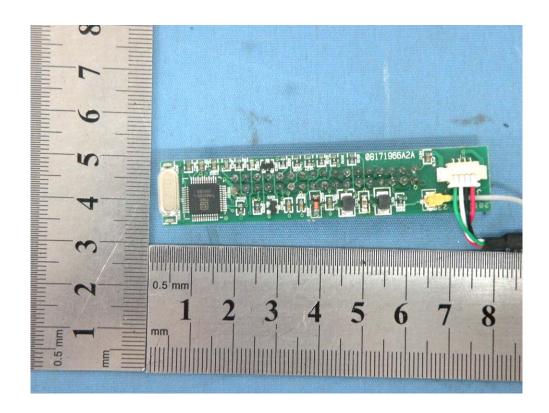

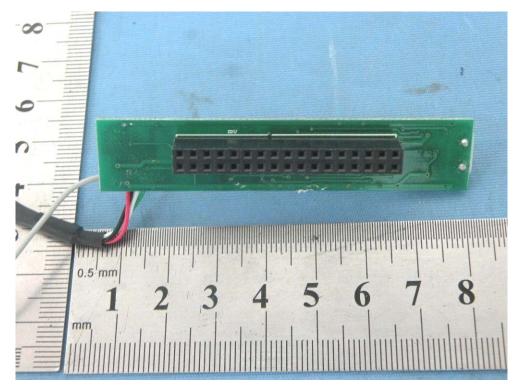


FCCID: ZYF-QS800 Page 35 of 37



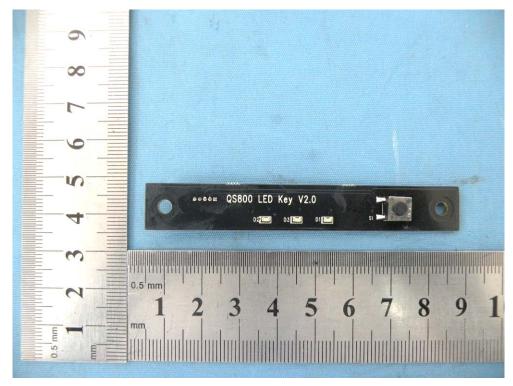

FCCID: ZYF-QS800 Page 36 of 37

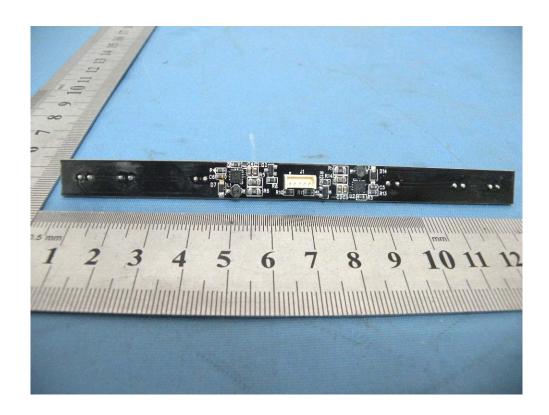



-----END OF THE REPORT-----

FCCID: ZYF-QS800 Page 37 of 37