




Shenzhen Jinshunlaite Motor.,Ltd.

web: www.aslongdcmotor.com/www.aslongmotor.com

Email: sales@aslongmotor.com

ASLONG

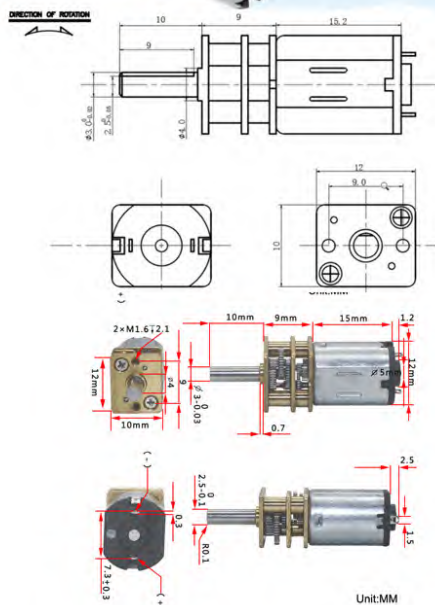

N20 DC Gear Motor

DC3V7500 Test Parameter:

Reduction Ratio	5	10	20	30	50	100	150	210	250	298	380	1000
No load Current (mA)	≤20	≤20	≤20	≤20	≤20	≤20	≤20	≤20	≤20	≤20	≤20	≤20
No load RPM	1500	750	750	250	150	75	50	35	30	25	20	7.5
Load torque g.cm	10	22	42	66	108	222	330	462	540	660	840	2220
Load RPM	1150	580	570	200	110	60	38	28	23	20	14	5.5
Load Current (mA)	≤100	≤100	≤100	≤100	≤100	≤100	≤100	≤100	≤100	≤100	≤100	≤100
Max Torque g.cm	18	36	70	110	180	370	550	770	900	1100	1400	3700
Stall Current (mA)	210	210	210	210	210	210	210	210	210	210	210	210

Model: JGA12-N20

DC6V06150 Test Parameter:

Reduction Ratio	5	10	20	30	50	100	150	210	250	298	380	1000
No load Current (mA)	≤30	≤30	≤30	≤30	≤30	≤30	≤30	≤30	≤30	≤30	≤30	≤30
No load RPM	3000	1500	750	500	300	150	100	71	60	50	39	15
Load torque g.cm	22	44.0	88	132	221	440	662	924	1103	1300	1670	3000
Load RPM	2308	1154	577	384	231	115	77	55	46	39	30	11.5
Load Current (mA)	≤150	≤150	≤150	≤150	≤150	≤150	≤150	≤150	≤150	≤150	≤150	≤150
Max Torque g.cm	37	73	147	220	368	738	1103	1544	1838	2200	Forbid Locked	
Stall Current (mA)	300	300	300	300	300	300	300	300	300	300	300	300

DC12V12300 Test Parameter:

Reduction Ratio	5	10	20	30	50	100	150	210	250	298	380	1000
No load Current (mA)	≤50	≤50	≤50	≤50	≤50	≤50	≤50	≤50	≤50	≤50	≤50	≤50
No load RPM	6000	3000	1500	1000	600	300	200	143	120	101	79	30.0
Load torque g.cm	33	66	132	180	330	660.0	990	1386	1650	1960	2500	3000
Load RPM	4615	2308	1154	770	462	231	154	110	92	77	61	23
Load Current (mA)	270	270	270	270	270	270	270	270	270	270	270	270
Max Torque g.cm	55	110	220	300	550	1100	1650	2310	2750	Forbid Locked		
Stall Current (mA)	550	550	550	550	550	550	550	550	550	550	550	550

Unit:MM



Shenzhen Jinshunlaite Motor.,Ltd.

web: www.aslongdcmotor.com/www.aslongmotor.com

Email: sales@aslongmotor.com

ASLONG

Model: 1024-N20

Model	Voltage		No load		On Load				Stall		Speed reducer	
	Workable	Rated	Speed	Current	Speed	Current	Torque	Output	Torque	Current	Ratio	Size
	Range	V	rpm	mA	rpm	mA	Kg.cm	w	kg.cm	mA	1:00	g
1024-n20	3-12v	6v	576	60	410	150	0.1	0.5	0.5	600	26	19
1024-n20	3-12v	6v	440	60	308	150	0.2	0.5	0.8	600	34	19
1024-n20	3-12v	6v	300	60	214	150	0.45	0.5	1.5	600	50	19
1024-n20	3-12v	6v	136	60	97	150	0.95	0.5	2.5	600	110	19
1024-n20	3-12v	6v	90	60	64	150	1.2	0.5	3	600	168	19
1024-n20	3-12v	6v	70	60	50	150	1.5	0.5	4	600	210	19
1024-n20	3-12v	6v	60	60	43	150	2	0.5	5	600	250	19
1024-n20	3-12v	6v	42	60	30	150	2	0.5	Ban locked		350	19
1024-n20	3-12v	6v	30	60	21	150	2	0.5			500	19
1024-n20	3-12v	6v	15	60	11	150	2	0.5			1000	23

