SWC1IC: Short-Range Wireless Communication – WS 2026
Lab Report 1

Simone B. Feldbacher Florian J. Neugebauer Philipp Schaupp
Gerald Wagner-Mistlberger

November 5, 2026

1.1 Setup

The goal of this assignment is to analyze the wireless performance of the nRF52840 SoC by measuring signal strength (RSSI) and packet loss over different distances, transmit powers, and modulation schemes.

- **Setup and Implementation:** Two Nordic nRF52840-DK boards (TX and RX) were controlled via PuTTY over serial UART (115200 baud, 8N1) using the Zephyr `radio_test` sample. An interference-free channel at 2440 MHz was selected (`start_channel 40`) via the nRF Connect RSSI Viewer. The TX sent bursts of 1000 packets with `pattern_11110000` (`start_tx_modulated_carrier 1000`) at 0 dBm and at -40 dBm with BLE 2 Mbit/s. The RX logged received packets N_{RX} and RSSI with `print_rx`. Packet loss was calculated as:

$$\text{Packet Loss } [\%] = \frac{1000 - N_{\mathrm{RX}}}{1000} \times 100 \tag{1.1}$$

- **Test Procedure:** Measurements were performed across five physical distances: 1 m, 4 m, 6 m, 8 m, and 11 m.

1.2 Results and Discussion

1.2.1 Transmit Power at 0 dBm

- **RSSI vs. Distance (Figure 1.1):** At 1 m, the signal remained flat near −61 dBm. Increasing the distance lowered the RSSI to −72 dBm at 4 m, −85 dBm at 8 m, and down to −88 dBm at 11 m. Noticeable fluctuations appeared at larger distances due to indoor multipath reflections. The spread of the samples was narrow (1–2 dBm) at 1 m and 4 m and broadened to 5–8 dBm at 6–11 m, showing that attenuated signals are much more sensitive to environmental changes.
- **Packet Reception and Loss (Figure 1.2):** Out of 1000 transmitted packets, 945 were received at 1 m (5.5% loss) and 936 at 11 m (6.4% loss). Despite the 27 dBm signal drop, packet loss remained below 6.5%, showing that 0 dBm provides ample link margin for indoor spaces.

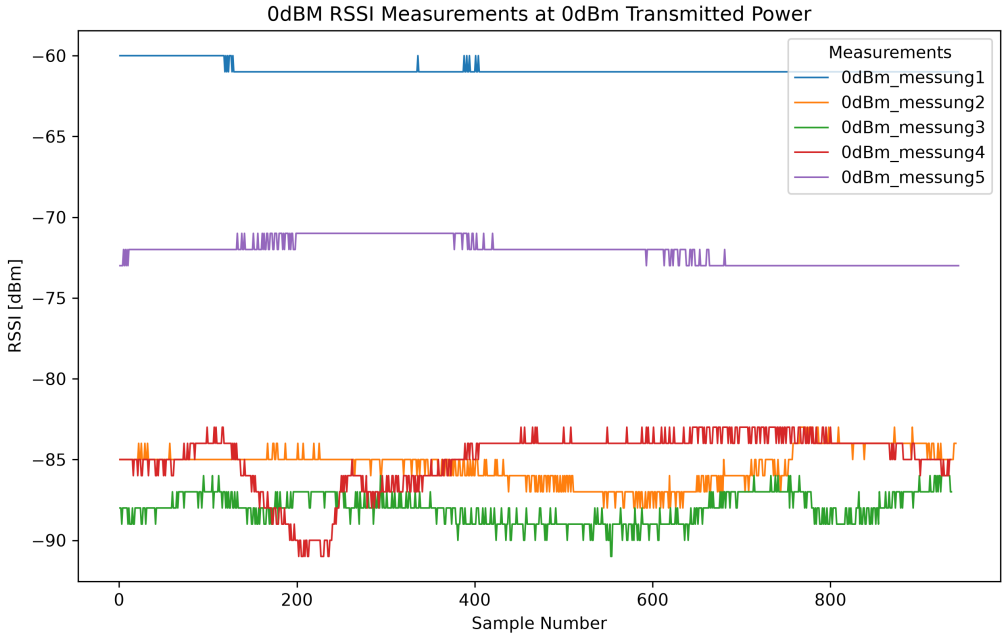


Figure 1.1: Received RSSI across 1000 samples for each distance at 0 dBm transmit power.

1.2.2 Transmit Power at −40 dBm

- **RSSI and Packet Loss (Figure 1.3):** TODO: state the mean RSSI and packet loss per distance (expected: roughly 40 dB lower RSSI than in Figure 1.2 and markedly higher packet loss, since the received power approaches the receiver sensitivity of the 2 Mbit/s PHY).

1.2.3 Comparison of Radio Modes

The BLE 2 Mbit/s results at −40 dBm were compared with a second radio mode, IEEE 802.15.4-250 kbit/s (`data_rate ieee802154_250Kbit`), measured at the same transmit power and over the same distances.

- **Comparison (Figure 1.4):** TODO: state whether the mean RSSI of the two modes differs, and which mode keeps a lower packet loss (expected: the 250 kbit/s mode, with its lower receiver sensitivity and eight times longer symbol time, remains reliable at longer distances).

1.3 Conclusion

- **Indoor Attenuation:** Physical obstructions and multipath reflections prevent RSSI from decreasing linearly with distance, making raw RSSI unreliable for standalone distance estimation.
- **Link Margin at 0 dBm:** At 0 dBm, BLE 2 Mbit/s easily covers up to 11 m with negligible loss while the -40 dBm case had considerably higher packet loss,

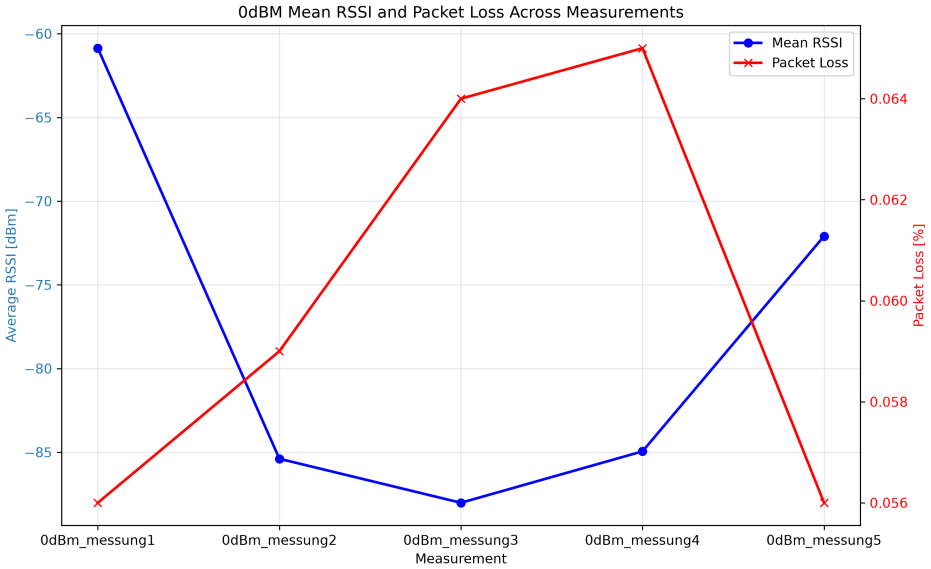


Figure 1.2: Mean RSSI compared with packet loss across all measured distances at 0 dBm transmit power.

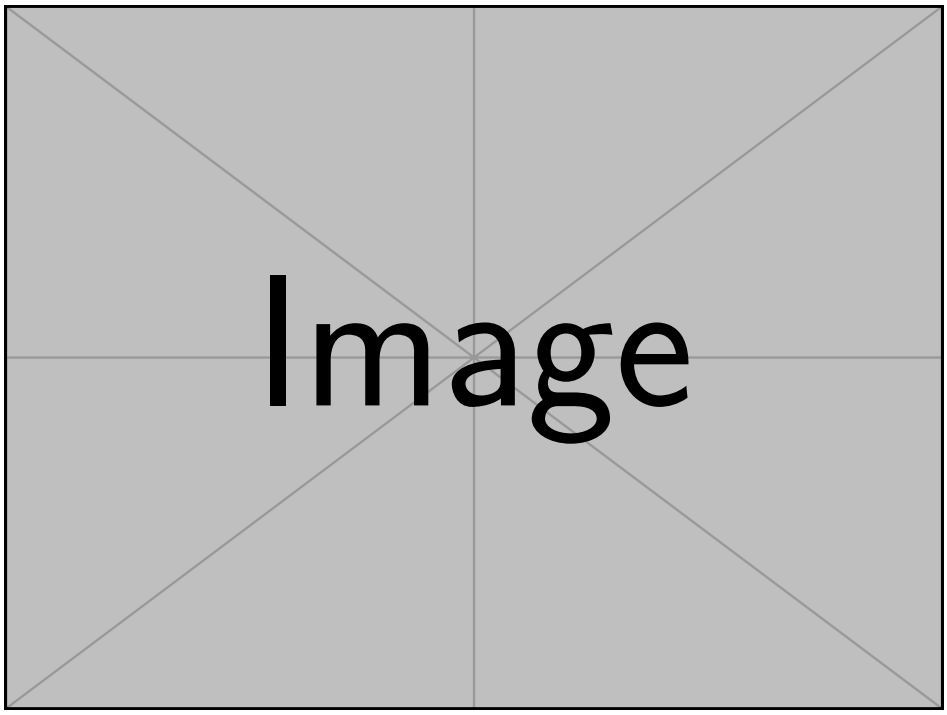


Figure 1.3: Mean RSSI compared with packet loss across all measured distances at −40 dBm transmit power.

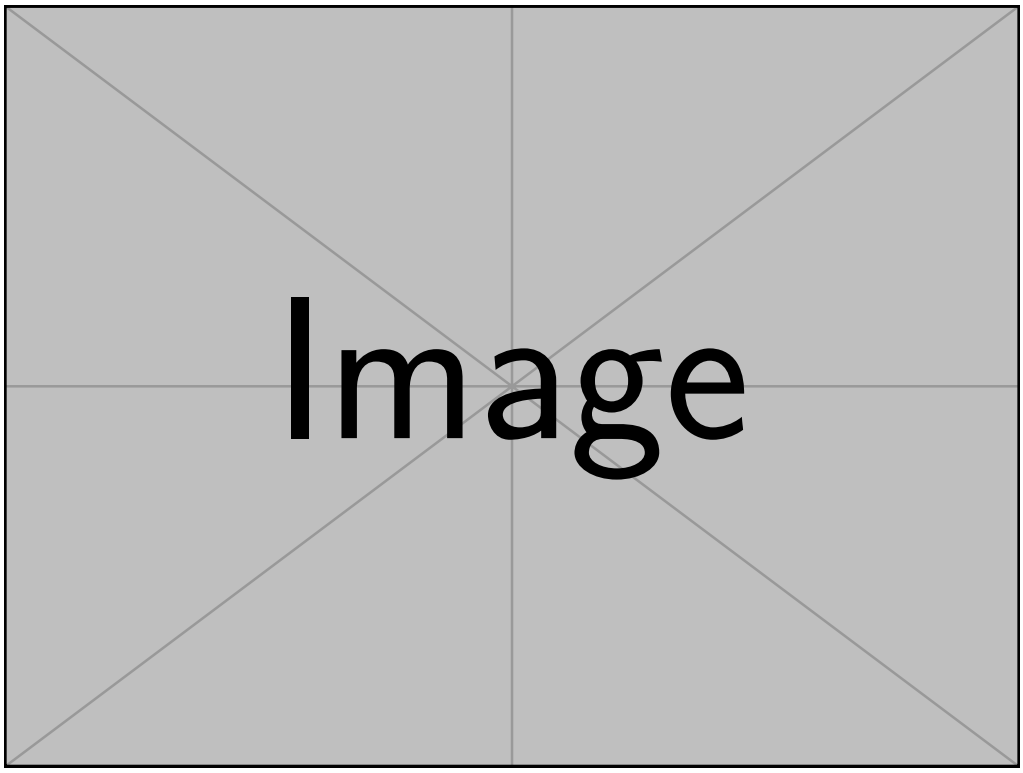


Figure 1.4: Mean RSSI (left) and packet loss (right) for BLE 2 Mbit/s and IEEE 802.15.4-250 kbit/s at −40 dBm transmit power.

indicating that higher transmit power is crucial for maintaining reliable links in indoor environments.

- **Data Rate vs. Range:** TODO: one sentence on the outcome of the radio mode comparison.
- **Future Implementations:** TODO: conclude what you will consider in future wireless implementations (e.g. transmit power vs. battery life, data rate choice for the required range, and channel selection against interference).