


BATFER INVESTMENT S.A. RESERVES THE OWNERSHIP OF THIS DOCUMENT. IT IS PROHIBITED TO REPRODUCE, MODIFY OR TRANSFER WITHOUT PRIOR WRITTEN AUTHORIZATION.

1	2	3	4	5	6	7	8																																																			
A								A																																																		
B								B																																																		
C								C																																																		
D	Client: MMA Project: mSafe2 Description Document: 75287 DIAGRAMA ELÉCTRICO mSafe2 Document Number: 75287 ZPL Revision: 6 Date: 26-04-2026							D																																																		
E								E																																																		
F	<table><tr><td>6</td><td>Update whit fixes</td><td>13/07/26</td><td>LM</td><td>MD</td><td>MPV</td><td>PROJECT: C.J. CONTROLADOR mSafe2</td><td rowspan="4"></td><td>DOC NUMBER: 75287</td><td>GRAL REV: 6</td></tr><tr><td>5</td><td>Update whit fixes</td><td>26/05/26</td><td>LM</td><td>MD</td><td>MPV</td><td>CODE: 75286-1</td><td>TITLE: DIAGRAMA ELÉCTRICO mSafe2</td><td>PAG: 00</td><td>REV: 6</td></tr><tr><td>4</td><td>Update whit fixes</td><td>15/05/26</td><td>LM</td><td>MD</td><td>MPV</td><td>CLIENT: MMA</td><td>CARÁTULA</td><td></td><td></td></tr><tr><td>3</td><td>For Manufacturing</td><td>12/03/26</td><td>LM</td><td>MD</td><td>MPV</td><td></td><td></td><td></td><td></td></tr><tr><td>REV</td><td>DESCRIPTION</td><td>DATE</td><td>PROJ.</td><td>DW.</td><td>APR.</td><td></td><td></td><td>CONT: 01</td><td></td></tr></table>							6	Update whit fixes	13/07/26	LM	MD	MPV	PROJECT: C.J. CONTROLADOR mSafe2	 	DOC NUMBER: 75287	GRAL REV: 6	5	Update whit fixes	26/05/26	LM	MD	MPV	CODE: 75286-1	TITLE: DIAGRAMA ELÉCTRICO mSafe2	PAG: 00	REV: 6	4	Update whit fixes	15/05/26	LM	MD	MPV	CLIENT: MMA	CARÁTULA			3	For Manufacturing	12/03/26	LM	MD	MPV					REV	DESCRIPTION	DATE	PROJ.	DW.	APR.			CONT: 01		F
6	Update whit fixes	13/07/26	LM	MD	MPV	PROJECT: C.J. CONTROLADOR mSafe2	 	DOC NUMBER: 75287	GRAL REV: 6																																																	
5	Update whit fixes	26/05/26	LM	MD	MPV	CODE: 75286-1		TITLE: DIAGRAMA ELÉCTRICO mSafe2	PAG: 00	REV: 6																																																
4	Update whit fixes	15/05/26	LM	MD	MPV	CLIENT: MMA		CARÁTULA																																																		
3	For Manufacturing	12/03/26	LM	MD	MPV																																																					
REV	DESCRIPTION	DATE	PROJ.	DW.	APR.			CONT: 01																																																		

BATFER INVESTMENT S.A. RESERVES THE OWNERSHIP OF THIS DOCUMENT. IT IS PROHIBITED TO REPRODUCE, MODIFY OR TRANSFER WITHOUT PRIOR WRITTEN AUTHORIZATION.


1		2		3		4		5		6		7		8											
A	Pag.	Page Title	Revision							Additional Comments	Pag.	Page Title	Revision							Additional Comments					
			0	1	2	3	4	5	6				7	0	1	2	3	4	5		6	7			
	00	CÁRATULA	X	X	X	X	X	X	X		45	FREE													
	01	INDICE	X	X	X	X	X	X	X		46	ENTRADAS DIGITALES EXTERNAS	X	X	X	X	X	X							
	02	TOPOGRÁFICO EXTERIOR	X	X	X	X	X	X	X		47	FREE													
	03	TOPOGRÁFICO INTERIOR	X	X	X	X	X	X	X		48	FREE													
	04	TOPOGRÁFICO INTERIOR DETALLES	X	X	X	X	X	X	X		49	FREE													
B	05	FREE									50	FREE													
	06	FREE									51	FREE													
	07	FREE									52	FREE													
	08	FREE									53	FREE													
	09	LISTA DE MATERIALES	X	X	X	X	X	X	X		54	FREE													
	10	REFERENCIA DE SIMBOLOS	X	X	X	X	X	X	X		55	FREE													
	11	ALIMENTACIÓN Y DISTRIBUCIÓN 220VAC	X	X	X	X	X	X	X		56	FREE													
	12	ALIMENTACIÓN DE CIRCUITO DE POTENCIA DC	X	X	X	X	X	X	X		57	FREE													
	13	DISTRIBUCIÓN DE VOLTAJE DE CONTROL	X	X	X	X	X	X	X		58	FREE													
	14	ALIMENTACIÓN PLACA ELECTRÓNICA E2.5	X	X	X	X	X	X	X		59	FREE													
	15	ALIMENTACIÓN DE BARRERAS Y MÓDULOS	X	X	X	X	X	X	X		60	FREE													
C	16	FREE									61	FREE													
	17	FREE									62	SALIDAS DIGITALES INTERNAS	X	X	X	X	X	X							
	18	FREE									63	FREE													
	19	FREE									64	FREE													
	20	FREE									65	FREE													
	21	PLACA ELECTRÓNICA E2.5 – DISTRIBUCIÓN DE CONEXIONES	X	X	X	X	X	X	X		66	FREE													
D	22	FREE									67	FREE													
	23	FREE									68	FREE													
	24	FREE									69	FREE													
	25	FREE									70	FREE													
	26	FREE									71	FREE													
	27	FREE									72	FREE													
	28	FREE									73	FREE													
	29	FREE									74	FREE													
	30	FREE									75	FREE													
	31	ENTRADAS ANALÓGICA INTERNA	X	X	X	X	X	X	X		76	FREE													
	32	FREE									77	FREE													
	33	FREE									78	FREE													
	34	FREE									79	FREE													
	35	FREE									80	FREE													
	36	FREE									81	COMUNICACIÓN	X	X	X	X	X	X	X						
	37	FREE									82	FREE													
	38	FREE									83	FREE													
	39	FREE									84	FREE													
	40	FREE									85	FREE													
	41	ENTRADA DIGITAL INTERNA	X	X	X	X	X	X	X		86	FREE													
	42	FREE									87	FREE													
	43	ENTRADAS DIGITALES EXTERNAS	X	X	X	X	X	X	X		88	FREE													
	44	FREE									89	FREE													
F	6	Update whit fixes	13/07/26	LM	MD	MPV	PROJECT: CJ. CONTROLADOR mSafe2									DOC NUMBER: 75287				GRAL REV: 6					
	5	Update whit fixes	26/05/26	LM	MD	MPV	CODE: 75286–1									TITLE: DIAGRAMA ELÉCTRICO mSafe2				PAG:	REV:				
	4	Update whit fixes	15/05/26	LM	MD	MPV	CLIENT: MMA									Índice.				01	6				
	3	For Manufacturing	12/03/26	LM	MD	MPV										–									
	REV	DESCRIPTION	DATE	PROJ.	DW.	APR.														CONT:	02				

BATFER INVESTMENT S.A. RESERVES THE OWNERSHIP OF THIS DOCUMENT. IT IS PROHIBITED TO REPRODUCE, MODIFY OR TRANSFER WITHOUT PRIOR WRITTEN AUTHORIZATION.

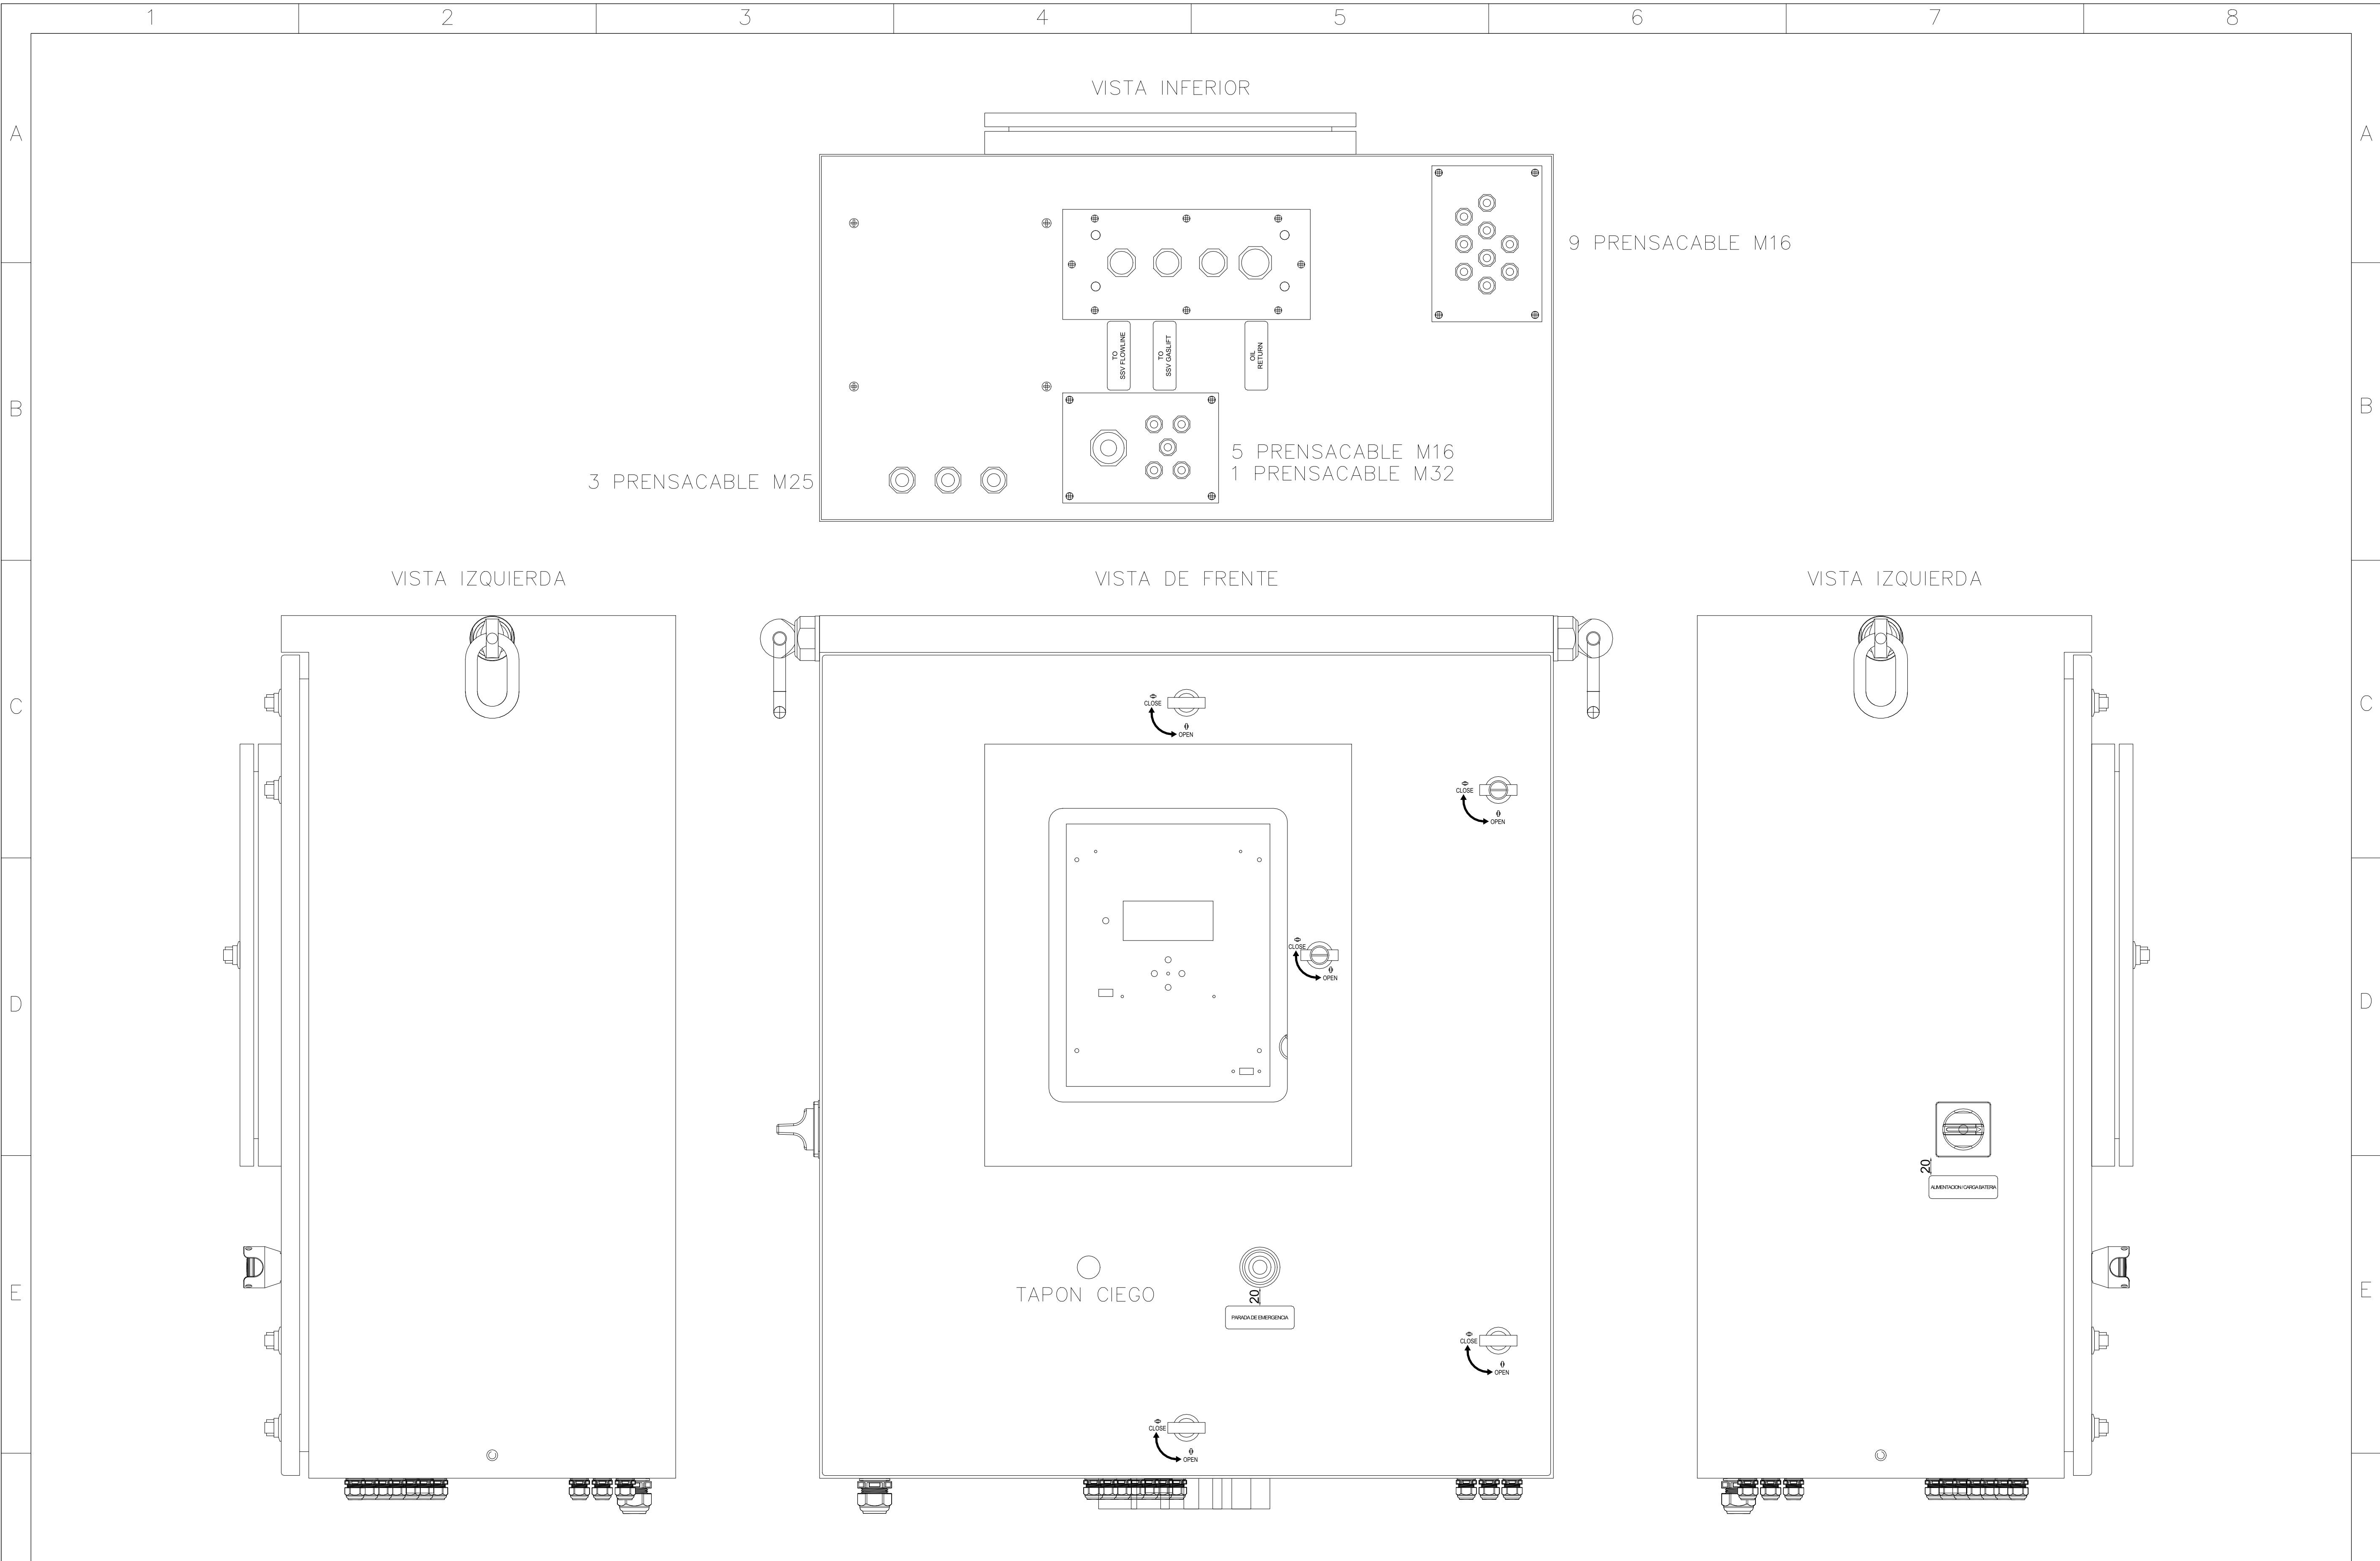

6	Update whit fixes	13/07/26	LM	MD	MPV
5	Update whit fixes	26/05/26	LM	MD	MPV
4	Update whit fixes	15/05/26	LM	MD	MPV
3	For Manufacturing	12/03/26	LM	MD	MPV
REV	DESCRIPTION	DATE	PROJ.	DW.	APR.

PROJECT: C.J. CONTROLADOR mSafe2
CODE: 75286-1
CLIENT: MMA




BATFER
Investment S.A.




DOC NUMBER:	75287	GRAL REV:	6
TITLE:	DIAGRAMA ELÉCTRICO mSafe2 TOPOGRÁFICO EXTERIOR	PAG:	02
		REV:	6
		CONT:	03

BATFER INVESTMENT S.A. RESERVES THE OWNERSHIP OF THIS DOCUMENT. IT IS PROHIBITED TO REPRODUCE, MODIFY OR TRANSFER WITHOUT PRIOR WRITTEN AUTHORIZATION.

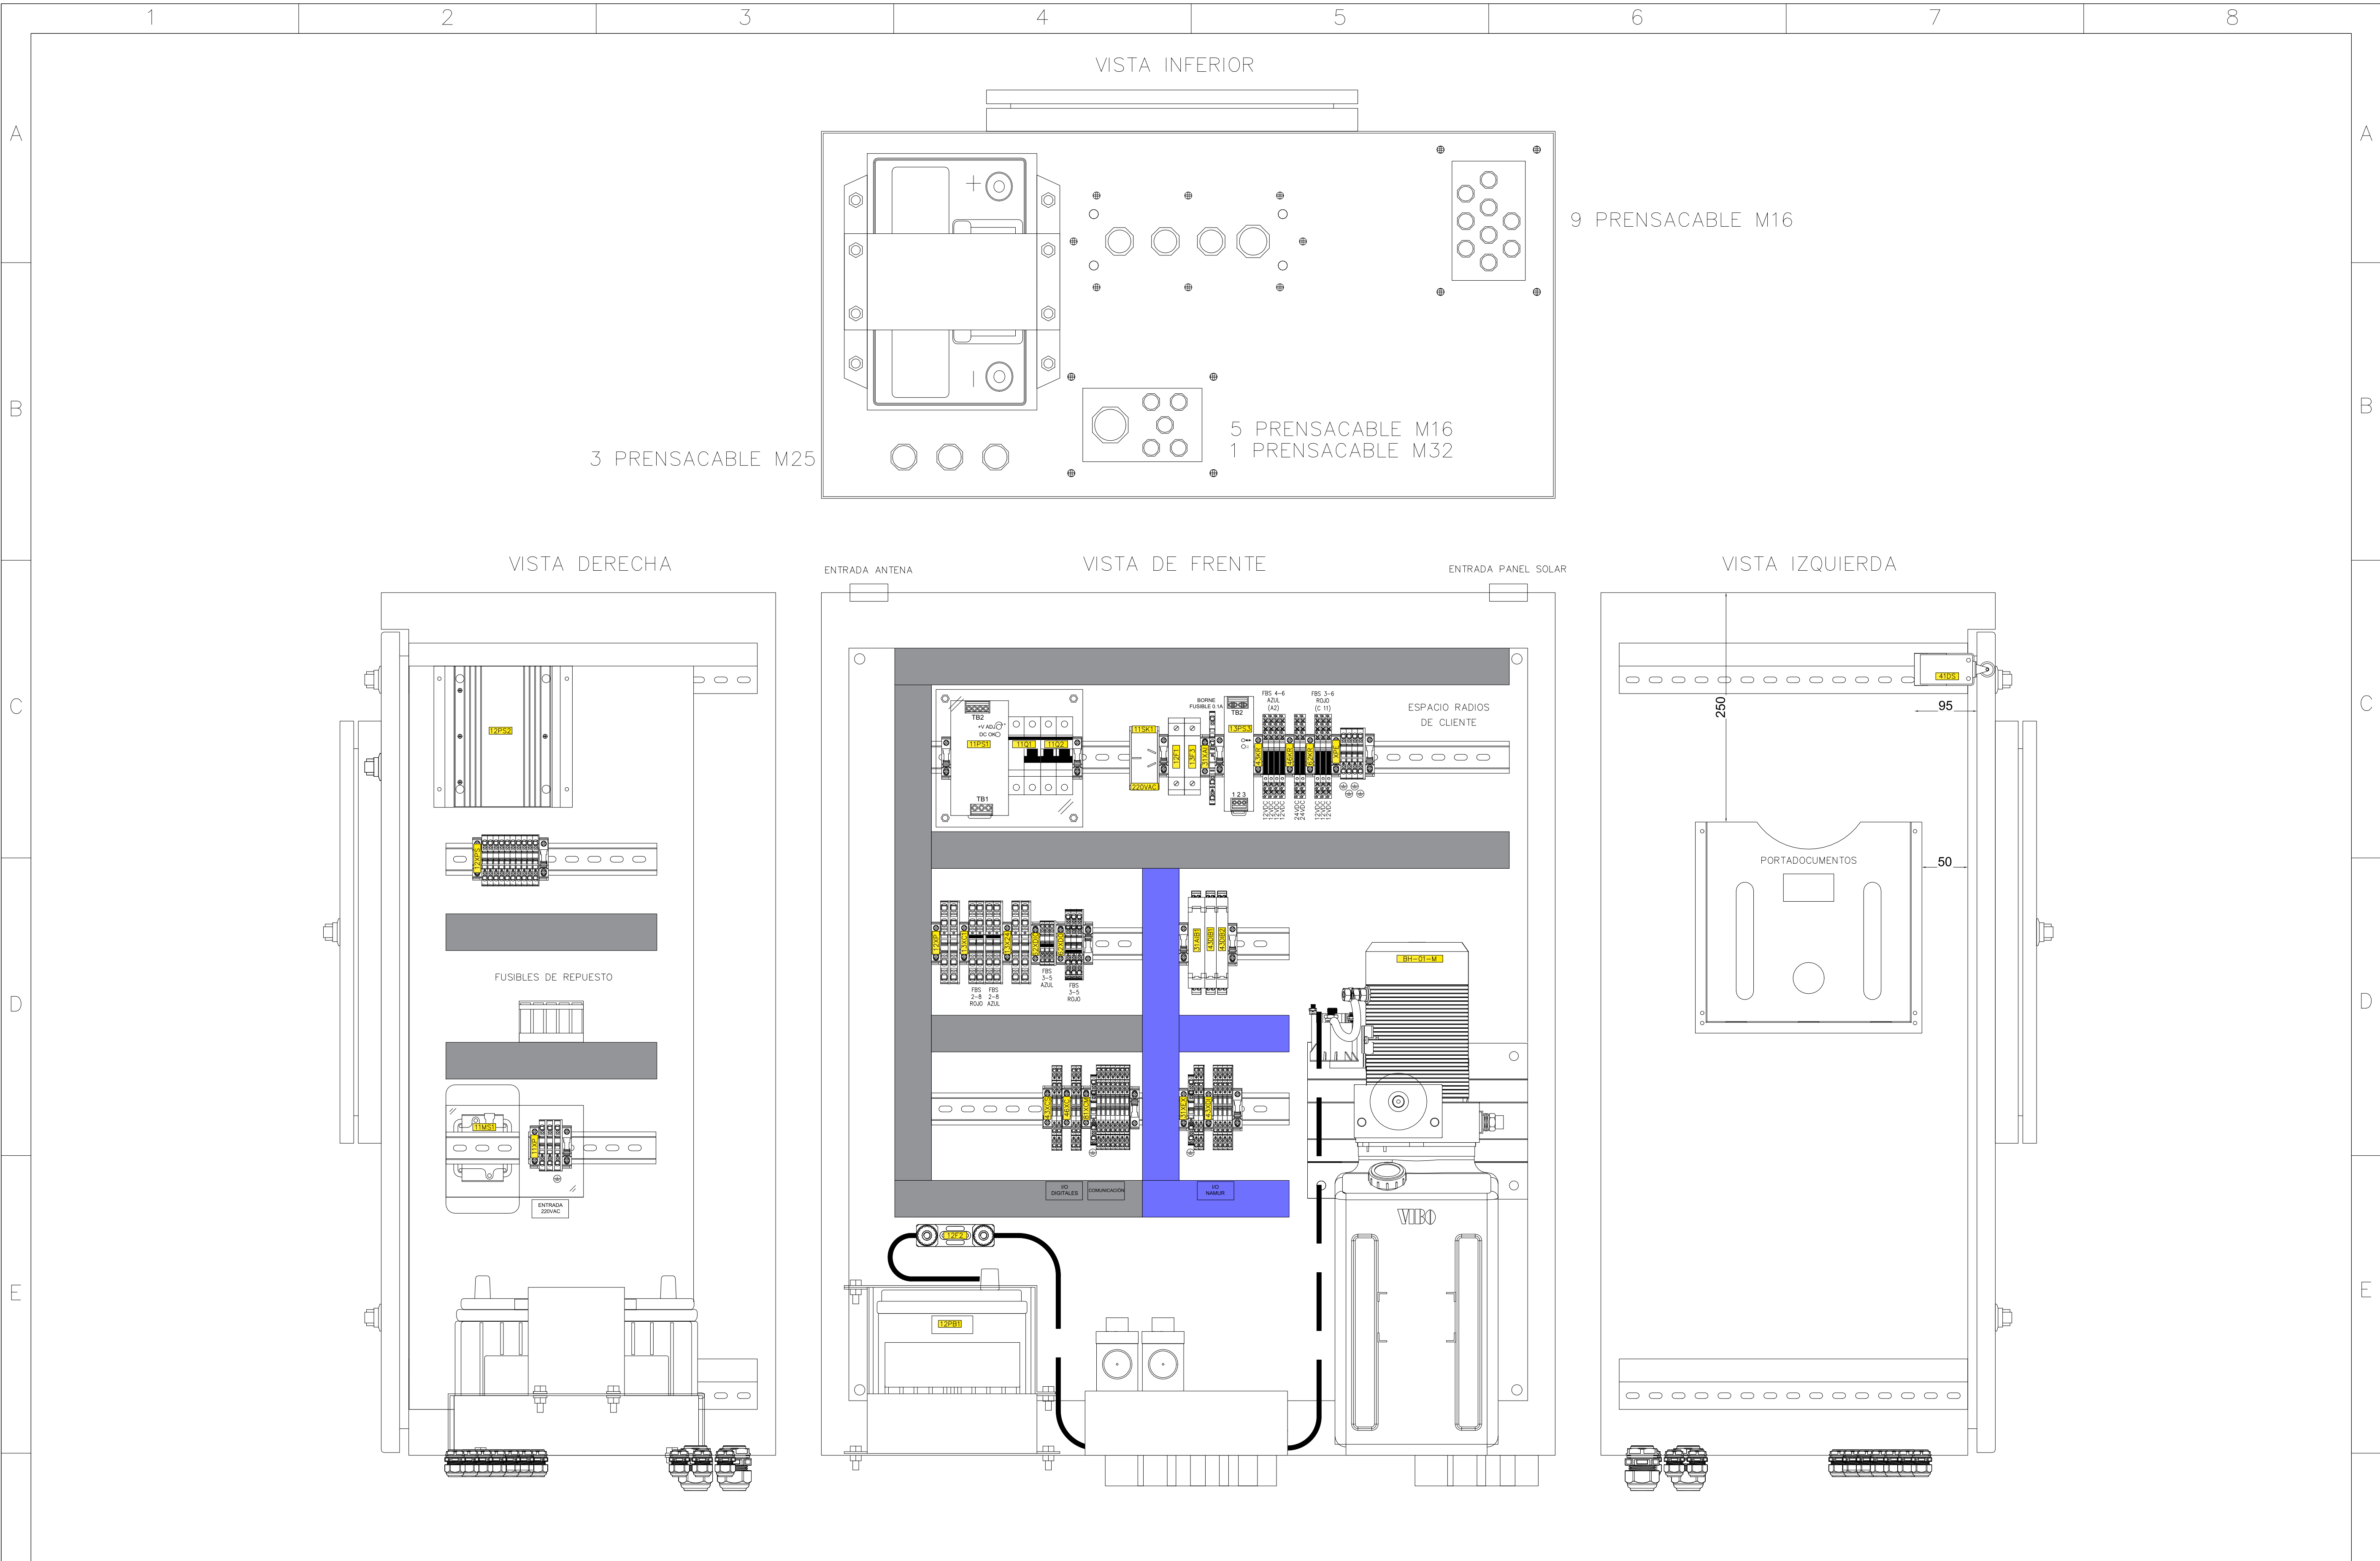

6	Update whit fixes	13/07/26	LM	MD	MPV	PROJECT: C.J. CONTROLADOR mSafe2	DOC NUMBER: 75287	GRAL REV: 6
5	Update whit fixes	26/05/26	LM	MD	MPV	CODE: 75286-1	TITLE: DIAGRAMA ELÉCTRICO mSafe2	PAG: 03
4	Update whit fixes	15/05/26	LM	MD	MPV	CLIENT: MMA	TOPOGRÁFICO INTERIOR	REV: 6
3	For Manufacturing	12/03/26	LM	MD	MPV			CONT: 04
REV	DESCRIPTION	DATE	PROJ.	DW.	APR.			




BATFER
Investment S.A.



BATFER INVESTMENT S.A. RESERVES THE OWNERSHIP OF THIS DOCUMENT. IT IS PROHIBITED TO REPRODUCE, MODIFY OR TRANSFER WITHOUT PRIOR WRITTEN AUTHORIZATION.

NOTE: cables not indicated will be black 0.75mm²/18 AWG

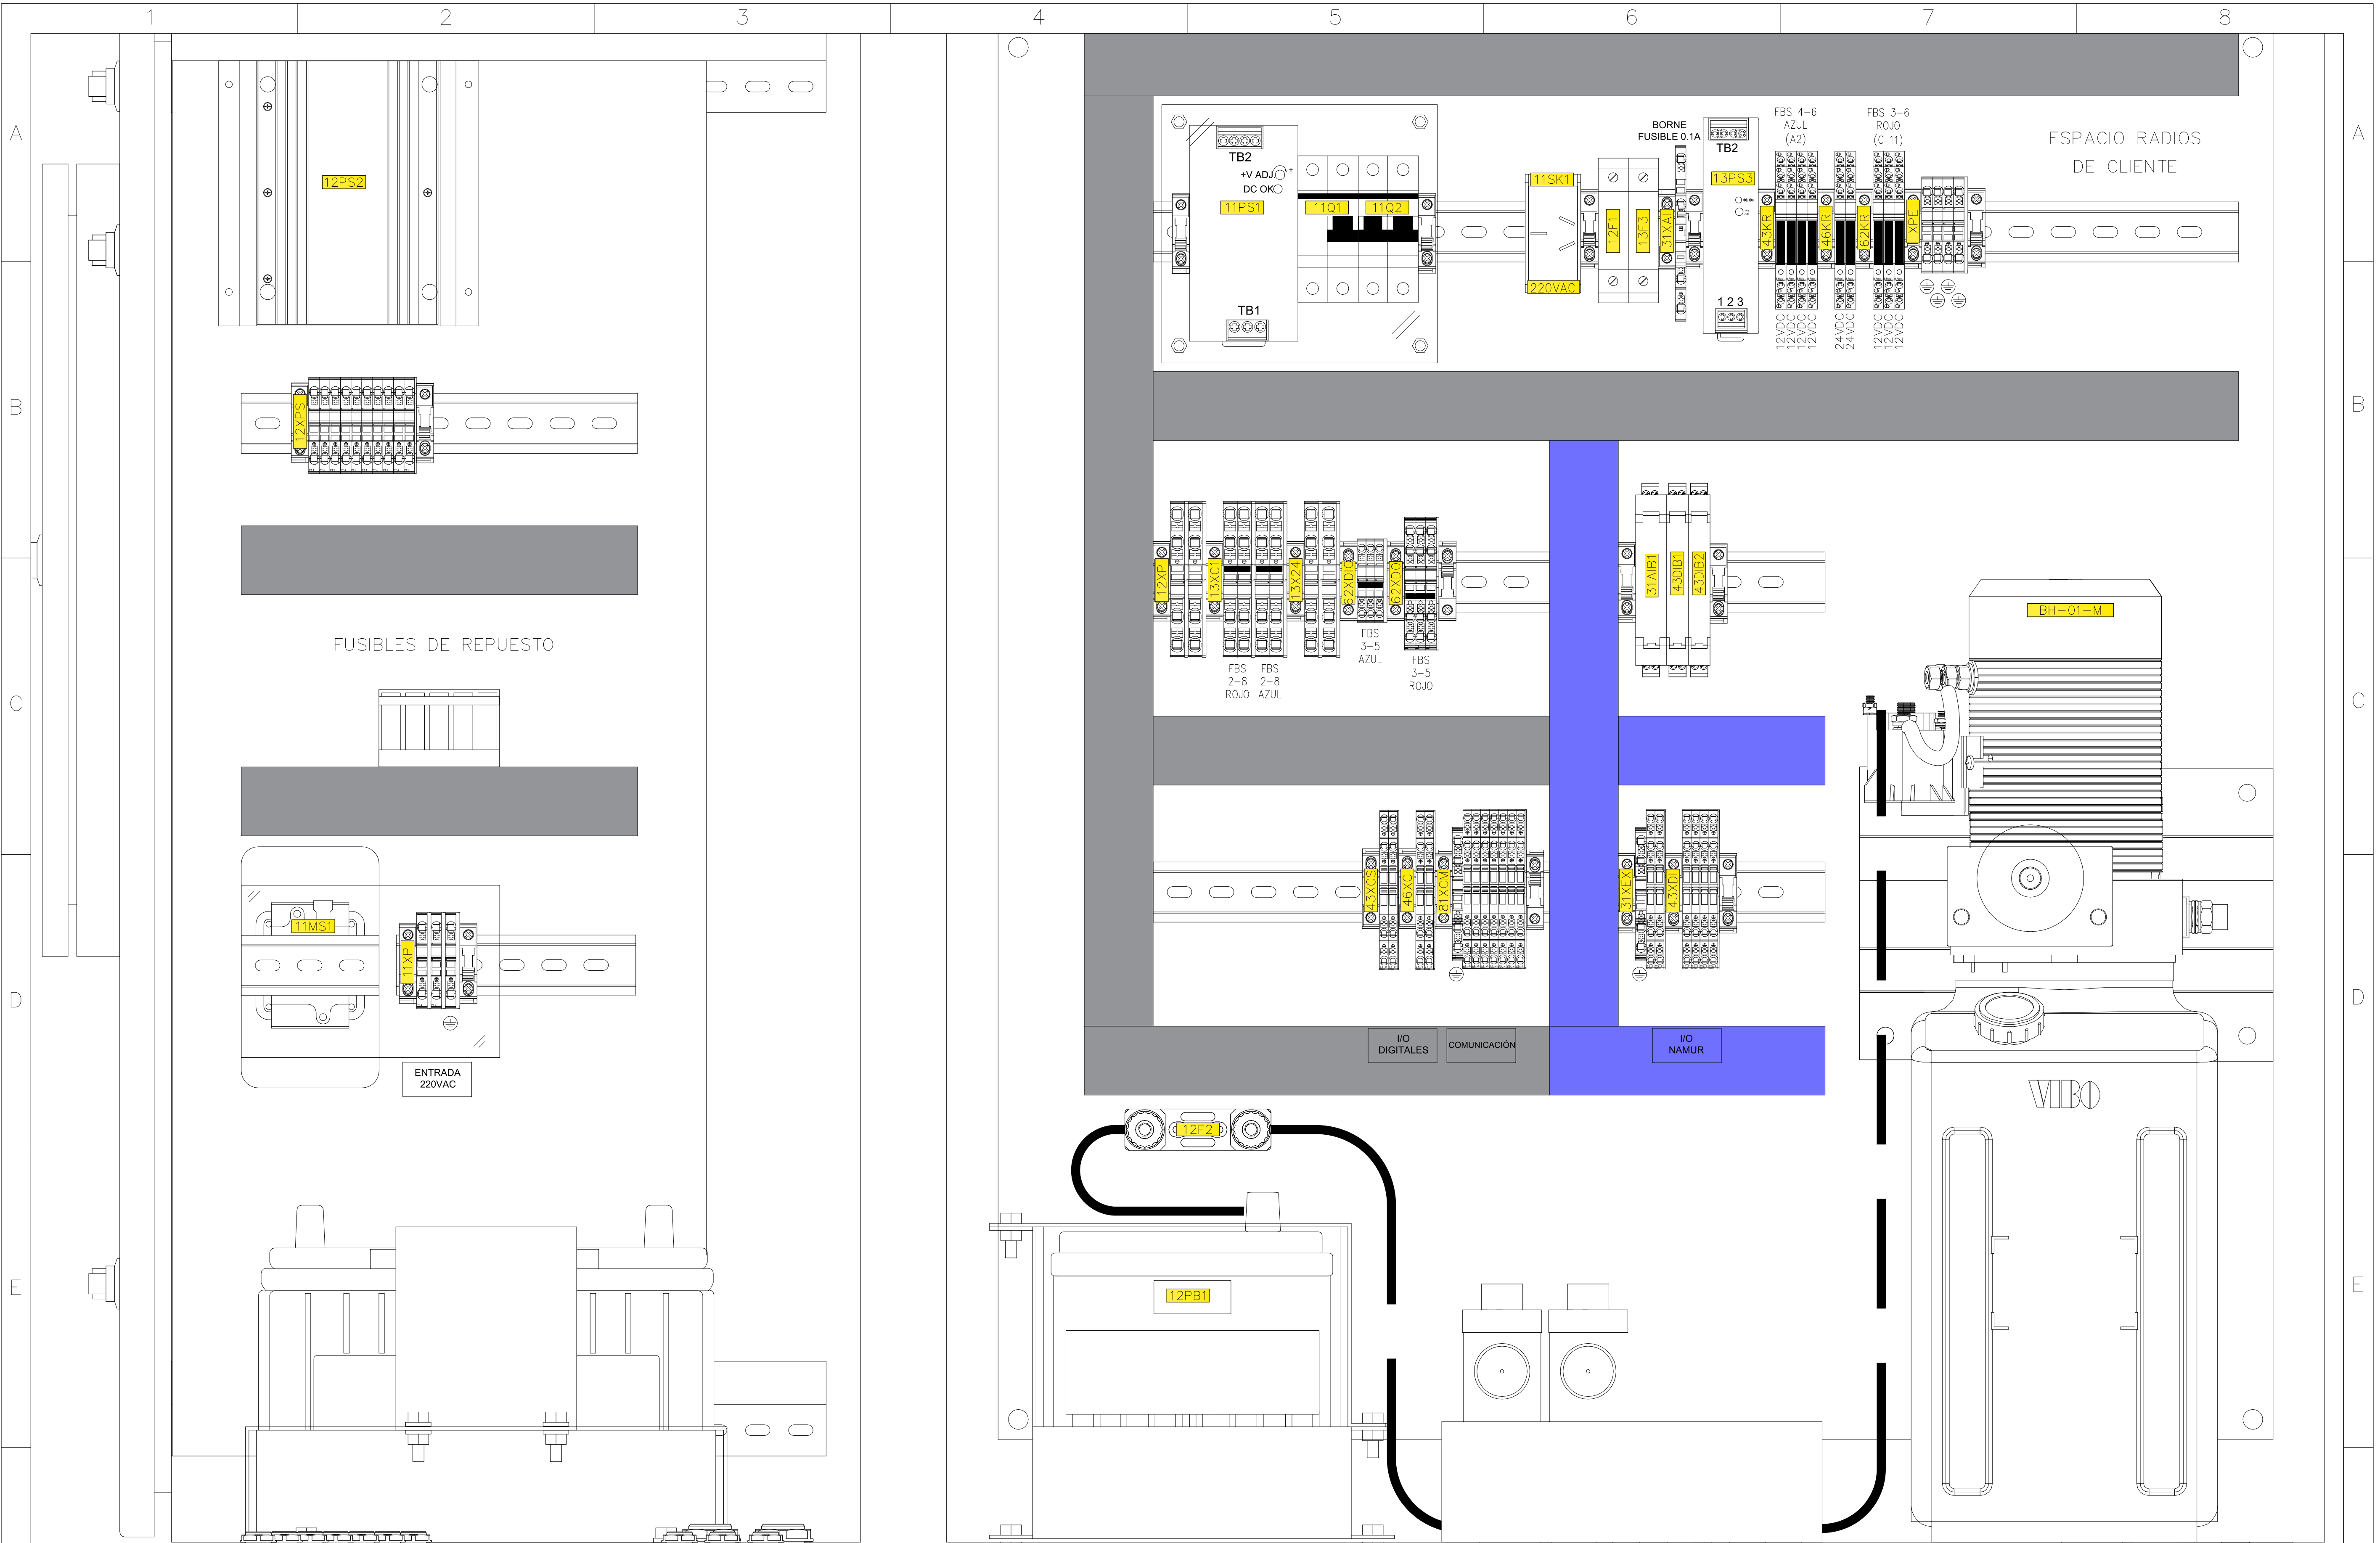

6	Update whit fixes	13/07/26	LM	MD	MPV
5	Update whit fixes	26/05/26	LM	MD	MPV
4	Update whit fixes	15/05/26	LM	MD	MPV
3	For Manufacturing	12/03/26	LM	MD	MPV
REV	DESCRIPTION	DATE	PROJ.	DW.	APR.

PROJECT: C.J. CONTROLADOR mSafe2
CODE: 75286-1
CLIENT: MMA
















DOC NUMBER: 75287
TITLE: DIAGRAMA ELÉCTRICO mSafe2
TOPOGRÁFICO INTERIOR
DETALLES

GRAL REV:	6
PAG:	04
REV:	6
CONT:	09


NOTE: cables not indicated will be black 0.75mm ² /18 AWG															
1		2		3		4		5		6		7		8	
A	TAG		DESCRIPTION					BRAND			MODEL / CODE				A
	11XP		Bornes de alimentación					PHOENIX CONTACT			PT 6				
	11MS1		Interruptor Seccionador					SCHNEIDER			VBF1				
	11PS1		Fuente de alimentación 110–240 Vac a 24 VDC					MEAN WELL			NDR–120–24				
	11Q1		Disyuntor diferencial 25A – 30mA					SCHNEIDER			EZ9R36225				
	11Q2		Interruptor termomagnético 2x10A curva C					SCHNEIDER			EZ9F34210				
	11SK1		Toma corriente IRAM					VIVION			–				
B	BH–01–ZV		Contactor de bomba de 12 VDC					TROMBETTA			684–1261–212–17				B
	12XPS		Bornes de cargador de Batería					PHOENIX CONTACT			PT 6				
	12PS2		Cargador de Baterías					EPEVER			MPPT TRACER5210BP				
	12XP		Bornes de distribución de voltaje de 12VDC					PHOENIX CONTACT			PT 6 QUATTRO				
	12F1		Base de fusible para alimentación de batería					SCHNEIDER			DF101 10x38				
	–		Fusible cerámico cilíndrico 20A 10x38mm gL					–			–				
	12F2		Base para fusible tipo MEGA					MEGA			–				
	–		Fusible tipo MEGA 150A					–			–				
	13XC1		Distribución de voltaje de control 12VDC					PHOENIX CONTACT			PT 6 QUATTRO				
	13PS2		Conversor 12/24VDC					MEAN WELL			DDR–120A–24				
C	13F3		Base de fusible para alimentacion 12VDC					SCHNEIDER			DF101 10x38				C
	–		Fusible cerámico cilíndrico 10A 10x38mm gL					–			–				
	13F4		Base de fusible para alimentacion 12VDC					SCHNEIDER			DF101 10x38				
	–		Fusible cerámico cilíndrico 10A 10x38mm gL					–			–				
	13X24		Distribución de voltaje de control 24VDC					PHOENIX CONTACT			PT 6 QUATTRO				
	21PCB01		Placa Electrónica de Control Principal					MMA			L03–60591–01				
	31XAI		Bornes de entradas analógicas internas					PHOENIX CONTACT			PTT 2,5–2MT				
	PT–001		Transmisor de presión de la bomba hidráulica					NOSHOK			PT20–250bar–1–1–10–8				
	31XAI		Bornes de entradas analógicas externas					PHOENIX CONTACT			PTT 2,5–2 MT				
	31XEX		Bornes de entradas analógicas externas					PHOENIX CONTACT			PTT 2,5–2 MT BU				
D	31AIB1		Entrada Analógica – Barrera Seg. Intrínseca					CHENZHU			GS8536–EX				D
	41DS		Interruptor límite de puerta					OMRON			HL–5200				
	43XDI		Bornes de entradas digitales					PHOENIX CONTACT			PTT 2,5–2 MT BU				
	43DIB1/2		Entrada Digital – Barrera Seg. Intrínseca					CHENZHU			GS8512–EX.22				
	43KR		Borne relé 12VDC					PHOENIX CONTACT			RIF–0–RPT–12DC/21				
	46DB1		Botón de paro de emergencia.					SCHNEIDER			ZBE–101				
	46XC		Bornes de comando externo 24 VDC					PHOENIX CONTACT			PTT 2,5–2 MT				
	46KR		Borne relé 24VDC					PHOENIX CONTACT			RIF–0–RPT–24DC/21				
	62KR		Borne relé 12VDC					PHOENIX CONTACT			RIF–0–RPT–12DC/21				
	62XDO		Bornes de comandos					PHOENIX CONTACT			PTT 2,5				
E	62XDIO		Bornes diodo antiparalelo de supresion					PHOENIX CONTACT			PT 2,5–DIO/L–R				E
	SP–1/2		Válvula solenoide					–			–				
	81XCM		Borne de comunicación					PHOENIX CONTACT			PTT 2,5–2MT				
	BORNES DE TIERRA		Borne doble de tierra					PHOENIX CONTACT			PT 2,5–QUATTRO–PE				
	–		–					–			–				
	–		–					–			–				
	–		–					–			–				
	–		–					–			–				
	–		–					–			–				
	–		–					–			–				
F	–		–					–			–				F
	–		–					–			–				
	–		–					–			–				
	–		–					–			–				
	–		–					–			–				
	–		–					–			–				
	–		–					–			–				
	–		–					–			–				
	–		–					–			–				
	–		–					–			–				

6	Update whit fixes	13/07/26	LM	MD	MPV	PROJECT: CJ. CONTROLADOR mSafe2	 	DOC NUMBER: 75287		GRAL REV: 6	
5	Update whit fixes	26/05/26	LM	MD	MPV	CODE: 75286–1		TITLE: DIAGRAMA ELÉCTRICO mSafe2		PAG:	REV:
4	Update whit fixes	15/05/26	LM	MD	MPV	CLIENT: MMA		Lista de materiales.		09	6
3	For Manufacturing	12/03/26	LM	MD	MPV			–		CONT:	10
REV	DESCRIPTION	DATE	PROJ.	DW.	APR.						

BATFER INVESTMENT S.A. RESERVES THE OWNERSHIP OF THIS DOCUMENT. IT IS PROHIBITED TO REPRODUCE, MODIFY OR TRANSFER WITHOUT PRIOR WRITTEN AUTHORIZATION.

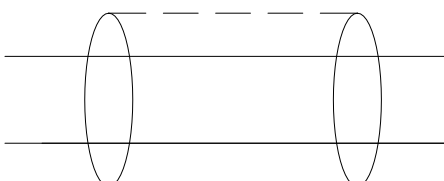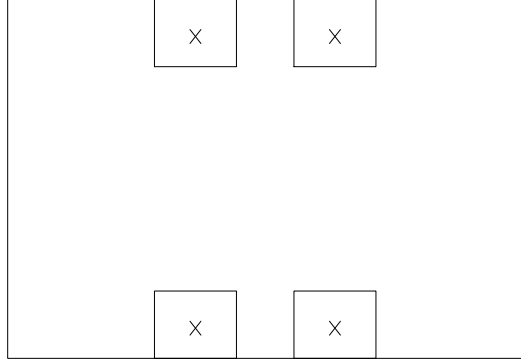1	2	3	4	5	6	7	8
A	Símbolo	Descripción	Símbolo	Descripción	Símbolo	Descripción	
B		Diferencial / Disyuntor		Borne Doble		Tag de cable	
		Termomagnética		Borne simple		N° de página	X X X X
		Seccionador Rotativo		Borne Seccionable		N° correlativo	
C		Tomacorriente		Borne con diodo			
		Fusible seccionable		Electroválvula		Resistencia	
		Fusible fijo		Switch		Tierra	
D		Selectora		Instrumento			
		Parada de Emergencia (Golpe de puño tipo Hongo)		Referencias			
E		Bobina de Motor		Cable mallado			
		Motor Bomba Hidráulica		Componente Simbolo general			

6	Update whit fixes	13/07/26	LM	MD	MPV	PROJECT: C.J. CONTROLADOR mSafe2
5	Update whit fixes	26/05/26	LM	MD	MPV	CODE: 75286-1
4	Update whit fixes	15/05/26	LM	MD	MPV	CLIENT:
3	For Manufacturing	12/03/26	LM	MD	MPV	MMA
REV	DESCRIPTION	DATE	PROJ.	DW.	APR.	




BATFER
Investment S.A.



DOC NUMBER:	75287	GRAL REV:	6
TITLE:	DIAGRAMA ELÉCTRICO mSafe2 Referencia de Símbolos	PAG:	10
		REV:	6
		CONT:	11

BATFER INVESTMENT S.A. RESERVES THE OWNERSHIP OF THIS DOCUMENT. IT IS PROHIBITED TO REPRODUCE, MODIFY OR TRANSFER WITHOUT PRIOR WRITTEN AUTHORIZATION.

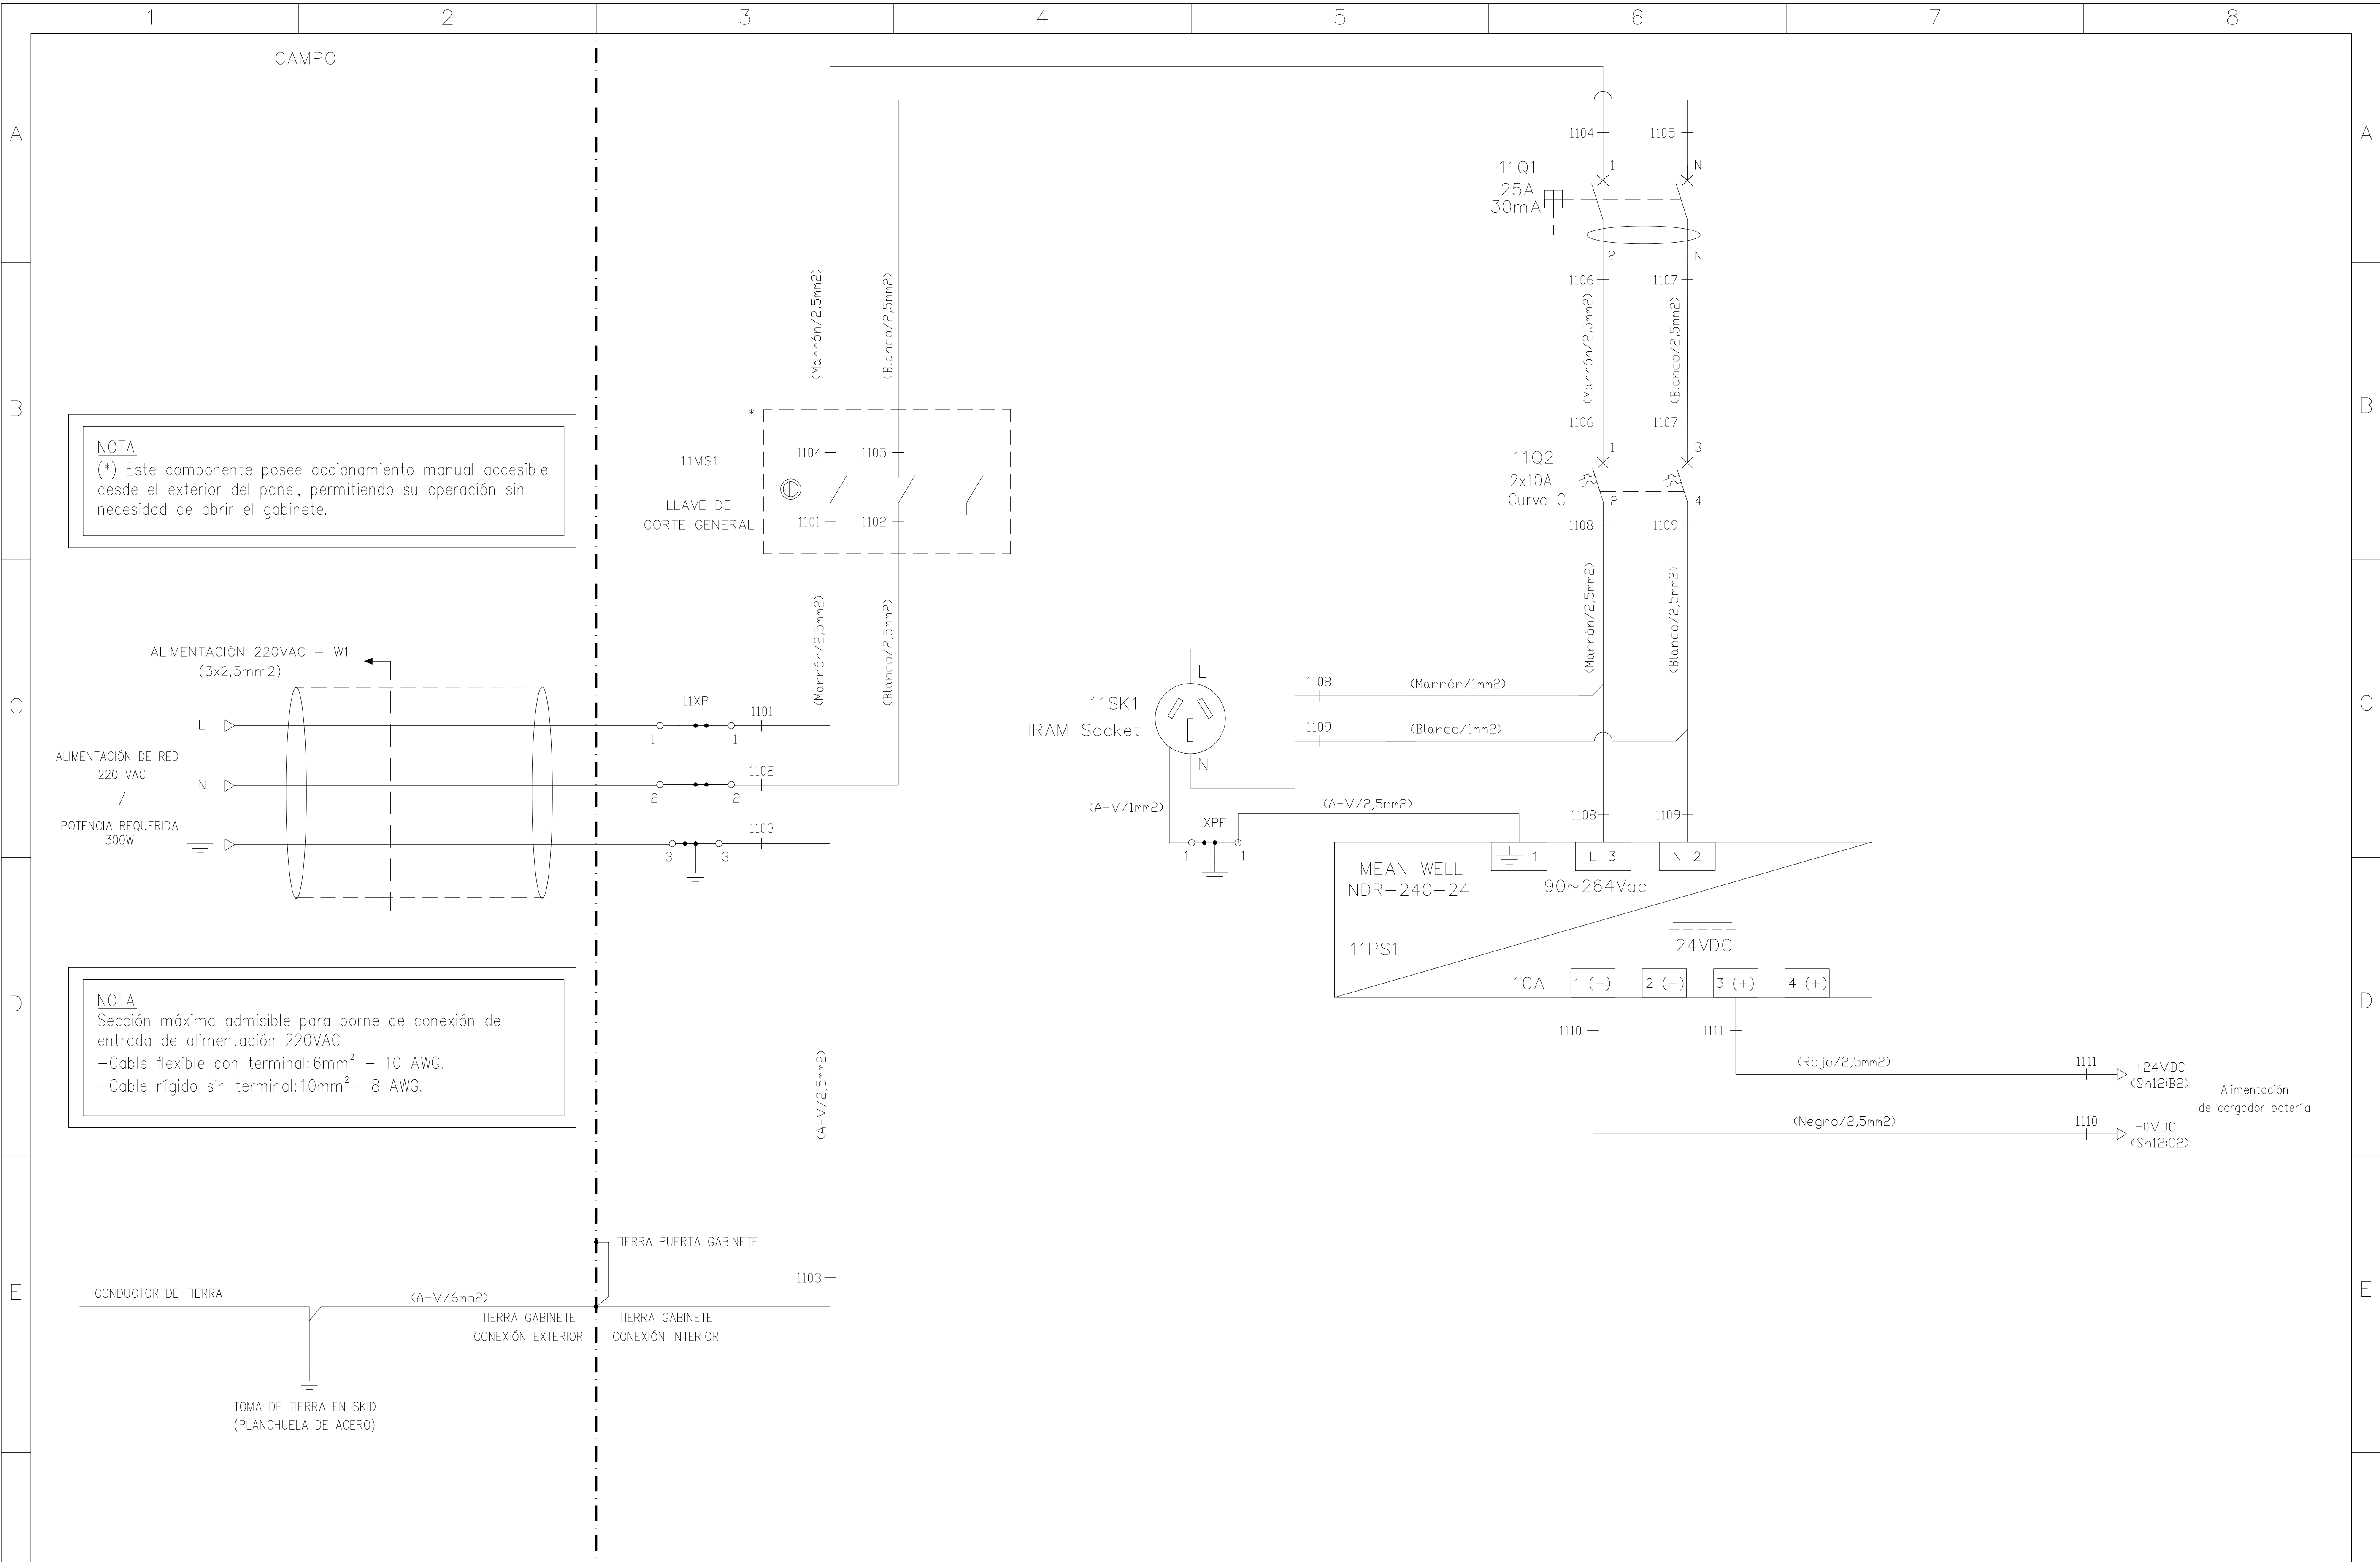

6	Update whit fixes	13/07/26	LM	MD	MPV	PROJECT: C.J. CONTROLADOR mSafe2
5	Update whit fixes	26/05/26	LM	MD	MPV	CODE: 75286-1
4	Update whit fixes	15/05/26	LM	MD	MPV	CLIENT:
3	For Manufacturing	12/03/26	LM	MD	MPV	
REV	DESCRIPTION	DATE	PROJ.	DW.	APR.	MMA



DOC NUMBER: 75287

TITLE: DIAGRAMA ELÉCTRICO mSafe2
Alimentación y distribución 220 VAC.

GRAL REV: 6


PAG: 11


REV: 6



CONT: 12


BATFER INVESTMENT S.A. RESERVES THE OWNERSHIP OF THIS DOCUMENT. IT IS PROHIBITED TO REPRODUCE, MODIFY OR TRANSFER WITHOUT PRIOR WRITTEN AUTHORIZATION.


NOTE: cables not indicated will be black 0.75mm²/18 AWG

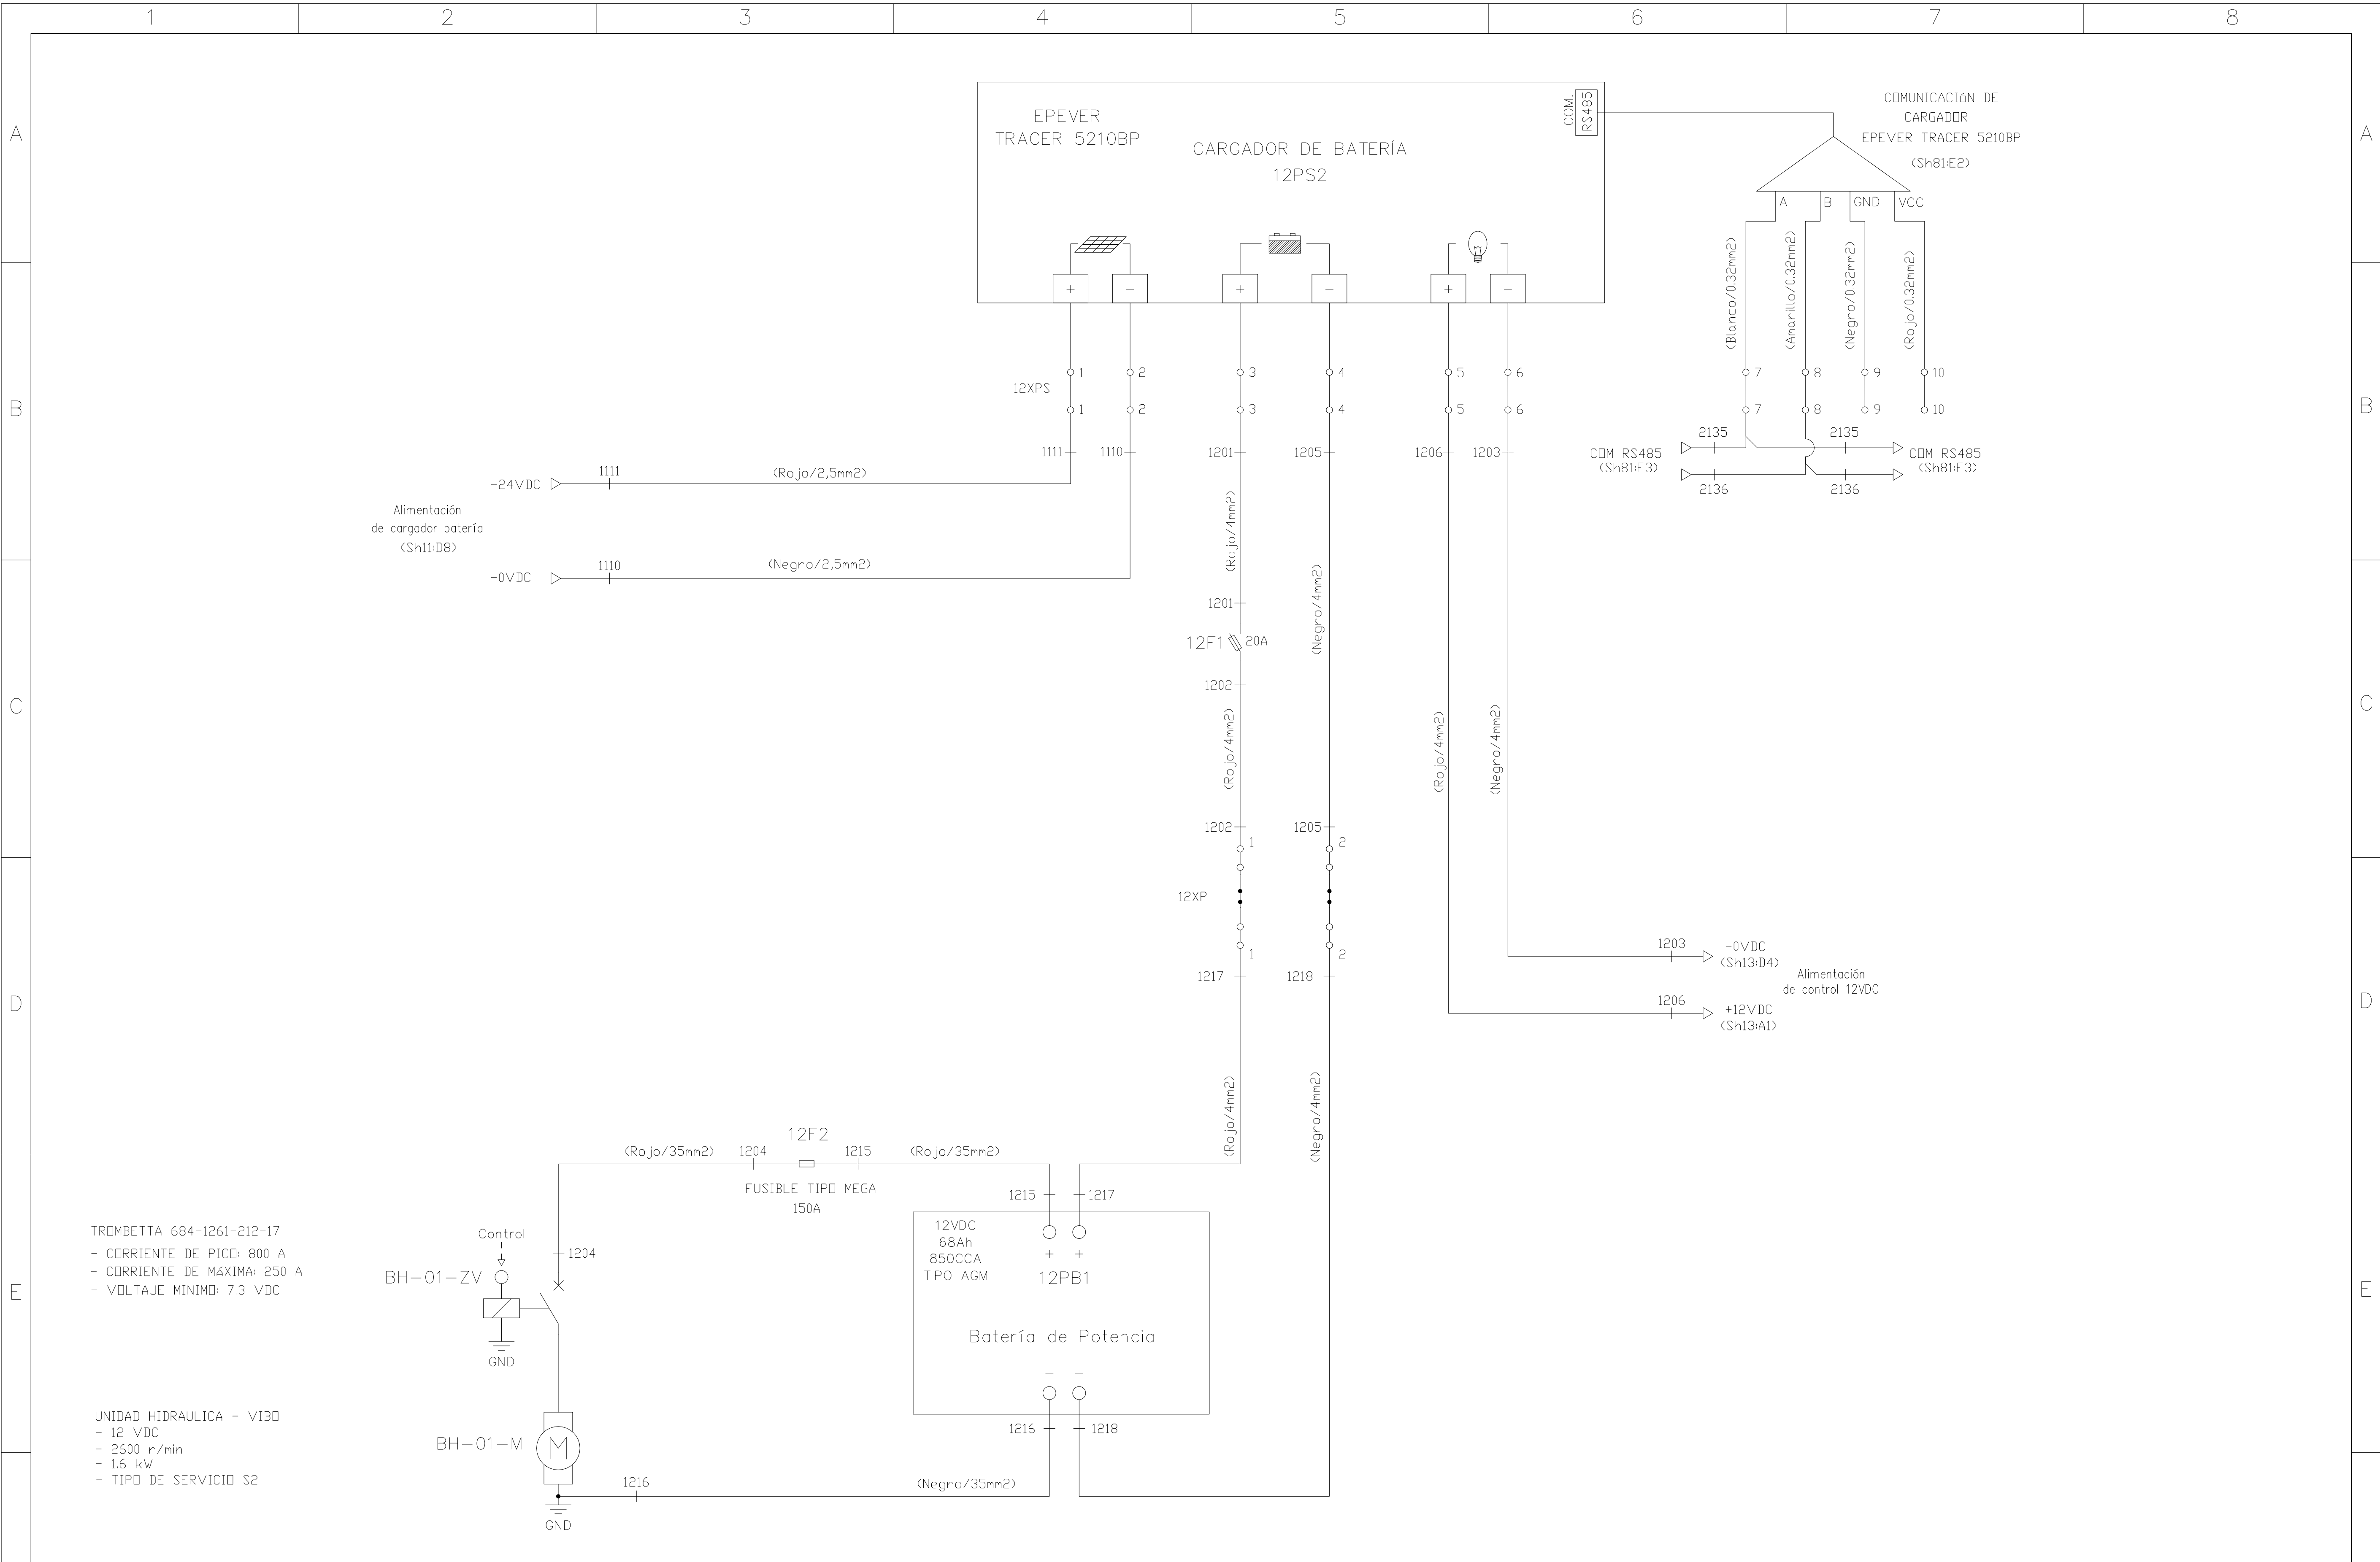

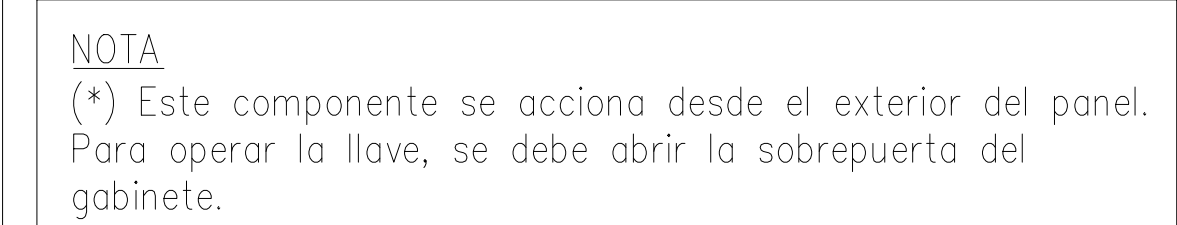

6	Update whit fixes	13/07/26	LM	MD	MPV	PROJECT: Cj. CONTROLADOR mSafe2	BATFER Investment S.A. DIGITO	DOC NUMBER: 75287		GRAL REV: 6	
5	Update whit fixes	26/05/26	LM	MD	MPV	CODE: 75286-1		TITLE: DIAGRAMA ELÉCTRICO mSafe2 Distribución de voltaje de control. -	PAG:	REV:	
4	Update whit fixes	15/05/26	LM	MD	MPV	CLIENT: MMA			13	6	
3	For Manufacturing	12/03/26	LM	MD	MPV				CONT:	14	
REV	DESCRIPTION	DATE	PROJ.	DW.	APR.						

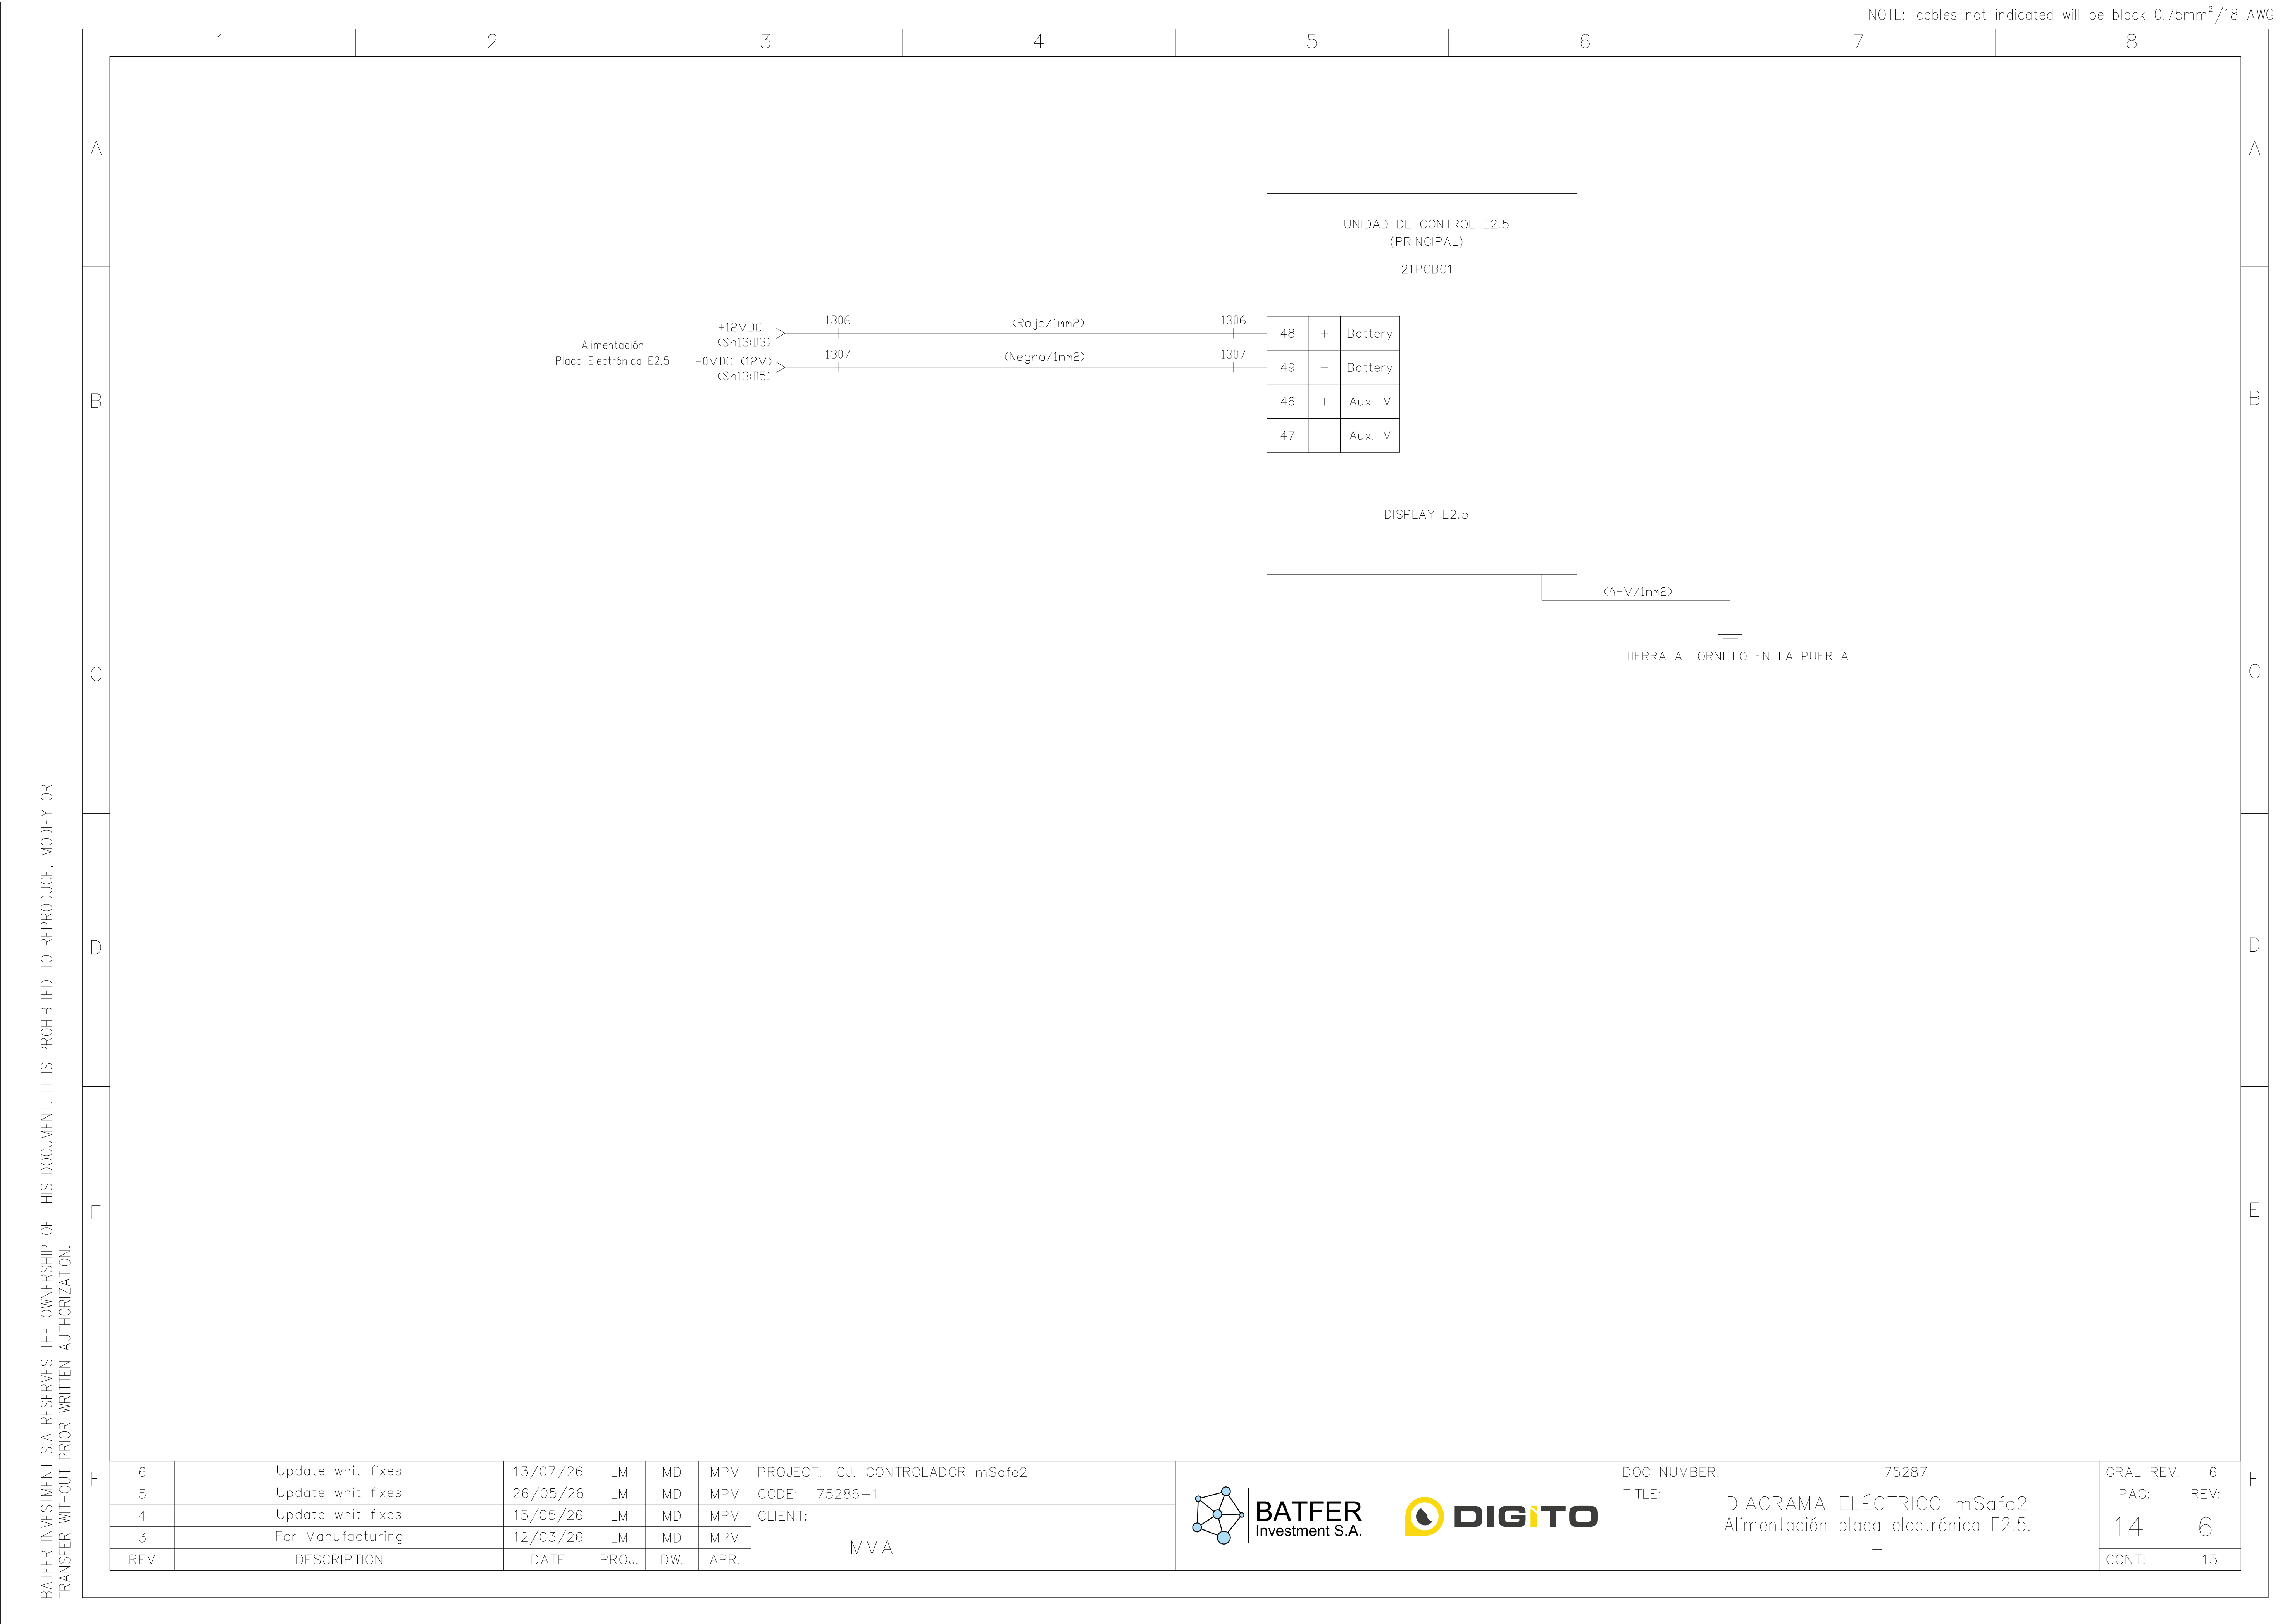

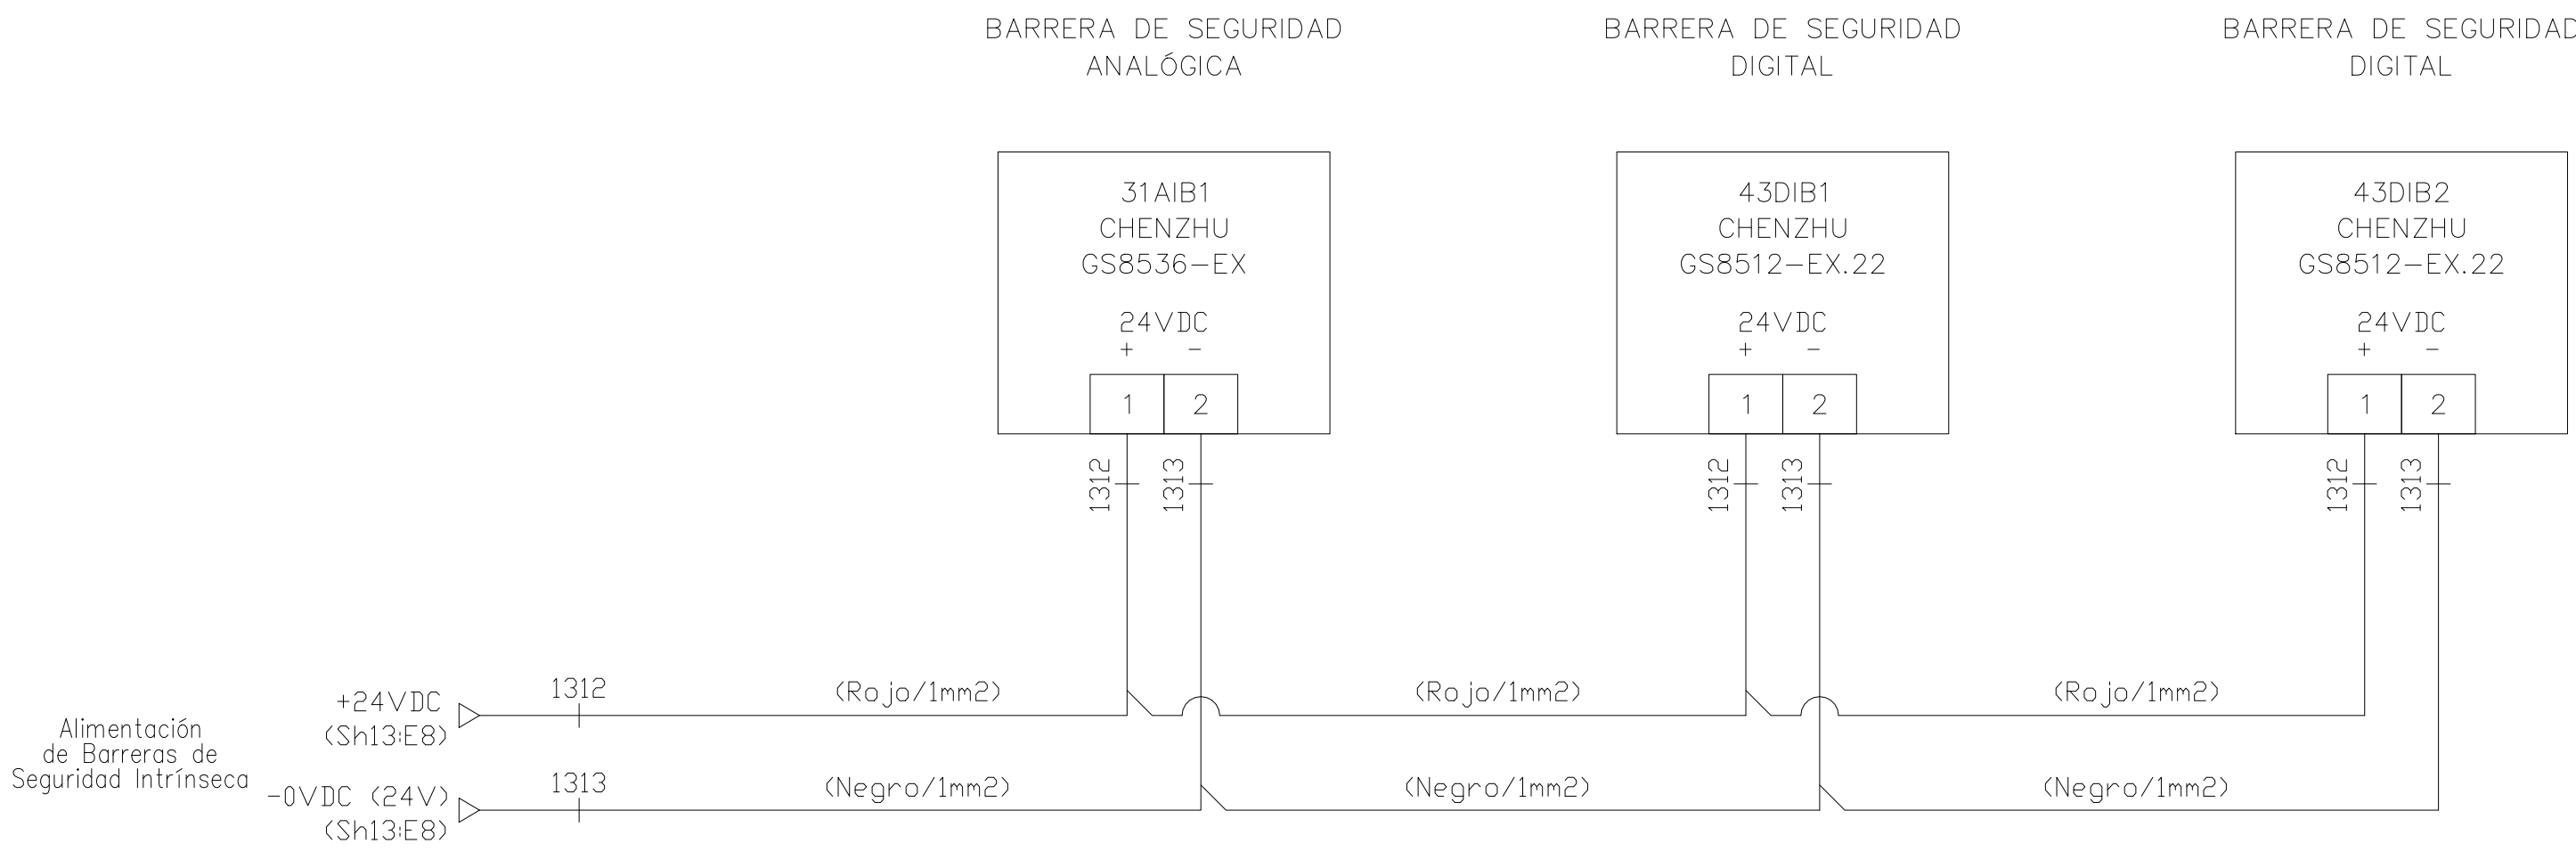

BATFER INVESTMENT S.A. RESERVES THE OWNERSHIP OF THIS DOCUMENT. IT IS PROHIBITED TO REPRODUCE, MODIFY OR TRANSFER WITHOUT PRIOR WRITTEN AUTHORIZATION.

6	Update whit fixes	13/07/26	LM	MD	MPV	PROJECT: C.J. CONTROLADOR mSafe2
5	Update whit fixes	26/05/26	LM	MD	MPV	CODE: 75286-1
4	Update whit fixes	15/05/26	LM	MD	MPV	CLIENT: MMA
3	For Manufacturing	12/03/26	LM	MD	MPV	
REV	DESCRIPTION	DATE	PROJ.	DW.	APR.	



DOC NUMBER: 75287

TITLE: DIAGRAMA ELÉCTRICO mSafe2
Alimentación de barreras de seguridad intrínseca.

GRAL REV: 6

PAG: 15



REV: 6

CONT: 21




BATFER INVESTMENT S.A. RESERVES THE OWNERSHIP OF THIS DOCUMENT. IT IS PROHIBITED TO REPRODUCE, MODIFY OR TRANSFER WITHOUT PRIOR WRITTEN AUTHORIZATION.

NOTE: cables not indicated will be black 0.75mm²/18 AWG

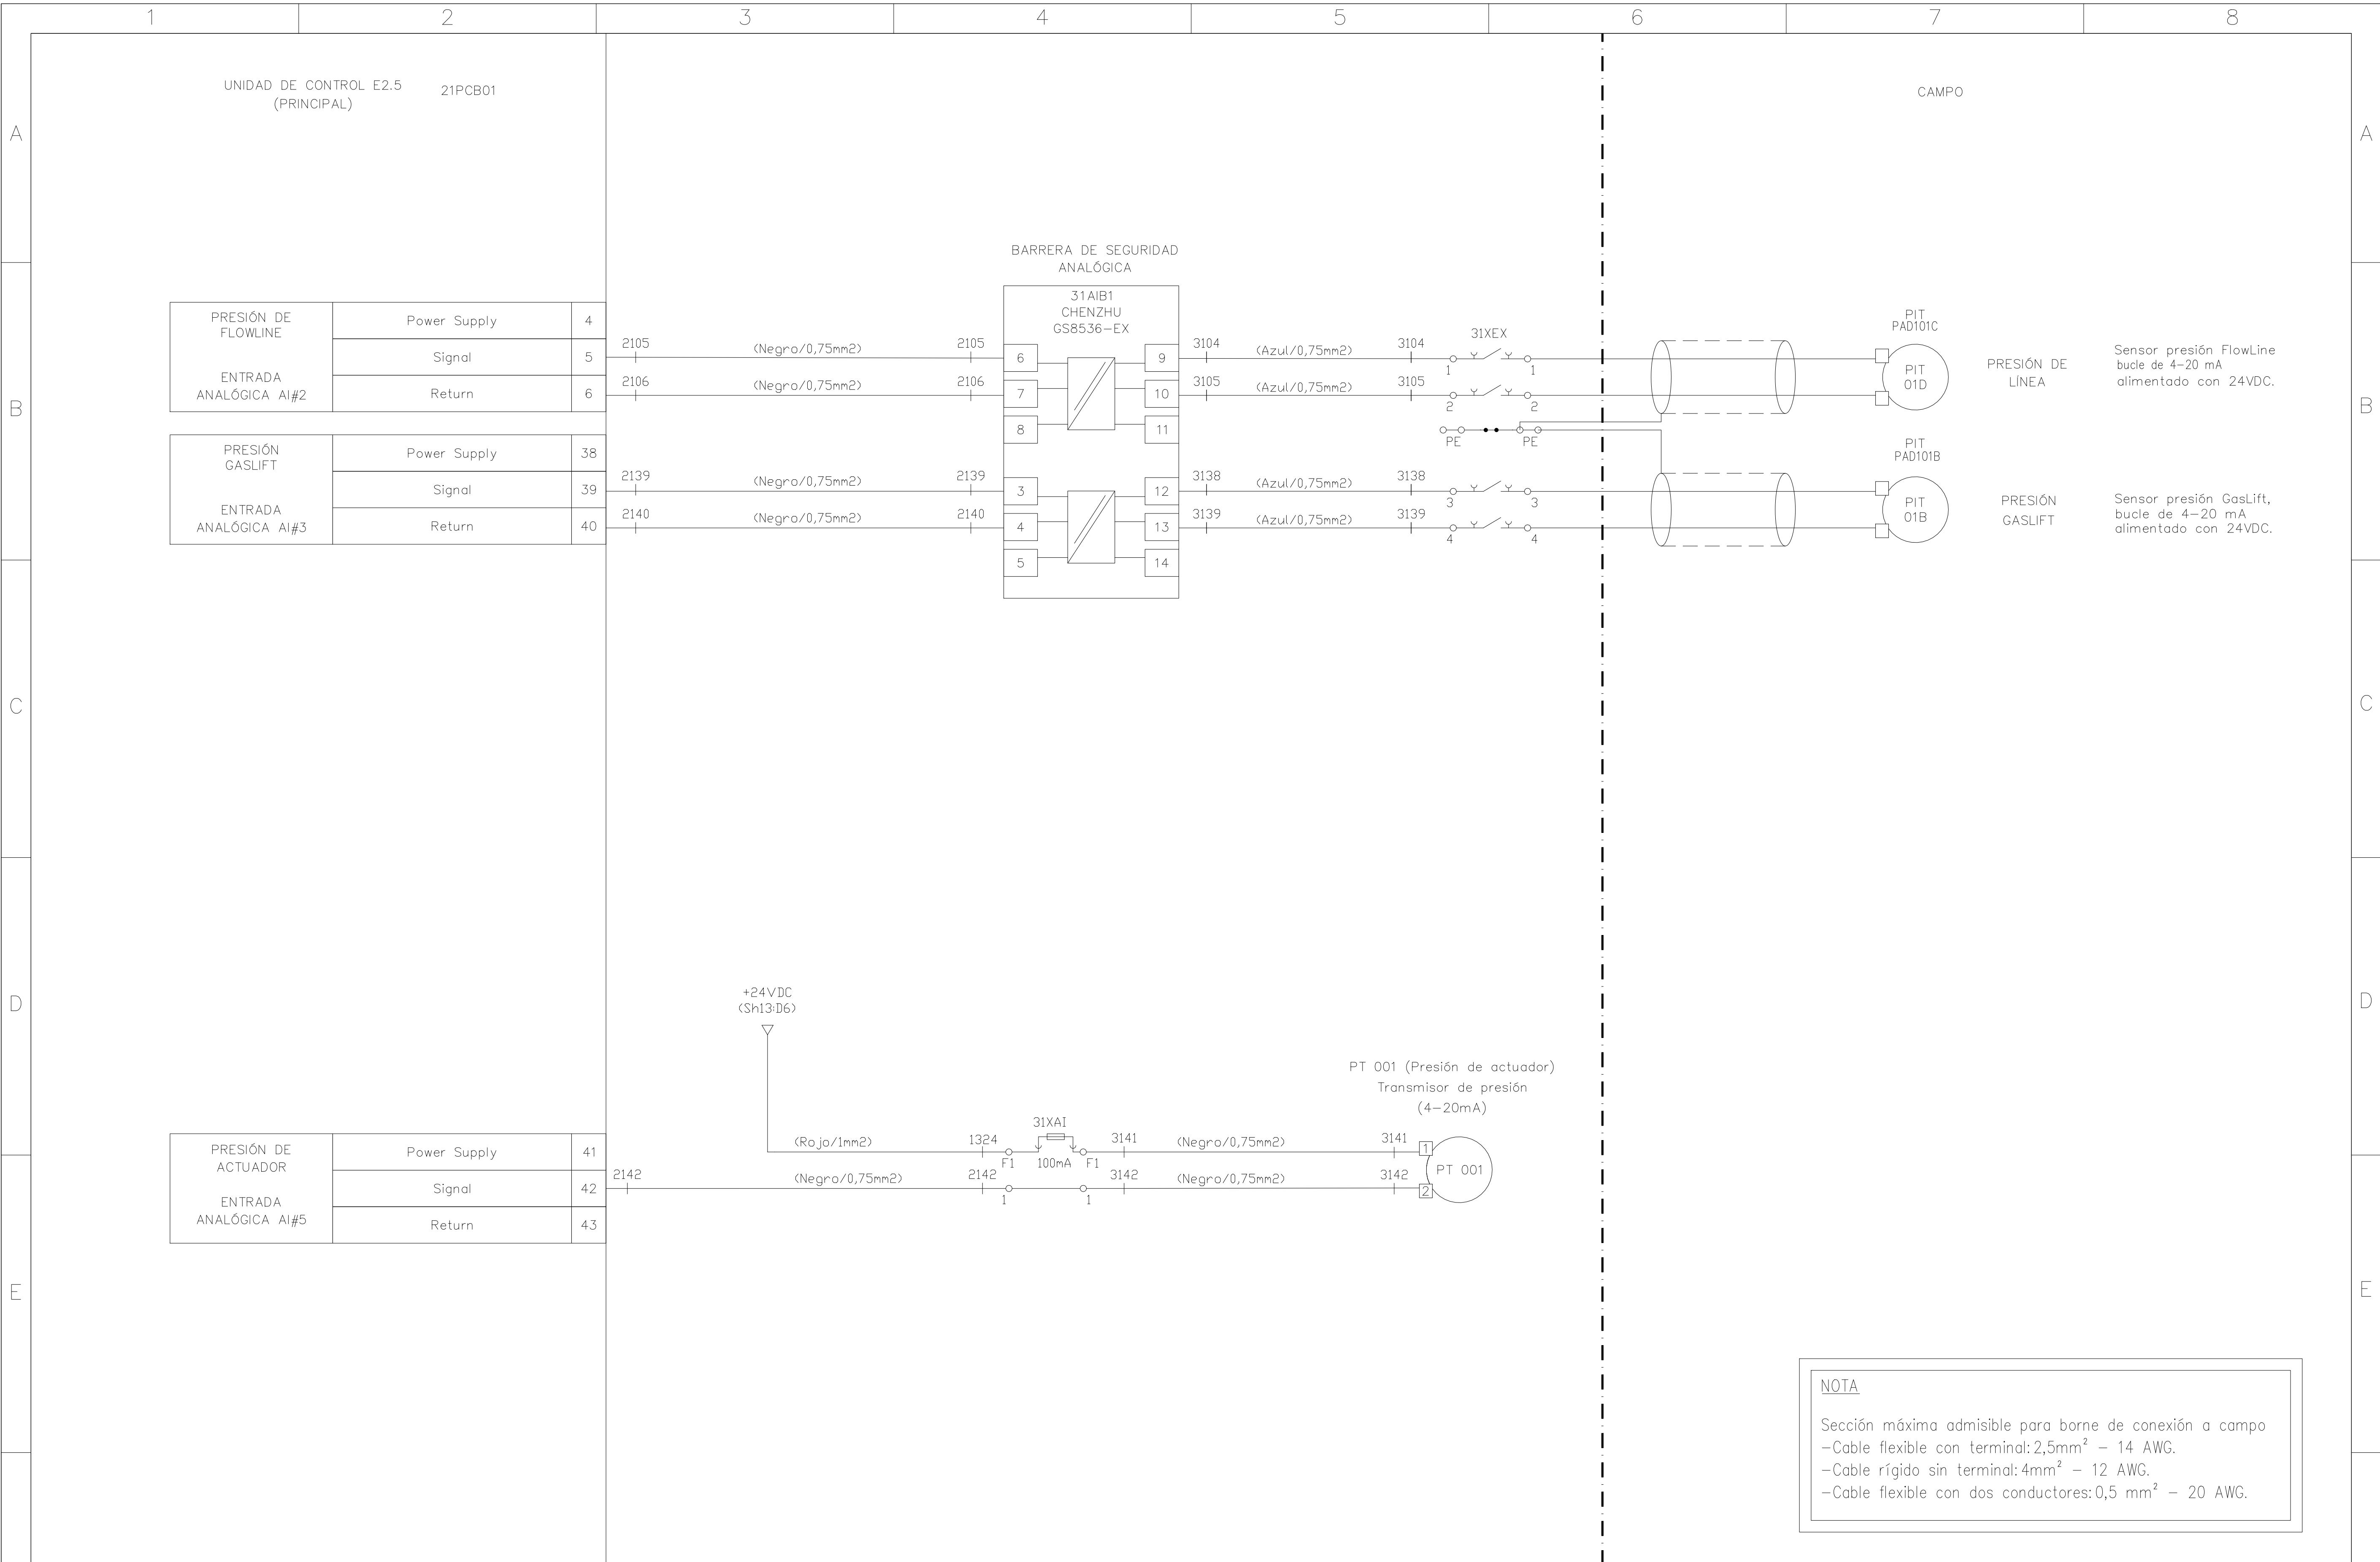


BATFER
Investment S.A.



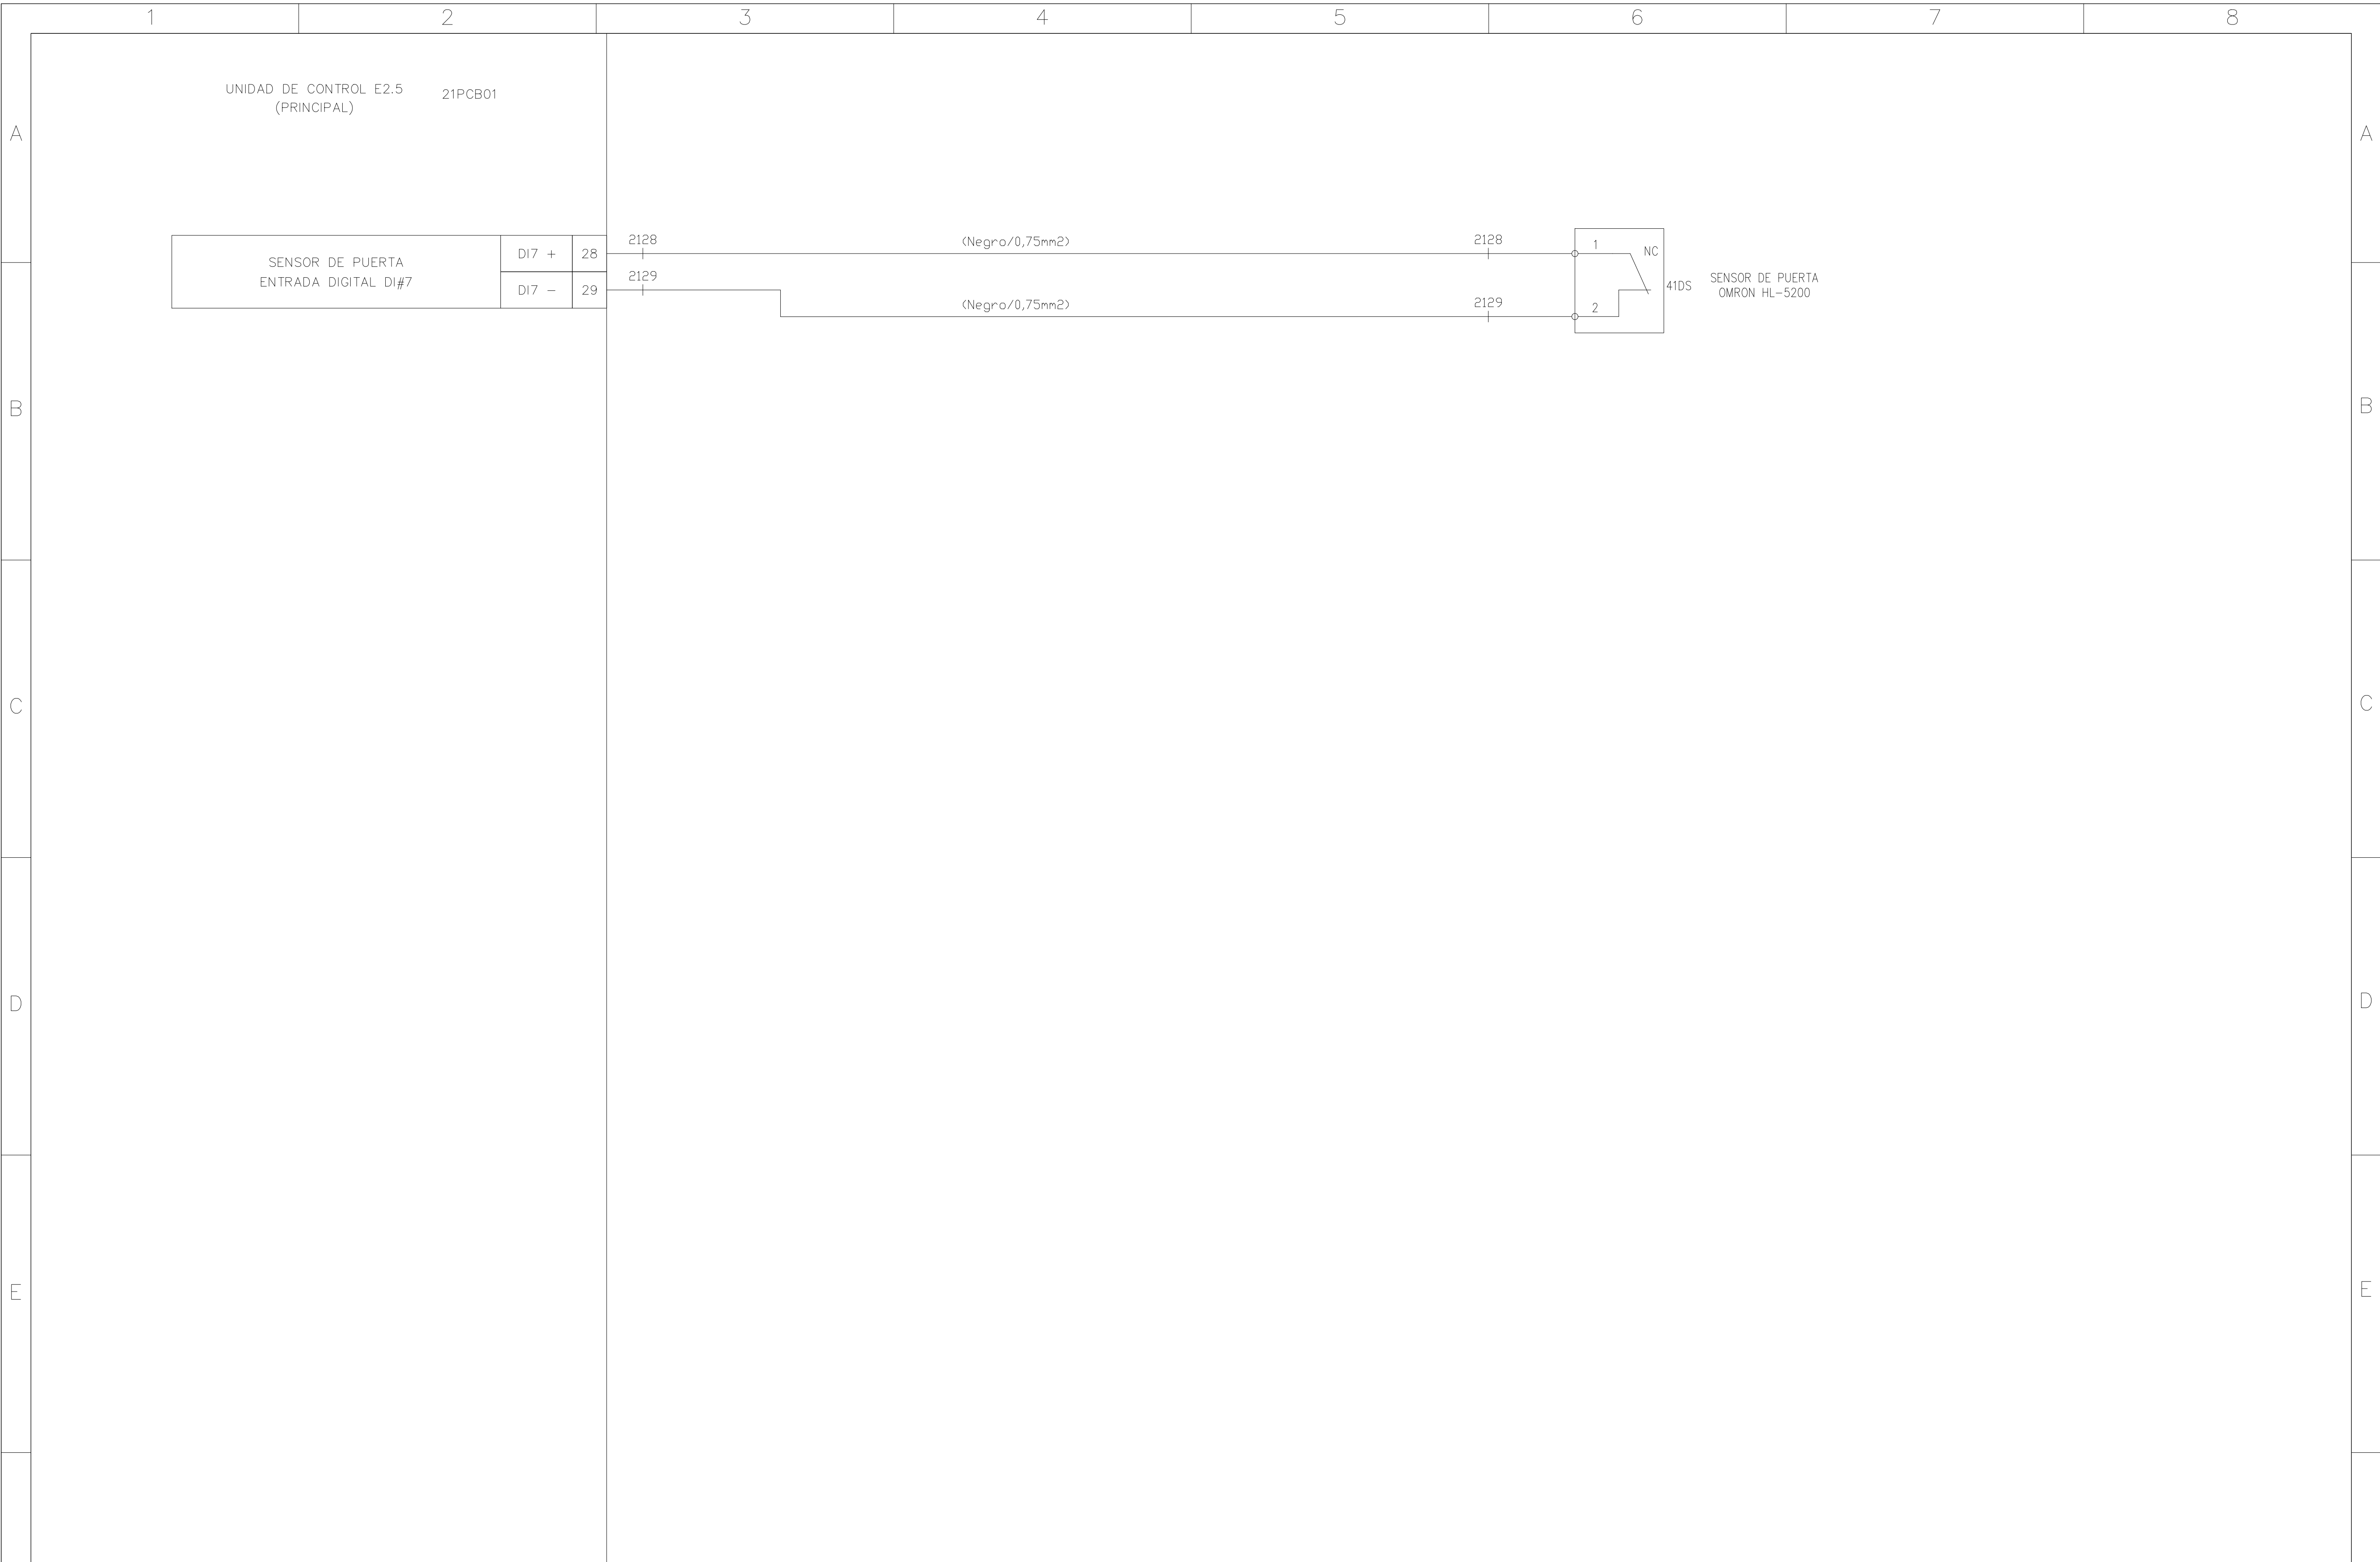

6	Update whit fixes	13/07/26	LM	MD	MPV
5	Update whit fixes	26/05/26	LM	MD	MPV
4	Update whit fixes	15/05/26	LM	MD	MPV
3	For Manufacturing	12/03/26	LM	MD	MPV
REV	DESCRIPTION	DATE	PROJ.	DW.	APR.

PROJECT: C.J. CONTROLADOR mSafe2
CODE: 75286-1
CLIENT: MMA



BATFER
Investment S.A.



DOC NUMBER:	75287	GRAL REV:	6
TITLE:	DIAGRAMA ELÉCTRICO mSafe2 Entradas digitales internas Placa electrónica E2.5.	PAG:	41
		REV:	6
		CONT:	43

NOTE: cables not indicated will be black 0.75mm²/18 AWG

UNIDAD DE CONTROL E2.5
(PRINCIPAL) 21PCB01





FLOWLINE
VÁLVULA 1 CERRADA
ENTRADA DIGITAL DI#2

FLOWLINE
VÁLVULA 1 ABIERTA
ENTRADA DIGITAL DI#1

GASLIFT
VALVULA 2 CERRADA
ENTRADA DIGITAL DI#4

GASLIFT
VALVULA 2 ABIERTA
ENTRADA DIGITAL DI#3

BARRERA DE SEGURIDAD
DIGITAL

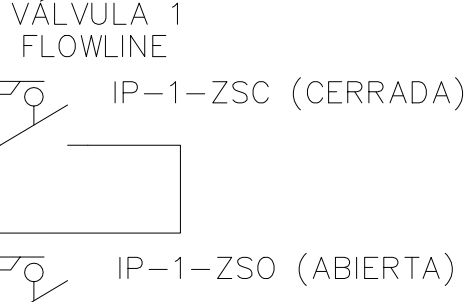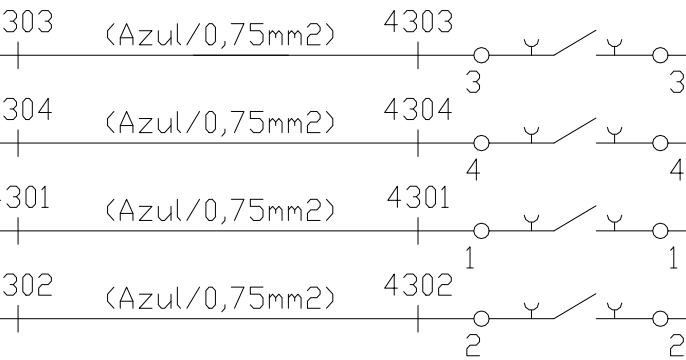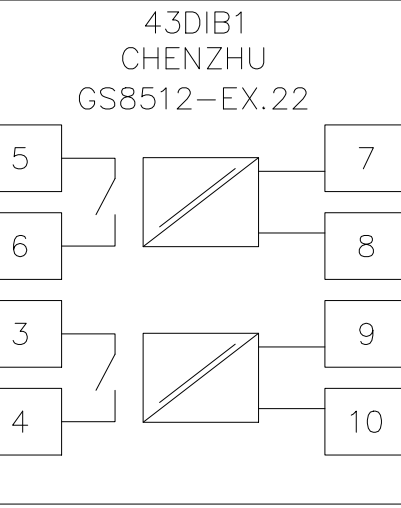

Sensor de posición cerrada válvula 1
Interruptor tipo Reed Switch (NA),
protegido con seguridad intrínseca "Ex ia".
Señal alimentada con 24VDC.





Sensor de posición abierta válvula 1
Interruptor tipo Reed Switch (NA),
protegido con seguridad intrínseca "Ex ia".
Señal alimentada con 24VDC.

Feedback de posición válvula abierta
Contacto seco NA
FLOWLINE

NOTA

- Sección máxima admisible para borne de conexión a campo
- Cable flexible con terminal: 2,5mm² - 14 AWG.
 - Cable rígido sin terminal: 4mm² - 12 AWG.
 - Cable flexible con dos conductores: 0,5 mm² - 20 AWG.

BARRERA DE SEGURIDAD
DIGITAL

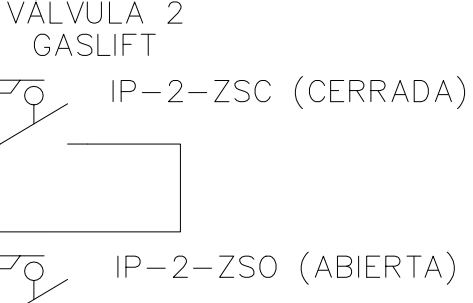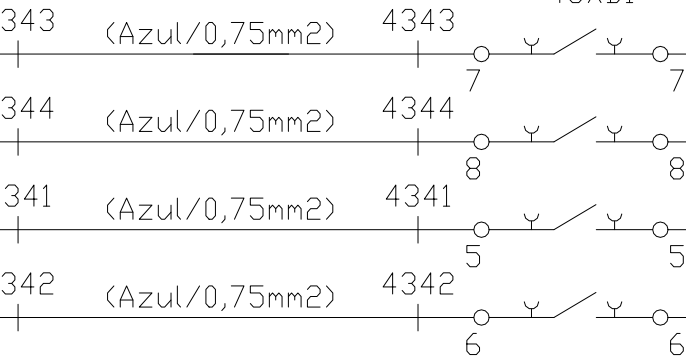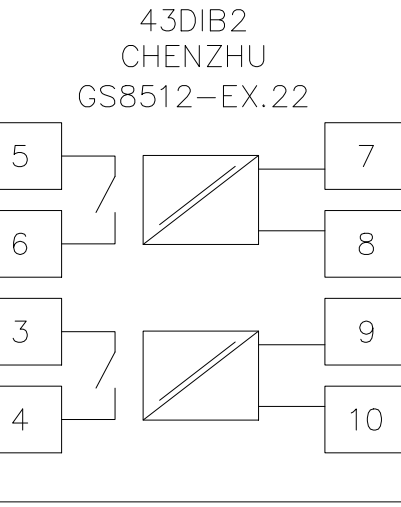


Sensor de posición cerrada válvula 2
Interruptor tipo Reed Switch (NA),
protegido con seguridad intrínseca "Ex ia".
Señal alimentada con 24VDC.

Sensor de posición abierta válvula 2
Interruptor tipo Reed Switch (NA),
protegido con seguridad intrínseca "Ex ia".
Señal alimentada con 24VDC.

Feedback de posición válvula abierta
Contacto seco NA
GASLIFT

BATFER INVESTMENT S.A. RESERVES THE OWNERSHIP OF THIS DOCUMENT. IT IS PROHIBITED TO REPRODUCE, MODIFY OR TRANSFER WITHOUT PRIOR WRITTEN AUTHORIZATION.

6	Update whit fixes	13/07/26	LM	MD	MPV	PROJECT: C.J. CONTROLADOR mSafe2
5	Update whit fixes	26/05/26	LM	MD	MPV	CODE: 75286-1
4	Update whit fixes	15/05/26	LM	MD	MPV	CLIENT:
3	For Manufacturing	12/03/26	LM	MD	MPV	MMA
REV	DESCRIPTION	DATE	PROJ.	DW.	APR.	




BATFER
Investment S.A.




DOC NUMBER:	75287	GRAL REV:	6
TITLE:	DIAGRAMA ELÉCTRICO mSafe2 Entradas digitales externas.	PAG:	43
		REV:	6
		CONT:	46

BATFER INVESTMENT S.A. RESERVES THE OWNERSHIP OF THIS DOCUMENT. IT IS PROHIBITED TO REPRODUCE, MODIFY OR TRANSFER WITHOUT PRIOR WRITTEN AUTHORIZATION.

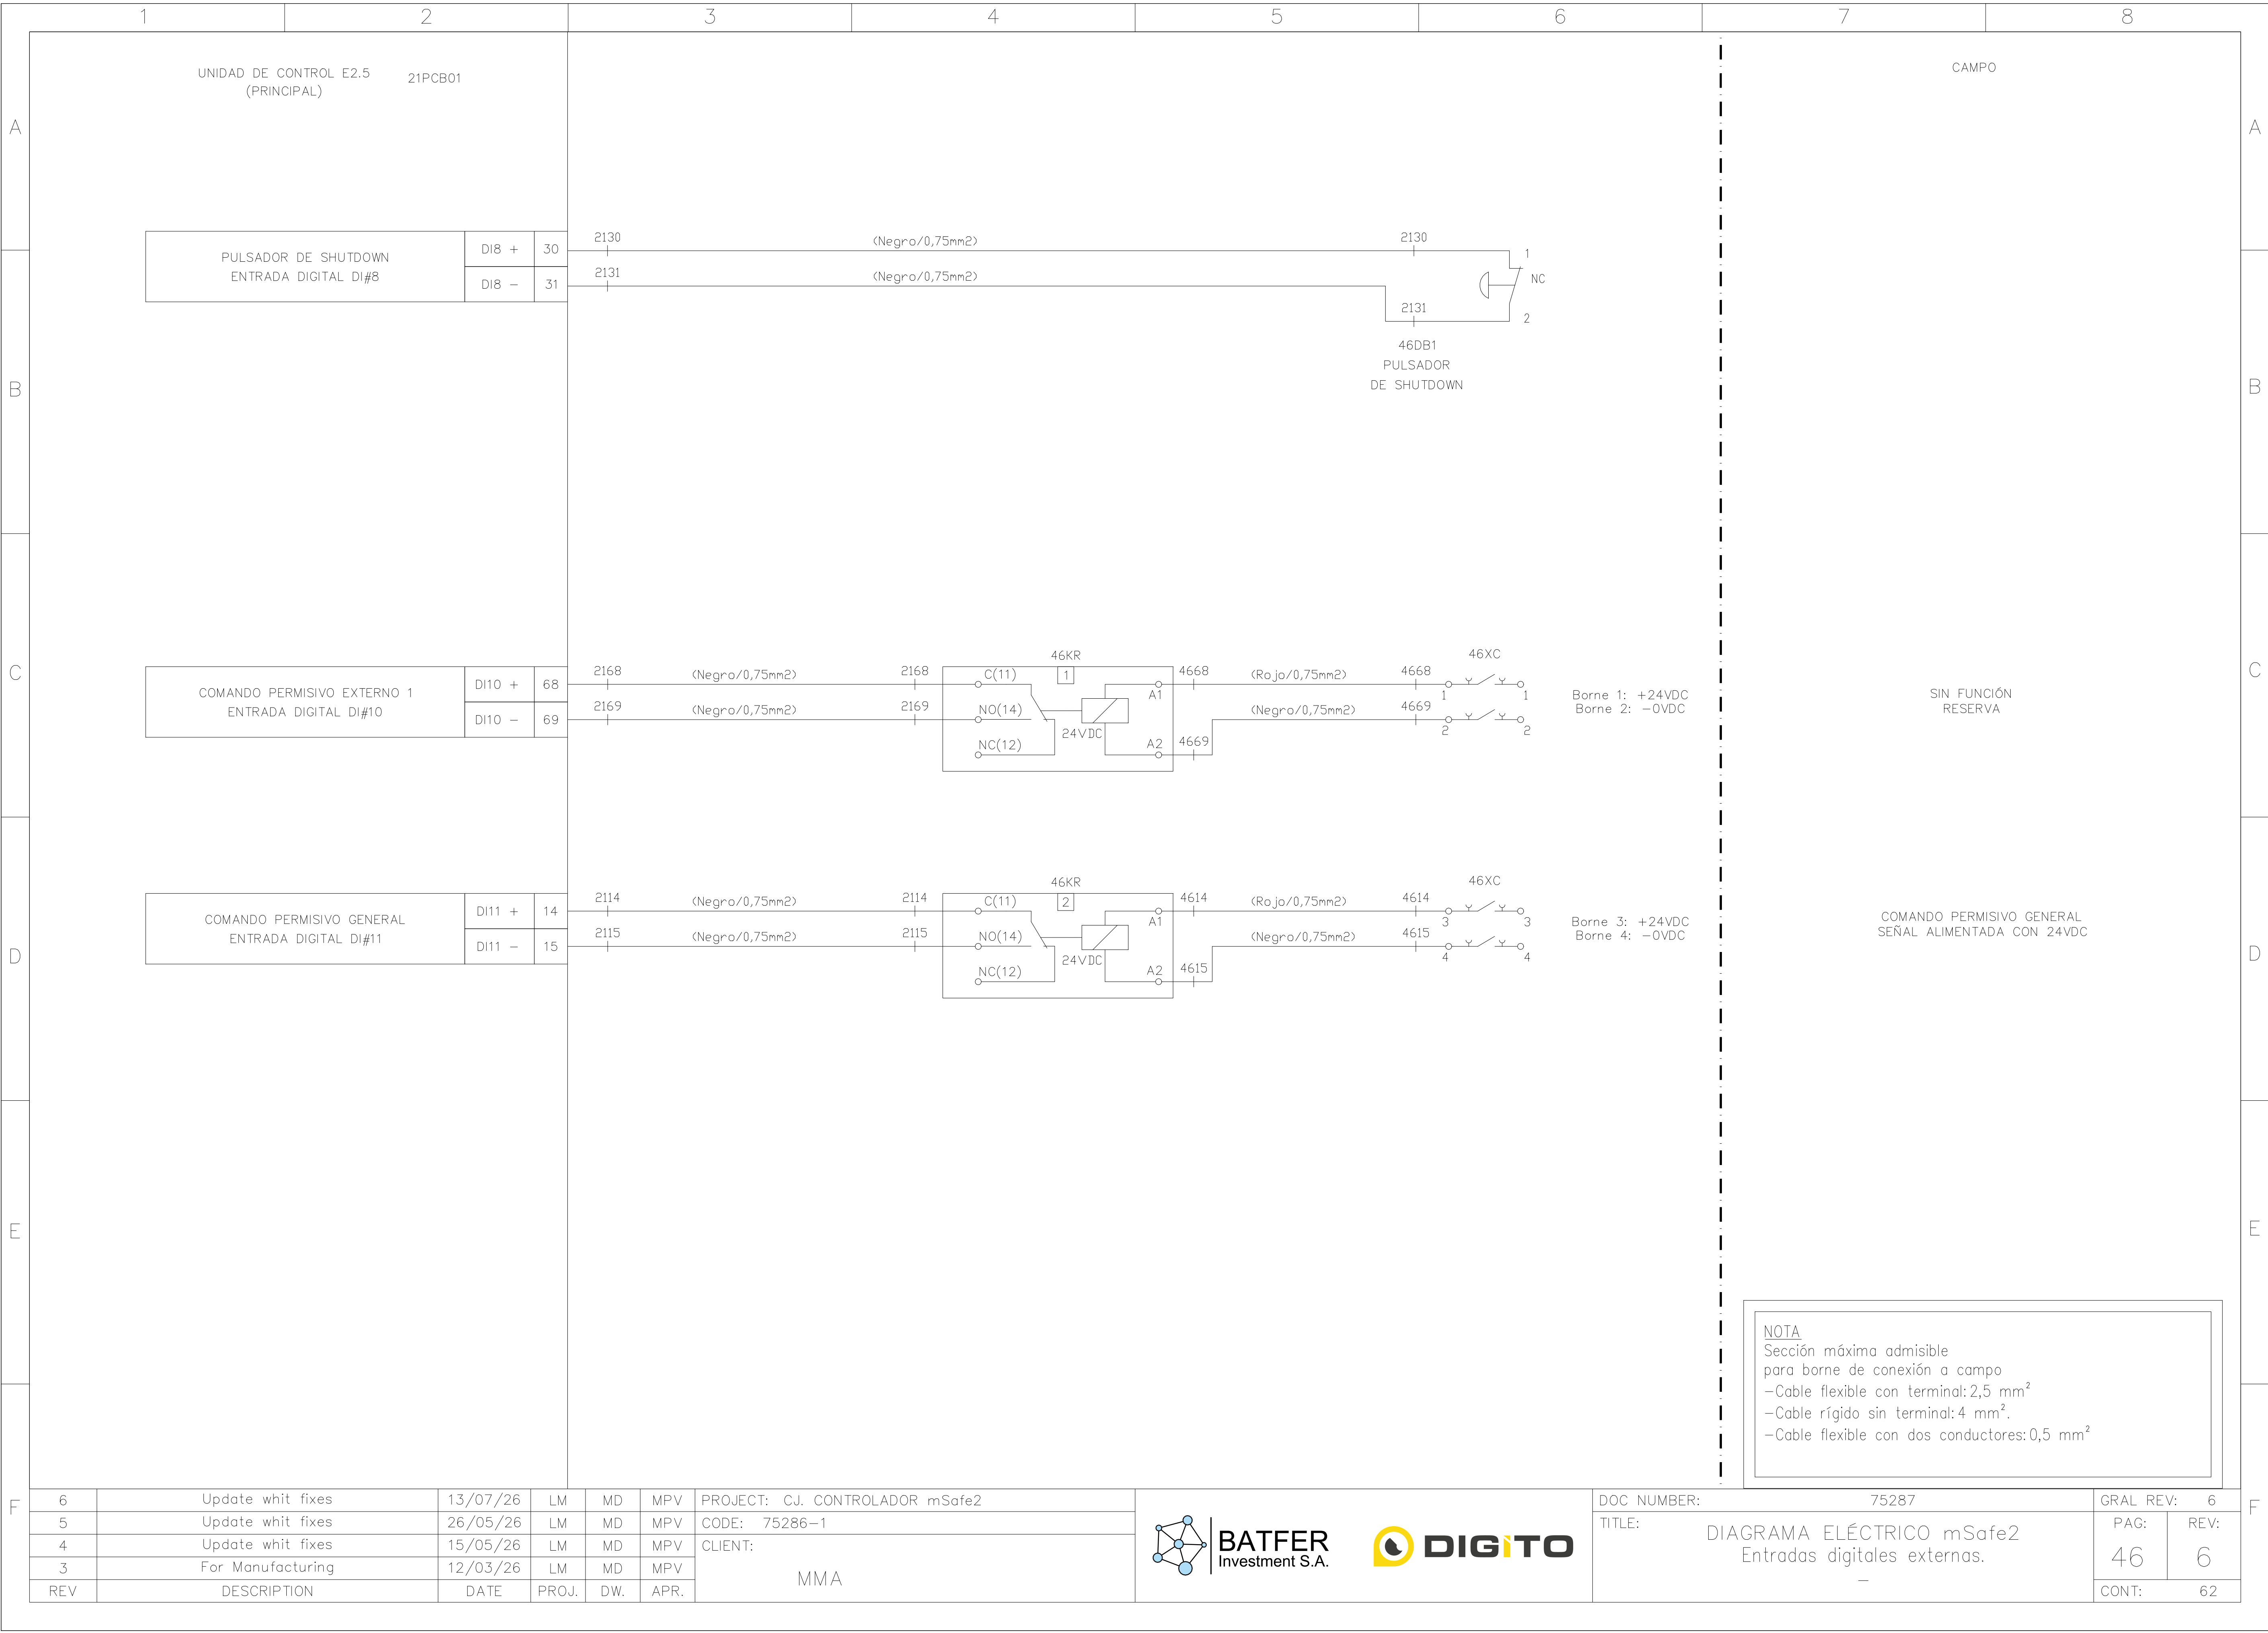

NOTE: cables not indicated will be black 0.75mm²/18 AWG

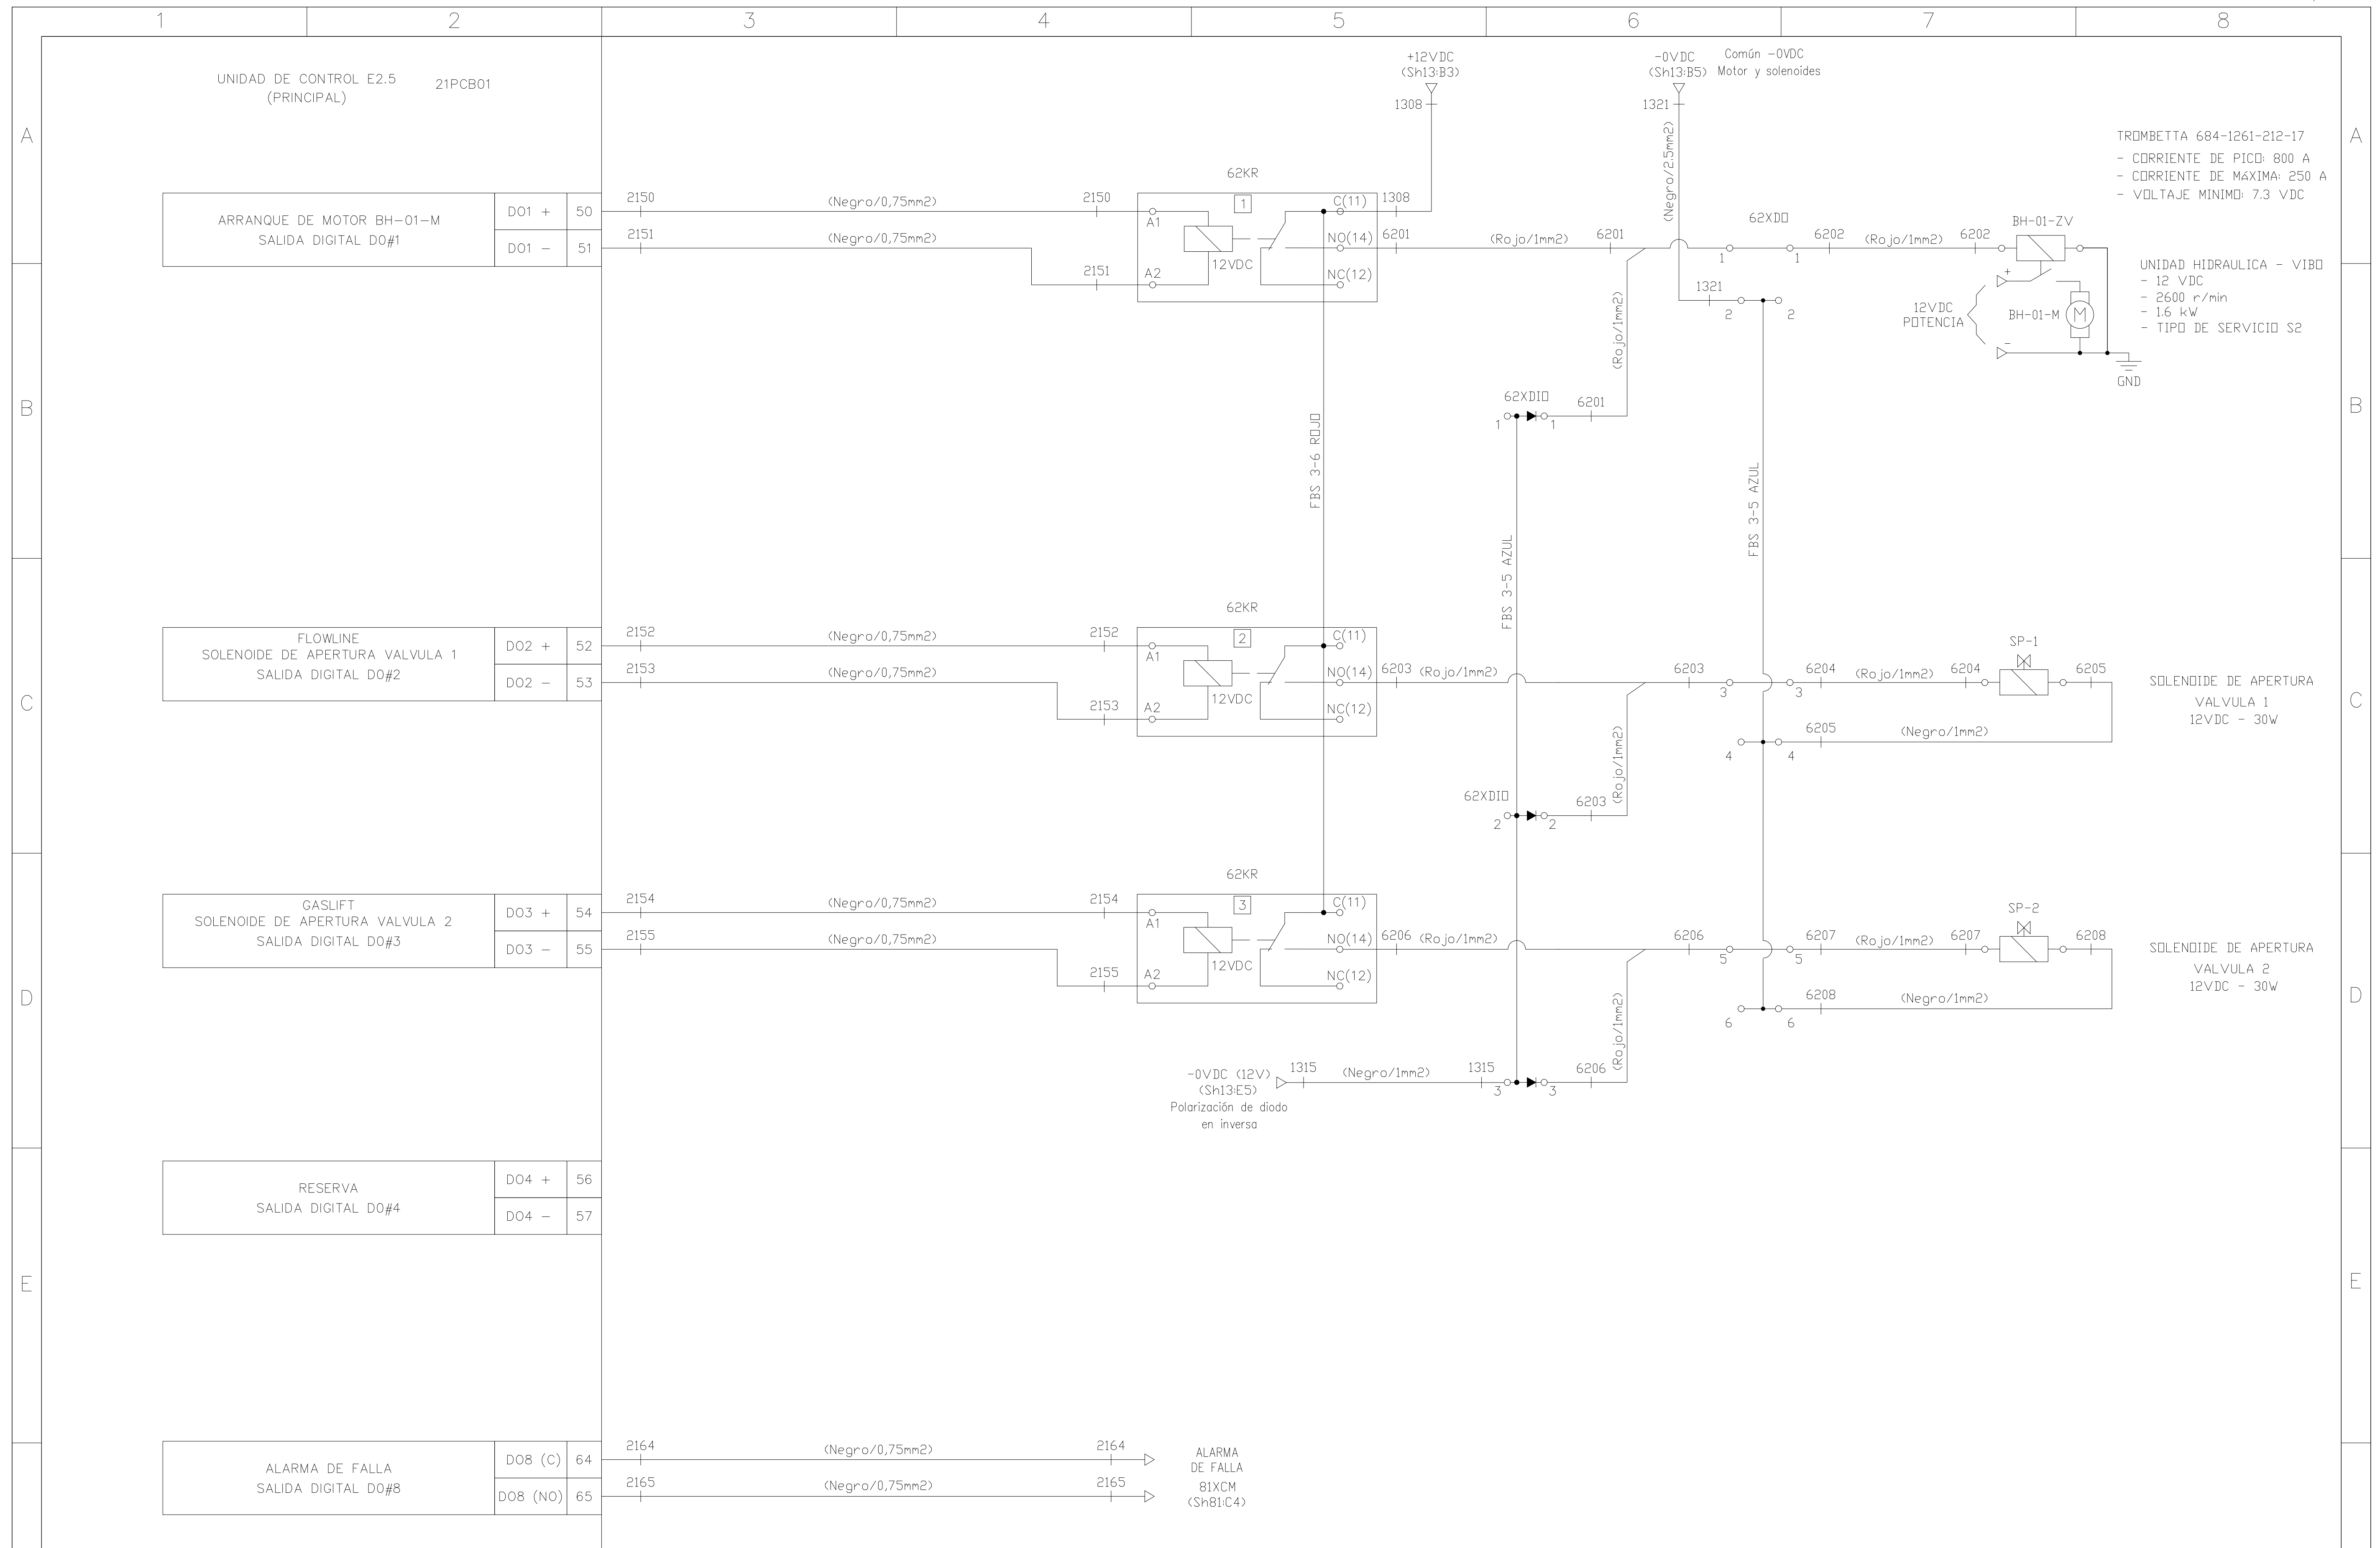

6	Update whit fixes	13/07/26	LM	MD	MPV	PROJECT: CJ. CONTROLADOR mSafe2	 	DOC NUMBER: 75287		GRAL REV: 6	
5	Update whit fixes	26/05/26	LM	MD	MPV	CODE: 75286-1		TITLE: DIAGRAMA ELÉCTRICO mSafe2 Salidas digitales internas. -	PAG:	REV:	
4	Update whit fixes	15/05/26	LM	MD	MPV	CLIENT: MMA			62	6	
3	For Manufacturing	12/03/26	LM	MD	MPV				CONT:	81	
REV	DESCRIPTION	DATE	PROJ.	DW.	APR.						

BATTER INVESTMENT S.A. RESERVES THE OWNERSHIP OF THIS DOCUMENT. IT IS PROHIBITED TO REPRODUCE, MODIFY OR TRANSFER WITHOUT PRIOR WRITTEN AUTHORIZATION.

NOTA

1) El switch SW9 en la placa electronica E2.5 habilita o deshabilita la resistencia de terminación de 120Ω en la linea RS-485 del PORT #2.

-> SW9 ON: Resistencia de terminación activada (120Ω entre A y B)


-> SW9 1: Resistencia de terminación desactivada.

NOTA


Los cables de comunicación RS 485 son marca Marlew, de 1x2x22 AWG (0,32 mm²)
En los terminales de conexión de cada equipo se admite una distancia máxima de 25mm del par desenrollado y sin malla

UNIDAD DE CONTROL E2.5
(PRINCIPAL)

21PCB01

SW9 ON  1

Communication Port #2	Communication Port #1	
	RS485 A	RS485 B
RS485 A	32	33
RS485 B	33	34
Return	34	35
RS485 A	35	36
RS485 B	36	37
Return	37	

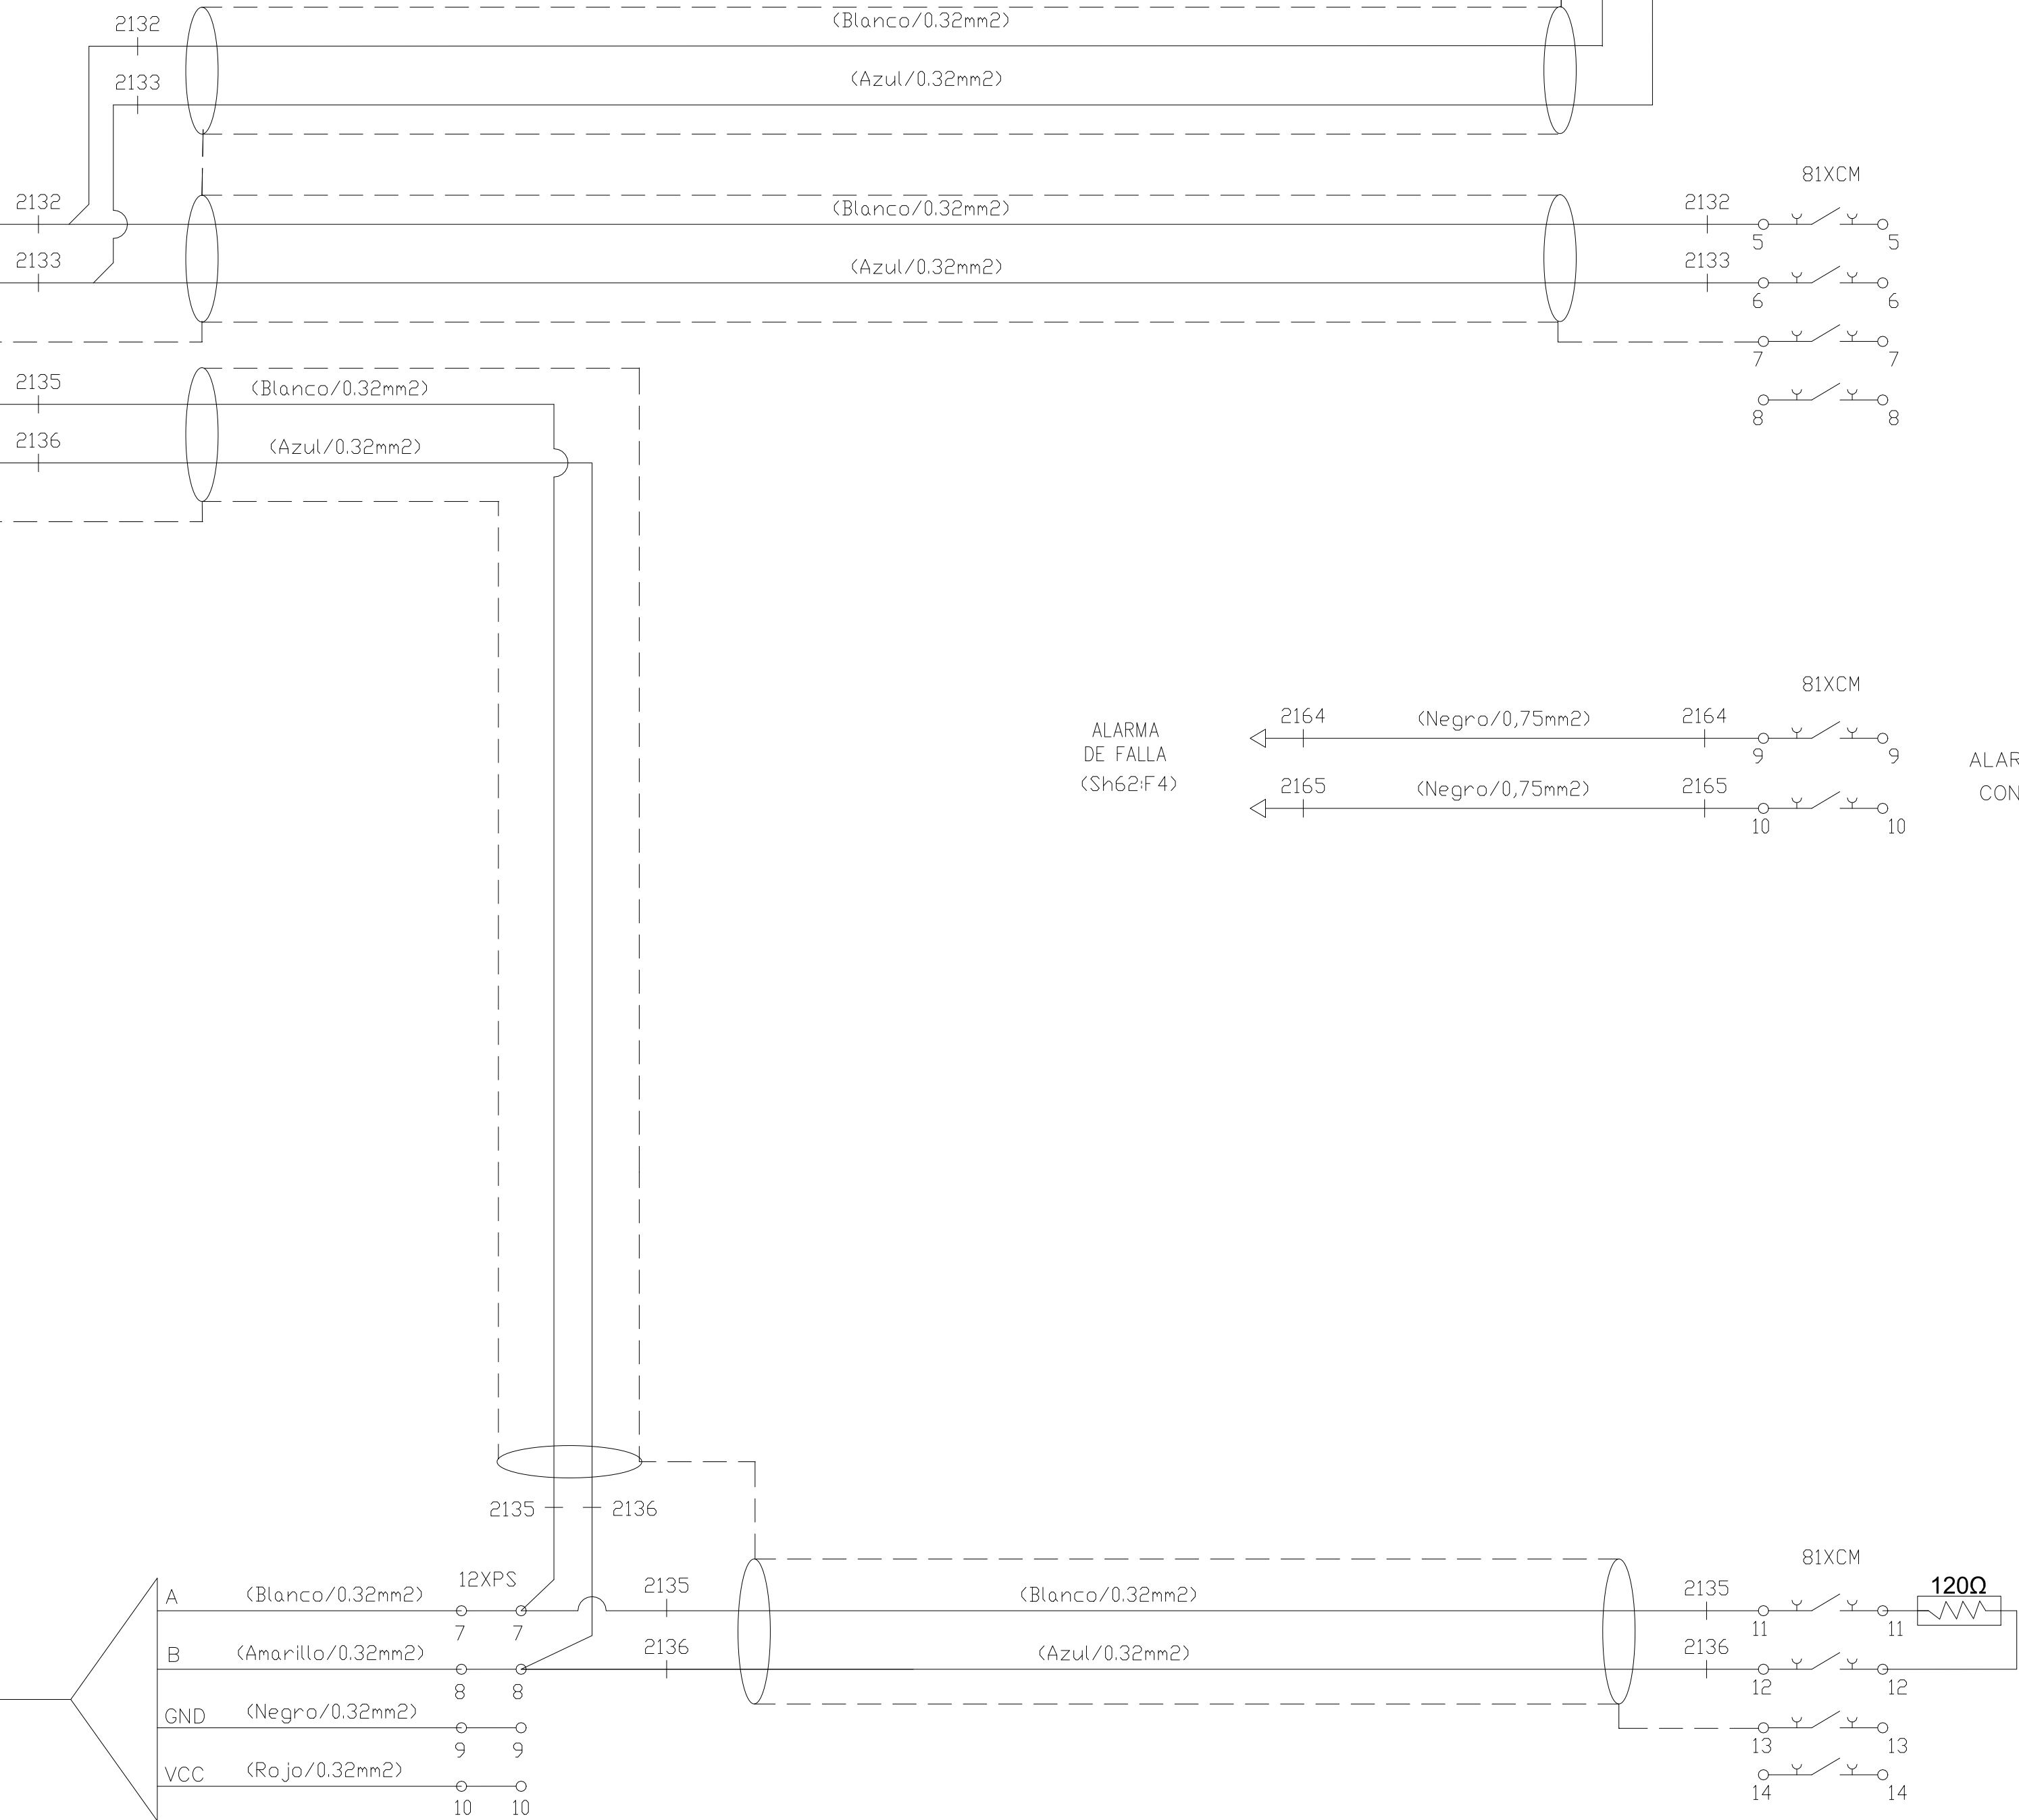

NOTA

Sección máxima admisible para borne de conexión a campo
-Cable flexible con terminal:2,5mm² - 14 AWG.
-Cable rígido sin terminal:4mm² - 12 AWG.
-Cable flexible con dos conductores:0,5 mm² - 20 AWG.

CAMPO

COMUNICACIÓN PARALELO
RS-485 (SCADA)
SALIDA

COMUNICACIÓN PARALELO
RS-485 (SCADA)
ENTRADA

SIN FUNCIÓN
RESERVA


ALARMA
DE FALLA
(Sh62F4)

ALARMA DE FALLA
CONTACTO SECO

CARGADOR DE BATERÍA
12PS1

COMUNICACIÓN DE
CARGADOR
EPEVER TRACER 5210BP
(Sh12A6)

COM.
RS485

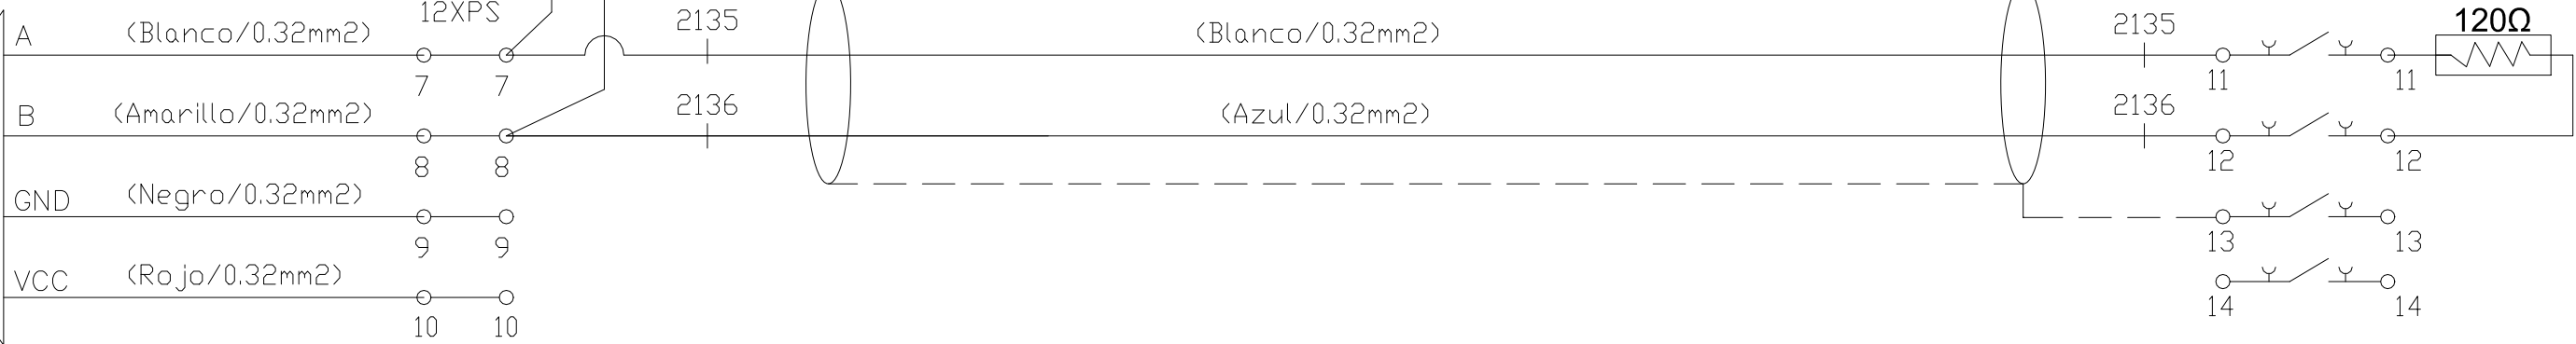

COMUNICACIÓN SERIE RS-485
MAESTRO -> ESCLAVO

6	Update whit fixes	13/07/26	LM	MD	MPV
5	Update whit fixes	26/05/26	LM	MD	MPV
4	Update whit fixes	15/05/26	LM	MD	MPV
3	For Manufacturing	12/03/26	LM	MD	MPV
REV	DESCRIPTION	DATE	PROJ.	DW.	APR.

PROJECT: C.J. CONTROLADOR mSafe2

CODE: 75286-1

CLIENT:

MMA



DOC NUMBER: 75287

TITLE: DIAGRAMA ELÉCTRICO mSafe2
Comunicación

GRAL REV: 6

PAG: 81

REV: 6

CONT: