

TEST REPORT

Report No.: 8427EU011624W2

Applicant: NiceRF Wireless Technology Co., Ltd.

Address: 309-314, 3/F, Bldg A, Hongdu Business building, Zone 43, Baoan Dist., Shenzhen 518101, China

Product Name: LoRa Wireless Module

Model No.: LoRa 2021-868

Trademark: 

Test Standard(s): ETSI EN 300 328 V2.2.2 (2019-07)

Test Result: Pass

Date of Receipt: Jan. 17, 2026

Test Date: Jan. 17, 2026 – Mar. 05, 2026

Date of Issue: Mar. 20, 2026

ISSUED BY:

SHENZHEN EU TESTING LABORATORY LIMITED



Prepared by:



Landon Qiu/ Engineer

Reviewed and Approved by:



Sally Zhang/ Manager

Revision Record

Report Version	Issued Date	Description	Status
V0	Mar. 20, 2026	Original	Valid



Table of Contents

1	COVER PAGE	1
2	GENERAL INFORMATION	5
2.1	APPLICANT INFORMATION	5
2.2	MANUFACTURER INFORMATION	5
2.3	FACTORY INFORMATION	5
2.4	GENERAL DESCRIPTION OF E.U.T.	5
2.5	TECHNICAL INFORMATION OF E.U.T.	6
3	TEST SUMMARY	7
3.1	TEST STANDARD	7
3.2	TEST VERDICT	7
3.3	TEST LABORATORY	7
4	TEST CONFIGURATION	8
4.1	TEST ENVIRONMENT	8
4.2	TEST EQUIPMENT	8
4.3	DESCRIPTION OF SUPPORT UNIT	9
4.4	TEST MODE	9
4.5	MEASUREMENT UNCERTAINTY	9
5	RADIO SPECTRUM MATTER TEST RESULTS (RF)	10
5.1	RF POWER	10
5.1.1	Test Specification	10
5.1.2	E.U.T. Operation	10
5.1.3	Test Setup Diagram	10
5.1.4	Test Data	10
5.2	POWER SPECTRAL DENSITY	11
5.2.1	Test Specification	11
5.2.2	E.U.T. Operation	11
5.2.3	Test Setup Diagram	11
5.2.4	Test Data	11
5.3	OCCUPIED CHANNEL BANDWIDTH	12
5.3.1	Test Specification	12
5.3.2	E.U.T. Operation	12
5.3.3	Test Setup Diagram	12
5.3.4	Test Data	13
5.4	TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN	14
5.4.1	Test Specification	14
5.4.2	E.U.T. Operation	15
5.4.3	Test Setup Diagram	15
5.4.4	Test Data	15
5.5	TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN, CONDUCTED	16
5.5.1	Test Specification	16
5.5.2	E.U.T. Operation	16
5.5.3	Test Setup Diagram	17
5.5.4	Test Data	17
5.6	RECEIVER SPURIOUS EMISSIONS, CONDUCTED	18
5.6.1	Test Specification	18
5.6.2	E.U.T. Operation	18

5.6.3	Test Setup Diagram.....	19
5.6.4	Test Data	19
5.7	RECEIVER BLOCKING	20
5.7.1	Test Specification	20
5.7.2	E.U.T. Operation.....	21
5.7.3	Test Setup Diagram.....	21
5.7.4	Test Data	21
ANNEX A	TEST SETUP PHOTOS	22
ANNEX B	EXTERNAL PHOTOS.....	23
ANNEX C	INTERNAL PHOTOS	23
ANNEX D	TEST DATA	24



2 General Information

2.1 Applicant Information

Applicant	NiceRF Wireless Technology Co., Ltd.
Address	309-314, 3/F, Bldg A, Hongdu Business building, Zone 43, Baoan Dist., Shenzhen 518101, China

2.2 Manufacturer Information

Manufacturer	NiceRF Wireless Technology Co., Ltd.
Address	309-314, 3/F, Bldg A, Hongdu Business building, Zone 43, Baoan Dist., Shenzhen 518101, China

2.3 Factory Information

Factory	NiceRF Wireless Technology Co., Ltd.
Address	309-314, 3/F, Bldg A, Hongdu Business building, Zone 43, Baoan Dist., Shenzhen 518101, China

2.4 General Description of E.U.T.

Product Name	LoRa Wireless Module
Model No. Under Test	LoRa 2021-868
List Model No.	N/A
Description of Model differentiation	N/A
Rating(s)	Input: 6VDC (Powered by AA*4)
Test Sample No.	-1/2(Normal Sample), -2/2(Engineering Sample)
Hardware Version	V1.0
Software Version	V1.0
Remark	For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.5 Technical Information of E.U.T.

Network and Wireless Connectivity	LoRa 2.4G ISM Band (GFSK modulation)
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Operating Frequency	2404.5MHz - 2479.5MHz
Modulation Type	GFSK
Number of Channels	3
Antenna Type	Rod Antenna
Antenna Gain(Peak)	3 dBi
Power Level Setting	6
RF Output Power (EIRP)	8.64 dBm Max.
Receiver Category	2
Remark	The above information are declared by the applicant, EU-LAB is not responsible for the information accuracy provided by the applicant.

All channels were listed on the following table:

Channel	Frequency (MHz)
0	2404.5
1	2441.5
2	2479.5

3 Test Summary

3.1 Test Standard

The tests were performed according to following standards:

ETSI EN 300 328 V2.2.2 (2019-07): Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz band; Harmonised Standard for access to radio spectrum

Remark:

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product maybe which result in lowering the emission/immunity should be checked to ensure compliance has been maintained.

3.2 Test Verdict

Test Items	Standard	Method	Requirement	Results
RF Power	ETSI EN 300 328 V2.2.2 (2019-07)	Clause 5.4.2.2.1	Clause 4.3.2.2.1	Pass
Power Spectral Density	ETSI EN 300 328 V2.2.2 (2019-07)	Clause 5.4.3.2.1	Clause 4.3.2.3.1	Pass
Occupied Channel Bandwidth	ETSI EN 300 328 V2.2.2 (2019-07)	Clause 5.4.7.2.1	Clause 4.3.2.7.1	Pass
Transmitter unwanted emissions in the out-of-band domain	ETSI EN 300 328 V2.2.2 (2019-07)	Clause 5.4.8.2.1	Clause 4.3.2.8.1	Pass
Transmitter unwanted emissions in the spurious domain, conducted	ETSI EN 300 328 V2.2.2 (2019-07)	Clause 5.4.9.2.1	Clause 4.3.2.9.1	Pass
Receiver spurious emissions, conducted	ETSI EN 300 328 V2.2.2 (2019-07)	Clause 5.4.10.2.1	Clause 4.3.2.10.1	Pass
Receiver Blocking	ETSI EN 300 328 V2.2.2 (2019-07)	Clause 5.4.11.2.1	Clause 4.3.2.11.1	Pass
Note: (1) "N/A" denotes test is not applicable in this Test Report.				

3.3 Test Laboratory

Test Laboratory	Shenzhen EU Testing Laboratory Limited
Address	101, Building B1, Fuqiao Fourth Area, Qiaotou Community, Fuhai Subdistrict, Baoan District, Shenzhen, Guangdong, China

4 Test Configuration

4.1 Test Environment

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	30% to 60%	
Atmospheric Pressure	86 kPa to 106 kPa	
Temperature	NT (Normal Temperature)	+15°C to +35°C

ENV	Temperature (°C)	Voltage (VDC)
HTNV	50	6.0VDC
LTNV	-10	5.4VDC
NTNV	25	6.6VDC

Note: The HT and LT were declared by manufacturer.

4.2 Test Equipment

Transmitter unwanted emissions in the spurious domain, conducted Receiver spurious emissions, conducted Receiver Blocking RF Power Power Spectral Density Occupied Channel Bandwidth Transmitter unwanted emissions in the out-of-band domain					
Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
MXA Signal Analyzer	Agilent	N9020A	EE-011	2026-01-07	2027-01-06
MXG RF Vector Signal Generator	Agilent	N5182A	EE-012	2026-01-07	2027-01-06
MIMO Power Measurement Module	TSTPASS	TSPS 2023R	EE-016	2026-01-07	2027-01-06
Wideband Radio Communication Tester	ROHDE & SCHWARZ	CMW500	EE-402	2025/02/14	2026/02/13
				2026/02/13	2027/02/12
MXG RF Analog Signal Generator	Agilent	N5181A	EE-406	2025/02/14	2026/02/13
				2026/02/13	2027/02/12
Power Meter	Anritsu	ML2495A	EE-416	2025/02/14	2026/02/13
				2026/02/13	2027/02/12
Constant Temperature Humidity Chamber	Guangxin	GXP-401	ES-002	2025-07-29	2026-07-28
RF Test Software	TSTPASS	TS32893 V2.0	EE-017	/	/
Electric and Magnetic Field Probe - Analyzer	Narda	EHP-200A	EE-405	2026-02-13	2027-02-12

4.3 Description of Support Unit

No.	Title	Manufacturer	Model No.	Serial No.
1	--	--	--	--

4.4 Test Mode

No.	Test Modes	Description
TM1	TX Mode	Keep the EUT in continuously transmitting mode
TM2	RX Mode	Keep the EUT in continuously receiving mode
TM3	Normal Mode	Keep the EUT in normal link mode

4.5 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test Item	Measurement Uncertainty
Conducted Emission	2.64 dB
Occupied Channel Bandwidth	70 kHz
RF output power, conducted	1.04 dB
Power Spectral Density, conducted	0.91 dB
Unwanted Emissions, conducted	2.72 dB
All emissions, radiated	5.24 dB Max.
Temperature	0.8°C
Humidity	4%

5 Radio Spectrum Matter Test Results (RF)

5.1 RF Power


5.1.1 Test Specification

Test Requirement:	Clause 4.3.2.2.1
Test Limit:	$\leq 20\text{dBm}$
Test Method:	Clause 5.4.2.2.1
Procedure:	1. Run a test program to control EUT transmitting at specific channel. 2. Connect the power sensor to the transmit port 3. Power Meter was setting as below: Sample speed: 1 MS/s Number of bursts: at least 10bursts Detector: RMS 4. A power meter was used to read the response of the power sensor 5. Define Start time and Stop time of a burst by 30dB below the highest value of the stores samples. 6. Find the highest burst value 7. Record the power level $\text{EIRP} = \text{antenna gain} + \text{power level of step 7.}$

5.1.2 E.U.T. Operation

Pre test mode:	TM1
Final test mode:	TM1

5.1.3 Test Setup Diagram

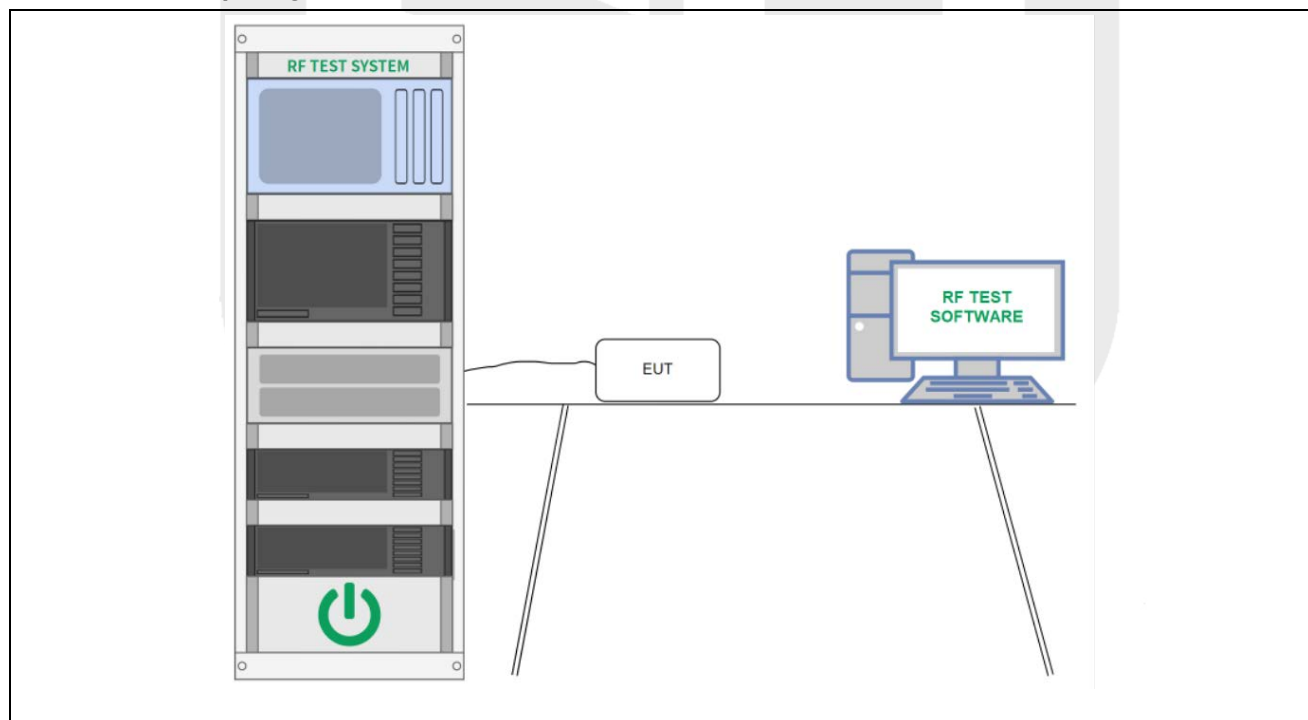

5.1.4 Test Data

PASS.

Please refer to Annex D for details.

5.2 Power Spectral Density


5.2.1 Test Specification

Test Requirement:	Clause 4.3.2.3.1
Test Limit:	$\leq 10\text{dBm/MHz}$
Test Method:	Clause 5.4.3.2.1
Procedure:	The test procedure shall be as follows: Connect the UUT to the spectrum analyser and use the following settings: Start Frequency: 2 400 MHz Stop Frequency: 2 483,5 MHz Resolution BW: 10 kHz Video BW: 30 kHz Sweep Points: $> 8\ 350$; for spectrum analysers not supporting this number of sweep points, the frequency band may be segmented. Detector: RMS Trace Mode: Max Hold

5.2.2 E.U.T. Operation

Pre test mode:	TM1
Final test mode:	TM1

5.2.3 Test Setup Diagram

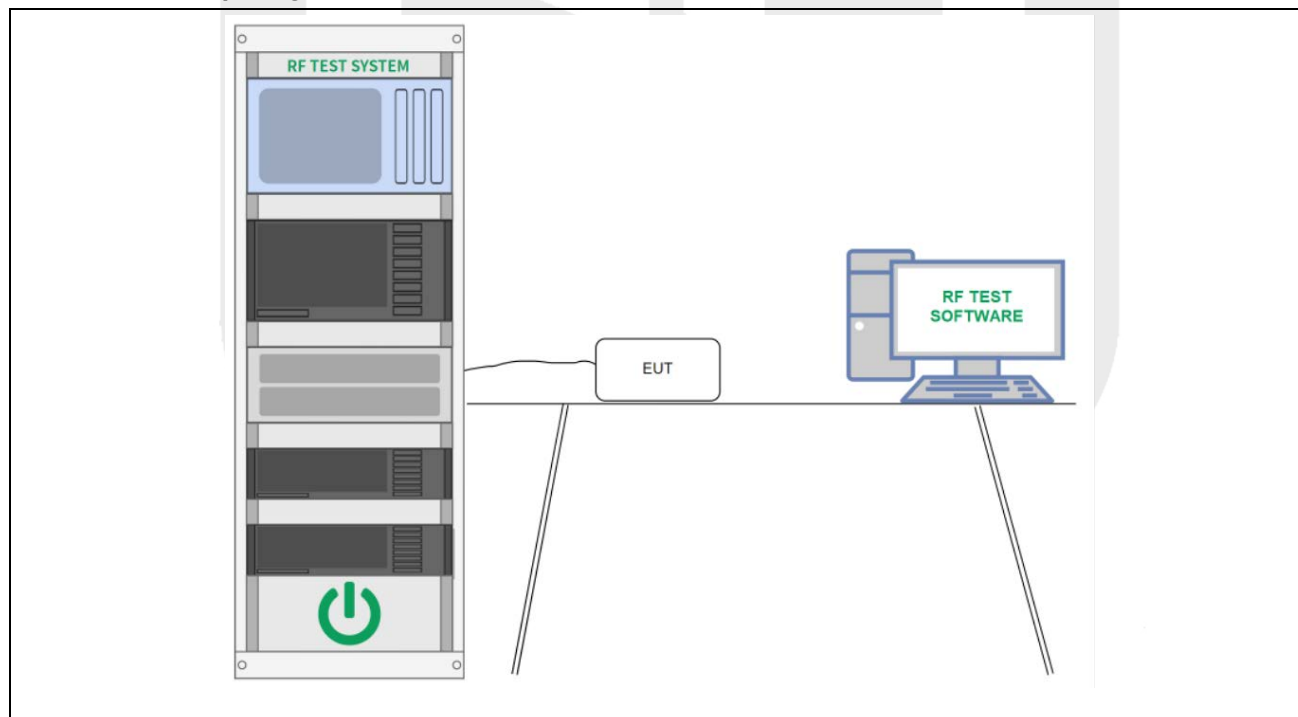

5.2.4 Test Data

PASS.

Please refer to Annex D for details.

5.3 Occupied Channel Bandwidth


5.3.1 Test Specification

Test Requirement:	Clause 4.3.2.7.1
Test Limit:	Clause 4.3.2.7.3
Test Method:	Clause 5.4.7.2.1
Procedure:	The measurement procedure shall be as follows: Step 1: Connect the UUT to the spectrum analyser and use the following settings: Centre Frequency: The centre frequency of the channel under test Resolution BW: ~ 1 % of the span without going below 1 % Video BW: 3 × RBW Frequency Span: 2 × Nominal Channel Bandwidth Detector Mode: RMS Trace Mode: Max Hold Sweep time: 1 s Step 2: Wait for the trace to stabilize. Find the peak value of the trace and place the analyser marker on this peak. Step 3: Use the 99 % bandwidth function of the spectrum analyser to measure the Occupied Channel Bandwidth of the UUT. This value shall be recorded. Make sure that the power envelope is sufficiently above the noise floor of the analyser to avoid the noise signals left and right from the power envelope being taken into account by this measurement.

5.3.2 E.U.T. Operation

Pre test mode:	TM1
Final test mode:	TM1

5.3.3 Test Setup Diagram

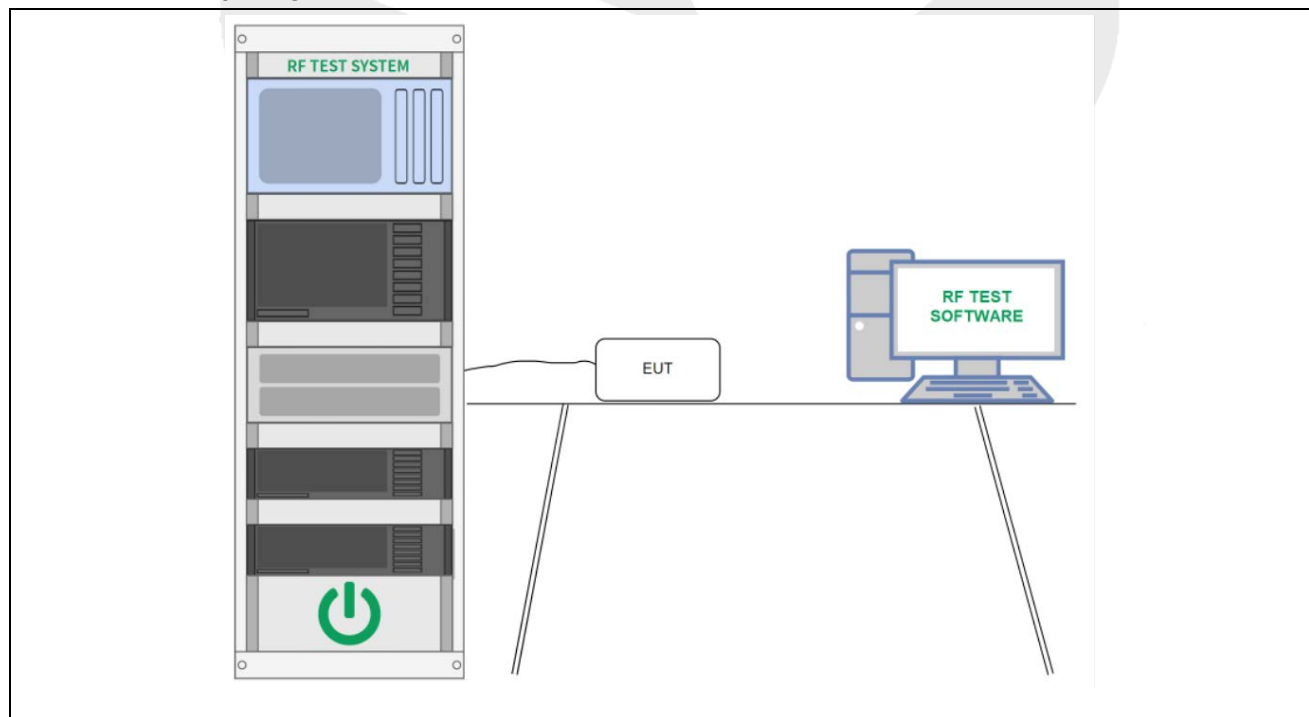

5.3.4 Test Data

PASS.

Please refer to Annex D for details.



5.4 Transmitter unwanted emissions in the out-of-band domain

5.4.1 Test Specification


Test Requirement:	Clause 4.3.2.8.1
Test Limit:	Clause 4.3.2.8.3
Test Method:	Clause 5.4.8.2.1
Procedure:	The Out-of-band emissions within the different horizontal segments of the mask provided in figure 1 and figure 3 shall be measured using the procedure in step 1 to step 6 below. This method assumes the spectrum analyser is equipped with the Time Domain Power option. Step 1: Connect the UUT to the spectrum analyser and use the following settings: - Measurement Mode: Time Domain Power - Centre Frequency: 2 484 MHz - Span: ZeroSpan - Resolution BW: 1 MHz - Filter mode: Channel filter - VideoBW: 3MHz - Detector Mode: RMS - TraceMode: MaxHold - Sweep Mode: Single Sweep - Sweep Points: Sweep time [μs] / (1 μs) with a maximum of 30 000 - Trigger Mode: Video - Sweep Time: > 120 % of the duration of the longest burst detected during the measurement of the RF Output Power Step 2 (segment 2 483,5 MHz to 2 483,5 MHz + BW): The measurement shall be performed and repeated while the trigger level is increased until no triggering takes place. For FHSS equipment operating in a normal hopping mode, the different hops will result in signal bursts with different power levels. In this case the burst with the highest power level shall be selected. Set a window (start and stop lines) to match with the start and end of the burst and in which the RMS power shall be measured using the Time Domain Power function. Select RMS power to be measured within the selected window and note the result which is the RMS power within this 1 MHz segment (2 483,5 MHz to 2 484,5 MHz). Compare this value with the applicable limit provided by the mask. Increase the centre frequency in steps of 1 MHz and repeat this measurement for every 1 MHz segment within the range 2 483,5 MHz to 2 483,5 MHz + BW. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + BW - 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment). Step 3 (segment 2 483,5 MHz + BW to 2 483,5 MHz + 2 BW): Change the centre frequency of the analyser to 2 484 MHz + BW and perform the measurement for the first 1 MHz segment within range 2 483,5 MHz + BW to 2 483,5 MHz + 2 BW. Increase the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + 2 BW - 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment). Step 4 (segment 2 400 MHz - BW to 2 400 MHz): Change the centre frequency of the analyser to 2 399,5 MHz and perform the measurement for the first 1 MHz segment within range 2 400 MHz - BW to 2 400 MHz. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - BW + 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment). Step 5 (segment 2 400MHz - 2 BW to 2 400 MHz - BW):

	Change the centre frequency of the analyser to 2 399,5 MHz - BW and perform the measurement for the first 1 MHz segment within range 2 400 MHz - 2 BW to 2 400 MHz - BW. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - 2 BW + 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment). Step 6: In case of conducted measurements on equipment with a single transmit chain, the declared antenna assembly gain G in dBi shall be added to the results for each of the 1 MHz segments and compared with the limits provided by the mask given in figure 1 or figure 3. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered.
--	--

5.4.2 E.U.T. Operation

Pre test mode:	TM1
Final test mode:	TM1

5.4.3 Test Setup Diagram

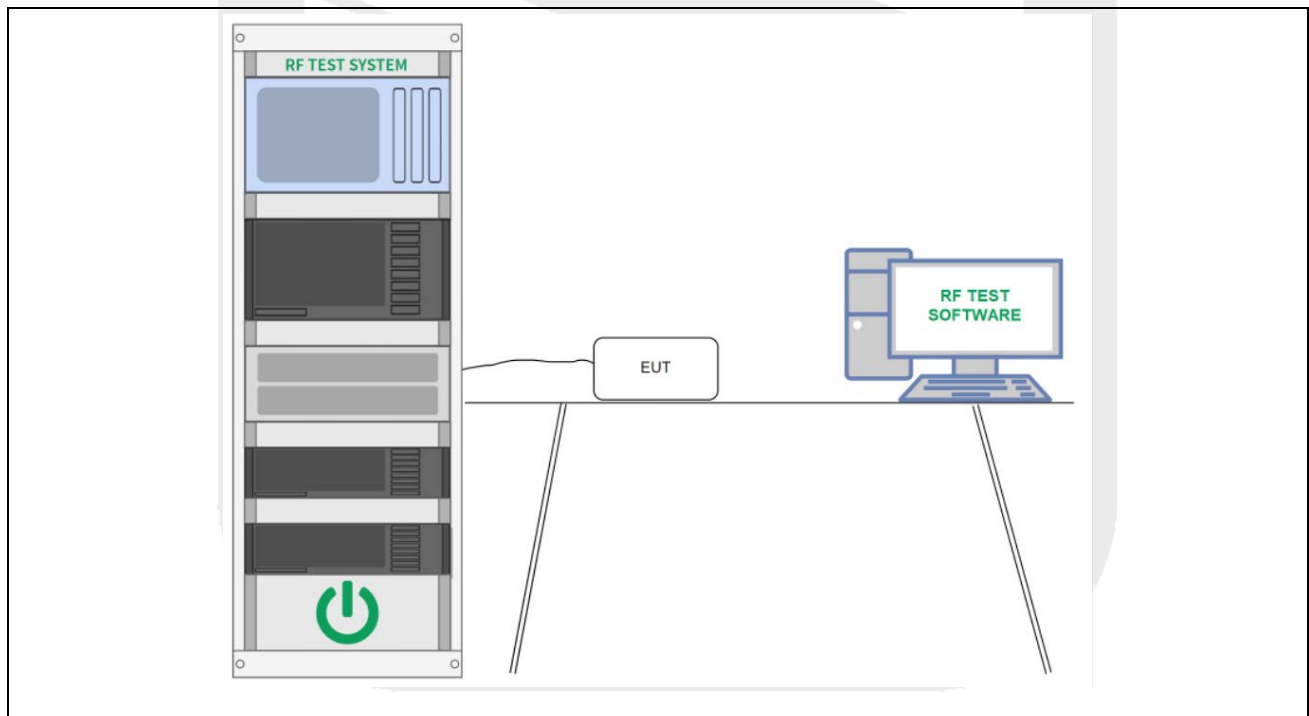

5.4.4 Test Data

PASS.

Please refer to Annex D for details.

5.5 Transmitter unwanted emissions in the spurious domain, conducted


5.5.1 Test Specification

Test Requirement:	Clause 4.3.2.9.1
Test Limit:	Clause 4.3.2.9.3
Test Method:	Clause 5.4.9.2.1
Procedure:	The procedure in step 1 to step 4 below shall be used to accurately measure the individual unwanted emissions identified during the pre-scan measurements above. This method assumes the spectrum analyser has a Time Domain Power function. Step 1: The level of the emissions shall be measured using the following spectrum analyser settings: Measurement Mode: Time Domain Power Centre Frequency: Frequency of the emission identified during the pre-scan Resolution Bandwidth: 100 kHz (< 1 GHz) / 1 MHz (> 1 GHz) Video Bandwidth: 300 kHz (< 1 GHz) / 3 MHz (> 1 GHz) Frequency Span: Zero Span Sweep Mode: Single Sweep Sweep Time: > 120 % of the duration of the longest burst detected during the measurement of the RF Output Power Sweep Points: Sweep time [μs] / (1 μs) with a maximum of 30 000 Trigger Mode: Video (burst signals) or Manual (continuous signals) Detector Mode: RMS Step 2: Set a window where the start and stop indicators match the start and end of the burst with the highest level and record the value of the power measured within this window. If the spurious emission to be measured is a continuous transmission, the measurement window shall be set to match the start and stop times of the sweep. Step 3: In case of conducted measurements on smart antenna systems (equipment with multiple transmit chains), step 2 needs to be repeated for each of the active transmit chains (Ach). Sum the measured power (within the observed window) for each of the active transmit chains. Step 4: The value defined in step 3 shall be compared to the limits defined in table 4 or table 12.

5.5.2 E.U.T. Operation

Pre test mode:	TM1
Final test mode:	TM1

5.5.3 Test Setup Diagram

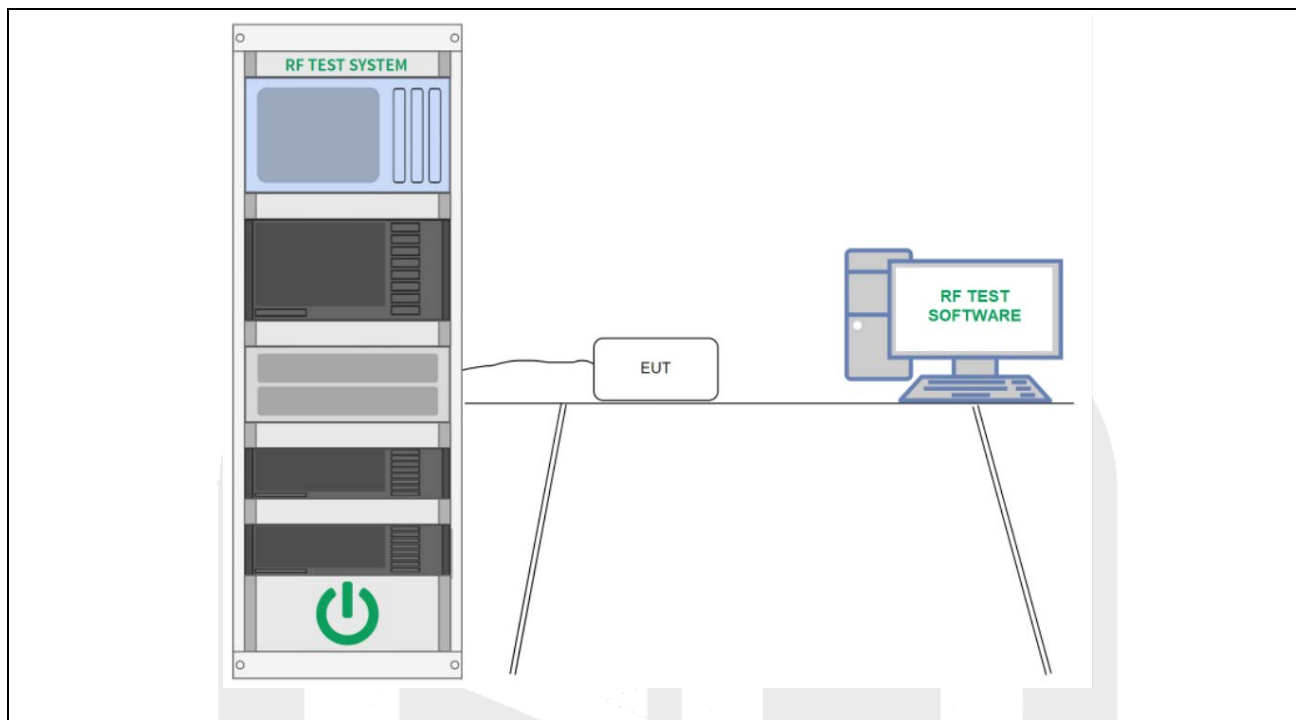

5.5.4 Test Data

PASS.

Please refer to Annex D for details.

5.6 Receiver spurious emissions, conducted


5.6.1 Test Specification

Test Requirement:	Clause 4.3.2.10.1
Test Limit:	Clause 4.3.2.10.3
Test Method:	Clause 5.4.10.2.1
Procedure:	The procedure in step 1 to step 4 below shall be used to accurately measure the individual unwanted emissions identified during the pre-scan measurements above. This method assumes the spectrum analyser has a Time Domain Power function. Step 1: The level of the emissions shall be measured using the following spectrum analyser settings: Measurement Mode: Time Domain Power Centre Frequency: Frequency of the emission identified during the pre-scan Resolution Bandwidth: 100 kHz (< 1 GHz) / 1 MHz (> 1 GHz) Video Bandwidth: 300 kHz (< 1 GHz) / 3 MHz (> 1 GHz) Frequency Span: Zero Span Sweep mode: Single Sweep Sweep time: 30 ms Sweep points: 30 000 Trigger: Video (for burst signals) or Manual (for continuous signals) Detector: RMS Step 2: Set a window where the start and stop indicators match the start and end of the burst with the highest level and record the value of the power measured within this window. If the spurious emission to be measured is a continuous transmission, the measurement window shall be set to the start and stop times of the sweep. Step 3: In case of conducted measurements on smart antenna systems (equipment with multiple receive chains), step 2 needs to be repeated for each of the active receive chains Ach. Sum the measured power (within the observed window) for each of the active receive chains. Step 4: The value defined in step 3 shall be compared to the limits defined in table 5 and table 13.

5.6.2 E.U.T. Operation

Pre test mode:	TM2
Final test mode:	TM2

5.6.3 Test Setup Diagram

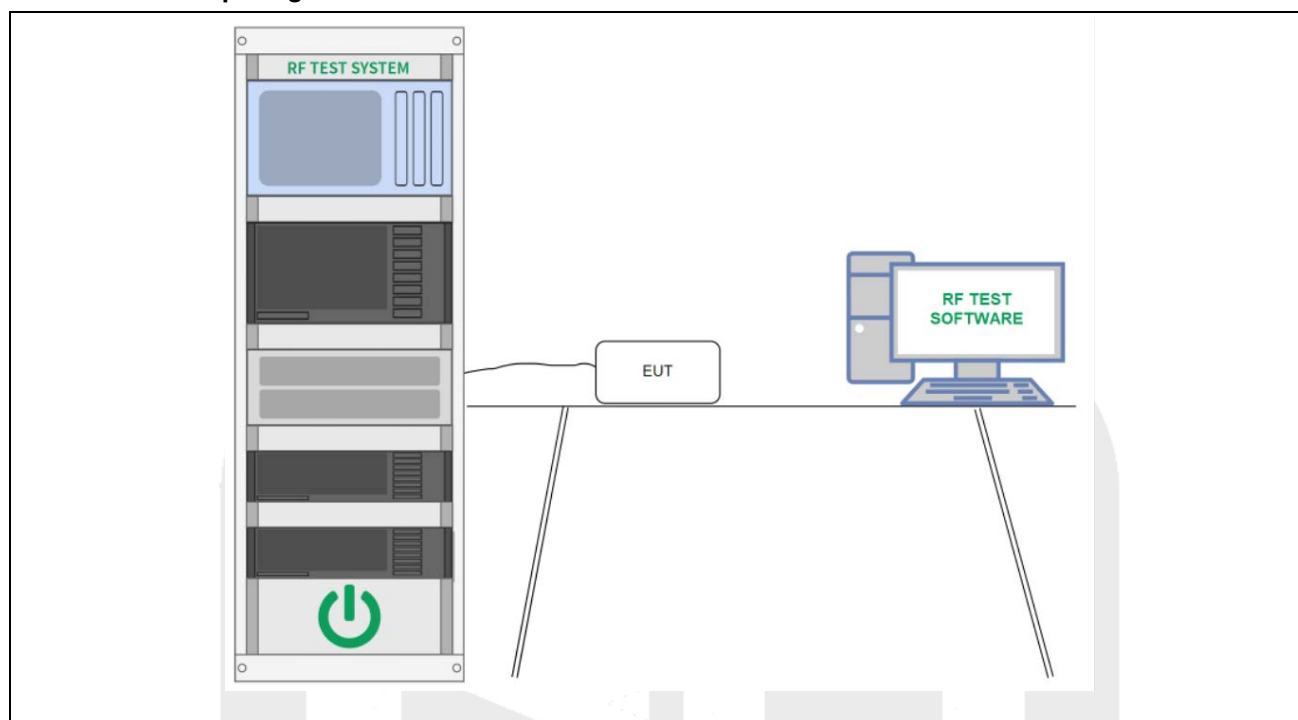


5.6.4 Test Data

PASS.

Please refer to Annex D for details.

5.7 Receiver Blocking

5.7.1 Test Specification

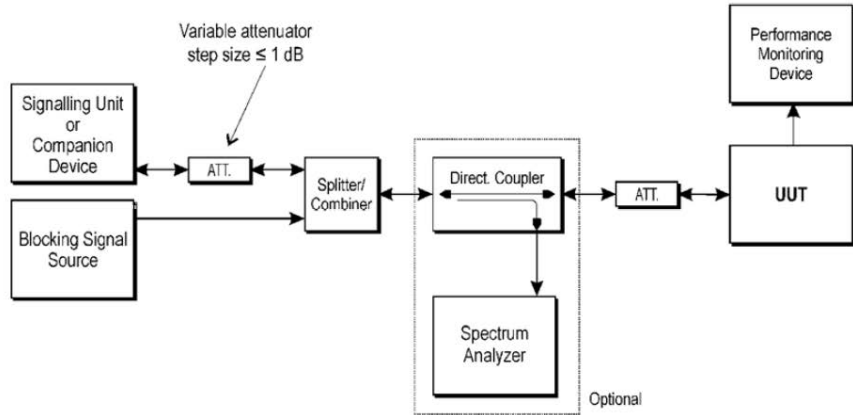
Test Requirement:	Clause 4.3.2.11.1
Test Limit:	Clause 4.3.2.11.4
Test Method:	Clause 5.4.11.2.1
Procedure:	For systems using multiple receive chains only one chain (antenna port) need to be tested. All other receiver inputs shall be terminated. Figure 6 shows the test set-up which can be used for performing the receiver blocking test.  Figure 6: Test Set-up for receiver blocking Step 1: For non-FHSS equipment, the UUT shall be set to the lowest operating channel on which the blocking test has to be performed (see clause 5.4.11.1). Step 2: The blocking signal generator is set to the first frequency as defined in the appropriate table corresponding to the receiver category and type of equipment. Step 3: With the blocking signal generator switched off, a communication link is established between the UUT and the associated companion device using the test setup shown in figure 6. Unless the option provided in note 2 of the applicable table referred to in clause 5.4.11.2.1 is used, the level of the wanted signal shall be set to the value provided in the table corresponding to the receiver category and type of equipment. The test procedure defined in clause 5.4.2, and more in particular clause 5.4.2.2.1.2, can be used to measure the (conducted) level of the wanted signal however no correction shall be made for antenna gain of the companion device (step 6 in clause 5.4.2.2.1.2 shall be ignored). This level may be measured directly at the output of the companion device and a correction is made for the coupling loss into the UUT. The actual level for the wanted signal shall be recorded in the test report. Step 4: The blocking signal at the UUT is set to the level provided in the table corresponding to the receiver category and type of equipment. If the performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 are met then proceed to step 6. Step 5: If the performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 is not met, step 3 and step 4 shall be repeated after that the frequency of the blocking signal set in step 2 has been increased with a value equal to the Occupied Channel Bandwidth except:

	- For the blocking frequency 2 380 MHz, where this frequency offset shall be less than or equal to 10 MHz. If this frequency offset is more than 7 MHz, the level of the wanted signal shall be increased by 3 dB. - For the blocking frequency 2 503,5 MHz, where this frequency offset shall be less than or equal to 10 MHz. If this frequency offset is more than 7 MHz, the level of the wanted signal shall be decreased by 3 dB. Step 6: Repeat step 4 and step 5 for each remaining combination of frequency and level for the blocking signal as provided in the table corresponding to the receiver category and type of equipment. Step 7: For non-FHSS equipment, repeat step 2 to step 6 with the UUT operating at the highest operating channel on which the blocking test has to be performed (see clause 5.4.11.1). Step 8: It shall be assessed and recorded in the test report whether the UUT complies with the Receiver Blocking requirement.
--	--

5.7.2 E.U.T. Operation

Pre test mode:	TM3
Final test mode:	TM3

5.7.3 Test Setup Diagram

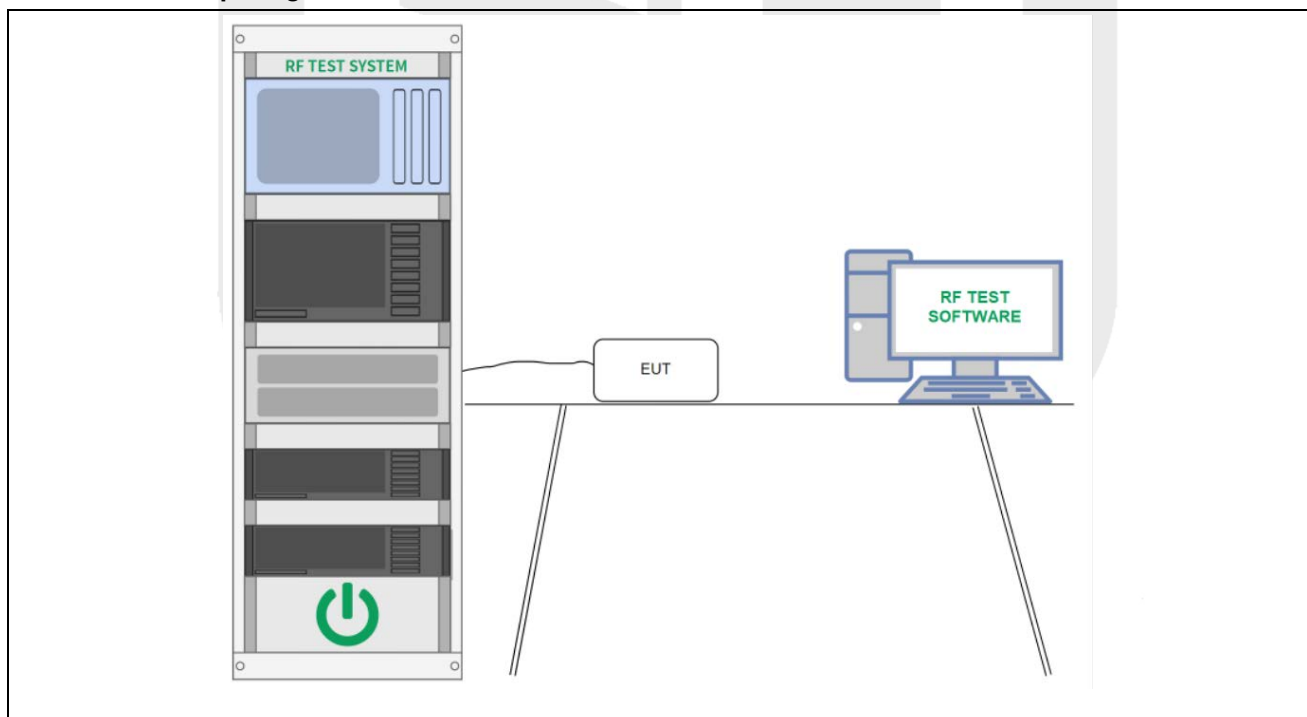

5.7.4 Test Data

PASS.

Please refer to Annex D for details.

ANNEX A TEST SETUP PHOTOS

PHOTO 1

Radiated Emission
Below 1GHz


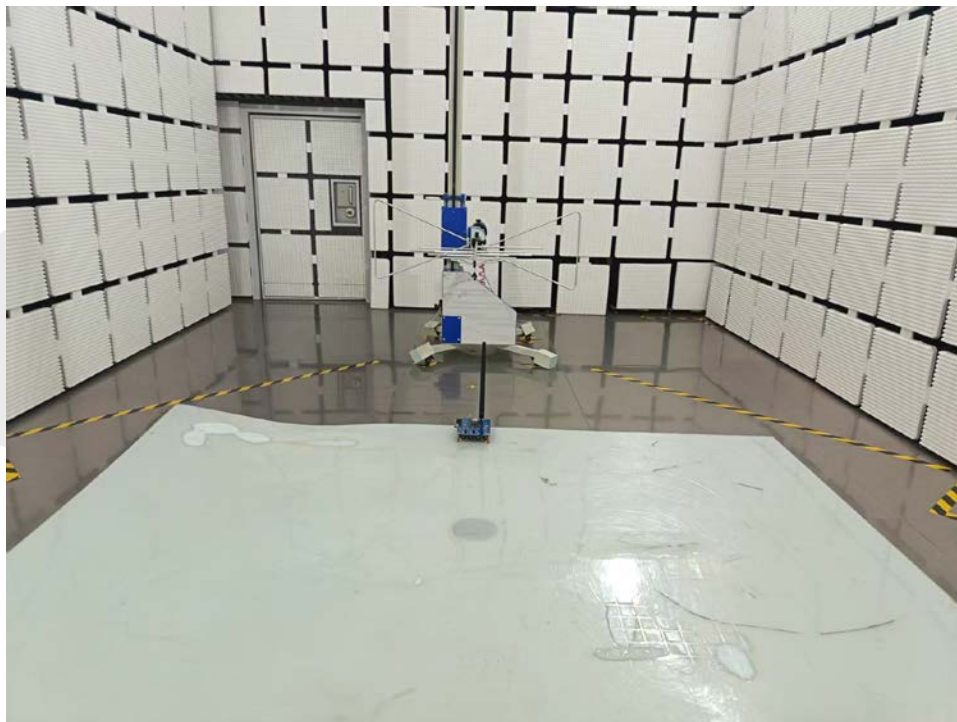


PHOTO 2

Radiated Emission
Above 1GHz

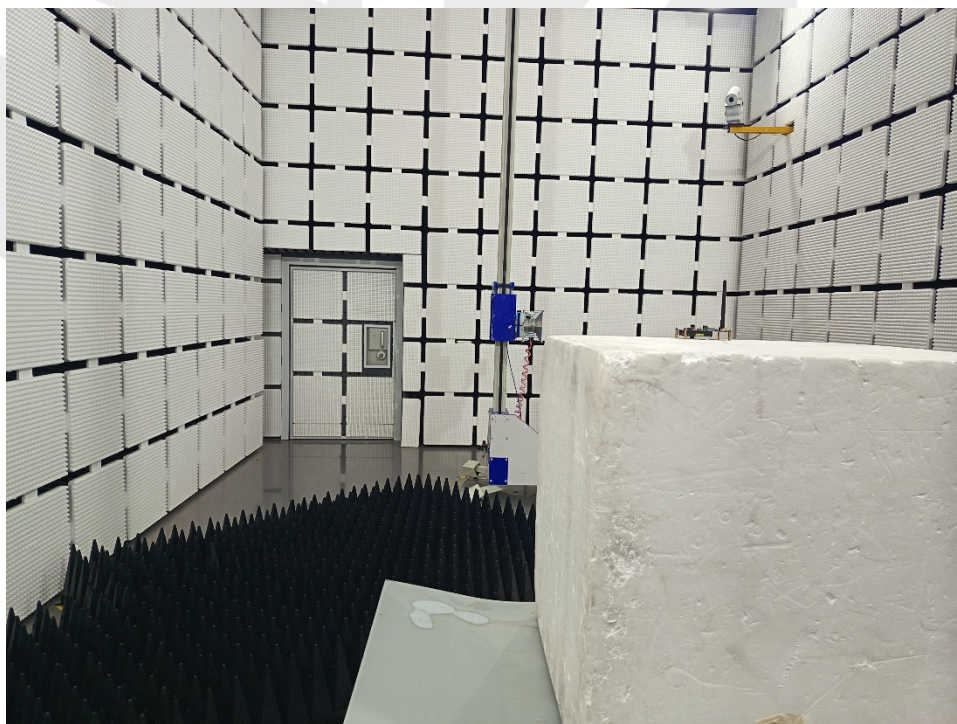

ANNEX B EXTERNAL PHOTOS

Please refer to 8427EU011624E for External photos of the EUT.

ANNEX C INTERNAL PHOTOS

Please refer to 8427EU011624E for Internal photos of the EUT.



ANNEX D TEST DATA

1. RF Output Power, Duty Cycle, Tx-sequence, Tx-gap, Medium Utilization

1.1 Test Result

1.1.1 Power

ENV	Mode	TX Type	Frequency (MHz)	ANT	Gain (dBi)	Power (dBm)	EIRP (dBm)	Limit (dBm)	Verdict
NTNV	2.4G	SISO	2404.5	1	3.00	5.64	8.64	<=20	Pass
			2441.5	1	3.00	5.42	8.42	<=20	Pass
			2479.5	1	3.00	5.15	8.15	<=20	Pass
HTNV	2.4G	SISO	2404.5	1	3.00	5.64	8.64	<=20	Pass
			2441.5	1	3.00	5.41	8.41	<=20	Pass
			2479.5	1	3.00	5.16	8.16	<=20	Pass
LTVN	2.4G	SISO	2404.5	1	3.00	5.64	8.64	<=20	Pass
			2441.5	1	3.00	5.42	8.42	<=20	Pass
			2479.5	1	3.00	5.16	8.16	<=20	Pass
Note1: E.I.R.P = Measured Power + Antenna Gain									

2. Power Spectral Density


2.1 Test Result

2.1.1 PSD


ENV	Mode	TX Type	Frequency (MHz)	ANT	E.I.R.PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NTNV	2.4G	SISO	2404.5	1	8.64	≤ 10	Pass
			2441.5	1	8.42	≤ 10	Pass
			2479.5	1	8.15	≤ 10	Pass

2.2 Test Graph

2.2.1 PSD

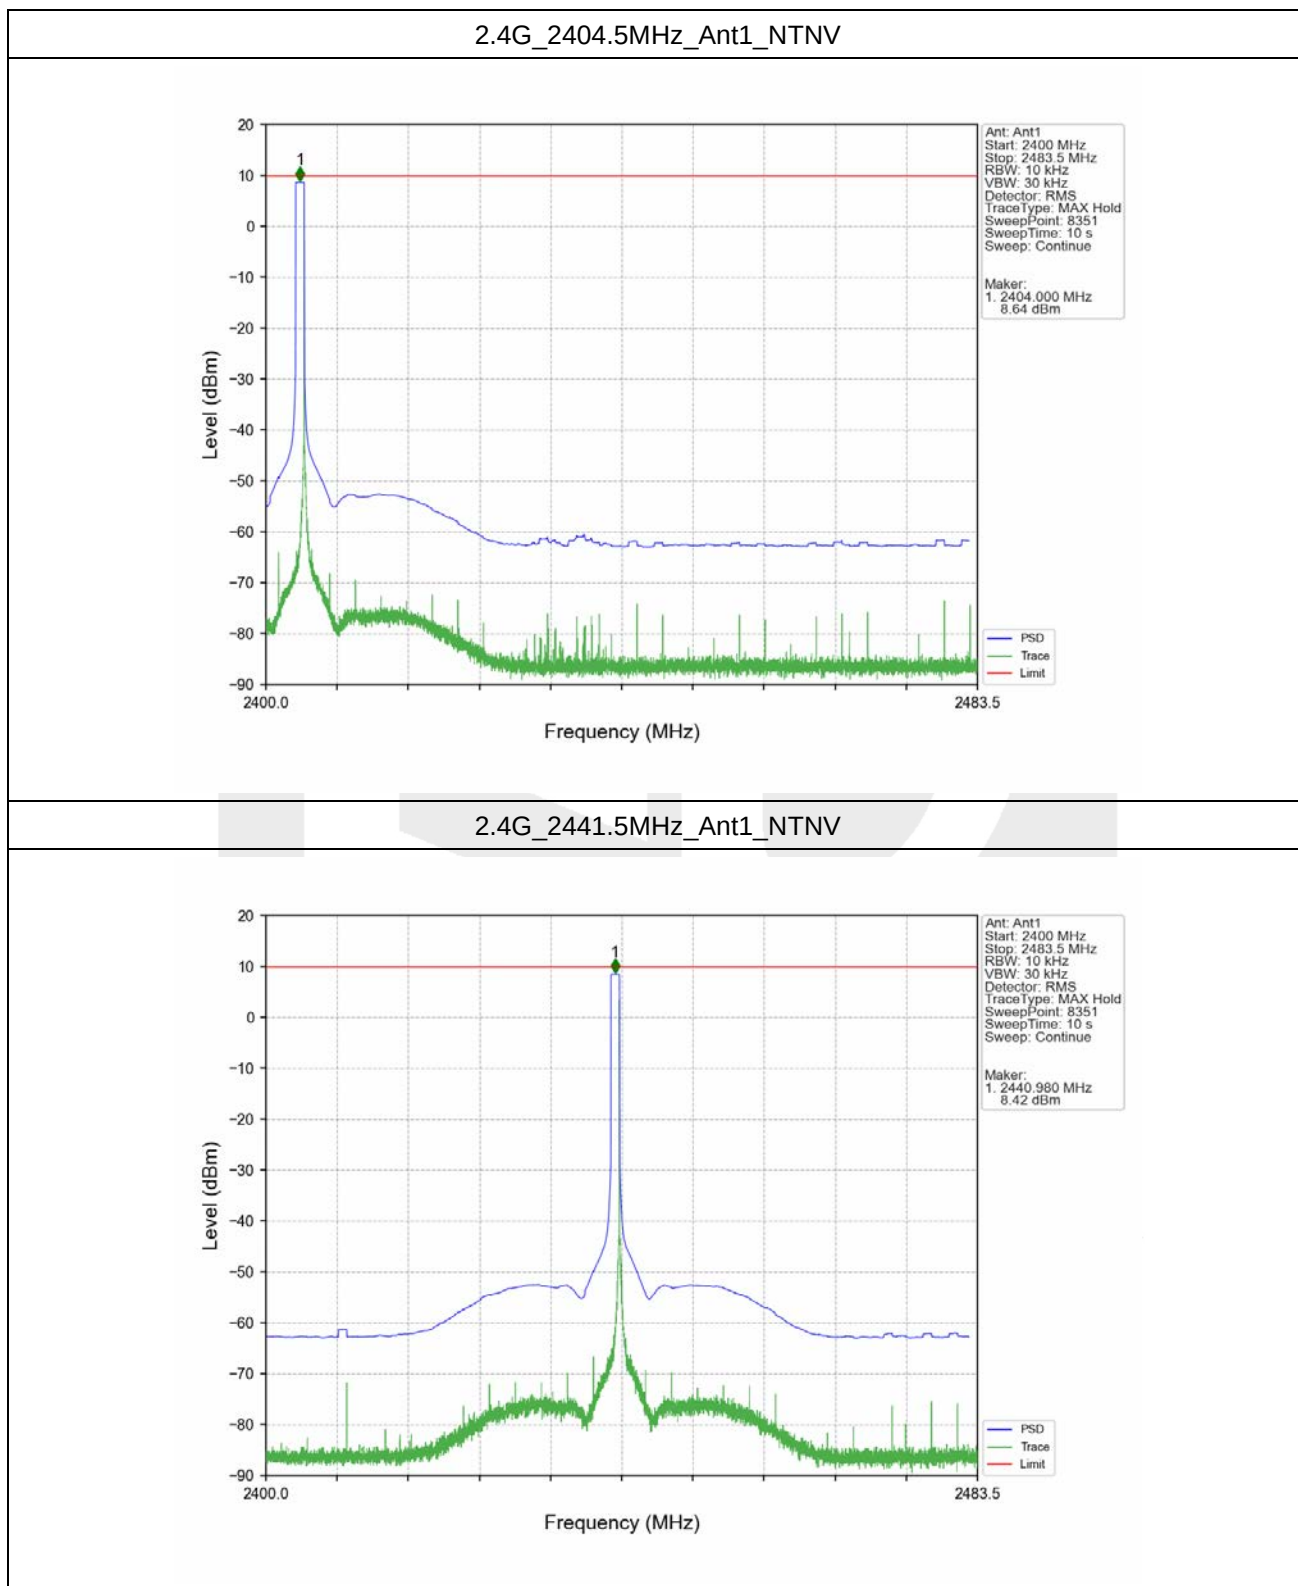

2.4G_2479.5MHz_Ant1_NTNV

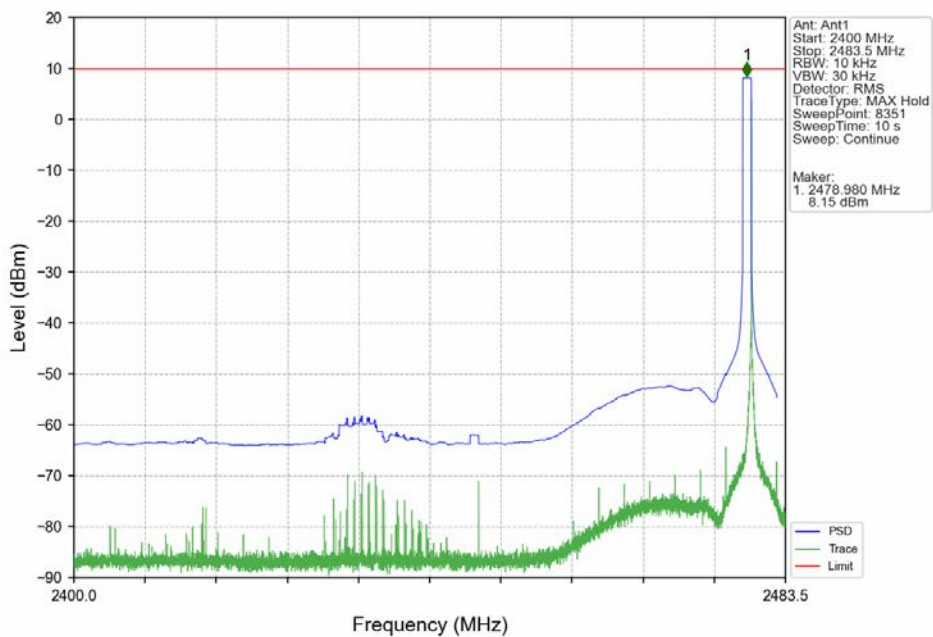

3. Occupied Channel Bandwidth


3.1 Test Result

3.1.1 OBW_Ant1

Ant1								
ENV	Mode	TX Type	Frequency (MHz)	OBW (MHz)	Frequency Range (MHz)			Verdict
				Result	FL	FH	Limit	
NTNV	2.4G	SISO	2404.5	0.995	2403.992	/	≥ 2400	Pass
			2479.5	0.994	/	2479.989	≤ 2483.5	Pass

3.2 Test Graph

3.2.1 OBW_Ant1

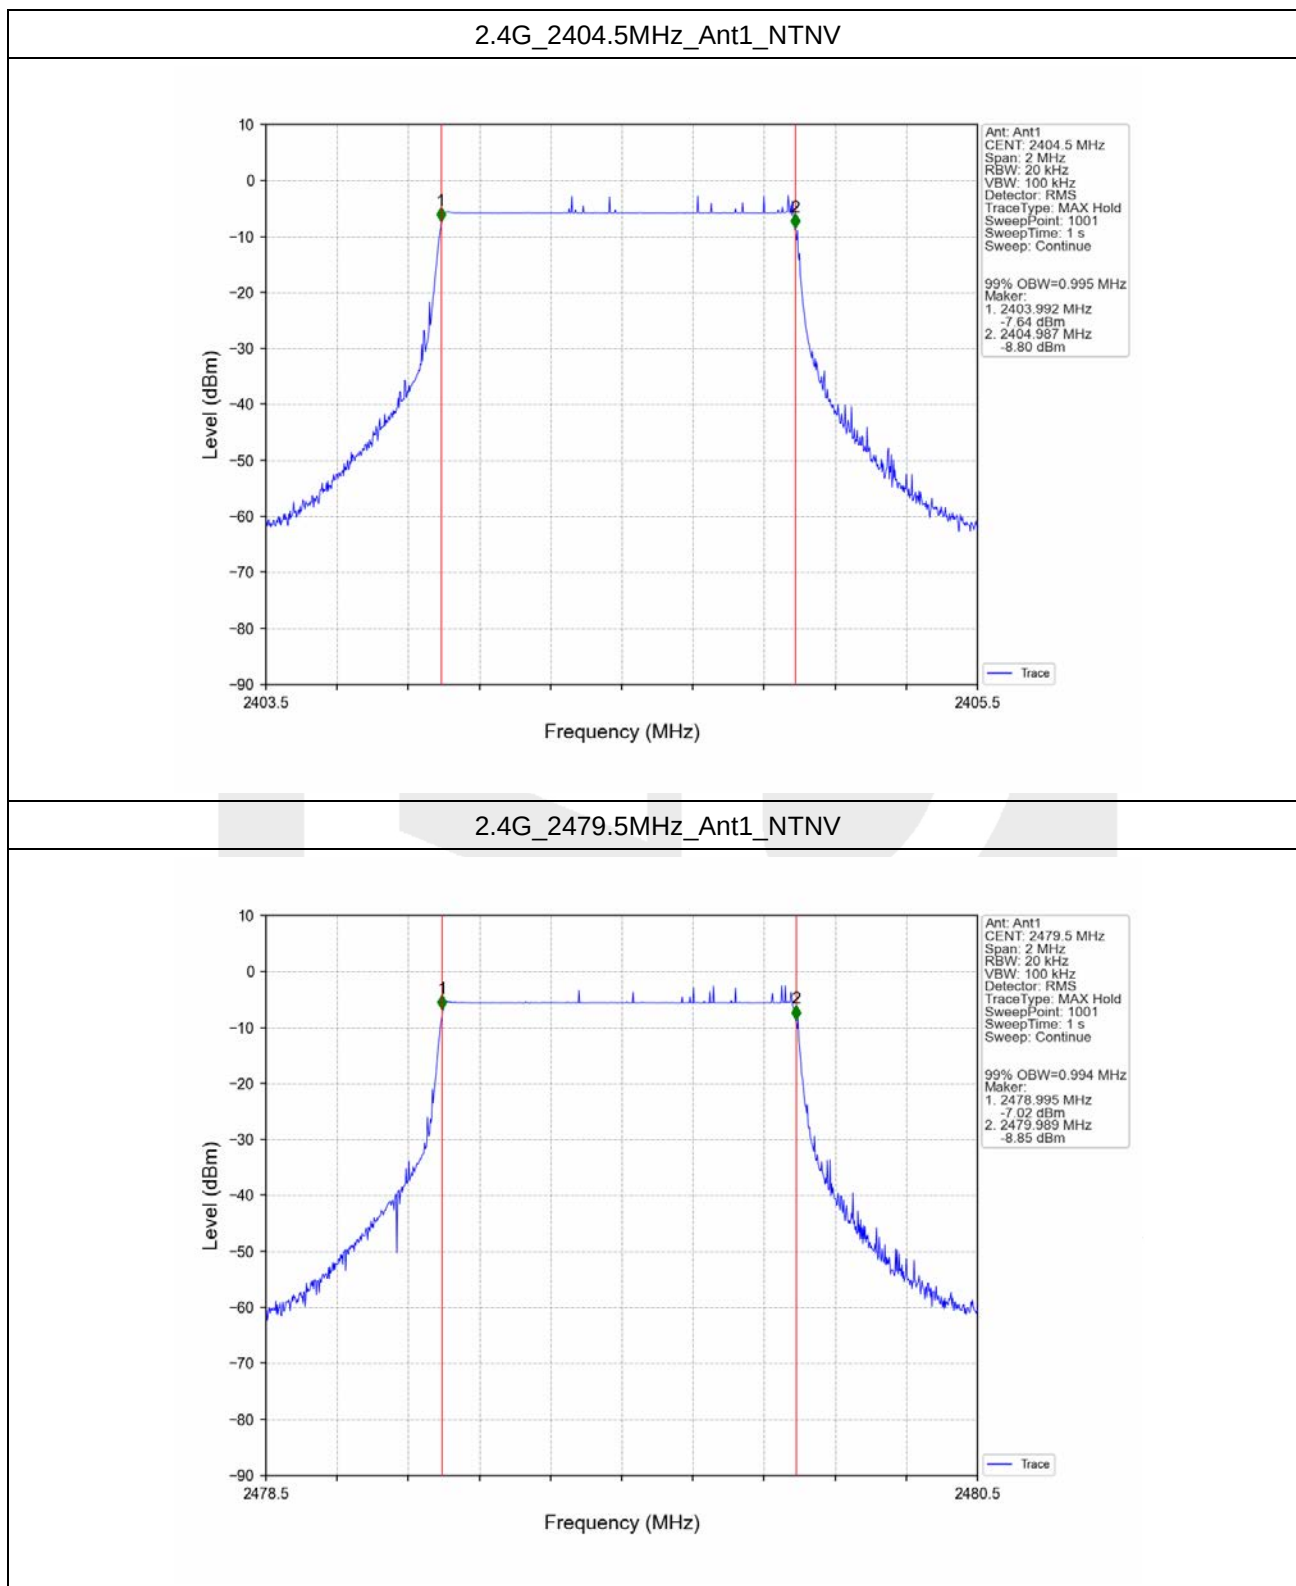

4. Transmitter Unwanted Emissions In The Out-Of-Band Domain


4.1 Test Result

4.1.1 2.4G-Ant1

2.4G Ant1 NTN							
Mode	TX Type	Frequency (MHz)	ANT	Test Freq. (MHz)	Result (dBm/MHz)	Limit (dBm/MHz)	Verdict
2.4G	SISO	2404.5	1	2398.500	-65.28	≤ -20	Pass
				2399.500	-65.28	≤ -10	Pass
		2479.5	1	2484.000	-54.86	≤ -10	Pass
				2485.000	-65.31	≤ -10	Pass
				2486.000	-65.29	≤ -10	Pass
				2487.000	-65.35	≤ -10	Pass
				2487.196	-65.29	≤ -10	Pass
				2488.196	-65.27	≤ -20	Pass
				2489.196	-65.29	≤ -20	Pass
				2490.196	-65.31	≤ -20	Pass
				2491.196	-65.25	≤ -20	Pass
				2491.392	-65.26	≤ -20	Pass

4.2 Test Graph

4.2.1 2.4G-Ant1

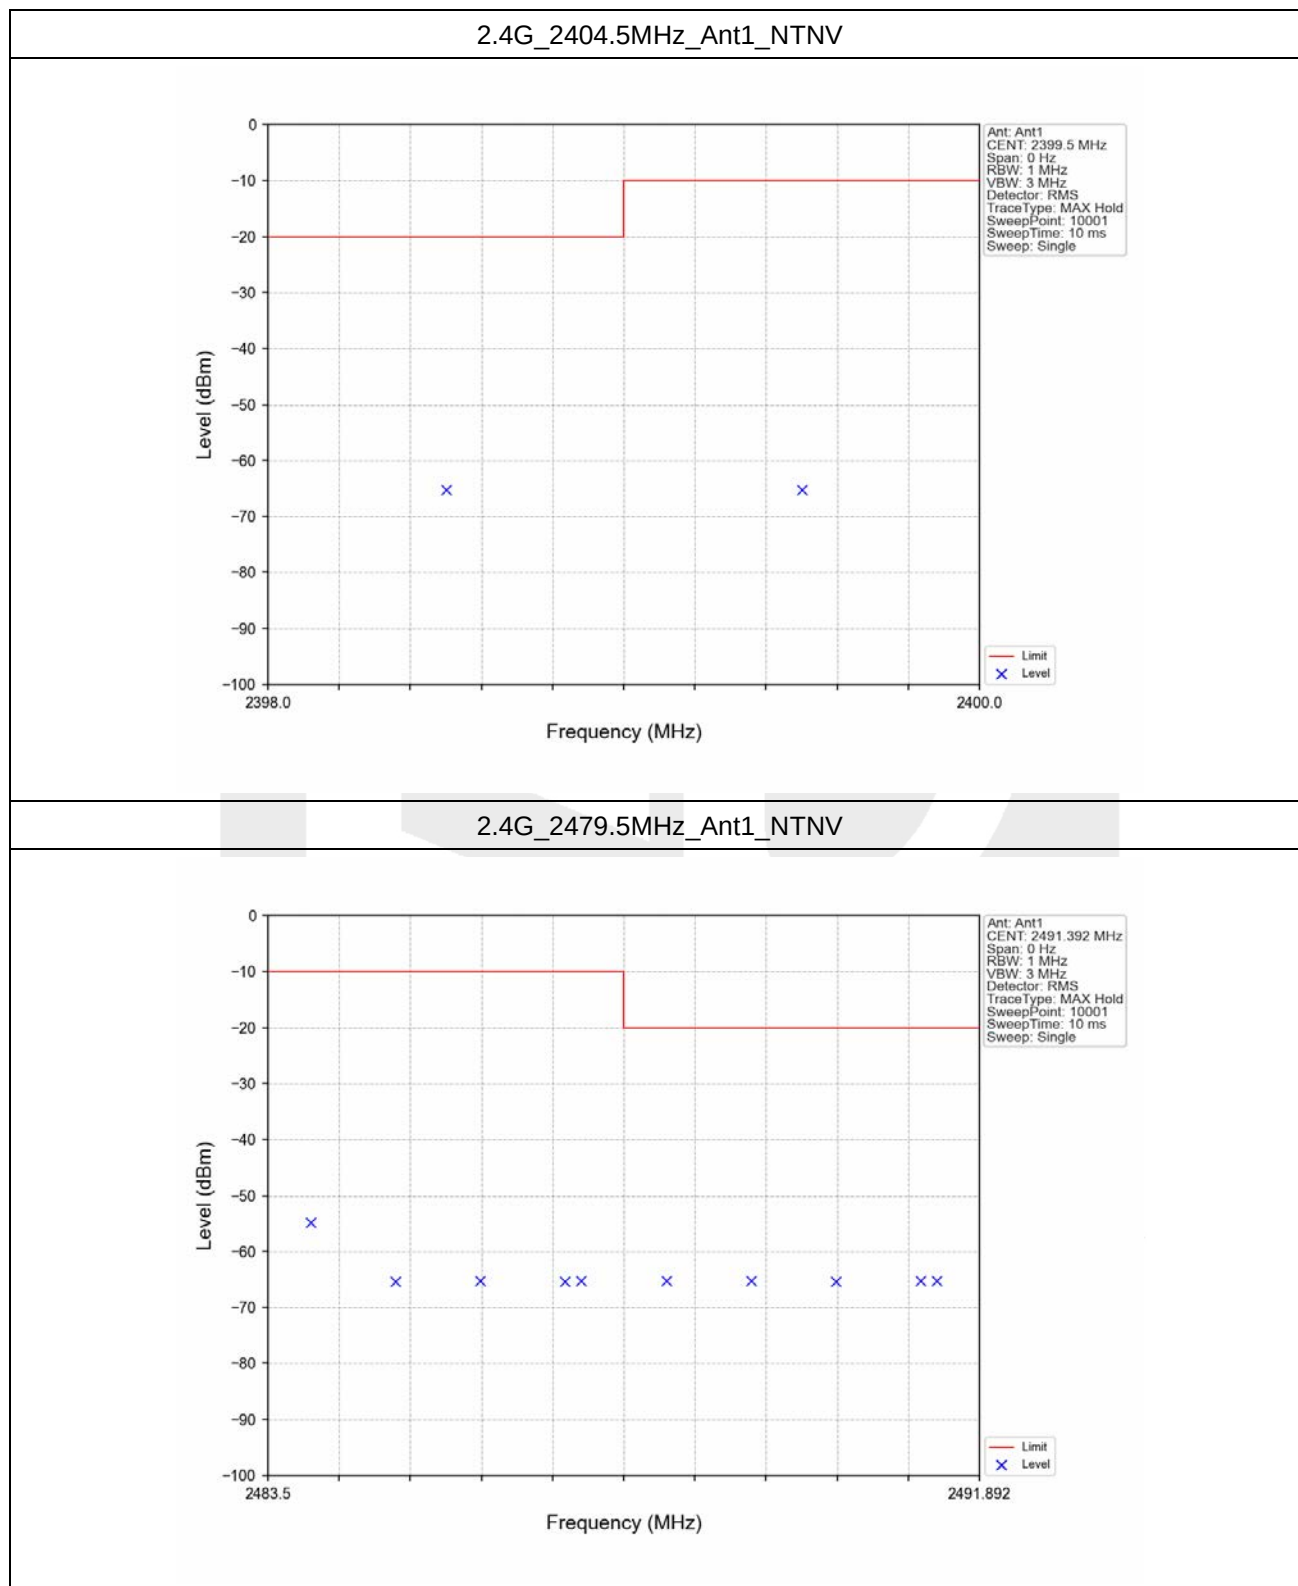

5. Transmitter Unwanted Emissions In The Spurious Domain


5.1 Test Result

5.1.1 TxSe

ENV	Mode	TX Type	Frequency (MHz)	ANT	Test Result	Limit	Verdict
NTNV	2.4G	SISO	2404.5	1	Refer To Test Graph		Pass
			2479.5	1	Refer To Test Graph		Pass

5.2 Test Graph

5.2.1 TxSe

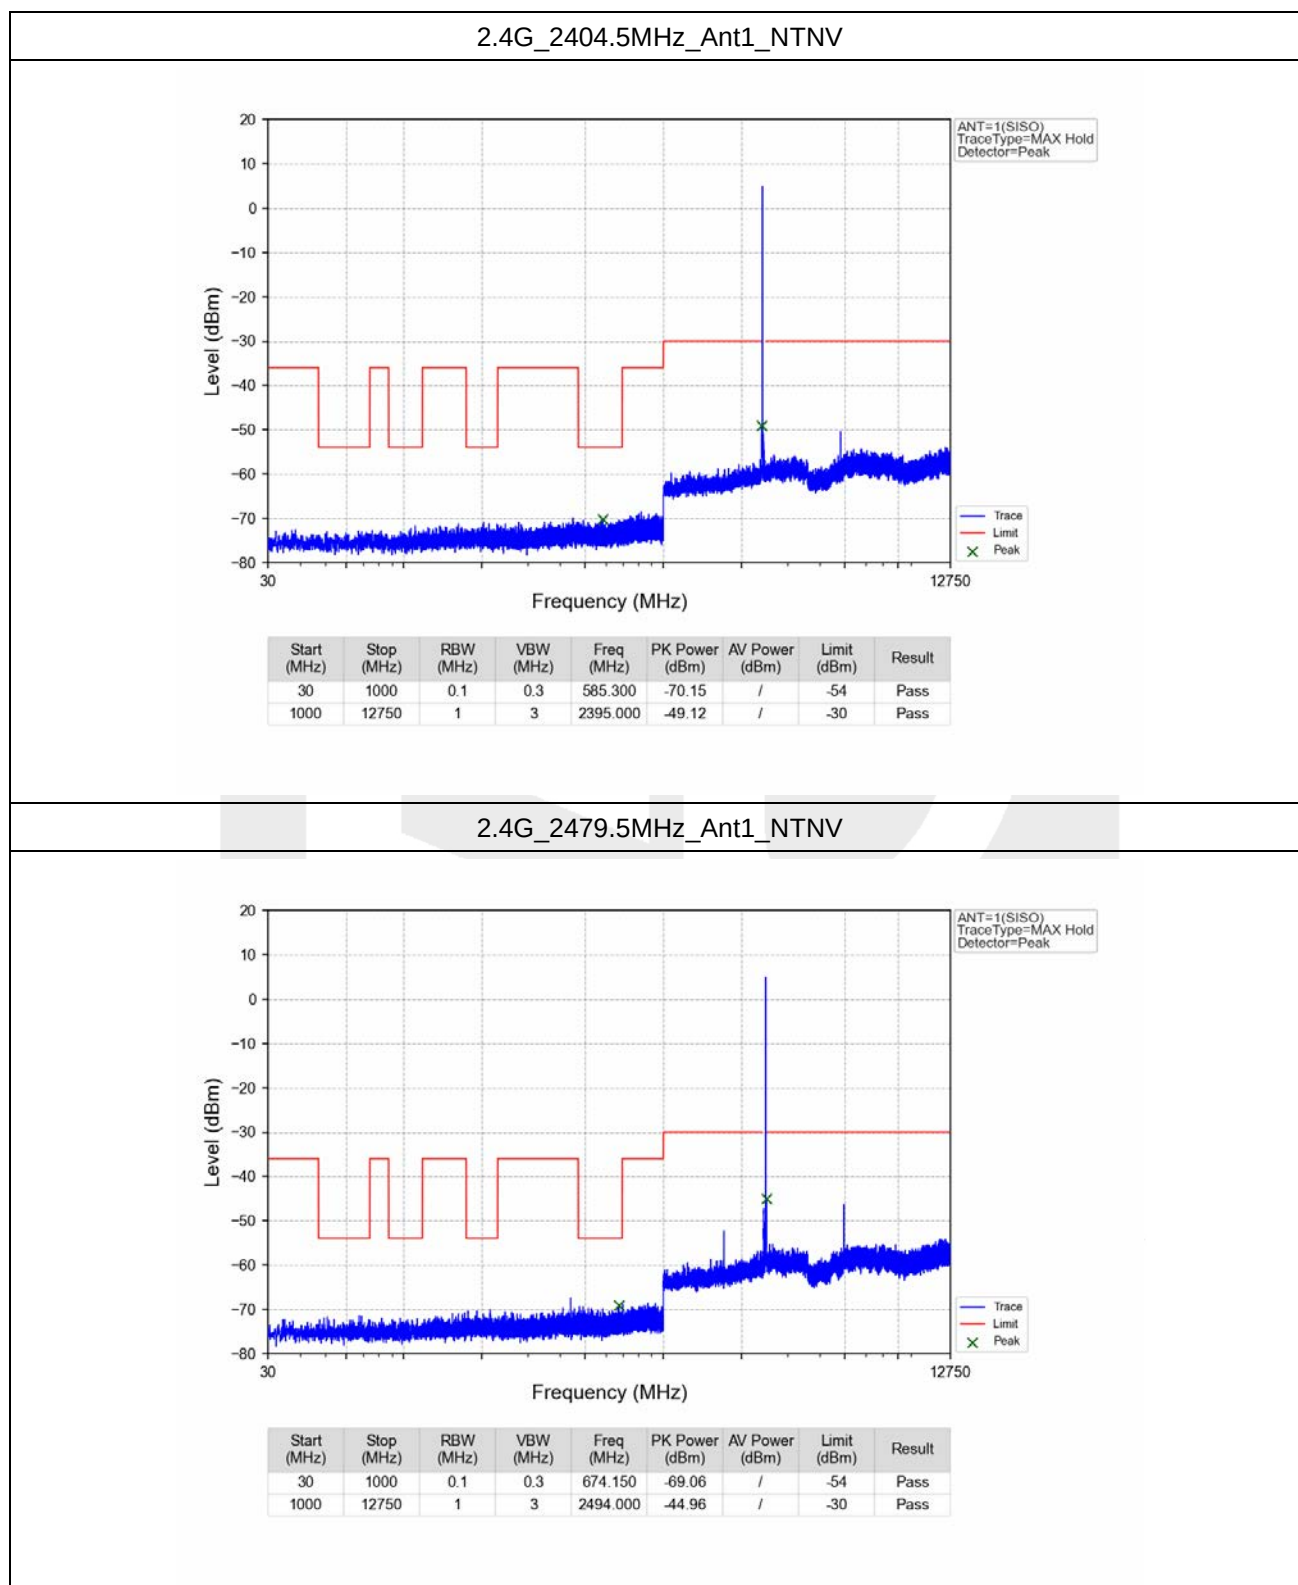

6. Receiver Spurious Emissions


6.1 Test Result

6.1.1 RxSe

ENV	Mode	TX Type	Frequency (MHz)	ANT	Test Result	Limit	Verdict
NTNV	2.4G	SISO	2404.5	1	Refer To Test Graph		Pass
			2479.5	1	Refer To Test Graph		Pass

6.2 Test Graph

6.2.1 RxSe

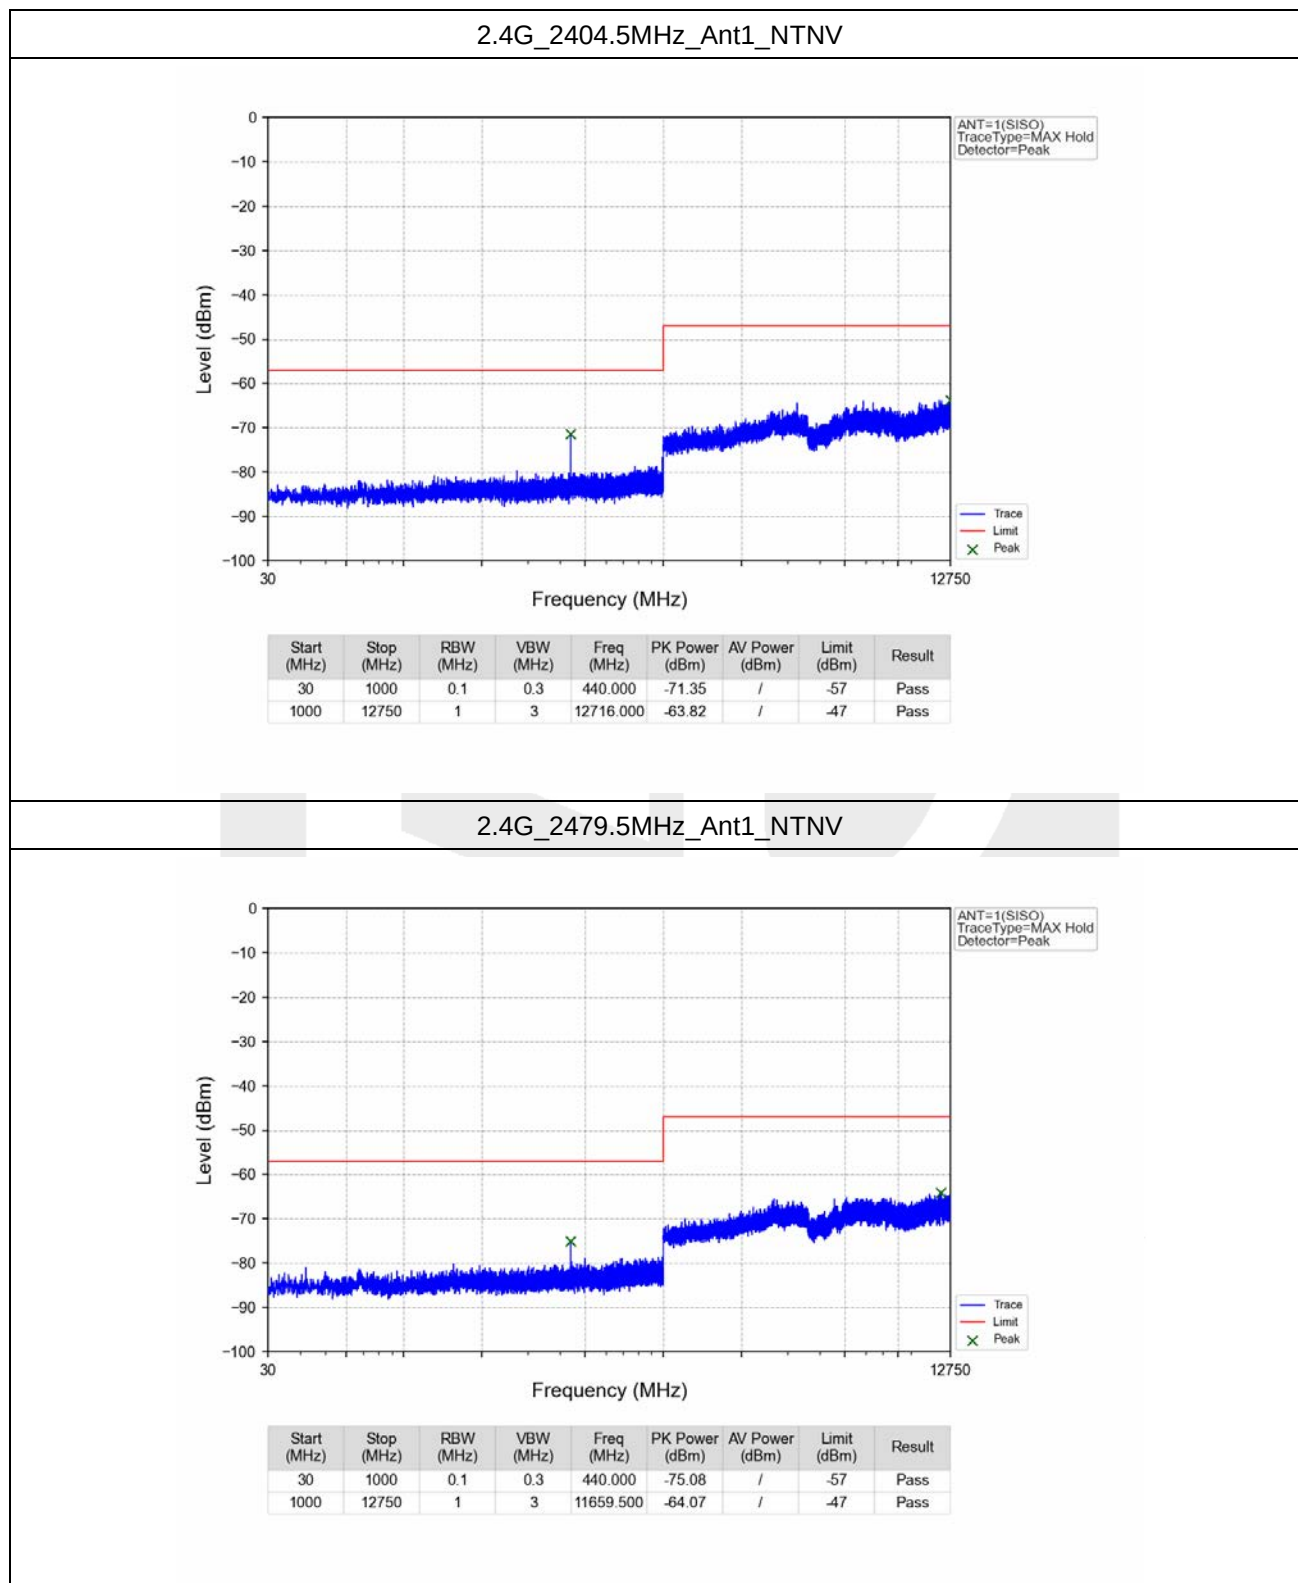

8. Receiver Blocking

Ant1									
ENV	Mode	TX Type	Frequency (MHz)	Wanted signal level (dBm)	Blocking Signal		PER (%)	Limit (%)	Verdict
					Frequency (MHz)	Power (dBm)			
NTNV	GFSK	SISO	2402	-66.92	2380	-31.00	0.09	<=10	Pass
					2504		0.09	<=10	Pass
					2300		0.11	<=10	Pass
					2584		0.09	<=10	Pass
			2480	-66.91	2380	-31.00	0.11	<=10	Pass
					2504		0.09	<=10	Pass
					2300		0.10	<=10	Pass
					2584		0.10	<=10	Pass

Note1: Receiver Category =2.

STATEMENT

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--- End of Report ---