# K27 LITE – Installation

# Prerequisites Requirements




**Address**

Acrelec International
2, rue Louis de Broglie
77 400 Saint-Thibault des Vignes
France

**Contact us**

+33 (0)1 72 03 24 10
info@acrelec.com

**Online**

www.acrelec.com

## TABLE OF CONTENTS

1 VERSIONING ..... 3
2 SCOPE OF THE DOCUMENT ..... 3
3 GENERAL DESCRIPTION OF THE PRODUCT ..... 4
3.1 SIZE AND DIMENSIONS ..... 5
3.2 MANEUVERING SPACE ..... 10
4 K27 LITE LAYOUT ..... 11
4.1 LAYOUT PLAN ..... 11
4.2 FOOTPRINT ..... 12
4.3 CABLE CHANNEL ..... 12
4.4 RECOMMENDED INSTALLATION PRACTICES ..... 13
4.5 CEILING HEIGHTS VERIFICATION ..... 13
4.6 WALL-MOUNTED CONFIGURATION ..... 14
4.6.1 WALLPRINT ..... 15
4.6.2 CABLE CHANNEL ..... 16
5 WIRING ..... 17
5.1 HOW TO CONNECT THE K27 LITE TO THE MAIN ..... 17
5.2 ELECTRICAL PROTECTION / GROUNDING ..... 17
5.3 DESCRIPTION OF INTERFACES: NETWORK, PHONES ..... 17
5.4 INTERFACES SUMMARY ..... 18
6 LOGISTICS ..... 18
6.1 CONDITIONS FOR INTERVENTION ..... 18
6.2 FACILITIES ..... 18
7 ANNEXES ..... 19
8 COPYRIGHTS ..... 19



Acrelec is a trademark of AKSOR - 3 Rue Louis de Broglie – 77400 St Thibaut des Vignes – France - www.acrelec.com

# 1 VERSIONING

| Date | Author | Release | Company | Comment |
|---|---|---|---|---|
| 25/08/2023 | POUX Steven | 00 | Acrelec | Creation |
| 28/11/2023 | BIABIANY Joey | 01 | Acrelec | Update (add new component or Option) |
| 15/02/2024 | BIABIANY Joey | 02 | Acrelec | Update (add wall configuration) |
| 25/09/2024 | BIABIANY Joey | 03 | Acrelec | Update add new KBOX |
| 08/10/2024 | BIABIANY Joey | 3.1 | Acrelec | Update (add dimension) |
| 19/11/2024 | BIABIANY Joey | 3.2 | Acrelec | Update (new view for wall configuration) |

# 2 SCOPE OF THE DOCUMENT

The topic of this document is to define all the requirements that are necessary before installing the K27 Lite in the restaurant.

Any modification of the product described in this document has to be approved by Acrelec Manufacturing before implementation.




Acrelec is a trademark of AKSOR - 3 Rue Louis de Broglie – 77400 St Thibaut des Vignes – France - www.acrelec.com


## 3 GENERAL DESCRIPTION OF THE PRODUCT

***Single side:***


***Printer integrated on the foot (ADA/PMR) + eft + foot cover***

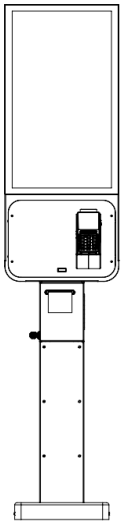

Front view




Side view




Top view


***Standard foot (ADA/PMR) version + foot cover***



Front view



Side view




Top view


***Standard foot version (ADA/PMR) + Printer box version + eft + foot cover***



Front view



Side view




Top view




Acrelec is a trademark of AKSOR - 3 Rue Louis de Broglie – 77400 St Thibaut des Vignes – France - www.acrelec.com


***Standard foot version (ADA/PMR) + Printer box version + eft + foot cover+ support flag***

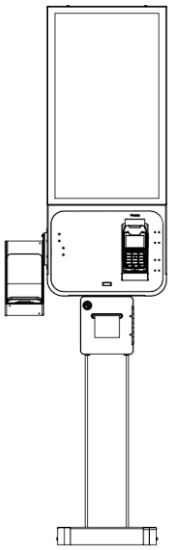

Front view




Side view




Top view


***Wall configuration + eft***

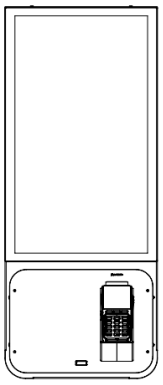

Front view



Side view





Top view

## 3.1 SIZE AND DIMENSIONS

***Single side:***

***Printer integrated on the foot (PMR)+ eft + foot cover***

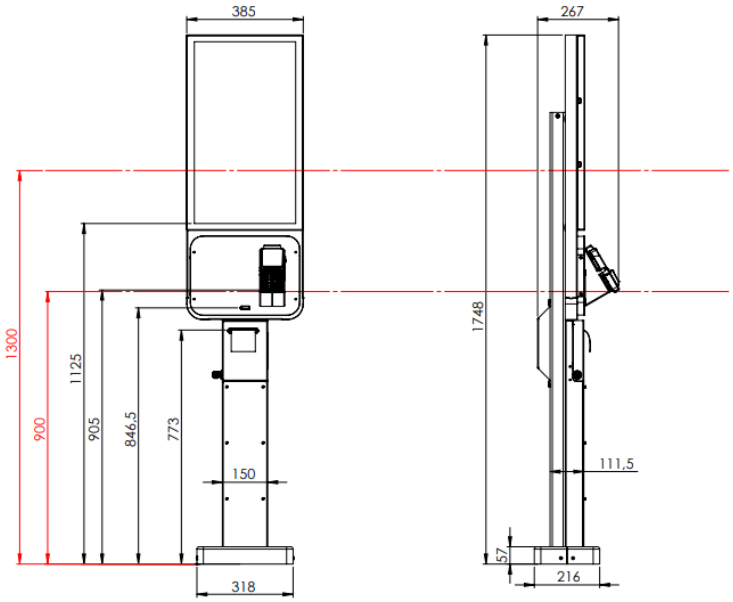






Acrelec is a trademark of AKSOR - 3 Rue Louis de Broglie – 77400 St Thibaut des Vignes – France - www.acrelec.com

***Printer integrated on the foot (ADA)+ eft + foot cover***

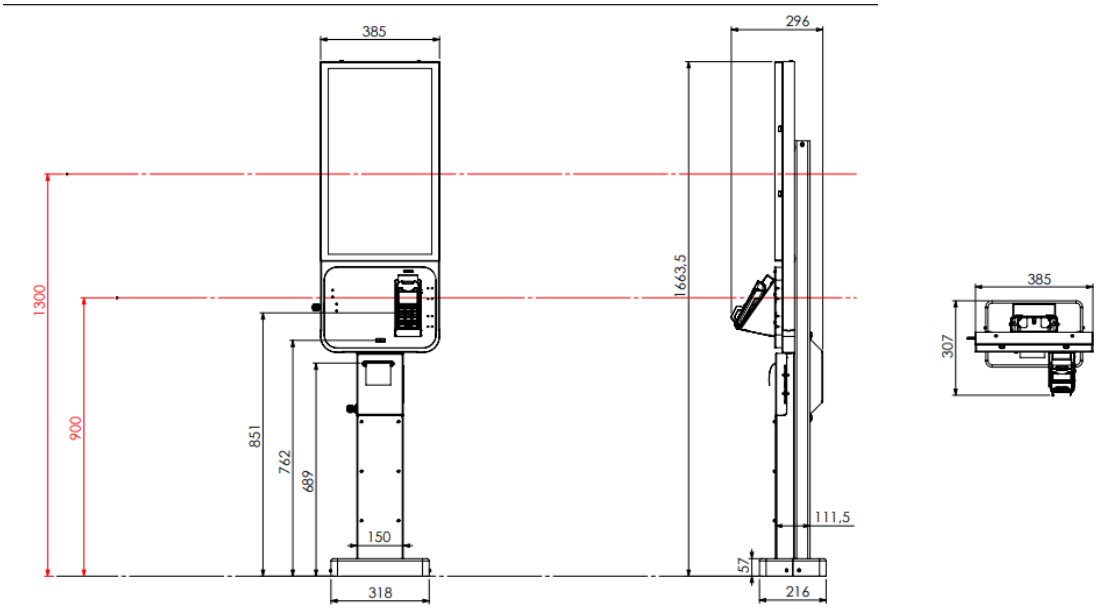



***Standard foot version (PMR) + foot cover***

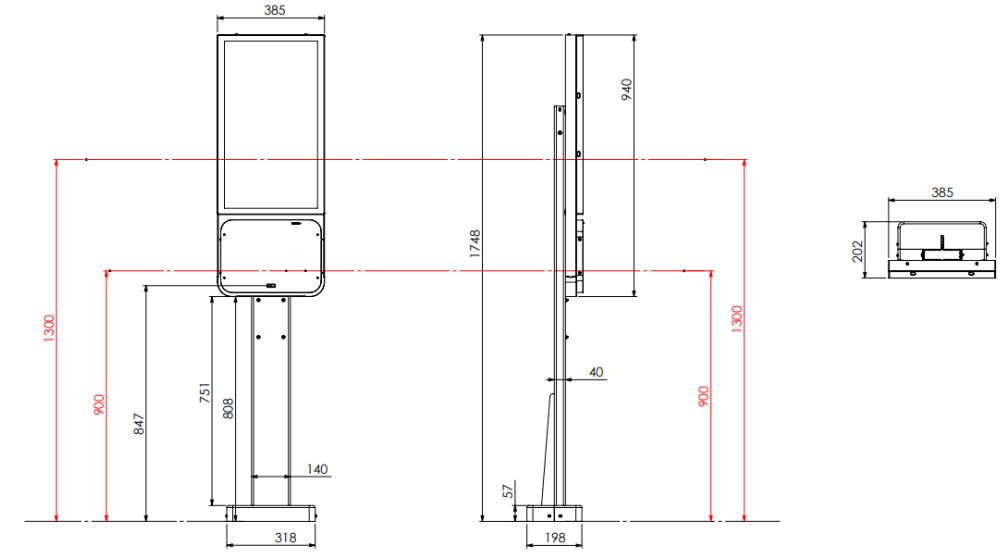





Acrelec is a trademark of AKSOR - 3 Rue Louis de Broglie – 77400 St Thibaut des Vignes – France - www.acrelec.com

***Standard foot version (ADA) + foot cover***

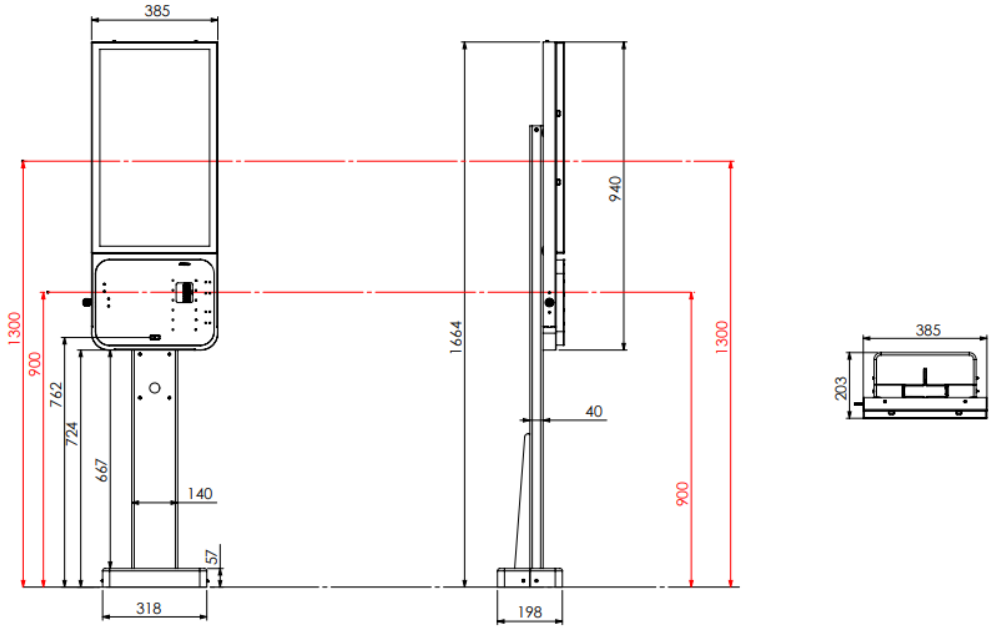



***Standard foot version (PMR) + Printer box version + eft + foot cover***

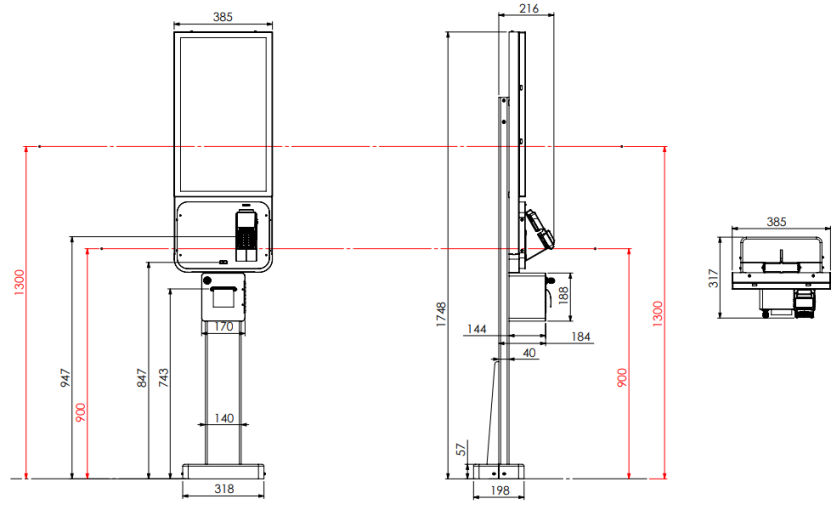





Acrelec is a trademark of AKSOR - 3 Rue Louis de Broglie – 77400 St Thibaut des Vignes – France - www.acrelec.com

***Standard foot version (ADA) + Printer box version + eft + foot cover***

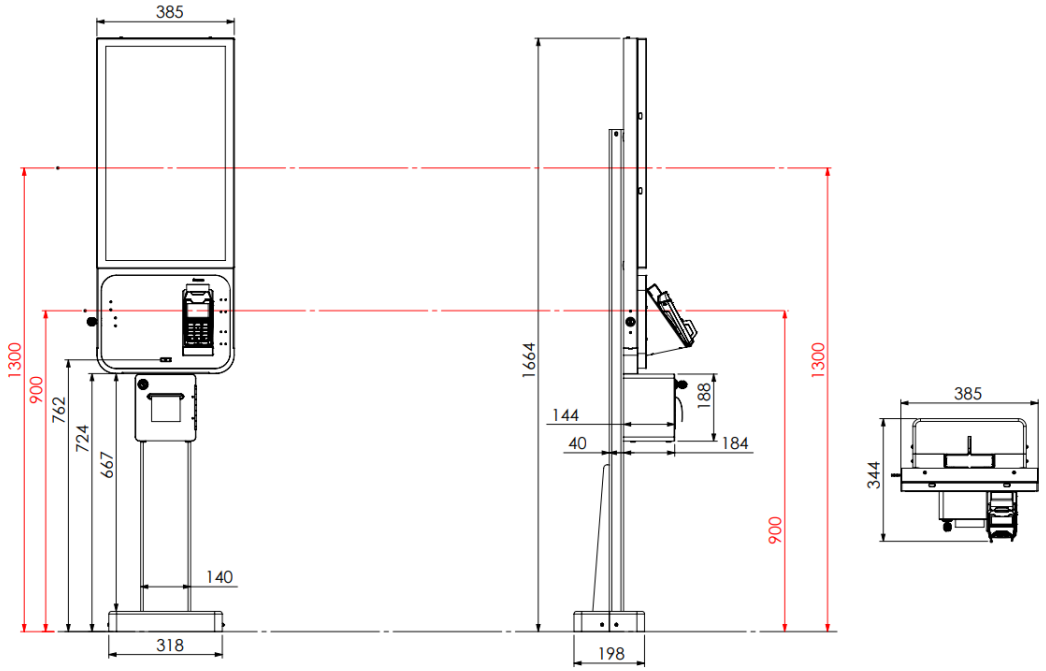



***Standard foot version (PMR)+ Printer box version + eft + foot cover + support flag***

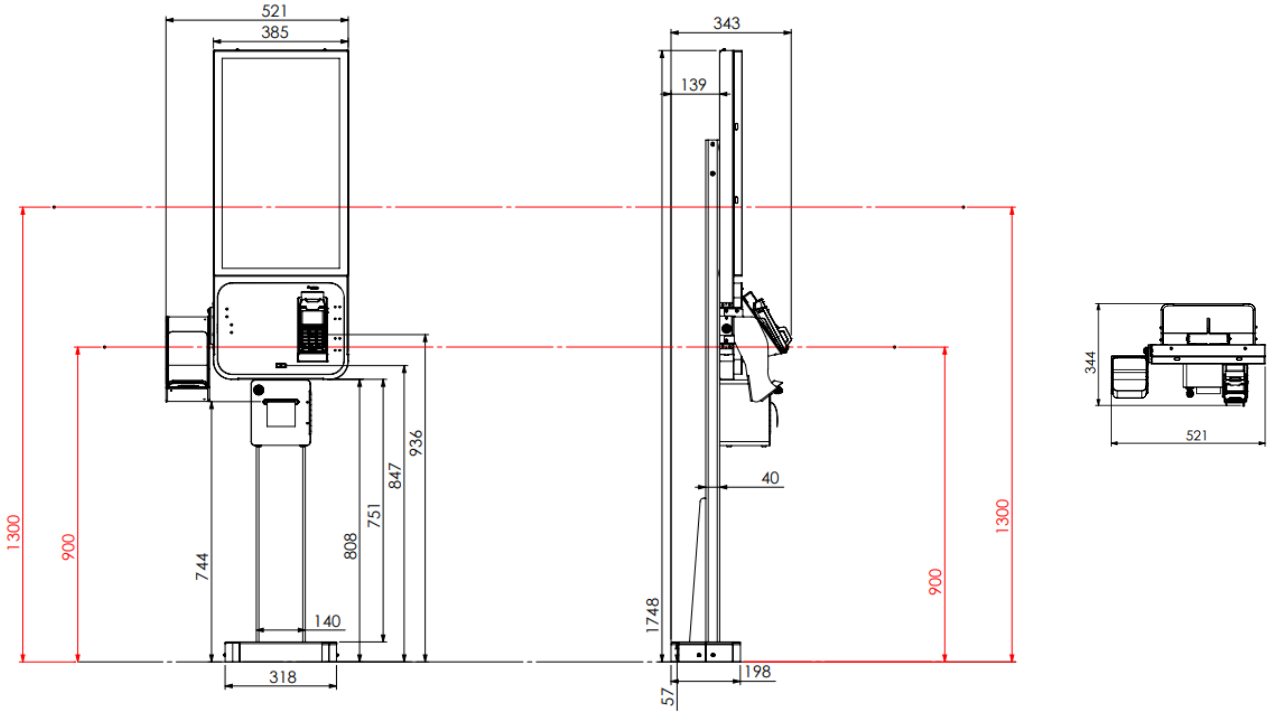





Acrelec is a trademark of AKSOR - 3 Rue Louis de Broglie – 77400 St Thibaut des Vignes – France - www.acrelec.com

***Wall configuration + eft***

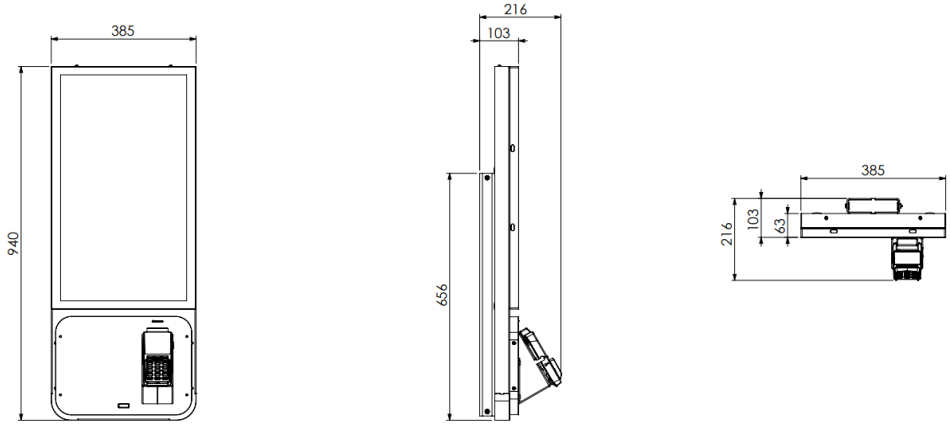


***For Wall configuration printer dimensions***

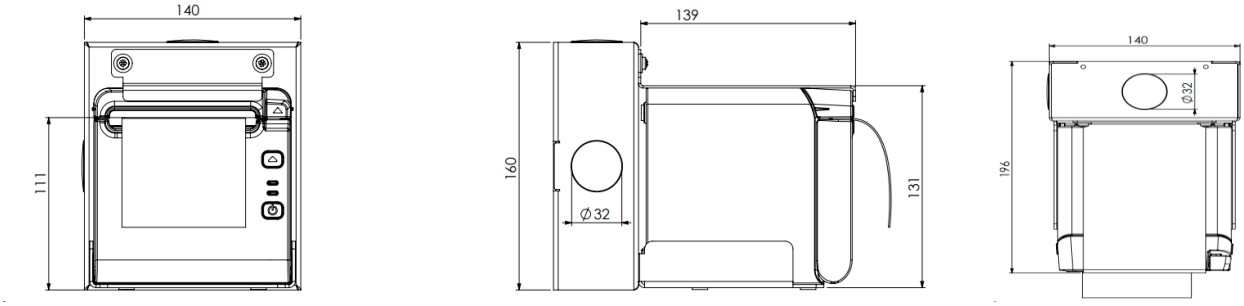





Acrelec is a trademark of AKSOR - 3 Rue Louis de Broglie – 77400 St Thibaut des Vignes – France - www.acrelec.com

**Prior to any manipulation of the devices, shut off the main power supply using only Building main circuit breaker.**


## 3.2 MANEUVERING SPACE



Space for maneuver will have to be defined, in order to ensure the good circulation of the clients.
The space required will be 1500mm.
The K27 LITE must be at 200 mm of the wall to give access to remove the rear side for maintenance if necessary




*Nota: With the ceiling pole option*

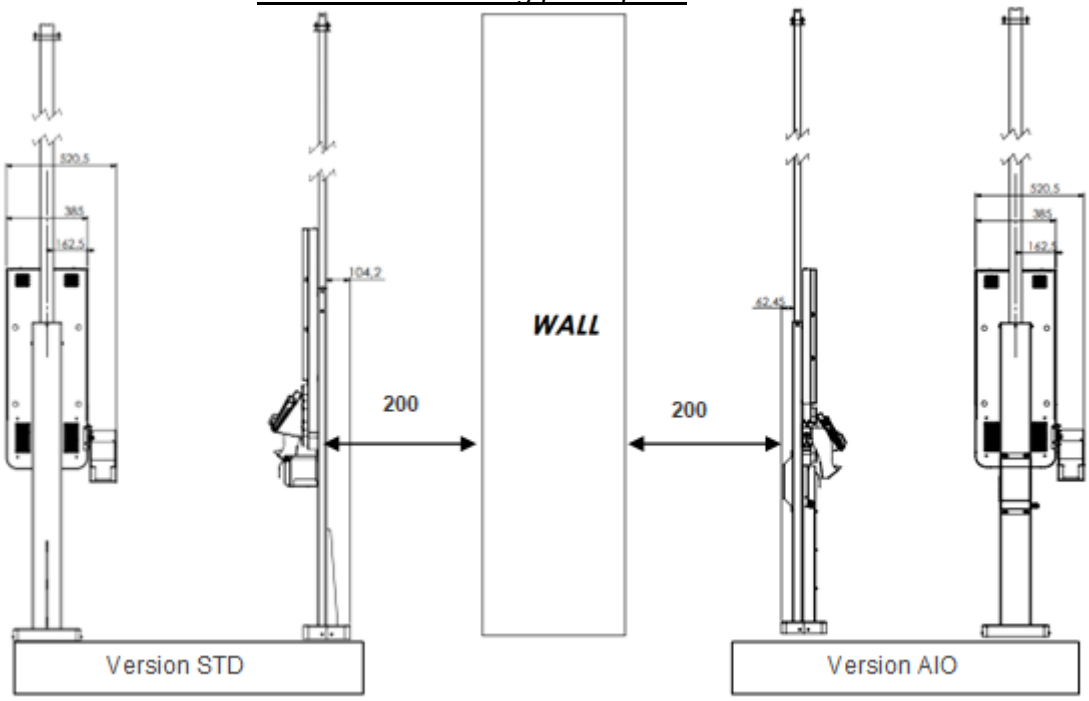


Be careful, if the K27 Lite are positioned side by side, maneuver zones can overlap each other.



Acrelec is a trademark of AKSOR - 3 Rue Louis de Broglie – 77400 St Thibaut des Vignes – France - www.acrelec.com

# 4 K27 LITE LAYOUT

## 4.1 LAYOUT PLAN

Construction of the supporting for the K27 Lite is at the customer's expense.

**The floor must support a weight of 200kg minimum**





**Note**:

- The floor must be perfectly flat and level with respect to the ground.




**OK**

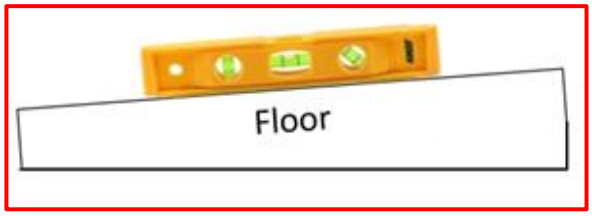


**NOK**

The required drilling depth (minimum 20 cm) must be compatible with the condition and thickness of the floor.

**In the event that the floor does not respect with the prerequisites mentioned above, it will be necessary to involve a qualified worker in order to do work and to respect the prerequisites**

***For each K27 Lite:***

2 electic conduit for:


- Power supply
- Network



Acrelec is a trademark of AKSOR - 3 Rue Louis de Broglie – 77400 St Thibaut des Vignes – France - www.acrelec.com

## 4.2 FOOTPRINT


Once the location of the K27 Lite is determined, according to the customer need and the constraints of setting-up (opening of doors, PMR access, etc.). It is necessary to proceed to the drilling of the ground according to the template on the ground described below:

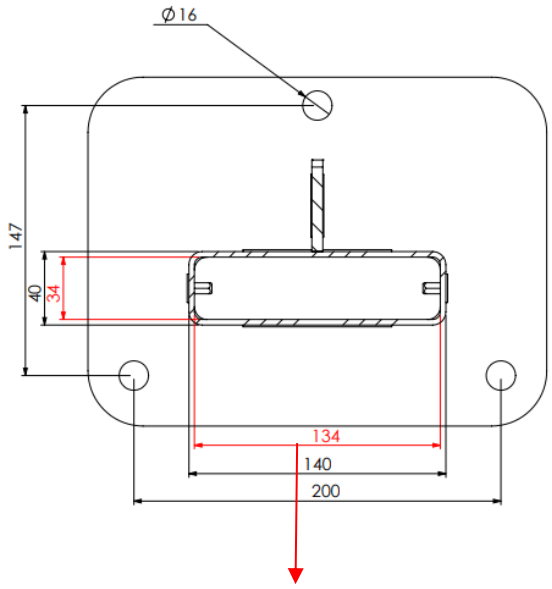


**Area of the arrival of the cable: 134 x34mm**

## 4.3 CABLE CHANNEL

The holes diameter must be big enough to allow wires and cables to be installed, according to local standards. Cables and wires will go into the K27 Lite through the foot.

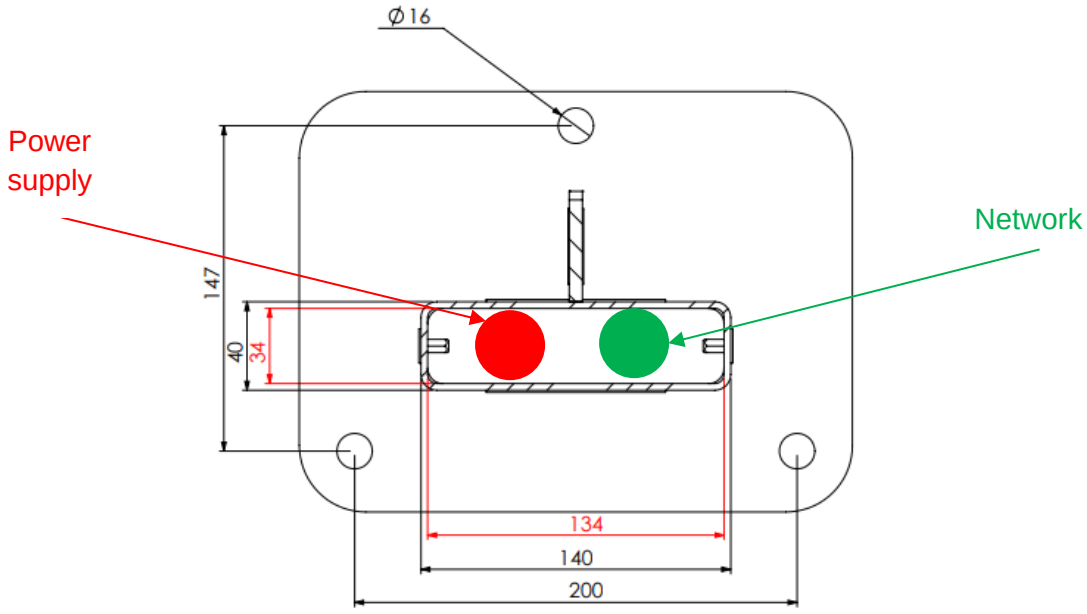




Acrelec is a trademark of AKSOR - 3 Rue Louis de Broglie – 77400 St Thibaut des Vignes – France - www.acrelec.com


## 4.4 RECOMMENDED INSTALLATION PRACTICES

Positioning of the K27 Lite and delivery counter has to be validated by restaurant director. Acrelec can give some advice but not the validation. In order to help you in your choices, here are some points that we see as important to follow:

- Locate the K27 Lite in the main stream of customers (the place where customer usually do the queue to the desk). Between the entrance and the counter, K27 Lite have to be as visible as possible.
- If space allows it, locate the K27 Lite together, one next by the other.
- Make the delivery desk visible for the client while he is placing its order (the customer may have to turn back).


## 4.5 CEILING HEIGHTS VERIFICATION

Ceiling Pole (Alu)

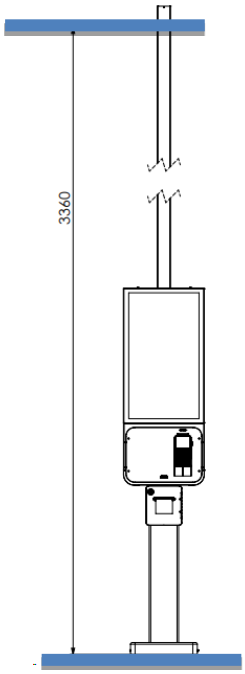


336 cm

Ceiling Pole + Extension

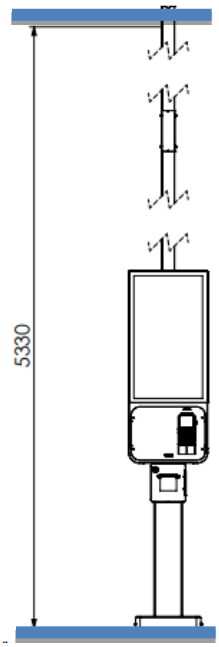


533 cm

Maximum height authorized under ceiling depending on the configuration of the wire ceiling heights (when supply is from above):
Note that these dimensions are for a PMR foot configuration remove -8.4 cm for the ADA version

The K27 Lite is fitted with a cable conduit.

Ceiling fixation is a gain in term of electrical cost.



Acrelec is a trademark of AKSOR - 3 Rue Louis de Broglie – 77400 St Thibaut des Vignes – France - www.acrelec.com

## 4.6 WALL-MOUNTED CONFIGURATION

***Prerequisites:***


• The wall must be capable of withstanding a load of 100 Kg

• The cables must be made available in the ceiling - the Acrelec technician will lead the cables through the wall


• The wall must not be full so as to bring the cables

***Dimensions***

***Configuration 1 (PMR position):***

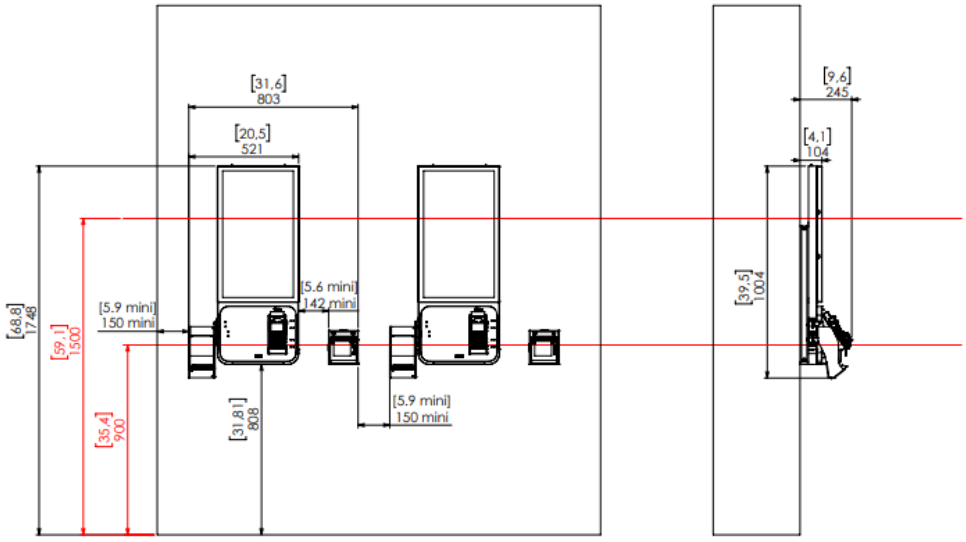


***Configuration 2 (ADA position):***

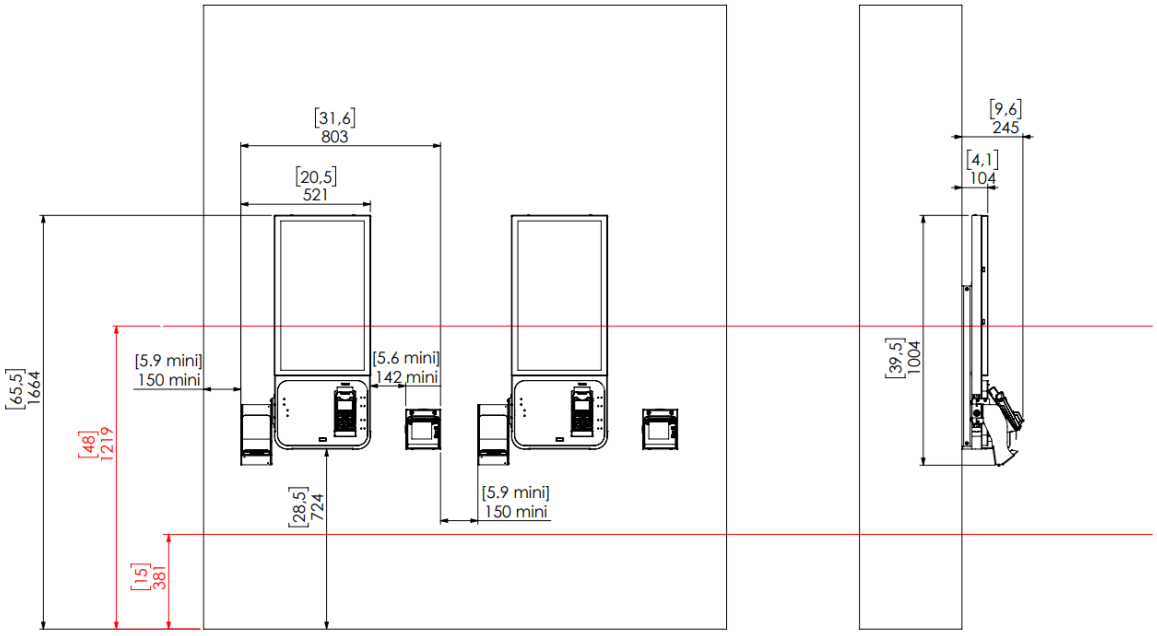





Acrelec is a trademark of AKSOR - 3 Rue Louis de Broglie – 77400 St Thibaut des Vignes – France - www.acrelec.com


### 4.6.1 WALLPRINT

Once the location of the K27 Lite is determined, according to the customer need and the constraints of setting-up (opening of doors, PMR access, etc.). It is necessary to proceed to the drilling of the wall according to the template on the wall described below:

***Configuration 1 (PMR position):***

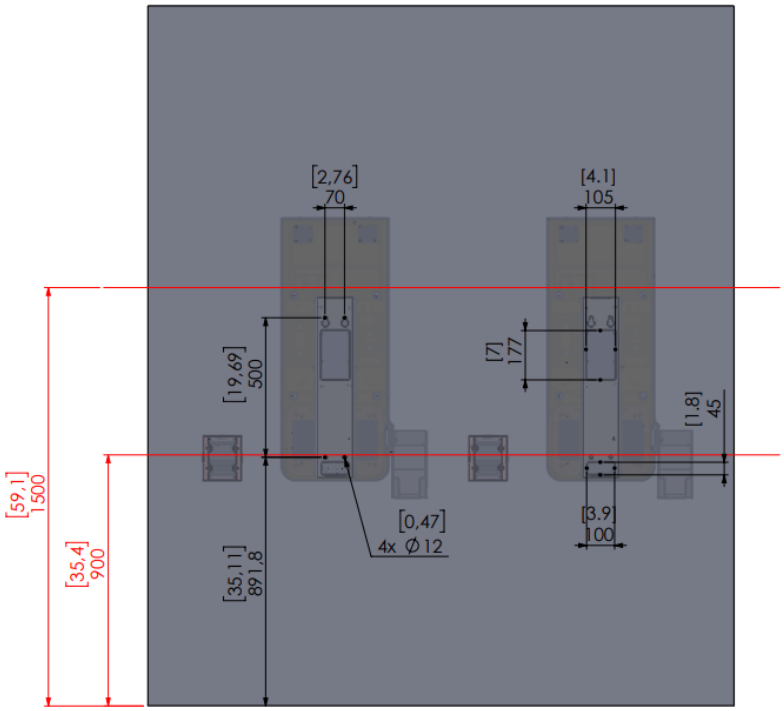


***Configuration 2 (ADA position):***

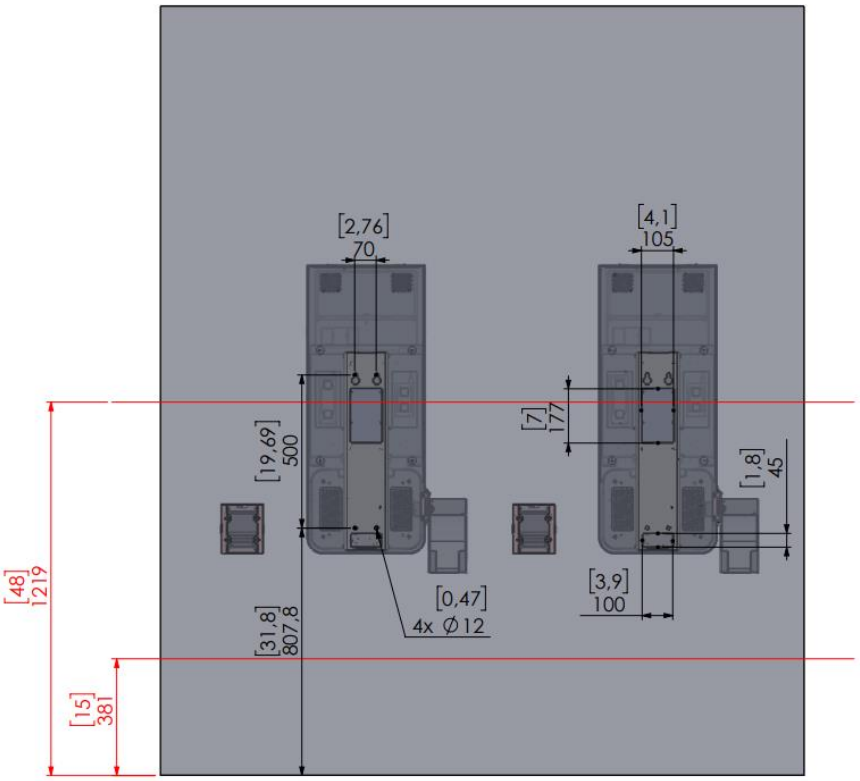





Acrelec is a trademark of AKSOR - 3 Rue Louis de Broglie – 77400 St Thibaut des Vignes – France - www.acrelec.com

### 4.6.2 CABLE CHANNEL

The holes diameter must be big enough to allow wires and cables to be installed, according to local standards. Cables and wires will go into the K27 Lite through the wall.

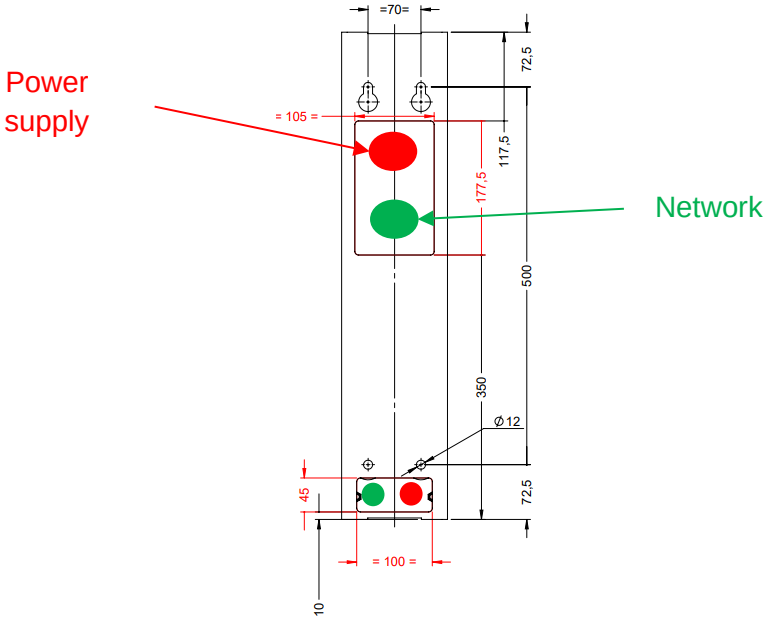




Acrelec is a trademark of AKSOR - 3 Rue Louis de Broglie – 77400 St Thibaut des Vignes – France - www.acrelec.com

# 5 WIRING

## 5.1 HOW TO CONNECT THE K27 LITE TO THE MAIN

The K27 Lite is delivered with a power cable fitted (as an option) with a plug, country compliant. The wiring is done directly through a socket available close to the K27 Lite, located in the ceiling, in the ground or in the wall according to the configuration. The socket must comply with local standard (differential protection, cable gauge, circuit-breaker caliber…).

## 5.2 ELECTRICAL PROTECTION / GROUNDING

The equipment is class 1 and must be grounded.
The K27 Lite must be powered through a plug or terminals protected by a circuit-breaker, maximum current 16 A (20A for USA and Canada), and with a differential protection.
Circuit-breaker and cables must be installed according to local regional standards: wires gauge (min. AWG 16/1.5mm² for Europe…), breaking capacity…

## 5.3 DESCRIPTION OF INTERFACES: NETWORK, PHONES…

The K27 Lite is delivered with 2 Ethernet cable per side, RJ45, for network interface + EFT device.



Acrelec is a trademark of AKSOR - 3 Rue Louis de Broglie – 77400 St Thibaut des Vignes – France - www.acrelec.com

### 5.4 INTERFACES SUMMARY

| K27 Lite type | Needs | Quantity (Single side) |
|---|---|---|
| Ground / wall / ceiling | Power Phase/neutral + ground | 1 |
| | RJ45 | 2 |

- Power socket 220V, 10A min, in the ceiling, in the ground or in the wall, powered by the main electrical cabinet
- RJ45 plug per side, cat. 5E or 6, fitted with RJ45 female plugs on the K27 Lite side, and connected to the network on the other side.
- The network cable must be connected to the distribution cabinet.

## 6 LOGISTICS

### 6.1 CONDITIONS FOR INTERVENTION

The conditions for installation must be defined together between installer and customer. Date and time must be confirmed before installation. If specific details have to be taken into account, they must be written on the pre-visit report.

The customer must check that the K27 Lite can be moved to the installation point with standard handling devices (forklift…). If not (stairs, unsuitable door…), he will manage all required logistic resources, and inform the installer.

### 6.2 FACILITIES

During installation, following facilities must be available:

- Power supply for the K27 Lite itself, and for installation tools (drillers …).
- Network connection should be connected to the main network.
- If requested, phone lines must be available and ready to run
- If payment devices have to be installed on site and provided by the customer, the customer must warranty that goods are delivered on time, and that they correspond to the requested items.
- In any case, the customer must check that all requested parameters of EFT system are available
- Banking contracts (if necessary)
- If different installers have to collaborate, the customer must insure that coordination will be good. Write on the pre-visit report specific conditions.



Acrelec is a trademark of AKSOR - 3 Rue Louis de Broglie – 77400 St Thibaut des Vignes – France - www.acrelec.com

# 7 ANNEXES

***Pre-visit report***

The pre-visit leads to a report, available in the project documentation.
This document states that all mandatory items for the solution are met and will be available for installation. This document must be signed by the customer.

# 8 COPYRIGHTS

© 2024, AKSOR – All rights reserved

No part of this publication may be reproduced, photocopied, stored on a retrieval system, or transmitted without the express prior written consent of the publisher.

Information in this document is subject to change without notice. Acrelec shall not be liable for errors contained herein.

AKSOR SAS
3 rue Louis de Broglie
77400 St-Thibault des Vignes
France